




Test Mode : 2TX 11be EHT80 CH106 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

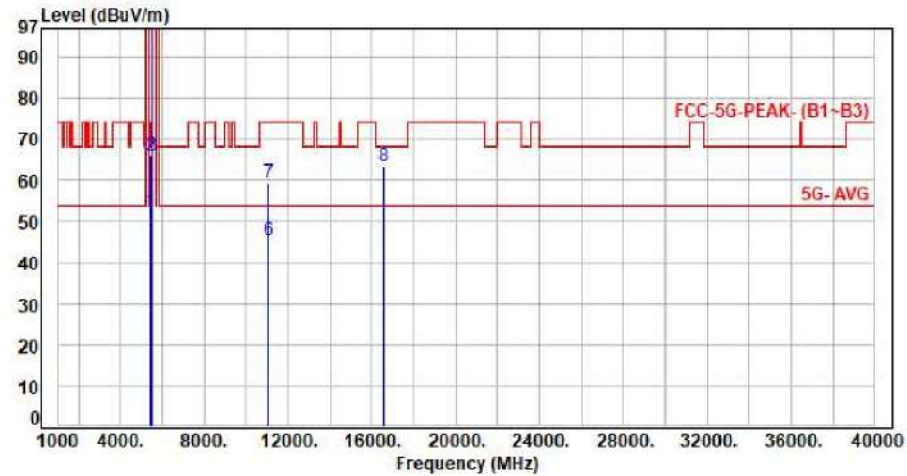

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	44.51	52.23	54.00	-1.77	Average	105	55	P
2	5460.00	7.72	58.40	66.12	74.00	-7.88	Peak	105	55	P
3	5470.00	7.72	58.29	66.01	68.20	-2.19	Peak	105	55	P
4	5530.00	7.65	96.55	104.20	200.00	-95.80	Average	105	55	P
5	5530.00	7.65	108.58	116.23	200.00	-83.77	Peak	105	55	P
6	11060.00	15.92	29.58	45.50	54.00	-8.50	Average	100	152	P
7	11060.00	15.92	43.43	59.35	74.00	-14.65	Peak	100	152	P
8	16590.00	21.06	42.39	63.45	68.20	-4.75	Peak	100	224	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT80 CH106 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

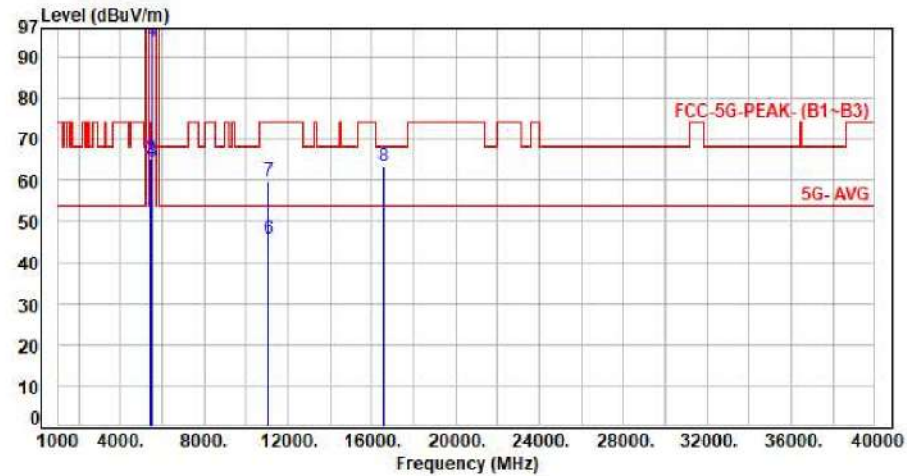

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	43.19	50.91	54.00	-3.09	Average	111	42	P
2	5460.00	7.72	57.46	65.18	74.00	-8.82	Peak	111	42	P
3	5470.00	7.72	56.73	64.45	68.20	-3.75	Peak	111	42	P
4	5530.00	7.65	85.90	93.55	200.00	-106.45	Average	111	42	P
5	5530.00	7.65	99.01	106.66	200.00	-93.34	Peak	111	42	P
6	11060.00	15.92	29.73	45.65	54.00	-8.35	Average	100	27	P
7	11060.00	15.92	43.71	59.63	74.00	-14.37	Peak	100	27	P
8	16590.00	21.06	42.38	63.44	68.20	-4.76	Peak	100	143	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT80 CH122 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

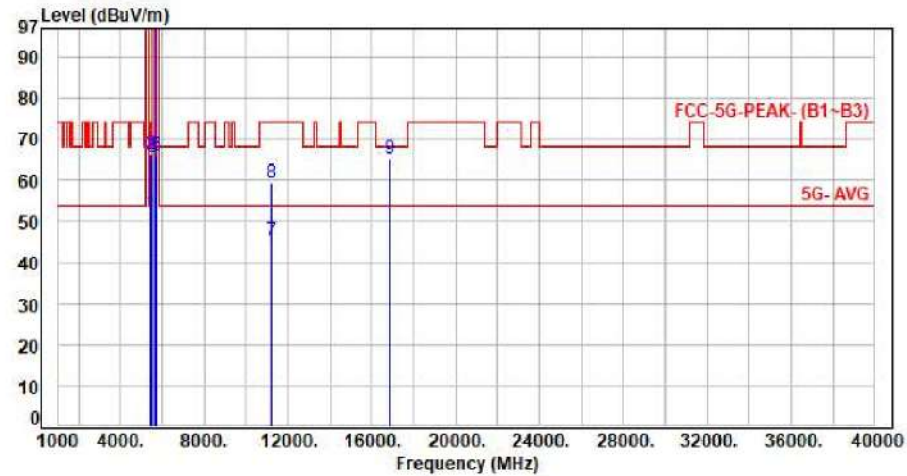

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	44.18	51.90	54.00	-2.10	Average	109	53	P
2	5460.00	7.72	58.69	66.41	74.00	-7.59	Peak	109	53	P
3	5470.00	7.72	57.99	65.71	68.20	-2.49	Peak	109	53	P
4	5610.00	7.48	97.87	105.35	200.00	-94.65	Average	109	53	P
5	5610.00	7.48	110.11	117.59	200.00	-82.41	Peak	109	53	P
6	5725.00	7.39	58.70	66.09	68.20	-2.11	Peak	109	53	P
7	11220.00	16.19	29.29	45.48	54.00	-8.52	Average	100	158	P
8	11220.00	16.19	43.30	59.49	74.00	-14.51	Peak	100	158	P
9	16830.00	22.77	42.43	65.20	68.20	-3.00	Peak	100	226	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT80 CH122 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

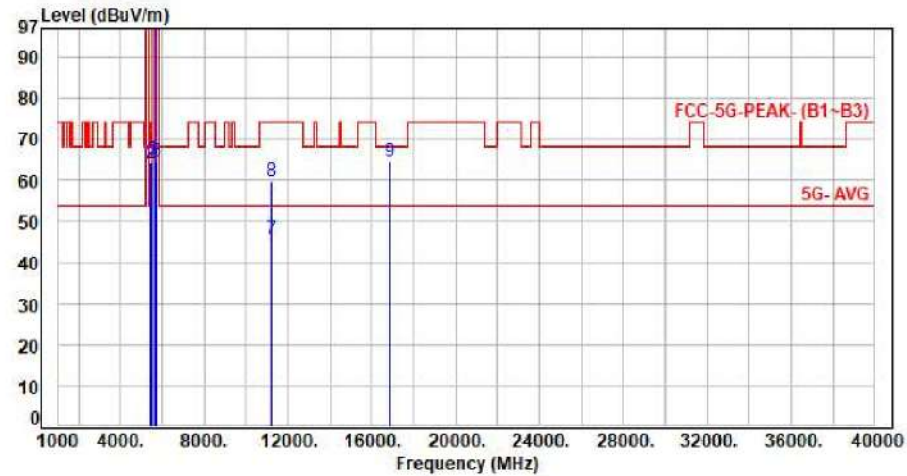

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	43.19	50.91	54.00	-3.09	Average	100	24	P
2	5460.00	7.72	56.56	64.28	74.00	-9.72	Peak	100	24	P
3	5470.00	7.72	57.06	64.78	68.20	-3.42	Peak	100	24	P
4	5610.00	7.48	87.80	95.28	200.00	-104.72	Average	100	24	P
5	5610.00	7.48	99.92	107.40	200.00	-92.60	Peak	100	24	P
6	5725.00	7.39	57.10	64.49	68.20	-3.71	Peak	100	24	P
7	11220.00	16.19	29.48	45.67	54.00	-8.33	Average	100	29	P
8	11220.00	16.19	43.47	59.66	74.00	-14.34	Peak	100	29	P
9	16830.00	22.77	41.94	64.71	68.20	-3.49	Peak	100	148	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT160 CH114 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

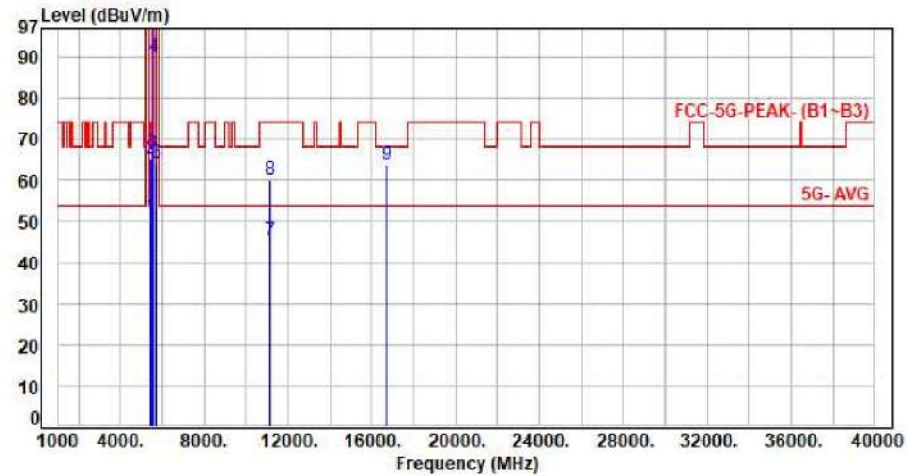

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	43.46	51.18	54.00	-2.82	Average	117	53	P
2	5460.00	7.72	57.47	65.19	74.00	-8.81	Peak	117	53	P
3	5470.00	7.72	59.00	66.72	68.20	-1.48	Peak	117	53	P
4	5570.00	7.55	82.51	90.06	200.00	-109.94	Average	117	53	P
5	5570.00	7.55	94.12	101.67	200.00	-98.33	Peak	117	53	P
6	5725.00	7.39	56.91	64.30	68.20	-3.90	Peak	117	53	P
7	11140.00	16.04	29.36	45.40	54.00	-8.60	Average	100	154	P
8	11140.00	16.04	43.92	59.96	74.00	-14.04	Peak	100	154	P
9	16710.00	21.94	41.87	63.81	68.20	-4.39	Peak	100	227	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT160 CH114 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

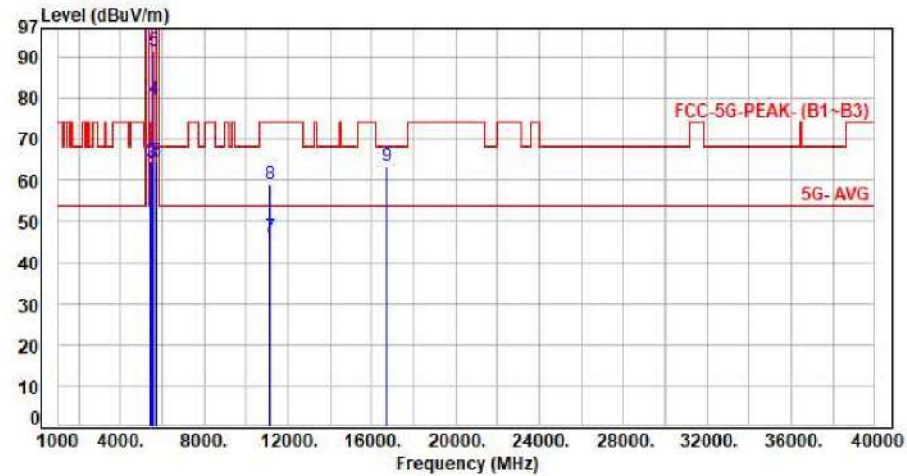

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	43.17	50.89	54.00	-3.11	Average	119	47	P
2	5460.00	7.72	56.79	64.51	74.00	-9.49	Peak	119	47	P
3	5470.00	7.72	56.53	64.25	68.20	-3.95	Peak	119	47	P
4	5570.00	7.55	71.97	79.52	200.00	-120.48	Average	119	47	P
5	5570.00	7.55	83.77	91.32	200.00	-108.68	Peak	119	47	P
6	5725.00	7.39	57.21	64.60	68.20	-3.60	Peak	119	47	P
7	11140.00	16.04	29.96	46.00	54.00	-8.00	Average	100	29	P
8	11140.00	16.04	42.87	58.91	74.00	-15.09	Peak	100	29	P
9	16710.00	21.94	41.54	63.48	68.20	-4.72	Peak	100	150	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH149 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

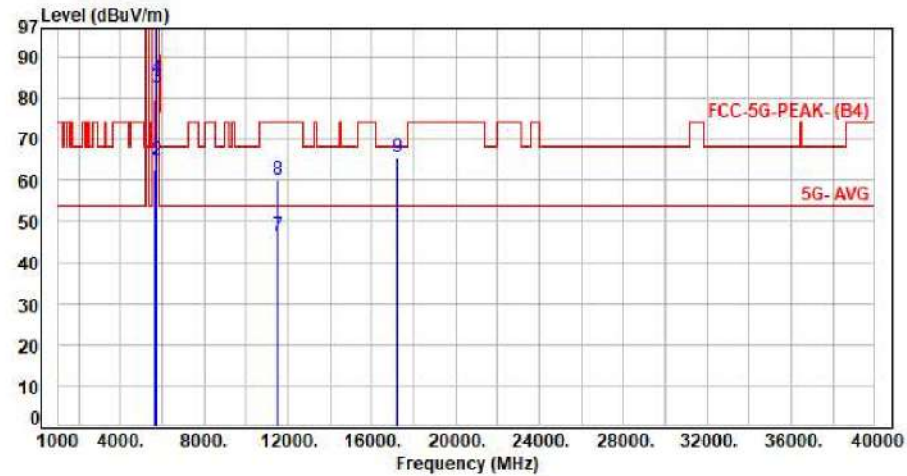

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.54	55.18	62.72	68.20	-5.48	Peak	100	50	P
2	5700.00	7.41	57.36	64.77	105.20	-40.43	Peak	100	50	P
3	5720.00	7.39	75.37	82.76	110.80	-28.04	Peak	100	50	P
4	5725.00	7.39	77.32	84.71	122.20	-37.49	Peak	100	50	P
5	5745.00	7.38	105.67	113.05	200.00	-86.95	Average	100	50	P
6	5745.00	7.38	115.45	122.83	200.00	-77.17	Peak	100	50	P
7	11490.00	16.75	29.65	46.40	54.00	-7.60	Average	100	154	P
8	11490.00	16.75	43.46	60.21	74.00	-13.79	Peak	100	154	P
9	17235.00	24.83	40.88	65.71	68.20	-2.49	Peak	100	229	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH149 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

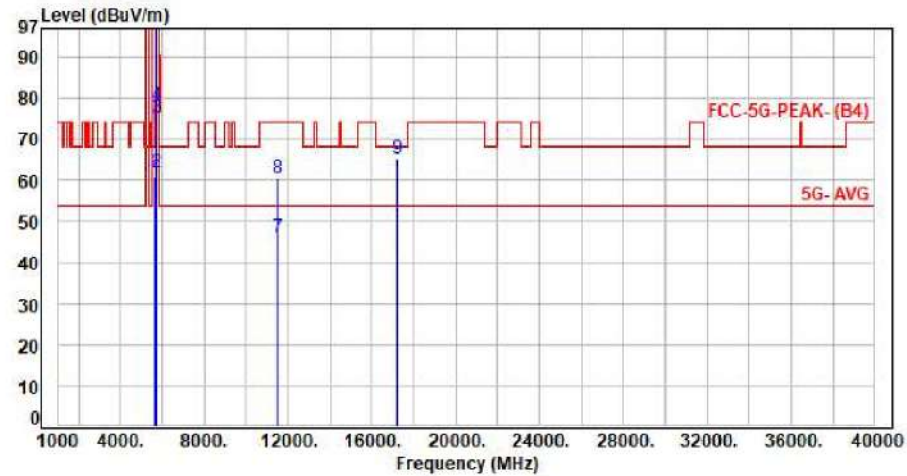

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.54	53.43	60.97	68.20	-7.23	Peak	100	20	P
2	5700.00	7.41	54.54	61.95	105.20	-43.25	Peak	100	20	P
3	5720.00	7.39	67.90	75.29	110.80	-35.51	Peak	100	20	P
4	5725.00	7.39	70.78	78.17	122.20	-44.03	Peak	100	20	P
5	5745.00	7.38	98.26	105.64	200.00	-94.36	Average	100	20	P
6	5745.00	7.38	108.18	115.56	200.00	-84.44	Peak	100	20	P
7	11490.00	16.75	29.29	46.04	54.00	-7.96	Average	100	29	P
8	11490.00	16.75	43.75	60.50	74.00	-13.50	Peak	100	29	P
9	17235.00	24.83	40.48	65.31	68.20	-2.89	Peak	100	146	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH157 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

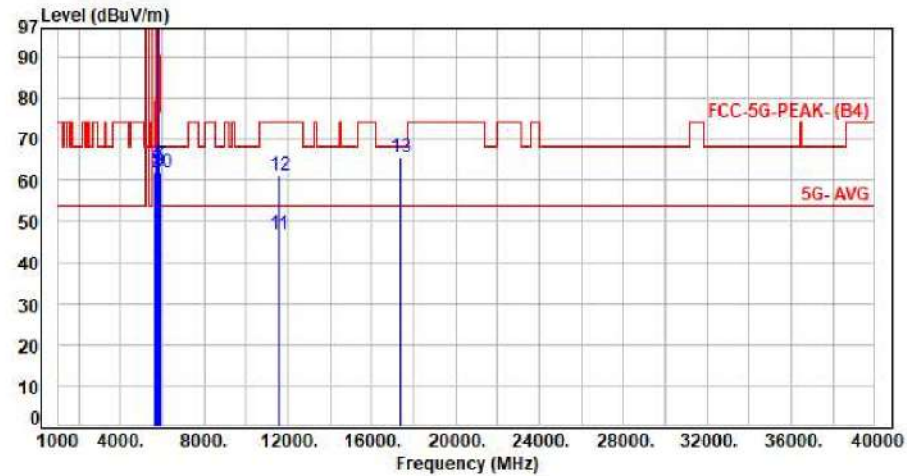


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.54	54.24	61.78	68.20	-6.42	Peak	100	51	P
2	5700.00	7.41	54.38	61.79	105.20	-43.41	Peak	100	51	P
3	5720.00	7.39	55.25	62.64	110.80	-48.16	Peak	100	51	P
4	5725.00	7.39	56.63	64.02	122.20	-58.18	Peak	100	51	P
5	5785.00	7.34	105.79	113.13	200.00	-86.87	Average	100	51	P
6	5785.00	7.34	116.43	123.77	200.00	-76.23	Peak	100	51	P
7	5850.00	7.30	56.63	63.93	122.20	-58.27	Peak	100	51	P
8	5855.00	7.32	55.10	62.42	110.80	-48.38	Peak	100	51	P
9	5875.00	7.39	54.77	62.16	105.20	-43.04	Peak	100	51	P
10	5925.00	7.51	54.52	62.03	68.20	-6.17	Peak	100	51	P
11	11570.00	17.65	29.28	46.93	54.00	-7.07	Average	100	152	P
12	11570.00	17.65	43.41	61.06	74.00	-12.94	Peak	100	152	P
13	17355.00	25.69	40.01	65.70	68.20	-2.50	Peak	100	230	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH157 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

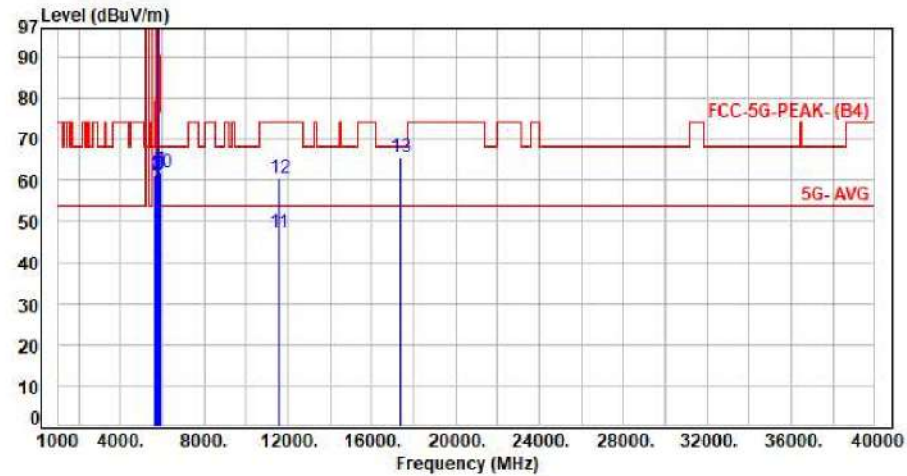


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.54	53.56	61.10	68.20	-7.10	Peak	100	48	P
2	5700.00	7.41	53.82	61.23	105.20	-43.97	Peak	100	48	P
3	5720.00	7.39	54.12	61.51	110.80	-49.29	Peak	100	48	P
4	5725.00	7.39	53.74	61.13	122.20	-61.07	Peak	100	48	P
5	5785.00	7.34	98.26	105.60	200.00	-94.40	Average	100	48	P
6	5785.00	7.34	107.93	115.27	200.00	-84.73	Peak	100	48	P
7	5850.00	7.30	55.21	62.51	122.20	-59.69	Peak	100	48	P
8	5855.00	7.32	54.19	61.51	110.80	-49.29	Peak	100	48	P
9	5875.00	7.39	53.90	61.29	105.20	-43.91	Peak	100	48	P
10	5925.00	7.51	54.35	61.86	68.20	-6.34	Peak	100	48	P
11	11570.00	17.65	29.64	47.29	54.00	-6.71	Average	100	25	P
12	11570.00	17.65	42.94	60.59	74.00	-13.41	Peak	100	25	P
13	17355.00	25.69	39.99	65.68	68.20	-2.52	Peak	100	144	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH165 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

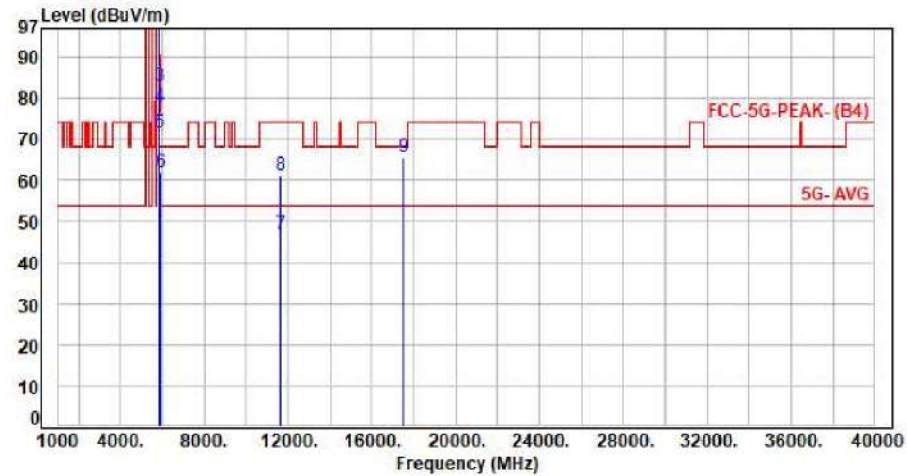


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.32	105.80	113.12	200.00	-86.88	Average	101	161	P
2	5825.00	7.32	115.52	122.84	200.00	-77.16	Peak	101	161	P
3	5850.00	7.30	75.54	82.84	122.20	-39.36	Peak	101	161	P
4	5855.00	7.32	70.58	77.90	110.80	-32.90	Peak	101	161	P
5	5875.00	7.39	64.03	71.42	105.20	-33.78	Peak	101	161	P
6	5925.00	7.51	54.63	62.14	68.20	-6.06	Peak	101	161	P
7	11650.00	17.74	29.26	47.00	54.00	-7.00	Average	100	158	P
8	11650.00	17.74	43.46	61.20	74.00	-12.80	Peak	100	158	P
9	17475.00	26.42	39.08	65.50	68.20	-2.70	Peak	100	225	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH165 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

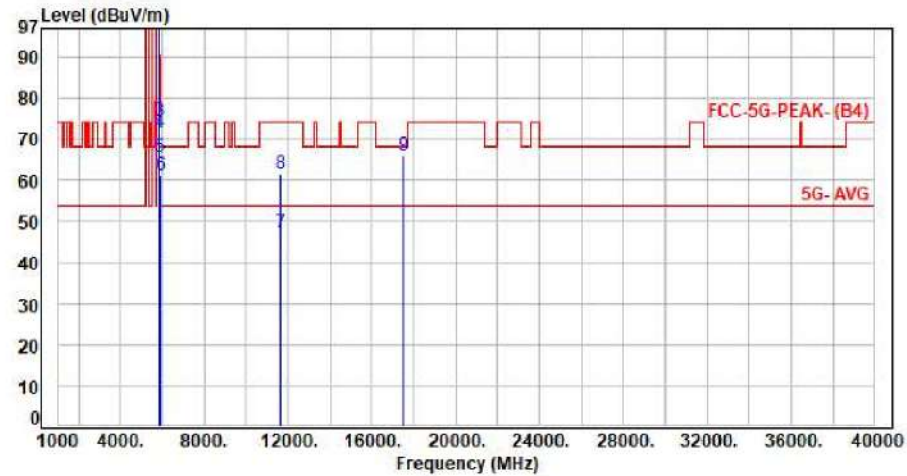

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.32	98.69	106.01	200.00	-93.99	Average	107	49	P
2	5825.00	7.32	108.31	115.63	200.00	-84.37	Peak	107	49	P
3	5850.00	7.30	67.07	74.37	122.20	-47.83	Peak	107	49	P
4	5855.00	7.32	64.24	71.56	110.80	-39.24	Peak	107	49	P
5	5875.00	7.39	58.12	65.51	105.20	-39.69	Peak	107	49	P
6	5925.00	7.51	53.79	61.30	68.20	-6.90	Peak	107	49	P
7	11650.00	17.74	29.48	47.22	54.00	-6.78	Average	100	26	P
8	11650.00	17.74	43.74	61.48	74.00	-12.52	Peak	100	26	P
9	17475.00	26.42	39.51	65.93	68.20	-2.27	Peak	100	148	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH149 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

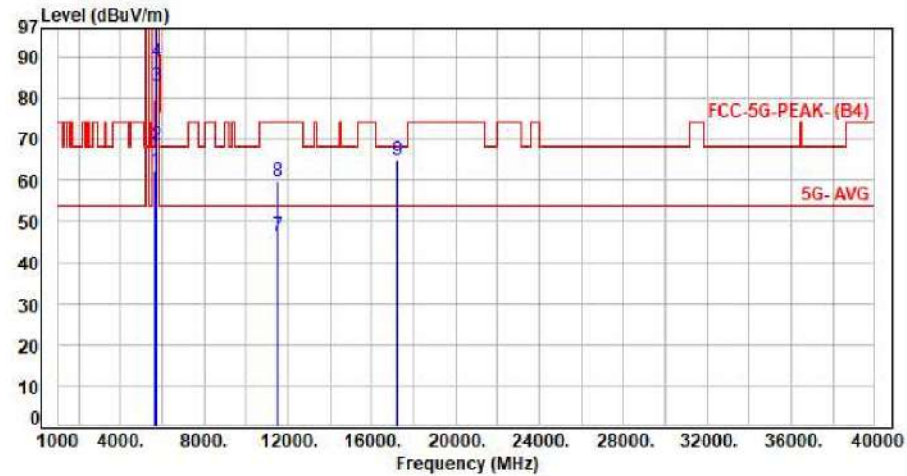

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.54	54.77	62.31	68.20	-5.89	Peak	100	52	P
2	5700.00	7.41	61.32	68.73	105.20	-36.47	Peak	100	52	P
3	5720.00	7.39	75.77	83.16	110.80	-27.64	Peak	100	52	P
4	5725.00	7.39	81.36	88.75	122.20	-33.45	Peak	100	52	P
5	5745.00	7.38	105.69	113.07	200.00	-86.93	Average	100	52	P
6	5745.00	7.38	117.49	124.87	200.00	-75.13	Peak	100	52	P
7	11490.00	16.75	29.66	46.41	54.00	-7.59	Average	100	164	P
8	11490.00	16.75	43.10	59.85	74.00	-14.15	Peak	100	164	P
9	17235.00	24.83	39.95	64.78	68.20	-3.42	Peak	100	228	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH149 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

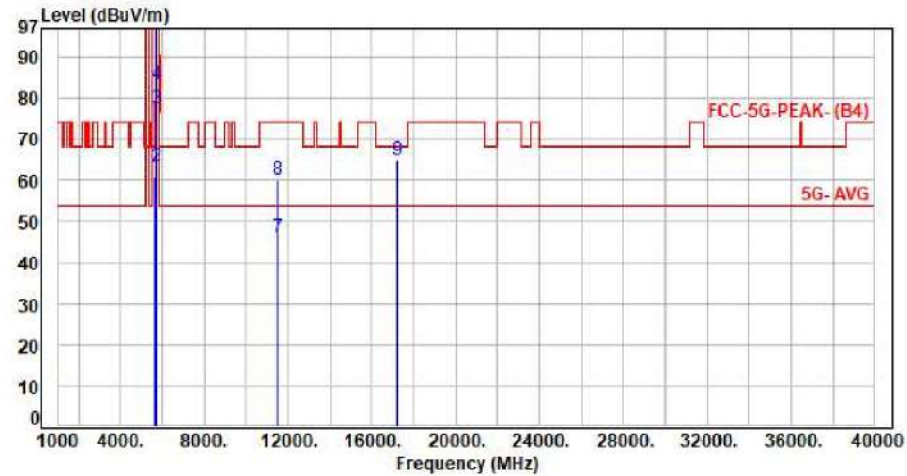

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.54	53.44	60.98	68.20	-7.22	Peak	105	48	P
2	5700.00	7.41	56.01	63.42	105.20	-41.78	Peak	105	48	P
3	5720.00	7.39	70.03	77.42	110.80	-33.38	Peak	105	48	P
4	5725.00	7.39	76.09	83.48	122.20	-38.72	Peak	105	48	P
5	5745.00	7.38	98.16	105.54	200.00	-94.46	Average	105	48	P
6	5745.00	7.38	110.42	117.80	200.00	-82.20	Peak	105	48	P
7	11490.00	16.75	29.32	46.07	54.00	-7.93	Average	100	27	P
8	11490.00	16.75	43.42	60.17	74.00	-13.83	Peak	100	27	P
9	17235.00	24.83	40.10	64.93	68.20	-3.27	Peak	100	141	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH157 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

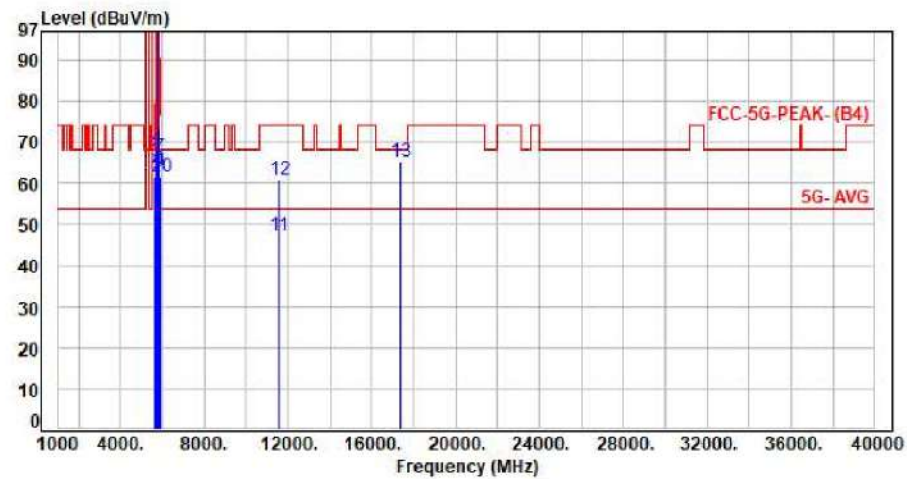


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.54	54.22	61.76	68.20	-6.44	Peak	100	51	P
2	5700.00	7.41	54.16	61.57	105.20	-43.63	Peak	100	51	P
3	5720.00	7.39	57.82	65.21	110.80	-45.59	Peak	100	51	P
4	5725.00	7.39	61.22	68.61	122.20	-53.59	Peak	100	51	P
5	5785.00	7.34	105.45	112.79	200.00	-87.21	Average	100	51	P
6	5785.00	7.34	118.36	125.70	200.00	-74.30	Peak	100	51	P
7	5850.00	7.30	59.21	66.51	122.20	-55.69	Peak	100	51	P
8	5855.00	7.32	56.26	63.58	110.80	-47.22	Peak	100	51	P
9	5875.00	7.39	55.14	62.53	105.20	-42.67	Peak	100	51	P
10	5925.00	7.51	54.13	61.64	68.20	-6.56	Peak	100	51	P
11	11570.00	17.65	29.63	47.28	54.00	-6.72	Average	100	153	P
12	11570.00	17.65	43.18	60.83	74.00	-13.17	Peak	100	153	P
13	17355.00	25.69	39.55	65.24	68.20	-2.96	Peak	100	227	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH157 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

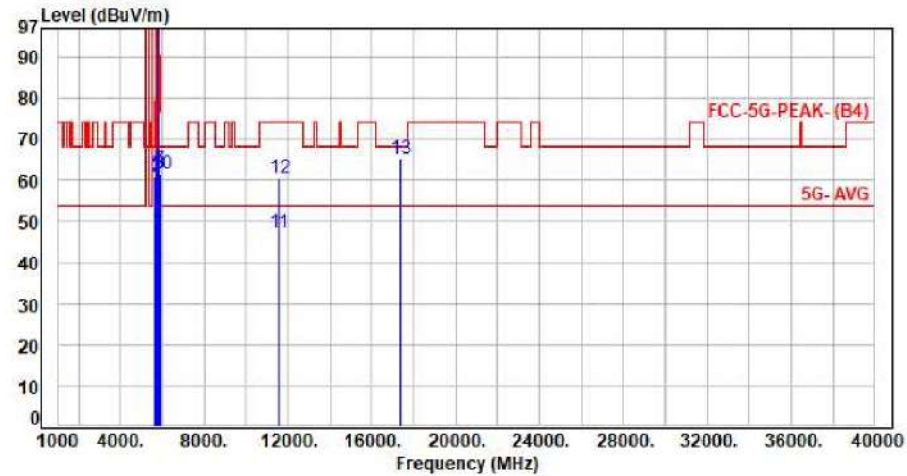


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.54	53.31	60.85	68.20	-7.35	Peak	103	49	P
2	5700.00	7.41	53.54	60.95	105.20	-44.25	Peak	103	49	P
3	5720.00	7.39	53.83	61.22	110.80	-49.58	Peak	103	49	P
4	5725.00	7.39	55.33	62.72	122.20	-59.48	Peak	103	49	P
5	5785.00	7.34	97.68	105.02	200.00	-94.98	Average	103	49	P
6	5785.00	7.34	109.40	116.74	200.00	-83.26	Peak	103	49	P
7	5850.00	7.30	55.29	62.59	122.20	-59.61	Peak	103	49	P
8	5855.00	7.32	54.43	61.75	110.80	-49.05	Peak	103	49	P
9	5875.00	7.39	54.07	61.46	105.20	-43.74	Peak	103	49	P
10	5925.00	7.51	53.94	61.45	68.20	-6.75	Peak	103	49	P
11	11570.00	17.65	29.64	47.29	54.00	-6.71	Average	100	28	P
12	11570.00	17.65	42.82	60.47	74.00	-13.53	Peak	100	28	P
13	17355.00	25.69	39.74	65.43	68.20	-2.77	Peak	100	145	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH165 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

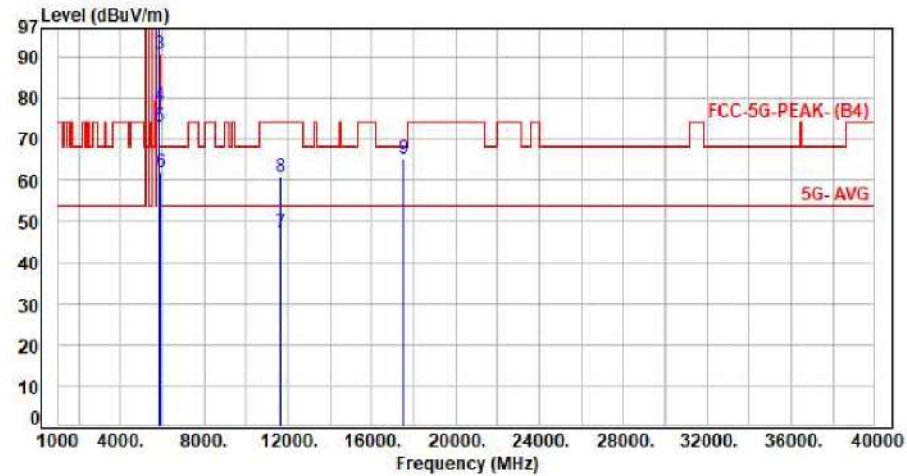

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.32	104.81	112.13	200.00	-87.87	Average	100	184	P
2	5825.00	7.32	117.12	124.44	200.00	-75.56	Peak	100	184	P
3	5850.00	7.30	83.54	90.84	122.20	-31.36	Peak	100	184	P
4	5855.00	7.32	70.83	78.15	110.80	-32.65	Peak	100	184	P
5	5875.00	7.39	65.66	73.05	105.20	-32.15	Peak	100	184	P
6	5925.00	7.51	54.28	61.79	68.20	-6.41	Peak	100	184	P
7	11650.00	17.74	29.44	47.18	54.00	-6.82	Average	100	154	P
8	11650.00	17.74	43.29	61.03	74.00	-12.97	Peak	100	154	P
9	17475.00	26.42	38.93	65.35	68.20	-2.85	Peak	100	227	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH165 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

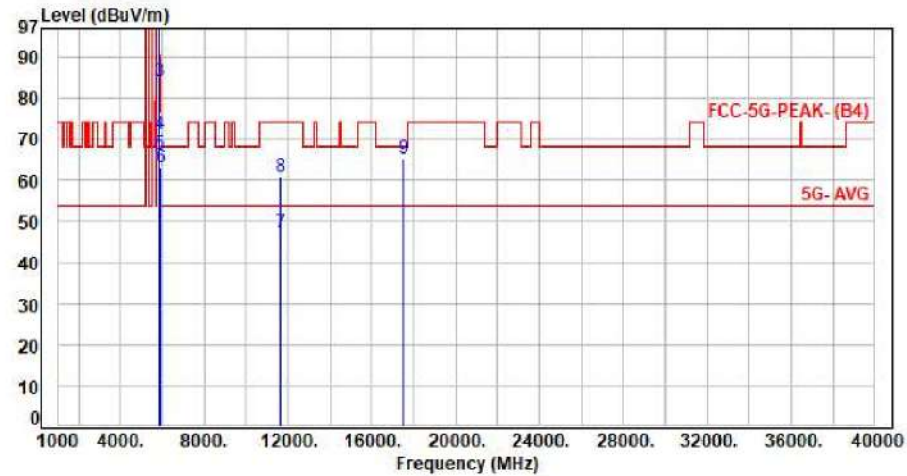

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.32	97.63	104.95	200.00	-95.05	Average	106	18	P
2	5825.00	7.32	109.62	116.94	200.00	-83.06	Peak	106	18	P
3	5850.00	7.30	76.77	84.07	122.20	-38.13	Peak	106	18	P
4	5855.00	7.32	63.86	71.18	110.80	-39.62	Peak	106	18	P
5	5875.00	7.39	58.86	66.25	105.20	-38.95	Peak	106	18	P
6	5925.00	7.51	55.48	62.99	68.20	-5.21	Peak	106	18	P
7	11650.00	17.74	29.38	47.12	54.00	-6.88	Average	100	27	P
8	11650.00	17.74	43.26	61.00	74.00	-13.00	Peak	100	27	P
9	17475.00	26.42	38.85	65.27	68.20	-2.93	Peak	100	148	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT40 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

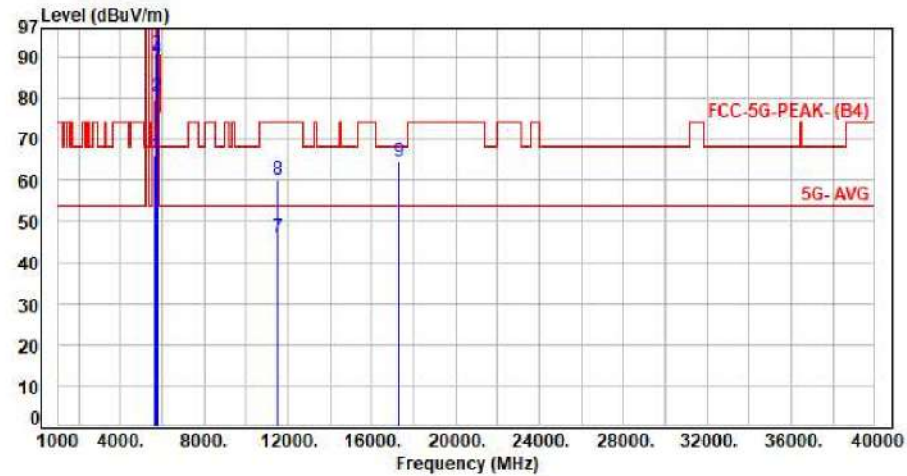

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.54	58.60	66.14	68.20	-2.06	Peak	100	50	P
2	5700.00	7.41	73.12	80.53	105.20	-24.67	Peak	100	50	P
3	5720.00	7.39	83.25	90.64	110.80	-20.16	Peak	100	50	P
4	5725.00	7.39	82.42	89.81	122.20	-32.39	Peak	100	50	P
5	5755.00	7.36	102.58	109.94	200.00	-90.06	Average	100	50	P
6	5755.00	7.36	115.32	122.68	200.00	-77.32	Peak	100	50	P
7	11510.00	16.90	29.06	45.96	54.00	-8.04	Average	100	156	P
8	11510.00	16.90	43.18	60.08	74.00	-13.92	Peak	100	156	P
9	17265.00	24.97	39.47	64.44	68.20	-3.76	Peak	100	223	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT40 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

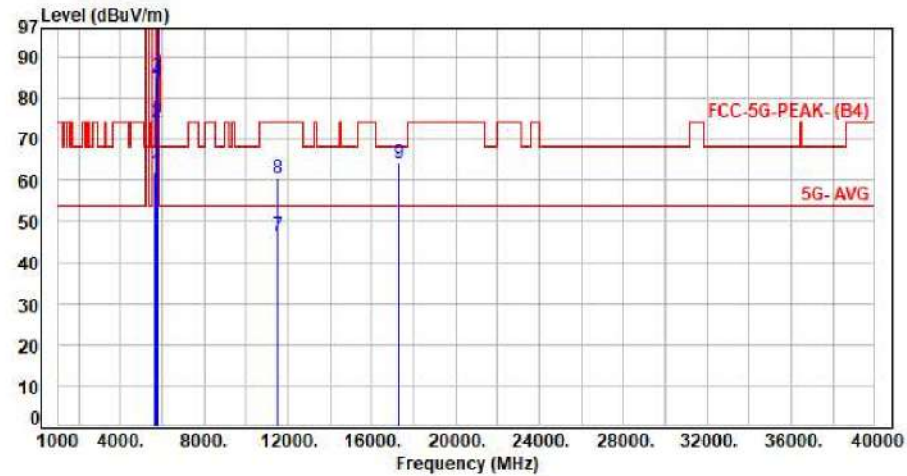

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.54	54.41	61.95	68.20	-6.25	Peak	104	17	P
2	5700.00	7.41	66.72	74.13	105.20	-31.07	Peak	104	17	P
3	5720.00	7.39	77.73	85.12	110.80	-25.68	Peak	104	17	P
4	5725.00	7.39	76.66	84.05	122.20	-38.15	Peak	104	17	P
5	5755.00	7.36	95.47	102.83	200.00	-97.17	Average	104	17	P
6	5755.00	7.36	107.85	115.21	200.00	-84.79	Peak	104	17	P
7	11510.00	16.90	29.55	46.45	54.00	-7.55	Average	100	29	P
8	11510.00	16.90	43.69	60.59	74.00	-13.41	Peak	100	29	P
9	17265.00	24.97	39.26	64.23	68.20	-3.97	Peak	100	142	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT40 CH159 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

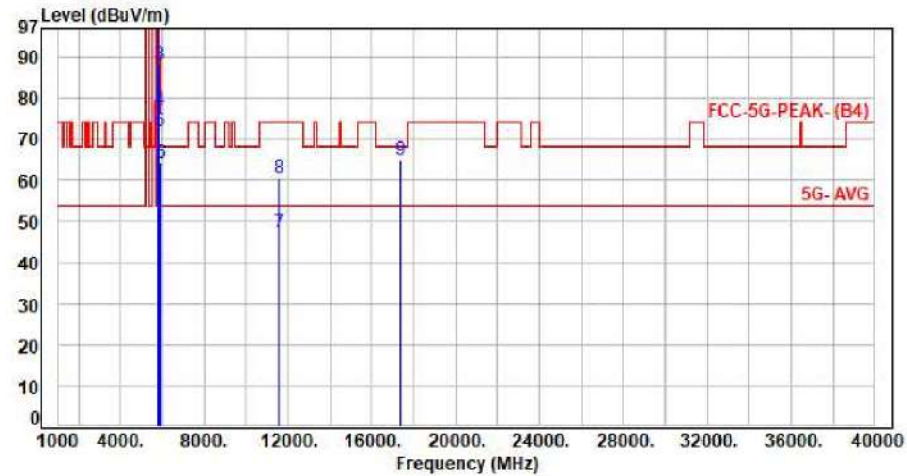

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5795.00	7.34	102.62	109.96	200.00	-90.04	Average	100	54	P
2	5795.00	7.34	115.73	123.07	200.00	-76.93	Peak	100	54	P
3	5850.00	7.30	80.78	88.08	122.20	-34.12	Peak	100	54	P
4	5855.00	7.32	69.89	77.21	110.80	-33.59	Peak	100	54	P
5	5875.00	7.39	64.55	71.94	105.20	-33.26	Peak	100	54	P
6	5925.00	7.51	56.57	64.08	68.20	-4.12	Peak	100	54	P
7	11590.00	17.90	29.34	47.24	54.00	-6.76	Average	100	155	P
8	11590.00	17.90	42.75	60.65	74.00	-13.35	Peak	100	155	P
9	17385.00	25.89	39.16	65.05	68.20	-3.15	Peak	100	226	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT40 CH159 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

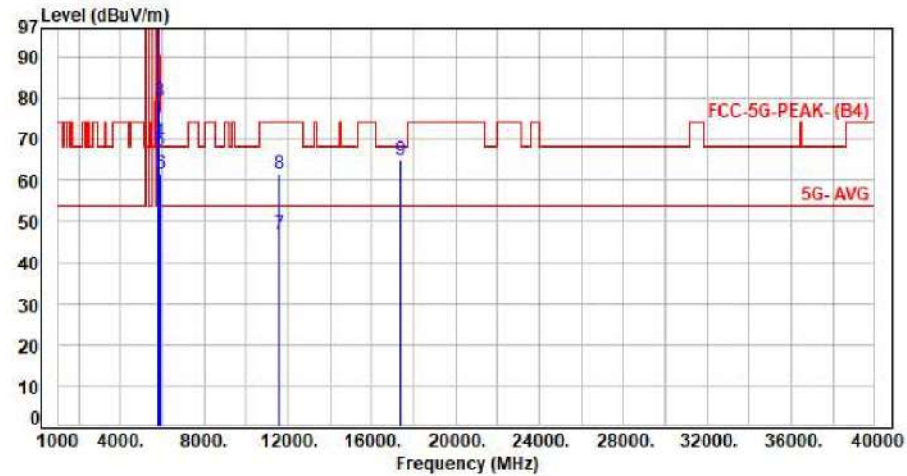

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5795.00	7.34	95.33	102.67	200.00	-97.33	Average	100	48	P
2	5795.00	7.34	107.82	115.16	200.00	-84.84	Peak	100	48	P
3	5850.00	7.30	72.02	79.32	122.20	-42.88	Peak	100	48	P
4	5855.00	7.32	62.05	69.37	110.80	-41.43	Peak	100	48	P
5	5875.00	7.39	59.74	67.13	105.20	-38.07	Peak	100	48	P
6	5925.00	7.51	54.02	61.53	68.20	-6.67	Peak	100	48	P
7	11590.00	17.90	29.11	47.01	54.00	-6.99	Average	100	27	P
8	11590.00	17.90	43.62	61.52	74.00	-12.48	Peak	100	27	P
9	17385.00	25.89	38.84	64.73	68.20	-3.47	Peak	100	139	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT80 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

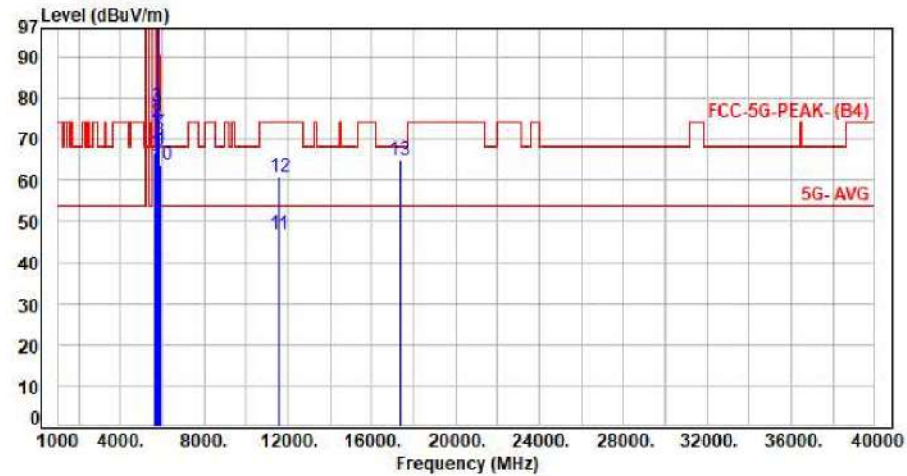


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.54	59.21	66.75	68.20	-1.45	Peak	100	50	P
2	5700.00	7.41	66.90	74.31	105.20	-30.89	Peak	100	50	P
3	5720.00	7.39	70.31	77.70	110.80	-33.10	Peak	100	50	P
4	5725.00	7.39	70.08	77.47	122.20	-44.73	Peak	100	50	P
5	5775.00	7.35	97.30	104.65	200.00	-95.35	Average	100	50	P
6	5775.00	7.35	110.57	117.92	200.00	-82.08	Peak	100	50	P
7	5850.00	7.30	64.26	71.56	122.20	-50.64	Peak	100	50	P
8	5855.00	7.32	62.33	69.65	110.80	-41.15	Peak	100	50	P
9	5875.00	7.39	59.62	67.01	105.20	-38.19	Peak	100	50	P
10	5925.00	7.51	56.28	63.79	68.20	-4.41	Peak	100	50	P
11	11550.00	17.40	29.60	47.00	54.00	-7.00	Average	100	153	P
12	11550.00	17.40	43.34	60.74	74.00	-13.26	Peak	100	153	P
13	17325.00	25.39	39.70	65.09	68.20	-3.11	Peak	100	229	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT80 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

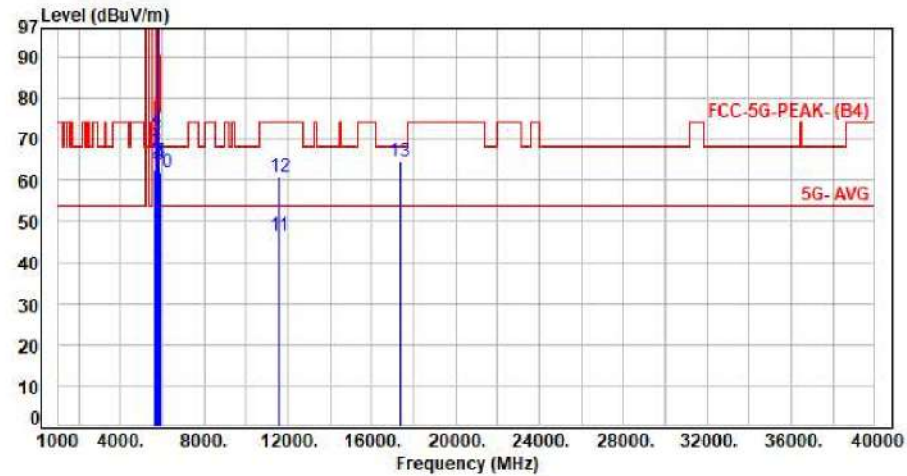


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.54	55.34	62.88	68.20	-5.32	Peak	100	19	P
2	5700.00	7.41	59.68	67.09	105.20	-38.11	Peak	100	19	P
3	5720.00	7.39	63.27	70.66	110.80	-40.14	Peak	100	19	P
4	5725.00	7.39	64.90	72.29	122.20	-49.91	Peak	100	19	P
5	5775.00	7.35	89.73	97.08	200.00	-102.92	Average	100	19	P
6	5775.00	7.35	101.77	109.12	200.00	-90.88	Peak	100	19	P
7	5850.00	7.30	57.34	64.64	122.20	-57.56	Peak	100	19	P
8	5855.00	7.32	57.09	64.41	110.80	-46.39	Peak	100	19	P
9	5875.00	7.39	56.36	63.75	105.20	-41.45	Peak	100	19	P
10	5925.00	7.51	54.47	61.98	68.20	-6.22	Peak	100	19	P
11	11550.00	17.40	29.06	46.46	54.00	-7.54	Average	100	26	P
12	11550.00	17.40	43.62	61.02	74.00	-12.98	Peak	100	26	P
13	17325.00	25.39	39.23	64.62	68.20	-3.58	Peak	100	148	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH144 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

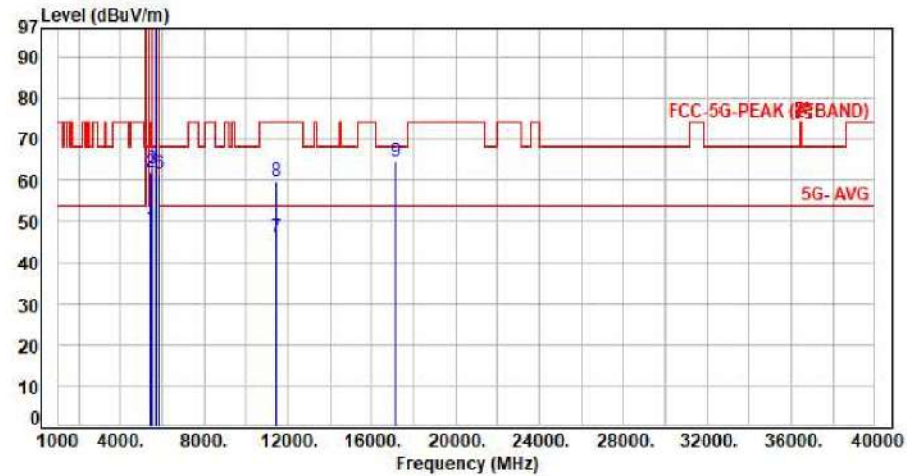

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	40.67	48.39	54.00	-5.61	Average	100	49	P
2	5460.00	7.72	54.16	61.88	74.00	-12.12	Peak	100	49	P
3	5470.00	7.72	54.87	62.59	68.20	-5.61	Peak	100	49	P
4	5720.00	7.39	97.19	104.58	200.00	-95.42	Average	100	49	P
5	5720.00	7.39	107.09	114.48	200.00	-85.52	Peak	100	49	P
6	5850.00	7.30	54.32	61.62	68.20	-6.58	Peak	100	49	P
7	11440.00	16.63	29.44	46.07	54.00	-7.93	Average	100	155	P
8	11440.00	16.63	43.16	59.79	74.00	-14.21	Peak	100	155	P
9	17160.00	24.42	40.11	64.53	68.20	-3.67	Peak	100	229	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH144 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

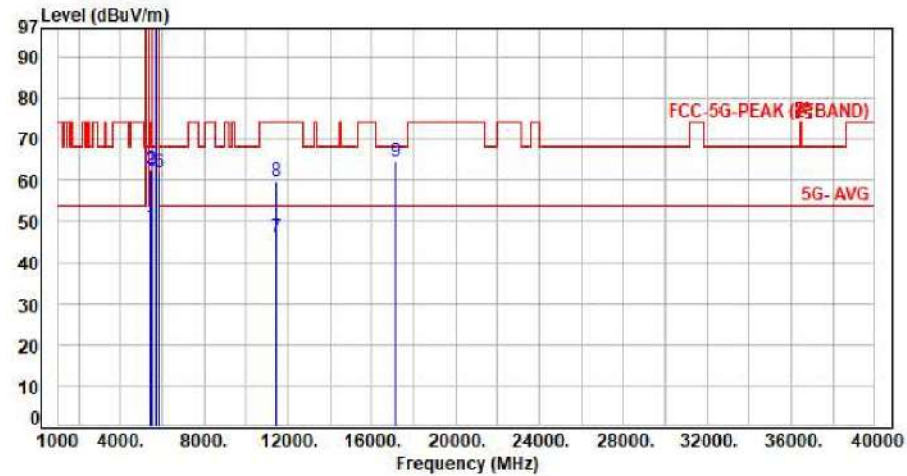

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	40.84	48.56	54.00	-5.44	Average	100	20	P
2	5460.00	7.72	55.04	62.76	74.00	-11.24	Peak	100	20	P
3	5470.00	7.72	54.65	62.37	68.20	-5.83	Peak	100	20	P
4	5720.00	7.39	90.10	97.49	200.00	-102.51	Average	100	20	P
5	5720.00	7.39	99.72	107.11	200.00	-92.89	Peak	100	20	P
6	5850.00	7.30	54.77	62.07	68.20	-6.13	Peak	100	20	P
7	11440.00	16.63	29.36	45.99	54.00	-8.01	Average	100	26	P
8	11440.00	16.63	43.16	59.79	74.00	-14.21	Peak	100	26	P
9	17160.00	24.42	40.04	64.46	68.20	-3.74	Peak	100	142	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH144 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

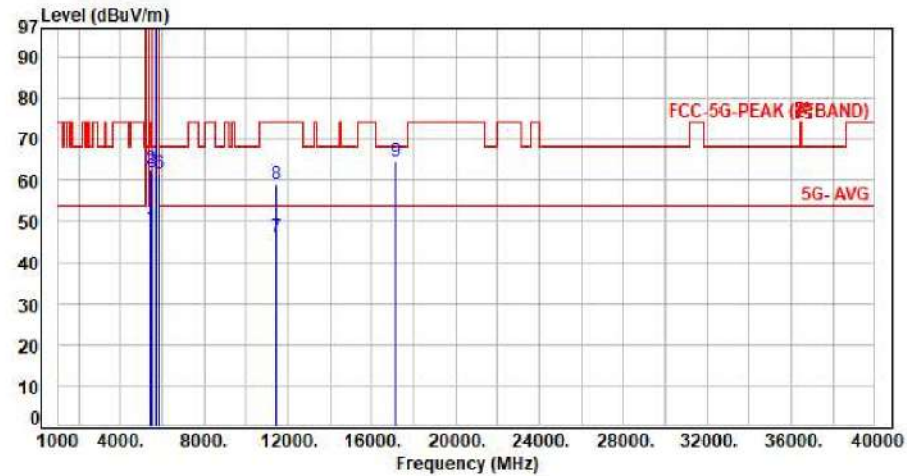

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	40.73	48.45	54.00	-5.55	Average	101	50	P
2	5460.00	7.72	54.83	62.55	74.00	-11.45	Peak	101	50	P
3	5470.00	7.72	54.29	62.01	68.20	-6.19	Peak	101	50	P
4	5720.00	7.39	97.19	104.58	200.00	-95.42	Average	101	50	P
5	5720.00	7.39	107.09	114.48	200.00	-85.52	Peak	101	50	P
6	5850.00	7.30	54.48	61.78	68.20	-6.42	Peak	101	50	P
7	11440.00	16.63	29.62	46.25	54.00	-7.75	Average	100	158	P
8	11440.00	16.63	42.56	59.19	74.00	-14.81	Peak	100	158	P
9	17160.00	24.42	40.16	64.58	68.20	-3.62	Peak	100	224	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT20 CH144 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

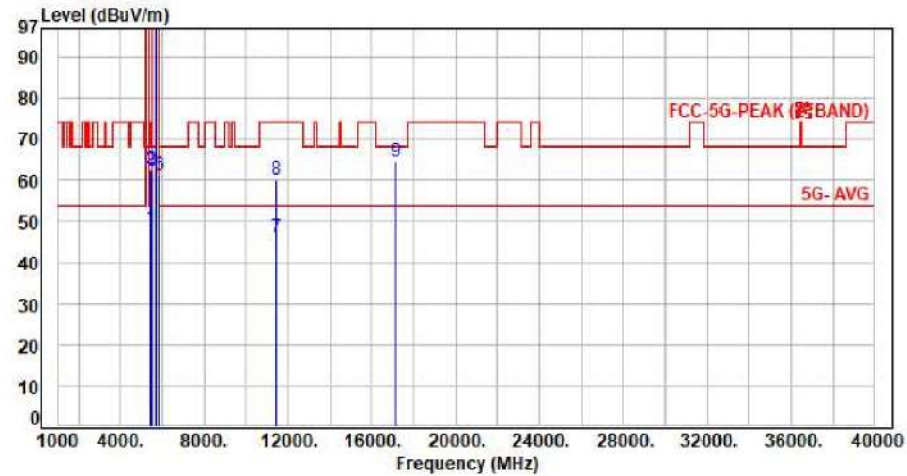

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	40.72	48.44	54.00	-5.56	Average	100	20	P
2	5460.00	7.72	55.08	62.80	74.00	-11.20	Peak	100	20	P
3	5470.00	7.72	54.62	62.34	68.20	-5.86	Peak	100	20	P
4	5720.00	7.39	92.31	99.70	200.00	-100.30	Average	100	20	P
5	5720.00	7.39	101.74	109.13	200.00	-90.87	Peak	100	20	P
6	5850.00	7.30	53.92	61.22	68.20	-6.98	Peak	100	20	P
7	11440.00	16.63	29.60	46.23	54.00	-7.77	Average	100	28	P
8	11440.00	16.63	43.59	60.22	74.00	-13.78	Peak	100	28	P
9	17160.00	24.42	40.29	64.71	68.20	-3.49	Peak	100	146	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT40 CH142 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

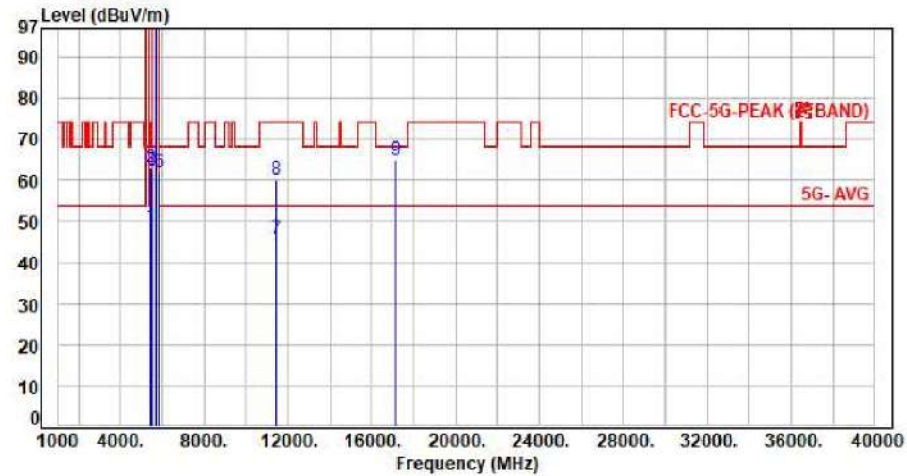

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	41.04	48.76	54.00	-5.24	Average	100	49	P
2	5460.00	7.72	55.36	63.08	74.00	-10.92	Peak	100	49	P
3	5470.00	7.72	54.74	62.46	68.20	-5.74	Peak	100	49	P
4	5710.00	7.40	97.51	104.91	200.00	-95.09	Average	100	49	P
5	5710.00	7.40	109.73	117.13	200.00	-82.87	Peak	100	49	P
6	5850.00	7.30	54.77	62.07	68.20	-6.13	Peak	100	49	P
7	11420.00	16.61	29.31	45.92	54.00	-8.08	Average	100	156	P
8	11420.00	16.61	43.69	60.30	74.00	-13.70	Peak	100	156	P
9	17130.00	24.21	40.74	64.95	68.20	-3.25	Peak	100	225	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT40 CH142 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

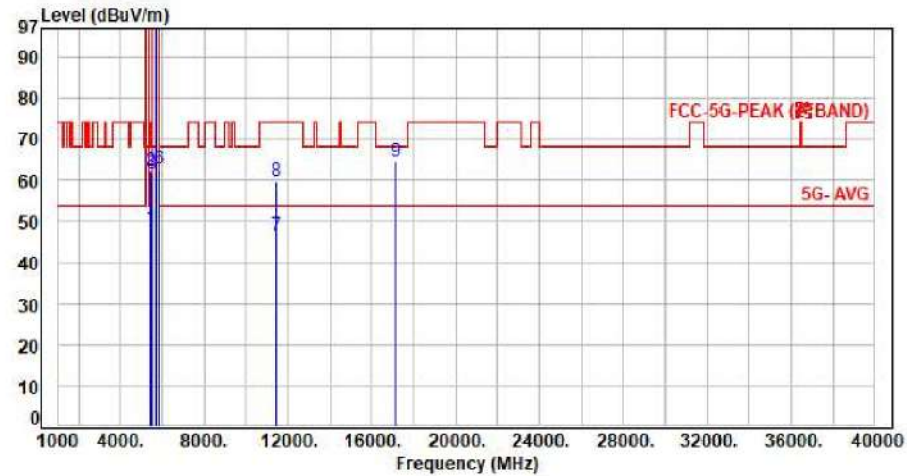

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	40.68	48.40	54.00	-5.60	Average	100	0	P
2	5460.00	7.72	54.43	62.15	74.00	-11.85	Peak	100	0	P
3	5470.00	7.72	54.00	61.72	68.20	-6.48	Peak	100	0	P
4	5710.00	7.40	89.51	96.91	200.00	-103.09	Average	100	0	P
5	5710.00	7.40	101.81	109.21	200.00	-90.79	Peak	100	0	P
6	5850.00	7.30	55.43	62.73	68.20	-5.47	Peak	100	0	P
7	11420.00	16.61	29.68	46.29	54.00	-7.71	Average	100	29	P
8	11420.00	16.61	43.29	59.90	74.00	-14.10	Peak	100	29	P
9	17130.00	24.21	40.41	64.62	68.20	-3.58	Peak	100	143	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT80 CH138 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

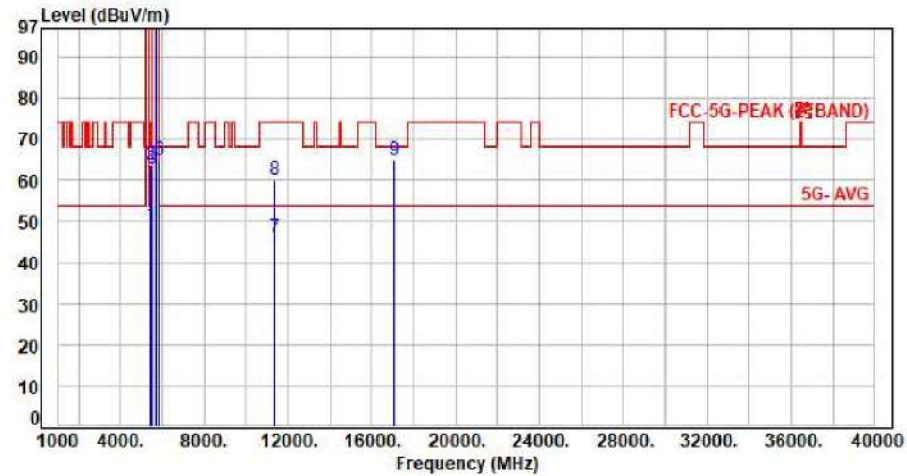

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	41.19	48.91	54.00	-5.09	Average	100	161	P
2	5460.00	7.72	55.91	63.63	74.00	-10.37	Peak	100	161	P
3	5470.00	7.72	55.08	62.80	68.20	-5.40	Peak	100	161	P
4	5690.00	7.43	97.37	104.80	200.00	-95.20	Average	100	161	P
5	5690.00	7.43	109.84	117.27	200.00	-82.73	Peak	100	161	P
6	5850.00	7.30	57.78	65.08	68.20	-3.12	Peak	100	161	P
7	11380.00	16.53	29.58	46.11	54.00	-7.89	Average	100	157	P
8	11380.00	16.53	43.77	60.30	74.00	-13.70	Peak	100	157	P
9	17070.00	23.92	41.10	65.02	68.20	-3.18	Peak	100	229	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT80 CH138 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

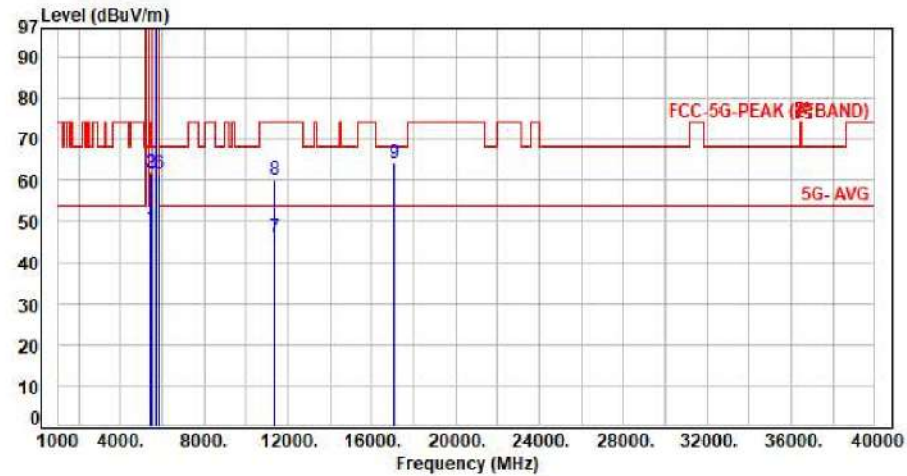

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	40.59	48.31	54.00	-5.69	Average	100	37	P
2	5460.00	7.72	54.07	61.79	74.00	-12.21	Peak	100	37	P
3	5470.00	7.72	54.06	61.78	68.20	-6.42	Peak	100	37	P
4	5690.00	7.43	88.24	95.67	200.00	-104.33	Average	100	37	P
5	5690.00	7.43	100.50	107.93	200.00	-92.07	Peak	100	37	P
6	5850.00	7.30	54.42	61.72	68.20	-6.48	Peak	100	37	P
7	11380.00	16.53	29.51	46.04	54.00	-7.96	Average	100	28	P
8	11380.00	16.53	43.60	60.13	74.00	-13.87	Peak	100	28	P
9	17070.00	23.92	40.28	64.20	68.20	-4.00	Peak	100	147	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT160 CH50 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

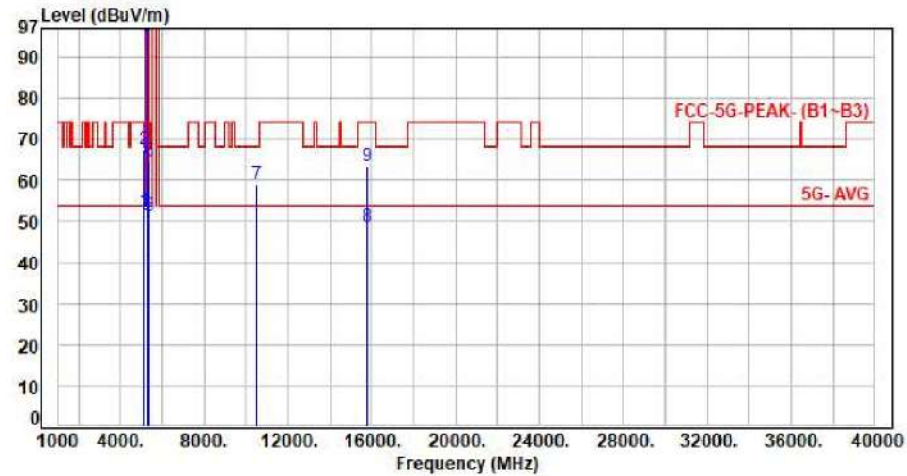

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	7.18	45.34	52.52	54.00	-1.48	Average	130	274	P
2	5150.00	7.18	60.29	67.47	74.00	-6.53	Peak	130	274	P
3	5250.00	7.32	87.89	95.21	200.00	-104.79	Average	130	274	P
4	5250.00	7.32	99.16	106.48	200.00	-93.52	Peak	130	274	P
5	5350.00	7.67	43.50	51.17	54.00	-2.83	Average	130	274	P
6	5350.00	7.67	56.89	64.56	74.00	-9.44	Peak	130	274	P
7	10500.00	15.56	43.56	59.12	68.20	-9.08	Peak	100	154	P
8	15750.00	19.56	29.26	48.82	54.00	-5.18	Average	100	225	P
9	15750.00	19.56	43.97	63.53	74.00	-10.47	Peak	100	225	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11be EHT160 CH50 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

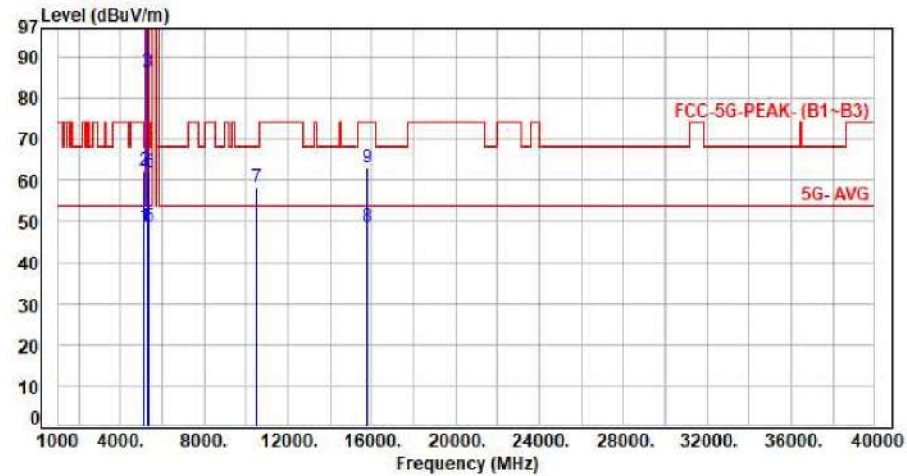

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	7.18	41.38	48.56	54.00	-5.44	Average	131	26	P
2	5150.00	7.18	55.17	62.35	74.00	-11.65	Peak	131	26	P
3	5250.00	7.32	79.08	86.40	200.00	-113.60	Average	131	26	P
4	5250.00	7.32	91.08	98.40	200.00	-101.60	Peak	131	26	P
5	5350.00	7.67	41.07	48.74	54.00	-5.26	Average	131	26	P
6	5350.00	7.67	54.28	61.95	74.00	-12.05	Peak	131	26	P
7	10500.00	15.56	42.79	58.35	68.20	-9.85	Peak	100	27	P
8	15750.00	19.56	29.26	48.82	54.00	-5.18	Average	100	149	P
9	15750.00	19.56	43.55	63.11	74.00	-10.89	Peak	100	149	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**6.7. Restricted Bands of Operation**

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.150
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



7. On Time, Duty Cycle and Measurement methods


7.1. Test Limit

None; for reporting purposes only.

7.2. Test Procedure

KDB 789033 Zero-Span Spectrum Analyzer Method.

7.3. Test Setup Layout





7.4. Test Result and Data

Non-Beamforming:

Modulation Type	On Time (ms)	Period Time (ms)	Duty Cycle (%)
802.11a,6M	1.98	2.00	99.20%
802.11ax HE20	5.46	5.60	97.50%
802.11ax HE40	5.44	5.62	96.80%
802.11ax HE80	5.44	5.62	96.80%
802.11ax HE160	5.44	5.60	97.14%
802.11be EHT20	5.46	5.60	97.50%
802.11be EHT40	5.46	5.62	97.15%
802.11be EHT80	5.46	5.64	96.81%
802.11be EHT160	5.46	5.60	97.50%

Beamforming:

Modulation Type	On Time (ms)	Period Time (ms)	Duty Cycle (%)
802.11ax HE20	5.46	5.60	97.50%
802.11ax HE40	5.46	5.58	97.85%
802.11ax HE80	5.44	5.60	97.14%
802.11ax HE160	5.46	5.58	97.85%
802.11be EHT20	5.46	5.58	97.85%
802.11be EHT40	5.42	5.58	97.13%
802.11be EHT80	5.46	5.58	97.85%
802.11be EHT160	5.46	5.58	97.85%


7.5. Measurement Methods

26 dB and 6dB Emission BW	KDB 789033 D02 v02r01, Section C
99% Occupied BW	KDB 789033 D02 v02r01, Section D
Conducted Output Power	KDB 789033 D02 v02r01, Section E.2.d and E.3.b (Method PM-G)
Power Spectral Density	KDB 789033 D02 v02r01, Section F
Unwanted emissions in restricted bands	KDB 789033 D02 v02r01, Sections G and H
Unwanted emissions in non-restricted bands	KDB 789033 D02 v02r01, Sections G and H




Non-Beamforming:

Modulation Type: 802.11a

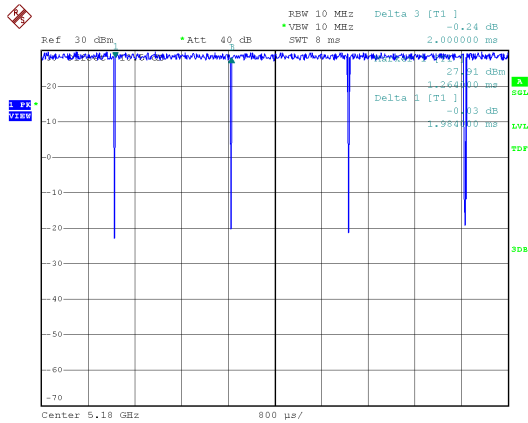


Date: 2.JAN.2025 17:38:49

Modulation Type: 802.11ax HE80

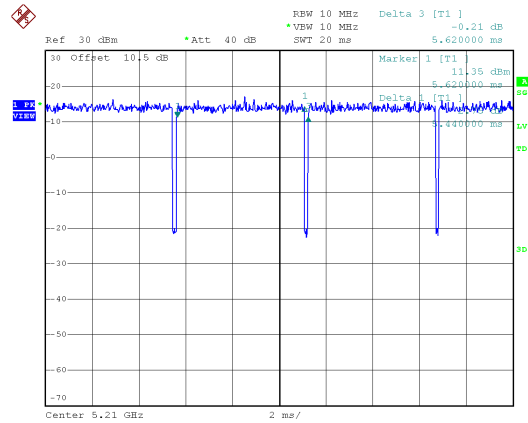


Date: 5.MAY.2025 11:18:51

Modulation Type: 802.11ax HE20

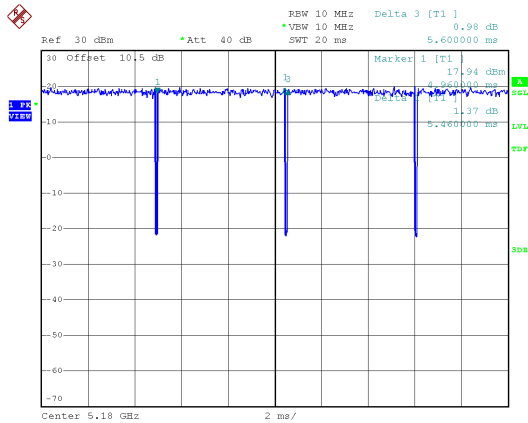


Date: 5.MAY.2025 10:47:40

Modulation Type: 802.11ax HE160

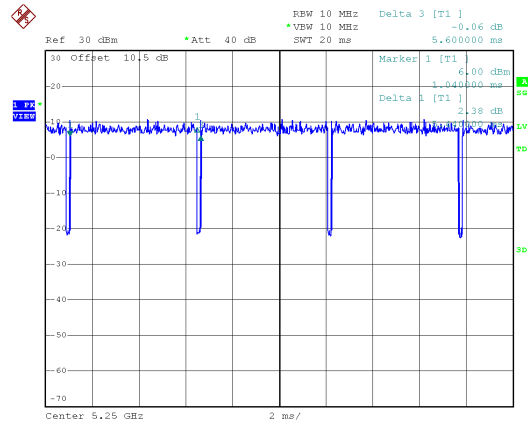


Date: 5.MAY.2025 11:31:41

Modulation Type: 802.11ax HE40

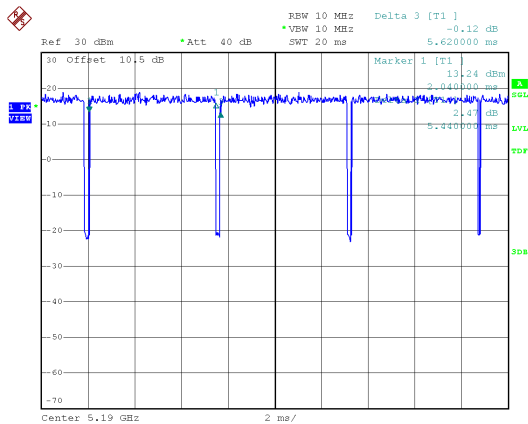

Date: 5.MAY.2025 11:14:16


Modulation Type: 802.11be EHT20

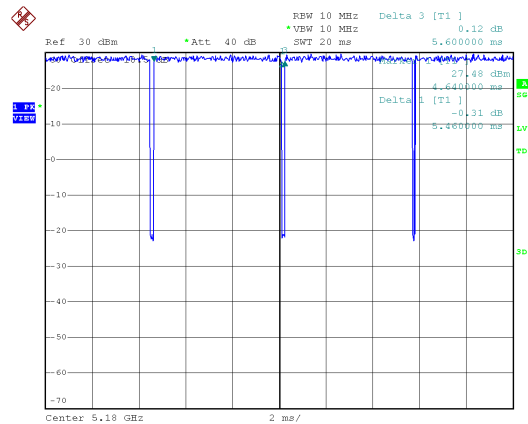

Date: 3.JAN.2025 15:46:15




Non-Beamforming:
Modulation Type: 802.11be EHT40

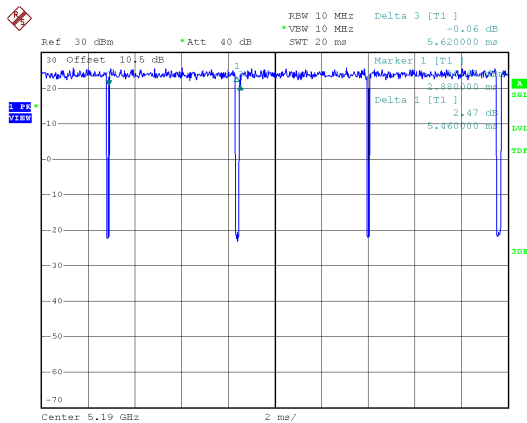


Date: 6.JAN.2025 11:46:08

Modulation Type: 802.11be EHT80

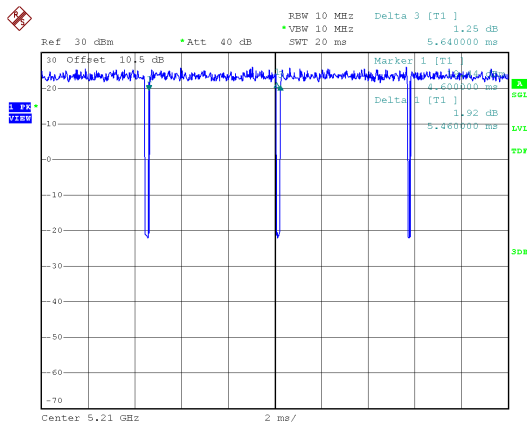

Date: 6.JAN.2025 14:51:06

Modulation Type: 802.11be EHT160

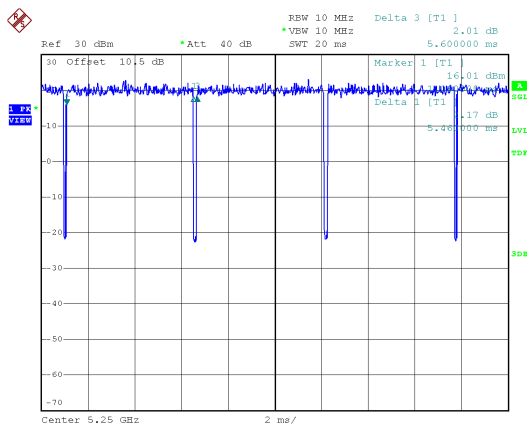


Date: 6.JAN.2025 16:25:05




Beamforming:

Modulation Type: 802.11ax HE20

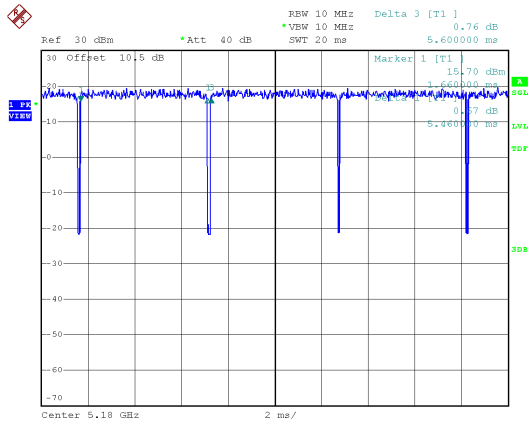


Date: 23.MAY.2025 18:07:00

Modulation Type: 802.11ax HE160

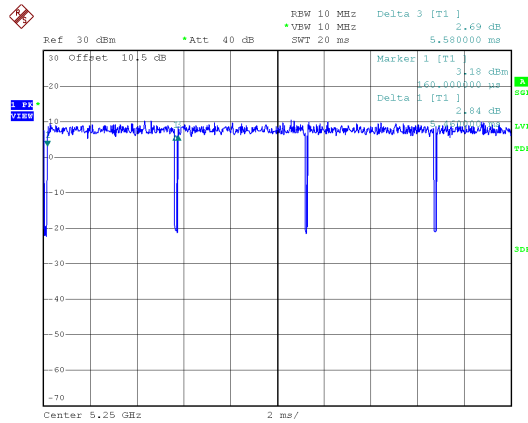


Date: 23.MAY.2025 18:13:39

Modulation Type: 802.11ax HE40

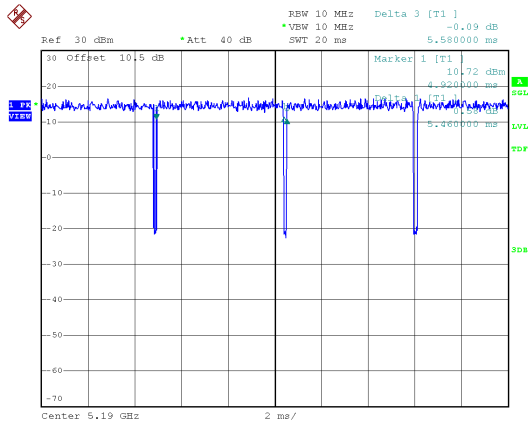


Date: 23.MAY.2025 18:08:59

Modulation Type: 802.11be EHT20

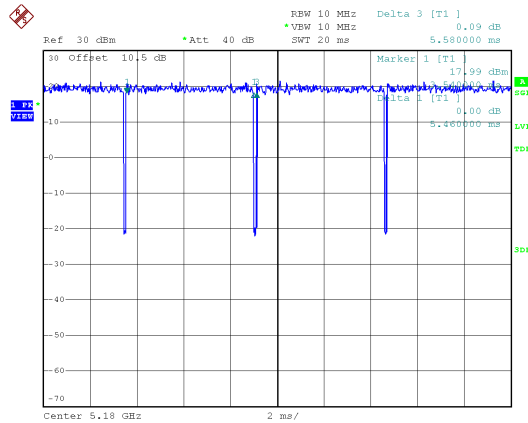


Date: 23.MAY.2025 18:16:57

Modulation Type: 802.11ax HE80

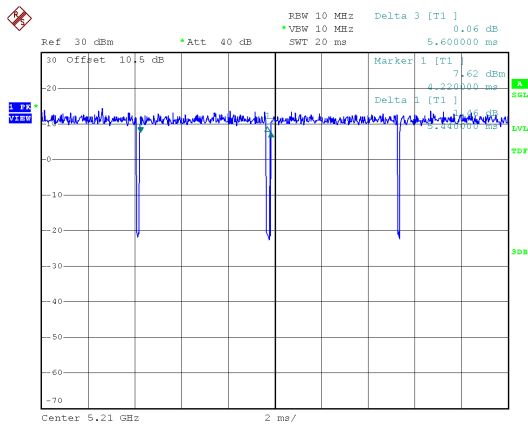

Date: 23.MAY.2025 18:11:28

Modulation Type: 802.11be EHT40

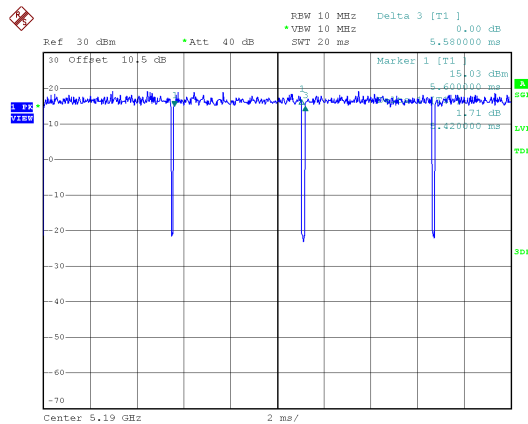


Date: 23.MAY.2025 18:18:44




Beamforming:

Modulation Type: 802.11be EHT80

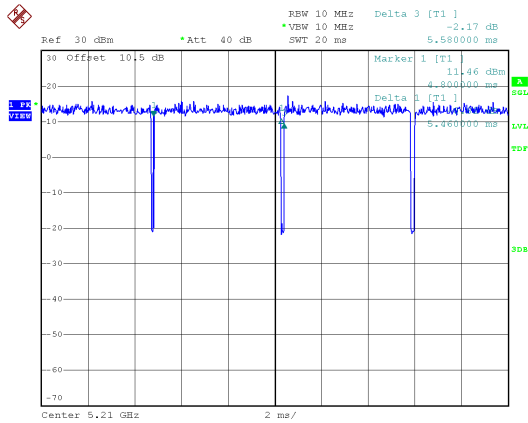

Date: 23.MAY.2025 18:20:50

Modulation Type: 802.11be EHT160

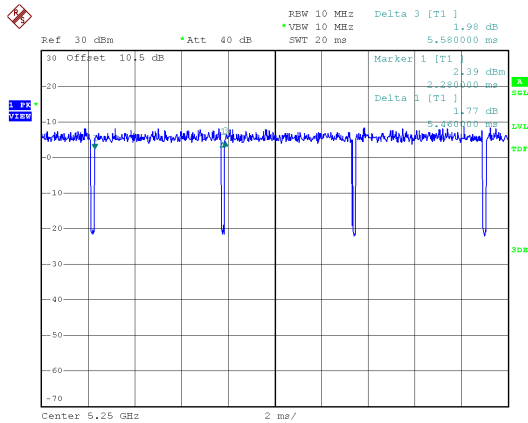

Date: 23.MAY.2025 18:22:40



8. 6dB Bandwidth & 99% Occupied Bandwidth

8.1. Test Limit


FCC §15.407

The minimum 6 dB bandwidth shall be at least 500 kHz.

8.2. Test Procedure

Reference to 789033 D02 General UNII Test Procedures New Rules v01: The transmitter output is connected to a spectrum analyzer with the RBW set to 100KHz, the VBW $\geq 3 \times$ RBW, peak detector and max hold.

8.3. Test Setup Layout





8.4. Test Result and Data

In the 5.8G Band

Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth(MHz)		Minimum Limit (MHz)
			ANT A	ANT D	
11a	149	5745	15.33	15.03	0.50
11a	157	5785	16.05	15.03	0.50
11a	165	5825	16.32	15.00	0.50
11be EHT20	149	5745	18.15	15.03	0.50
11be EHT20	157	5785	18.57	15.03	0.50
11be EHT20	165	5825	18.93	14.19	0.50
11be EHT40	151	5755	38.16	38.04	0.50
11be EHT40	159	5795	37.92	38.22	0.50
11be EHT80	155	5775	77.88	73.92	0.50


In the 5.8G Band

Modulation Type	Channel	Frequency (MHz)	99% Bandwidth(MHz)	
			ANT A	ANT D
11a	149	5745	16.98	17.01
11a	157	5785	17.04	17.16
11a	165	5825	17.10	17.22
11be EHT20	149	5745	19.11	18.81
11be EHT20	157	5785	19.14	18.78
11be EHT20	165	5825	19.17	18.84
11be EHT40	151	5755	38.40	38.76
11be EHT40	159	5795	38.40	38.88
11be EHT80	155	5775	77.64	78.24

UNII Emission Bandwidth Result (Extends across 5725MHz band)						
Modulation Type	Data Rate / MCS	Frequency (MHz)	6dB Bandwidth(MHz)		99% Bandwidth(MHz)	
			ANT A	ANT D	ANT A	ANT D
11a	6 Mbps	5720	3.00	2.50	5.00	5.00
11be EHT20	NSS1-MCS0	5720	4.50	3.63	4.88	4.75
11be EHT40	NSS1-MCS0	5710	4.00	4.13	5.50	5.50
11be EHT80	NSS1-MCS0	5690	4.13	4.00	6.63	6.63




6dB Bandwidth, ANT A
Modulation Type: 802.11a (6Mbps)
CH149

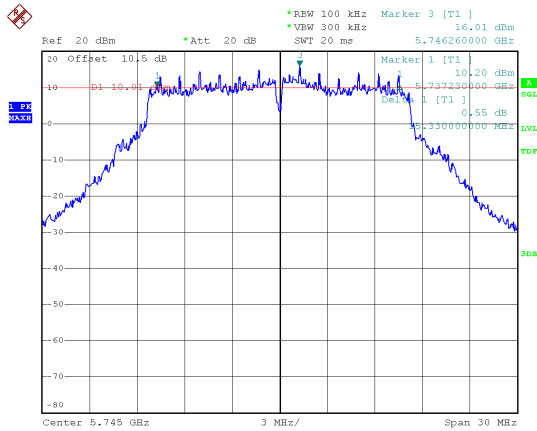


Date: 3.JAN.2025 13:25:05

Modulation Type: 802.11be EHT20 (7.3Mbps)
CH149

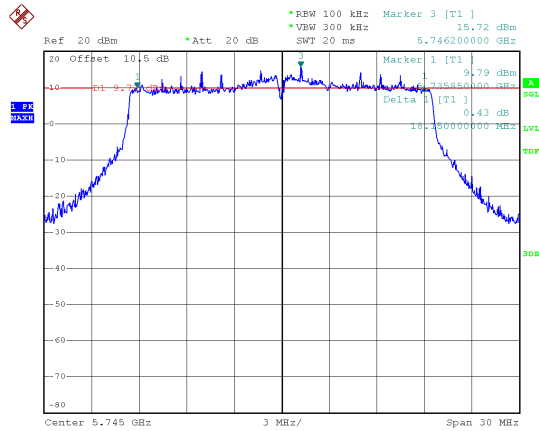


Date: 6.JAN.2025 11:12:28

CH157

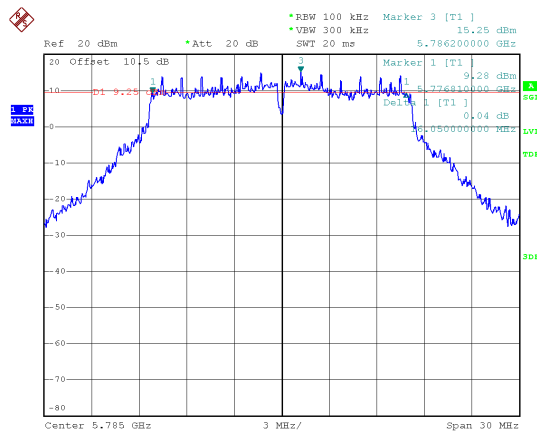


Date: 3.JAN.2025 13:28:30

CH157

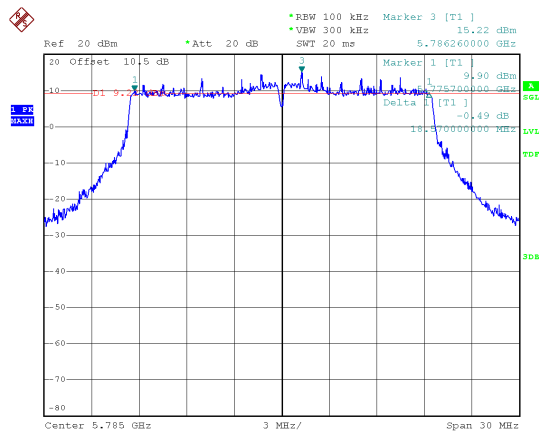


Date: 6.JAN.2025 11:35:31

CH165

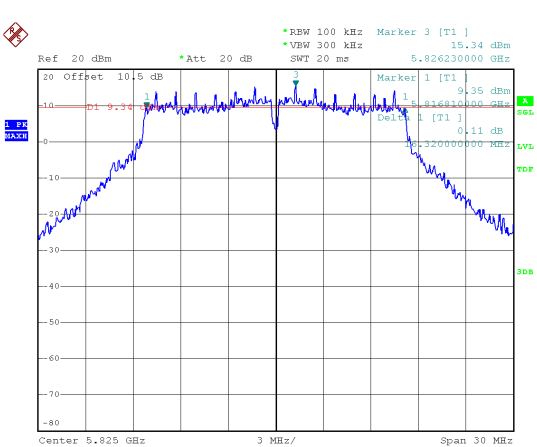

Date: 3.JAN.2025 13:33:26

CH165

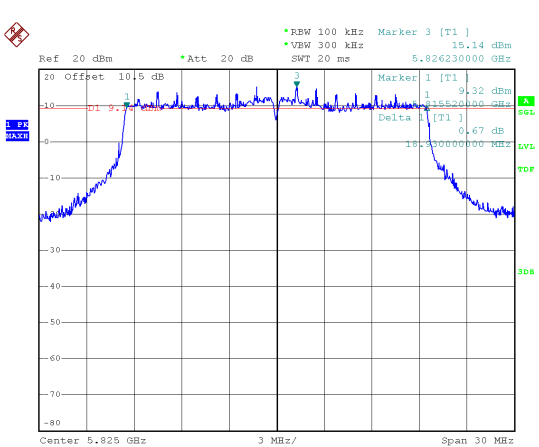


Date: 6.JAN.2025 11:39:33




6dB Bandwidth, ANT A

Modulation Type: 802.11be EHT40 (14.6Mbps)
CH151

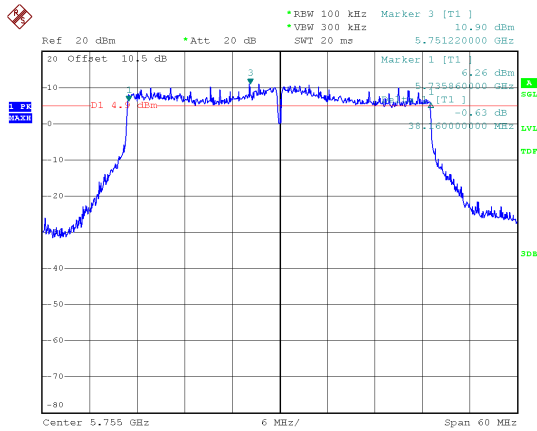


Date: 6.JAN.2025 14:39:36

Modulation Type: 802.11be EHT80 (30.6Mbps)
CH155

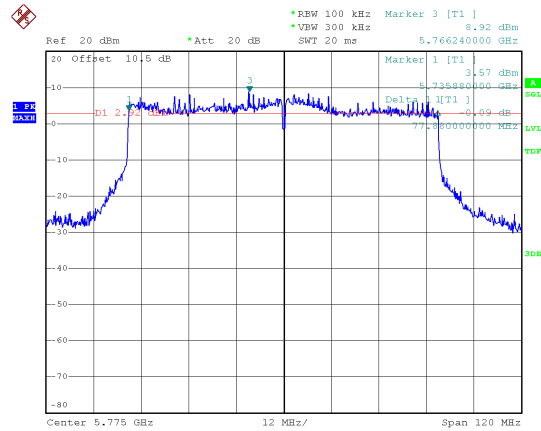

Date: 6.JAN.2025 16:06:55

CH159

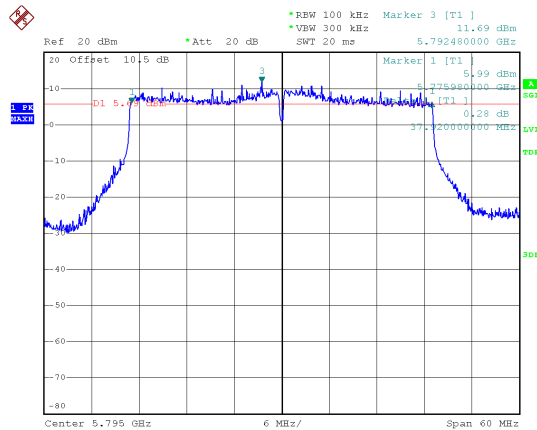


Date: 6.JAN.2025 14:43:47




6dB Bandwidth, ANT D

Modulation Type: 802.11a (6Mbps)
CH149

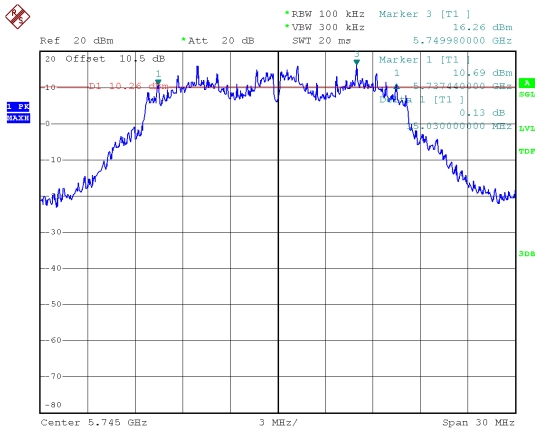


Date: 3.JAN.2025 13:26:15

Modulation Type: 802.11be EHT20 (7.3Mbps)
CH149

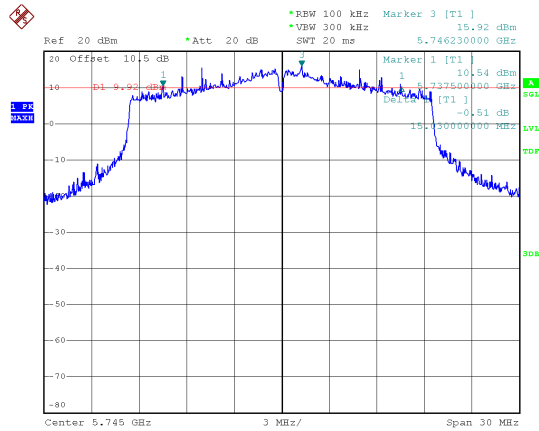


Date: 6.JAN.2025 11:14:00

CH157

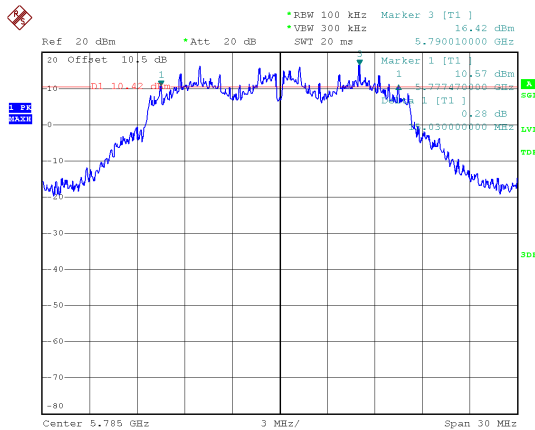


Date: 3.JAN.2025 13:29:39

CH157

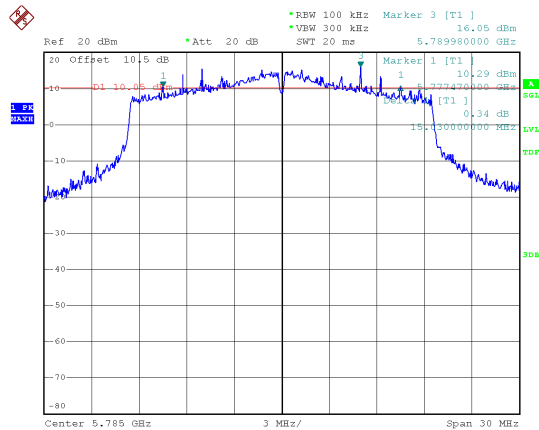


Date: 6.JAN.2025 11:37:03

CH165

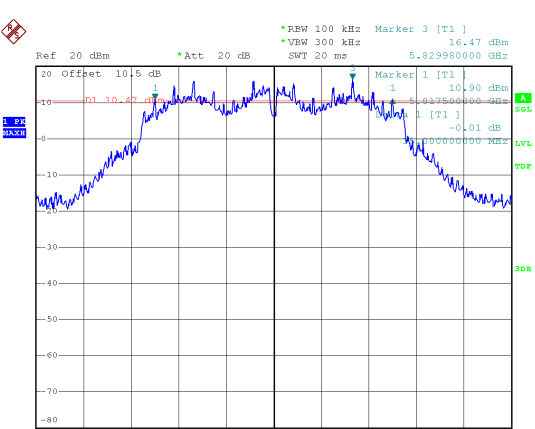

Date: 3.JAN.2025 13:34:34

CH165

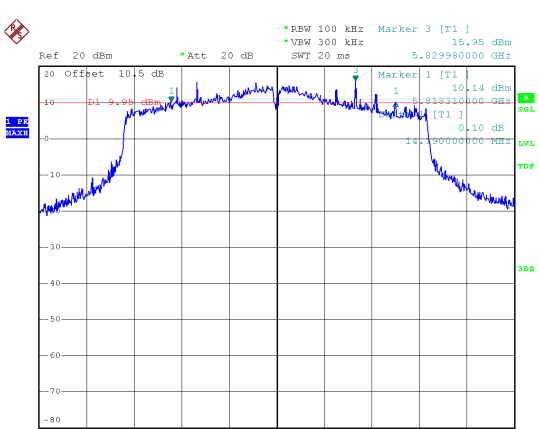


Date: 6.JAN.2025 11:41:06




6dB Bandwidth, ANT D

Modulation Type: 802.11be EHT40 (14.6Mbps)
CH151

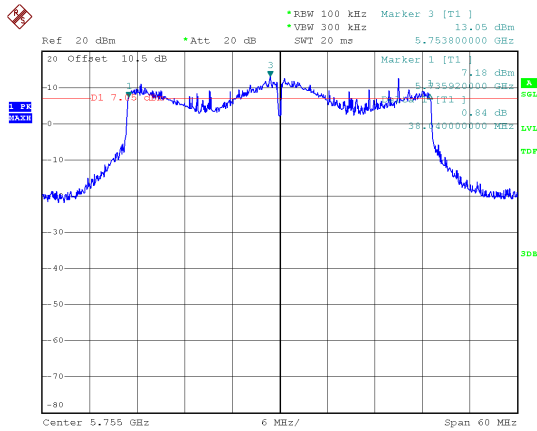


Date: 6.JAN.2025 14:41:10

Modulation Type: 802.11be EHT80 (30.6Mbps)
CH155

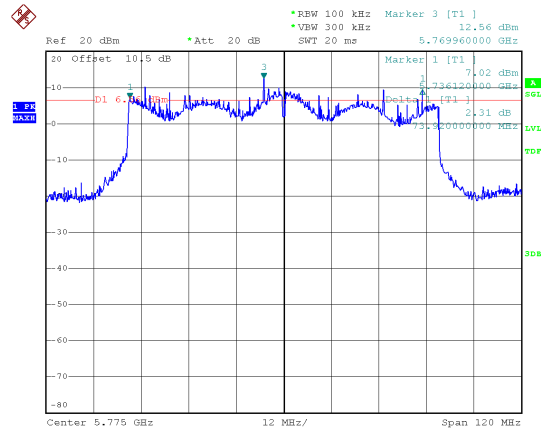

Date: 6.JAN.2025 16:08:29

CH159

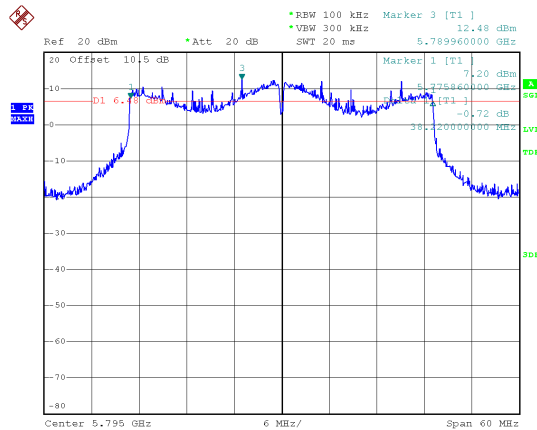


Date: 6.JAN.2025 14:45:21



6dB Bandwidth, ANT A


Extends across 5725MHz Band, Straddle Channel

Modulation Type: 802.11a (6Mbps)
CH144

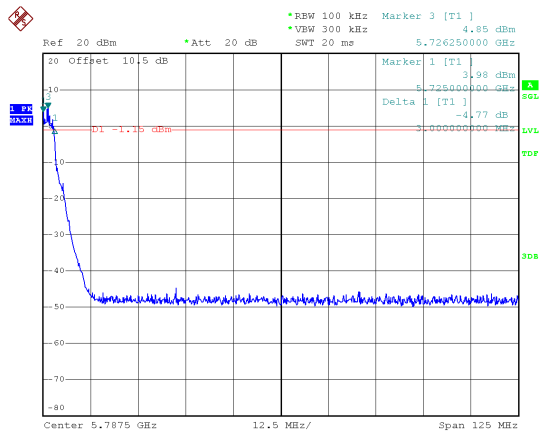


Date: 3.JAN.2025 11:50:43

Modulation Type: 802.11be EHT80 (30.6Mbps)
CH138

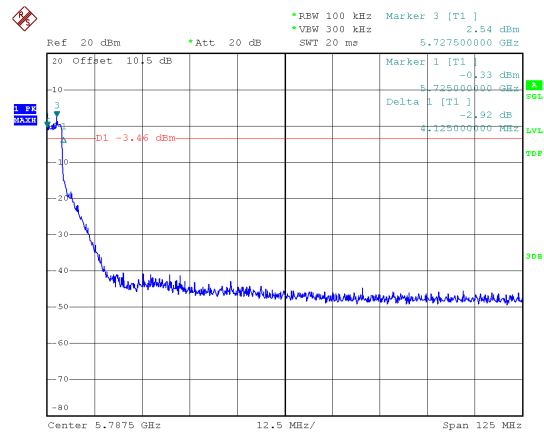


Date: 6.JAN.2025 15:59:15

Modulation Type: 802.11be EHT20 (7.3Mbps)
CH144

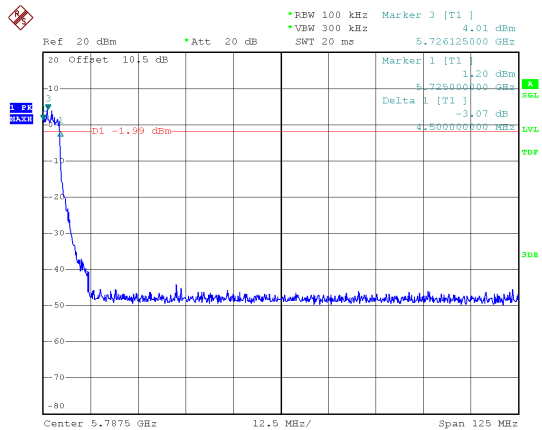

Date: 6.JAN.2025 10:28:47

Modulation Type: 802.11be EHT40 (14.6Mbps)
CH142

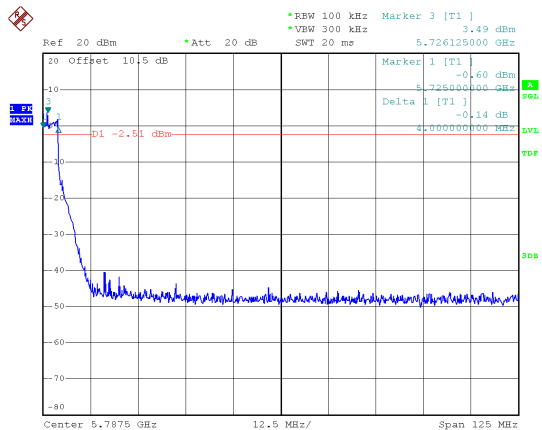


Date: 6.JAN.2025 14:35:57



6dB Bandwidth, ANT D


Extends across 5725MHz Band, Straddle Channel

Modulation Type: 802.11a (6Mbps)
CH144

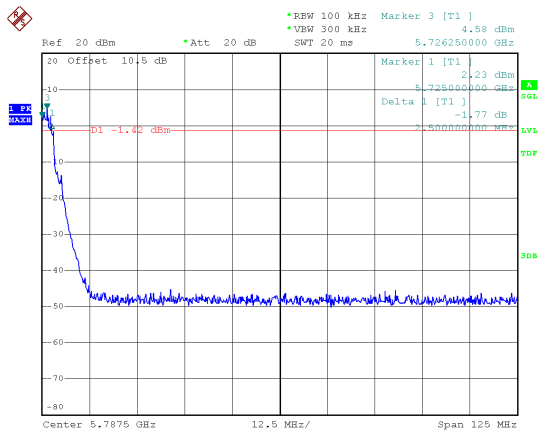


Date: 3.JAN.2025 11:53:28

Modulation Type: 802.11be EHT80 (30.6Mbps)
CH138

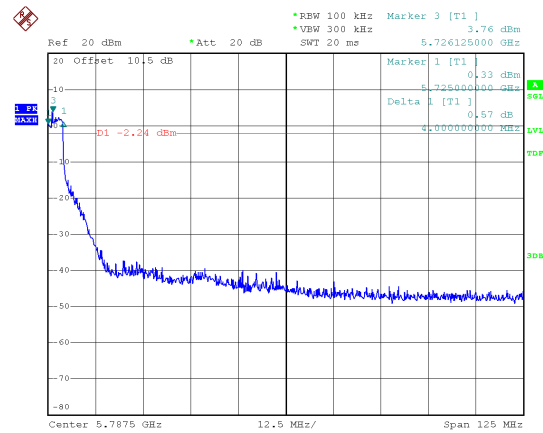


Date: 6.JAN.2025 16:00:47

Modulation Type: 802.11be EHT20 (7.3Mbps)
CH144

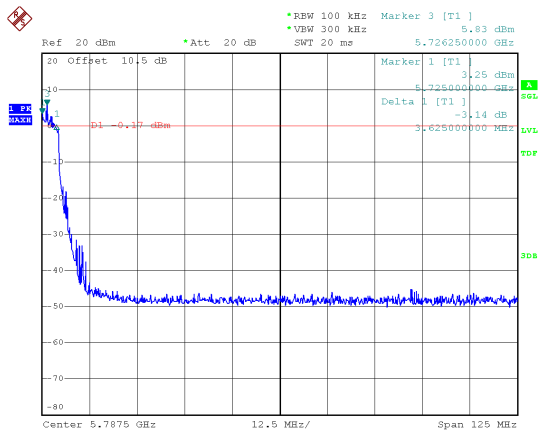

Date: 6.JAN.2025 10:33:15


Modulation Type: 802.11be EHT40 (14.6Mbps)
CH142

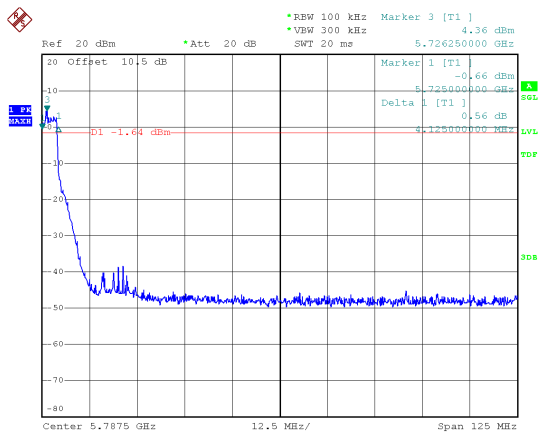

Date: 6.JAN.2025 14:37:28




99% Occupied Bandwidth, ANT A
Modulation Type: 802.11a (6Mbps)
CH149

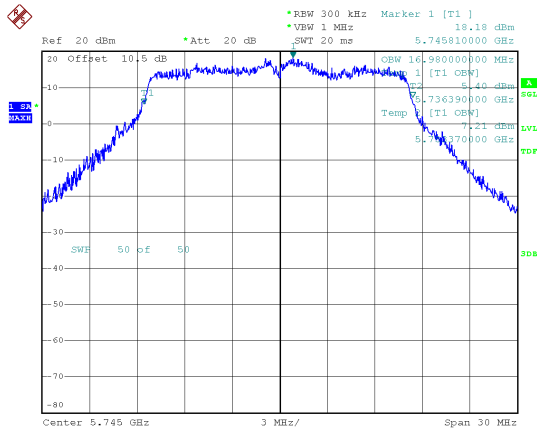


Date: 3.JAN.2025 13:24:41

Modulation Type: 802.11be EHT20 (7.3Mbps)
CH149

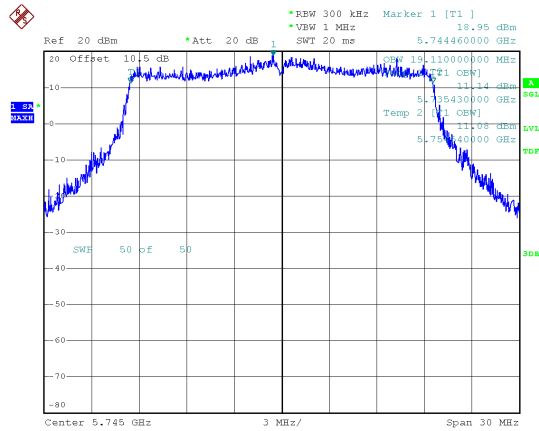


Date: 6.JAN.2025 11:12:04

CH157

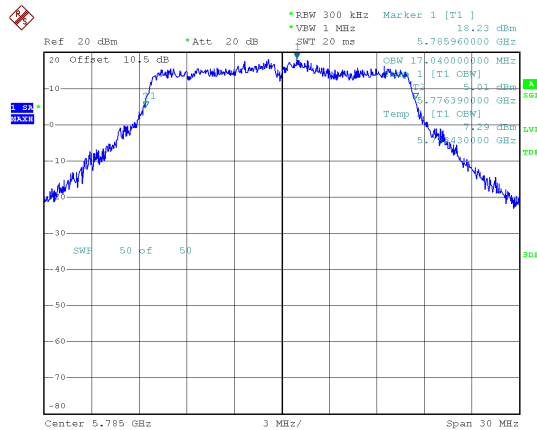


Date: 3.JAN.2025 13:28:06

CH157

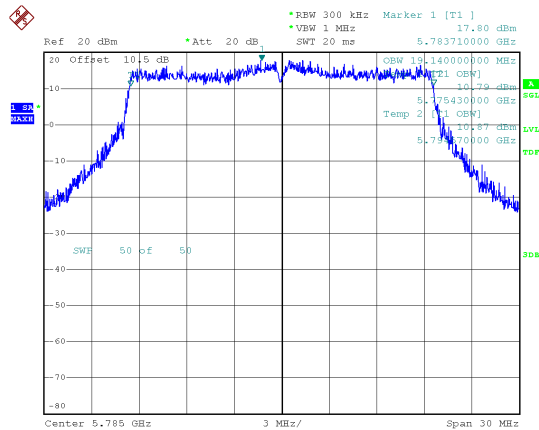


Date: 6.JAN.2025 11:35:07

CH165

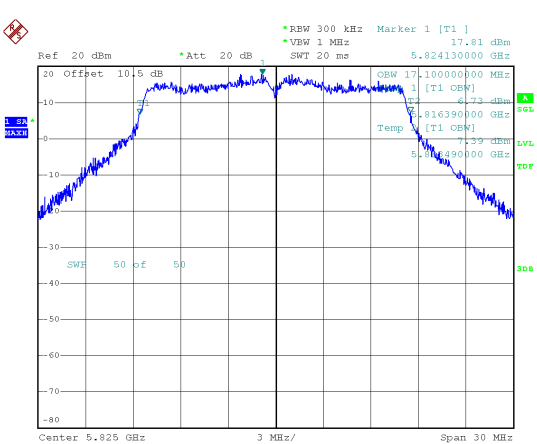

Date: 3.JAN.2025 13:33:02


CH165

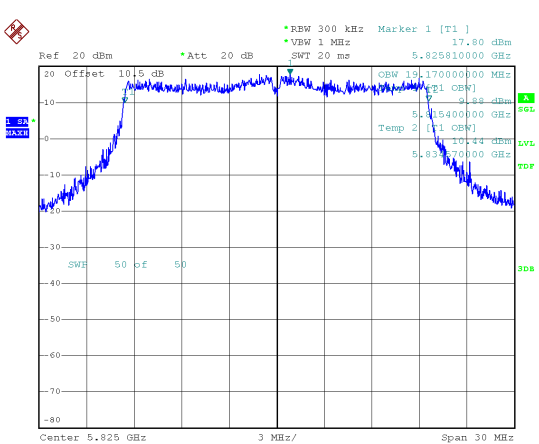

Date: 6.JAN.2025 11:39:09




99% Occupied Bandwidth, ANT A
Modulation Type: 802.11be EHT40 (14.6Mbps)
CH151

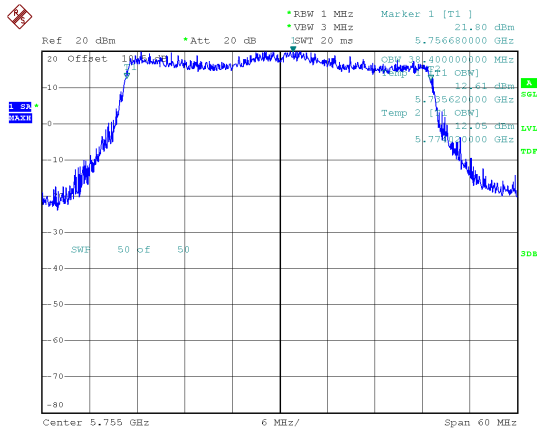


Date: 6.JAN.2025 14:39:12

Modulation Type: 802.11be EHT80 (30.6Mbps)
CH155

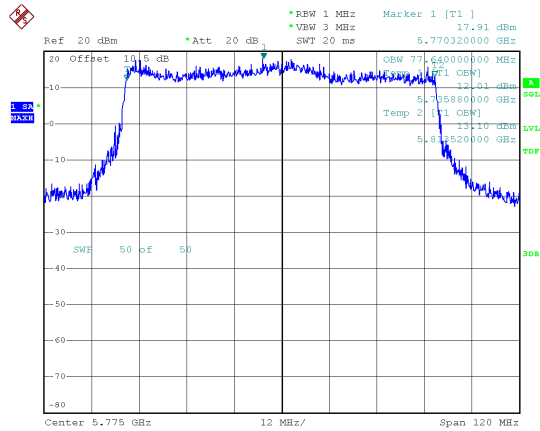

Date: 6.JAN.2025 16:06:31


CH159

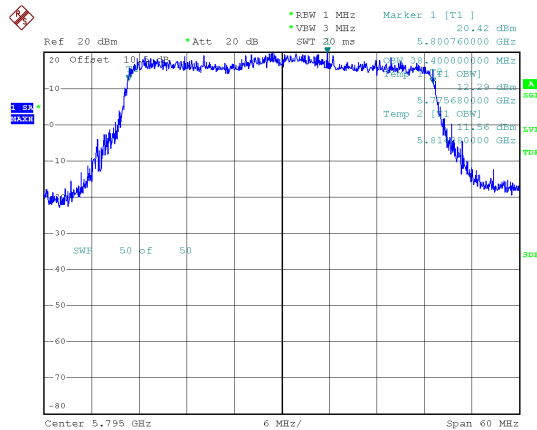

Date: 6.JAN.2025 14:43:23




99% Occupied Bandwidth, ANT D
Modulation Type: 802.11a (6Mbps)
CH149

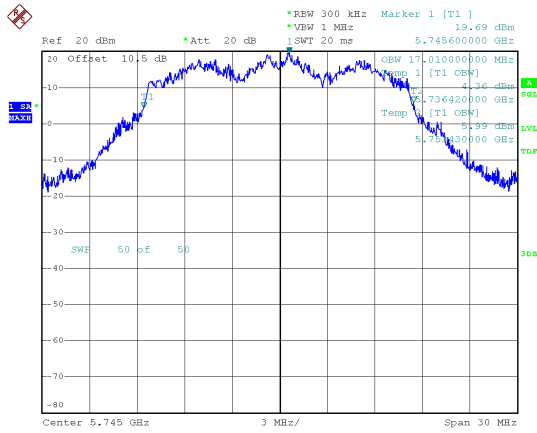


Date: 3.JAN.2025 13:25:51

Modulation Type: 802.11be EHT20 (7.3Mbps)
CH149

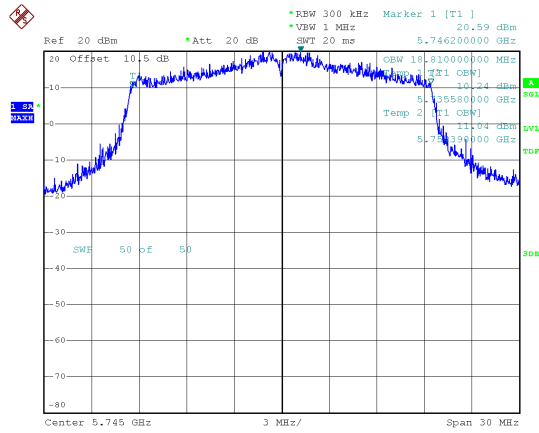


Date: 6.JAN.2025 11:13:36

CH157

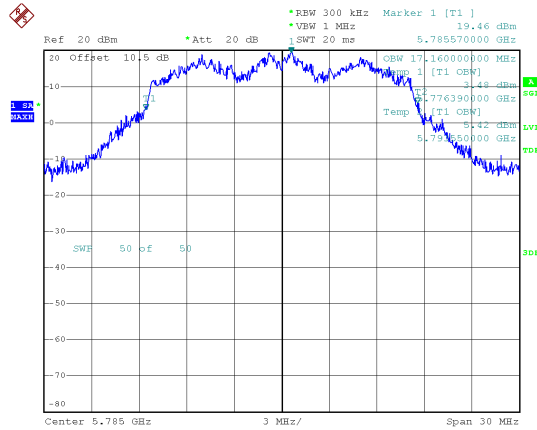


Date: 3.JAN.2025 13:29:15

CH157

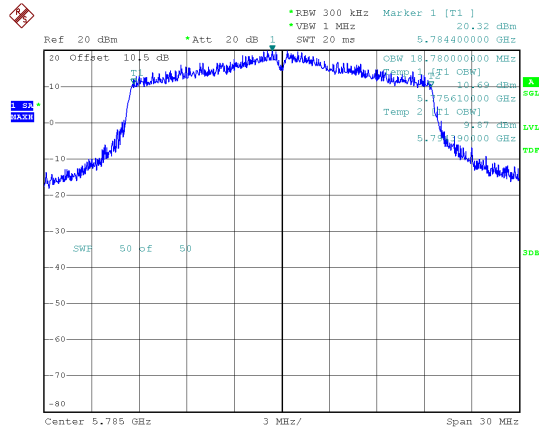


Date: 6.JAN.2025 11:36:39

CH165

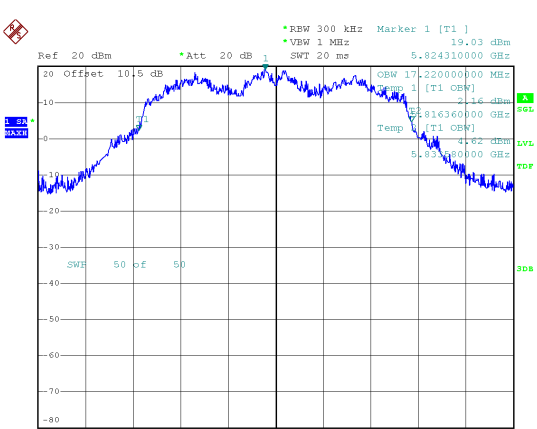

Date: 3.JAN.2025 13:34:10


CH165

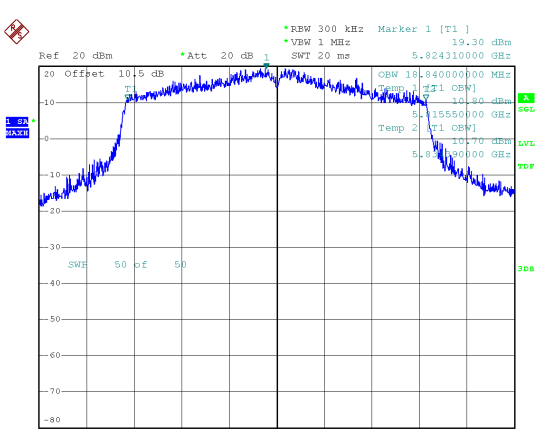

Date: 6.JAN.2025 11:40:42




99% Occupied Bandwidth, ANT D
Modulation Type: 802.11be EHT40 (14.6Mbps)
CH151

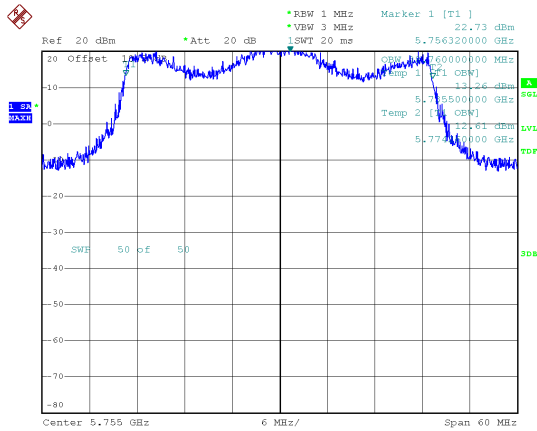


Date: 6.JAN.2025 14:40:46

Modulation Type: 802.11be EHT80 (30.6Mbps)
CH155

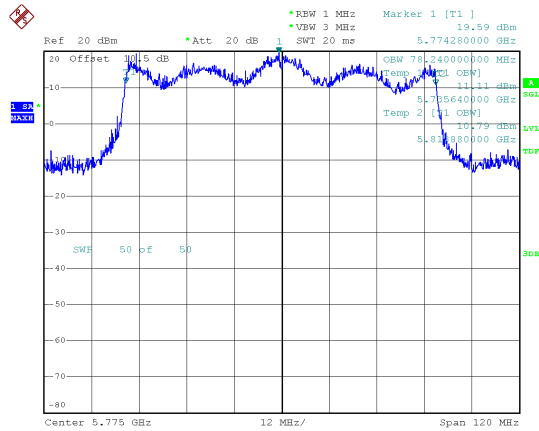

Date: 6.JAN.2025 16:08:05


CH159

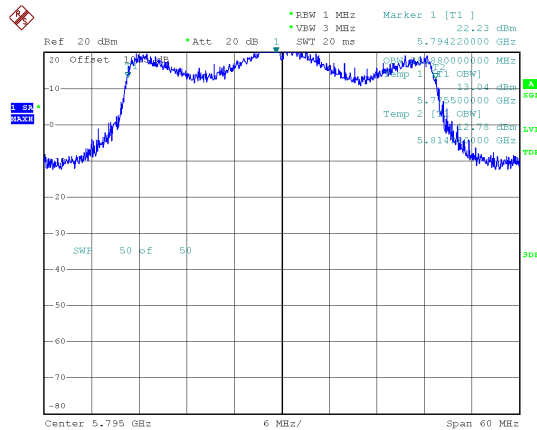




99% Occupied Bandwidth, ANT A
Extends across 5725MHz Band, Straddle Channel

Modulation Type: 802.11a (6Mbps)
CH144

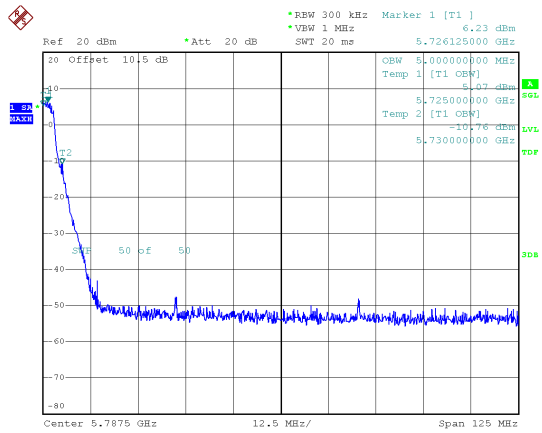


Date: 3.JAN.2025 11:49:54

Modulation Type: 802.11be EHT80 (30.6Mbps)
CH138

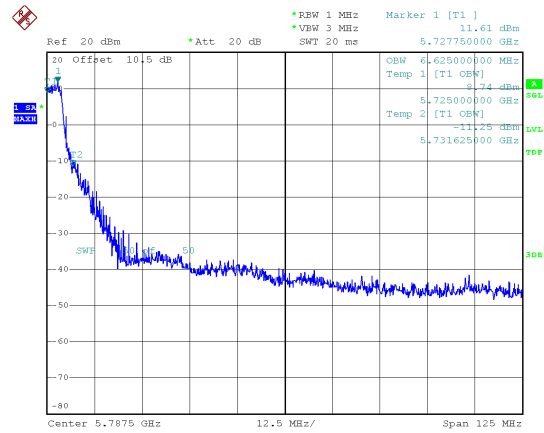


Date: 6.JAN.2025 15:58:26

Modulation Type: 802.11be EHT20 (7.3Mbps)
CH144

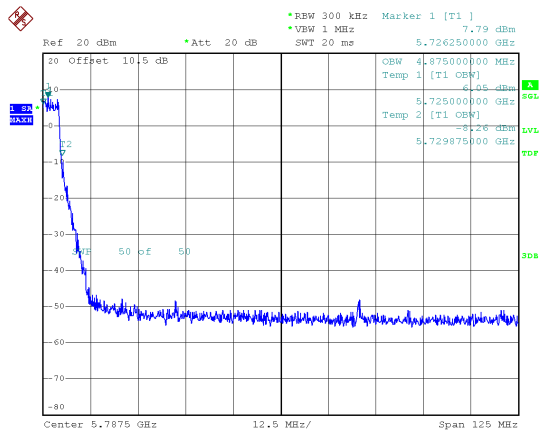

Date: 6.JAN.2025 10:27:58


Modulation Type: 802.11be EHT40 (14.6Mbps)
CH142

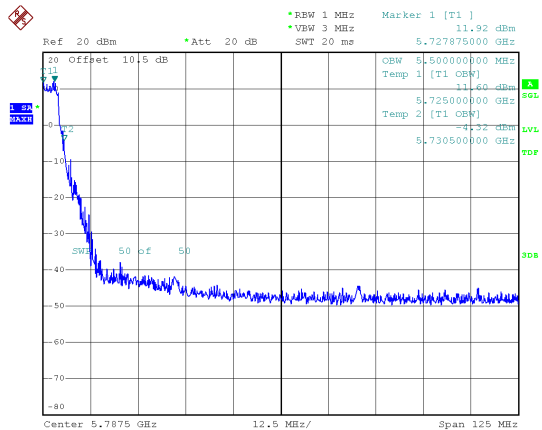

Date: 6.JAN.2025 14:35:08




99% Occupied Bandwidth, ANT D
Extends across 5725MHz Band, Straddle Channel
Modulation Type: 802.11a (6Mbps)
CH144

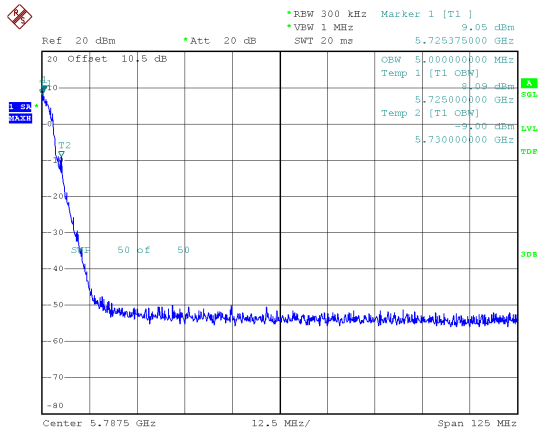


Date: 3.JAN.2025 11:52:39

Modulation Type: 802.11be EHT80 (30.6Mbps)
CH138

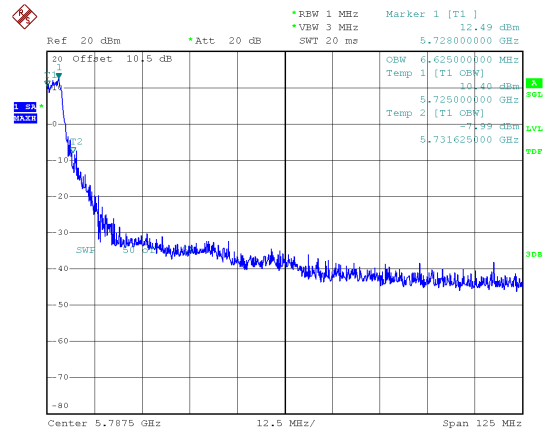


Date: 6.JAN.2025 15:59:57

Modulation Type: 802.11be EHT20 (7.3Mbps)
CH144

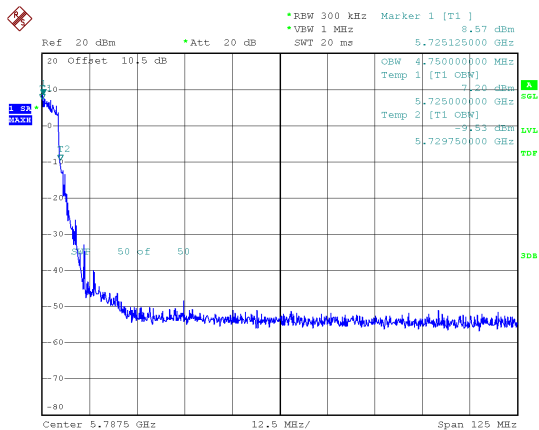

Date: 6.JAN.2025 10:32:26

Modulation Type: 802.11be EHT40 (14.6Mbps)
CH142

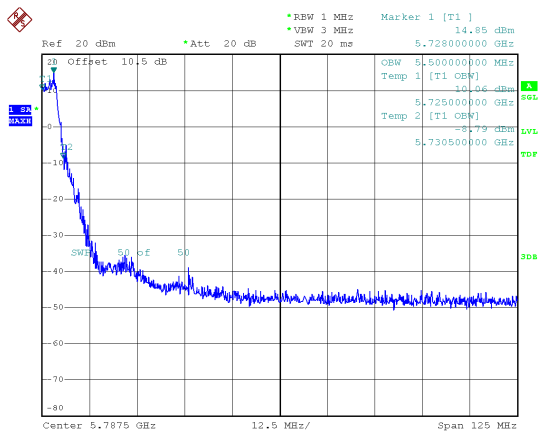

Date: 6.JAN.2025 14:36:39



9. 26dB Bandwidth & 99% Occupied Bandwidth


9.1. Test Limit

None; for reporting purposes only.

9.2. Test Procedure

Reference to 789033 D02 General UNII Test Procedures New Rules v01: The transmitter output is connected to a spectrum analyzer with the RBW = approximately 1% of the emission bandwidth, the VBW $\geq 3 \times$ RBW, peak detector and max hold.

9.3. Test Setup Layout



**9.4. Test Result and Data**

In the 5.2G Band

Mode	Channel	Frequency (MHz)	26dB Bandwidth(MHz)	
			ANT A	ANT D
11a	36	5180	22.9	22.75
11a	40	5200	22.65	22.6
11a	48	5240	22.25	22.3
11be EHT20	36	5180	23.35	22.9
11be EHT20	40	5200	24.15	23.2
11be EHT20	48	5240	23.85	23.15
11be EHT40	38	5190	44.8	45.4
11be EHT40	46	5230	45.1	44.6
11be EHT80	42	5210	85.6	86.72

In the 5.3G Band

Mode	Channel	Frequency (MHz)	26dB Bandwidth(MHz)	
			ANT A	ANT D
11a	52	5260	22.1	22.45
11a	60	5300	22.15	22.55
11a	64	5320	22.2	22.6
11be EHT20	52	5260	23.8	22.8
11be EHT20	60	5300	23.25	23.05
11be EHT20	64	5320	23.3	23.3
11be EHT40	54	5270	44.8	45.2
11be EHT40	62	5310	44.8	44.7
11be EHT80	58	5290	86.08	87.52

In the 5.5G Band

Mode	Channel	Frequency (MHz)	26dB Bandwidth(MHz)	
			ANT A	ANT D
11a	100	5500	21.9	22.05
11a	120	5600	22.5	21.95
11a	140	5700	22.4	21.7
11be EHT20	100	5500	22.25	23.05
11be EHT20	120	5600	21.65	22.45
11be EHT20	140	5700	22.4	21.5
11be EHT40	102	5510	44.6	45.2
11be EHT40	118	5590	45	44.3
11be EHT40	134	5670	44.8	44.6
11be EHT80	106	5530	84.8	87.36
11be EHT80	122	5610	86.4	86.72
11be EHT160	114	5570	174.48	175.68



UNII Emission Bandwidth Result (Within 5470-5725MHz band)				
Modulation Type	Data Rate / MCS	Frequency (MHz)	26dB Bandwidth(MHz)	
			ANT A	ANT D
11a	6 Mbps	5720	16.32	15.56
11be EHT20	NSS1-MCS0	5720	16.58	16.06
11be EHT40	NSS1-MCS0	5710	37.49	37.49
11be EHT80	NSS1-MCS0	5690	78.80	78.29

UNII Emission Bandwidth Result (Within 5150-5250MHz band)				
Modulation Type	Data Rate / MCS	Frequency (MHz)	26dB Bandwidth(MHz)	
			ANT A	ANT D
11be EHT160	NSS1-MCS0	5250	88.10	89.80

UNII Emission Bandwidth Result (Extends across 5250MHz band)				
Modulation Type	Data Rate / MCS	Frequency (MHz)	26dB Bandwidth(MHz)	
			ANT A	ANT D
11be EHT160	NSS1-MCS0	5250	79.00	79.00



In the 5.2G Band

Modulation Type	Channel	Frequency (MHz)	99% Bandwidth(MHz)	
			ANT A	ANT D
11a	36	5180	17.10	16.98
11a	40	5200	17.13	16.98
11a	48	5240	17.04	16.89
11be EHT20	36	5180	19.32	19.08
11be EHT20	40	5200	19.32	19.11
11be EHT20	48	5240	19.29	19.14
11be EHT40	38	5190	38.04	38.52
11be EHT40	46	5230	38.04	38.28
11be EHT80	42	5210	77.16	77.76

In the 5.3G Band

Modulation Type	Channel	Frequency (MHz)	99% Bandwidth(MHz)	
			ANT A	ANT D
11a	52	5260	17.04	16.95
11a	60	5300	17.04	16.98
11a	64	5320	17.04	16.92
11be EHT20	52	5260	19.32	19.08
11be EHT20	60	5300	19.41	19.17
11be EHT20	64	5320	19.26	19.17
11be EHT40	54	5270	37.92	38.34
11be EHT40	62	5310	38.16	38.28
11be EHT80	58	5290	77.28	77.64

In the 5.5G Band

Modulation Type	Channel	Frequency (MHz)	99% Bandwidth(MHz)	
			ANT A	ANT D
11a	100	5500	16.95	16.95
11a	120	5600	17.01	16.92
11a	140	5700	16.98	16.86
11be EHT20	100	5500	18.96	19.14
11be EHT20	120	5600	18.90	19.05
11be EHT20	140	5700	19.02	18.87
11be EHT40	102	5510	38.52	38.40
11be EHT40	118	5590	38.64	38.46
11be EHT40	134	5670	38.52	38.64
11be EHT80	106	5530	78.00	77.76
11be EHT80	122	5610	78.00	77.76
11be EHT160	114	5570	158.16	158.16




UNII Emission Bandwidth Result (Within 5470-5725MHz band)				
Modulation Type	Data Rate / MCS	Frequency (MHz)	99% Bandwidth(MHz)	
			ANT A	ANT D
11a	6 Mbps	5720	13.52	13.52
11be EHT20	NSS1-MCS0	5720	14.54	14.54
11be EHT40	NSS1-MCS0	5710	34.43	34.17
11be EHT80	NSS1-MCS0	5690	73.70	73.44

UNII Emission Bandwidth Result (Within 5150-5250MHz band)				
Modulation Type	Data Rate / MCS	Frequency (MHz)	99% Bandwidth(MHz)	
			ANT A	ANT D
11be EHT160	NSS1-MCS0	5250	78.80	79.50

UNII Emission Bandwidth Result (Extends across 5250MHz band)				
Modulation Type	Data Rate / MCS	Frequency (MHz)	99% Bandwidth(MHz)	
			ANT A	ANT D
11be EHT160	NSS1-MCS0	5250	78.90	79.10




26dB Bandwidth, ANT A
Modulation Type: 802.11a (6Mbps)
CH36

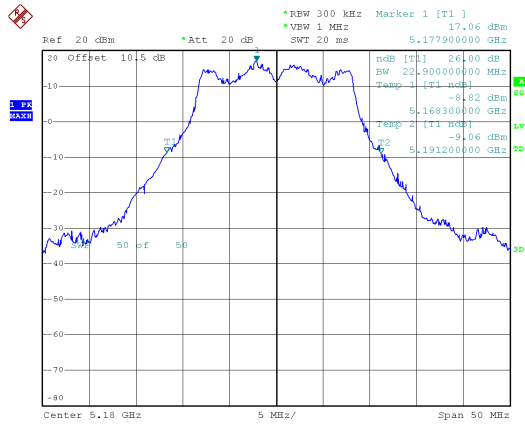


Date: 2.JAN.2025 17:45:07

Modulation Type: 802.11be EHT20 (7.3Mbps)
CH36

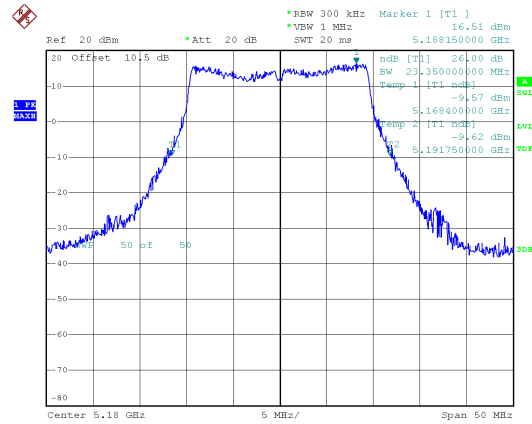


Date: 3.JAN.2025 14:27:55

CH40

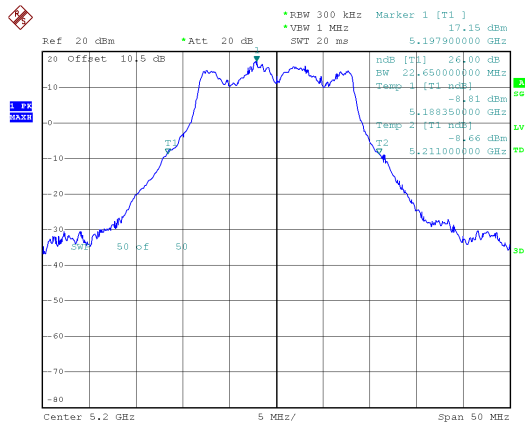


Date: 2.JAN.2025 17:52:12

CH40

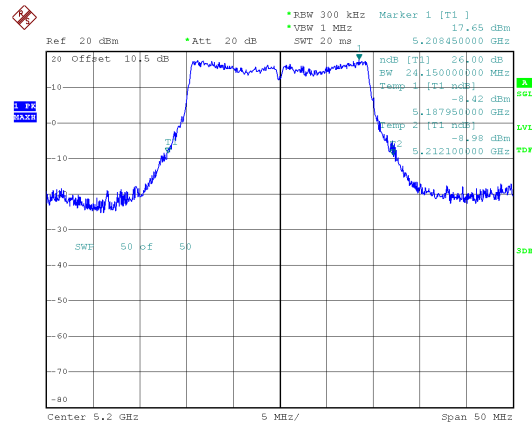


Date: 3.JAN.2025 14:38:43

CH48

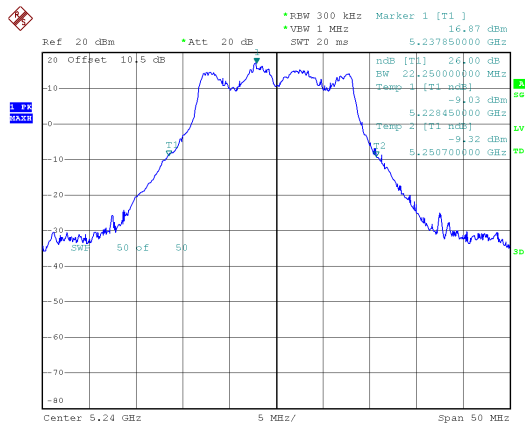

Date: 3.JAN.2025 10:33:11


CH48

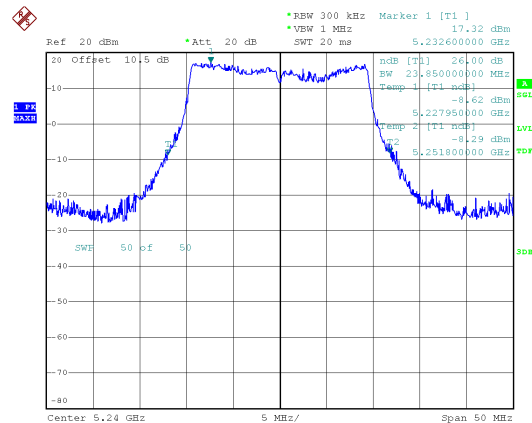


Date: 3.JAN.2025 14:57:05



26dB Bandwidth, ANT A

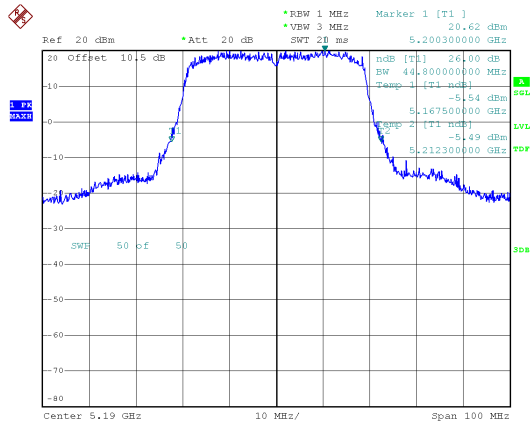
Modulation Type: 802.11be EHT40 (14.6Mbps)
CH38

Date: 6.JAN.2025 11:47:24

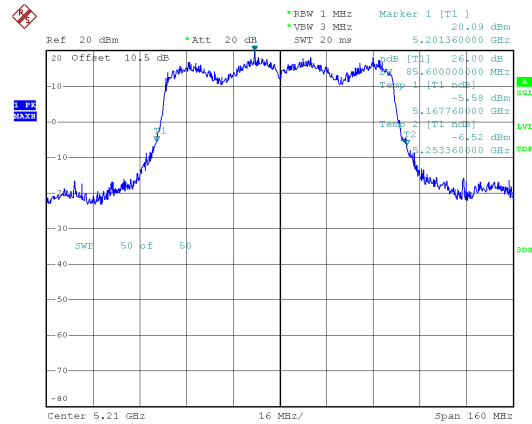Modulation Type: 802.11be EHT80 (30.6Mbps)
CH42

Date: 6.JAN.2025 14:55:00


CH46

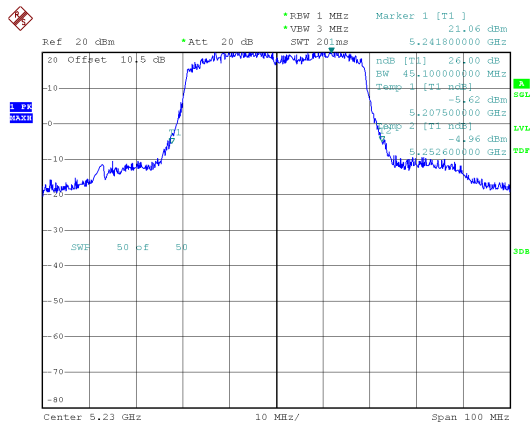

Date: 6.JAN.2025 11:53:02




26dB Bandwidth, ANT D
Modulation Type: 802.11a (6Mbps)
CH36

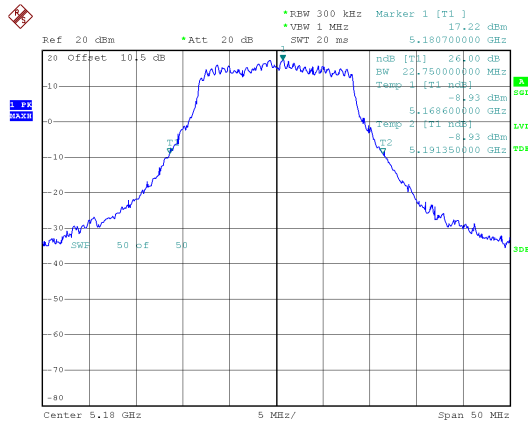


Date: 2.JAN.2025 17:46:14

Modulation Type: 802.11be EHT20 (7.3Mbps)
CH36

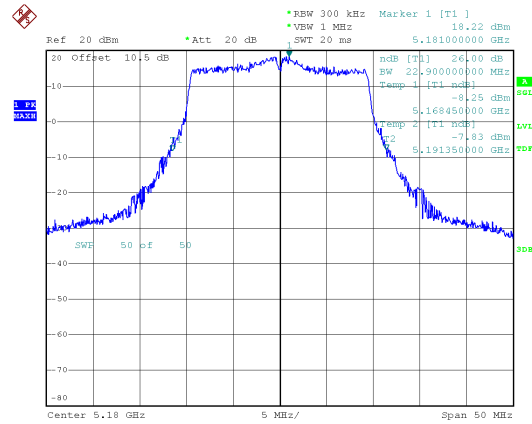


Date: 3.JAN.2025 14:29:03

CH40

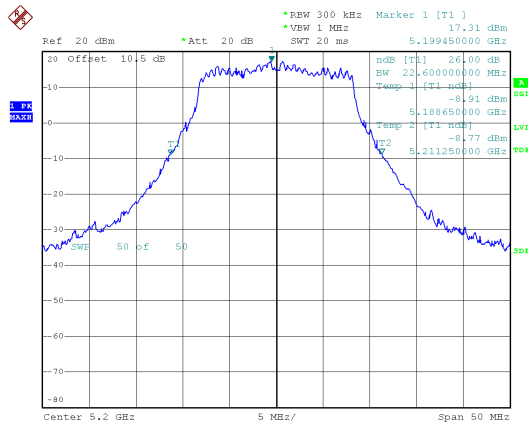


Date: 2.JAN.2025 17:53:00

CH40

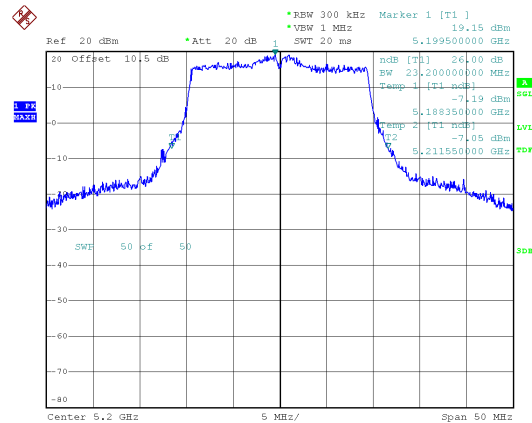


Date: 3.JAN.2025 14:39:51

CH48

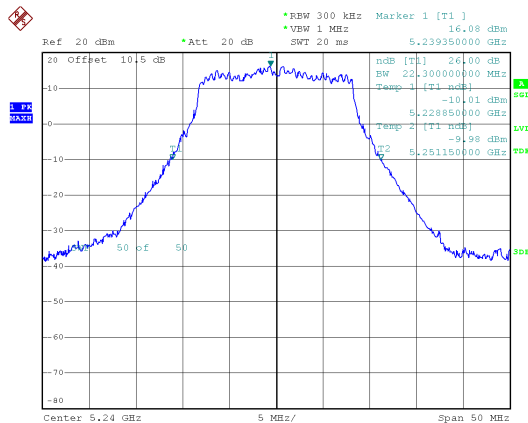

Date: 3.JAN.2025 10:35:06

CH48

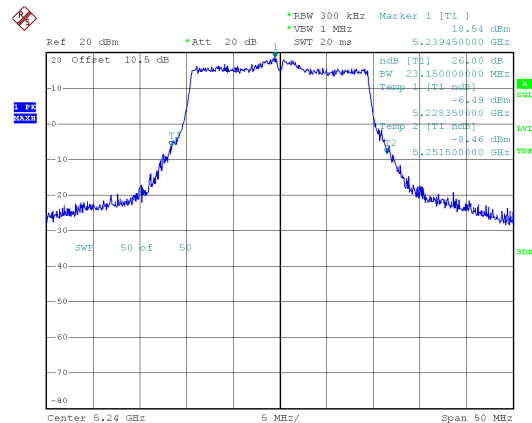


Date: 3.JAN.2025 14:58:20




26dB Bandwidth, ANT D

Modulation Type: 802.11be EHT40 (14.6Mbps)
CH38

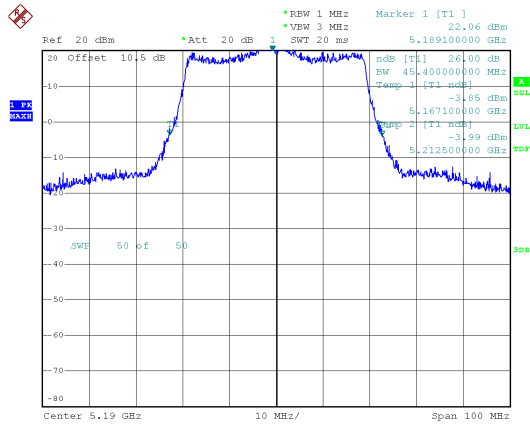


Date: 6.JAN.2025 11:48:56

Modulation Type: 802.11be EHT80 (30.6Mbps)
CH42

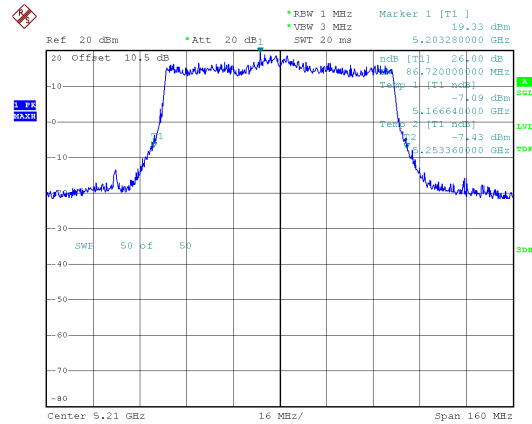

Date: 6.JAN.2025 14:56:01


CH46

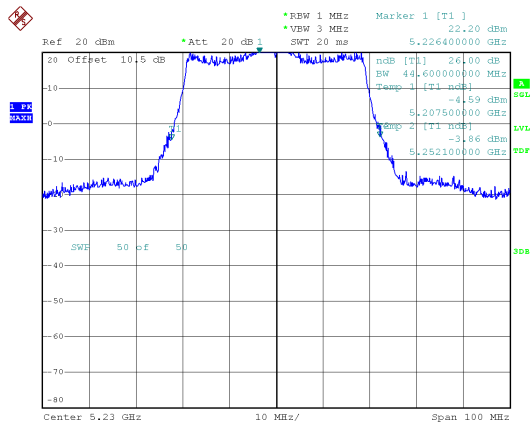

Date: 6.JAN.2025 13:17:29




26dB Bandwidth, ANT A
Modulation Type: 802.11a (6Mbps)
CH52

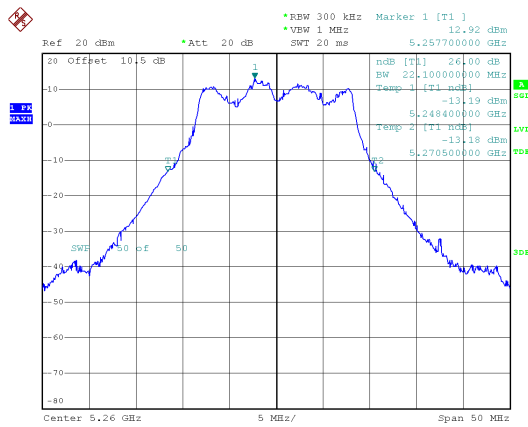


Date: 3.JAN.2025 10:38:24

Modulation Type: 802.11be EHT20 (7.3Mbps)
CH52

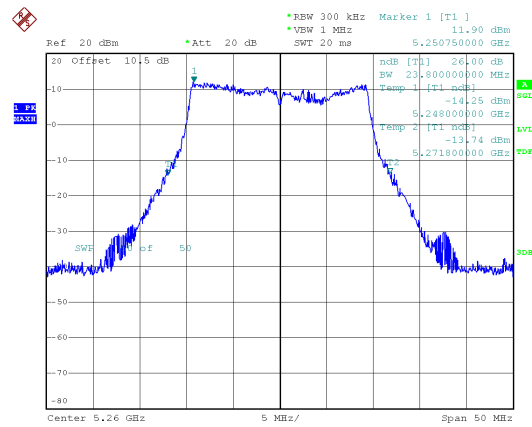


Date: 3.JAN.2025 15:14:04

CH60

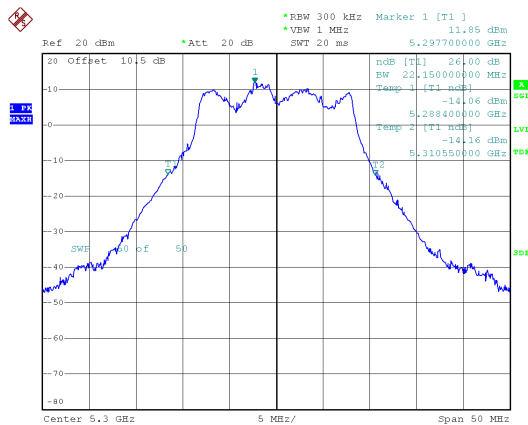


Date: 3.JAN.2025 10:46:12

CH60

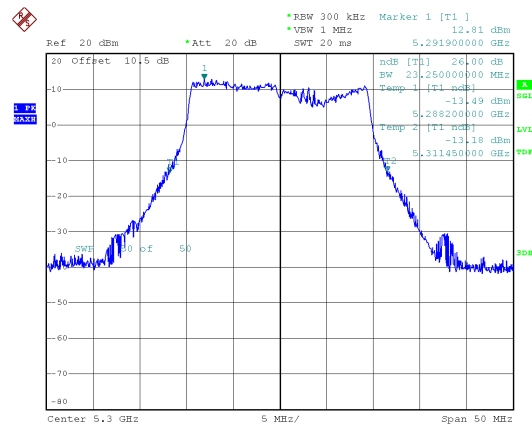


Date: 3.JAN.2025 15:34:58

CH64

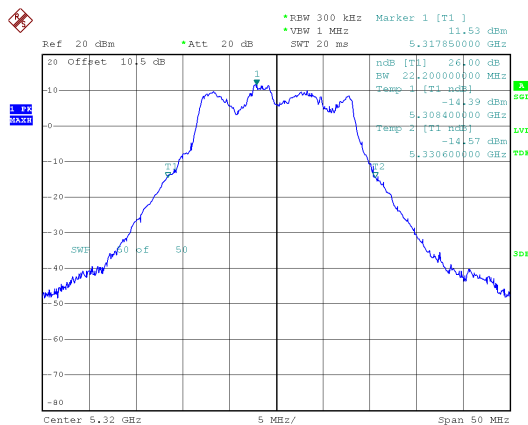

Date: 3.JAN.2025 11:03:28


CH64

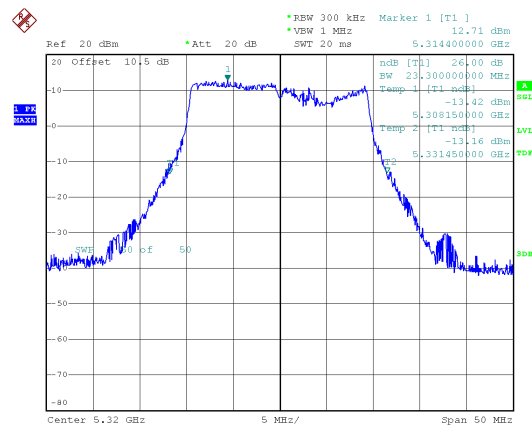

Date: 3.JAN.2025 15:39:10




26dB Bandwidth, ANT A
Modulation Type: 802.11be EHT40 (14.6Mbps)
CH54

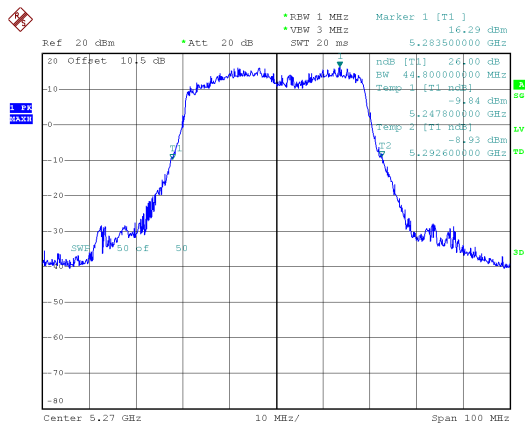


Date: 6.JAN.2025 13:20:21

Modulation Type: 802.11be EHT80 (30.6Mbps)
CH58

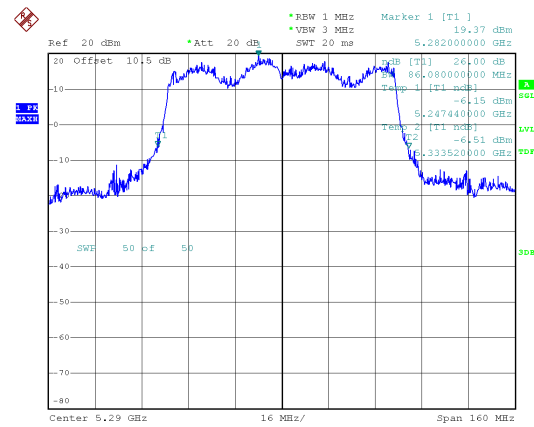

Date: 6.JAN.2025 15:01:53


CH62

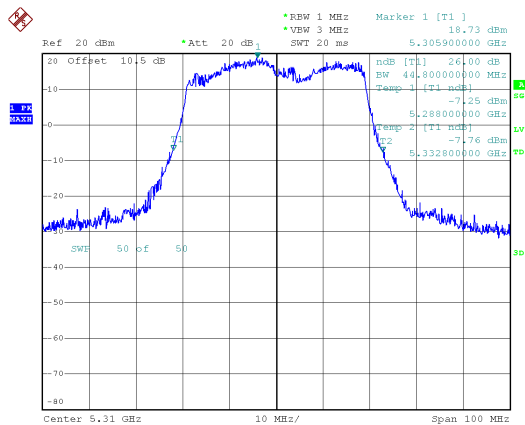

Date: 6.JAN.2025 13:37:56




26dB Bandwidth, ANT D
Modulation Type: 802.11a (6Mbps)
CH52

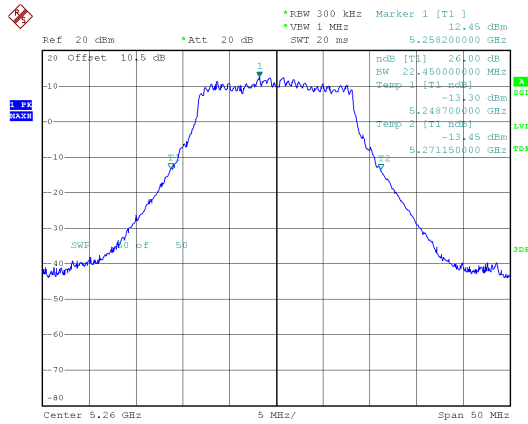


Date: 3.JAN.2025 10:40:38

Modulation Type: 802.11be EHT20 (7.3Mbps)
CH52

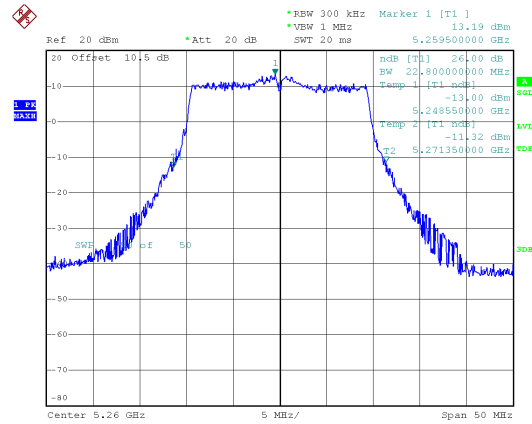


Date: 3.JAN.2025 15:15:12

CH60

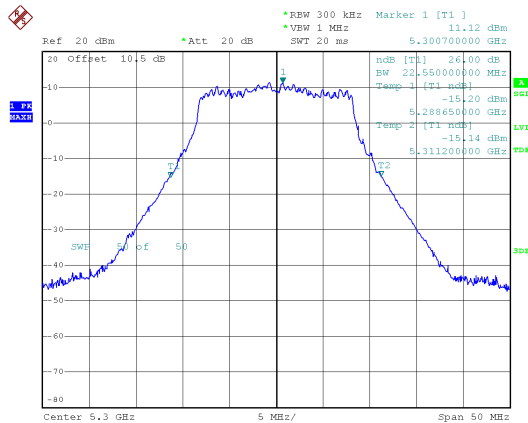


Date: 3.JAN.2025 10:47:39

CH60

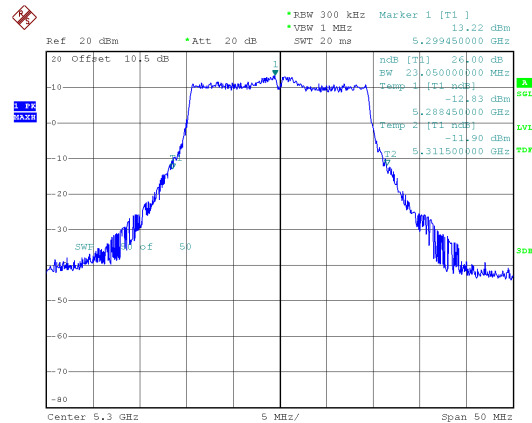


Date: 3.JAN.2025 15:36:27

CH64

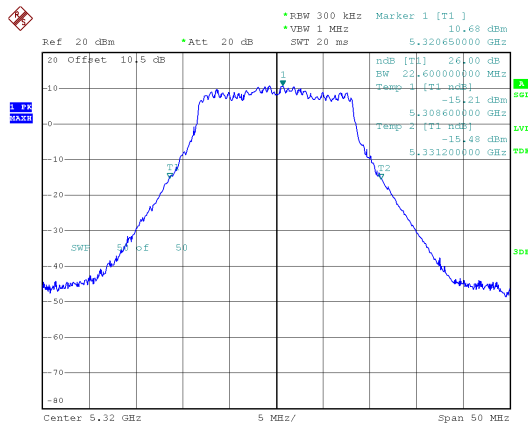

Date: 3.JAN.2025 11:04:54


CH64

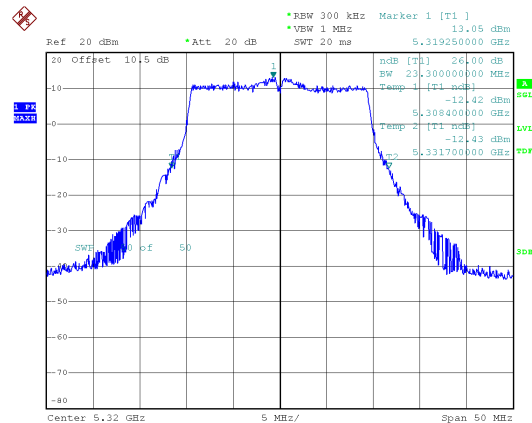


Date: 3.JAN.2025 15:40:38



26dB Bandwidth, ANT D

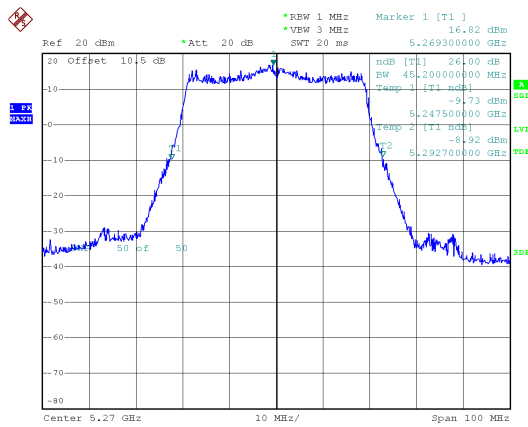
Modulation Type: 802.11be EHT40 (14.6Mbps)
CH54

Date: 6.JAN.2025 13:22:37

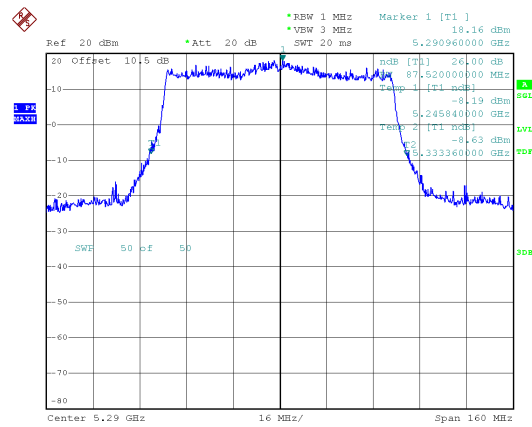Modulation Type: 802.11be EHT80 (30.6Mbps)
CH58

Date: 6.JAN.2025 15:03:26


CH62

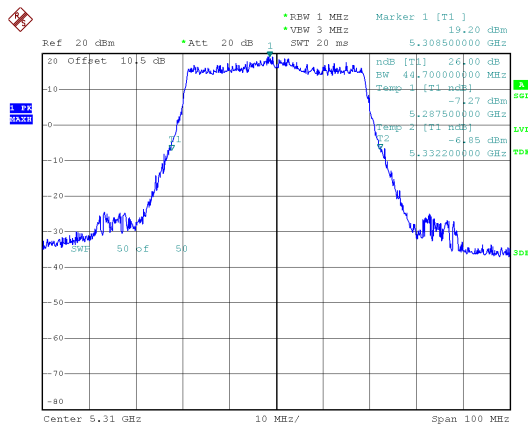

Date: 6.JAN.2025 13:39:00




26dB Bandwidth, ANT A
Modulation Type: 802.11a (6Mbps)
CH100

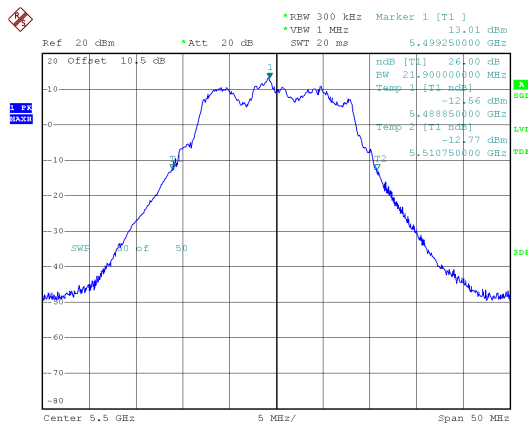


Date: 3.JAN.2025 11:07:48

Modulation Type: 802.11be EHT20 (7.3Mbps)
CH100

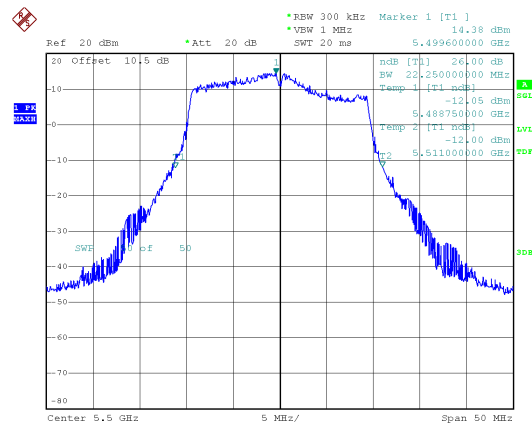


Date: 3.JAN.2025 16:37:09

CH120

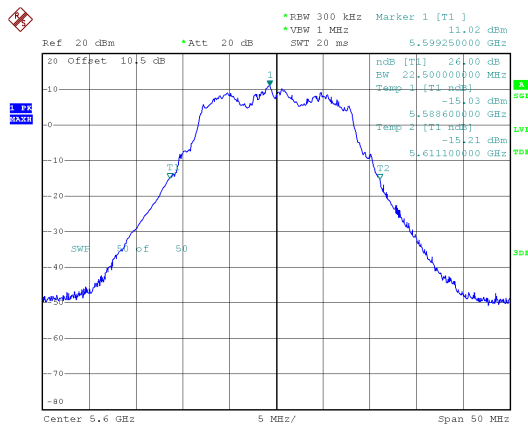


Date: 3.JAN.2025 11:24:01

CH120

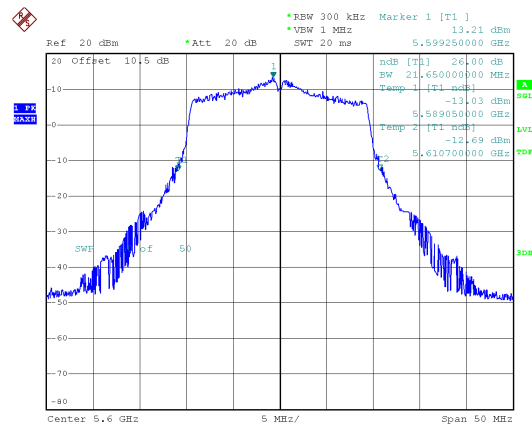


Date: 3.JAN.2025 16:54:28

CH140

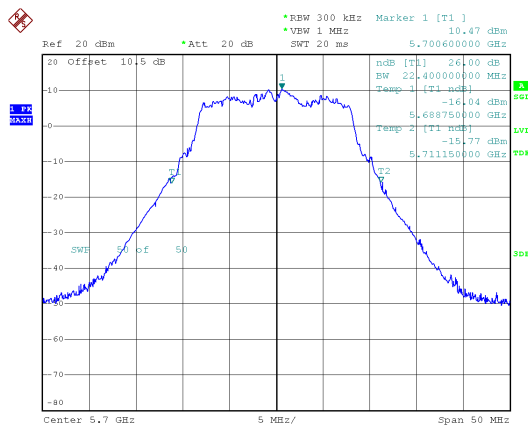

Date: 3.JAN.2025 11:41:30

CH140

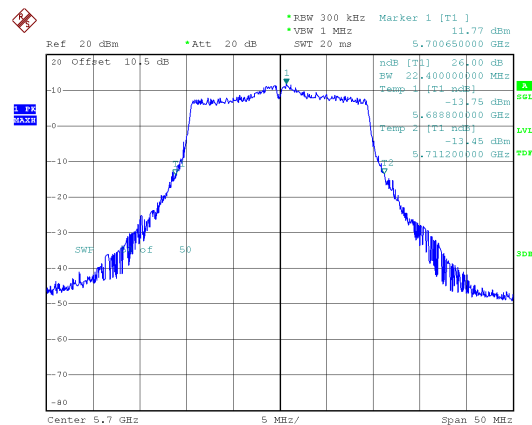


Date: 6.JAN.2025 09:43:39




26dB Bandwidth, ANT A

Modulation Type: 802.11be EHT40 (14.6Mbps)
CH102

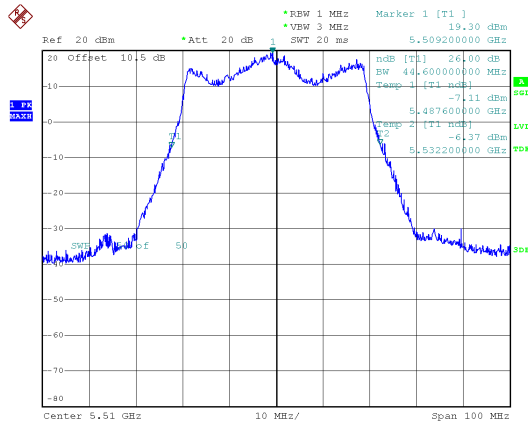


Date: 6.JAN.2025 13:50:19

Modulation Type: 802.11be EHT80 (30.6Mbps)
CH106

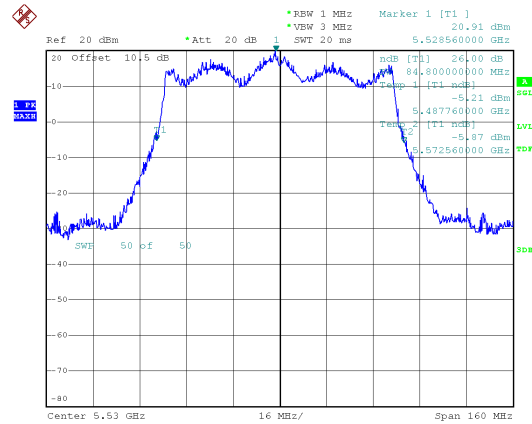


Date: 6.JAN.2025 15:25:11

CH118

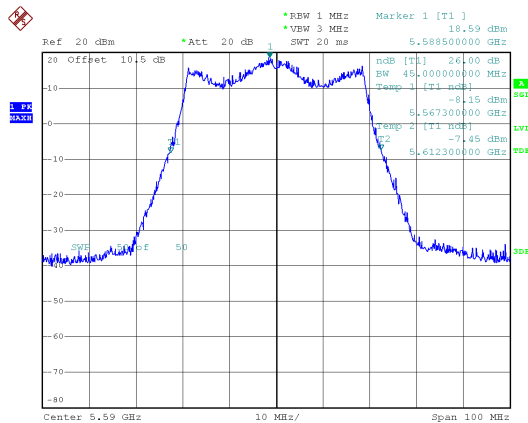


Date: 6.JAN.2025 14:10:33

CH122

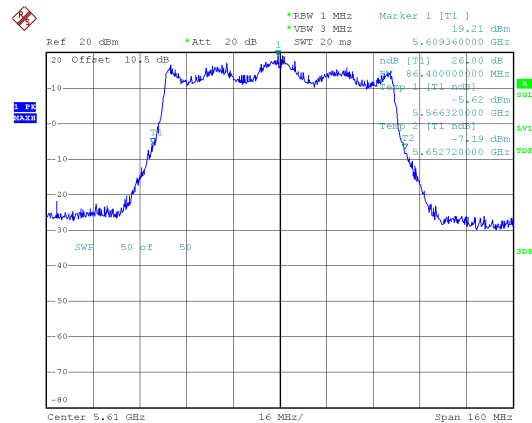

CH134

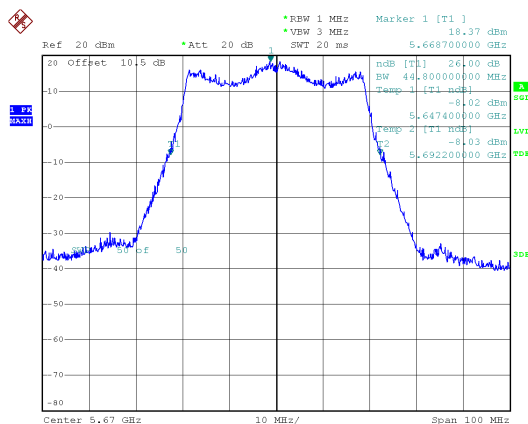


Date: 6.JAN.2025 14:15:30



26dB Bandwidth, ANT A


Modulation Type: 802.11be EHT160 (61.3Mbps)
CH114

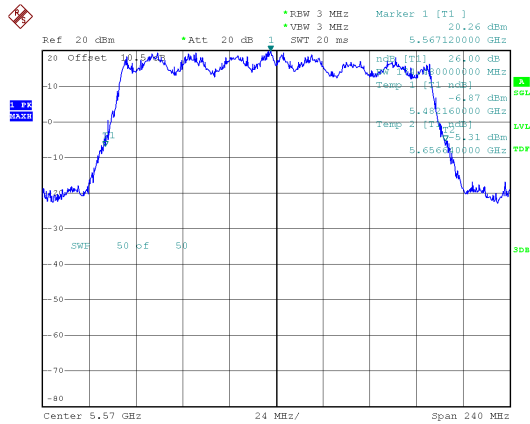

Date: 6.JAN.2025 16:48:22




26dB Bandwidth, ANT D
Modulation Type: 802.11a (6Mbps)
CH100

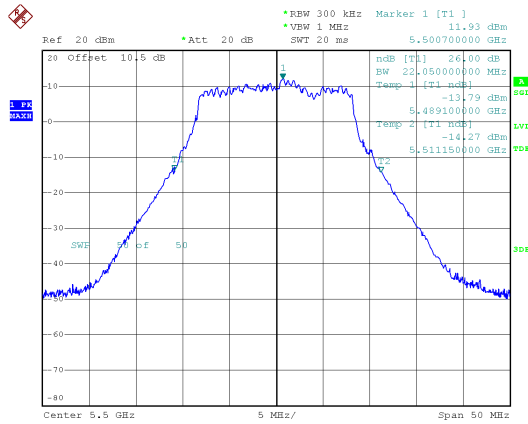


Date: 3.JAN.2025 11:08:56

Modulation Type: 802.11be EHT20 (7.3Mbps)
CH100

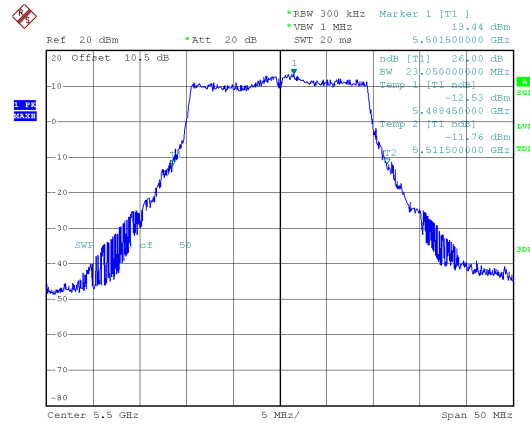


Date: 3.JAN.2025 16:38:47

CH120

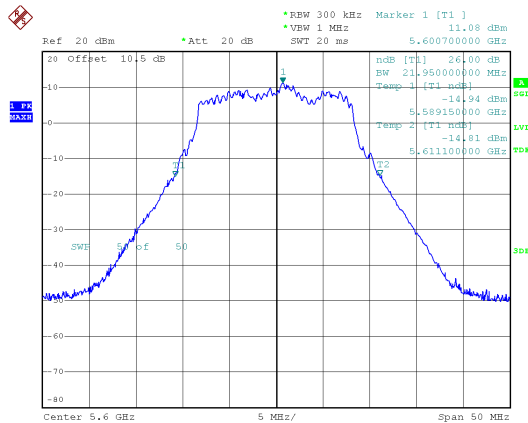


Date: 3.JAN.2025 11:25:09

CH120

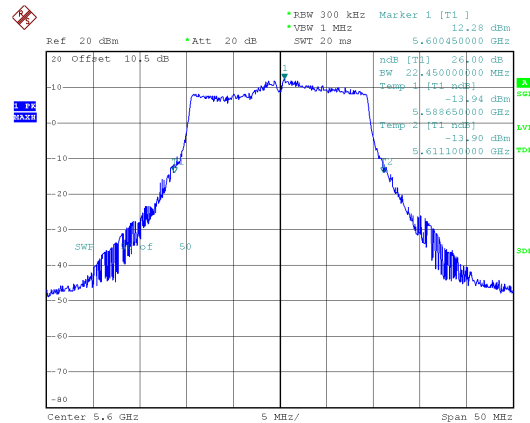


Date: 3.JAN.2025 16:56:06

CH140

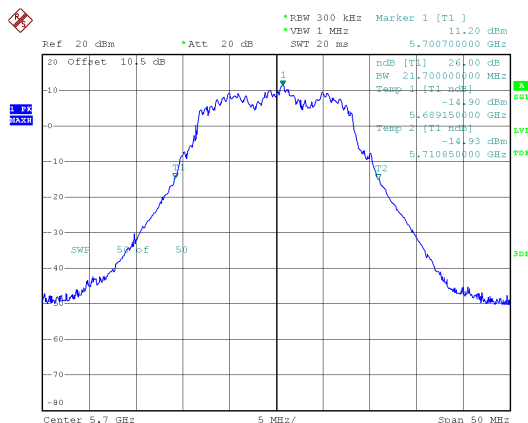

Date: 3.JAN.2025 11:42:37


CH140

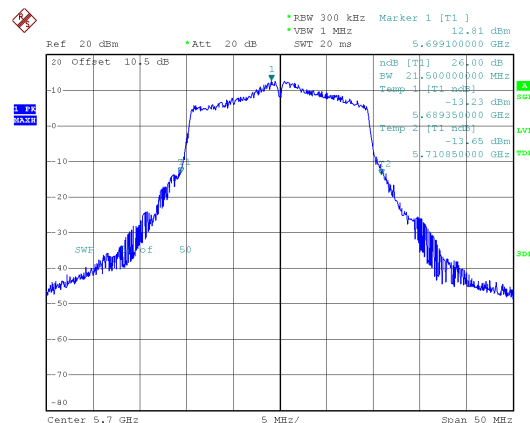


Date: 6.JAN.2025 09:45:11



26dB Bandwidth, ANT D

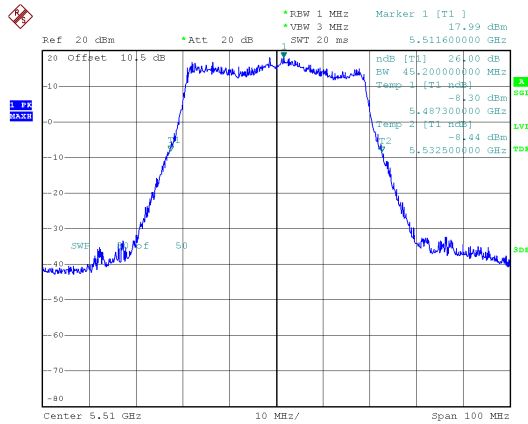
Modulation Type: 802.11be EHT40 (14.6Mbps)
CH102

Date: 6.JAN.2025 13:51:08

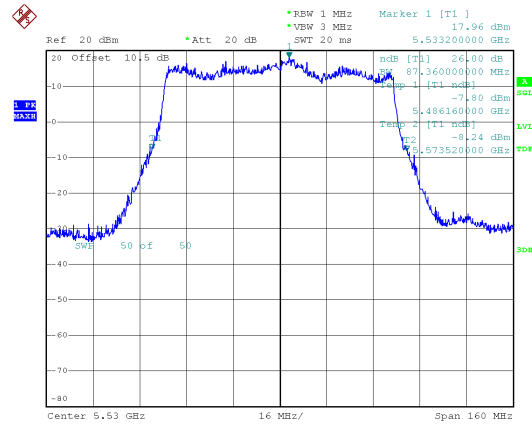Modulation Type: 802.11be EHT80 (30.6Mbps)
CH106


Date: 6.JAN.2025 15:26:00

CH118

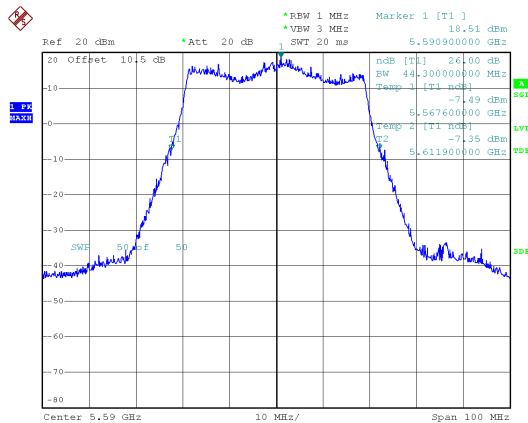


Date: 6.JAN.2025 14:11:22

CH122

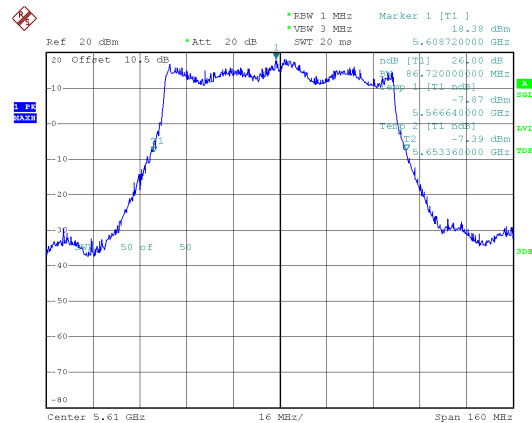

CH134

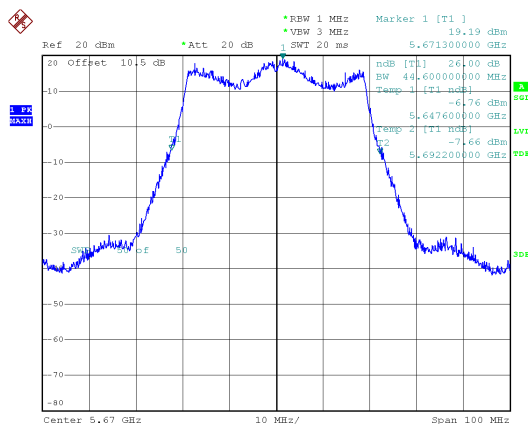


Date: 6.JAN.2025 14:16:19



26dB Bandwidth, ANT D


Modulation Type: 802.11be EHT160 (61.3Mbps)
CH114

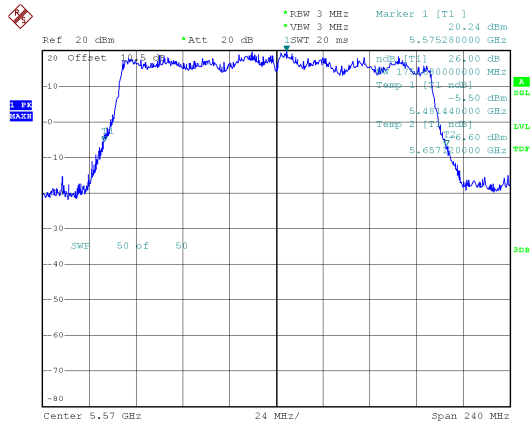

Date: 6.JAN.2025 16:49:51




26dB Bandwidth, ANT A
Within 5470-5725MHz Band, Straddle Channel
Modulation Type: 802.11a (6Mbps)
CH144

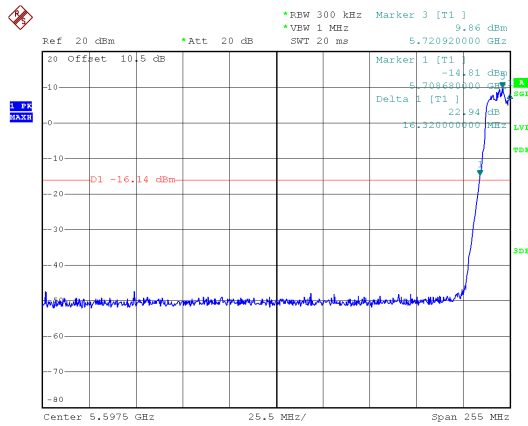


Date: 3.JAN.2025 11:50:18

Modulation Type: 802.11be EHT80 (30.6Mbps)
CH138

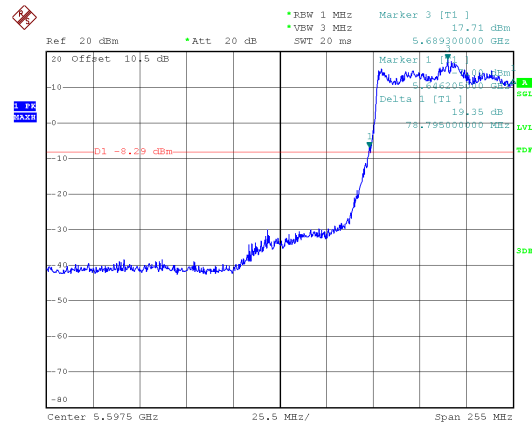


Date: 6.JAN.2025 15:58:50

Modulation Type: 802.11be EHT20 (7.3Mbps)
CH144

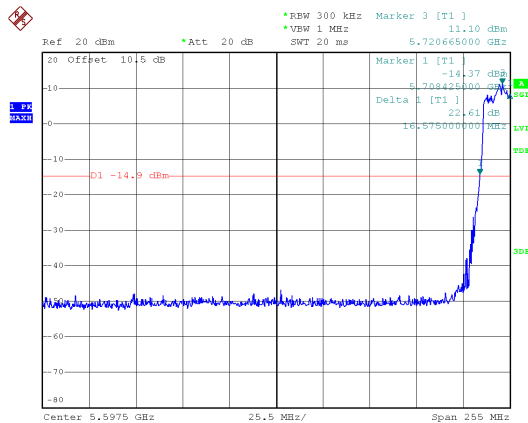

Date: 6.JAN.2025 10:28:22


Modulation Type: 802.11be EHT40 (14.6Mbps)
CH142

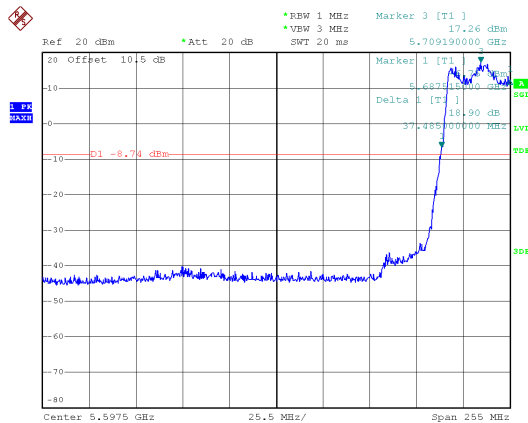

Date: 6.JAN.2025 14:35:32




26dB Bandwidth, ANT D
Within 5470-5725MHz Band, Straddle Channel
Modulation Type: 802.11a (6Mbps)
CH144

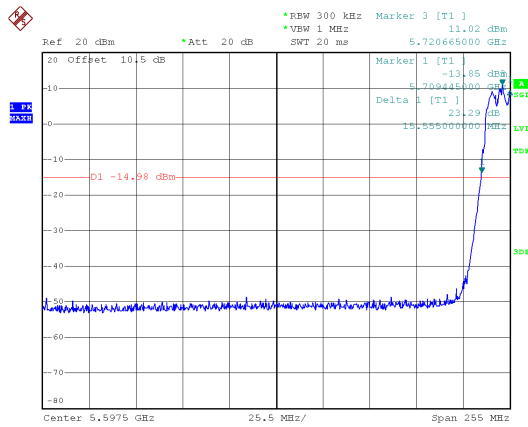


Date: 3.JAN.2025 11:53:03

Modulation Type: 802.11be EHT80 (30.6Mbps)
CH138

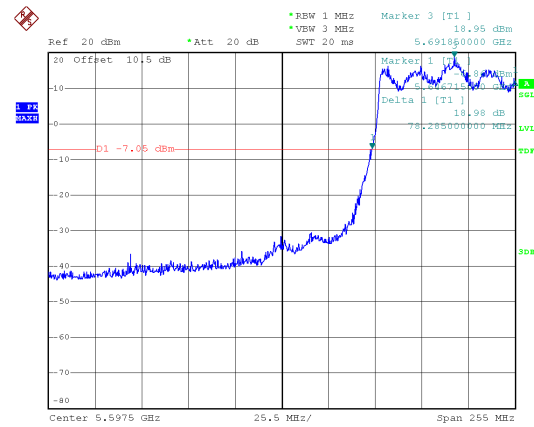


Date: 6.JAN.2025 16:00:21

Modulation Type: 802.11be EHT20 (7.3Mbps)
CH144

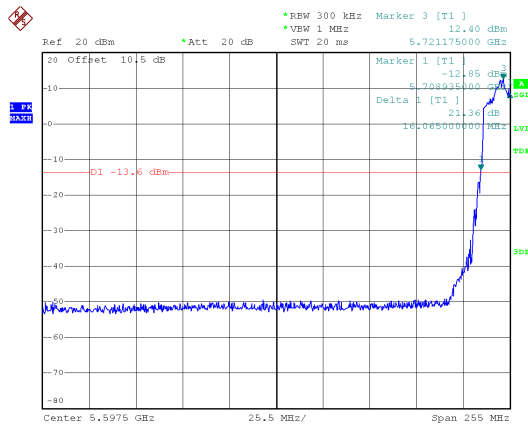

Date: 6.JAN.2025 10:32:50


Modulation Type: 802.11be EHT40 (14.6Mbps)
CH142

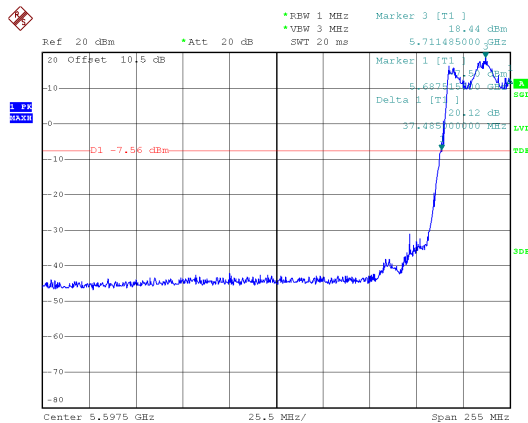

Date: 6.JAN.2025 14:37:03




26dB Bandwidth, ANT A
Within 5150-5250MHz band, Straddle Channel
Modulation Type: 802.11be EHT160 (61.3Mbps)
CH50

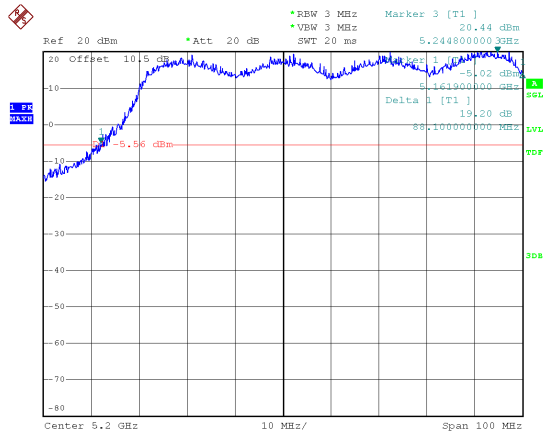

Date: 6.JAN.2025 16:35:11


26dB Bandwidth, ANT D
Within 5150-5250MHz band, Straddle Channel
Modulation Type: 802.11be EHT160 (61.3Mbps)
CH50

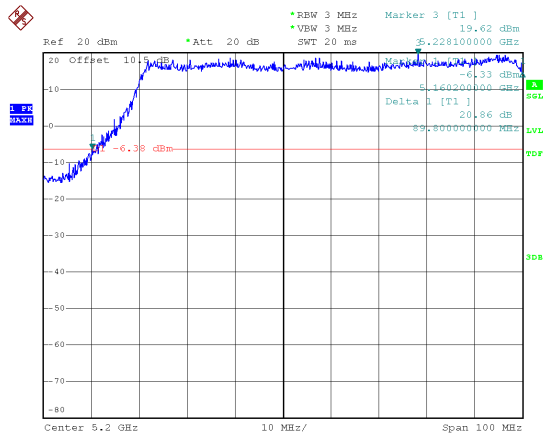

Date: 6.JAN.2025 16:38:59




26dB Bandwidth, ANT A
Extends across 5250MHz band, Straddle Channel
Modulation Type: 802.11be EHT160 (61.3Mbps)
CH50

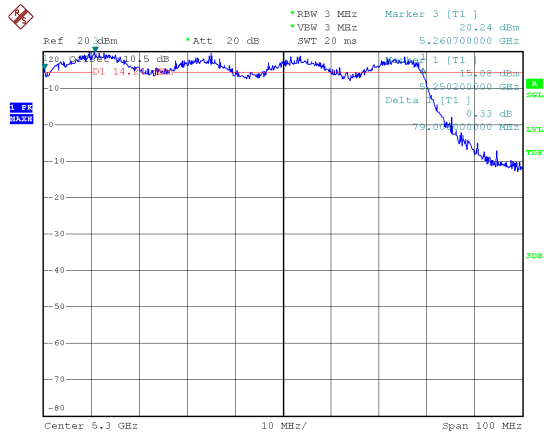

Date: 6.JAN.2025 16:35:36


26dB Bandwidth, ANT D
Extends across 5250MHz band, Straddle Channel
Modulation Type: 802.11be EHT160 (61.3Mbps)
CH50

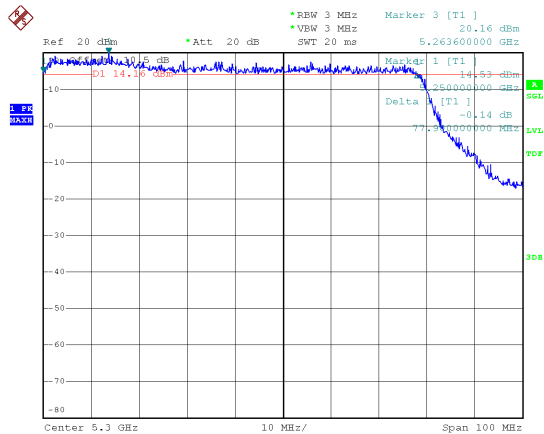

Date: 6.JAN.2025 16:39:24




99% Bandwidth, ANT A
Modulation Type: 802.11a (6Mbps)
CH36

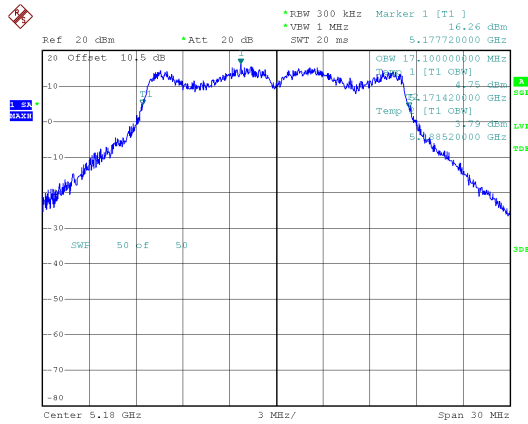


Date: 2.JAN.2025 17:44:43

Modulation Type: 802.11be EHT20 (7.3Mbps)
CH36

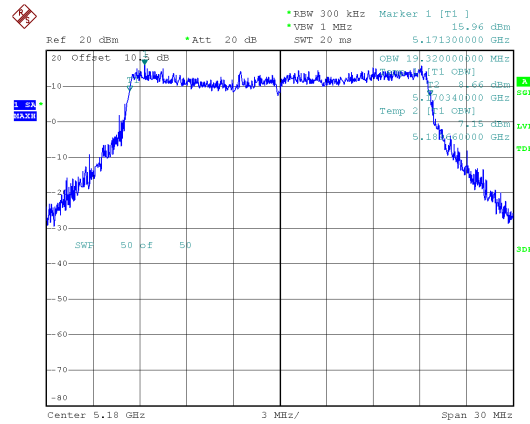


Date: 3.JAN.2025 14:27:31

CH40

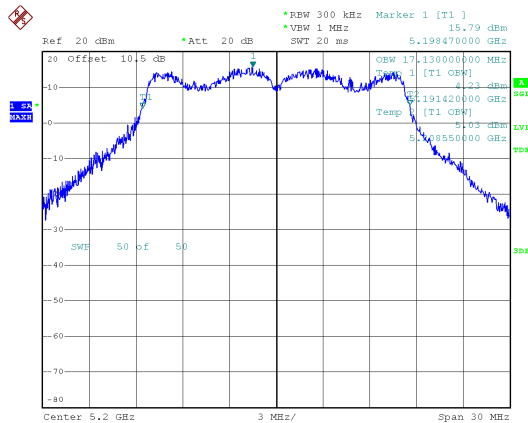


Date: 2.JAN.2025 17:51:48

CH40

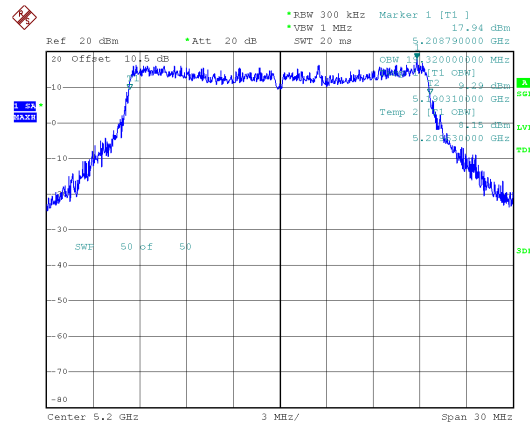


Date: 3.JAN.2025 14:38:19

CH48

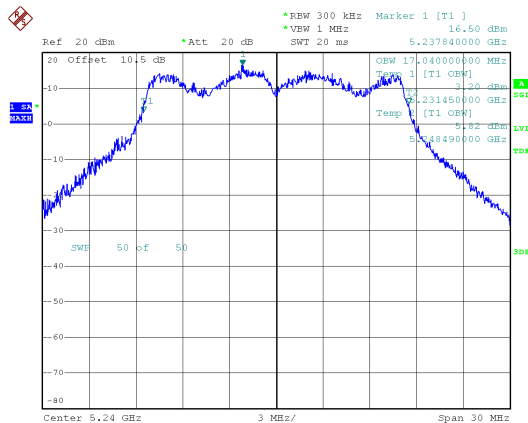

Date: 3.JAN.2025 10:32:32


CH48

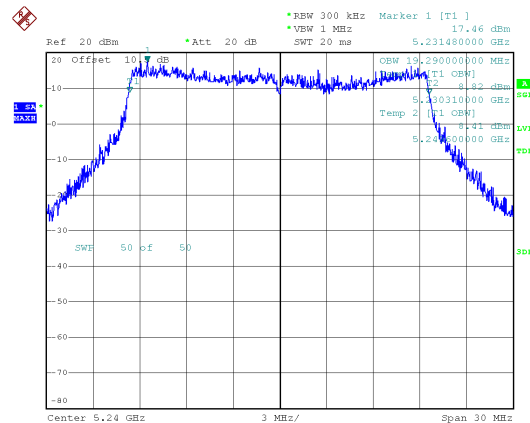


Date: 3.JAN.2025 14:56:26



99% Bandwidth, ANT A

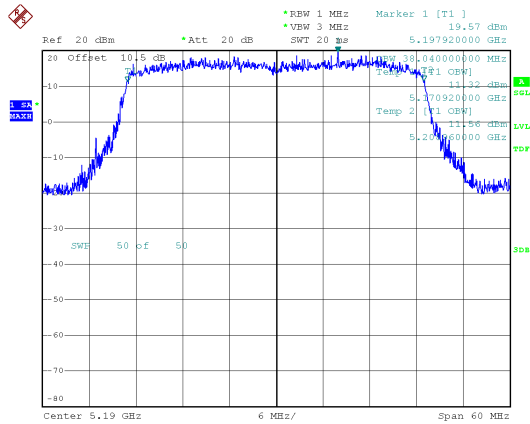
Modulation Type: 802.11be EHT40 (14.6Mbps)
CH38

Date: 6.JAN.2025 11:47:00

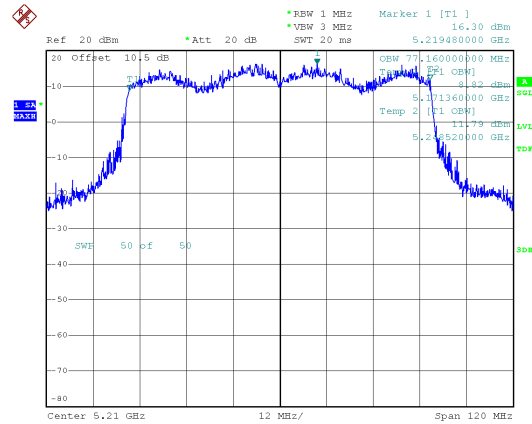Modulation Type: 802.11be EHT80 (30.6Mbps)
CH42

Date: 6.JAN.2025 14:54:29

CH46

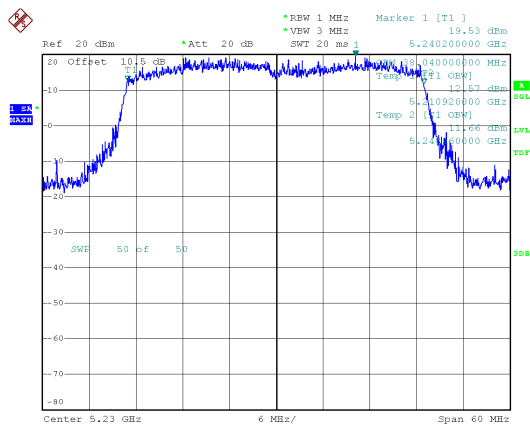

Date: 6.JAN.2025 11:52:09