


802.11g OFDM MODULATION: TRIPLE TX:

MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 63%RH, 991hPa
TESTED BY	Long Chen		


CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (mW)			RF POWER LEVEL IN 3kHz BW (dBm)		
		CHAIN 0	CHAIN 1	CHAIN 2	CHAIN 0	CHAIN 1	CHAIN 2
1	2412	0.033	0.034	0.035	-14.76	-14.63	-14.60
6	2437	0.042	0.042	0.043	-13.79	-13.76	-13.68
11	2462	0.034	0.034	0.035	-14.74	-14.67	-14.55

CHANNEL	CHANNEL FREQUENCY (MHz)	TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
1	2412	0.103	-9.89	8	PASS
6	2437	0.127	-8.97	8	PASS
11	2462	0.103	-9.88	8	PASS


CH 11

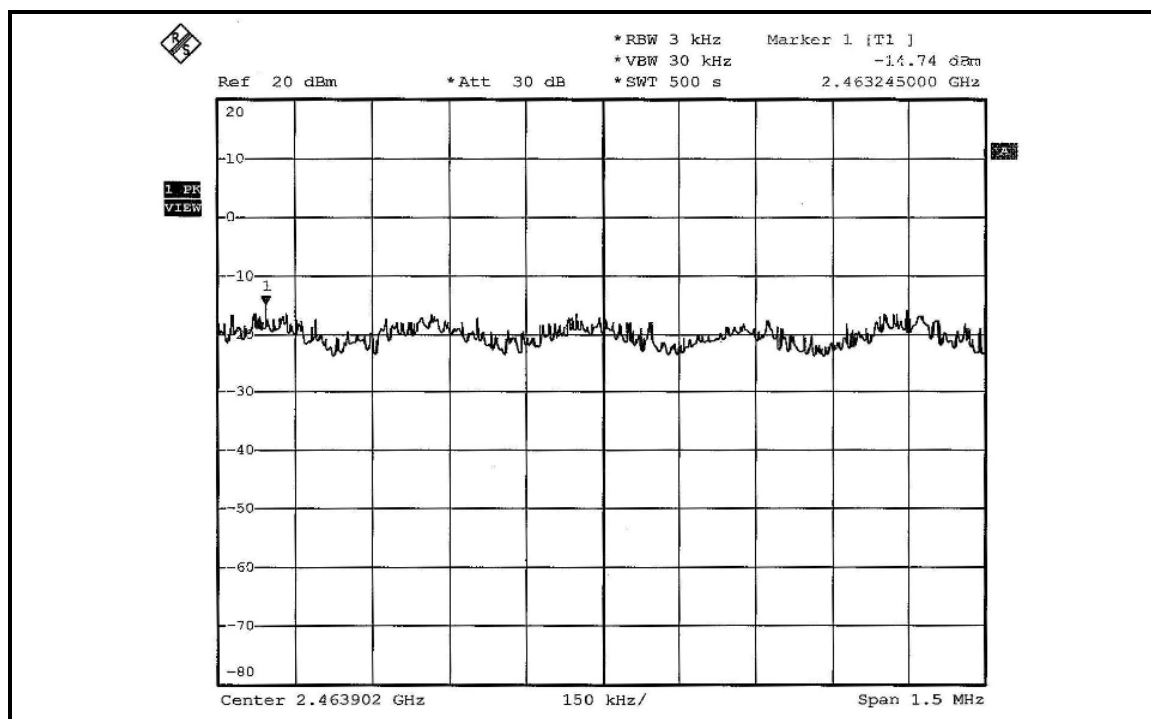


FOR CHAIN 1: CH 1

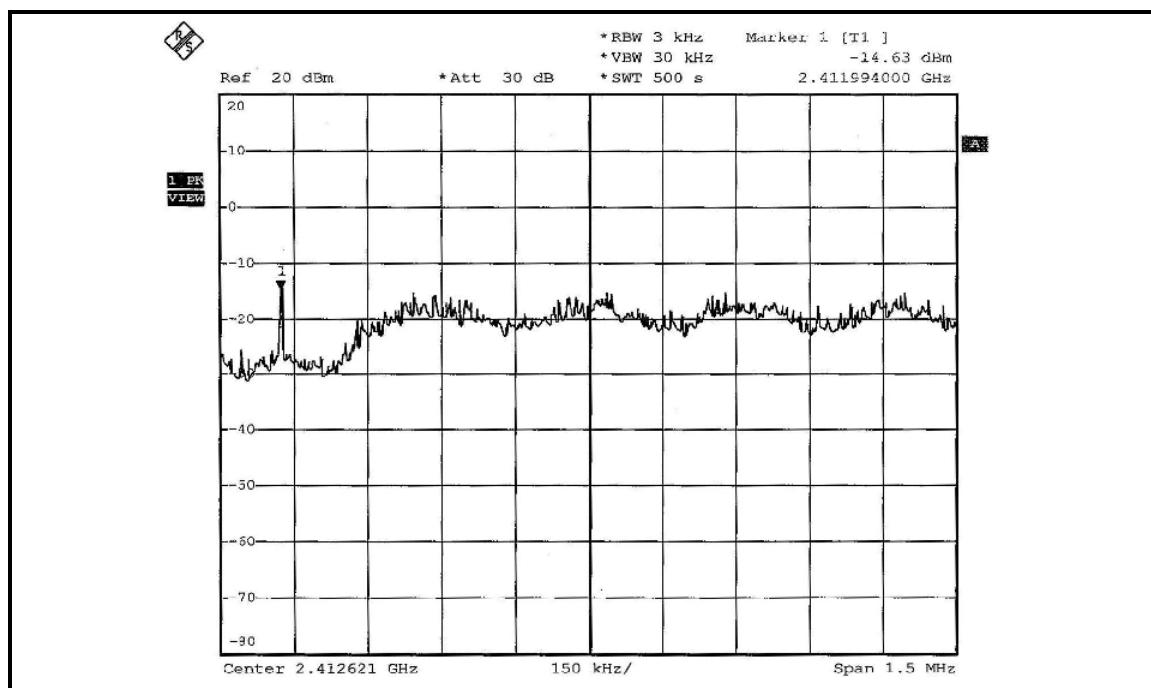


FOR CHAIN 2: CH 1

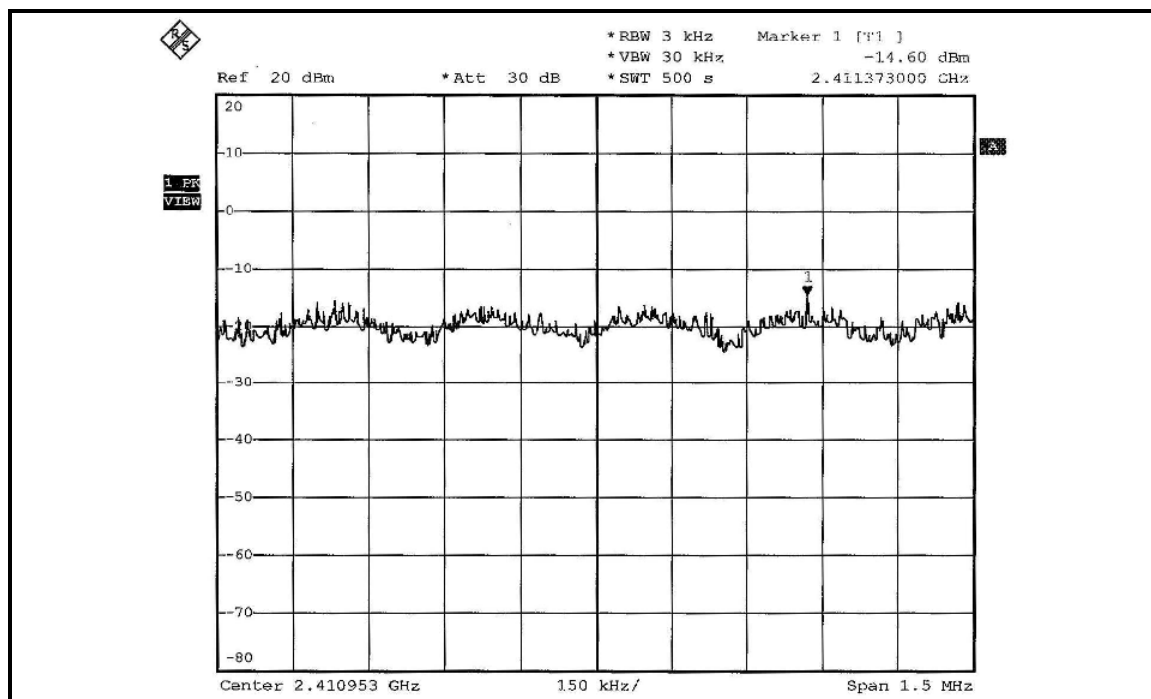

CH 6

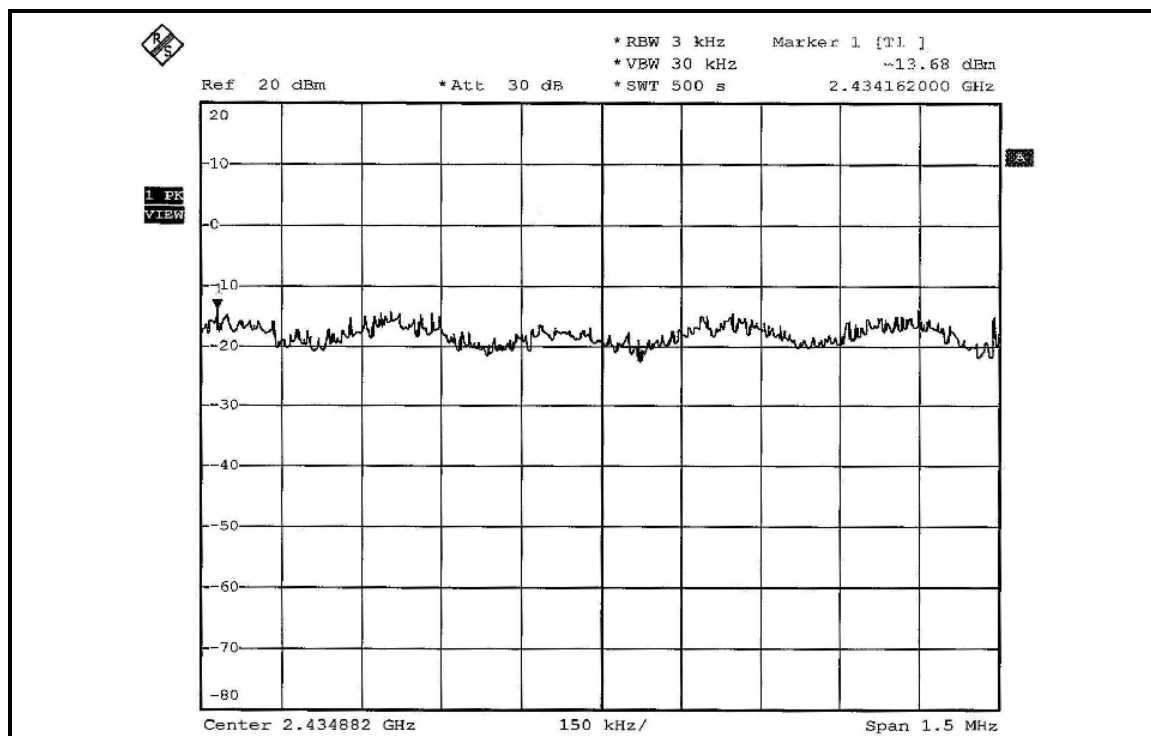

CH 11

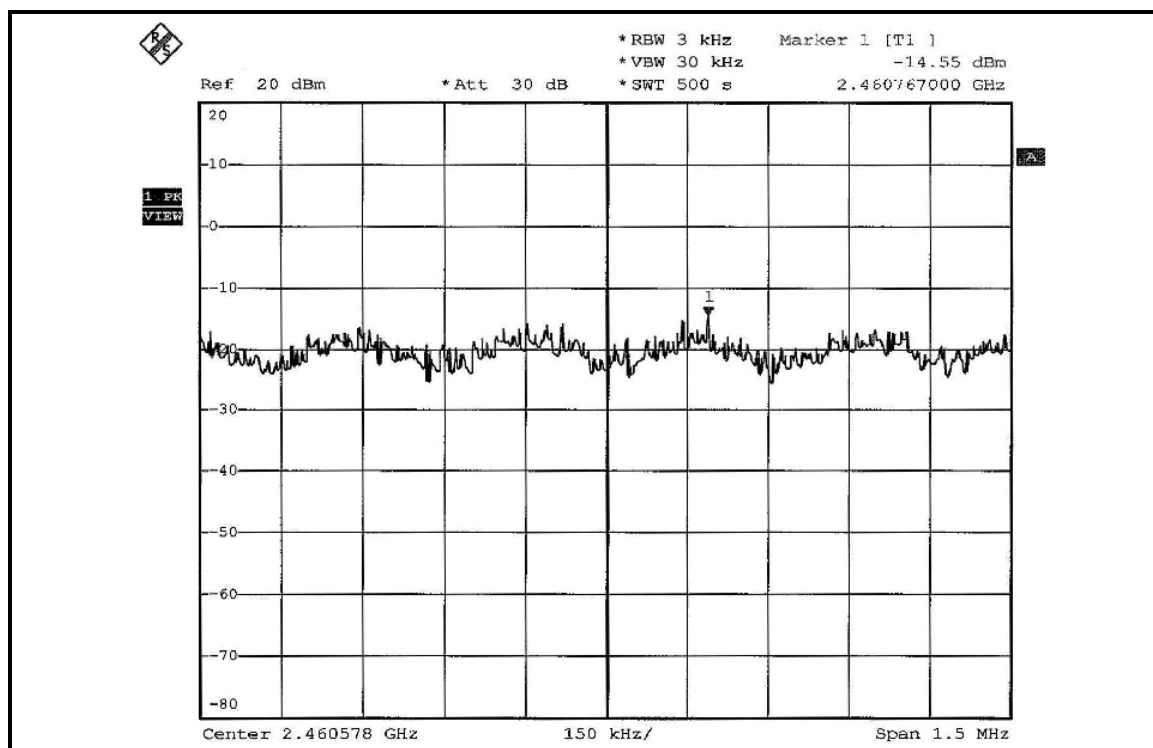


DRAFT 802.11n (20MHz) OFDM MODULATION: TRIPLE TX:

MODULATION TYPE	BPSK	TRANSFER RATE	7.2Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 63%RH, 991hPa
TESTED BY	Long Chen		


CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (mW)			RF POWER LEVEL IN 3kHz BW (dBm)		
		CHAIN 0	CHAIN 1	CHAIN 2	CHAIN 0	CHAIN 1	CHAIN 2
1	2412	0.026	0.026	0.027	-15.88	-15.84	-15.73
6	2437	0.037	0.038	0.039	-14.33	-14.24	-14.12
11	2462	0.026	0.027	0.027	-15.84	-15.75	-15.63

CHANNEL	CHANNEL FREQUENCY (MHz)	TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
1	2412	0.079	-11.04	8	PASS
6	2437	0.113	-9.46	8	PASS
11	2462	0.080	-10.97	8	PASS


CH 11

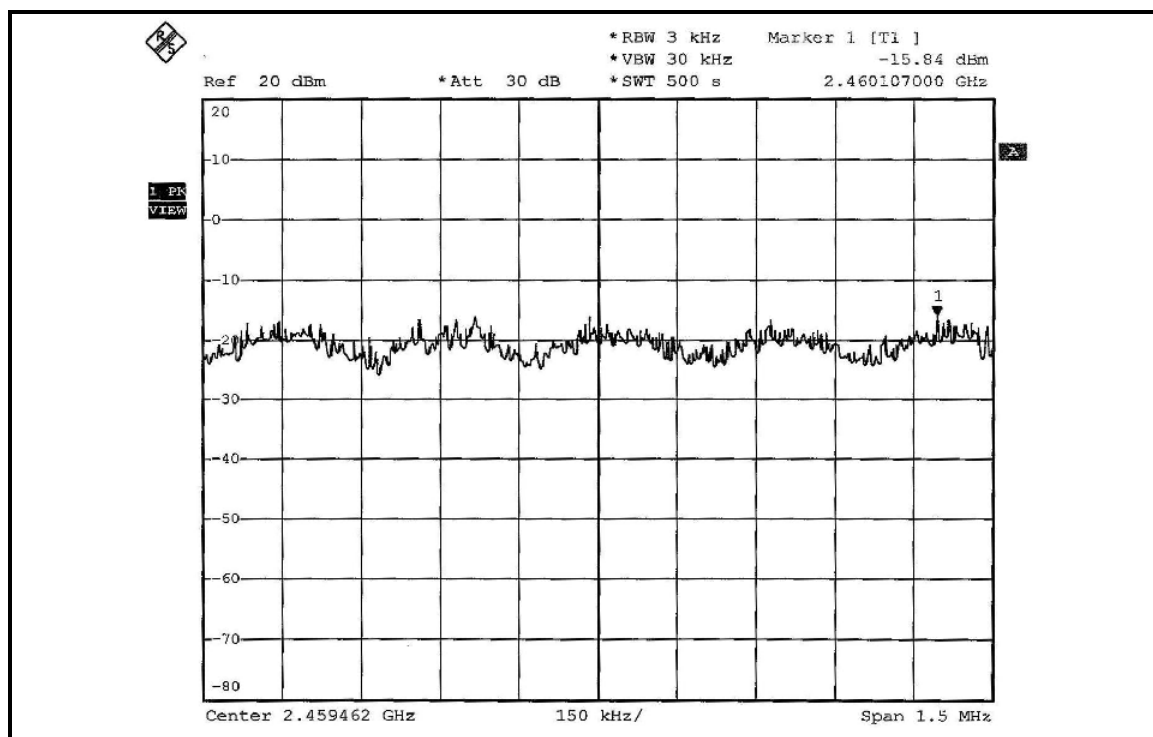


FOR CHAIN 1: CH 1

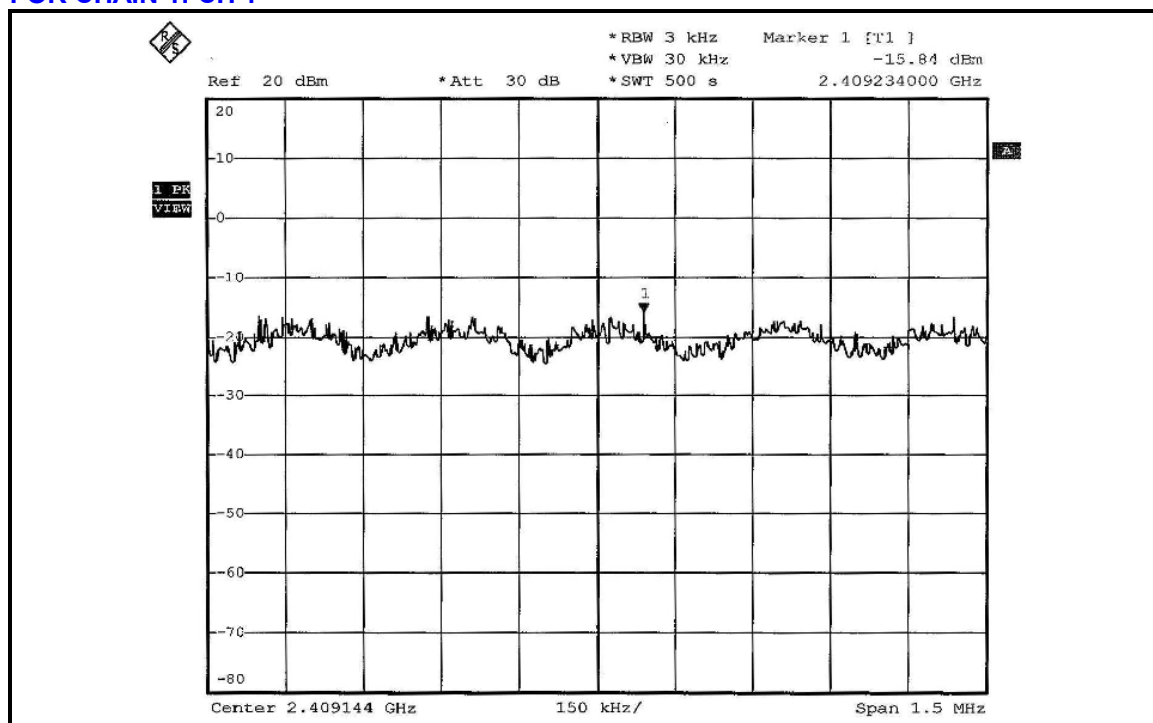


CH 6

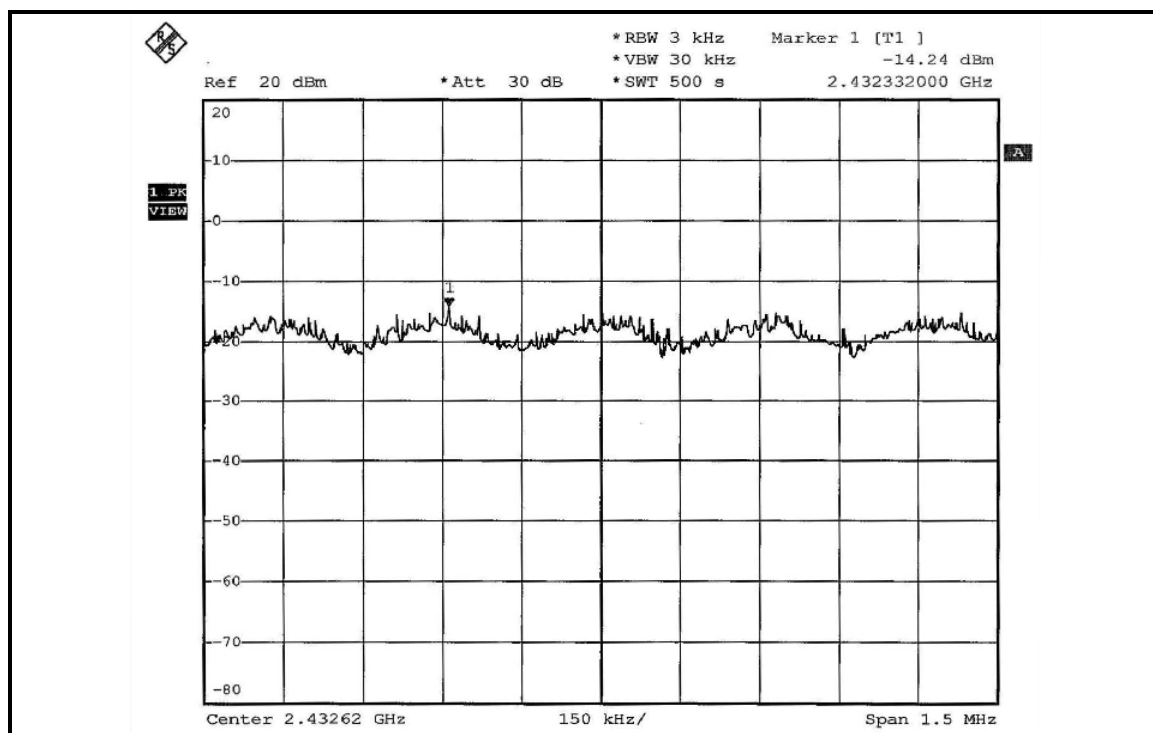

CH 11

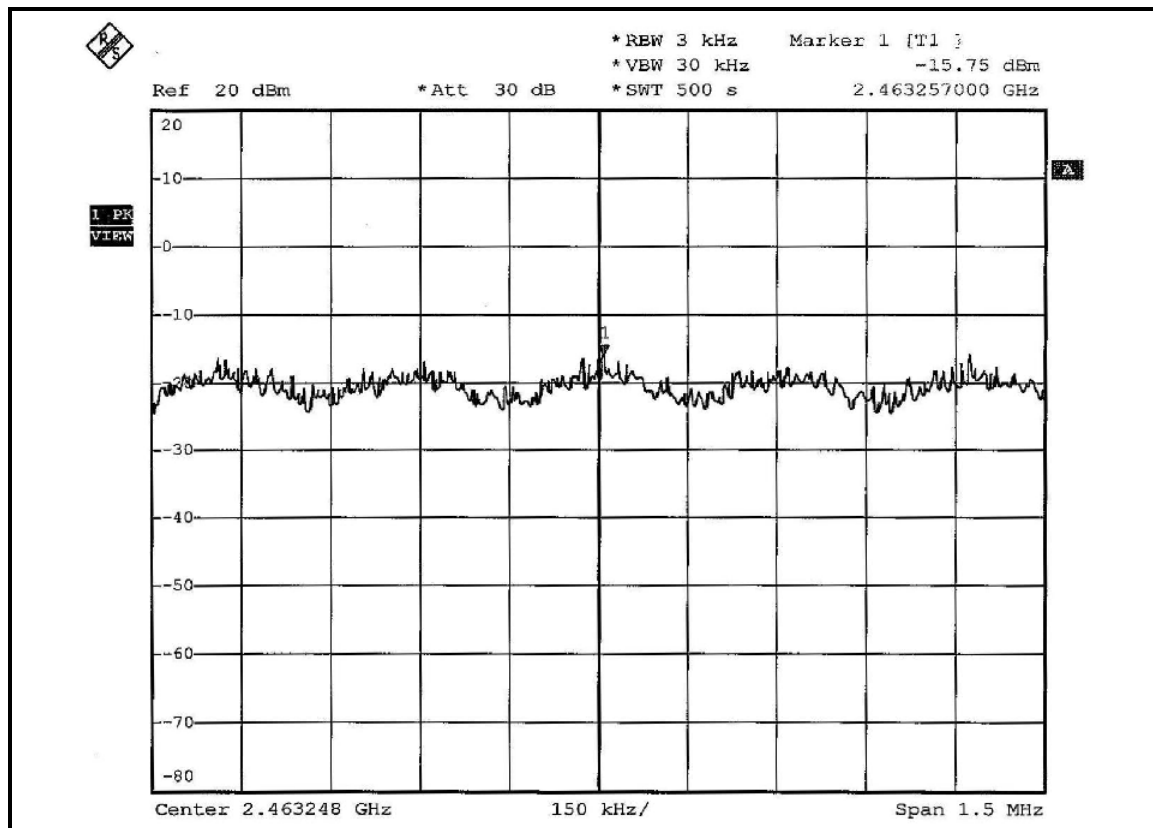

CH 11

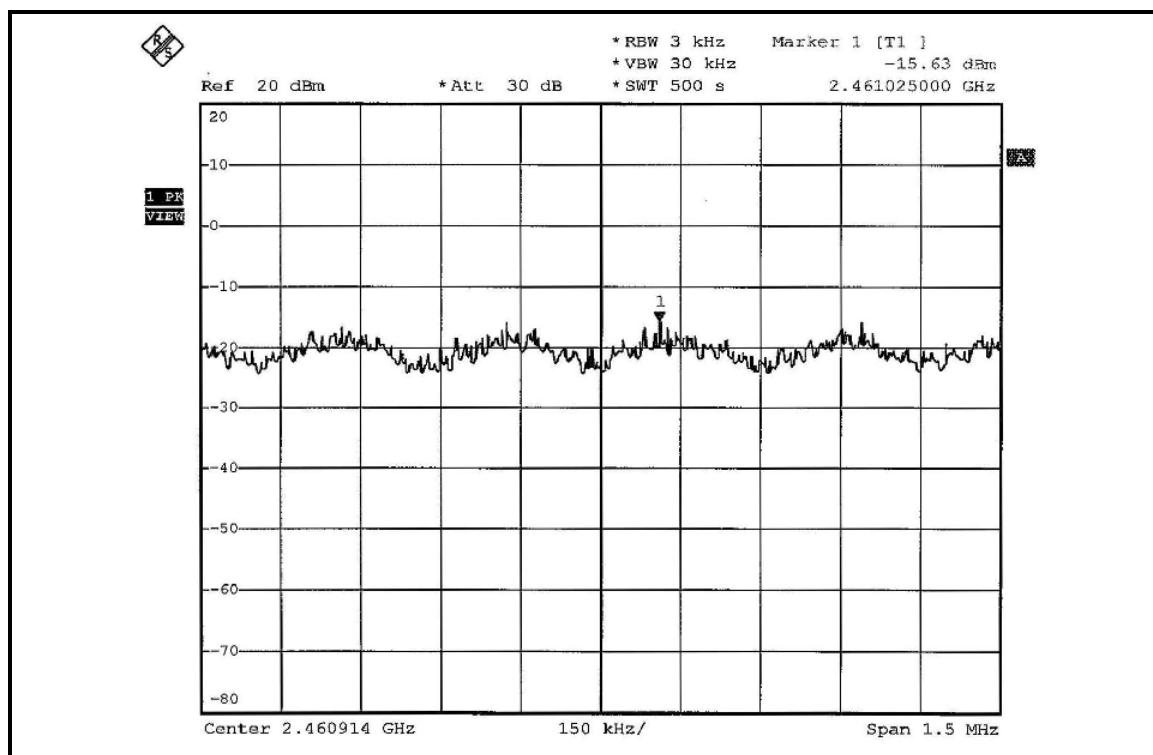


DRAFT 802.11n (40MHz) OFDM MODULATION: TRIPLE TX:

MODULATION TYPE	BPSK	TRANSFER RATE	15Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 63%RH, 991hPa
TESTED BY	Long Chen		


CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (mW)			RF POWER LEVEL IN 3kHz BW (dBm)		
		CHAIN 0	CHAIN 1	CHAIN 2	CHAIN 0	CHAIN 1	CHAIN 2
1	2422	0.008	0.008	0.008	-20.98	-20.88	-20.74
4	2437	0.013	0.014	0.014	-18.74	-18.66	-18.61
7	2452	0.008	0.008	0.009	-20.73	-20.98	-20.68

CHANNEL	CHANNEL FREQUENCY (MHz)	TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
1	2422	0.025	-16.09	8	PASS
4	2437	0.041	-13.90	8	PASS
7	2452	0.025	-16.02	8	PASS

CH 7

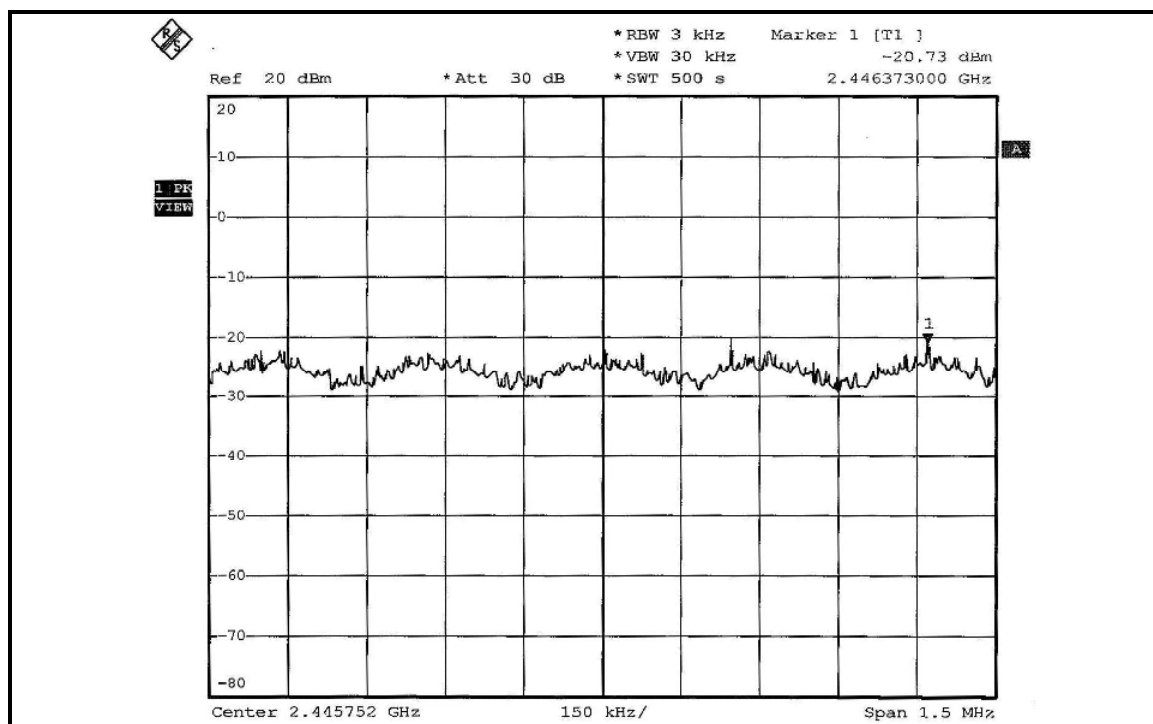

FOR CHAIN 1: CH 1

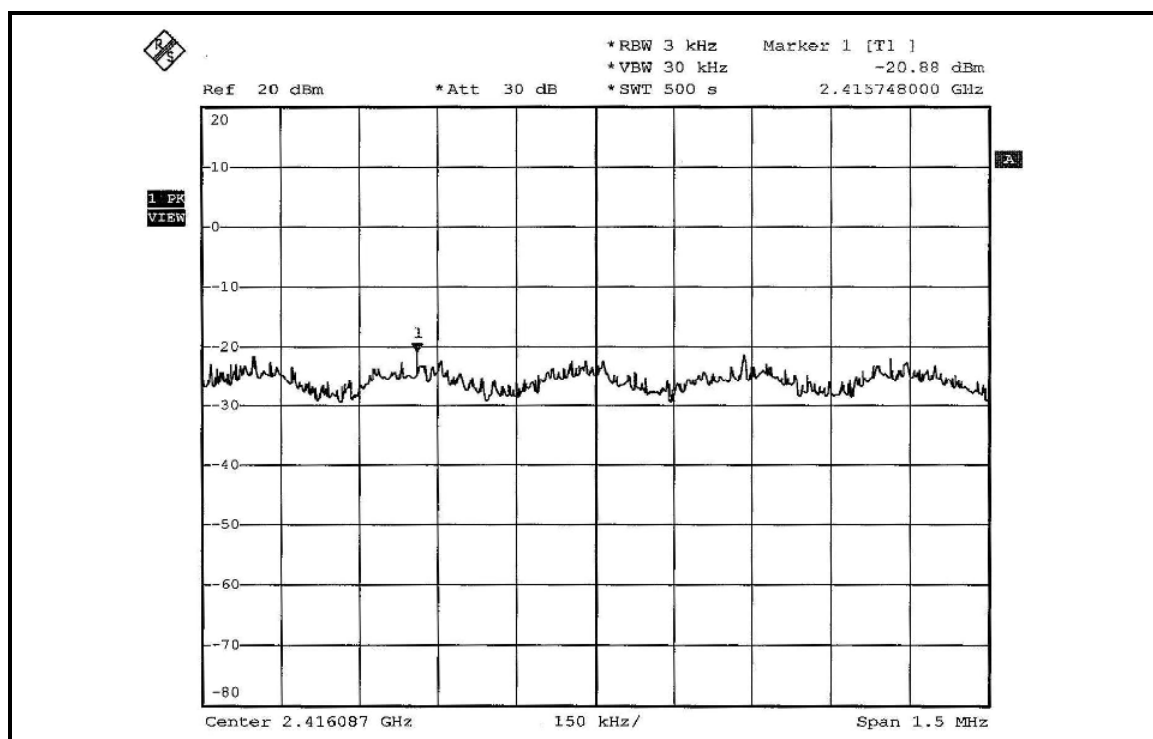

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Spectrum Analyzer ROHDE & SCHWARZ	FSEK30	100049	Aug. 21, 2007
BILOG Antenna SCHWARZBECK	VULB9168	9168-153	Jan. 15, 2007
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-407	Jan. 22, 2007
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170242	Jan. 19, 2007
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218188/218189	Dec. 13, 2006
RF signal cable Worken	8D-FB	Cable-HYCH9-01	Mar. 08, 2007
Software ADT.	ADT_Radiated_ V7.6.01	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA
Antenna Tower Controller EMCO	2090	NA	NA
Turn Table EMCO	2087-2.03	NA	NA
Turn Table Controller EMCO	2090	NA	NA

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.