

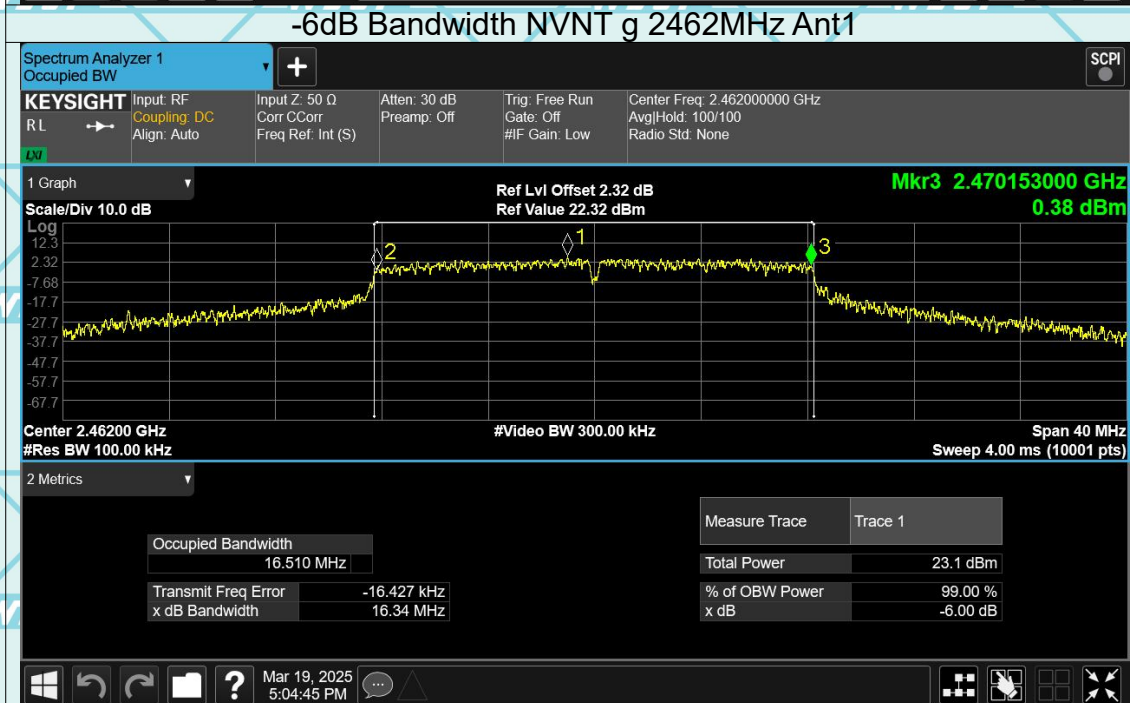
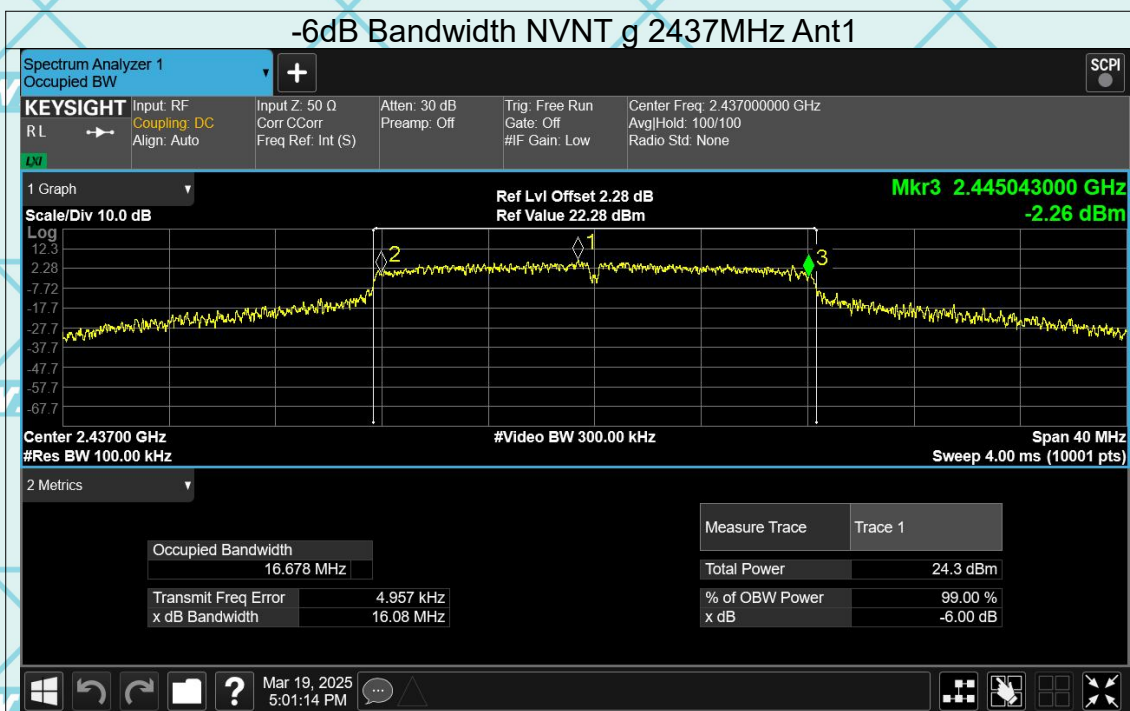




Report No.: WSCT-ANAB-R&E250400022A-Wi-Fi

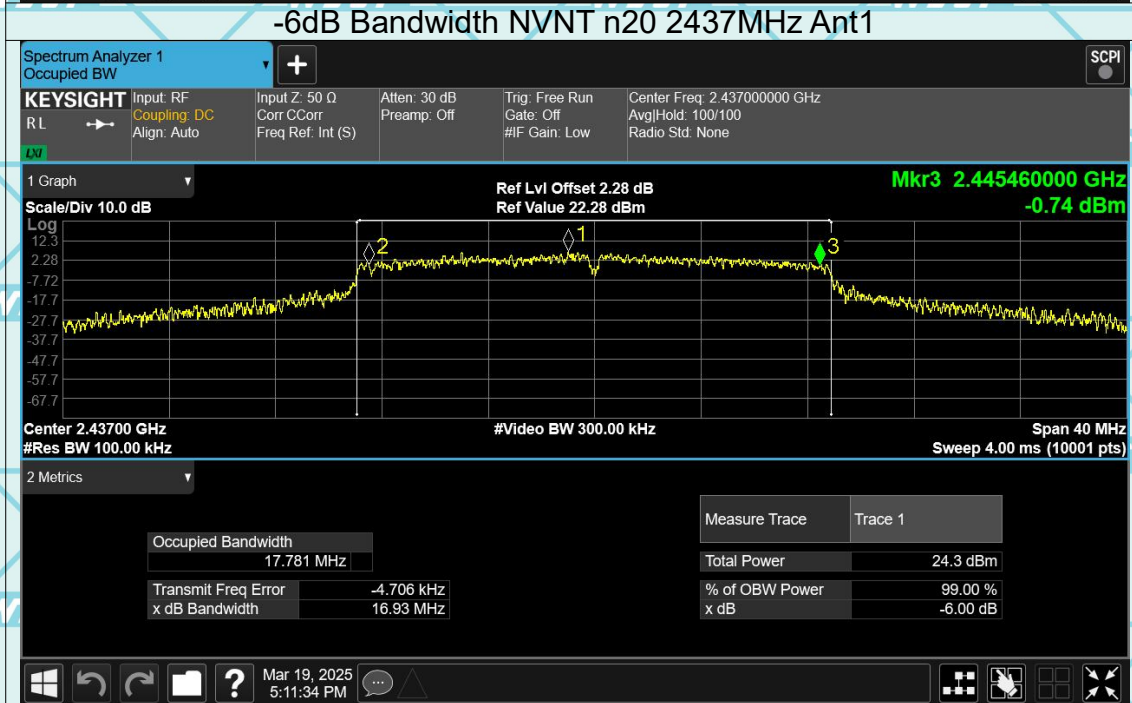



Report No.: WSCT-ANAB-R&E250400022A-Wi-Fi

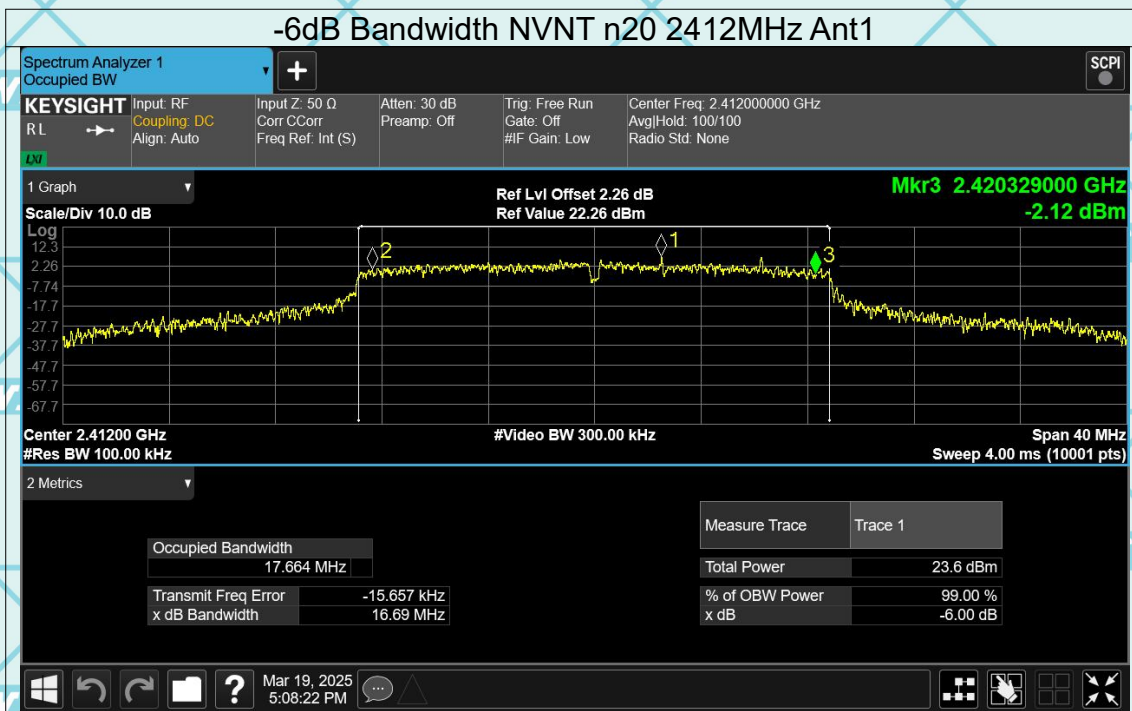

Report No.: WSCT-ANAB-R&E250400022A-Wi-Fi

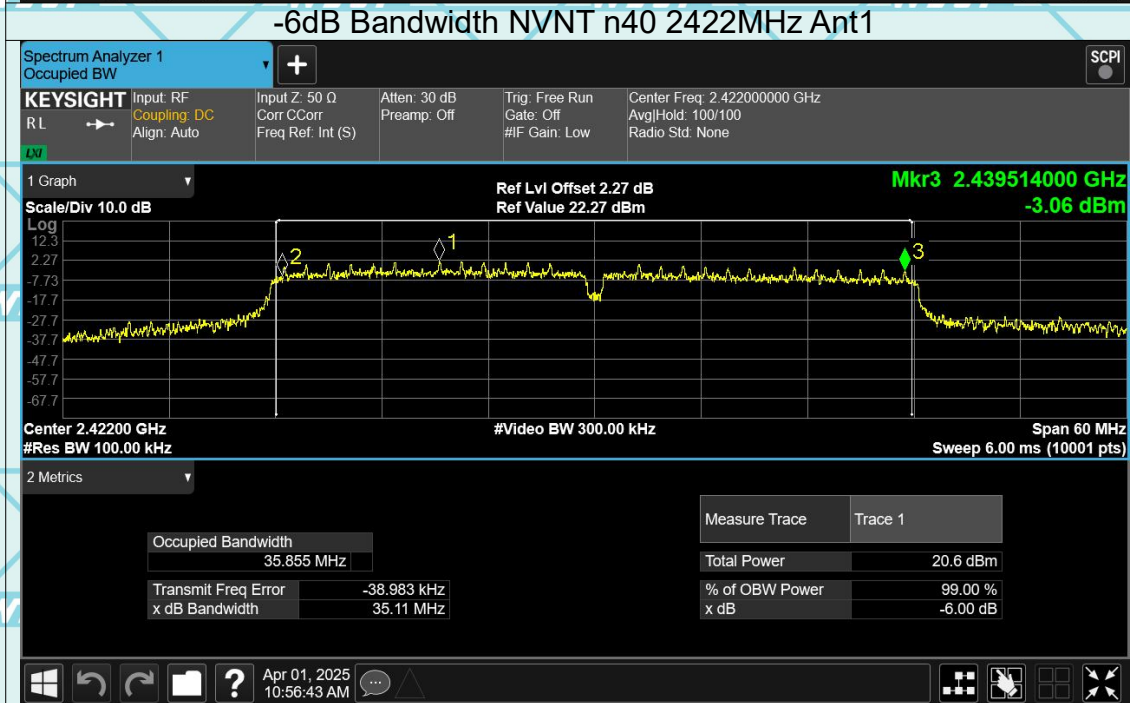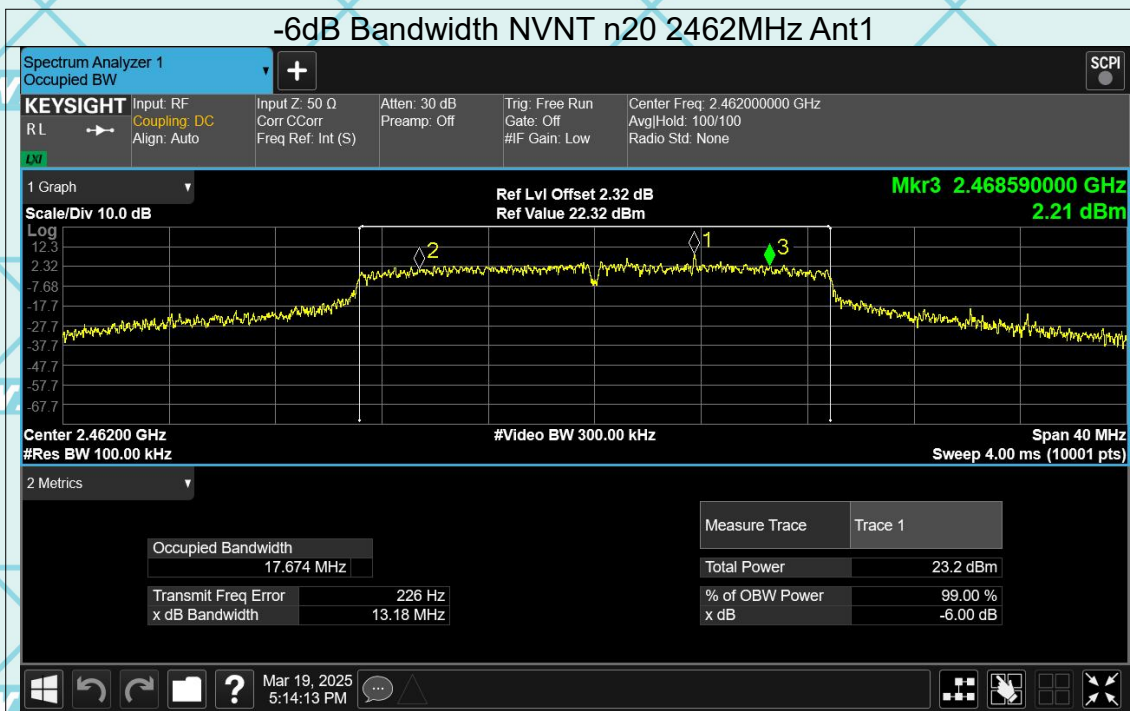


Report No.: WSCT-ANAB-R&E250400022A-Wi-Fi

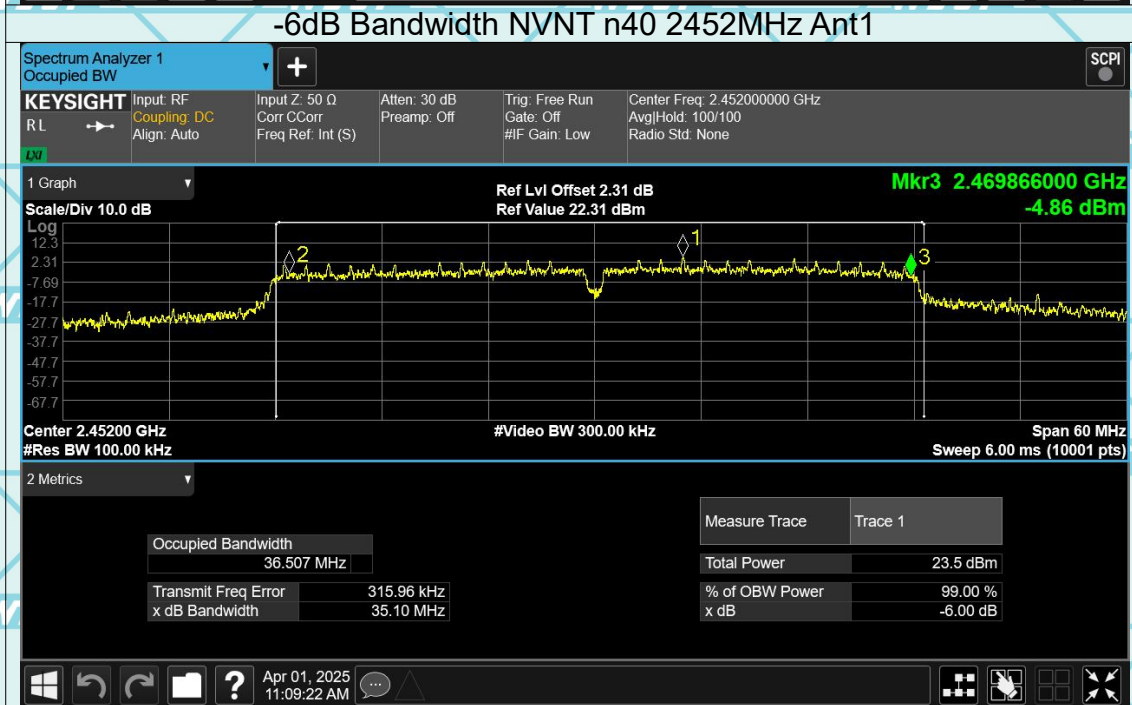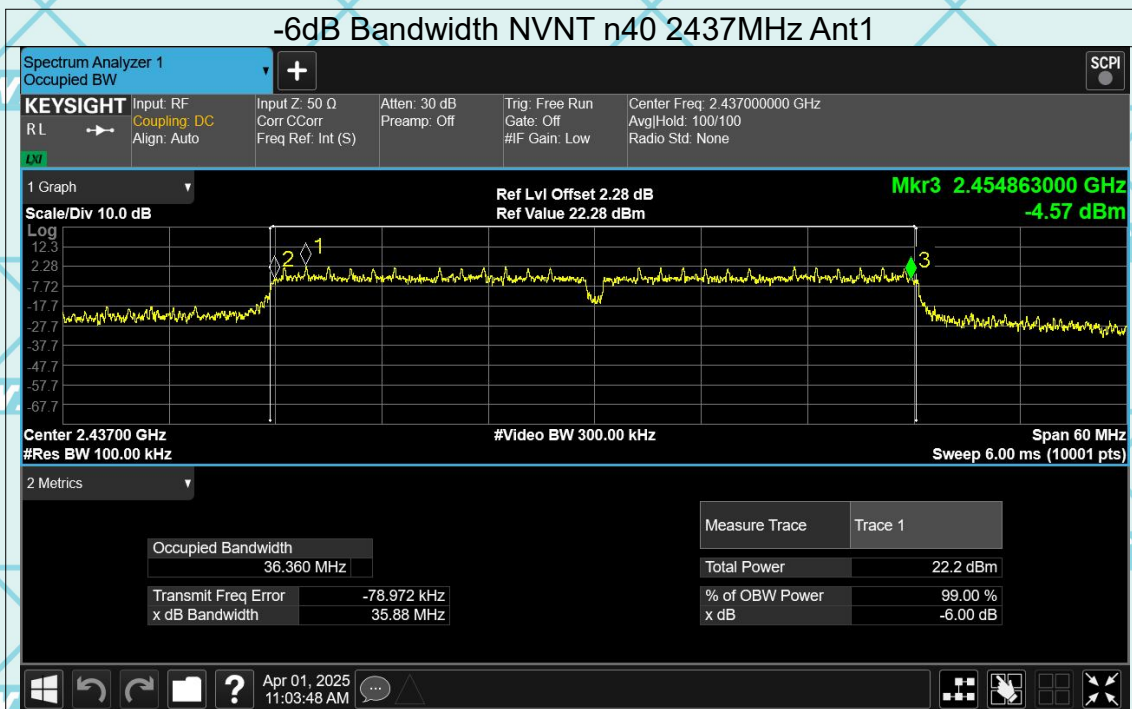

Report No.: WSCT-ANAB-R&E250400022A-Wi-Fi

6.4. Power Spectral Density

6.4.1. Test Specification


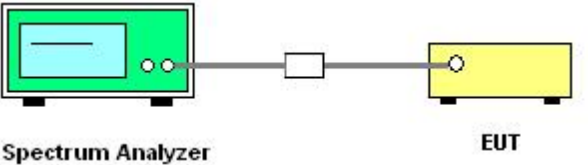
Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	KDB 558074
Limit:	The average power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The testing follows Measurement Procedure 10.3 Method AVGPSPD of FCC KDB Publication No.558074 D01 DTS Meas. Guidance v04 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW): $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$. Video bandwidth VBW $\geq 3 \times \text{RBW}$. Set the span to at least 1.5 times the OBW. 5. Detector = RMS, Sweep time = auto couple. 6. Employ trace averaging (RMS) mode over a minimum of 100 traces. Use the peak marker function to determine the maximum power level. 6. Measure and record the results in the test report.
Test Result:	PASS

Report No.: WSCT-ANAB-R&E250400022A-Wi-Fi

6.4.2. Test data(worst)


Mode	Frequency (MHz)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
b	2412	-7.74	8	Pass
b	2437	-9.03	8	Pass
b	2462	-5.87	8	Pass
g	2412	-9.89	8	Pass
g	2437	-10.78	8	Pass
g	2462	-8.41	8	Pass
n20	2412	-9.23	8	Pass
n20	2437	-10.07	8	Pass
n20	2462	-8.59	8	Pass
n40	2422	-12.88	8	Pass
n40	2437	-12.94	8	Pass
n40	2452	-16.28	8	Pass

Report No.: WSCT-ANAB-R&E250400022A-Wi-Fi

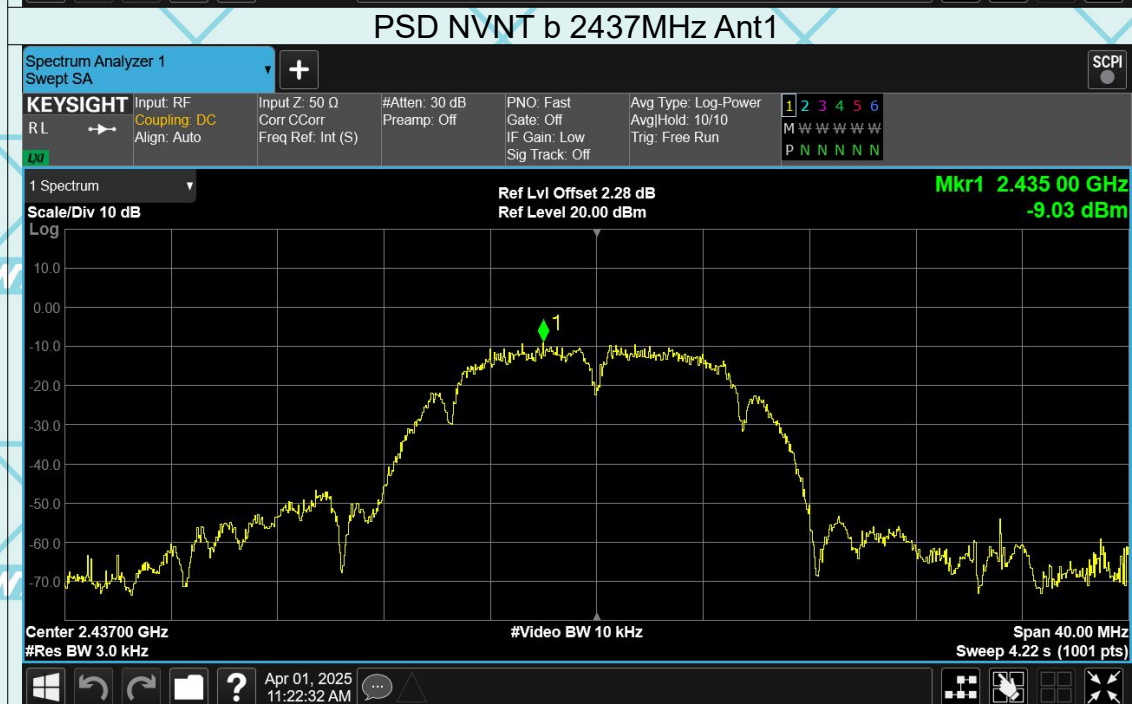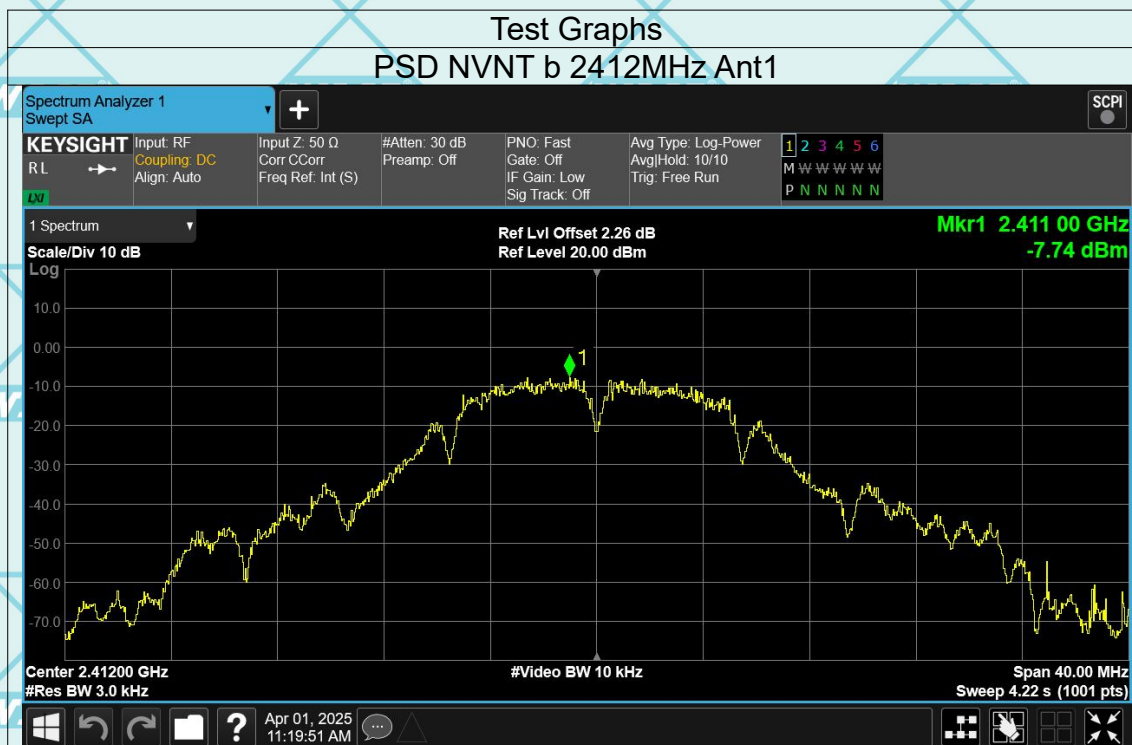


Report No.: WSCT-ANAB-R&E250400022A-Wi-Fi

PSD NVNT b 2462MHz Ant1

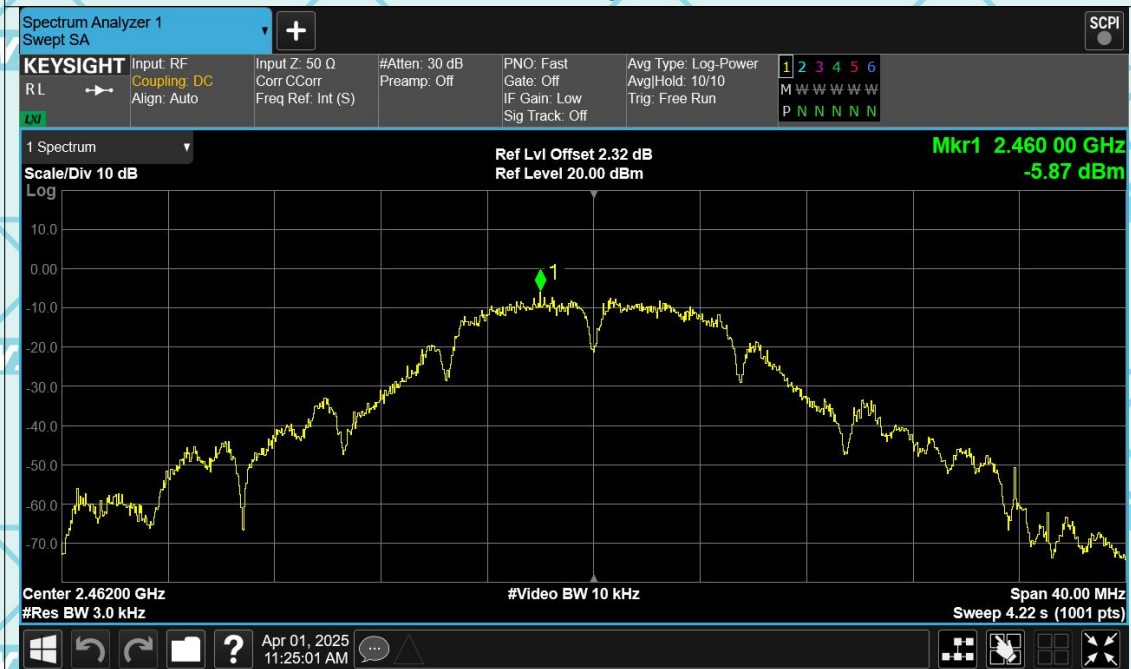


PSD NVNT g 2412MHz Ant1

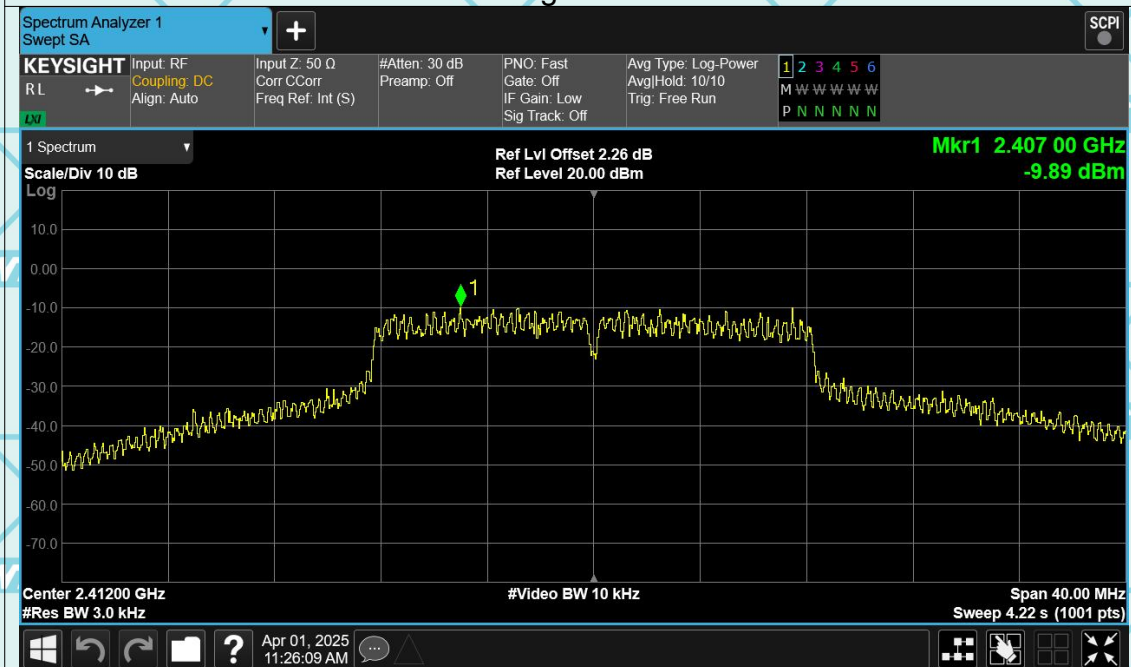


Report No.: WSCT-ANAB-R&E250400022A-Wi-Fi

PSD NVNT g 2437MHz Ant1

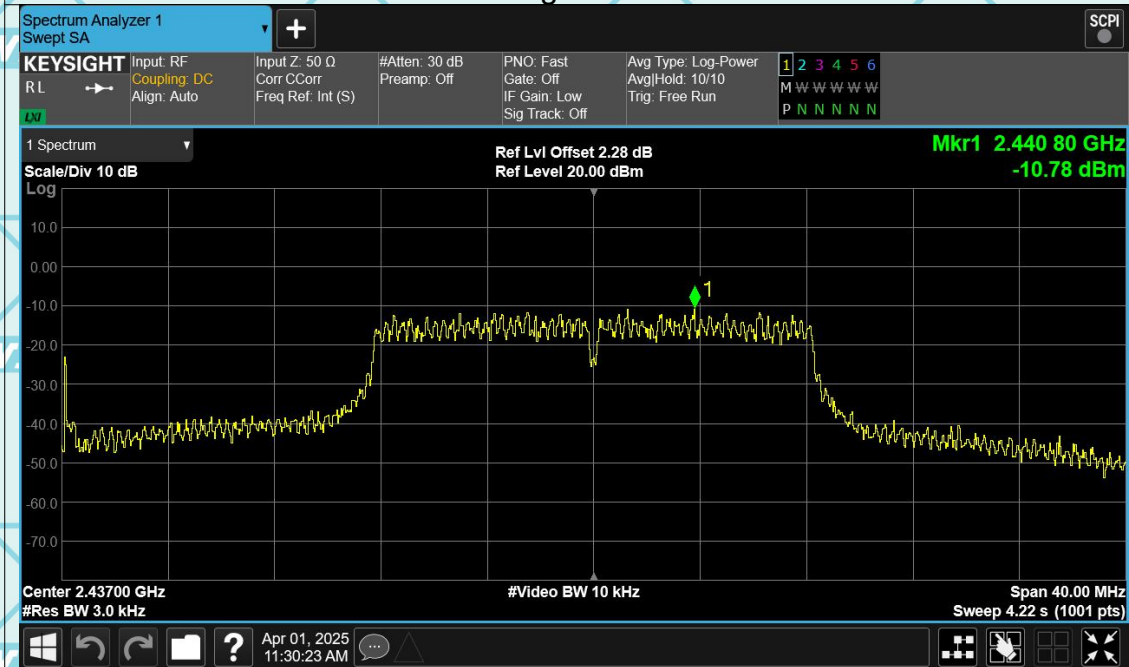


PSD NVNT g 2462MHz Ant1

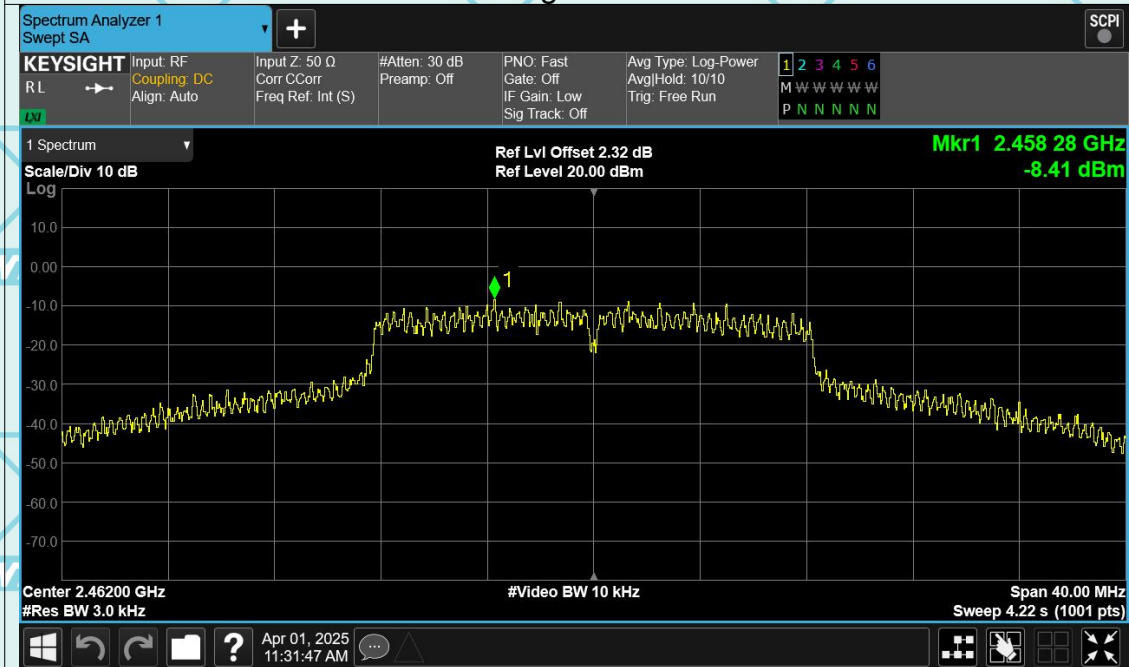

Report No.: WSCT-ANAB-R&E250400022A-Wi-Fi

PSD NVNT n20 2412MHz Ant1

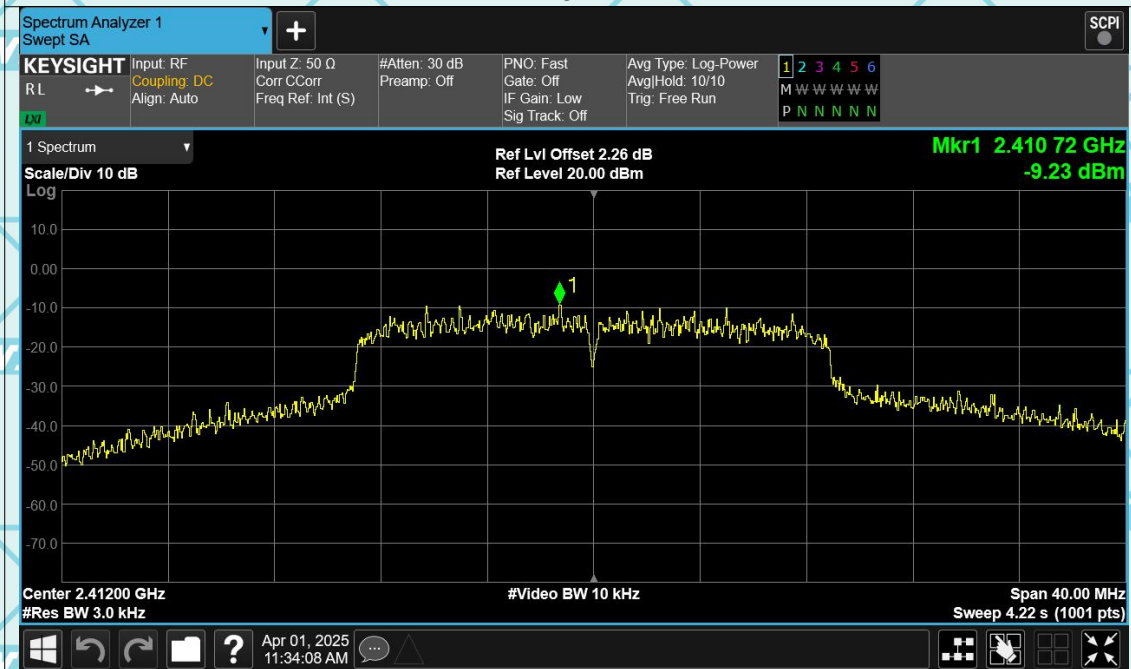


PSD NVNT n20 2437MHz Ant1



Report No.: WSCT-ANAB-R&E250400022A-Wi-Fi

PSD NVNT n20 2462MHz Ant1

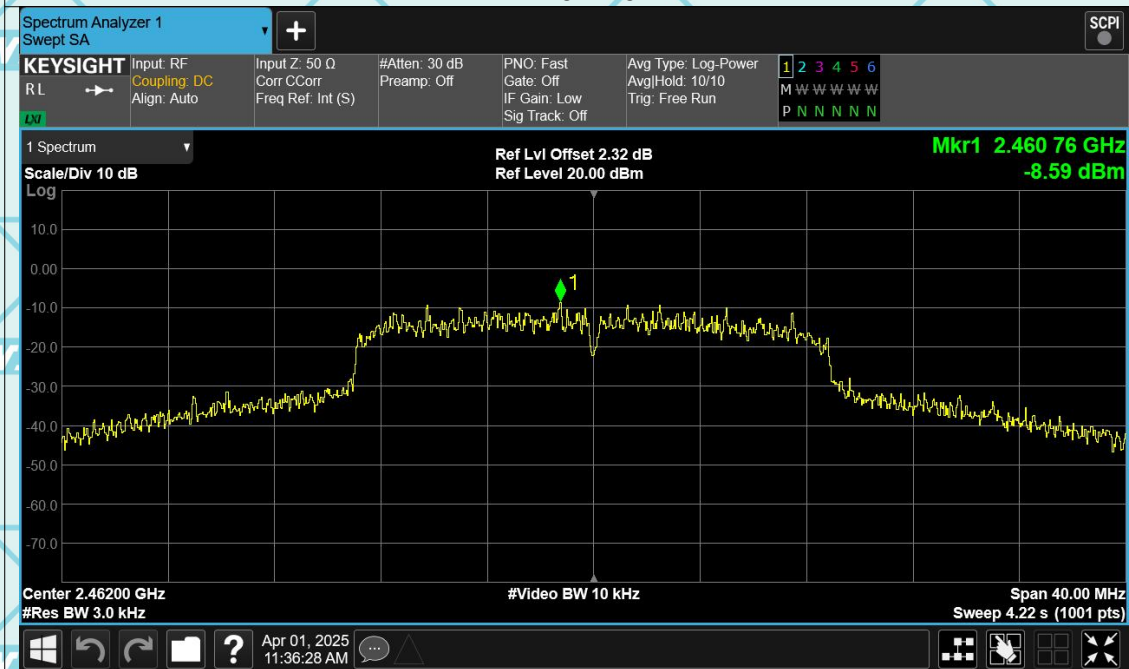


PSD NVNT n40 2422MHz Ant1




Report No.: WSCT-ANAB-R&E250400022A-Wi-Fi

PSD NVNT n40 2437MHz Ant1

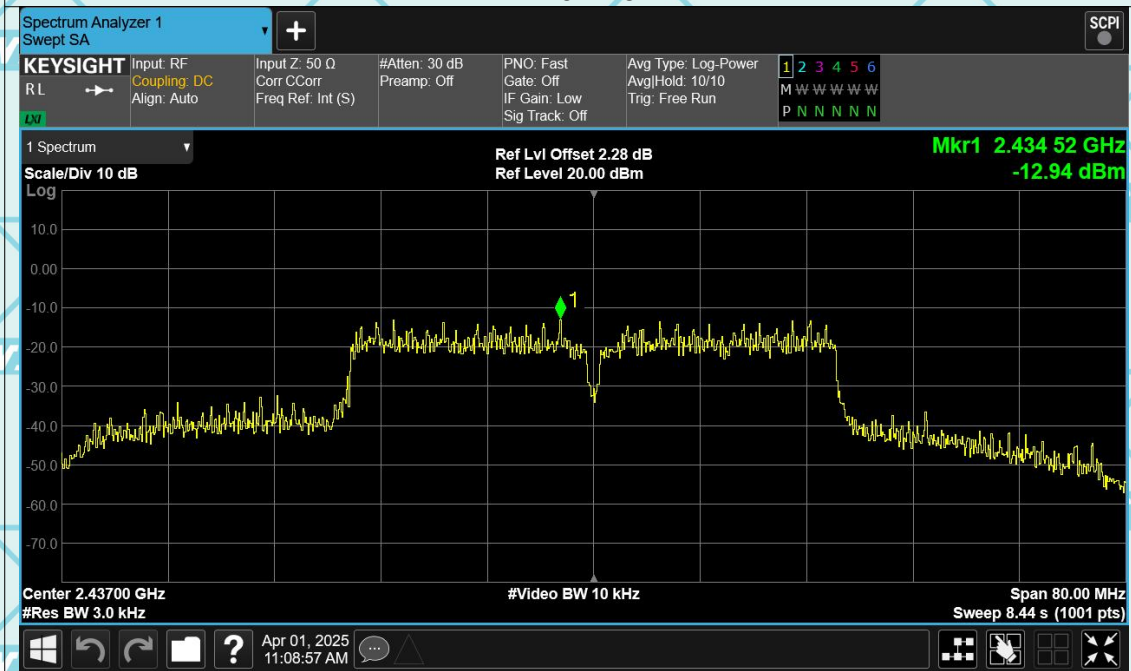


PSD NVNT n40 2452MHz Ant1

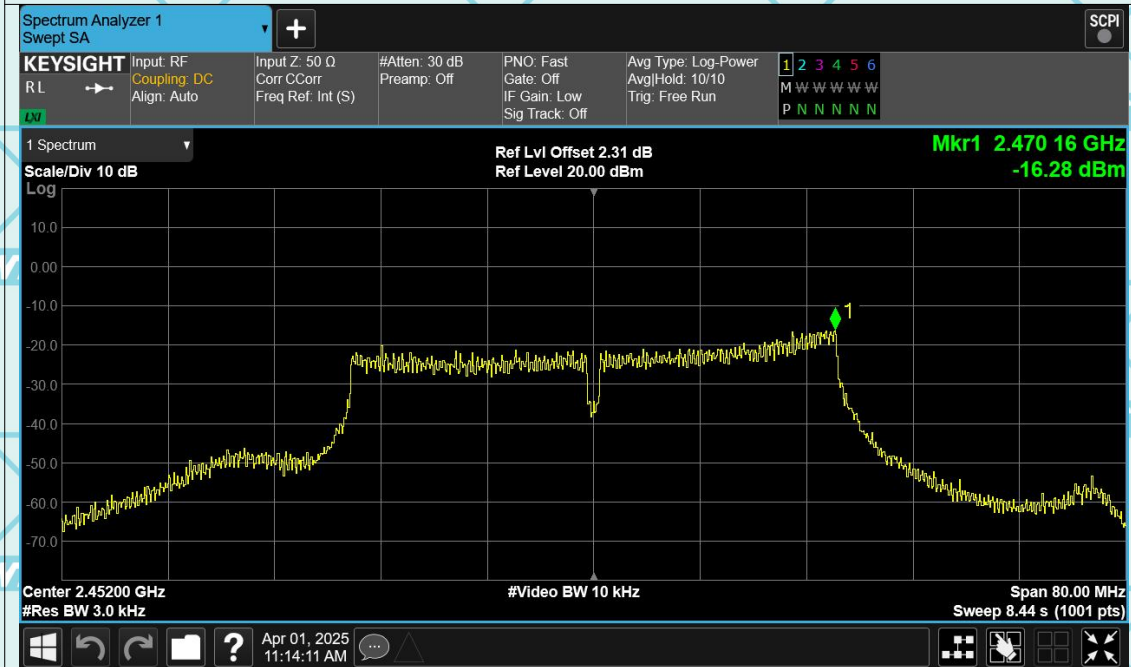

Report No.: WSCT-ANAB-R&E250400022A-Wi-Fi

6.5. Conducted Band Edge and Spurious Emission Measurement



6.5.1. Test Specification

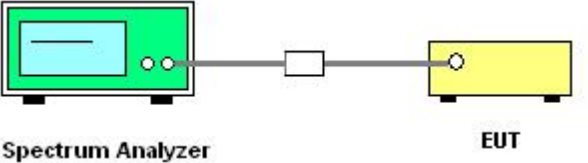Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074
Limit:	In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).
Test Setup:	 The diagram illustrates the test setup. On the left is a green box labeled 'Spectrum Analyzer'. A line connects it to a small white box labeled 'Attenuator'. Another line connects the attenuator to a yellow box labeled 'EUT' (Equipment Under Test).
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04. 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d). 5. Measure and record the results in the test report. 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
Test Result:	PASS



Report No.: WSCT-ANAB-R&E250400022A-Wi-Fi

Test Data



Band Edge

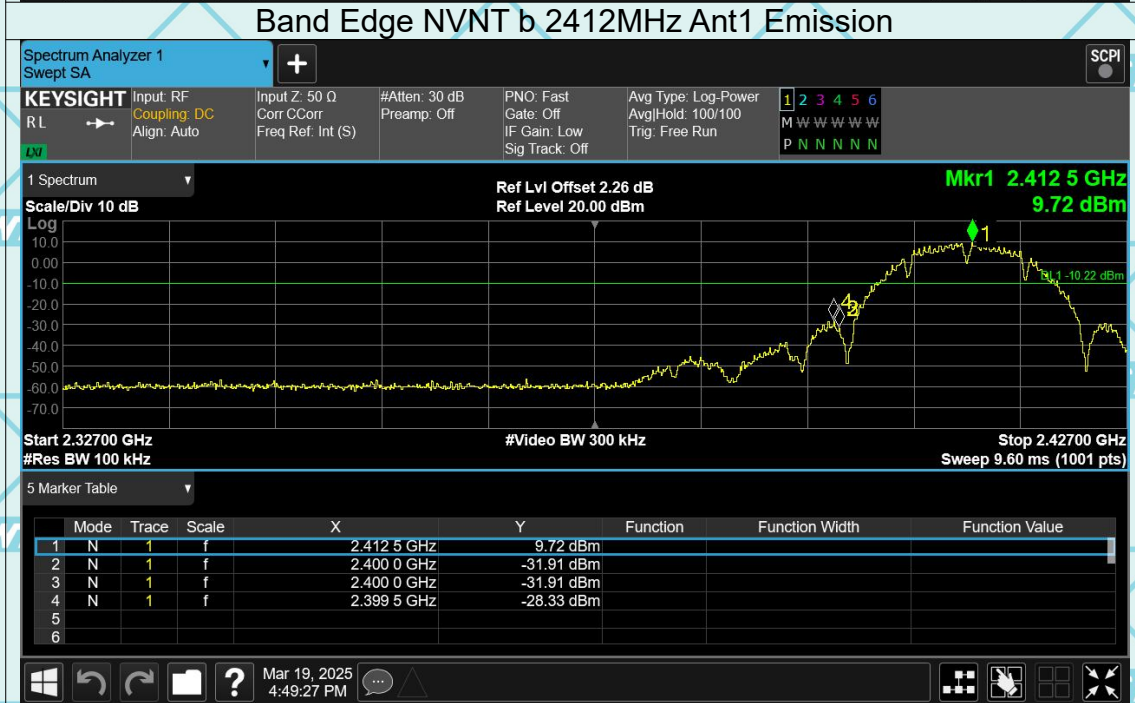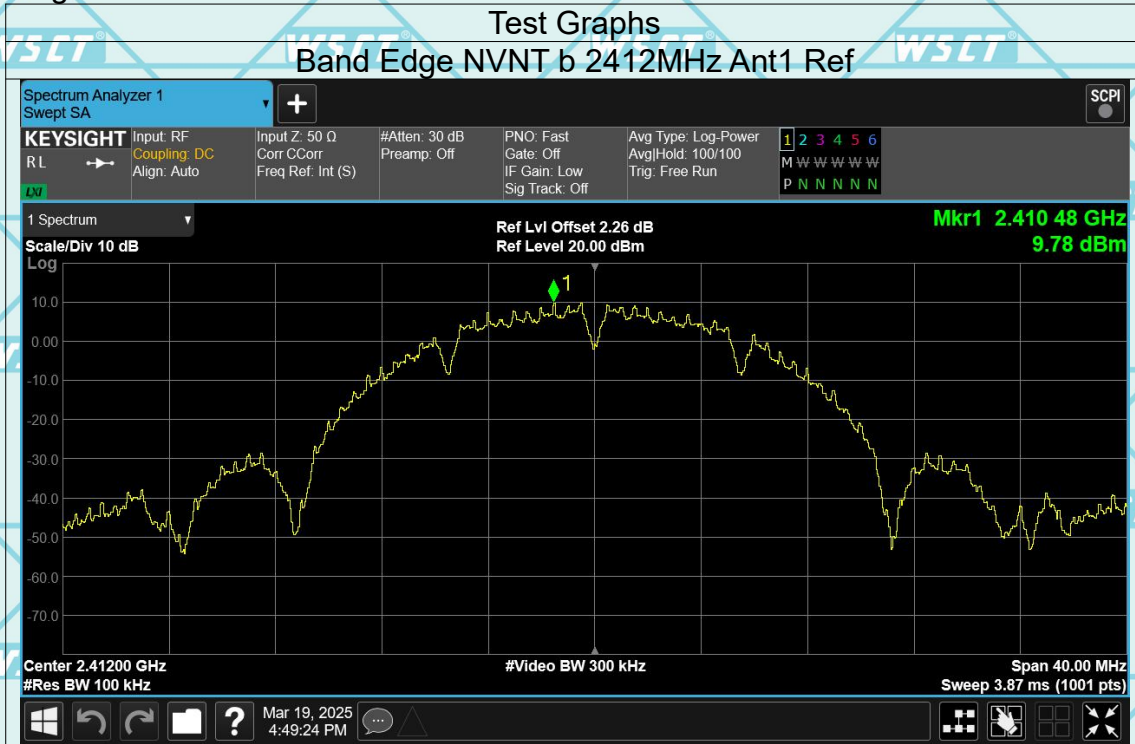

Report No.: WSCT-ANAB-R&E250400022A-Wi-Fi

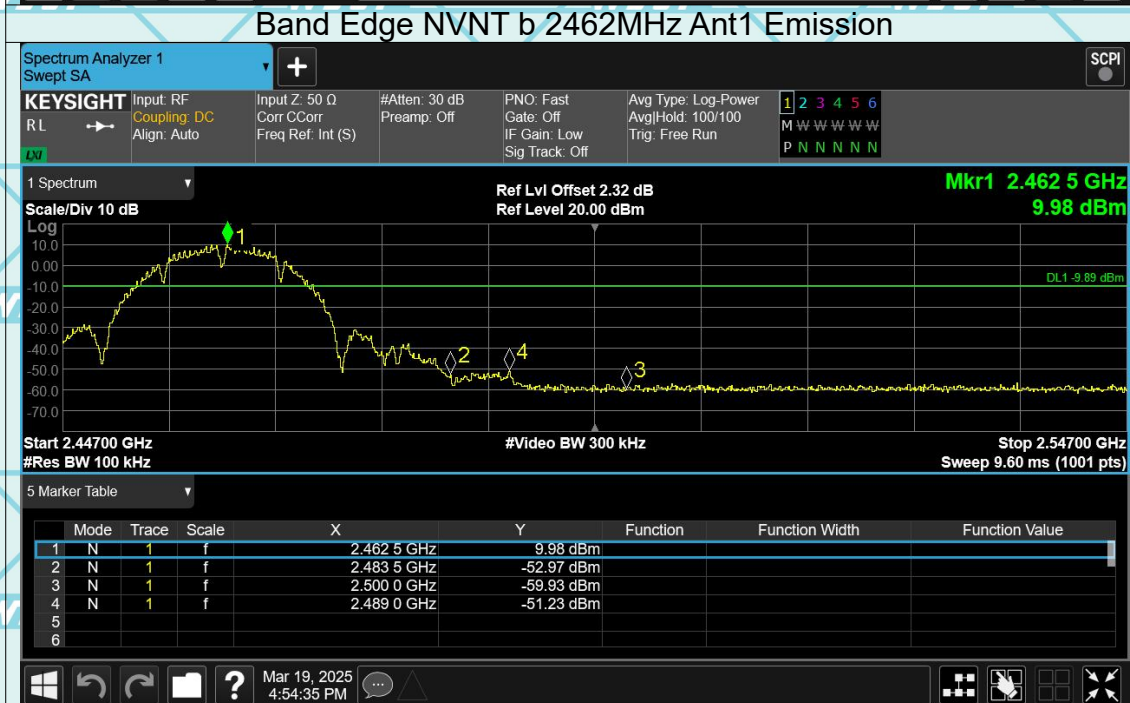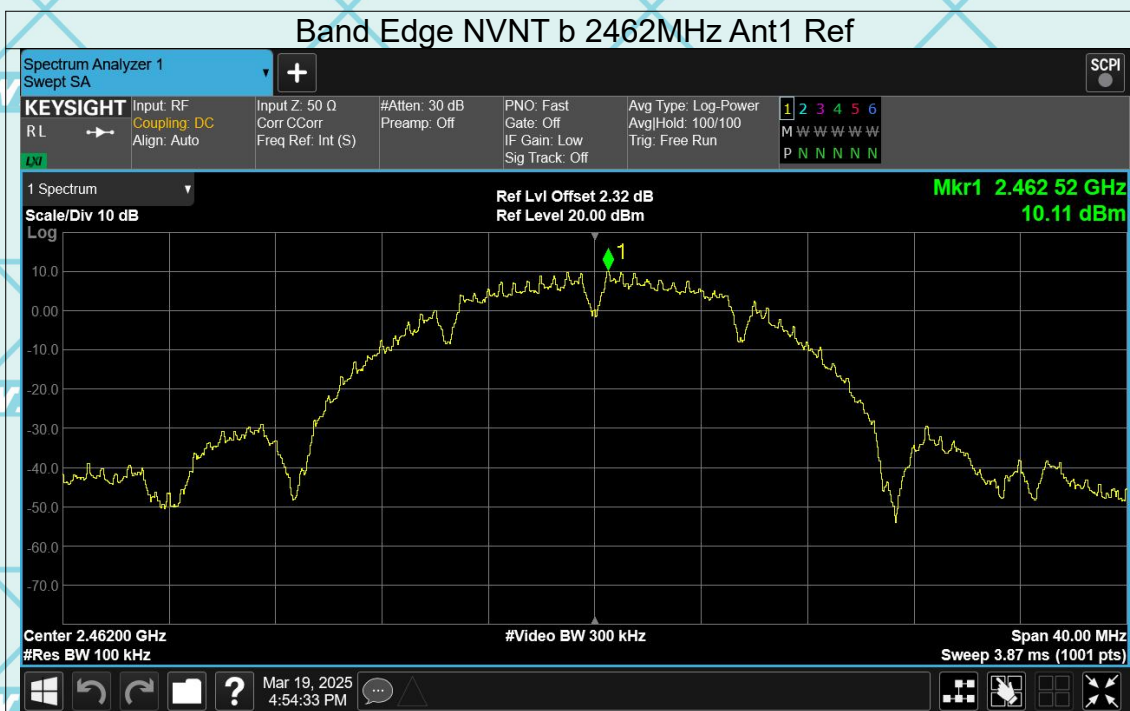


Report No.: WSCT-ANAB-R&E250400022A-Wi-Fi

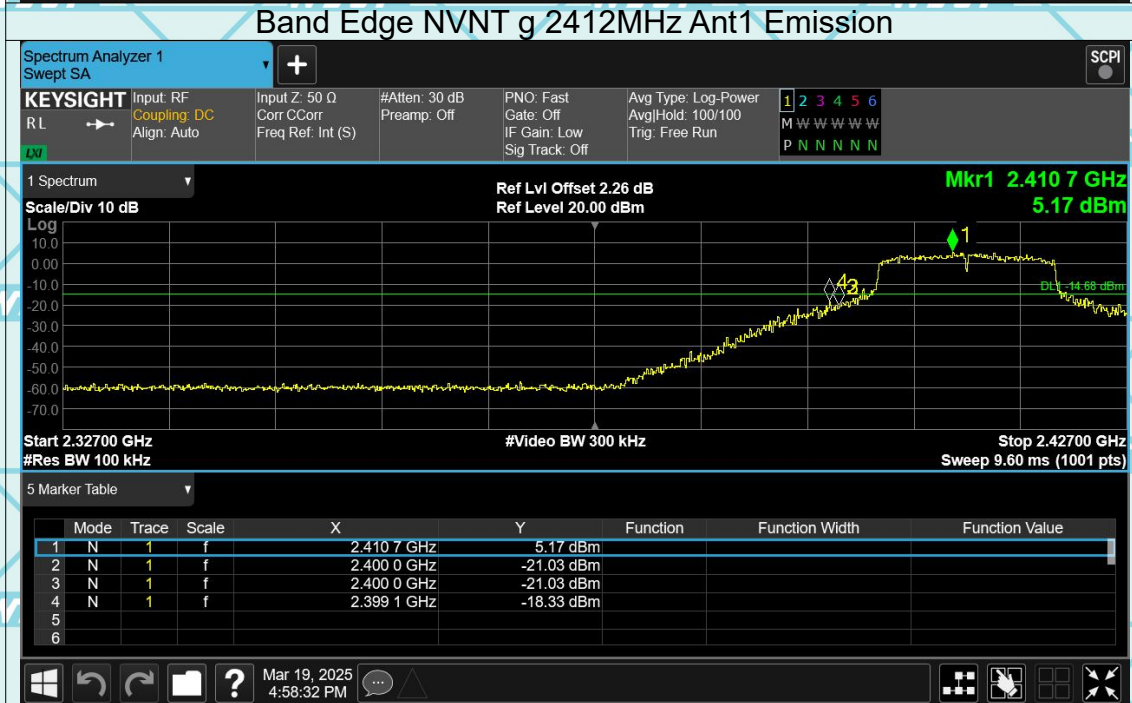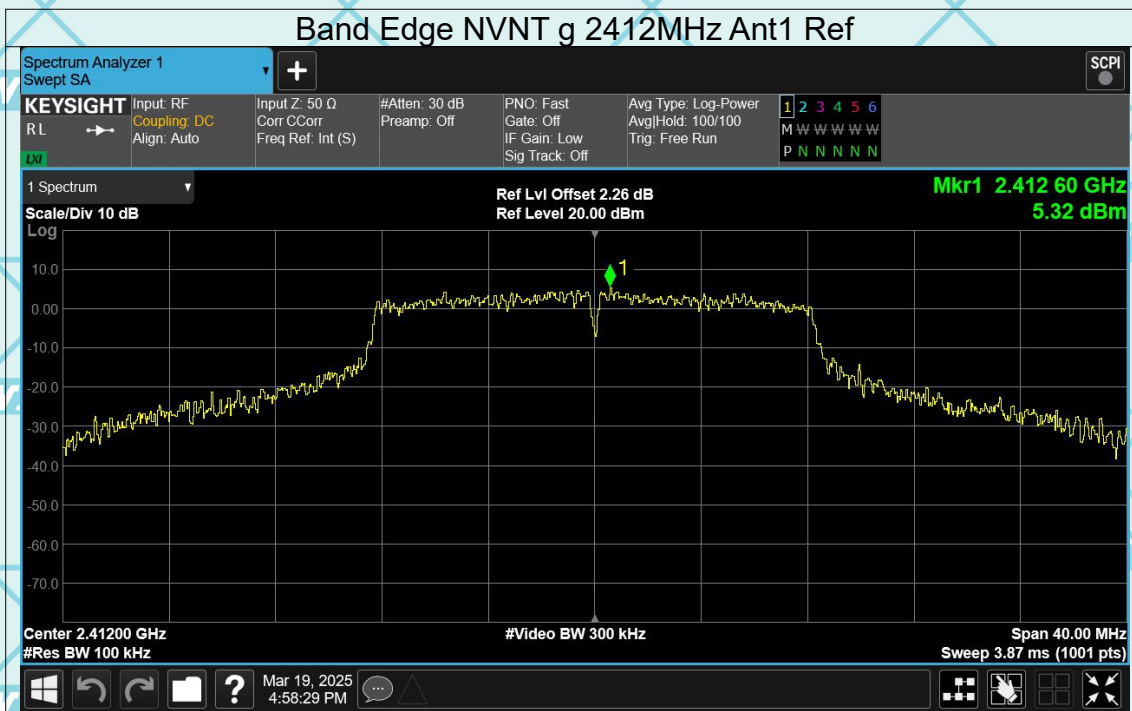

Report No.: WSCT-ANAB-R&E250400022A-Wi-Fi

Band Edge NVNT g 2462MHz Ant1 Ref

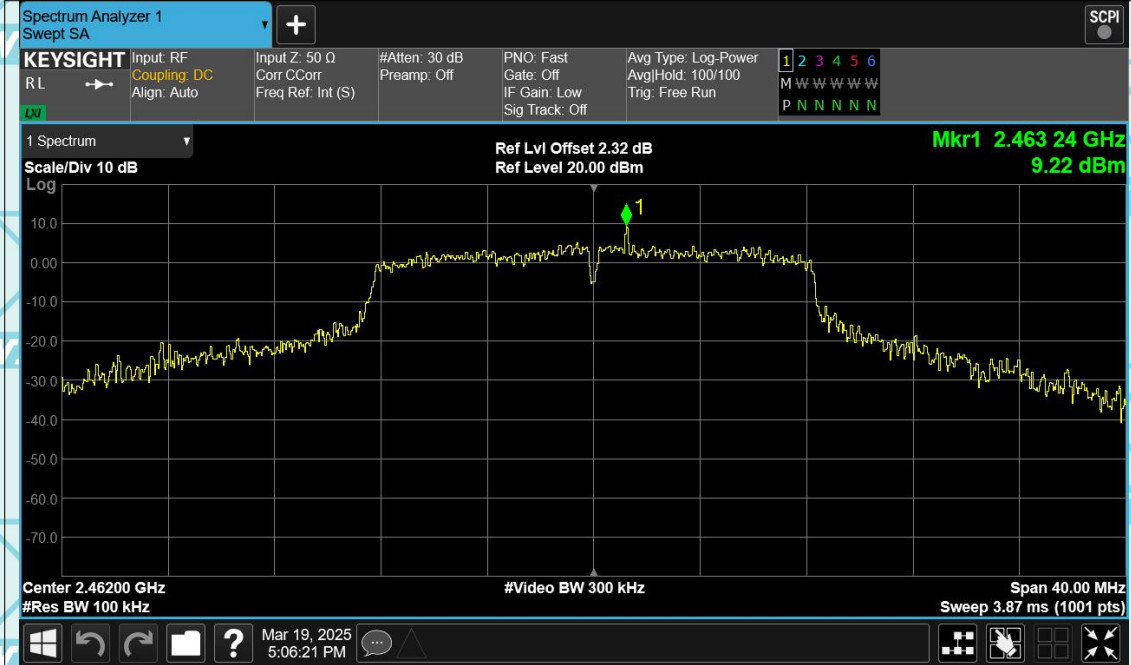


Band Edge NVNT g 2462MHz Ant1 Emission




Report No.: WSCT-ANAB-R&E250400022A-Wi-Fi

Band Edge NVNT n20 2412MHz Ant1 Ref

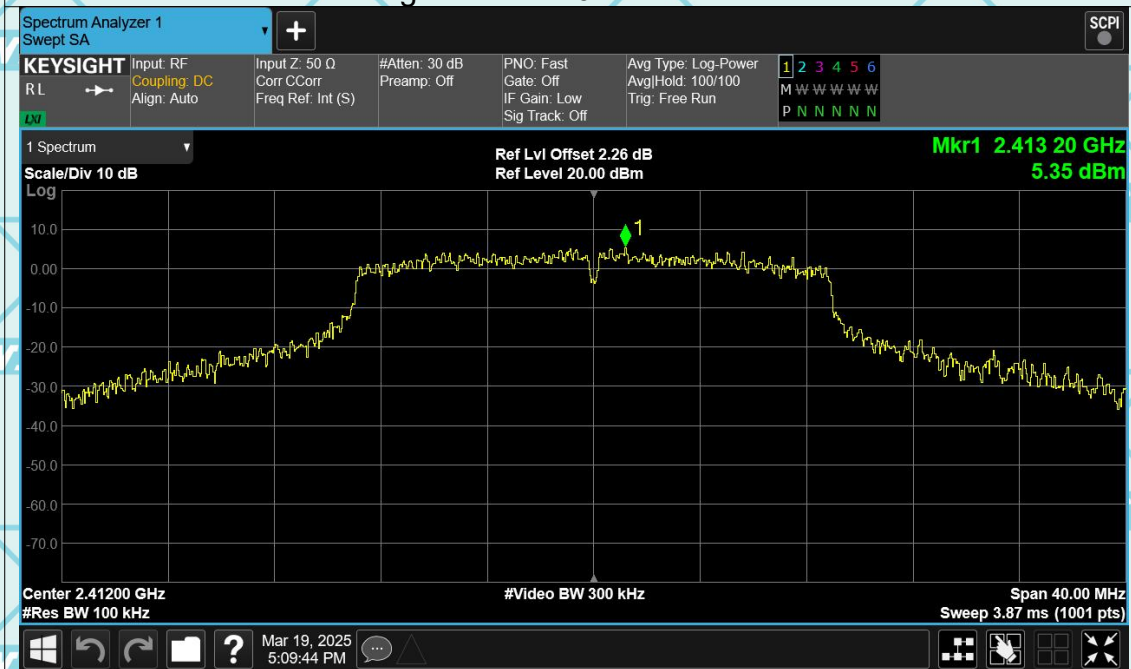


Band Edge NVNT n20 2412MHz Ant1 Emission

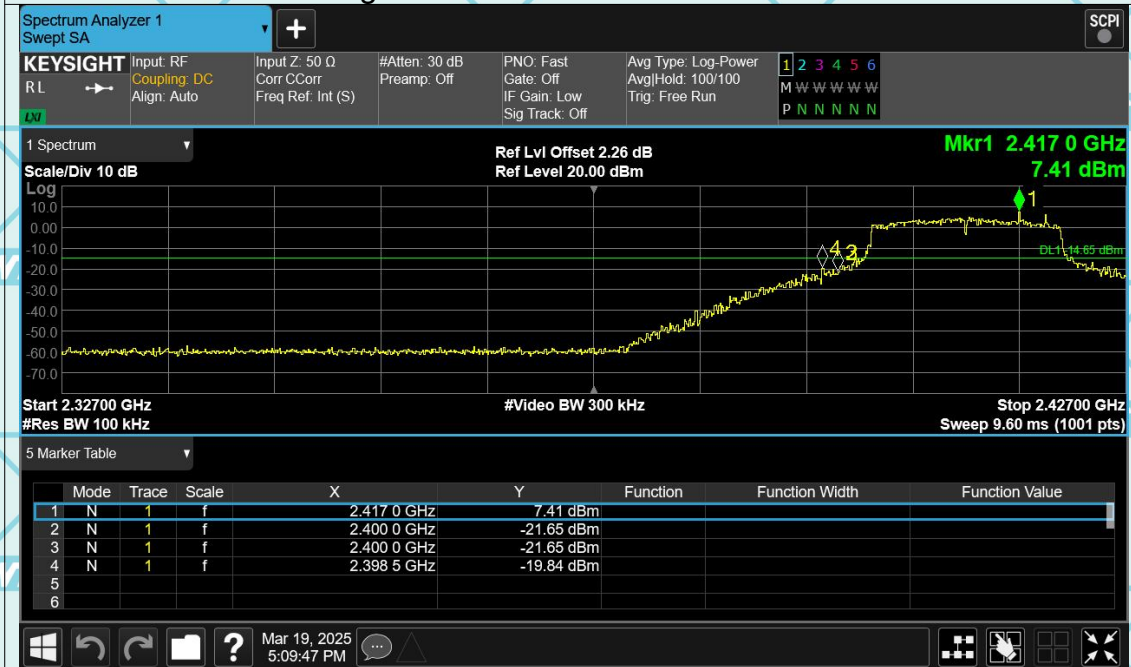

Report No.: WSCT-ANAB-R&E250400022A-Wi-Fi

Band Edge NVNT n20 2462MHz Ant1 Ref

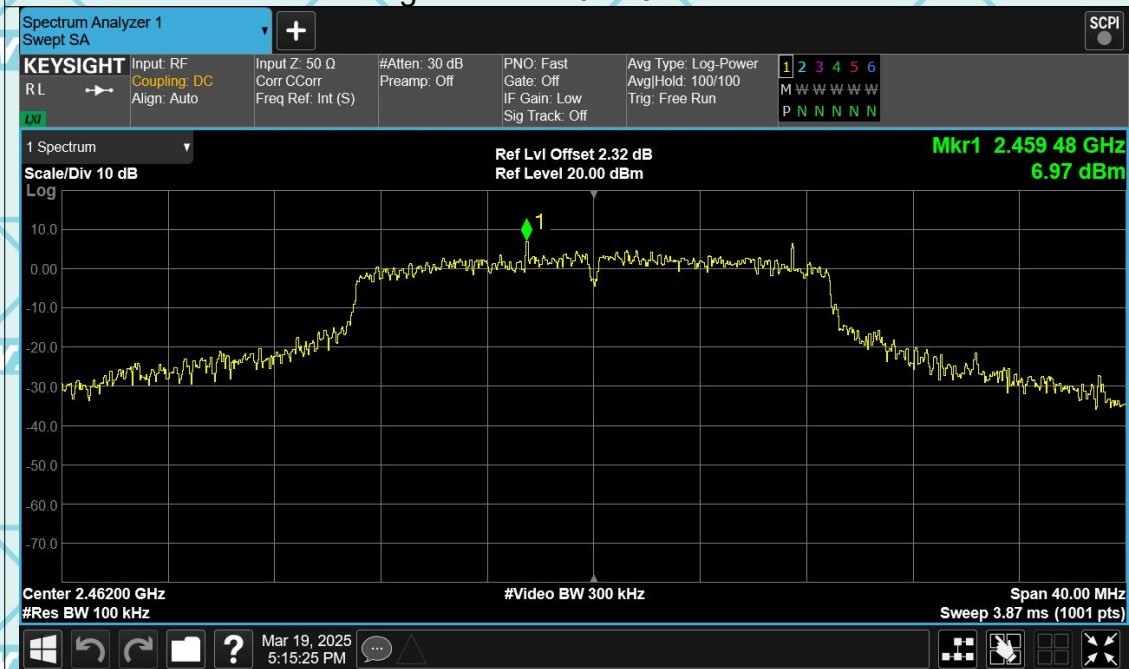

Band Edge NVNT n20 2462MHz Ant1 Emission

