


Containment Transmit Data Bit Timing/Encoding

The figure below illustrates the timing used for data bit transmission:

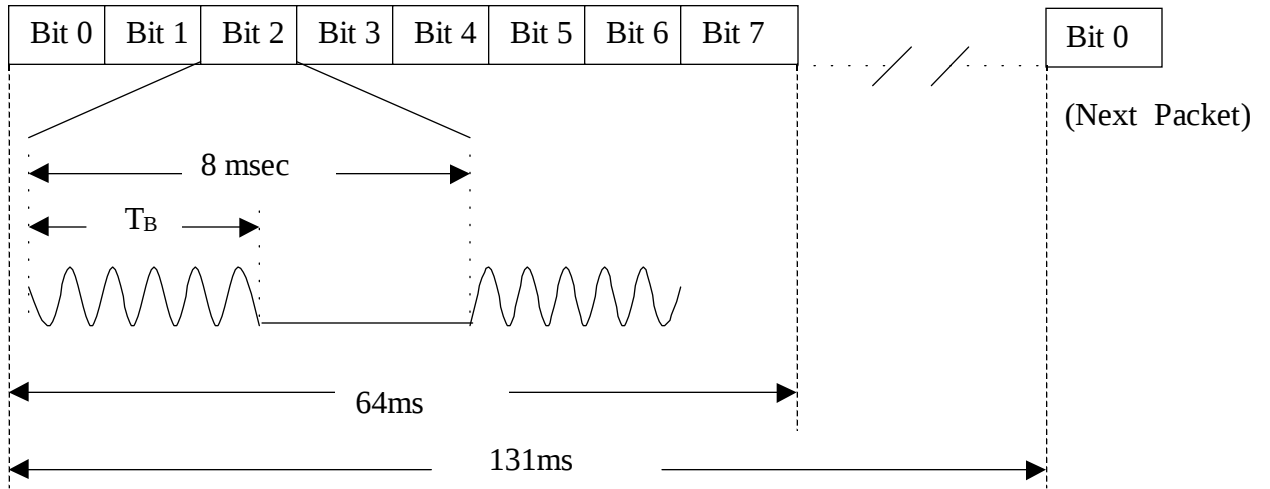

	"ON" Time
$T_B = 0$	$1.4\text{ms} \pm .2 \text{ ms}$
$T_B = 1$	$4.0\text{ms} \pm .2 \text{ ms}$