

RETLIF TESTING LABORATORIES

TABULAR DATA SHEET

Test Method:	Fundamental Field Strength		
Customer:	LPA Design, Inc.	Job No:	R-4564N-1
Test Sample:	PocketWizard Plus 2 with Transceiver		
Model No:	N/A	Serial No:	N/A
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.231(b)		
Operating Mode:	Continuously Transmitting		
Technician:	M.Seamans	Date:	03/05/2006
Notes:	Corrected peak readings meet peak limit (20dB above average limit) per 15.35		

[illegible]

RETLIF TESTING LABORATORIES

TABULAR DATA SHEET

Test Method:	Spurious Emissions 30MHz to 3.6GHz		
Customer:	LPA Design, Inc.	Job No:	R-4564N-1
Test Sample:	PocketWizard Plus 2 with Transceiver		
Model No:	N/A	Serial No:	N/A
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.231(b)		
Operating Mode:	Continuously Transmitting		
Technician:	M.Seamans	☒ Date:	03/05/2006
Notes:	Fundamental Frequency: 344.0501002 MHz		

[illegible]

RETLIF TESTING LABORATORIES

TABULAR DATA SHEET

Test Method:	Spurious Emissions 30MHz to 3.6GHz		
Customer:	Photo Control Corporation	Job No:	R-4564N-1
Test Sample:	PocketWizard Plus 2 with Transceiver		
Model No:	N/A	Serial No:	N/A
Test Specification:	FCC Part 15, Subpart C Paragraph: 15.231(b)		
Operating Mode:	Continuously Transmitting		
Technician:	M.Seamans	Date:	03/05/2006
Notes:	Fundamental Frequency: 353.99499 MHz		


[illegible]

No harmonic frequencies were observed above the noise floor of the test equipment which was a minimum of 10 dB below the limit.

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method:		Occupied Bandwidth	
Customer:	LPA Design, Inc.	Test Sample:	PocketWizard Plus 2 with Transceiver
Model No:	N/A	Serial No:	N/A
Test Specification:	FCC Part 15, Subpart C	15.231(c)	
Operating Mode:	Transmitting signal @ 344MHz to 354 MHz		
Notes:	Transmit Frequency 344.0501002 MHz		
Job No:	R-4564N-1		
Technician:	T. Hannemann		
Date:	6/5/2006		

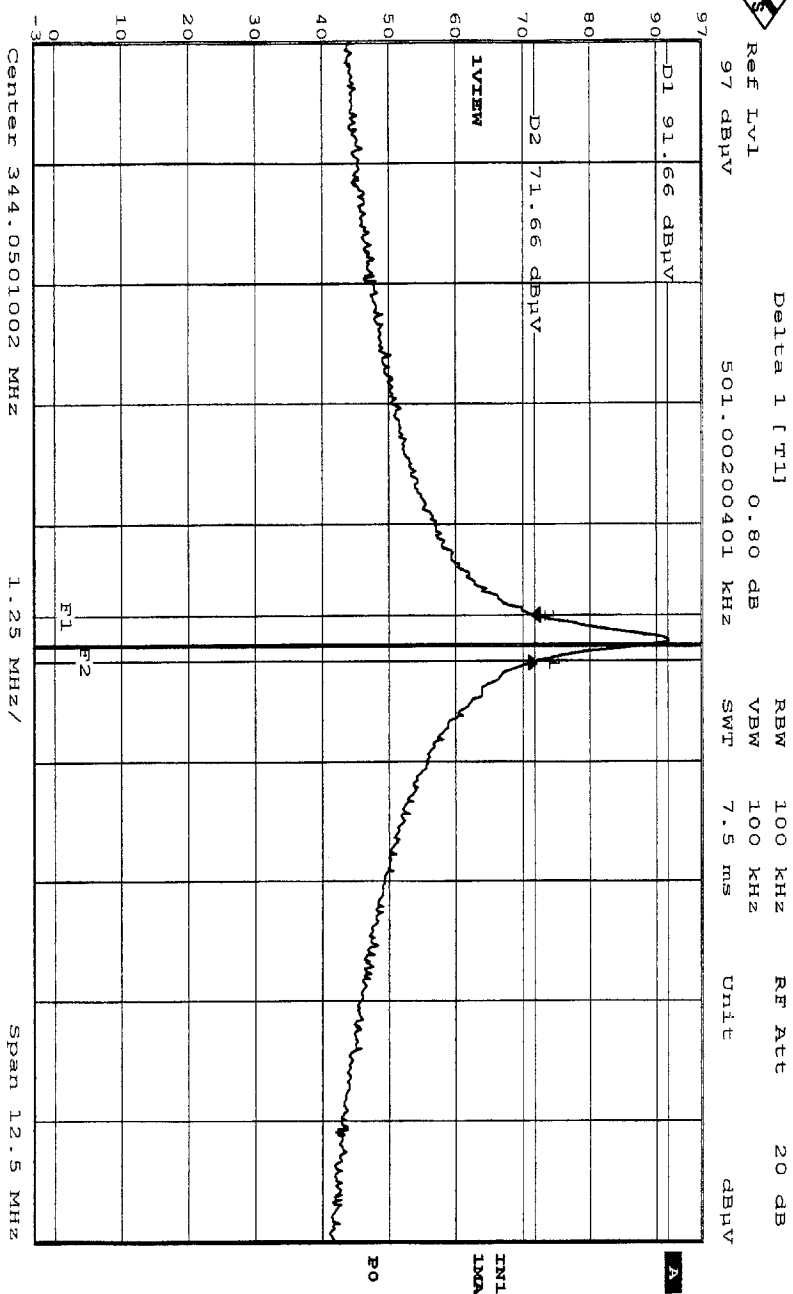

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET

Test Method:		Occupied Bandwidth	
Customer:		LPA Design, Inc.	
Model No:		N/A	
Test Specification:		FCC Part 15, Subpart C	
Operating Mode:		Transmitting signal @ 344MHz to 354 MHz	
Notes:		Transmit Frequency 353.99499 MHz	
Test Sample:		PocketWizard Plus 2 with Transceiver	
Serial No:		N/A	
Date:		6/5/2006	
Job No:		R-4564N-1	
Technician:		T. Hannemann	

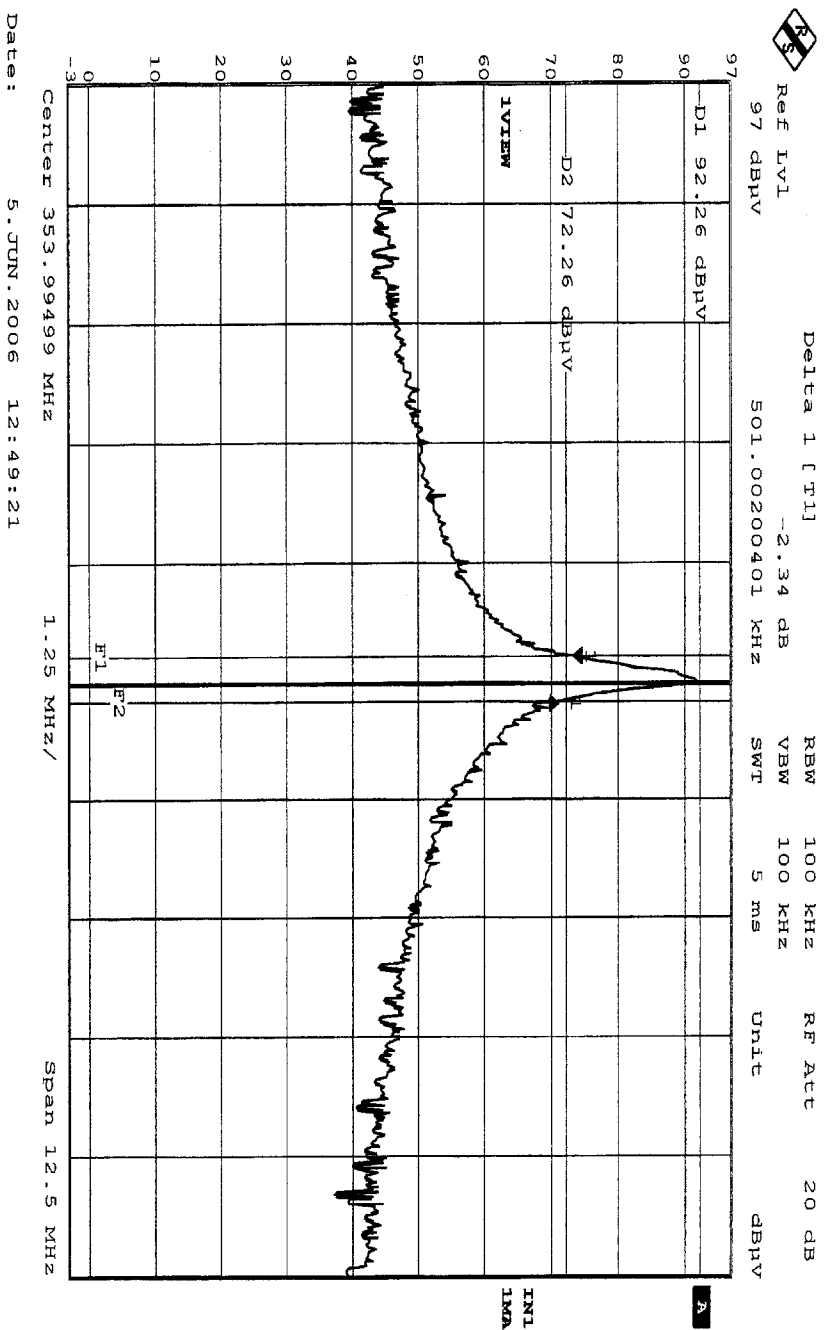

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET


Test Method: Conducted Emissions 150 kHz to 30 MHz			
Customer: LPA Design, Inc.	Test Sample:	Job No.: R-4564N-1	
Model No.: N/A	Serial No.: N/A	Technician: M. Seamans	
Test Specification: FCC Part 15, Subpart C		Paragraph: 15.207 (a)	
Operating Mode: Transmitting signal @ 344MHz to 354 MHz		Date: February 1, 2006	
Notes: Lead Tested: 120 VAC 60 Hz Hot Peak Readings to Average Limits.			

10: 19:52 FEB 01, 2006

REF 73.0 dBµV AT 10 dB

PEAK
LOG
10
dB/
OFFST
10.0
dB

WA SB
SC FC
CORR

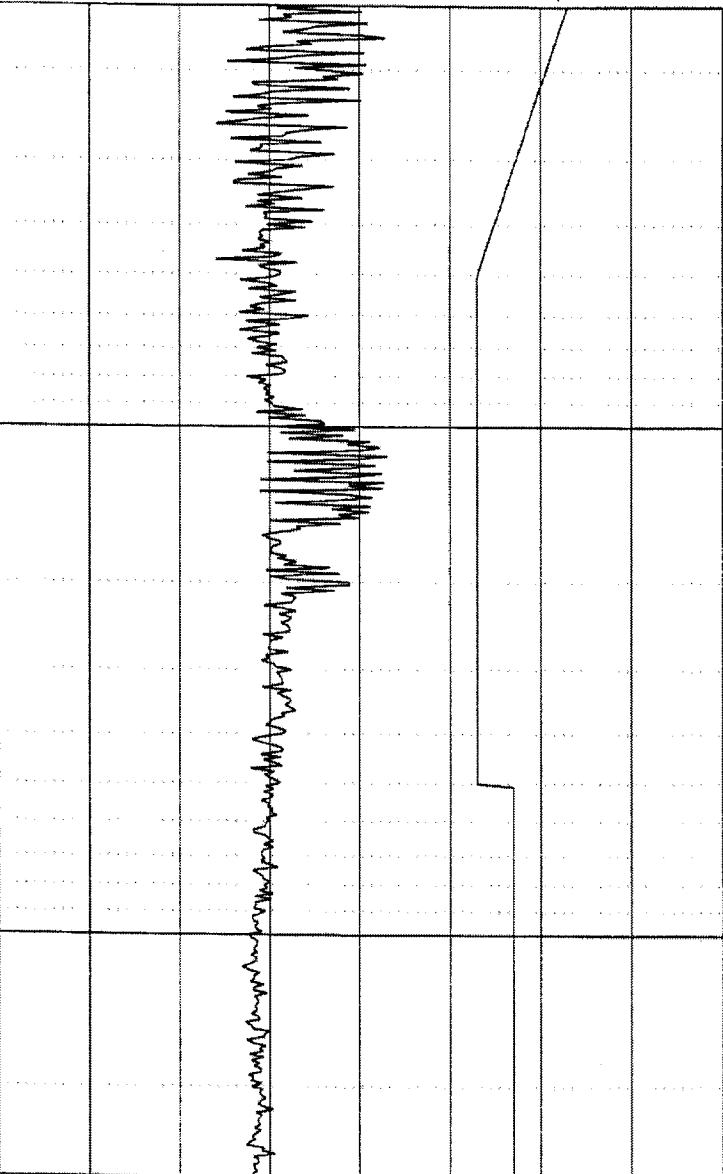

START 150 KHz
#RES BW 9.0 KHz

VBW 30 KHz

STOP 30.00 MHz
#SWP 10.0 sec


RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET

Test Method: Conducted Emissions 150 kHz to 30 MHz			
Customer: LPA Design, Inc.	Test Sample: PocketWizard Plus 2 with Transceiver	Job No: R-4564N-1	
Model No: N/A	Serial No: N/A	Technician: M. Seamans	
Test Specification: FCC Part 15, Subpart C	Paragraph: 15.207 (a)	Date: February 1, 2006	
Operating Mode: Transmitting signal @ 344MHz to 354 MHz			
Notes: Lead Tested: 120 VAC 60 Hz Hot	Peak Readings to Average Limits.		

10: 18: 09 FEB 01, 2006

REF 73.0 dBμV AT 10 dB

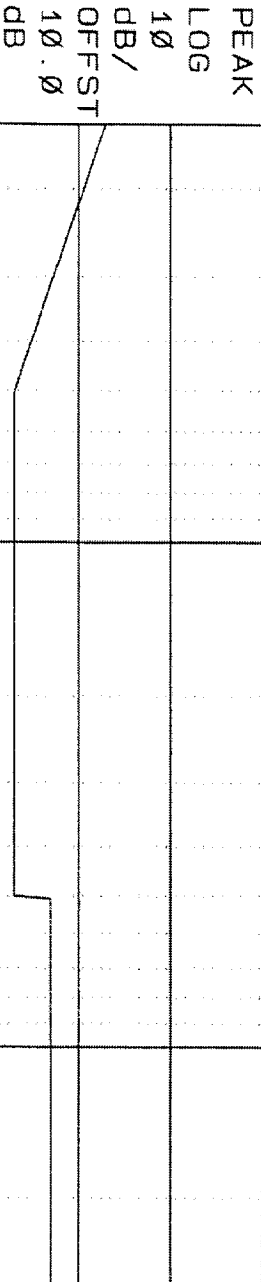

START 150 kHz STOP 30.00 MHz
#RES BW 9.0 kHz VBW 30 kHz #SWP 10.0 sec