

# FCC PART 90 TYPE APPROVAL EMI MEASUREMENT AND TEST REPORT

For

## PACIFIC CREST CORPORATION

990 Richard Avenue, Suite 110  
Santa Clara, CA 95050

**FCC ID: KEAPDLVH05**

|                                                                                                                                                              |                                                          |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|
| <b>This Report Concerns:</b><br><input checked="" type="checkbox"/> Original Report                                                                          | <b>Equipment Type:</b><br>Wireless Positioning Data Link |
| <b>Test Engineer:</b> Shakti Kosta<br>Ming Jing /                         |                                                          |
| <b>Report No.:</b> R0411292a(PDL1505)                                                                                                                        |                                                          |
| <b>Report Date:</b> 2004-12-17                                                                                                                               |                                                          |
| <b>Reviewed By:</b> Daniel Deng                                          |                                                          |
| <b>Prepared By:</b> Bay Area Compliance Laboratory Corporation<br>230 Commercial Street<br>Sunnyvale, CA 94085<br>Tel: (408) 732-9162<br>Fax: (408) 732 9164 |                                                          |

**Note:** The test report is specially limited to the above company and the product model only. It may not be duplicated without prior written consent of Bay Area Compliance Laboratory Corporation. This report **must not** be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the US Government.

**TABLE OF CONTENTS**

|                                                                            |           |
|----------------------------------------------------------------------------|-----------|
| <b>GENERAL INFORMATION.....</b>                                            | <b>4</b>  |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....                   | 4         |
| OBJECTIVE .....                                                            | 4         |
| RELATED SUBMITTAL(S)/GRANT(S).....                                         | 4         |
| TEST METHODOLOGY .....                                                     | 4         |
| TEST FACILITY .....                                                        | 5         |
| <b>SYSTEM TEST CONFIGURATION.....</b>                                      | <b>6</b>  |
| JUSTIFICATION .....                                                        | 6         |
| BLOCK DIAGRAM.....                                                         | 6         |
| EQUIPMENT MODIFICATIONS .....                                              | 6         |
| TEST SETUP BLOCK DIAGRAM .....                                             | 6         |
| <b>SUMMARY OF TEST RESULTS .....</b>                                       | <b>7</b>  |
| <b>§2.1046 - CONDUCTED OUTPUT POWER.....</b>                               | <b>8</b>  |
| PROVISION APPLICABLE.....                                                  | 8         |
| TEST PROCEDURE .....                                                       | 8         |
| TEST EQUIPMENT .....                                                       | 8         |
| ENVIRONMENTAL CONDITIONS .....                                             | 8         |
| TEST RESULTS .....                                                         | 8         |
| <b>§2.1047, §90.207 - MODULATION CHARACTERISTIC .....</b>                  | <b>10</b> |
| APPLICABLE STANDARD .....                                                  | 10        |
| TEST PROCEDURE .....                                                       | 10        |
| TEST EQUIPMENT .....                                                       | 10        |
| ENVIRONMENTAL CONDITIONS .....                                             | 10        |
| TEST RESULTS .....                                                         | 10        |
| <b>§2.1049, AND § 90.209 – OCCUPIED BANDWIDTH .....</b>                    | <b>14</b> |
| APPLICABLE STANDARD .....                                                  | 14        |
| TEST PROCEDURE .....                                                       | 14        |
| TEST EQUIPMENT .....                                                       | 15        |
| ENVIRONMENTAL CONDITIONS .....                                             | 15        |
| TEST RESULTS .....                                                         | 15        |
| <b>§2.1051 AND §90.210 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS .....</b> | <b>19</b> |
| APPLICABLE STANDARD .....                                                  | 19        |
| TEST PROCEDURE .....                                                       | 19        |
| TEST EQUIPMENT .....                                                       | 19        |
| ENVIRONMENTAL CONDITIONS .....                                             | 19        |
| TEST RESULTS .....                                                         | 19        |
| <b>§2.1053 AND §90.210 - RADIATED SPURIOUS EMISSION .....</b>              | <b>21</b> |
| APPLICABLE STANDARD .....                                                  | 21        |
| TEST PROCEDURE .....                                                       | 21        |
| TEST EQUIPMENT .....                                                       | 21        |
| ENVIRONMENTAL CONDITIONS .....                                             | 22        |
| TEST RESULT .....                                                          | 22        |
| <b>§2.1055 (D) AND §90.213- FREQUENCY STABILITY .....</b>                  | <b>23</b> |
| APPLICABLE STANDARD .....                                                  | 23        |
| TEST PROCEDURE .....                                                       | 23        |
| TEST EQUIPMENT .....                                                       | 23        |
| ENVIRONMENTAL CONDITIONS .....                                             | 23        |
| TEST RESULTS .....                                                         | 24        |
| <b>§90.214 - TRANSIENT FREQUENCY BEHAVIOR.....</b>                         | <b>25</b> |
| STANDARD APPLICABLE .....                                                  | 25        |

---

|                                |    |
|--------------------------------|----|
| TEST METHOD .....              | 25 |
| TEST EQUIPMENT .....           | 25 |
| ENVIRONMENTAL CONDITIONS ..... | 25 |
| TEST RESULT .....              | 25 |

## GENERAL INFORMATION

---

### Product Description for Equipment Under Test (EUT)

The *Pacific Crest Corporation's* product, *FCC ID:KEAPDLVH05* (Model: *PDL1505*) or the "EUT" as referred in this report is Positioning Data Link, which measures approximately 21.0cmL x 6.1cmW x 6.1cmH.

The EUT operates at 150-173 MHz with maximum power of 37.67dBm (5.848W), frequency tolerance 1.0 ppm for 6.25 kHz channel bandwidth, 2.5 ppm for 12.5 kHz channel bandwidth, and 5.0 ppm for 25 kHz channel bandwidth, emission designator 4K9F1D, 9K8F1D, and 19K6F1D.

*\*The test data gathered are from production sample, serial number 04491384, provided by the manufacturer.*

### Objective

This type approval report is prepared on behalf of *Pacific Crest Corporation* in accordance with Part 2 and Part 90 of the Federal Communication Commissions rules.

The objective of the manufacturer is to determine compliance with FCC rules for output power, modulation characteristic, occupied bandwidth, spurious emission at antenna terminal, frequency stability, and radiated margin.

### Related Submittal(s)/Grant(s)

No Related Submittals

### Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following individual parts:

Part 90 – Private Land Mobile Radio Service

Applicable Standards: TIA EIA 137-A, TIA EIA 98-C, TIA/EIA-603, ANSI 63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory, Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

## Test Facility

The Open Area Test site used by Bay Area Compliance Laboratory Corporation to collect radiated and conducted emission measurement data is located in the back parking lot of the building at 230 Commercial Street, Sunnyvale, California, USA.

Test site at Bay Area Compliance Laboratory Corporation has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission and Voluntary Control Council for Interference has the reports on file and is listed under FCC file 31040/SIT 1300F2 and VCCI Registration No.: C-1298 and R-1234. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratory Corporation is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (NVLAP). The scope of the accreditation covers the FCC Method - 47 CFR Part 15 - Digital Devices, IEC/CISPR 22: 1998, and AS/NZS 3548: Electromagnetic Interference - Limits and Methods of Measurement of Information Technology Equipment test methods under NVLAP Lab Code 200167.

---

## SYSTEM TEST CONFIGURATION

---

### Justification

The host system was configured for testing according to TIA603A.

The EUT was tested in the normal (native) operating mode to represent *worst-case* results during the final qualification test.

### Block Diagram


Please refer to Exhibit D.

### Equipment Modifications

No modifications were made to the EUT.

### Test Setup Block Diagram

The EUT is a standalone device.

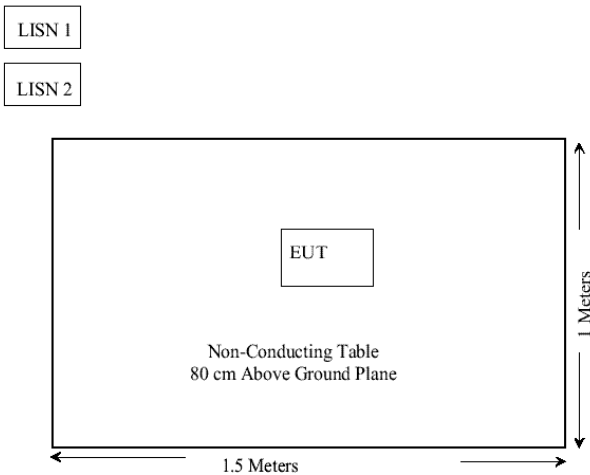

---

**SUMMARY OF TEST RESULTS**

---

| FCC RULE              | DESCRIPTION OF TEST                                                    | RESULT    |
|-----------------------|------------------------------------------------------------------------|-----------|
| § 2.1046              | Conducted Output Power                                                 | Compliant |
| § 2.1046,<br>§ 90.205 | RF Output Power                                                        | Compliant |
| § 2.1047<br>§ 90.207  | Modulation Characteristics                                             | Compliant |
| § 2.1049<br>§ 90.209  | Emission, Occupied Bandwidth                                           | Compliant |
| § 2.1051<br>§ 90.210  | Spurious emissions at antenna terminals                                | Compliant |
| § 2.1053<br>§ 90.210  | Field strength of spurious radiation                                   | Compliant |
| § 2.1055<br>§ 90.213  | Frequency stability vs. temperature<br>Frequency stability vs. voltage | Compliant |
| § 90.214              | Transient Frequency Behavior                                           | Compliant |

## §2.1046 - CONDUCTED OUTPUT POWER

### Provision Applicable

Per FCC §2.1046 and §90.205: maximum ERP is dependent upon the station's antenna HAAT and required service area.

### Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuator.

### Test Equipment

| Manufacturer | Description                | Model  | Cal. Due Date |
|--------------|----------------------------|--------|---------------|
| Agilent      | Spectrum Analyzer          | 8562EC | 2004-12-29    |
| HP           | RF Communications Test Set | 8920A  | 2004-12-29    |
| HP           | Signal Generator           | 8648A  | 2004-12-29    |
| Tek          | Oscilloscope               | TDS220 | 2004-12-29    |

\* **Statement of Traceability:** BACL attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.


### Environmental Conditions

|                    |              |
|--------------------|--------------|
| Room Temperature:  | 20° C        |
| Relative Humidity: | 50%          |
| Pressure:          | 1 atmosphere |


### Test Results

|               | Frequency | Output Power in dBm | Output Power in W |
|---------------|-----------|---------------------|-------------------|
| Maximum Power | 159.00    | 37.67               | 5.848             |
| Minimum Power | 159.00    | 27.67               | 0.588             |

Note: The power output may depend on the intended use of the EUT. For all tests, the EUT was set to maximum conditions. Please refer to the plots in following pages.

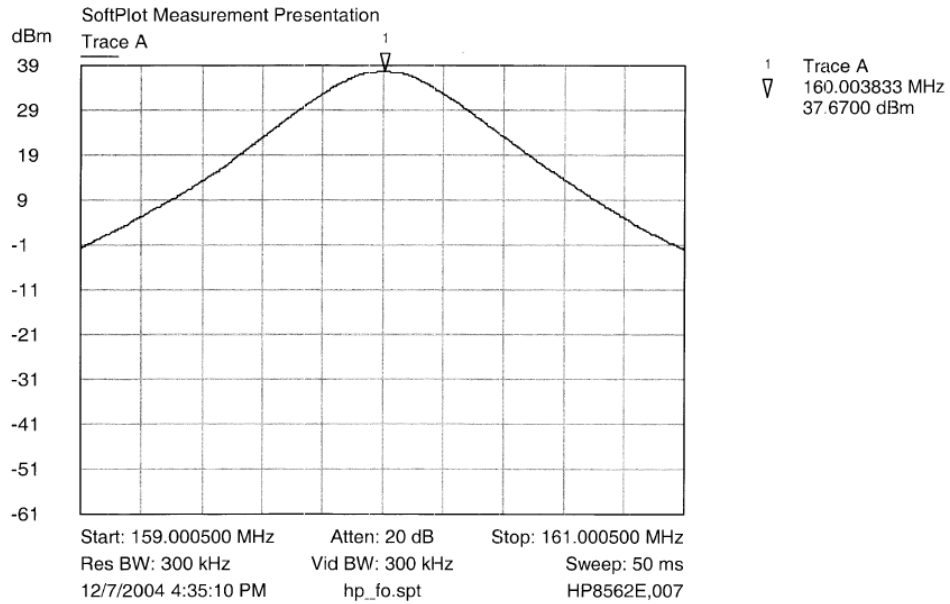

CARRIER POWER :  $P_{MAX}$  : 37.67 dBm = 5.8 W.  
JLK  
12/7/04

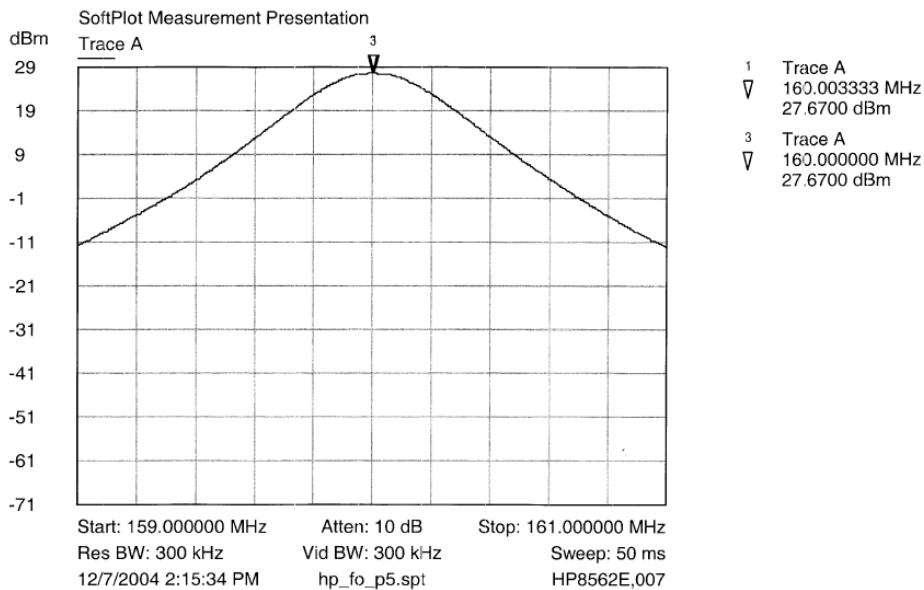

CARRIER POWER :  $P_{MIN.}$  : 0.5 W = 27 dBm  
JLK  
12/7/04

---

**§2.1047, §90.207 - MODULATION CHARACTERISTIC**

---

**Applicable Standard**

§2.1047 &amp; §90.205:

A curve or equivalent data which shows that the equipment will meet the modulation requirements of the rule.

**Test Procedure**

Test Method: TIA/EIA-603 2.2.3

**Test Equipment**

| Manufacturer | Description                   | Model  | Cal. Due Date |
|--------------|-------------------------------|--------|---------------|
| Agilent      | Spectrum Analyzer             | 8562EC | 2004-12-29    |
| HP           | RF Communications<br>Test Set | 8920A  | 2004-12-29    |
| HP           | Signal Generator              | 8648A  | 2004-12-29    |
| Tek          | Oscilloscope                  | TDS220 | 2004-12-29    |

\* **Statement of Traceability:** BACL attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.


**Environmental Conditions**

|                    |              |
|--------------------|--------------|
| Room Temperature:  | 20° C        |
| Relative Humidity: | 50%          |
| Pressure:          | 1 atmosphere |

**Test Results**

The plot(s) of modulation characteristic is presented hereinafter as reference.


For 6.25 kHz Channel Spacing:

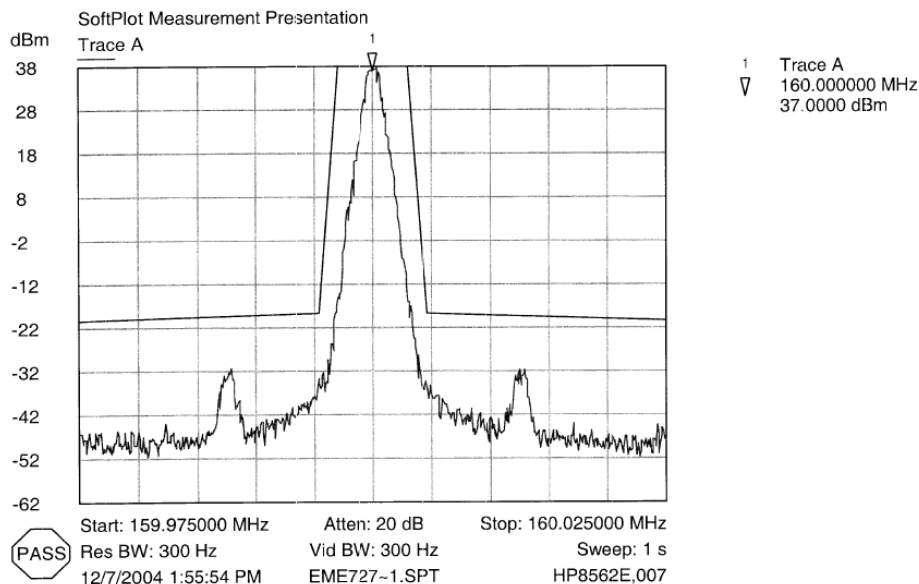

EMISSION MASK E : 4800 4LFSK


12/7/04

For 12.5 kHz Channel Spacing:

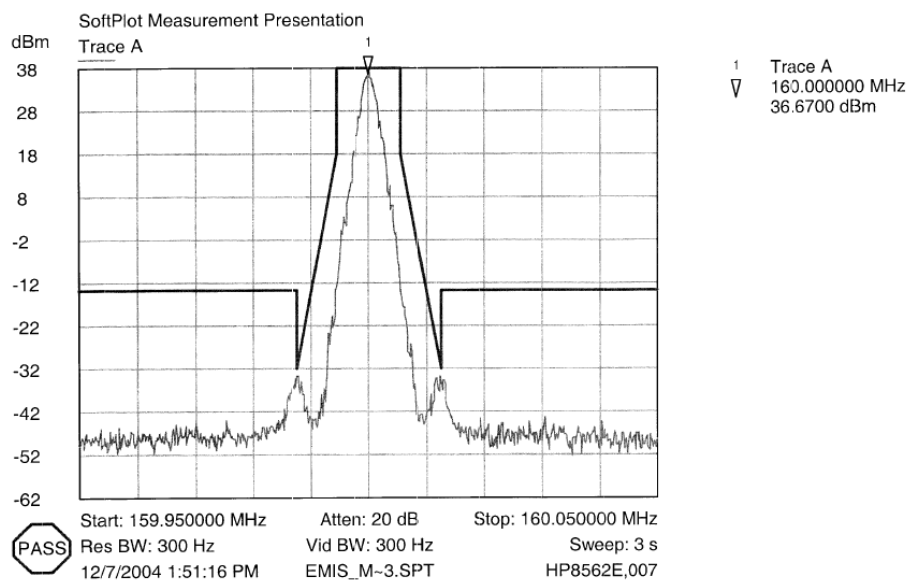

EMISSION MASK D : 9600 4LFSK


12/7/04

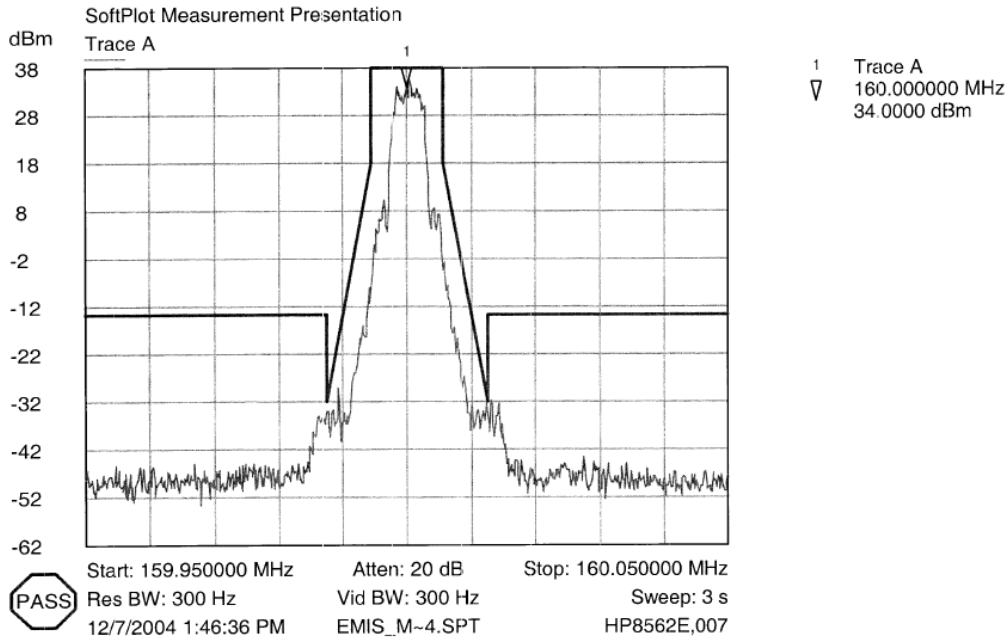

EMISSION MASK : D: 4800 GMSK


12/7/04

For 25kHz Channel Spacing:

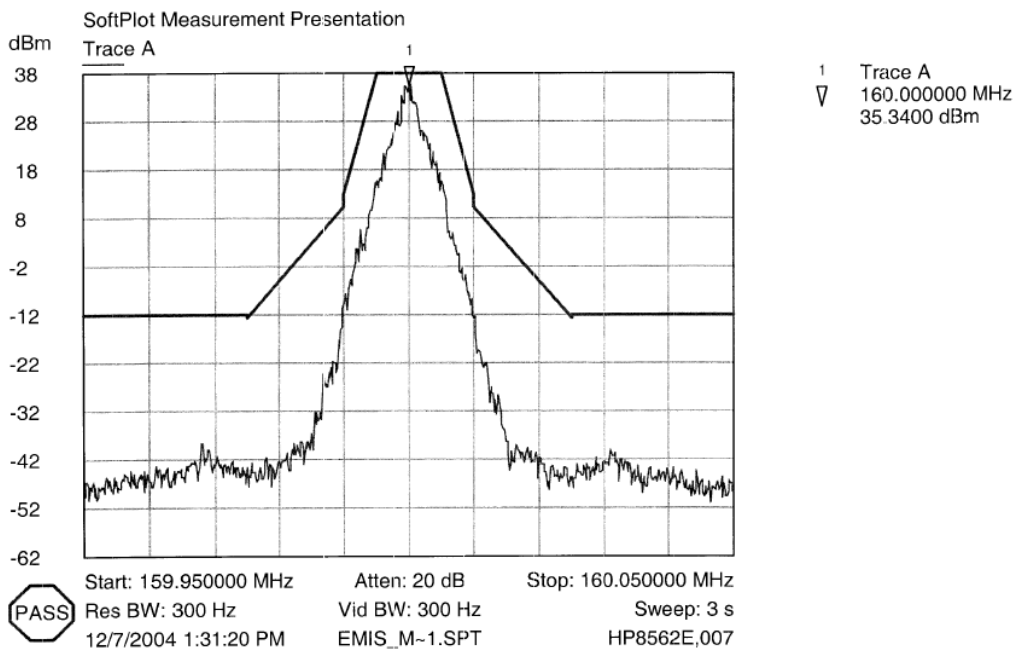

EMISSION MASK : C 19200 4LFSK

12/7/04

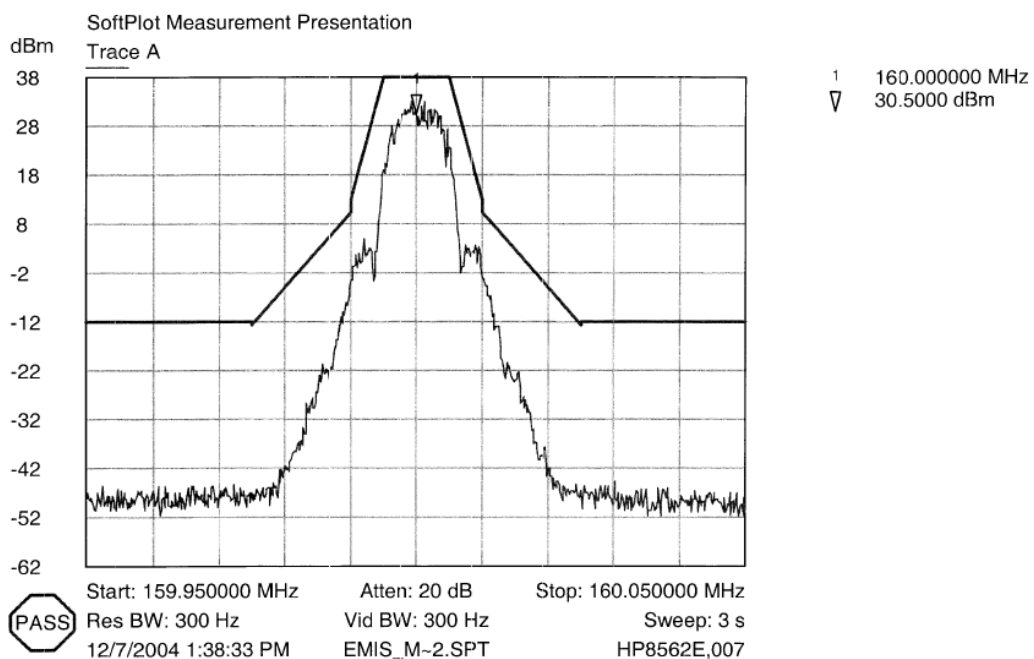

EMISSION MASK C: 9600 GMSK

*JK*  
12/7/04

---

## §2.1049, and § 90.209 – OCCUPIED BANDWIDTH

---

### Applicable Standard

§2.1049, §90.209 and §90.210

#### *6.25kHz bandwidth:*

For any frequency removed from the center of the authorized bandwidth  $f_0$  to 3.0kHz removed from  $f_0$ , 0dB.

On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 3kHz but no more than 4.6kHz, at least  $30 + 16.67 (f_d - 3\text{kHz})$  dB or  $55 + 10 \text{ Log } (P)$  or 65 dB.

On any frequency removed from the center of the authorized bandwidth by more than 4.6kHz at least:  $55 + 10 \text{ Log } (P)$  or 65 dB.

#### *12.5kHz bandwidth:*

For any frequency removed from the center of the authorized bandwidth  $f_0$  to 5.625kHz removed from  $f_0$ , 0dB.

On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 5.626kHz but no more than 12.5kHz, at least  $7.27 (f_d - 2.88\text{kHz})$  dB.

On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 12.5kHz at least:

$50 + 10 \log P$  or 70 dB.

#### *25kHz bandwidth:*

On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 5kHz but not more than 10kHz, at least  $83 \text{ Log } (f_d / 5)$  dB.

On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 10kHz but not more than 250% of the authorized bandwidth, at least  $29 \text{ Log } (f_d^2 / 11)$  dB or 50 dB.

On any frequency removed from the center of the authorized bandwidth by more than 250% of the authorized bandwidth: least  $43 + 10 \text{ Log } (P)$ .

### Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 100 Hz and the spectrum was recorded in the frequency band  $\pm 50 \text{ KHz}$  or  $\pm 25\text{kHz}$  from the carrier frequency.

**Test Equipment**

| Manufacturer | Description                   | Model  | Cal. Due Date |
|--------------|-------------------------------|--------|---------------|
| Agilent      | Spectrum Analyzer             | 8562EC | 2004-12-29    |
| HP           | RF Communications<br>Test Set | 8920A  | 2004-12-29    |
| HP           | Signal Generator              | 8648A  | 2004-12-29    |
| Tek          | Oscilloscope                  | TDS220 | 2004-12-29    |

\* **Statement of Traceability:** BACL attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

**Environmental Conditions**

|                    |              |
|--------------------|--------------|
| Room Temperature:  | 20° C        |
| Relative Humidity: | 50%          |
| Pressure:          | 1 atmosphere |

**Test Results**

Please refer to the hereinafter plots.


Emission Designator:

For 6.25KHz Channel bandwidth: 4K9F1D

For 12.5KHz Channel bandwidth: 9K8F1D

For 25 KHz Channel bandwidth: 19K6F1D


For 6.25 kHz Channel Spacing:

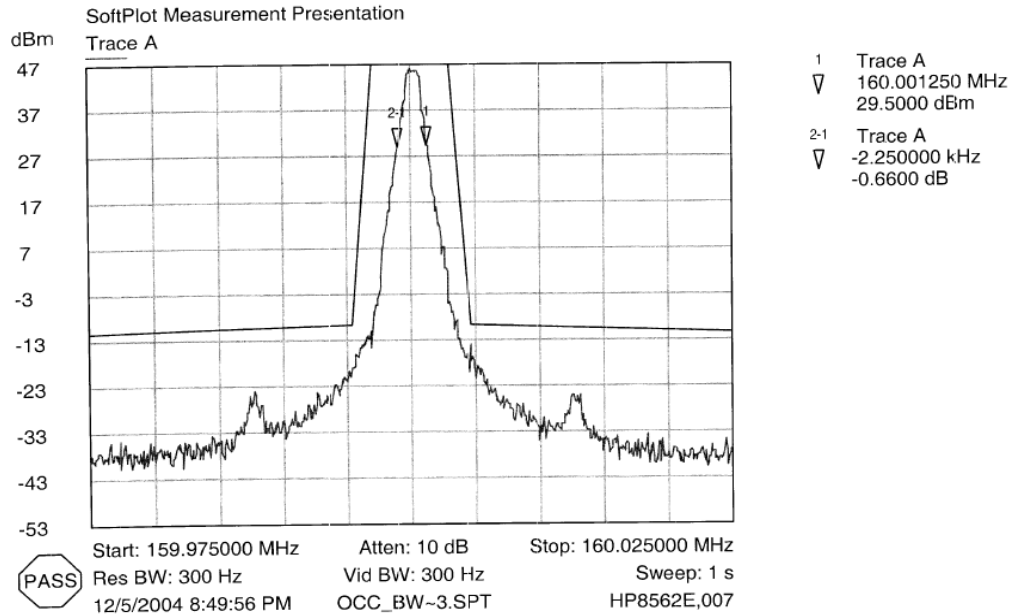

OCCUPIED BANDWIDTH : 6.25 KHz : 4800 4LFSK


dk  
12/5/04

For 12.5 KHz Channel Spacing:

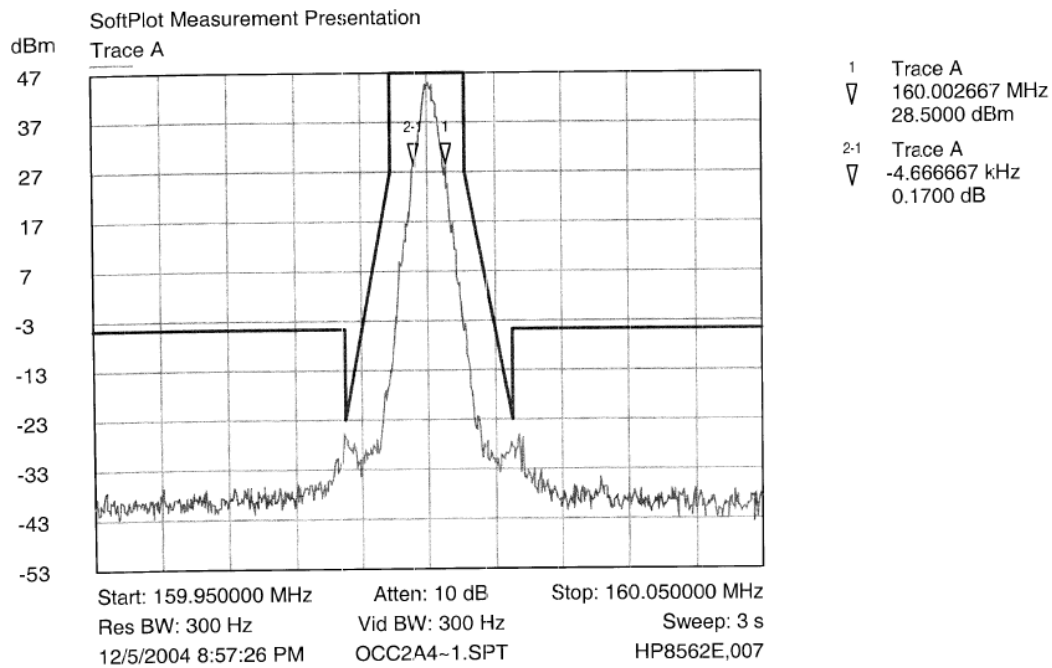

OCCUPIED BANDWIDTH : 12.5 KHz : 9600 4LFSK


dk  
12/5/04

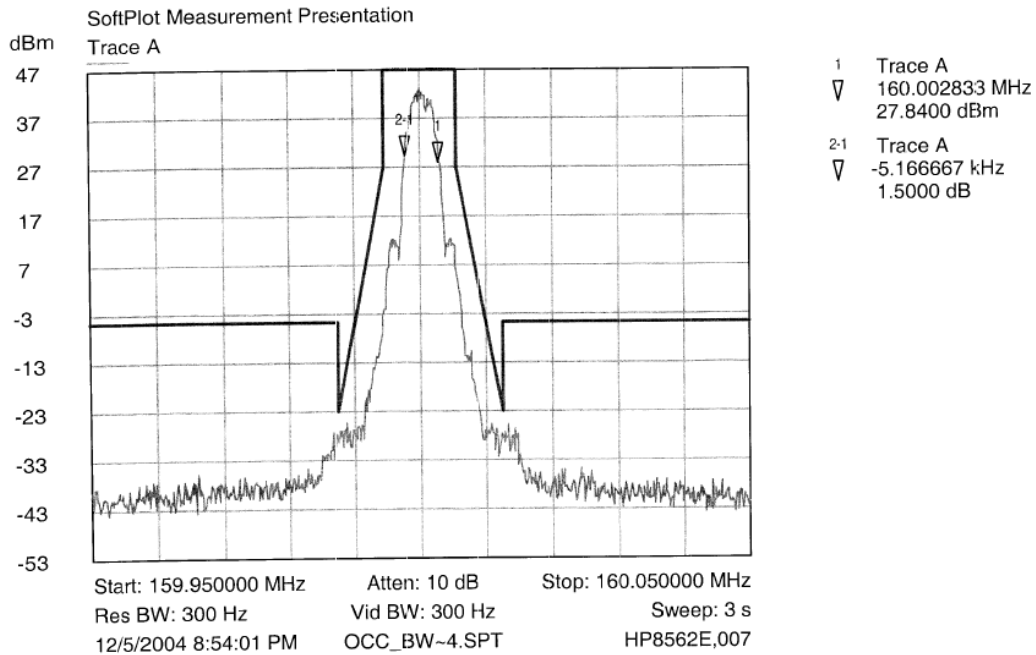

OCCUPIED BANDWIDTH : 12.5 KHz : 4800 GNSK


dk  
12/17/04

For 25 KHz Channel Spacing:

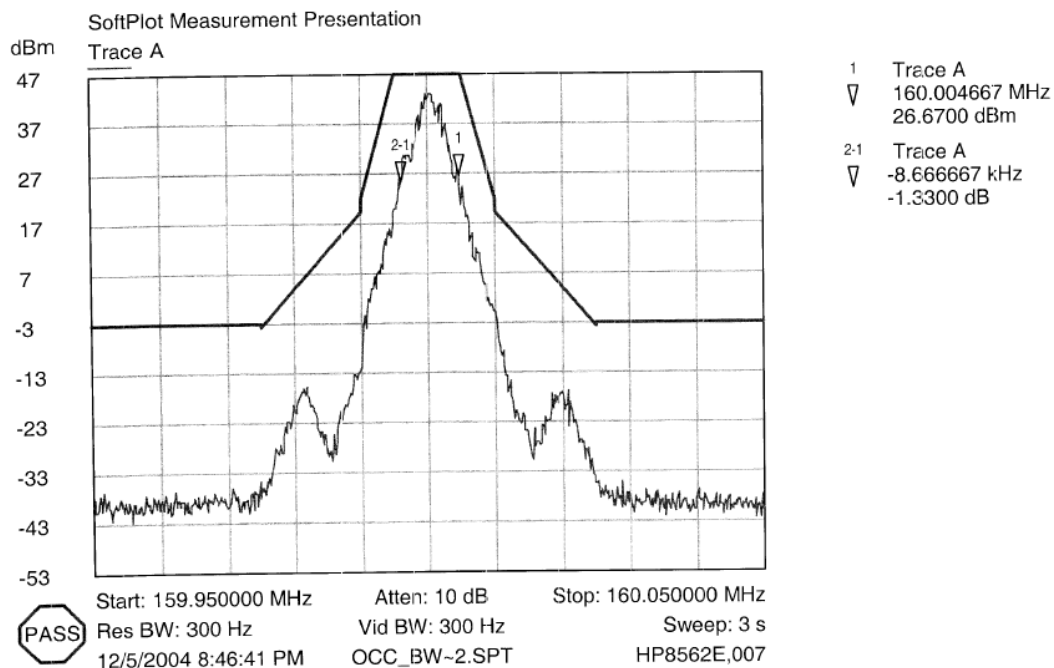

OCCUPIED BANDWIDTH : 25 KHz : 19200 4LFSK

dk  
12/17/04

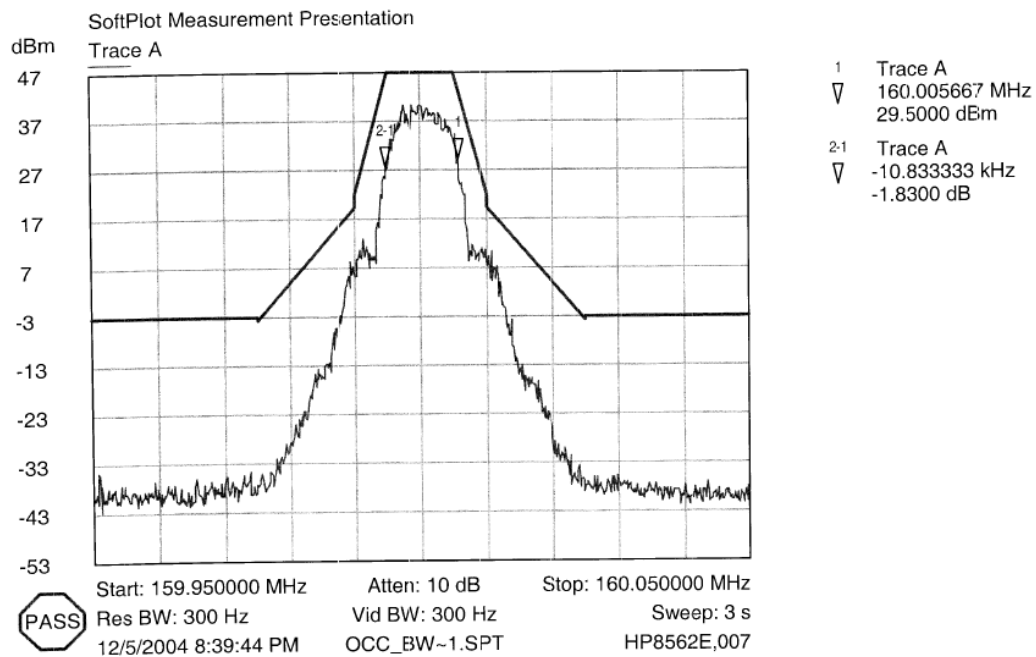

OCCUPIED BANDWIDTH: 25 KHz : 9600 GMSK

*dk*  
12/5/04

**§2.1051 and §90.210 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS****Applicable Standard**

§2.1051 and §90.210 (25kHz bandwidth only)

On any frequency removed from the center of the assigned channel by more than 250 percent at least:

$$43+10\log(P)$$

**Test Procedure**

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz. Sufficient scans were taken to show any out of band emissions up to 10<sup>th</sup> harmonic.

**Test Equipment**

| Manufacturer | Description                | Model  | Cal. Due Date |
|--------------|----------------------------|--------|---------------|
| Agilent      | Spectrum Analyzer          | 8562EC | 2004-12-29    |
| HP           | RF Communications Test Set | 8920A  | 2004-12-29    |
| HP           | Signal Generator           | 8648A  | 2004-12-29    |
| Tek          | Oscilloscope               | TDS220 | 2004-12-29    |


\* **Statement of Traceability:** BACL attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

**Environmental Conditions**

|                    |              |
|--------------------|--------------|
| Room Temperature:  | 20° C        |
| Relative Humidity: | 50%          |
| Pressure:          | 1 atmosphere |

**Test Results**

Please refer to the hereinafter plots.

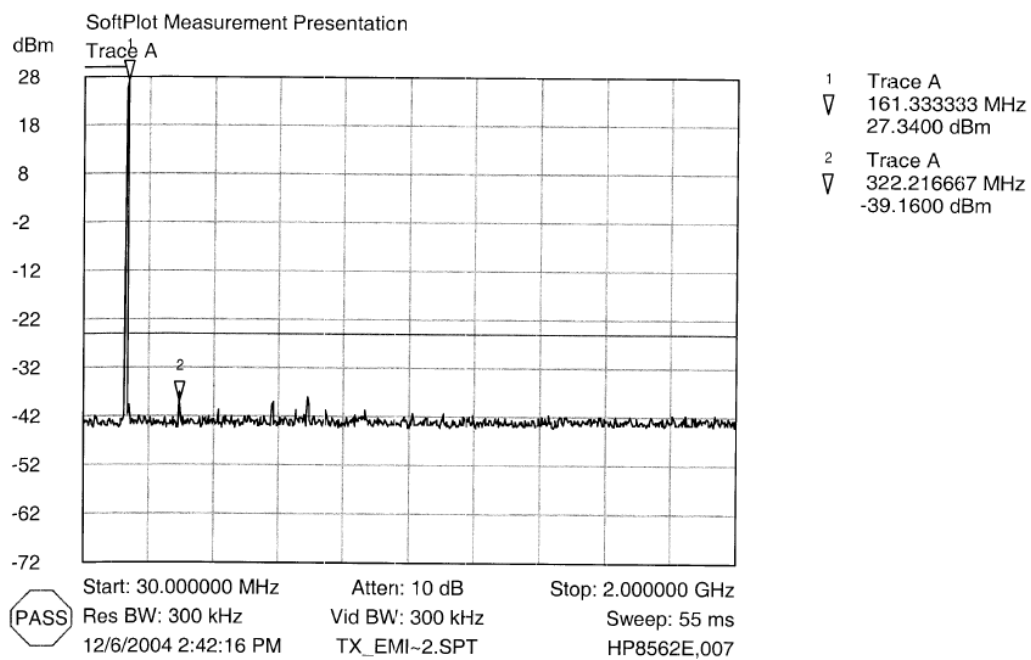

*Tx. Spectrum : Prim*

*dl*  
*12/6/04*

## §2.1053 and §90.210 - RADIATED SPURIOUS EMISSION

### Applicable Standard

§2.1053 and §90.210

### Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB =  $10 \lg (\text{TXpwr in Watts}/0.001)$  – the absolute level

Spurious attenuation limit in dB =  $43 + 10 \log_{10} (\text{power out in Watts})$  for EUT with a 25KHz channel bandwidth.

Spurious attenuation limit in dB =  $50 + 10 \log_{10} (\text{power out in Watts})$  for EUT with a 12.5KHz channel bandwidth.

Spurious attenuation limit in dB =  $55 + 10 \log (\text{power out in Watts})$ , for EUT with a 6.25 kHz channel bandwidth.

### Test Equipment

| Manufacturer | Description          | Model       | Serial Number | Cal. Date  |
|--------------|----------------------|-------------|---------------|------------|
| HP           | Spectrum Analyzer    | 8568B       | 2601A02165    | 2004-07-03 |
| HP           | Amplifier            | 8447E       | 2944A10187    | 2004-09-23 |
| HP           | Quasi-Peak Adapter   | 85650A      | 3019A05393    | 2004-06-13 |
| HP           | Signal Generator     | 8657A       | 2026A00847    | 2004-08-20 |
| EMCO         | Biconical Antenna    | 3110B       | 9309-1165     | 2004-10-11 |
| EMCO         | Log Periodic Antenna | 3146        | 2101          | 2004-10-11 |
| Narda        | Attenuator           | DC-11       | 203350        | N/A        |
| AH System    | Horn Antenna         | SAS-200/511 | 261           | 2004-08-02 |

\* **Statement of Traceability:** BACL attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

## Environmental Conditions

|                    |              |
|--------------------|--------------|
| Room Temperature:  | 20° C        |
| Relative Humidity: | 50%          |
| Pressure:          | 1 atmosphere |

## Test Result

-28.2 dB at 640 MHz, for 25 kHz channel bandwidth  
-14.4 dB at 640 MHz, for 12.5 kHz channel bandwidth  
-15.0 dB at 640 MHz, for 6.25 kHz channel bandwidth

| EUT                                                             |               |                 |                 |              | Generator        |              |              |                   |            |              | Standard     |              |
|-----------------------------------------------------------------|---------------|-----------------|-----------------|--------------|------------------|--------------|--------------|-------------------|------------|--------------|--------------|--------------|
| Indicated                                                       |               | Table           | Test Antenna    |              | Substitution     |              |              | Antenna           | Cable      | Absolute     | FCC          | FCC          |
| Frequency<br>MHz                                                | Ampl.<br>dBuV | Angle<br>Degree | Height<br>Meter | Polar<br>H/V | Frequency<br>MHz | Level<br>dBm | Polar<br>H/V | Gain<br>Corrected | Loss<br>DB | Level<br>dBm | Limit<br>dBm | Margin<br>DB |
| 25 kHz Channel Spacing (Mask C), Frequency 159 MHz (Mid. Ch.)   |               |                 |                 |              |                  |              |              |                   |            |              |              |              |
| 640                                                             | 32.5          | 15              | 2.2             | V            | 640              | -40.9        | V            | 0                 | 0.3        | -41.2        | -13          | -28.2        |
| 640                                                             | 32.3          | 0               | 1.6             | H            | 640              | -41.2        | H            | 0                 | 0.3        | -41.5        | -13          | -28.5        |
| 320                                                             | 40.5          | 0               | 1.5             | V            | 320              | -43.1        | V            | 0                 | 0.2        | -43.3        | -13          | -30.3        |
| 480                                                             | 37.6          | 180             | 1.8             | V            | 480              | -45.3        | V            | 0                 | 0.2        | -45.5        | -13          | -32.5        |
| 320                                                             | 35.3          | 90              | 1.2             | H            | 320              | -48.2        | H            | 0                 | 0.2        | -48.4        | -13          | -35.4        |
| 480                                                             | 32.4          | 0               | 1.2             | H            | 480              | -49.9        | H            | 0                 | 0.2        | -50.1        | -13          | -37.1        |
| 12.5 kHz Channel Spacing (Mask D), Frequency 159 MHz (Mid. Ch.) |               |                 |                 |              |                  |              |              |                   |            |              |              |              |
| 640                                                             | 39.4          | 180             | 1.5             | V            | 640              | -34.1        | V            | 0                 | 0.3        | -34.4        | -20          | -14.4        |
| 640                                                             | 35.6          | 180             | 1.2             | H            | 640              | -38.8        | H            | 0                 | 0.3        | -39.1        | -20          | -19.1        |
| 320                                                             | 43.3          | 90              | 1.5             | V            | 320              | -41.4        | V            | 0                 | 0.2        | -41.6        | -20          | -21.6        |
| 320                                                             | 38.9          | 110             | 1.5             | H            | 320              | -45.2        | H            | 0                 | 0.2        | -45.4        | -20          | -25.4        |
| 480                                                             | 33.6          | 120             | 1.5             | V            | 480              | -49.1        | V            | 0                 | 0.2        | -49.3        | -20          | -29.3        |
| 480                                                             | 33.4          | 270             | 1.2             | H            | 480              | -49.5        | H            | 0                 | 0.2        | -49.7        | -20          | -29.7        |
| 6.25 kHz Channel Spacing (Mask E), Frequency 159 MHz (Mid. Ch.) |               |                 |                 |              |                  |              |              |                   |            |              |              |              |
| 640                                                             | 33.5          | 0               | 1.6             | H            | 640              | -39.7        | H            | 0                 | 0.3        | -40          | -25          | -15.0        |
| 640                                                             | 33.2          | 0               | 1.2             | V            | 640              | -40.1        | V            | 0                 | 0.3        | -40.4        | -25          | -15.4        |
| 320                                                             | 43.6          | 0               | 1.8             | H            | 320              | -42.3        | H            | 0                 | 0.2        | -42.5        | -25          | -17.5        |
| 320                                                             | 37.2          | 15              | 1.2             | V            | 320              | -46.2        | V            | 0                 | 0.2        | -46.4        | -25          | -21.4        |
| 480                                                             | 33.9          | 0               | 1.8             | V            | 480              | -48.8        | V            | 0                 | 0.2        | -49          | -25          | -24.0        |
| 480                                                             | 31.3          | 15              | 2.2             | H            | 480              | -50.2        | H            | 0                 | 0.2        | -50.4        | -25          | -25.4        |

Note:

- 1) No preamplifier used.
- 2) Test in three orthogonal plane.
- 3) Normal condition

## §2.1055 (d) and §90.213- FREQUENCY STABILITY

### Applicable Standard

§2.1055 (d)

§90.213

For output power > 2 watts, the limit is 1.0 ppm for 6.25 kHz channel bandwidth.

### Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to a frequency counter via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the counter.

Frequency Stability vs. Voltage: An external variable DC power supply was connected to the equipment under test. The voltage was set to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the end point. The output frequency was recorded for each voltage.

### Test Equipment

| Manufacturer | Description                   | Model        | Cal. Due Date |
|--------------|-------------------------------|--------------|---------------|
| Agilent      | Spectrum Analyzer             | 8562EC       | 2004-12-29    |
| HP           | RF Communications<br>Test Set | 8920A        | 2004-12-29    |
| HP           | Signal Generator              | 8648A        | 2004-12-29    |
| Tek          | Oscilloscope                  | TDS220       | 2004-12-29    |
| Tenney       | Temperature<br>Chamber        | CL85 chamber | N/A           |

\* **Statement of Traceability:** BACL attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

### Environmental Conditions

|                    |                 |
|--------------------|-----------------|
| Room Temperature:  | -30° C to 60° C |
| Relative Humidity: | 50%             |
| Pressure:          | 1 atmosphere    |

**Test Results****Test Voltage:**12.5V**Elapsed Time:** 1 min.

| Temperature<br>Deg. C | Tx freq error_Fc<br>Hz |
|-----------------------|------------------------|
| -30                   | -8                     |
| -20                   | -18                    |
| -10                   | -14                    |
| 0                     | -10                    |
| 10                    | -13                    |
| 20                    | -12                    |
| 30                    | -28                    |
| 40                    | -75                    |
| 50                    | -90                    |
| 60                    | -66                    |

**Room Temperature**

| Voltage<br>V | Tx freq error_Fc<br>Hz |
|--------------|------------------------|
| 9            | -6                     |
| 16           | -3                     |

---

**§90.214 - TRANSIENT FREQUENCY BEHAVIOR**

---

**Standard Applicable**

§90.214

**Test Method**

TIA/EIA-603 2.2.19

**Test Equipment**

| Manufacturer | Description                   | Model  | Cal. Due Date |
|--------------|-------------------------------|--------|---------------|
| Aglient      | Spectrum Analyzer             | 8562EC | 2004-12-29    |
| HP           | RF Communications<br>Test Set | 8920A  | 2004-12-29    |
| HP           | Signal Generator              | 8648A  | 2004-12-29    |
| Tek          | Oscilloscope                  | TDS220 | 2004-12-29    |


\* **Statement of Traceability:** BACL attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

**Environmental Conditions**

|                    |              |
|--------------------|--------------|
| Room Temperature:  | 20° C        |
| Relative Humidity: | 50%          |
| Pressure:          | 1 atmosphere |


**Test Result**

Please refer to the plot hereinafter.

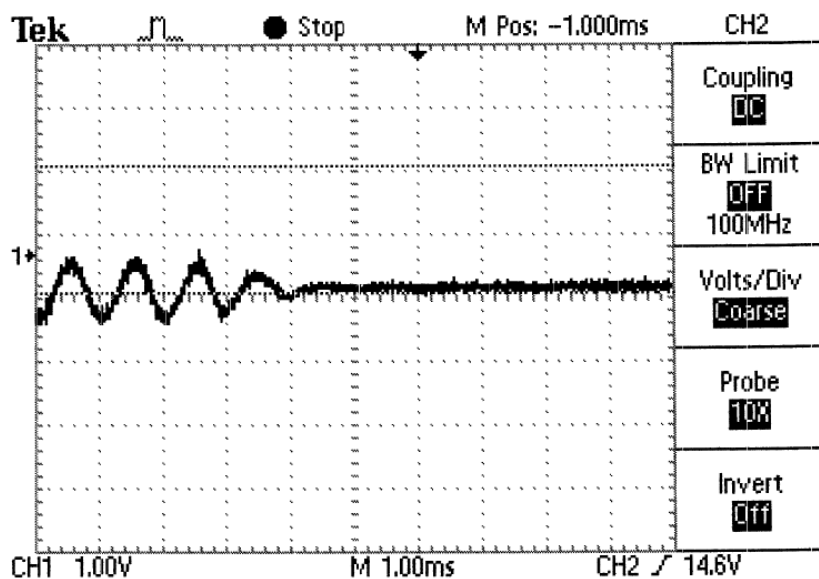


6.25 KHz  
480 4LFSK

Ton

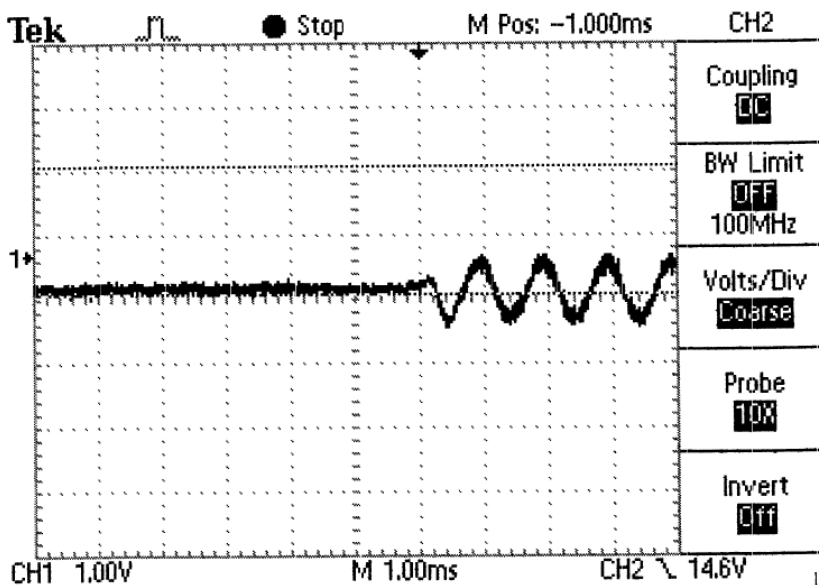


6.25 KHz  
480 4LFSK


Toff

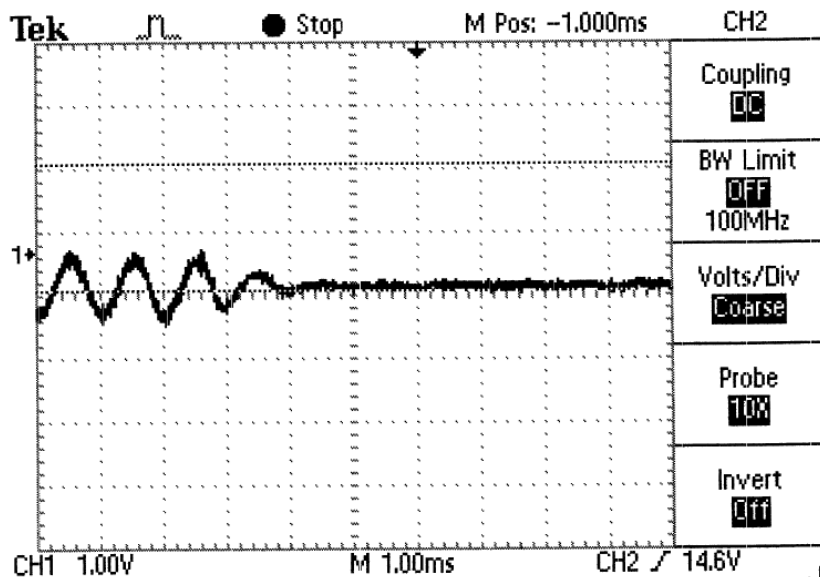

12.5KHz  
96n 4LF9K  $T_{ON}$

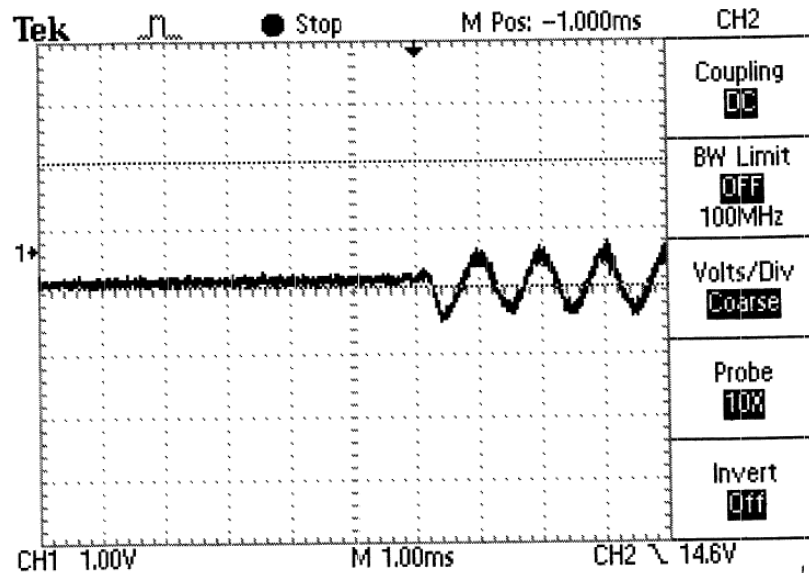


12.5 KHz  
96n 4LF8K  $T_{OFF}$

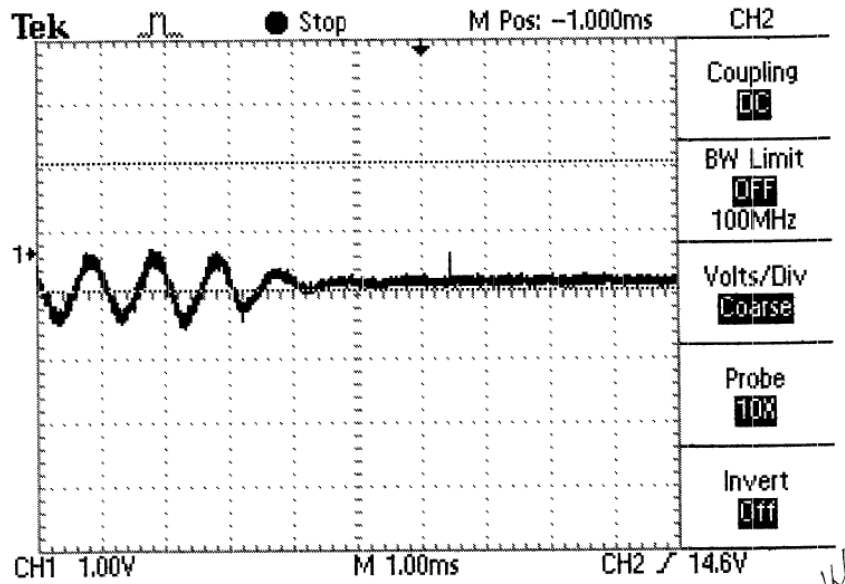

25 KHz ; 9600 GMSK

Turn-on Transient

12/07/04

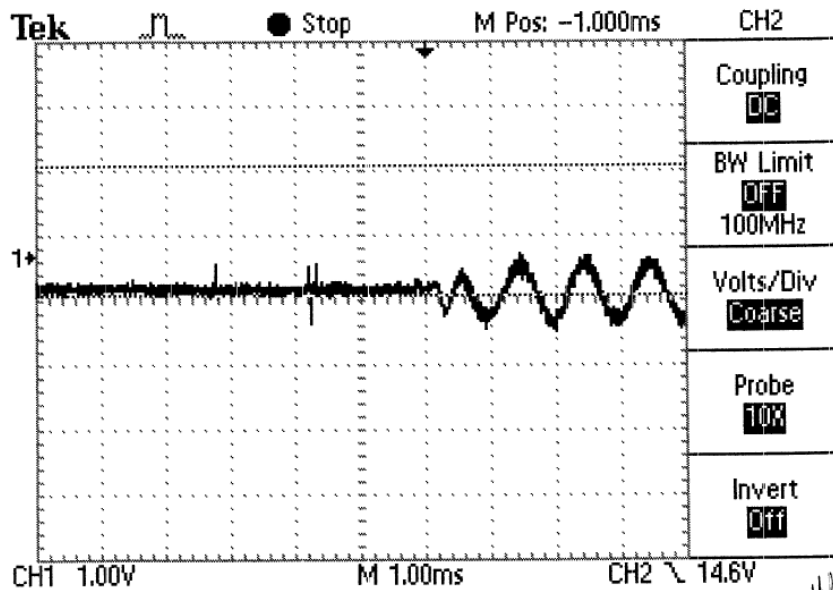

25 KHz ; 9600 GMSK

Turn-off Transient

12/07/04