

D3 functions

- Microprocessor-supported controls
- Direction and distance display up to 40m
- Search strip width up to 30m
- Several avalanche victims are shown with RED LED
- Conform with the EN standard 300 718
- Frequency: 457 kHz
- Power supply: 2 batteries AA 1,5V alkaline Lr6
- Weight: 230g

1 Search direction arrow

2 Socket for ear plug

3 Loudspeaker

4 Battery compartment

5 Transmitting position

6 Locking switch

7 Transmitting control light


8 Bayonet switch (forced ON/ OFF)

9 Search position


10 Digital display (distance indication)

11 Switch transmitting/ receiving

12 Red LED (indication for multiple burial scenario)

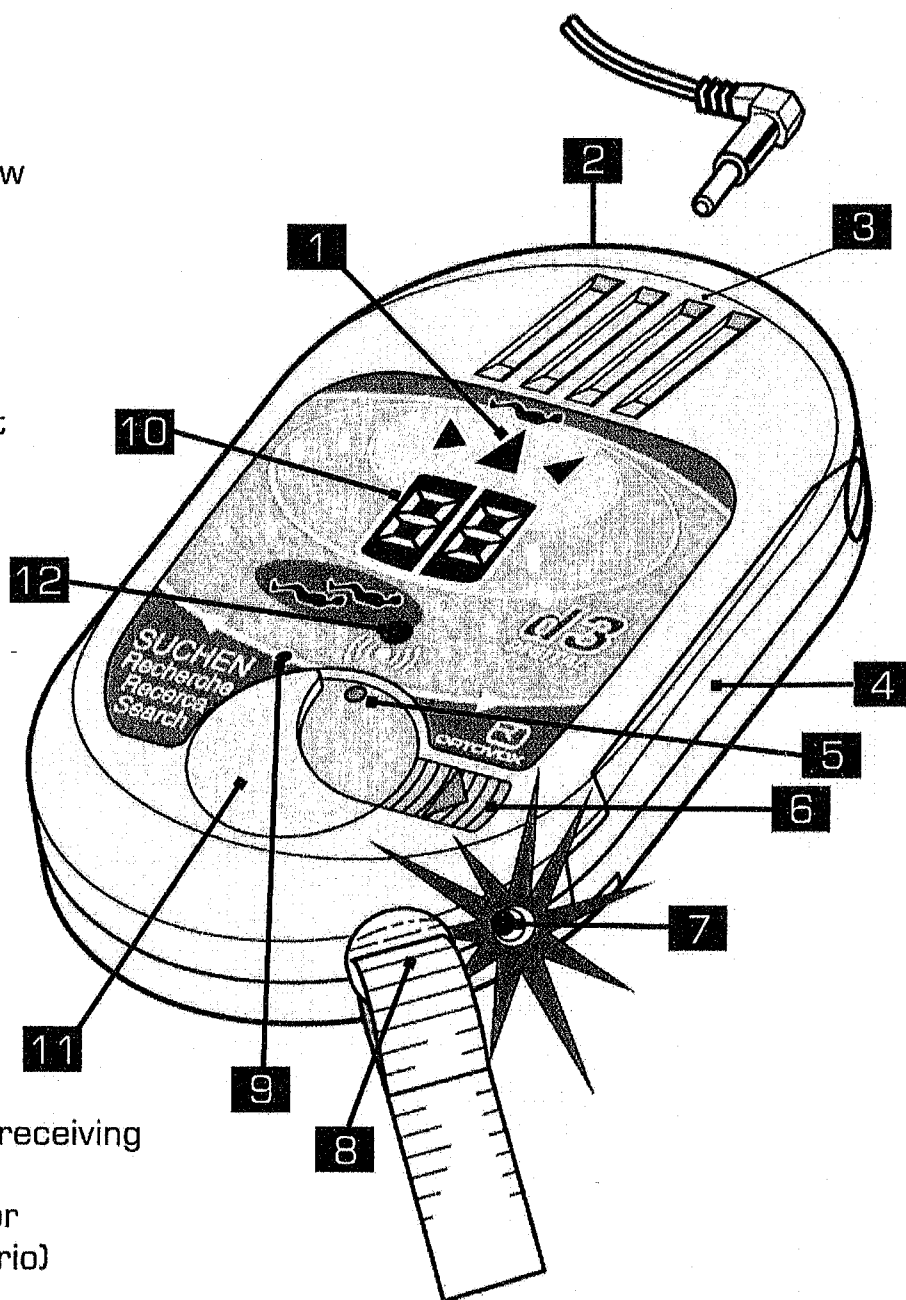

At a distance of less than 2m:
Pin point search with
digital distance indication only!

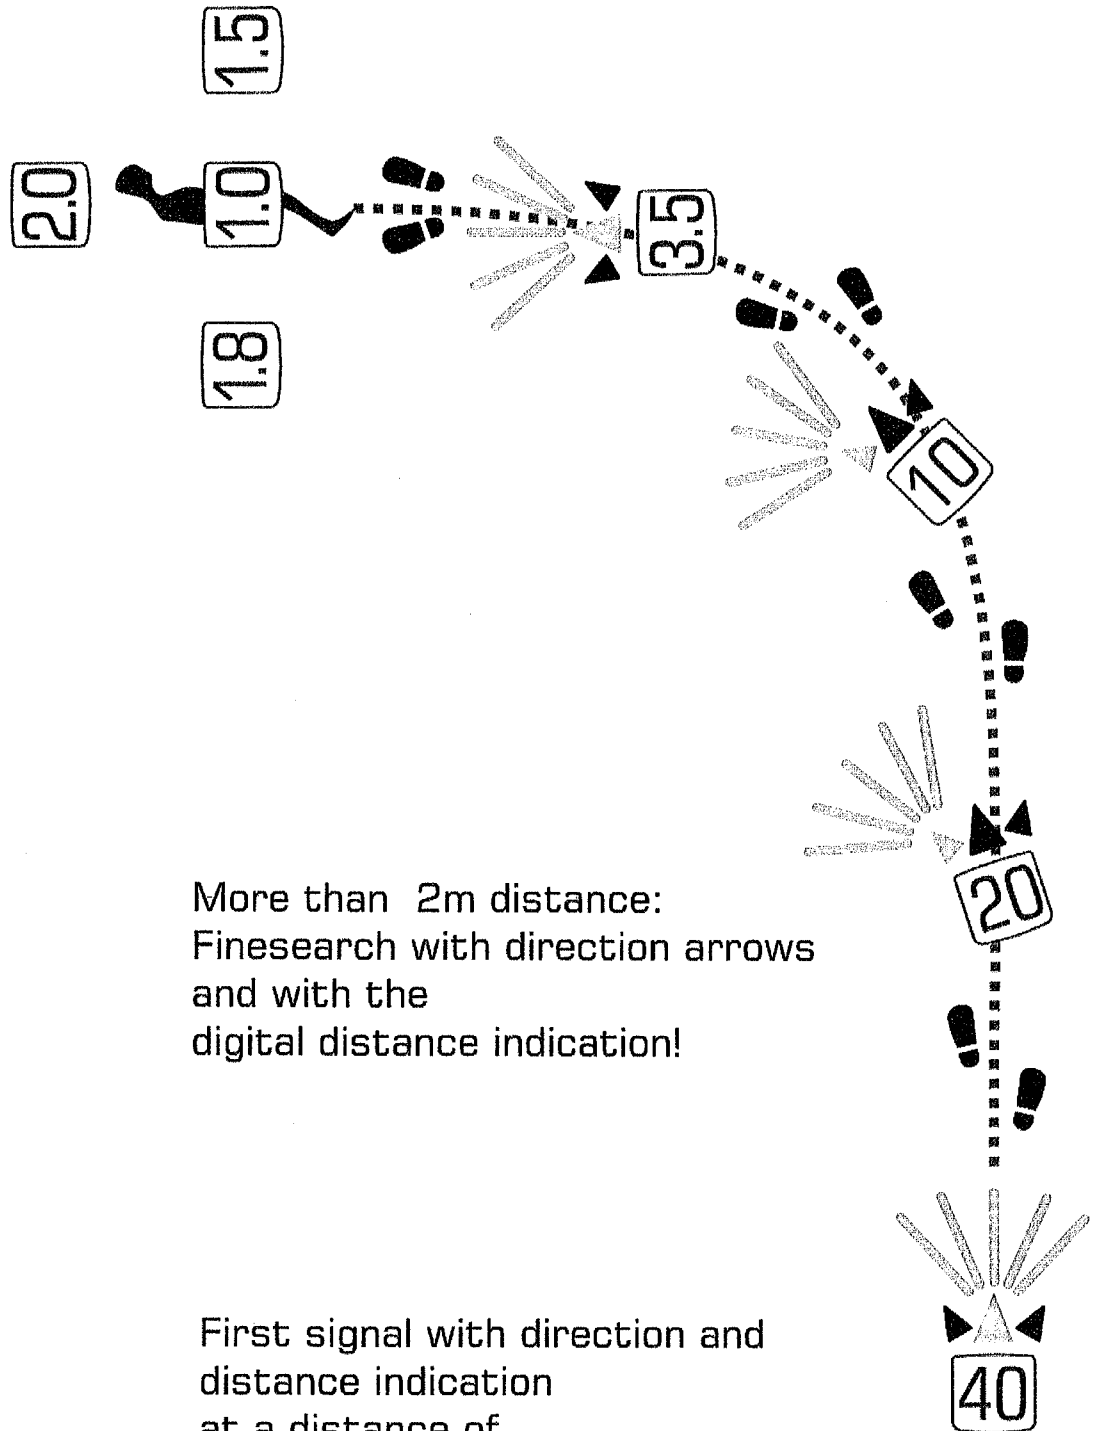

More than 2m distance:
Finer search with direction arrows
and with the
digital distance indication!

First signal with direction and
distance indication
at a distance of
40m!

START



FCC Compliance Information:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.

Caution: Changes or modifications not expressly approved by Ortovox could void the user's authority to operate the equipment