

# **FCC CERTIFICATION TEST REPORT**

for

TRW Automotive Electronics  
Stratford Road  
Solihull  
England B90 4GW

**FCC ID: KHH20TN-1**

February 14, 2000

**WLL PROJECT #: 5576X**

*This report may not be reproduced, except in full, without the prior written consent of Washington Laboratories, Ltd.*

# TABLE OF CONTENTS

## Statement of Qualifications

---

|            |                                                        |          |
|------------|--------------------------------------------------------|----------|
| <b>1.0</b> | <b>INTRODUCTION.....</b>                               | <b>2</b> |
| 1.1        | SUMMARY.....                                           | 2        |
| <b>2.0</b> | <b>DESCRIPTION OF EQUIPMENT UNDER TEST (EUT) .....</b> | <b>2</b> |
| 2.1        | ON-BOARD OSCILLATORS .....                             | 2        |
| <b>3.0</b> | <b>TEST CONFIGURATION .....</b>                        | <b>3</b> |
| 3.1        | TESTING ALGORITHM.....                                 | 3        |
| 3.2        | CONDUCTED EMISSIONS TESTING .....                      | 3        |
| 3.3        | RADIATED EMISSIONS TESTING.....                        | 3        |
| 3.3.1      | Radiated Data Reduction and Reporting .....            | 4        |
|            | FCC 15.231 3M Radiated Emissions Data – Site 2 .....   | 5        |

## TABLES

|                 |                                   |
|-----------------|-----------------------------------|
| <b>Table 1.</b> | <b>Radiated Emissions Results</b> |
| <b>Table 2.</b> | <b>System Under Test</b>          |
| <b>Table 3.</b> | <b>Interface Cables Used</b>      |
| <b>Table 4.</b> | <b>Measurement Equipment Used</b> |

## EXHIBITS

|                   |                                |
|-------------------|--------------------------------|
| <b>Exhibit 1.</b> | <b>Duty Cycle Calculations</b> |
| <b>Exhibit 2.</b> | <b>Carrier Bandwidth Data</b>  |

## APPENDICES

|                    |                                             |
|--------------------|---------------------------------------------|
| <b>Appendix A.</b> | <b>Statement of Measurement Uncertainty</b> |
|--------------------|---------------------------------------------|



## WASHINGTON LABORATORIES, LTD.

7560 Lindbergh Drive • Gaithersburg, Maryland 20879 • (301) 417-0220 • Fax (301) 417-9069 • (800) 839-1649  
website: <http://www.wll.com> • e-mail: [info@wll.com](mailto:info@wll.com)

### STATEMENT OF QUALIFICATIONS

for

Herbert W. Meadows

Washington Laboratories, Ltd.

I hold a Bachelor of Science in Electronics Engineering Technology. I have over three years of EMI testing experience and nine years of RF and microwave testing experience. I am qualified to perform EMC testing to the methods described in this test report. The measurements taken within this report are accurate within my ability to perform the tests and within the tolerance of the measuring instrumentation.

By:

Herbert W. Meadows  
Compliance Engineer

Date: February 14, 2000

NVLAP FC CE U S

# **FCC CERTIFICATION TEST REPORT**

for

**FCC ID: KHH20TN-1**

## **1.0 Introduction**

This report has been prepared on behalf of TRW Automotive Electronics to support the attached Application for Equipment Authorization. The test and application are submitted for a Periodic Intentional Radiator under Part 15.231 of the FCC Rules and Regulations. The Equipment Under Test was TRW Automotive Electronics 20TN-1 Radio Key Low Power Transmitter.

All measurements herein were performed according to the 1992 version of ANSI C63.4. The measurement equipment conforms to ANSI C63.2 Specifications for Electromagnetic Noise and field Strength Instrumentation. Calibration checks are made periodically to verify proper performance of the measuring instrumentation.

All measurements are performed at Washington Laboratories, Ltd. test center in Gaithersburg, MD. Site description and site attenuation data have been placed on file with the FCC's Sampling and Measurements Branch at the FCC laboratory in Columbia, MD. Washington Laboratories, Ltd. has been accepted by the FCC and approved by NIST NVLAP (NVLAP Lab Code: 200066-0) as an independent FCC test laboratory.

All results reported herein relate only to the equipment tested. The measurement uncertainty of the data contained herein is  $\pm 2.3$  dB. Refer to Appendix A for Statement of Measurement Uncertainty. This report shall not be used to claim product endorsement by NVLAP or any agency of the US Government.

### **1.1 Summary**

The TRW Automotive Electronics 20TN-1 Radio Key complies with the limits for a Periodic Intentional Radiator under Part 15.231 of the FCC Rules and Regulations.

## **2.0 Description of Equipment Under Test (EUT)**

The TRW Automotive Electronics Radio Key Transmitter is a 315 MHz low power transmitter mounted in the head of a key that is used as a wireless remote control for vehicle keyless entry systems. The battery powered transmitter is manually operated and used with certified receivers. The unit stops transmitting as soon as the button is released.

### **2.1 On-board Oscillators**

The TRW Automotive Electronics 20TN-1 Radio Key contains a 315 MHz SAW oscillator.

### **3.0 Test Configuration**

To complete the test configuration required by the FCC, the unit was tested in all three orthogonal planes.

#### **3.1 Testing Algorithm**

The transmitter was turned on and constantly transmitting at 315MHz. The unit was tested in all three orthogonal planes.

Worst case emissions are recorded in the data tables.

#### **3.2 Conducted Emissions Testing**

Conducted emissions testing was not performed as the unit is battery powered.

#### **3.3 Radiated Emissions Testing**

The EUT was placed on an 80 cm high 1 x 1.5 meters non-conductive motorized turntable for radiated testing on a 3 meter open field test site. The emissions from the EUT were measured continuously at every azimuth by rotating the turntable. Biconical and log periodic broadband antennas were mounted on an antenna mast to determine the height of maximum emissions. The height of the antenna was varied between 1 and 4 meters. The peripherals were placed on the table in accordance with ANSI C63.4-1992. Cables were varied in position to produce maximum emissions. Both the horizontal and vertical field components were measured.

The output from the antenna was connected, via a preamplifier, to the input of the spectrum analyzer. The detector function was set to quasi-peak or peak, as appropriate. The measurement bandwidth on the spectrum analyzer system was set to at least 120 kHz, with all post-detector filtering no less than 10 times the measurement bandwidth.

### 3.3.1 Radiated Data Reduction and Reporting

To convert the raw spectrum analyzer radiated data into a form that can be compared with the FCC limits, it is necessary to account for various calibration factors that are supplied with the antennas and other measurement accessories. These factors are grouped into a composite antenna factor (AFc) and are supplied in the AFc column of Table 1. The AFc in dB/m and AFd (duty cycle factor) in dBμV (see Exhibit 1) are algebraically added to the Spectrum Analyzer Voltage in dBμV to obtain the Radiated Electric Field in dBμV/m. This level is then compared with the limit.

Example:

|                              |                                                            |
|------------------------------|------------------------------------------------------------|
| Spectrum Analyzer Voltage:   | VdBμV                                                      |
| Composite Antenna Factor:    | AFcdB/m                                                    |
| Duty Cycle Factor:           | AFddBμV                                                    |
| Electric Field:              | $E_{dB\mu V/m} = V_{dB\mu V} + AF_{cdB/m} + AF_{ddB\mu V}$ |
| To convert to linear units:  | $E_{\mu V/m} = \text{antilog}(E_{dB\mu V/m}/20)$           |
| Data is recorded in Table 1. |                                                            |

**Table 1****FCC 15.231 3M Radiated Emissions Data – Site 2**

CLIENT: TRW Automotive Electronics  
 FCC ID: KHH20TN-1  
 DATE: 12/6/99  
 BY: Herb Meadows  
 JOB #: 5576X

| Frequency | Polarity | Azimuth | Antenna Height | SA Level (PEAK) | AFc   | Afd  | E-Field | E-Field | Limit  | Margin |
|-----------|----------|---------|----------------|-----------------|-------|------|---------|---------|--------|--------|
| MHz       | H/V      | Degree  | m              | dBuV            | dB/m  | dB   | dBuV/m  | uV/m    | uV/m   | dB     |
| 314.95    | H        | 157.50  | 1.0            | 50.2            | 16.5  | -5.1 | 61.6    | 1202.3  | 6041.7 | -14.0  |
| 314.95    | V        | 22.50   | 1.0            | 41.9            | 16.5  | -5.1 | 53.3    | 462.4   | 6041.7 | -22.3  |
| 629.92    | H        | 67.50   | 1.0            | 19.3            | 24.1  | -5.1 | 38.3    | 82.2    | 604.2  | -17.3  |
| 629.92    | V        | 180.00  | 1.0            | 21.1            | 24.1  | -5.1 | 40.1    | 101.2   | 604.2  | -15.5  |
| 944.88    | V        | 135.00  | 1.0            | 6.5             | 28.8  | -5.1 | 30.2    | 32.4    | 604.2  | -25.4  |
| 944.88    | H        | 225.00  | 1.0            | 9.6             | 28.8  | -5.1 | 33.3    | 46.2    | 604.2  | -22.3  |
| 1260.00   | H        | 90.00   | 1.0            | 61.6            | -10.6 | -5.1 | 45.9    | 197.4   | 604.0  | -9.7   |
| 1260.00   | V        | 315.00  | 1.0            | 55.2            | -10.6 | -5.1 | 39.5    | 94.5    | 604.0  | -16.1  |
| 1574.70   | H        | 180.00  | 1.0            | 61.2            | -8.5  | -5.1 | 47.6    | 240.9   | 500.0  | -6.3   |
| 1574.70   | V        | 0.00    | 1.0            | 60.1            | -8.5  | -5.1 | 46.5    | 212.3   | 500.0  | -7.4   |
| 1889.80   | H        | 0.00    | 1.0            | 50.2            | -6.7  | -5.1 | 38.4    | 83.0    | 604.0  | -17.2  |
| 1889.80   | V        | 270.00  | 1.0            | 51.5            | -6.7  | -5.1 | 39.7    | 96.4    | 604.0  | -15.9  |
| 2204.70   | H        | 270.00  | 1.0            | 51.8            | -5.7  | -5.1 | 41.0    | 111.6   | 500.0  | -13.0  |
| 2204.70   | V        | 315.00  | 1.0            | 51.9            | -5.7  | -5.1 | 41.1    | 112.9   | 500.0  | -12.9  |
| 2519.50   | H        | 315.00  | 1.0            | 50.5            | -5.2  | -5.1 | 40.2    | 102.4   | 604.0  | -15.4  |
| 2519.50   | V        | 180.00  | 1.0            | 51.7            | -5.2  | -5.1 | 41.4    | 117.5   | 604.0  | -14.2  |

**Peak Measurements Above 1 GHz:**

| Frequency | Polarity | Azimuth | Antenna Height | SA Level (PEAK) | AFc   | E-Field | E-Field | Limit  | Margin |
|-----------|----------|---------|----------------|-----------------|-------|---------|---------|--------|--------|
| MHz       | H/V      | Degree  | m              | dBuV            | dB/m  | dBuV/m  | uV/m    | uV/m   | dB     |
| 1260.00   | H        | 90.00   | 1.0            | 61.6            | -10.6 | 51.0    | 355.1   | 6040.0 | -24.6  |
| 1260.00   | V        | 315.00  | 1.0            | 55.2            | -10.6 | 44.6    | 170.0   | 6040.0 | -31.0  |
| 1574.70   | H        | 180.00  | 1.0            | 61.2            | -8.5  | 52.7    | 433.4   | 5000.0 | -21.2  |
| 1574.70   | V        | 0.00    | 1.0            | 60.1            | -8.5  | 51.6    | 381.9   | 5000.0 | -22.3  |
| 1889.80   | H        | 0.00    | 1.0            | 50.2            | -6.7  | 43.5    | 149.3   | 6040.0 | -32.1  |
| 1889.80   | V        | 270.00  | 1.0            | 51.5            | -6.7  | 44.8    | 173.4   | 6040.0 | -30.8  |
| 2204.70   | H        | 270.00  | 1.0            | 51.8            | -5.7  | 46.1    | 200.7   | 5000.0 | -27.9  |
| 2204.70   | V        | 315.00  | 1.0            | 51.9            | -5.7  | 46.2    | 203.0   | 5000.0 | -27.8  |
| 2519.50   | H        | 315.00  | 1.0            | 50.5            | -5.2  | 45.3    | 184.1   | 6040.0 | -30.3  |
| 2519.50   | V        | 180.00  | 1.0            | 51.7            | -5.2  | 46.5    | 211.4   | 6040.0 | -29.1  |

## Table 2

### System Under Test

FCC ID: KHH20TN-1

---

EUT: TRW Automotive Electronics Radio Key 315MHz RF Transmitter; M/N: 20TN-1  
FCC ID: KHH20TN-1

## Table 3

### Interface Cables Used

The EUT was powered via 3 VDC battery.

---

## Table 4

### Measurement Equipment Used

The following equipment is used to perform measurements:

Hewlett-Packard Spectrum Analyzer: HP8564E  
Hewlett-Packard Spectrum Analyzer: HP8568B  
Hewlett-Packard Spectrum Analyzer: HP8593A  
Hewlett-Packard Quasi-Peak Adapter: HP85650A  
Hewlett-Packard Preselector: HP85685A  
Hewlett-Packard Preamplifier: HP8449B  
Antenna Research Associates, Inc. Biconical Log Periodic Antenna: LPB-2520A (Site 2)  
Antenna Research Associates, Inc. Horn Antenna: DRG-118/A  
Solar 50  $\Omega$ /50  $\mu$ H Line Impedance Stabilization Network: 8012-50-R-24-BNC  
Solar 50  $\Omega$ /50  $\mu$ H Line Impedance Stabilization Network: 8028-50-TS-24-BNC  
AH Systems, Inc. Portable Antenna Mast: AMS-4 (Site 2)  
AH Systems, Inc. Motorized Turntable (Site 2)  
RG-214 semi-rigid coaxial cable  
RG-223 double-shielded coaxial cable

## **EXHIBIT 1**

### **DUTY CYCLE CALCULATIONS**

The following page shows a spectrum analyzer plot of the transmitter coding. The following calculations show the worst case 100 ms duty cycle correction used for calculating the average level of the carrier, harmonics, and emissions.


After the initial 6.5 ms pulse, the wide "on" pulse has a pulse width of 1.95 ms and the narrow "on" pulse has a pulse width of 1.0 ms.

**ON TIME PER 100 ms:**

$$(3 \times 6.3 \text{ ms}) + (2 \times 1.9 \text{ ms}) + (33 \times 1.0 \text{ ms}) = 55.7 \text{ ms ON TIME PER 100 ms}$$

$$= 55.7\% \text{ DUTY CYCLE}$$

$$= -5.1 \text{ dB}$$

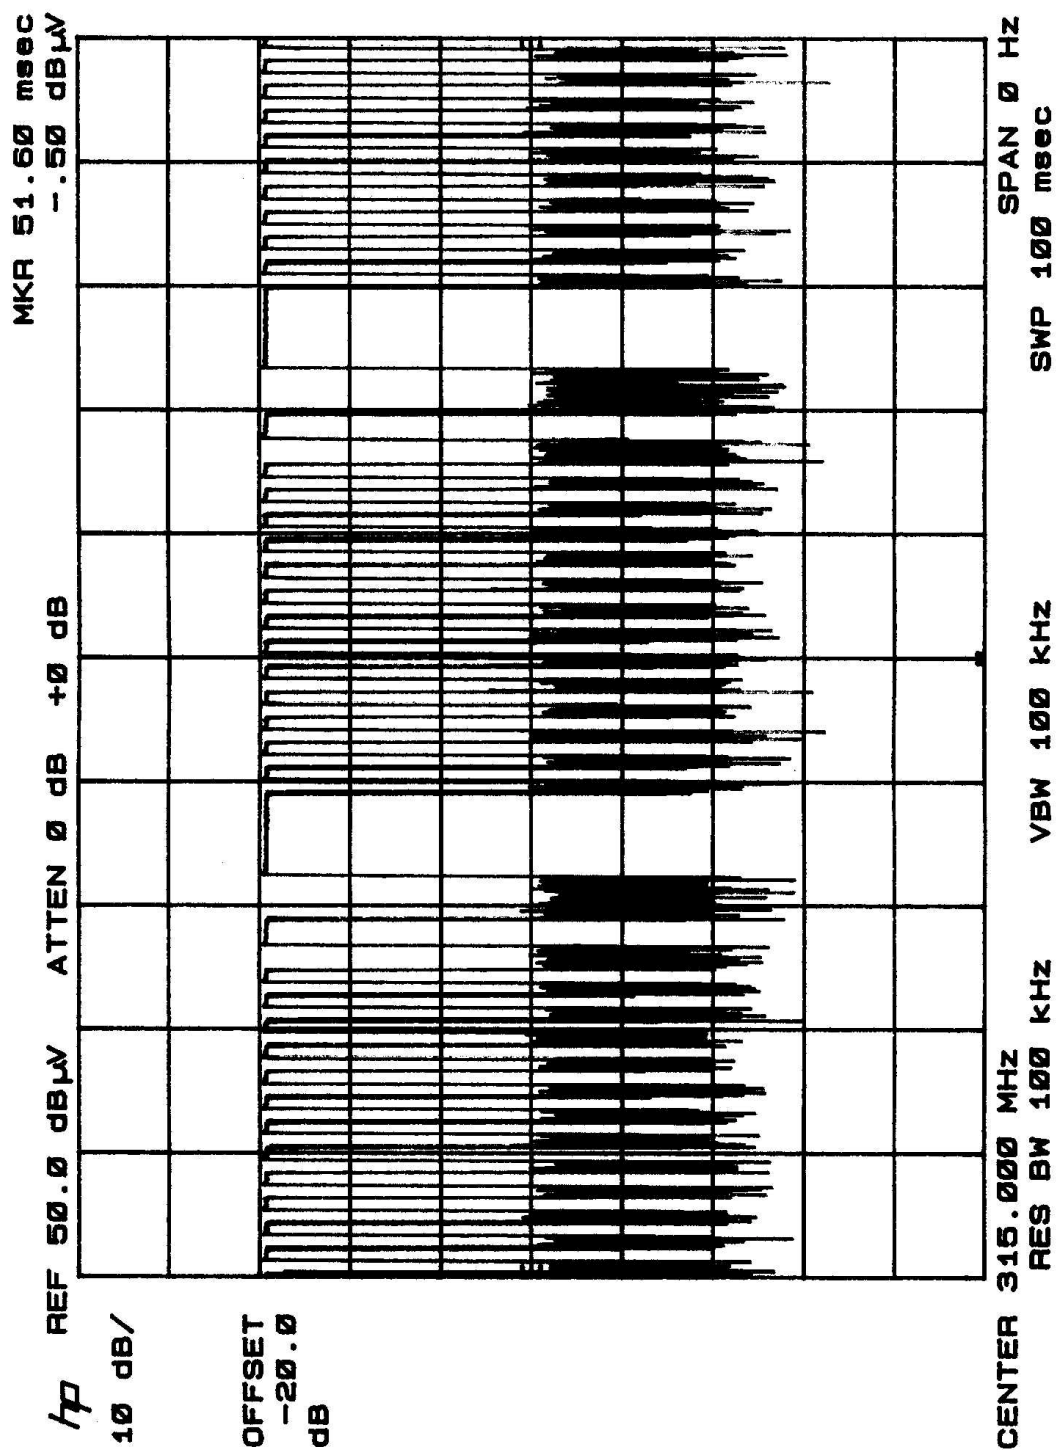

## **EXHIBIT 2**


### **CARRIER BANDWIDTH DATA**

**The 20 dB modulated bandwidth shall be no wider than 0.25% of the center frequency.**

**Bandwidth Limit = Carrier Frequency x .0025**

**Bandwidth Limit = 315 MHz x .0025 = 787.5 kHz**

**Measured EUT Bandwidth = 205 kHz**

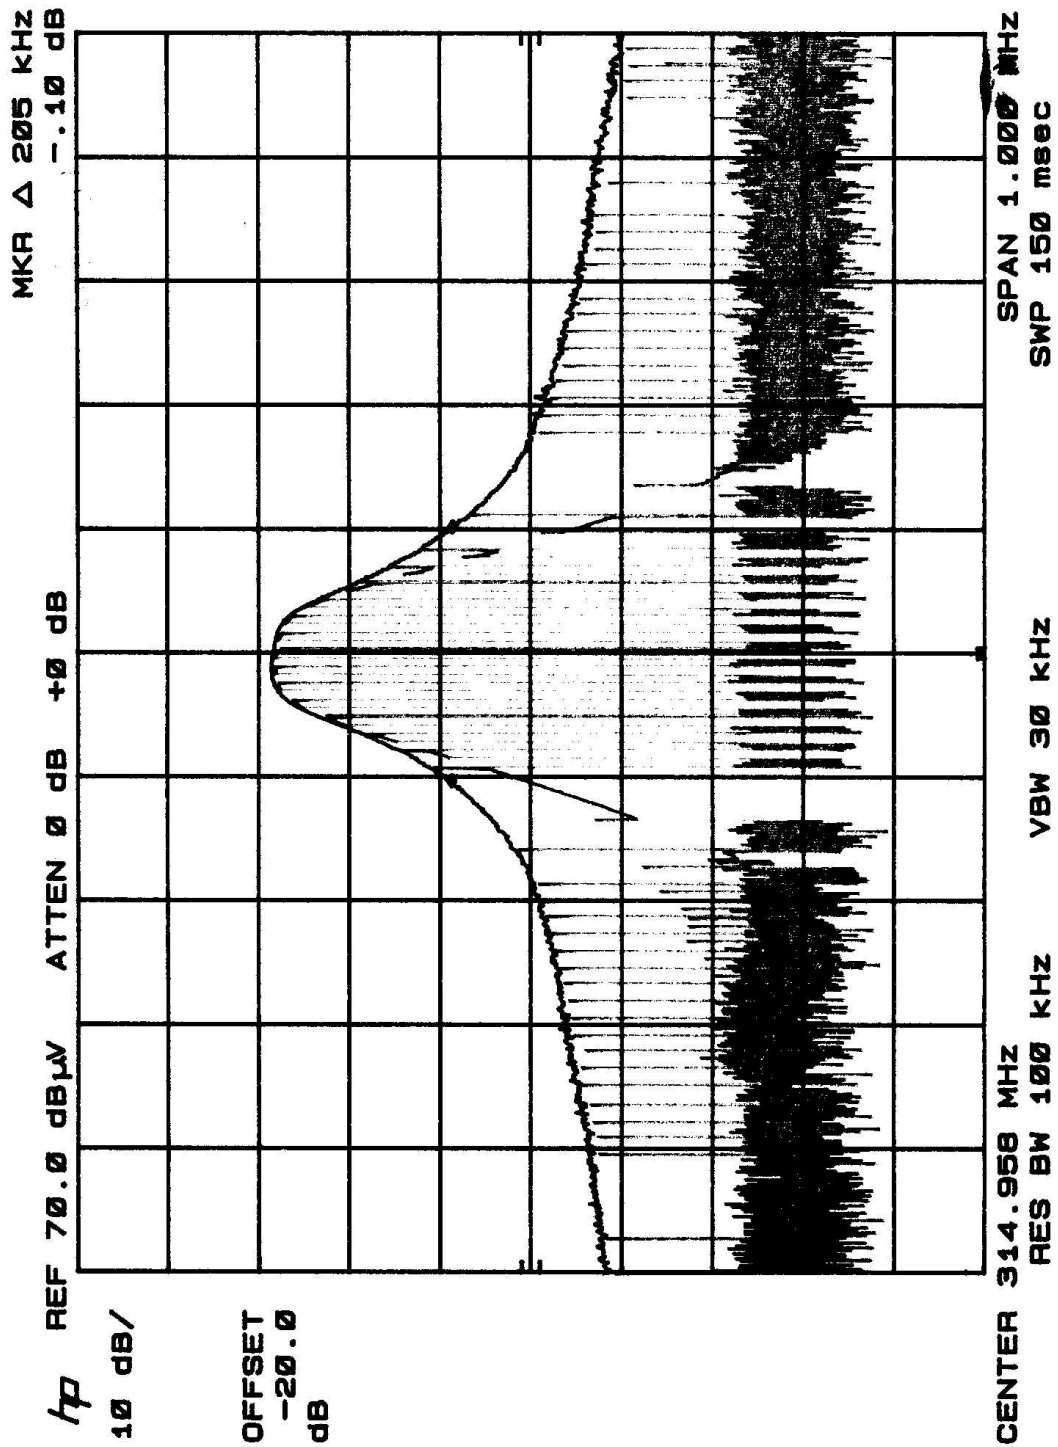

## Appendix A

### Statement of Measurement Uncertainty

For the purposes of the measurements performed by Washington Laboratories, the measurement uncertainty is  $\pm 2.3$  dB. This has been calculated for a *worst-case situation* (radiated emissions measurements performed on an open area test site).

The following measurement uncertainty calculation is provided:

$$\text{Total Uncertainty} = (A^2 + B^2 + C^2)^{1/2}/(n-1)$$

where:

A = Antenna calibration uncertainty, in dB = 2 dB

B = Spectrum Analyzer uncertainty, in dB = 1 dB

C = Site uncertainty, in dB = 4 dB

n = number of factors in uncertainty calculation = 3

Thus, Total Uncertainty =  $0.5 (2^2 + 1^2 + 4^2)^{1/2} = \pm 2.3$  dB.