



DK-6800TX-TX

BOTTOM VIEW

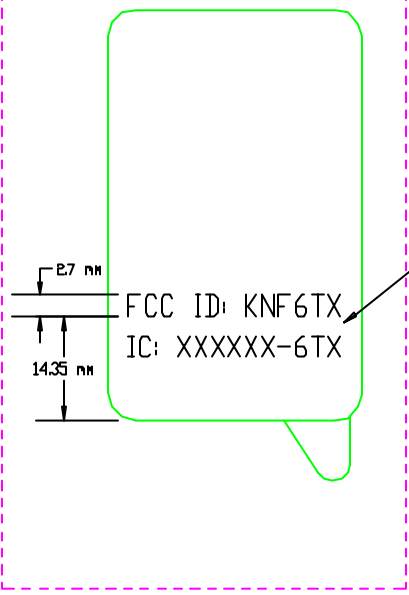

XXXXXX WILL BE REPLACED WITH THE
COMPANY NUMBER ISSUED BY CANADA
THE TEXT INDICATED WILL BE MOLDED
INTO THE PLASTIC CASE

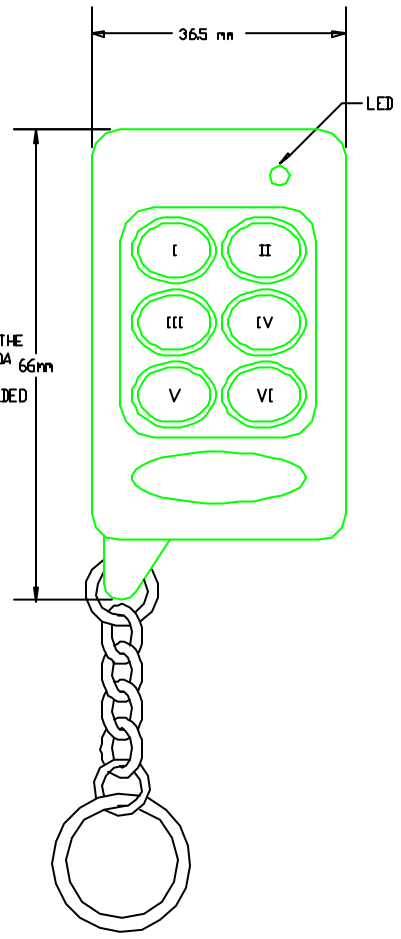

NOTES

1. THIS PRODUCT IS WATER RESISTANT.
A. TESTING PROCEDURE: SUBMERGE IN WATER
OF DEPTH OF 3-6 INCHES FOR 2 HOURS.
IF TX FLOATS DURING TEST WEIGHTS CAN
NOT BE PLACED ON TOP OF IT TO HOLD
IT DOWN. ALTERNATE METHODS SHOULD BE
USED.
2. THIS TRANSMITTER OPERATES AT 433.92MHz
FREQUENCY.

1	2	3	4	5
6	7	8	9	10
11	12	13	14	15
16	17	18	19	20
21	22	23	24	25
26	27	28	29	30
31	32	33	34	35
36	37	38	39	40
41	42	43	44	45
46	47	48	49	50
51	52	53	54	55
56	57	58	59	60
61	62	63	64	65
66	67	68	69	70
71	72	73	74	75
76	77	78	79	80
81	82	83	84	85
86	87	88	89	90
91	92	93	94	95
96	97	98	99	100

METRIC
DIMENSIONS ARE IN MILLIMETERS

SPAL	
1 OF 1	
METRIC	
UNIVERSAL 8 BTN TX	
DK-6800TX-TX	