

 Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.	TEST REPORT	Reference No.:A02081407 Report No.:FCCA02081407 FCC ID:KNFMULTIRCU7TX Page:1 of 17 Date:Aug. 23, 2002
--	----------------------	---

Product Name: Remote controller (TX)
 Model Number: Tx174FP
 Applicant: IOWA Export-Import Trading Co.
 512 Tuttle Street, Des Moines, Iowa 50309-4168, U.S.A.
 Date of Receipt: Aug. 15, 2002
 Finished date of Test: Aug. 22, 2002
 Applicable Standards: 47 CFR Part 15, Subpart C

We, **Spectrum Research & Testing Laboratory Inc.**, hereby certify that one sample of the above was tested in our laboratory with positive results according to the above-mentioned standards. The records in the report are an accurate account of the results. Details of the results are given in the subsequent pages of this report.

Tested By : James Lee , Date: Aug. 23, 2002
 (James Lee)

Checked By : Spring Wang , Date: Aug. 23, 2002
 (Spring Wang)

Approved By : Harris W. Lai , Date: Aug. 23, 2002
 (Harris W. Lai, Director)

NVLAP[®]

Lab Code: 200099-0



SUPPLEMENTARY TEST REPORT

Table of Contents

1. DOCUMENT POLICY AND TEST STATEMENT	3
1.1 DOCUMENT POLICY	3
1.2 TEST STATEMENT	3
2. DESCRIPTION OF EUT AND TEST MODE.....	4
2.1 GENERAL DESCRIPTION OF EUT	4
2.2 DESCRIPTION OF EUT INTERNAL DEVICE	4
2.3 DESCRIPTION OF TEST MODE	4
2.4 DESCRIPTION OF SUPPORT UNIT.....	5
3. DESCRIPTION OF APPLIED STANDARDS	5
4. CONDUCTED EMISSION TEST	5
5. RADIATED EMISSION TEST	6
5.1 RADIATED EMISSION LIMIT	6
5.2 TEST EQUIPMENT	7
5.3 TEST SET-UP	8
5.4 TEST PROCEDURE.....	8
5.5 EUT OPERATING CONDITION.....	9
5.6 RADIATED EMISSION TEST RESULT	9
6. RF CONDUCTED EMISSION TEST	10
6.1 RF CONDUCTED EMISSION LIMIT	10
6.2 TEST EQUIPMENT	10
6.3 TEST SET-UP	11
6.4 TEST PROCEDURE.....	11
6.5 EUT OPERATING CONDITION.....	11
6.6 RF CONDUCTED EMISSION TEST RESULT.....	11
7. FREQUENCY BANDWIDTH.....	13
7.1 FREQUENCY BANDWIDTH LIMIT	13
7.2 TEST EQUIPMENT	13
7.3 TEST SET-UP	13
7.4 TEST PROCEDURE.....	14
6.6 EUT OPERATING CONDITION.....	14
6.7 FREQUENCY BANDWIDTH TEST RESULT.....	14
8. PHOTOS OF TESTING	16
9. TERMS OF ABRIVATION	17

 Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.	SUPPLEMENTARY TEST REPORT	Reference No.:A02081407 ReportNo.:FCCA02081407 FCC ID:KNFMULTIRCU7TX Page:3 of 17 Date:Aug. 23, 2002
--	--------------------------------------	--

1. DOCUMENT POLICY AND TEST STATEMENT

1.1 DOCUMENT POLICY

- The report shall not be reproduced except in full, without the written approval of SRT Lab, Inc.
- The report must not be used by the applicant to claim that the product is endorsed by NVLAP.
- The NVLAP logo applies only to the applicable standards specified in this report.

1.2 TEST STATEMENT

- The test results in the report apply only to the unit tested by SRT Lab.
- There was no deviation from the requirements of test standards during the test.
- The new battery power source 12 Vdc, was used during the test.
- This report is prepared for FCC Class II permissive change as the main IC in EUT has been changed. The PCB and circuit are keep same as original one.

 Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.	SUPPLEMENTARY TEST REPORT	Reference No.:A02081407 ReportNo.:FCCA02081407 FCC ID:KNFMULTIRCU7TX Page:4 of 17 Date:Aug. 23, 2002
--	--	--

2. DESCRIPTION OF EUT AND TEST MODE

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Remote controller (TX)
MODEL NO.	Tx174FP
POWER SUPPLY	12Vdc(Battery)
CABLE	N/A
I/O PORT/INTERFACE	N/A
FREQUENCY BAND	303.875MHz
CARRIER FREQUENCY	303.875MHz
NUMBER OF CHANNEL	1
CHANNEL SPACING	N/A
RF OUTPUT POWER	-25 dBm (eirp)
I.F. & L.O.	L.O 303.875MHz
MODULATION TYPE	ASK
BIT RATE OF TRANSMISSION	4 kbps
ANTENNA TYPE	Loop Antenna integrated on PCB

NOTE: The EUT is the transmitter part of a remote controller which includes a receiver part. For more detailed information, please refer to the specifications or User's manual provided by manufacturer.

2.2 DESCRIPTION OF EUT INTERNAL DEVICE

DEVICE	BRAND / MAKER	MODEL #	FCC ID/DOC	REMARK
N/A				

2.3 DESCRIPTION OF TEST MODE

The EUT was operated in continually transmitting mode.

 Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.	SUPPLEMENTARY TEST REPORT	Reference No.:A02081407 ReportNo.:FCCA02081407 FCC ID:KNFMULTIRCU7TX Page:5 of 17 Date:Aug. 23, 2002
--	--------------------------------------	--

2.4 DESCRIPTION OF SUPPORT UNIT

The EUT was configured by the requirement of ANSI C63.4 and CISPR 22. All interface ports were connected to the appropriate support units via specific cables. The support units and cables are listed below.

NO	DEVICE	BRAND	MODEL #	FCC ID/DOC	CABLE
	N/A				

NOTE: For the actual test configuration, please refer to the photos of testing.

3. DESCRIPTION OF APPLIED STANDARDS

The EUT is a kind of wireless product and according to the specifications provided by the applicant, must comply with the requirements of the following standards:

47 CFR Part 15, Subpart C

All tests have been performed and recorded as per the above standards.

4. CONDUCTED EMISSION TEST

The test item was not performed, because the EUT uses 12Vdc battery as power source.

5. RADIATED EMISSION TEST

5.1 RADIATED EMISSION LIMIT

FCC part15C 15.209 limits of radiated emission measurement for frequency below 1000 MHz

FREQUENCY (MHz)	DISTANCE (m)	FIELDS STRENGTH (dBμV/m)
30 - 88	3	40.0
88 - 216	3	43.5
216 - 960	3	46.0
ABOVE 960	3	54.0

FCC part15C 15.231(b) limit of fundamental and spurious emissions measurement.

FREQUENCY (MHz)	Field Strength of Fundamental (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)
40.66-40.70	2250	225
70-130	1250	125
130-174	1250 to 3750 (NOTE 5)	125 to 375 (NOTE 7)
174-260	3750	375 (NOTE 7)
260-470	3750 to 12500 (NOTE 6)	375 to 1250
Above 470	12500	1250

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBμV/m) = 20 log Emission level (μV/m).
3. In the emission tables above, the tighter limit applies at the band edges.
4. Distance refers to the distance between measuring instrument, antenna, and the closest point of any part of the device or system.
5. Limit = $20\log(56.81818(F) - 6136.3636)$; F : Fundamental Frequency (MHz)
6. Limit = $20\log(41.667 \times F - 7083.3333)$; F : Fundamental Frequency (MHz)
7. Limit = The Limit of Fundamental Frequency – 20dB
8. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.

 Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.	SUPPLEMENTARY TEST REPORT	Reference No.:A02081407 ReportNo.:FCCA02081407 FCC ID:KNFMULTIRCU7TX Page:7 of 17 Date:Aug. 23, 2002
--	--------------------------------------	--

5.2 TEST EQUIPMENT

The following test equipment was used during the radiated emission test :

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
EMI TEST RECEIVER	9 kHz TO 2750 MHz	ROHDE & SCHWARZ	ESCS30/ 836858/008	DEC. 2002 R&S
BI-LOG ANTENNA	25 MHz TO 2 GHz	EMCO	3142/ 9701-1124	APR. 2003 ETC
HORN ANTENNA	1GHz TO 18GHz	EMCO	3115/ 9012-3619	JAN. 2003 ETC
OATS	3 – 10 M MEASUREMENT	SRT	SRT-1	MAY 2003 SRT

1. The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.
2. The Open Area Test Site (SRT-1) is registered by FCC with No. 90957 and VCCI with No. R-1081.
3. The Open Area Test Site (SRT-2) is registered by FCC with No. 98458 and VCCI with No. R-1168.

The EUT was tested according to the requirement of ANSI C63.4 and CISPR 22. The measurements were made at an open area test site with 3 meter measurement distance under 1 GHz and with 3m distance above 1GHz. The frequency spectrum measured started from 30 MHz. Under 1 GHz. All readings were quasi-peak values with 120 kHz resolution bandwidth of the test receiver. Above 1 GHz, the measurements were made at an open area test site with 3 meter measurement distance and all readings were peak or average values with 1 MHz resolution bandwidth of the test receiver. The EUT system was operated in all typical methods by users. The cables connected to EUT and support units were moved to find the maximum emission levels for each frequency.

5.5 EUT OPERATING CONDITION

Same as section 2.3 of this report.

5.6 RADIATED EMISSION TEST RESULT

Temperature:	30°C	Humidity:	52%RH
Ferquency Range:	30MHz - 2GHz	Measured Distance:	3m
Receiver Detector:	Q.P.	Tested by:	James Lee

Antenna Polarization : Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	AZ(°)	EL(m)
303.870	1.64	14.92	54.8	71.3	74.9	-3.6	250	1
607.616	2.37	20.77	24.7	47.8	54.9	-6.2	25	1.2
911.393	2.91	23.71	19.4	46.0	54.9	-8.0	190	1.2

Antenna Polarization : Vertical

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	AZ(°)	EL(m)
303.860	1.64	14.92	31.5	48.1	74.9	-26.8	21	1.2
607.616	2.37	20.77	14.9	38.1	54.9	-15.9	300	1.3
911.393	2.91	23.71	12.8	39.4	54.9	-14.6	280	1

NOTE :

1. Measurement uncertainty is less than +/- 4dB.
2. "": Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss.
4. The field strength of other emission frequencies were very low against the limit.

 Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.	SUPPLEMENTARY TEST REPORT	Reference No.:A02081407 ReportNo.:FCCA02081407 FCC ID:KNFMULTIRCU7TX Page:10 of 17 Date:Aug. 23, 2002
--	--	---

6. RF CONDUCTED EMISSION TEST

6.1 RF CONDUCTED EMISSION LIMIT

FCC part15C 15.231(b) limit of fundamental and spurious emissions measurement.

FREQUENCY (MHz)	Field Strength of Fundamental (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)
40.66-40.70	2250	225
70-130	1250	125
130-174	1250 to 3750 (NOTE 4)	125 to 375 (NOTE 6)
174-260	3750	375
260-470	3750 to 12500 (NOTE 5)	375 to 1250 (NOTE 6)
Above 470	12500	1250

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level ($\mu\text{V/m}$) = 20 log Emission level ($\mu\text{V/m}$).
3. In the emission tables above, the tighter limit applies at the band edges.
4. Limit = $20\log(56.81818(F) - 6136.3636)$; F : Fundamental Frequency (MHz)
5. Limit = $20\log(41.667 \times F - 7083.3333)$; F : Fundamental Frequency (MHz)
6. Limit = The Limit of Fundamental Frequency – 20dB
7. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.

6.2 TEST EQUIPMENT


The following test equipment was used during the radiated emission test :

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
SPECTRUM	9 kHz TO 7GHz	ROHDE & SCHWARZ	FSP7/ 839511/010	MAR. 2003 ETC

1. The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.

6.3 TEST SET-UP

The EUT is connector to Receiver(or spectrum) by 50Ω coaxial cable.



6.4 TEST PROCEDURE

Please refer to FCC Part15C 15.231.

6.5 EUT OPERATING CONDITION

Same as section 2.3 of this report.

6.6 RF CONDUCTED EMISSION TEST RESULT

Temperature:	<u>25 °C</u>	Humidity:	<u>60%RH</u>
Receiver Detector:	<u>PK.</u>	Tested by:	<u>James Lee</u>

Frequency (MHz)	RF LEVEL 120kHz Bw (dBμV)	Limit (dBμV/m)	Margin (dB)
312.574	17.93	56.74	-38.81




**Spectrum Research
& Testing Lab., Inc.**

No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

SUPPLEMENTARY TEST REPORT

Reference No.:A02081407
ReportNo.:FCCA02081407
FCC ID:KNFMULTIRC7TX
Page:12 of 17
Date:Aug. 23, 2002

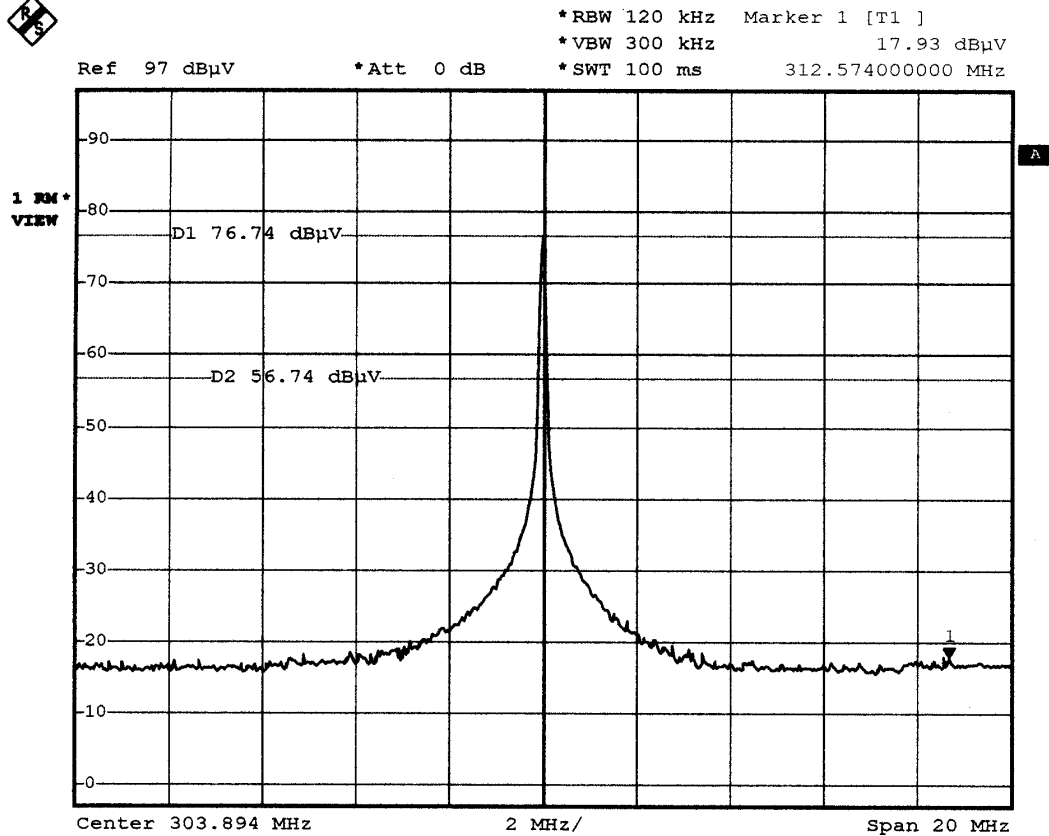

Date: 20.AUG.2002 07:04:15

7. FREQUENCY BANDWIDTH

7.1 FREQUENCY BANDWIDTH LIMIT

FREQUENCY (MHz)	BANDWIDTH LIMIT(kHz)
Above70-900	0.25%×Center Frequency(MHz)
Above900	0.5% ×Center Frequency(MHz)

NOTE:

1. Bandwidth is determined at the points 20dB down from the modulated carrier.

7.2 TEST EQUIPMENT


The following test equipment was used during the radiated emission test :

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
SPECTRUM	9 kHz TO 7GHz	ROHDE & SCHWARZ	FSP7/ 839511/010	MAR. 2003 ETC

1. The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.

7.3 TEST SET-UP

The EUT is connector to Receiver(or spectrum) by 50Ω coaxial cable.



7.4 TEST PROCEDURE

Please refer to FCC Part15C 15.231.

6.6 EUT OPERATING CONDITION

Same as section 4.5 of this report.

6.7 FREQUENCY BANDWIDTH TEST RESULT

Temperature:	<u>25 °C</u>	Humidity:	<u>60%RH</u>
Receiver Detector:	<u>PK.</u>	Tested by:	<u>James Lee</u>
Test Result:	<u>Pass</u>		

CHANNEL	FREQUENCY (MHz)	<u>20</u> dB DOWN BANDWIDTH (kHz)	MINIMUM LIMIT (kHz)	MAXMUM LIMIT (kHz)
1	303.868	226	N/A	759.67




**Spectrum Research
& Testing Lab., Inc.**

No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

SUPPLEMENTARY TEST REPORT

Reference No.:A02081407
ReportNo.:FCCA02081407
FCC ID:KNFMULTIRC7TX
Page:15 of 17
Date:Aug. 23, 2002

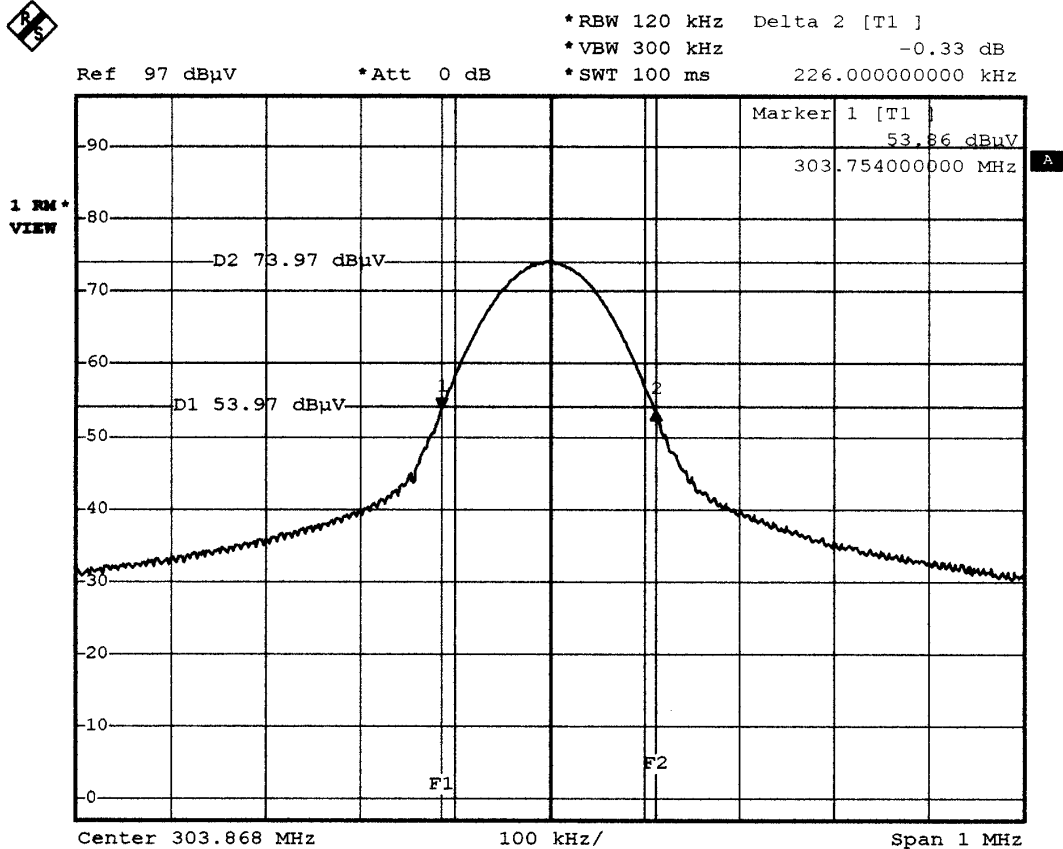

Date: 20.AUG.2002 06:58:40



**Spectrum Research
& Testing Lab., Inc.**


No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan,
R.O.C.

SUPPLEMENTARY TEST REPORT

Reference No.:A02081407
ReportNo.:FCCA02081407
FCC ID:KNFMULTIRC7TX
Page:16 of 17
Date:Aug. 23, 2002

8. PHOTOS OF TESTING

- Radiated test

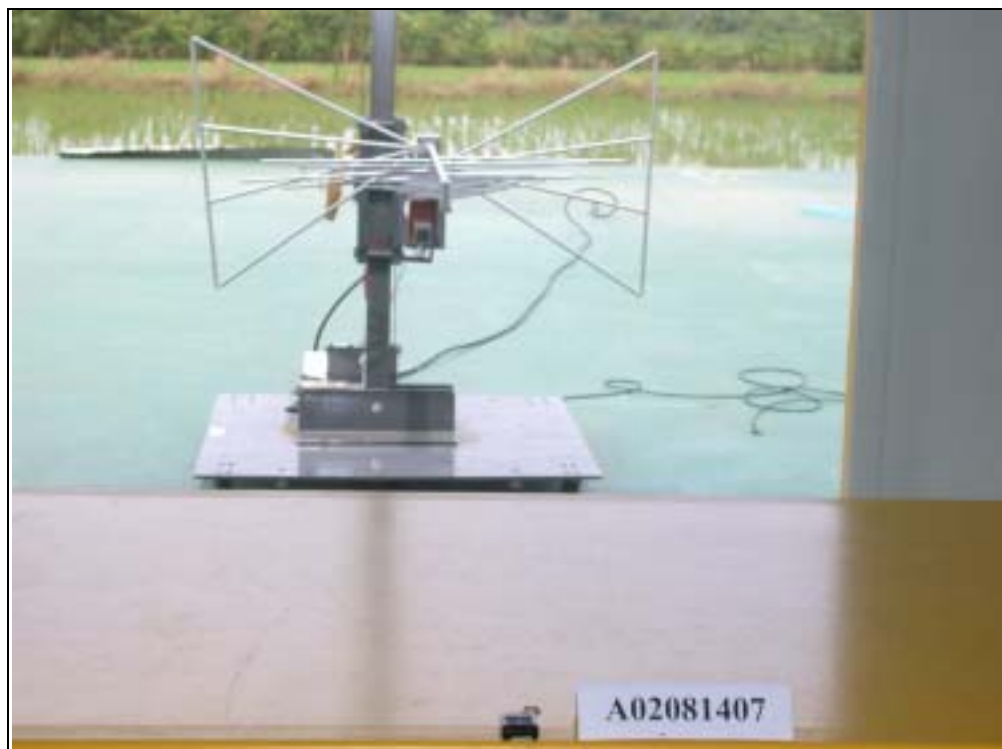

 Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.	SUPPLEMENTARY TEST REPORT	Reference No.:A02081407 ReportNo.:FCCA02081407 FCC ID:KNFMULTIRCU7TX Page:17 of 17 Date:Aug. 23, 2002
--	--	---

9. TERMS OF ABRIVATION

AV.	Average detection
AZ(°)	Turn table azimuth
Correct.	Correction
EL(m)	Antenna height (meter)
EUT	Equipment Under Test
Horiz.	Horizontal direction
LISN	Line Impedance Stabilization Network
NSA	Normalized Site Attenuation
PK.	Peak detection
Q.P.	Quasi-peak detection
SRT Lab	Spectrum Research & Testing Laboratory, Inc.
Vert.	Vertical direction