



TEST REPORT

Report Number: 101503607DEN-001B

Project Number: G101503607

Report Issue Date: 2/26/2014

Product Designation: Model: W5800-01 with RadioWaves FP2-5-28 (Directional Panel Antenna)

Standards: FCC Part 15 Subpart C (15.247)

Operation within the bands 902-928 MHz, 2400-2483.5 MHz,
and 5725-5850 MHz

IC RSS-210, Issue 8: 2010

IC RSS-GEN, Issue 3: 2010

Tested by:
Intertek Testing Services NA, Inc.
1795 Dogwood St. Suite 200
Louisville, CO 80027

Client:
FreeWave Technologies, Inc.
5395 Pearl Parkway, Suite 100
Boulder, CO 80301

Report prepared by

Randy Thompson
Senior EMC Project Engineer

Report reviewed by

Michael Spataro
Engineering Team Leader

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TABLE OF CONTENTS

1	<i>Introduction and Conclusion</i>	3
2	<i>Test Summary</i>	4
3	<i>Description of Product Under Test.....</i>	6
4	<i>System setup including cable interconnection details, support equipment and simplified block diagram</i>	9
5	<i>AC Voltage Variation/ Battery Requirement</i>	13
6	<i>Antenna Requirement.....</i>	13
7	<i>DTS Requirement</i>	13
8	<i>DTS Bandwidth (6dB Bandwidth)</i>	13
9	<i>RF Conducted Output Power</i>	13
10	<i>RF Conducted Spurious Emissions (-20dBc) – Including Band Edge</i>	13
11	<i>Transmitter Radiated Spurious Emissions – Restricted Band/ Band Edge</i>	14
12	<i>Power Spectral Density – PSD</i>	64
13	<i>Radiated Emissions (Digital Part of Receiver).....</i>	64
14	<i>AC Mains Conducted Emissions - Transmitter</i>	64
15	<i>RF Exposure Requirement</i>	64
16	<i>Duty Cycle/ Duty Cycle Correction Factor</i>	64
17	<i>Appendix A: Antenna Specifications.....</i>	65
18	<i>Measurement Uncertainty.....</i>	66
19	<i>Revision History</i>	67

Intertek	
Report Number: 101503607DEN-001B	Issued: TBD

1 Introduction and Conclusion

The tests indicated in section 2.0 were performed on the product constructed as described in section 3.0. The remaining test sections are the verbatim text from the actual data sheets used during the investigation. These test sections include the test name, the specified test Method, a list of the actual Test Equipment Used, documentation Photos, Results and raw Data. No additions, deviations, or exclusions have been made from the standard(s) unless specifically noted.

Based on the results of our investigation, we have concluded **the product tested complies with the requirements of the standard(s) indicated**. The results obtained in this test report pertain only to the item(s) tested.

1.1 Test Report Scope

FCC/IC Class II Permissive Change

The scope of this report was to qualify the existing approved radio module Model: W5800-01 with new antennas. This specific report covers the following antenna:

- Model: FP2-5-28 (Directional Panel Antenna)

This radio operates in the following 802.11 a/n Tx Band: 5725 – 5850 MHz.

The Model: W5800-01 has previously been fully qualified and documented in the following SPORTON LAB test report:

- FCC Test Report Number: FR362203A1

Below is a summary of Intertek Test Reports associated with the Class II Permissive Change:

- 4' Parabolic "Dish" Antenna (5.8 GHz): 101503607DEN-001A
- **Directional Panel Antenna (5.8 GHz): 101503607DEN-001B (This Report)**

1.2 Test Methodology

All measurements were performed according to the procedures in the following documents:

- ANSI C63.10: 2013 – ANSI Standard for Testing Unlicensed Wireless Devices
- FCC Publication 558074, April 9, 2013 (Guidelines for Compliance Measurements on DTS Operating Under 15.247)

Radiated emissions tests were formed at an antenna-to-product distance of 3-meters.

1.3 Test Facility

Intertek Denver's testing facilities are located at 1795 Dogwood St. Suite 200 Louisville, CO 80027. The testing facility is ISO17025:2005 accredited by A2LA, our lab code is 2506.02, our VCCI registration numbers are. R-1643, C-1752 and T-1558, our FCC designation no. US1121 and our IC lab no. 2042N.

Testing contained in this test report may not be covered under the laboratories scope of accreditation. A note will be placed in the specific test section for testing not covered under the laboratories scope.

2 Test Summary

TEST SECTION	TESTS	FCC/IC REFERENCE	TEST DATE	RESULT
5	AC Voltage Variation	FCC 15.31(e)	-----	N/A
6	Antenna Requirement	FCC 15.203	-----	N/A
7	DTS Requirement	FCC 15.247(a) RSS-210 A8.2	-----	N/A
8	6dB Bandwidth	FCC 15.247(a)(2) RSS-210 A8.2(a)	-----	N/A
9	RF Conducted Output Power (includes requirements for antenna gain > 6dBi)	FCC 15.247(b)(3)(4) FCC 15.247(c)(1) RSS-210 A8.4(4)	-----	N/A
10	RF Conducted Spurious Emissions (-20dBc) Includes Band Edge	FCC 15.247(d) RSS-210 A8.5	-----	N/A
11	Transmitter Radiated Spurious Emissions (Restricted Bands – Band Edge)	FCC 15.247(d) FCC 15.209/ 15.205 RSS-210 A8.5 RSS-Gen 7.2.5	02/14/2014 to 02/17/2014	Complies
12	Power Spectral Density (PSD)	FCC 15.247(e) RSS-210 A8.2(b)	-----	N/A
13	Radiated Emissions – Digital Receiver	FCC 15.109 RSS-Gen 6.1	-----	N/A
14	Tx AC Line Conducted Emissions	FCC 15.207 RSS-Gen 7.2.4	-----	N/A
15	RF Exposure Requirement	FCC 15.247(i) FCC 15.1.1307(b)(1) RSS 102	-----	N/A
16	Duty Cycle/ Duty Cycle Correction Factor	FCC 15.35(c) RSS-Gen 4.5	-----	N/A

Notes:

- 1) All Tx Radiated Emission measurements in this report utilized the transmit channels and worst-case 802.11 a/n band(s), modulation and data rates reported in the FCC test report listed on page 3 of this report. Note HT20/HT40 and both SISO and MIMO Tx operating modes were tested.
- 2) Only selected testing required for the specific Class II Permissive change was performed.

Intertek	
Report Number: 101503607DEN-001B	Issued: TBD

General Radio Test Notes:

- ANSI C63.10, Section 4.2.3.2/ FCC 15.35: Measurement detector functions and bandwidths utilized in this testing were per the preceding guidelines.
- ANSI C63.10, Section 4.2.3.2.2/ FCC 15.35(b): When an average limit is specified, the peak emission must also be measured to ensure the emissions is less than 20dB above the average limit and/or below the peak limit specified. This report includes both average and peak test data.
- ANSI C63.10, Section 5.3/ FCC 15.31: All radiated field strength measurements taken at an antenna-to-product test distance of 3-meters.
- ANSI C63.10, Section 6.3/ FCC 15.31(m): Measurements were taken at the lowest, near the middle and highest channels of the product tested.

3 Description of Product Under Test

Model:	W5800-01 (5.8 GHz)
Type of EUT:	802.11 a/n PCIe Radio Module
Serial Number:	DEN1402111313
FCC ID:	KNYPRW1001EC
Industry Canada ID:	2329B-PRW1001EC
Related Submittal(s) Grants:	-----
Company:	FreeWave Technologies, Inc.
Customer:	FreeWave Technologies, Inc.
Address:	5395 Pearl Parkway, Suite 100
Phone:	(303) 962-7879
Fax:	-----
e-mail:	dbusch@freewave.com
Test Standards:	☒ 47 CFR, Part 15C:§15.247 DTS ☒ RSS-210, Issue 8, 2010 ☒ RSS-Gen, Issue 3, 2010 ☐ 47 CFR, Part 15C:§15.207 ☐ Other
Type of radio:	☐ Stand -alone ☒ Module ☐ Hybrid
Date Sample Submitted:	02/10/2014
Test Work Started:	02/14/2014
Test Work Completed:	02/17/2014
Test Sample Conditions:	☐ Damaged ☐ Poor (Usable) ☒ Good

Product Description:	Wireless router utilized in M2M industrial applications
Transmitter Type:	☐ FHSS ☐ Digital Modulation ☒ WiFi ☐ Blue Tooth
Operating Frequency Range(s):	5725MHz to 5850MHz
Number of Channels:	IEEE 802.11a/n HT20 (5-Channels) 802.11n HT40 (2-Channels) Channel Frequency Range: 5745 – 5825 MHz
Modulation:	802.11 a/n: OFDM-BPSK, QPSK, 16QAM, 64QAM
Antenna(s) Info:	Antenna: Type: 5.8GHz Directional Panel, single polarity Gain: +28.2 dBi Connector Type: "N" External Antenna(s) (Dedicated) – Point-to-Point
Rated Power:	802.11 a/n HT20: EIRP 26.79 dBm (478 mW) 802.11 n/HT40 EIRP 26.10 dBm (407 mW)
Antenna Installation:	☐ User ☒ Professional ☐ Factory
Transmitter power configuration:	☐ Internal battery ☒ External power source
Special Test Arrangement:	Mounted on antenna tripod
Test Facility Accreditation:	A2LA (Certificate No. 2506.02)
Test Methodology:	Measurements performed according to the procedures in ANSI C63.10-2013 and FCC Guidance Publication 558074

3.1 Channel Configurations

CHANNELS IN THE TX 5725 – 5850 MHZ BAND					
Channel Number	Frequency (MHz)	802.11n HT20	802.11n HT40	SISO N _{TX} = 1	MIMO N _{TX} = 2
149	5745	xt	---	tested	tested
153	5765	x	xt	tested	tested
157	5785	xt	xt	tested	tested
161	5805	x	---	x	x
165	5825	xt	---	tested	tested

Note: x = available channels xt = tested channels

3.2 Product Description - Detailed

Description of Equipment Under Test (provided by client)
The system tested is the Model: W5800-01 (5.8 GHz) radio module configured with: Model: FP2-5-28 (Directional Panel Antenna) The product is a wireless router utilized in M2M industrial applications Signal & I/O Cables: Ethernet The product is powered from an external power source.

For the testing of this specific test report, the product supports the following data rates in the 5745 – 5825 MHz band:

- IEEE 802.11 a/n HT20: 6-54 Mbps/ MCS0-MCS23
- IEEE 802.11n HT40: MCS0-MCS23

In 802.11 a/n HT20 mode, the nominal bandwidth is 20MHz.
In 802.11n HT40 mode, the nominal bandwidth is 40MHz.

The product operates in both SISO (1-transmit chain) and MIMO (2-transmit chains) modes.

Equipment Under Test Power Configuration			
Rated Voltage	Rated Current	Rated Frequency	Number of Phases
AC Adapter Input: 100-240VAC	0.9 A	50/60	1
AC Adapter Output: 12VDC	3.0 A	---	---

Descriptions of EUT Exercising
☐ Standby/Idle Mode
☐ Continuous transmission, un-modulated carrier (CW)
☒ Continuous transmission, modulated carrier (CW) utilizing worst-case data rate
☐ Continuous Receive Mode


Note: The chosen mode of operation described above is dependent upon the specific test to be performed.

4 System setup including cable interconnection details, support equipment and simplified block diagram

4.1 Method:

Record the details of EUT cabling, document the support equipment, and show the interconnections in a block diagram.

4.2 EUT Block Diagram: Directional Panel Antenna (1-port)

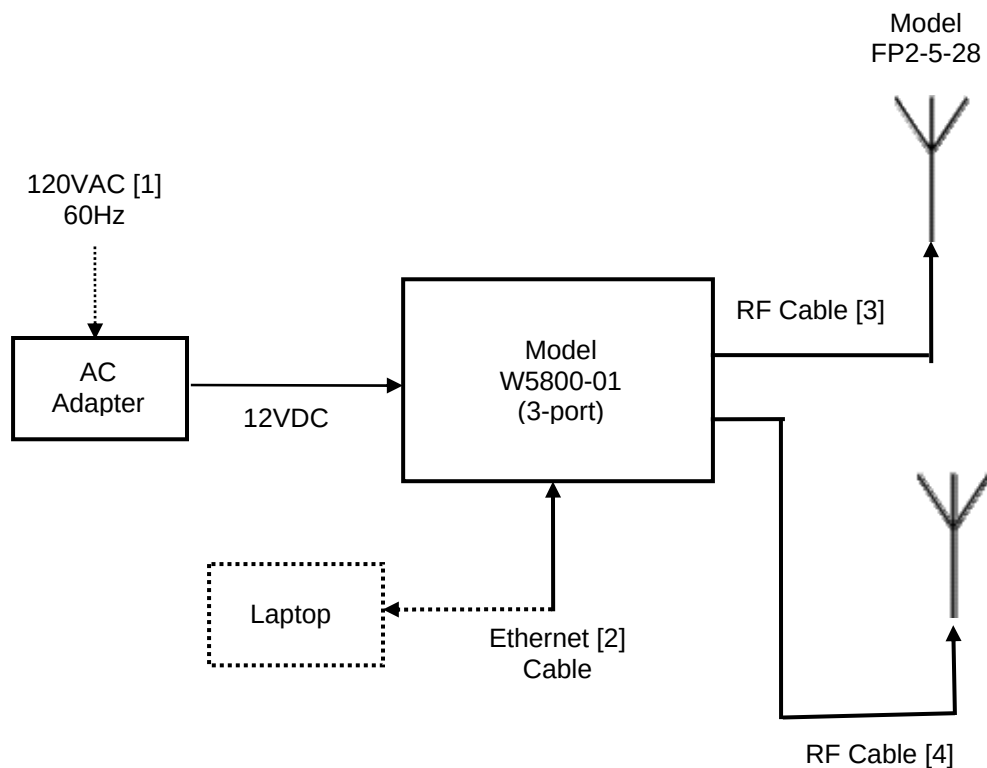

Note: Dashed lines indicate auxiliary/support equipment outside the test area. Ethernet cable was routed partially outside the test chamber with ~ 1-meter inside the test chamber – connected to the Model W5800-01 Ethernet port.

4.3 Antenna Specifications:

2.4 GHz					
Model	Type	Gain (dBi)	Beamwidth (degrees)	Polarization	Datasheet
FP2-5-28	Directional Panel	28.2	4.5	Single	Appendix A of this report

4.4 Determination of RF Power supplied to antenna input for testing

Per FCC 15.247(c)(1)(ii): Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted output power.

Antenna tested:

- Model RadioWaves FP2-5-28 (Directional Panel Antenna) Gain: 28.2dBi

=====

Maximum Peak Conducted Output Power: If antenna fixed, point-to-point and > 6dBi, then $P_{Out} = 30\text{dBm}$ (power reduction not required)

Where:

P_{Out} = maximum peak conducted output power (dBm)

=====

All Radiated measurements taken with the Model: W5800-01 transmitting at 27dBm. This represents the absolute worst-case since the actual rated maximum output power is less than the test output power.

Actual Rated Output Power: 26.79dBm (478 mW)

Intertek	
Report Number: 101503607DEN-001B	Issued: TBD

4.5 Support Data:

ID	Description/ Function	Shield Type	Length	Connector	Connection	Ferrites
1	DC Cable (ac adapter)	none	0.5 meter	DC	VDC – Model W5800-01	none
2	Ethernet Cable	none	4-meter	RJ45	RJ-45 – Model W5800-01	none
3-5	RF Cable(s)	Braid	3-meter	SMA-to-N	Model W5800-01 to Antenna	none

Support Equipment			
Description	Manufacturer	Model Number	Serial Number
Laptop	HP	---	---
Switching Power Supply	Sceptre Power	S036CQ1200300	---

Notes:

- 1) The laptop was utilized only to configure the product during testing (i.e. set channel, modulation, data rates, etc.).
- 2) The product has RF ports and Ethernet Cable ports.

4.6 Photograph: Product Tested - Model W5800-01 with Directional Panel Antenna

Model W5800-01 Radio Module (3-port maximum)



Directional Panel Antenna (1-port maximum)



Intertek	
Report Number: 101503607DEN-001B	Issued: TBD

5 AC Voltage Variation/ Battery Requirement

5.1 Results:

Test not required for Class II Permissive Change.

6 Antenna Requirement

6.1 Results:

Test not required for Class II Permissive Change.

7 DTS Requirement

7.1 Results:

Test not required for Class II Permissive Change.

8 DTS Bandwidth (6dB Bandwidth)

8.1 Test Results:

Test not required for Class II Permissive Change.

9 RF Conducted Output Power

9.1 Results:

Not required for Class II permissive change. However, the software utility utilized to configure the radio output power supplied to the antenna(s) during testing was verified to provide at least the minimum output power selected for testing.

10 RF Conducted Spurious Emissions (-20dBc) – Including Band Edge

10.1 Test Results:

Test not required for Class II Permissive Change.

11 Transmitter Radiated Spurious Emissions – Restricted Band/ Band Edge

11.1 Method

Unless otherwise stated no deviations were made from FCC Part 15.209/205.

This testing was performed at Intertek Denver, located at 1795 Dogwood St. Suite 200, Louisville, CO 80027.

11.2 Test Requirement/ Specification:

Radiated emissions which fall in the restricted bands, as defined in FCC Part 15.205(a), must also comply with the radiated emission limits specified in Part 15.209(a) and Part 15.205(c). Measurements in the restricted bands include both peak detector and average detector measurements. Measurements in non-restricted bands include peak detector measurements.

Unwanted emissions below 1GHz must comply with the general field strength limits defined in FCC Part 15.209, when measured with a quasi-peak detector.

11.3 Test Equipment Used:

Asset ID	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
DEN-073	EMI Receiver (10Hz – 26.5GHz)	RHODE & SCHWARZ	ESU 26	100265	01/29/2014	01/29/2015
18912	9 kHz- 1.3GHz Pre Amp	Hewlett-Packard	8447F	3113A05545	06/07/2013	06/07/2014
18906	RF Pre-Amp (1-4GHz)	Mini-Circuits Lab	ZHL-42	N052792-2	06/10/2013	06/10/2014
DEN-032	4-18GHz Preamp (LNA)	Narda	DBL- 0618N615	031	03/07/2013	03/07/2014
19937	Bilog Antenna 30MHz – 6GHz	Sunol Sciences	JB6	A050707-2	03/20/2013	03/20/2014
18887	Horn Antenna 1-18GHz	EMCO	3115	9205-3886	03/19/2013	03/19/2014
SW-6	Software for Radiated and Conducted emissions.	Intertek	OATS vba	V. 3.0	VBU	VBU

11.4 Test Procedure:

The Resolution Bandwidth is 120 kHz or greater for frequencies 30 MHz -1000 MHz and 1 MHz for frequencies above 1000 MHz. The Video Bandwidth was at least 3x the RBW. All measurements taken with trace “max hold”.

The EUT is placed on a plastic turntable that is 80 cm in height. If the EUT attaches to peripherals, they are connected and operational (as typical as possible). During testing, all cables are manipulated to produce worst-case emissions. The signal is maximized by rotating the turntable through a 360° rotation. The antenna height is varied from 1-4 meters. Both vertical and horizontal antenna configurations are utilized in the testing.

Radiated emissions 30MHz to 18GHz are taken at 3-meter antenna-to-product test distance.

Radiated emissions above 18GHz are taken using a harmonic mixer antenna/pre-amp setup at 1-meter antenna-to-product test distance.

Data is included for the worst-case configuration - the configuration which resulted in the highest emission levels.

Intertek	
Report Number: 101503607DEN-001B	Issued: TBD

The following procedures described in FCC Publication 558074 (Guidelines for Compliance Measurements on DTS Operating Under 15.247), were used:

- 558074, Section 12.1 & 13.1
- ANSI C63.10: 2013 – General Guidance

11.5 Test Results:

The sample tested was found to Comply.

11.6 Test Summary – Worst-Case Measurements

Test Data Summary: Tx Radiated Spurious Emissions in Restricted Band

SISO Mode of Operation: 802.11 a/n HT20/HT40

Freq	Level	Det	Cable	Ant	Preamp	Atten	Final	Pol	Hgt	Az	Delta1	Delta2	RBW
MHz	dBuV	Qp Av Pk	+ [dB]	+ [dB/m]	- [dB]	+ [dB]	= [dBuV]	(V/H)	(m)	(DEG)	FCC 15.209 Average	FCC 15.35(b) Peak	(MHz)
Measurements: 1-18GHz, Average/Peak, RBW 1MHz, VBW 3MHz, max hold													
11570.0000	51.33	Av	8.49	38.96	47.26	0.00	51.52	V	1.53	8.0	- 2.46	NA	1.000
11570.0000	61.05	Pk	8.49	38.96	47.26	0.00	61.24	V	1.53	8.0	N/A	- 12.76	1.000

Test Data Summary: Tx Spurious Emissions – Band Edge/Restricted Band

SISO Mode of Operation: 802.11 a/n HT20/HT40

Freq	Level	Det	Cable	Ant	Preamp	Atten	Final	Pol	Hgt	Az	Delta1	Delta2	RBW
MHz	dBuV	Qp Av Pk	+ [dB]	+ [dB/m]	- [dB]	+ [dB]	= [dBuV]	(V/H)	(m)	(DEG)	FCC 15.209 Average	FCC 15.35(b) Peak	(MHz)
Measurements: Upper Band Edge, Average/Peak, RBW 1MHz, VBW 3MHz, max hold													
5850.0000	56.69	Av	5.70	34.15	44.41	0.00	52.13	V	1.44	6.0	- 1.85	NA	1.000
5850.0000	65.50	Pk	5.70	34.15	44.41	0.00	60.94	V	1.44	6.0	N/A	- 13.06	1.000

Test Data Summary: Tx Radiated Spurious Emissions in Restricted Band

MIMO Mode of Operation: 802.11 a/n HT20/HT40

Freq	Level	Det	Cable	Ant	Preamp	Atten	Final	Pol	Hgt	Az	Delta1	Delta2	RBW
MHz	dBuV	Qp Av Pk	+ [dB]	+ [dB/m]	- [dB]	+ [dB]	= [dBuV]	(V/H)	(m)	(DEG)	FCC 15.209 Average	N/A	(MHz)
Measurements: 30MHz to 1000MHz, Quasi-peak, RBW 120kHz, VBW 300kHz, max hold													
500.0000	52.78	Qp	1.53	17.70	28.60	0.00	43.41	V	1.49	337.4	- 2.61	NA	0.120

Test Data Summary: Tx Spurious Emissions – Band Edge/Restricted Band


MIMO Mode of Operation: 802.11 a/n HT20/HT40

Freq	Level	Det	Cable	Ant	Preamp	Atten	Final	Pol	Hgt	Az	Delta1	Delta2	RBW
MHz	dBuV	Qp Av Pk	+ [dB]	+ [dB/m]	- [dB]	+ [dB]	= [dBuV]	(V/H)	(m)	(DEG)	FCC 15.209 Average	FCC 15.35(b) Peak	(MHz)
Measurements: Upper Band Edge, Average/Peak, RBW 1MHz, VBW 3MHz, max hold													
5850.0000	54.25	Av	5.70	34.15	44.41	0.00	49.69	V	1.53	5.0	- 4.29	NA	1.000
5850.0000	63.15	Pk	5.70	34.15	44.41	0.00	58.59	V	1.53	5.0	N/A	- 15.41	1.000


Note: The above represents the worst-case measurements.

11.7 Setup Photographs: SISO Mode of Operation

Transmitter Spurious Radiated Emissions - Test Setup (Front View)

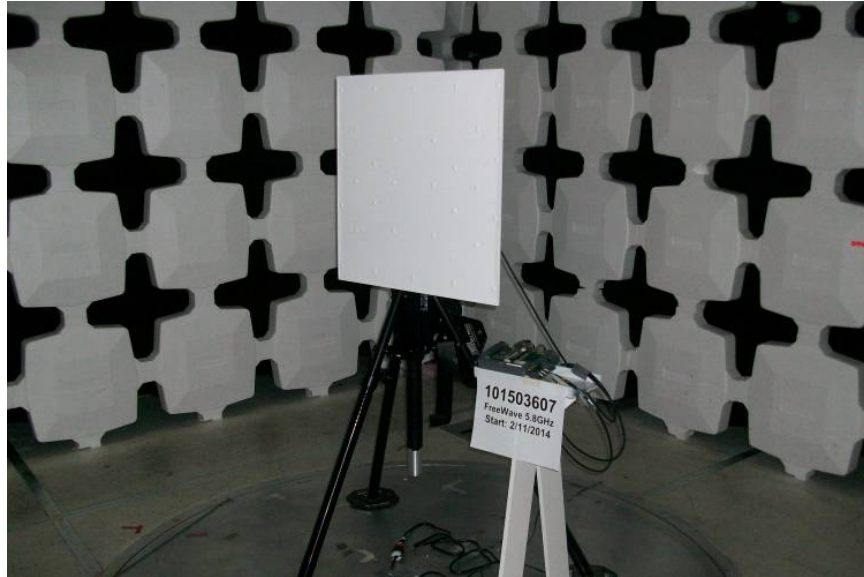


Model W5800-01

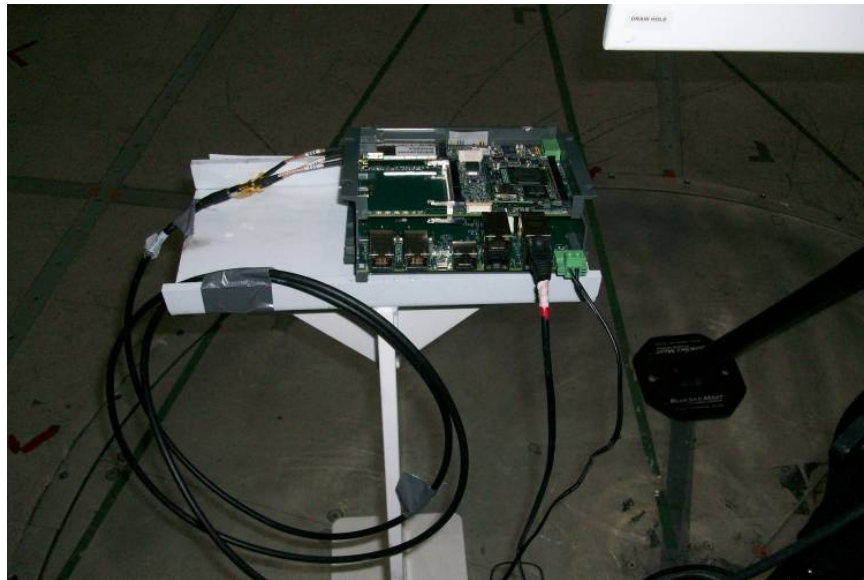

11.8 Setup Photographs: SISO Mode of Operaton

Transmitter Spurious Radiated Emissions - Test Setup (Rear View)

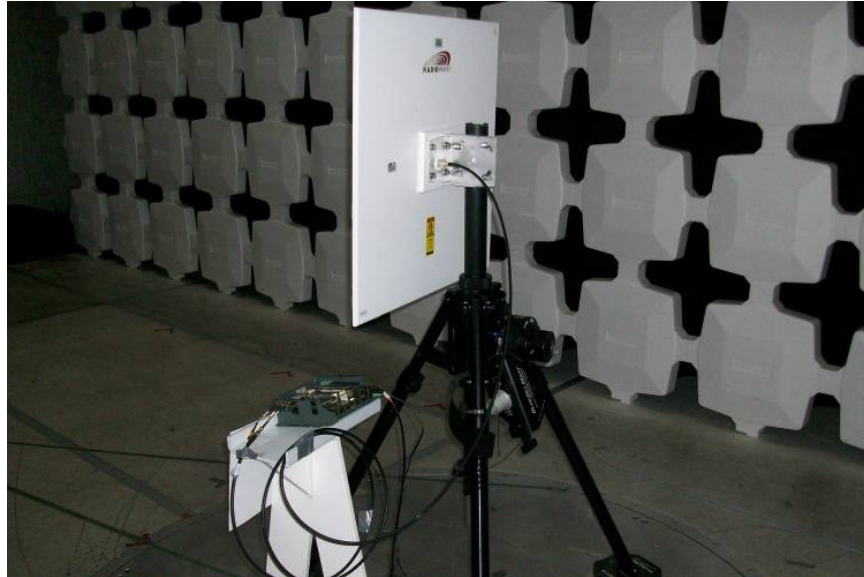


Single-RF Port




11.9 Setup Photographs: MIMO Mode of Operation

Transmitter Spurious Radiated Emissions - Test Setup (Front View)

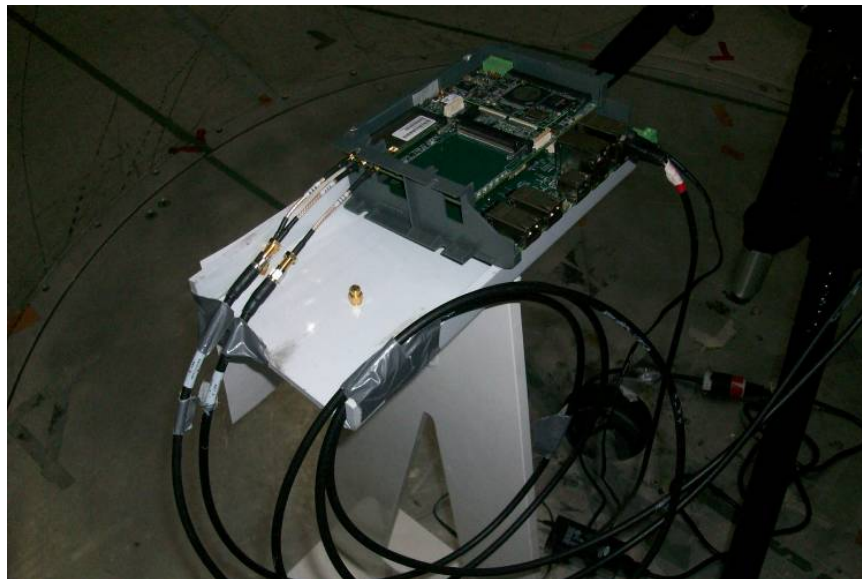


11.10 Setup Photographs: MIMO Mode of Operation

Transmitter Spurious Radiated Emissions - Test Setup (Rear View)

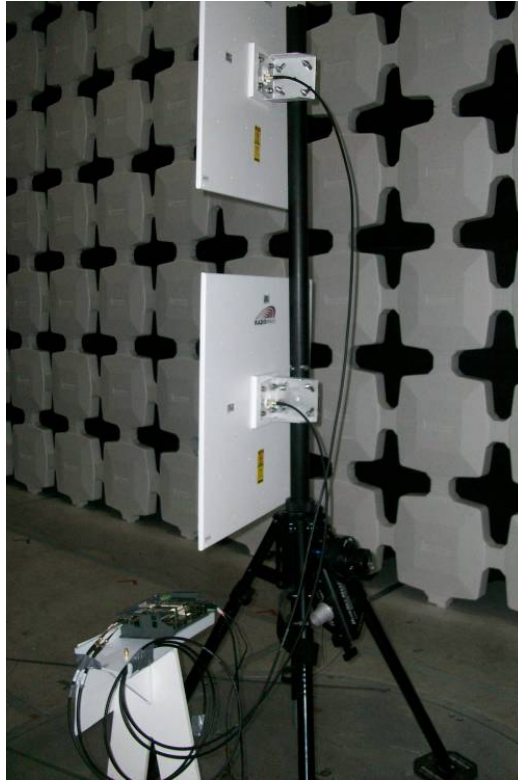


2-RF Port

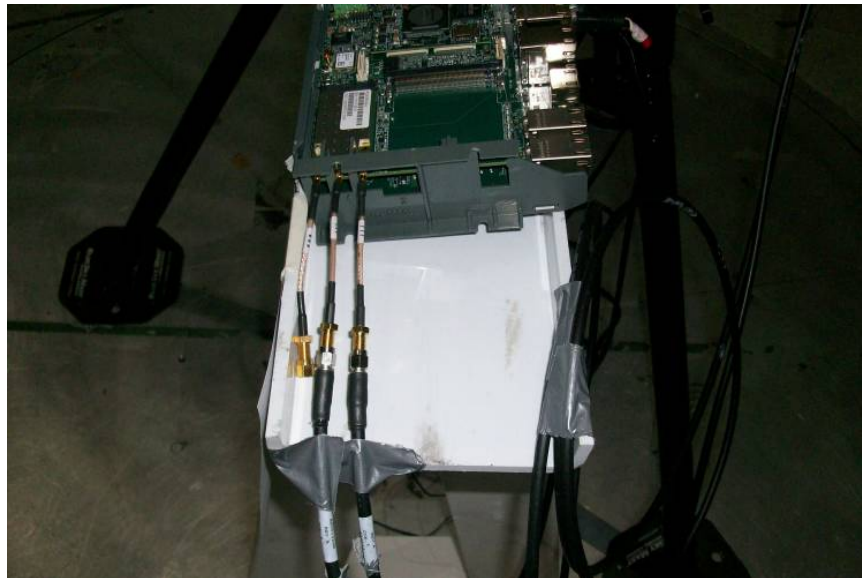

11.11 Antenna Setups:

Bilog Antenna (30MHz to 1GHz)

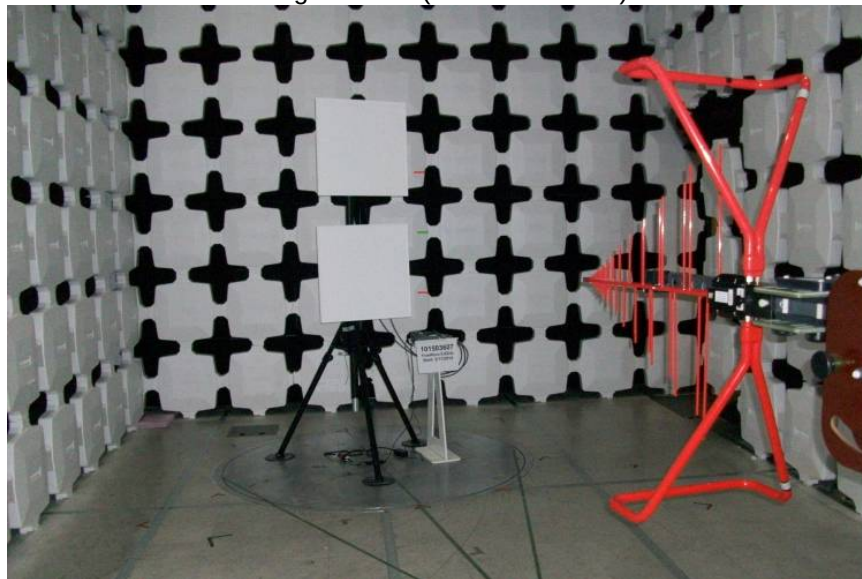


Ridge-Guide Horn Antenna (1GHz to 18GHz)




11.12 Plots: SISO Mode of Operation – HT20 Low Channel: 5745 MHz

30MHz to 1000MHz

Vertical Antenna

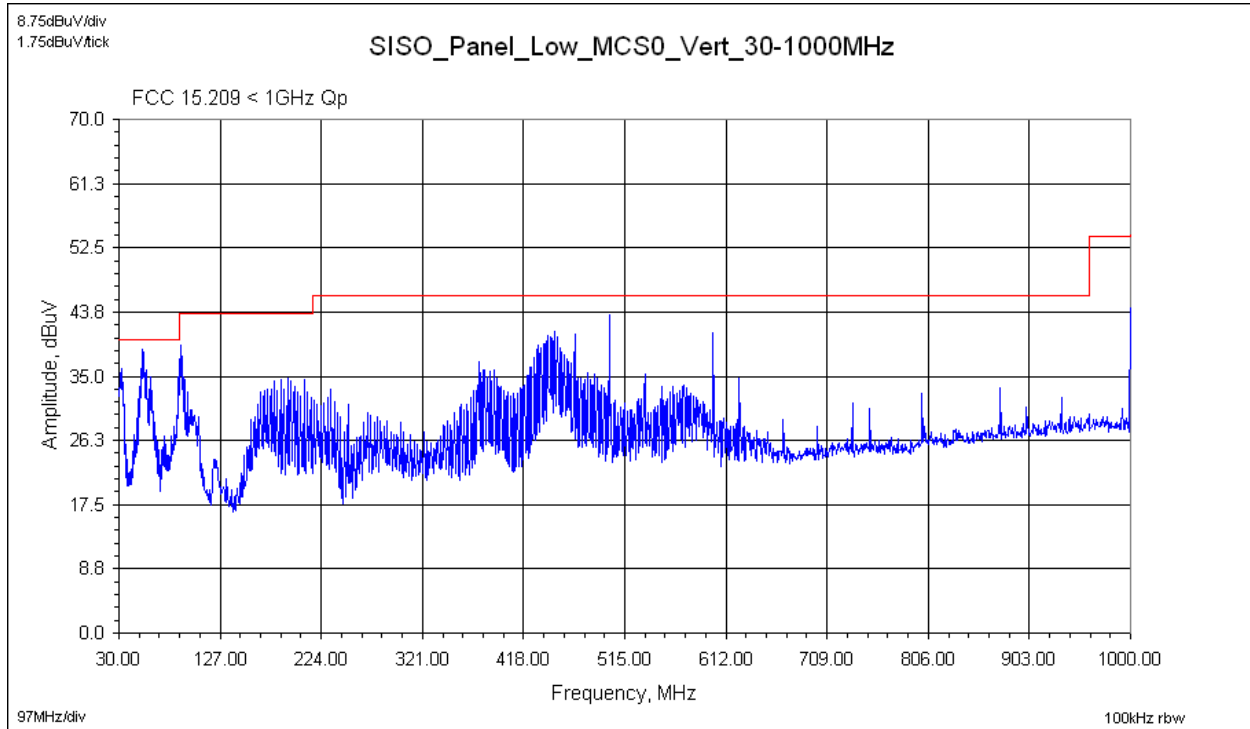

Horizontal Antenna

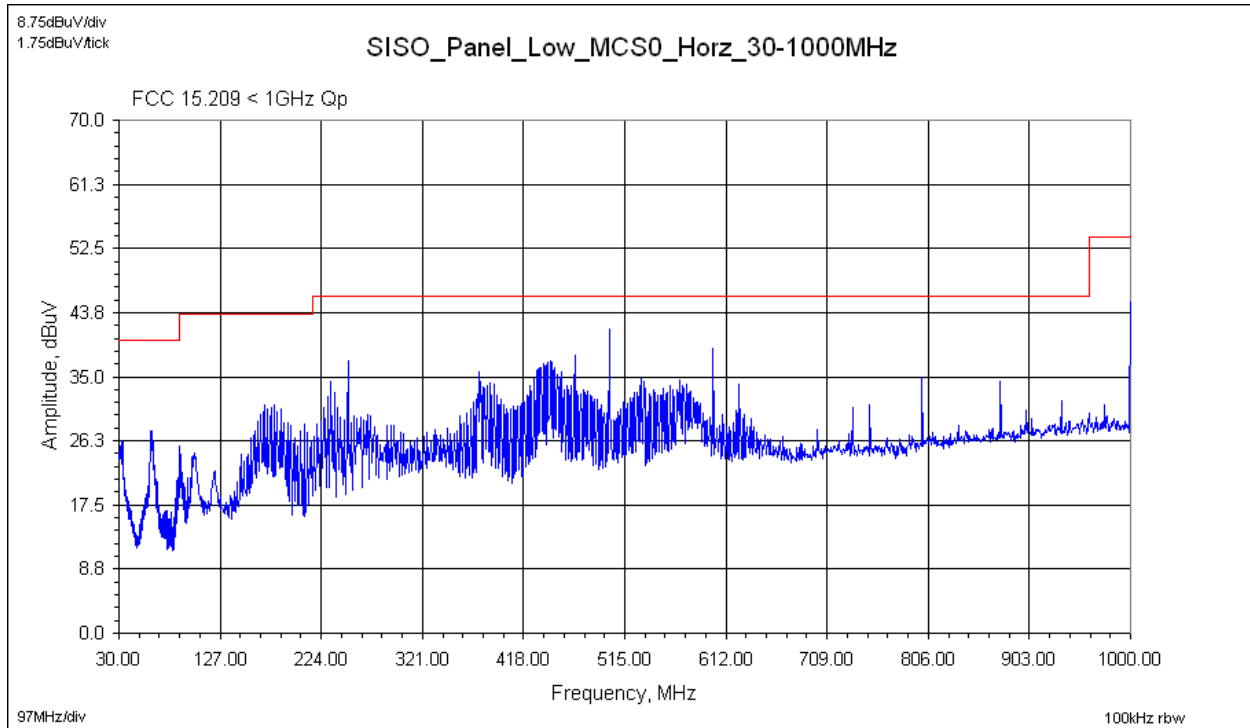


Reference only – max hold peak detector measurements referenced to quasi-peak limits


11.13 Plots: SISO Mode of Operation – HT20 Mid Channel: 5785 MHz

30MHz to 1000MHz

Vertical Antenna

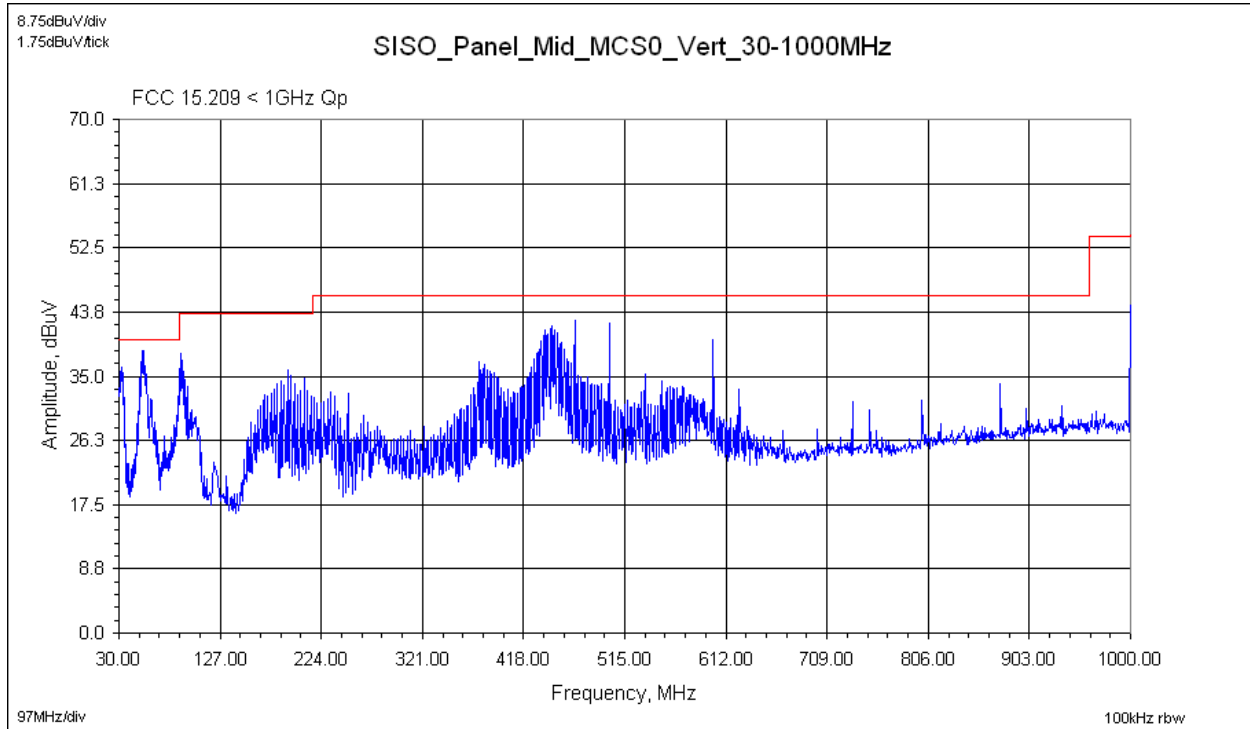

Horizontal Antenna

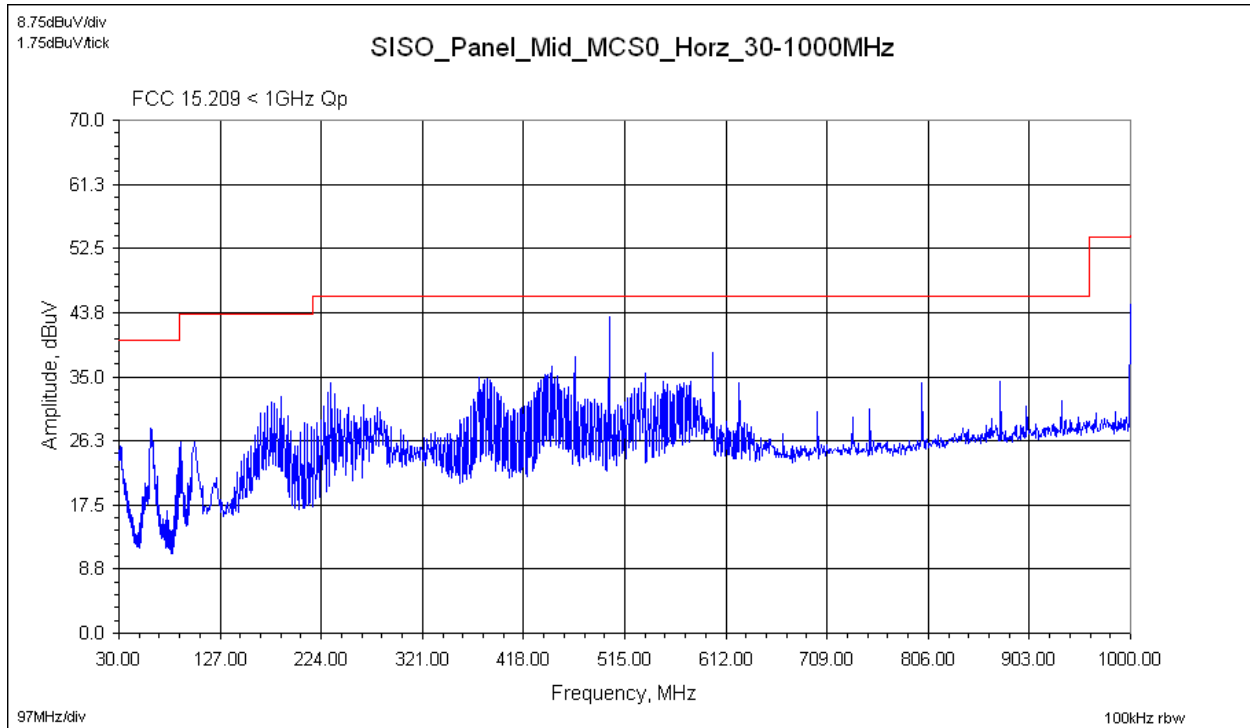


Reference only – max hold peak detector measurements referenced to quasi-peak limits


11.14 Plots: SISO Mode of Operation – HT20 High Channel: 5825 MHz

30MHz to 1000MHz

Vertical Antenna

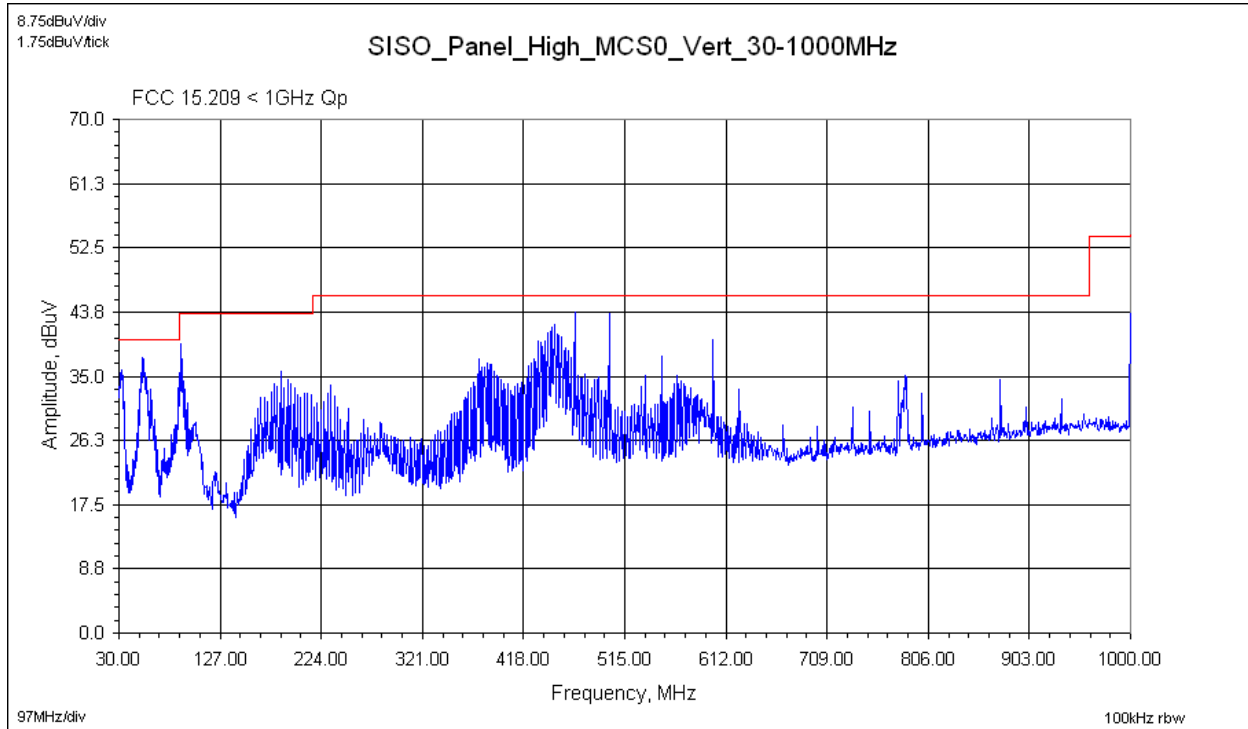

Horizontal Antenna

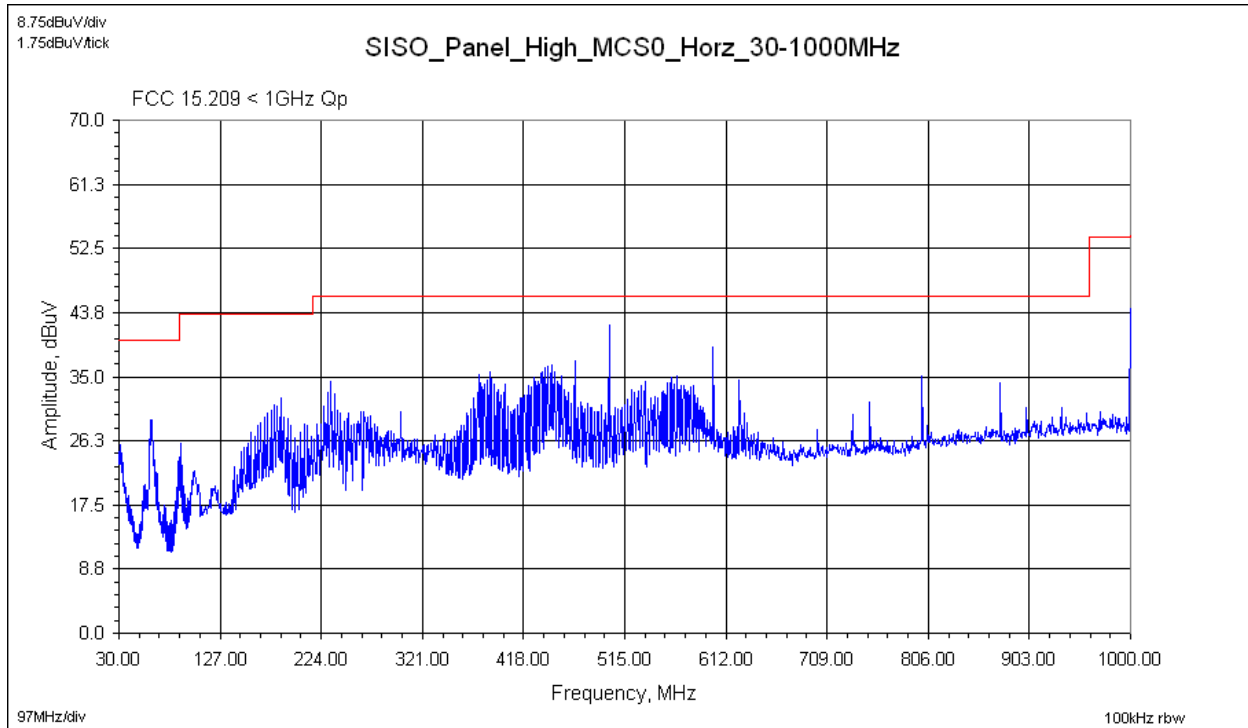


Reference only – max hold peak detector measurements referenced to quasi-peak limits


11.15 Plots: SISO Mode of Operation – HT40 Channel: 5765 MHz

30MHz to 1000MHz

Vertical Antenna

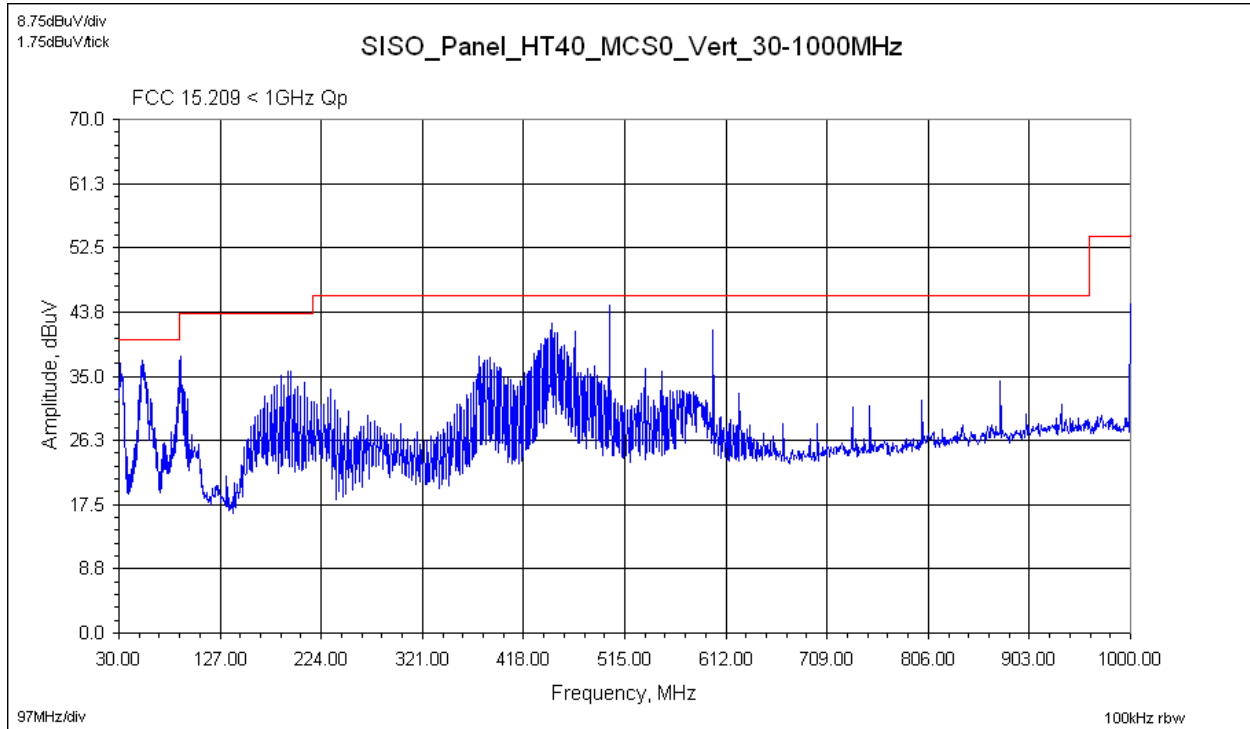

Horizontal Antenna

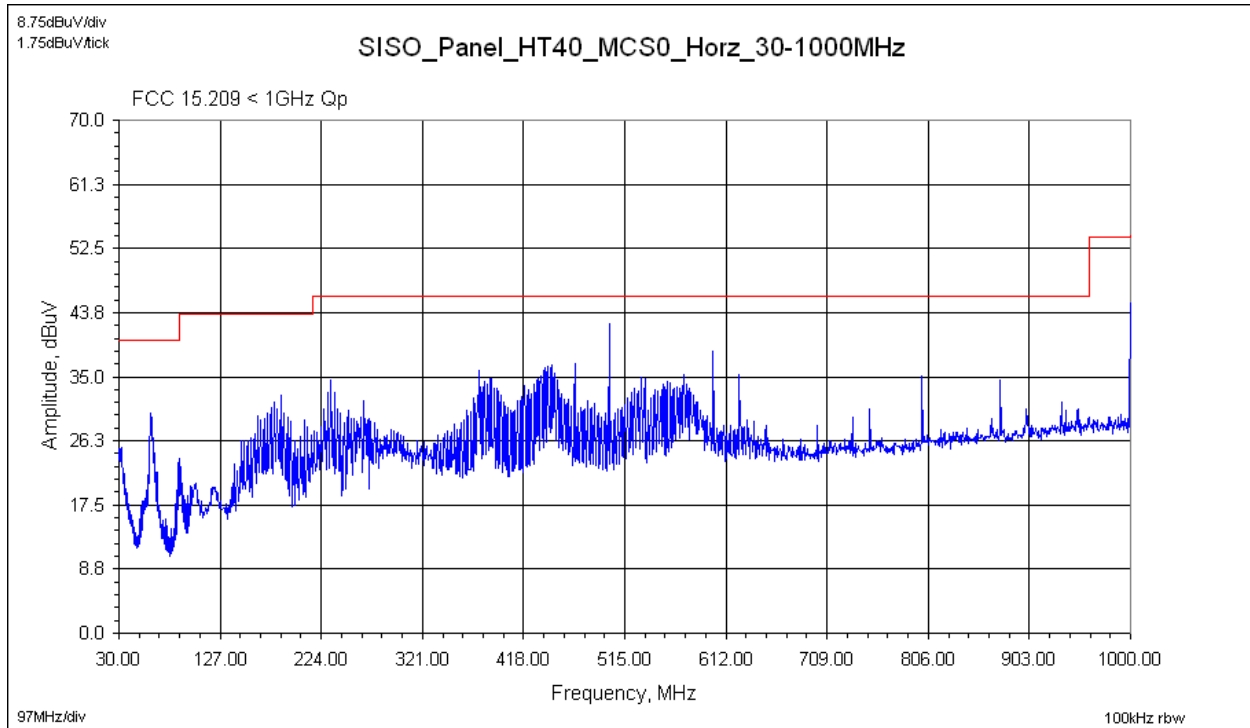


Reference only – max hold peak detector measurements referenced to quasi-peak limits


11.16 Plots: SISO Mode of Operation – HT20 Low Channel: 5745 MHz

1GHz to 18GHz

Vertical Antenna

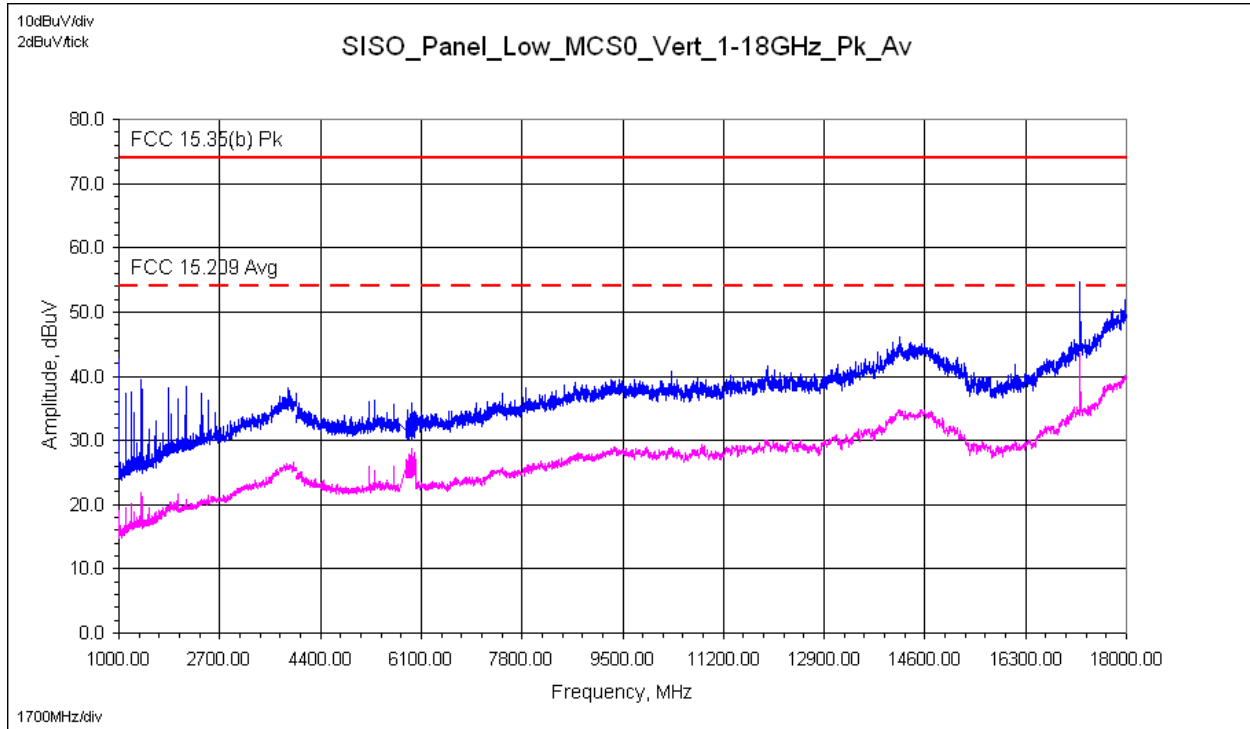

Horizontal Antenna

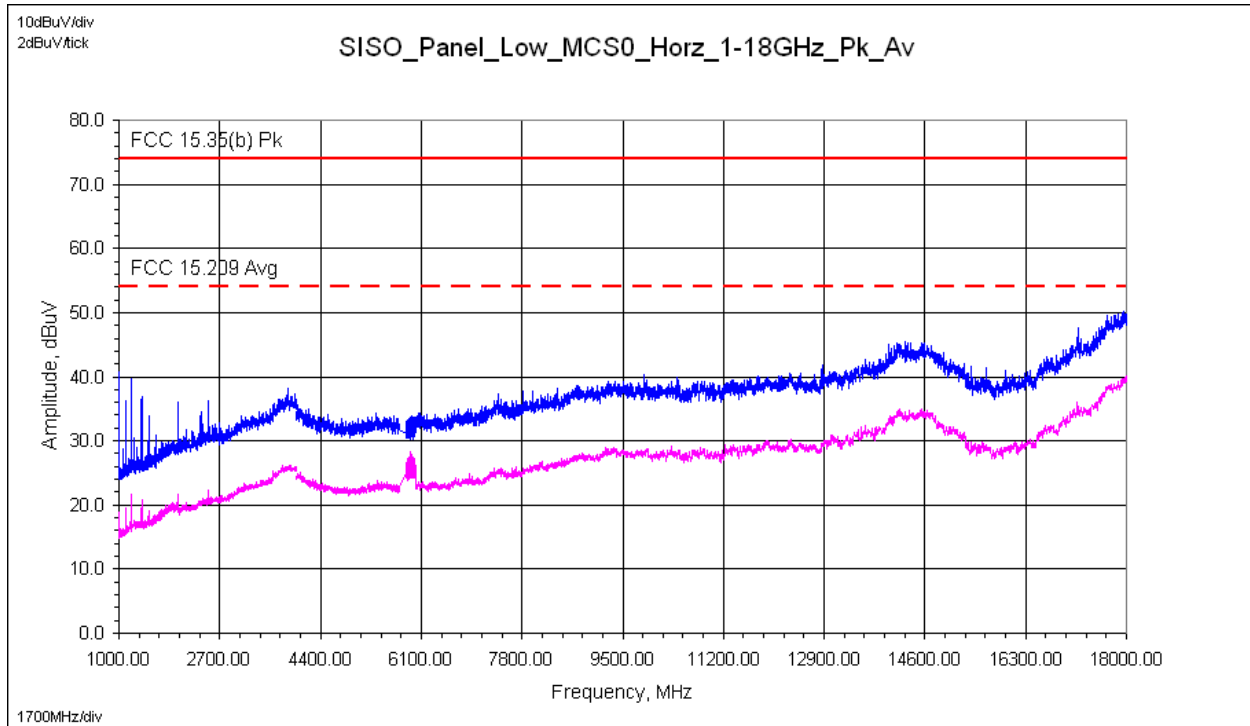


Reference only – max hold peak detector measurements referenced to average & peak limits


11.17 Plots: SISO Mode of Operation – HT20 Mid Channel: 5785 MHz

1GHz to 18GHz

Vertical Antenna

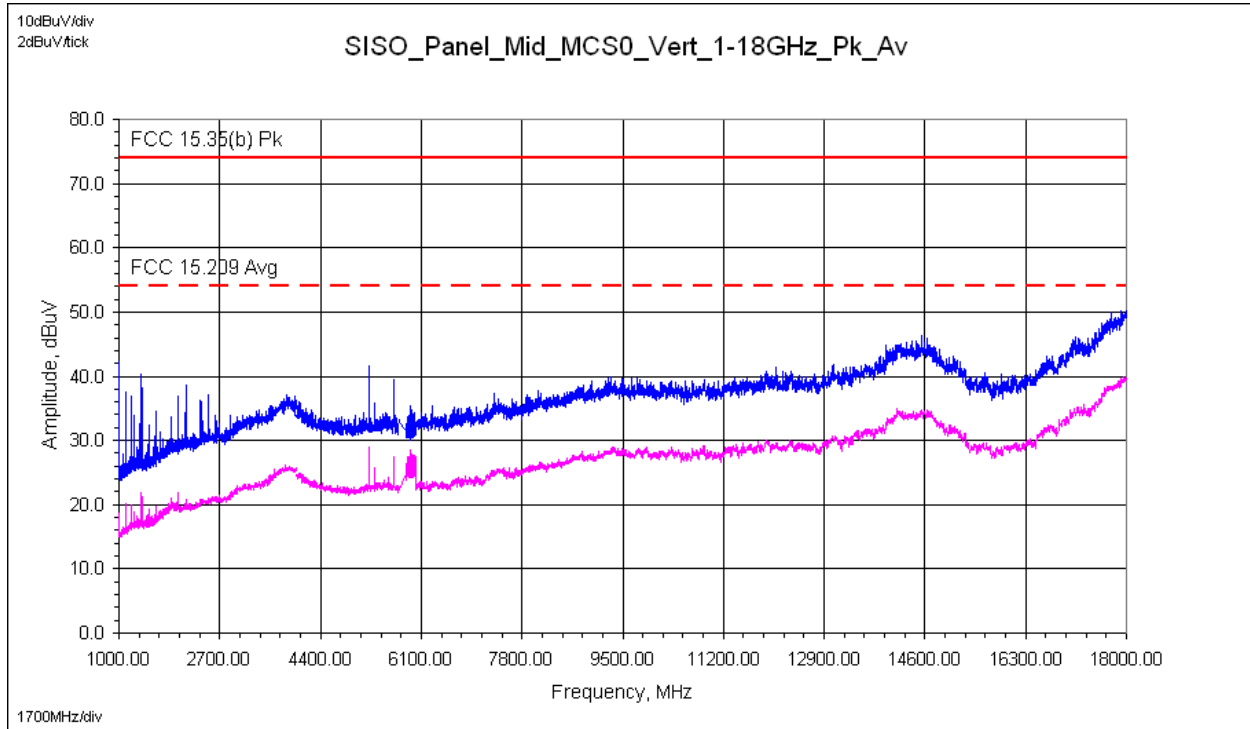

Horizontal Antenna

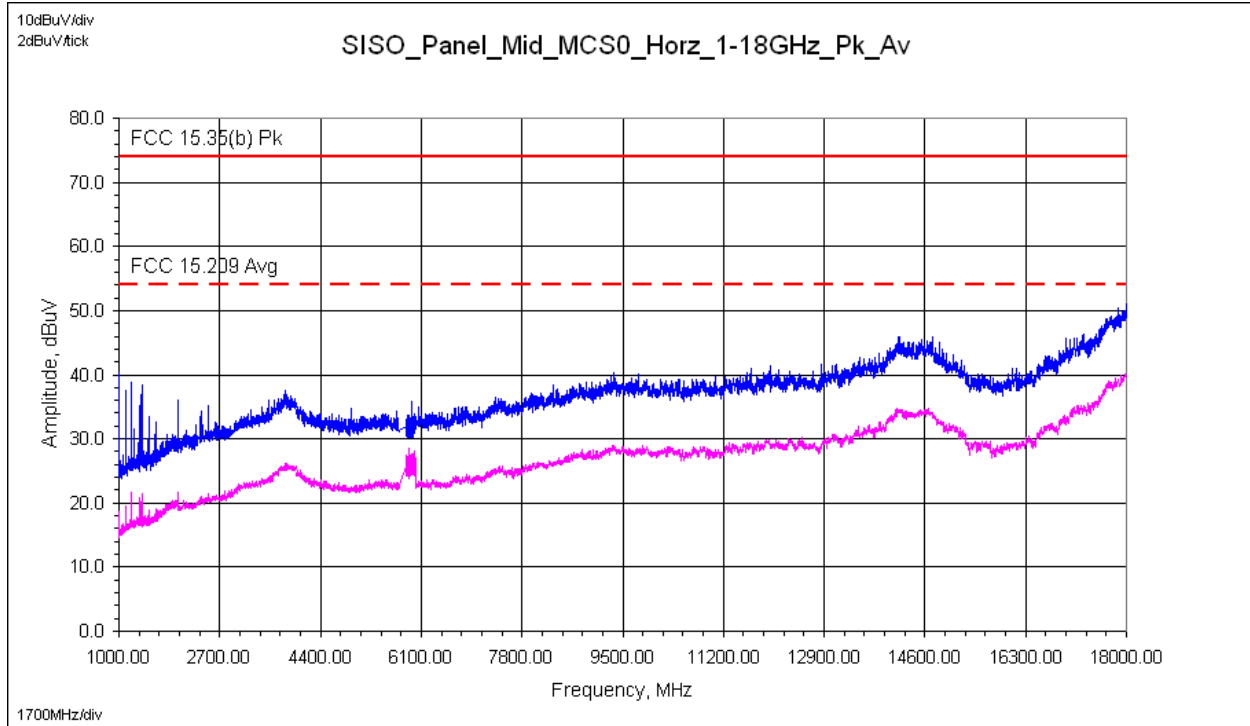


Reference only – max hold peak detector measurements referenced to average & peak limits


11.18 Plots: SISO Mode of Operation – HT20 High Channel: 5825 MHz

1GHz to 18GHz

Vertical Antenna

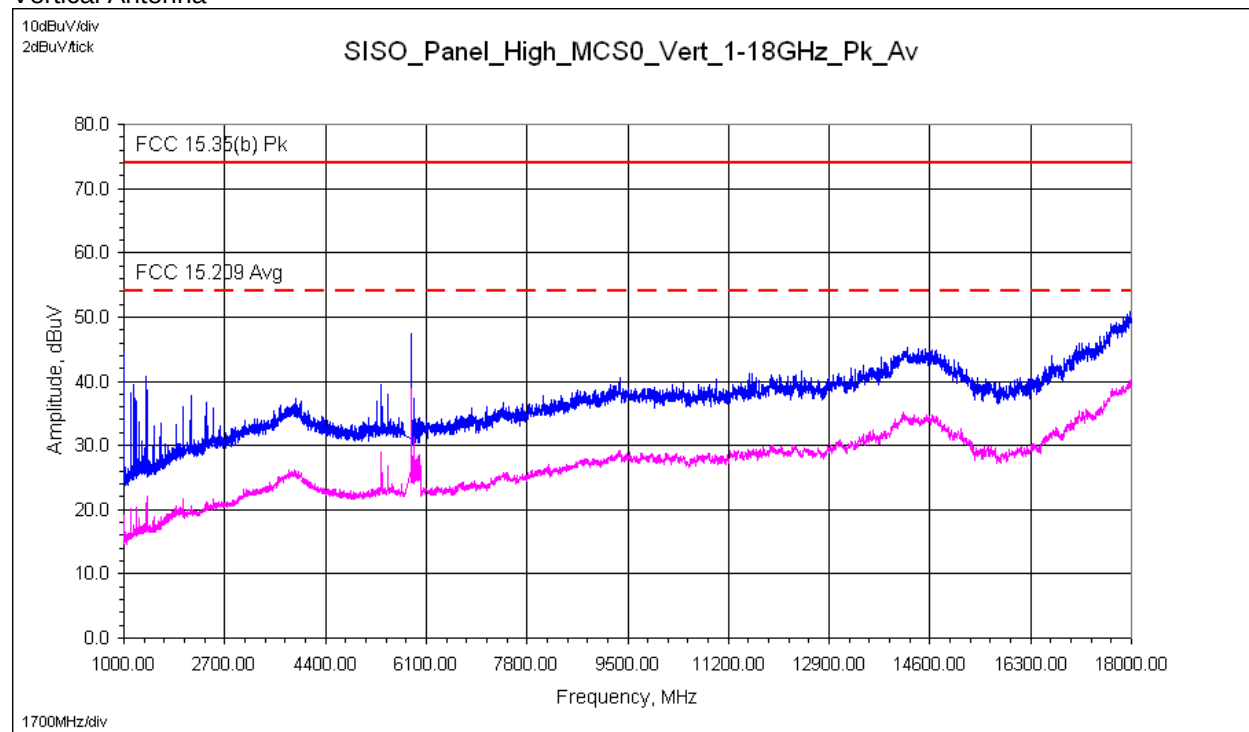

Horizontal Antenna

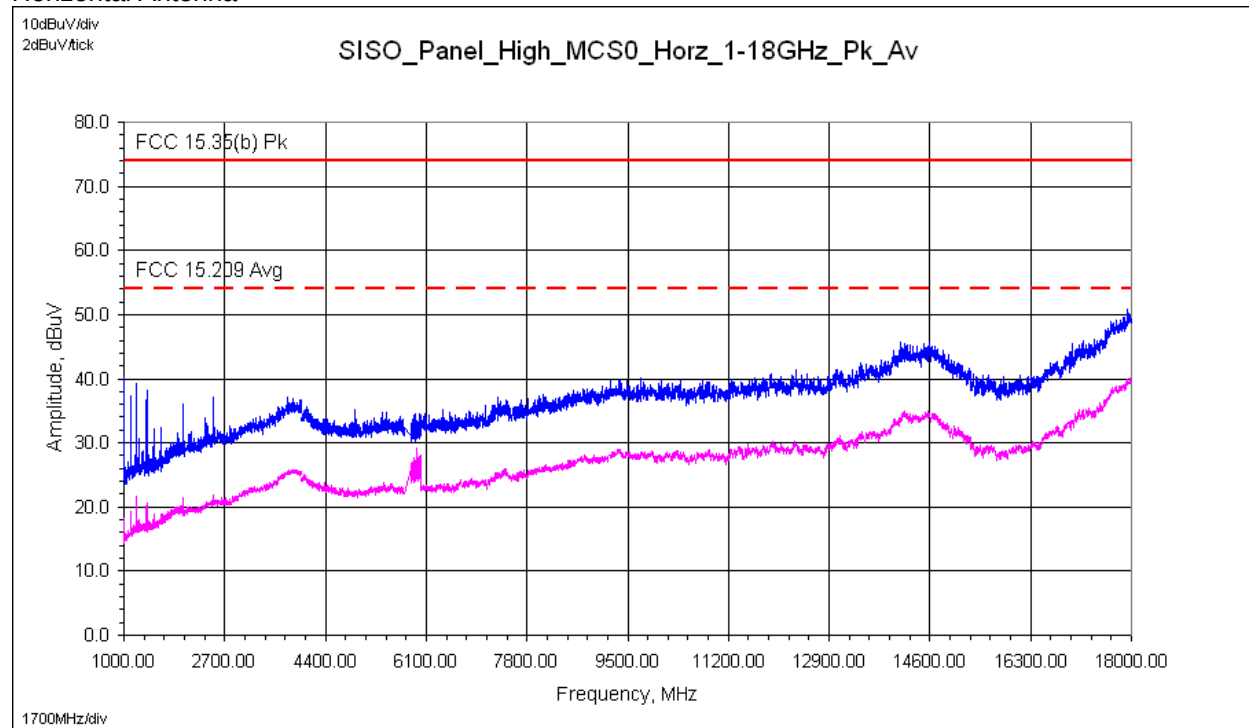


Reference only – max hold peak detector measurements referenced to average & peak limits


11.19 Plots: SISO Mode of Operation – HT40 Low Channel: 5765 MHz

1GHz to 18GHz

Vertical Antenna

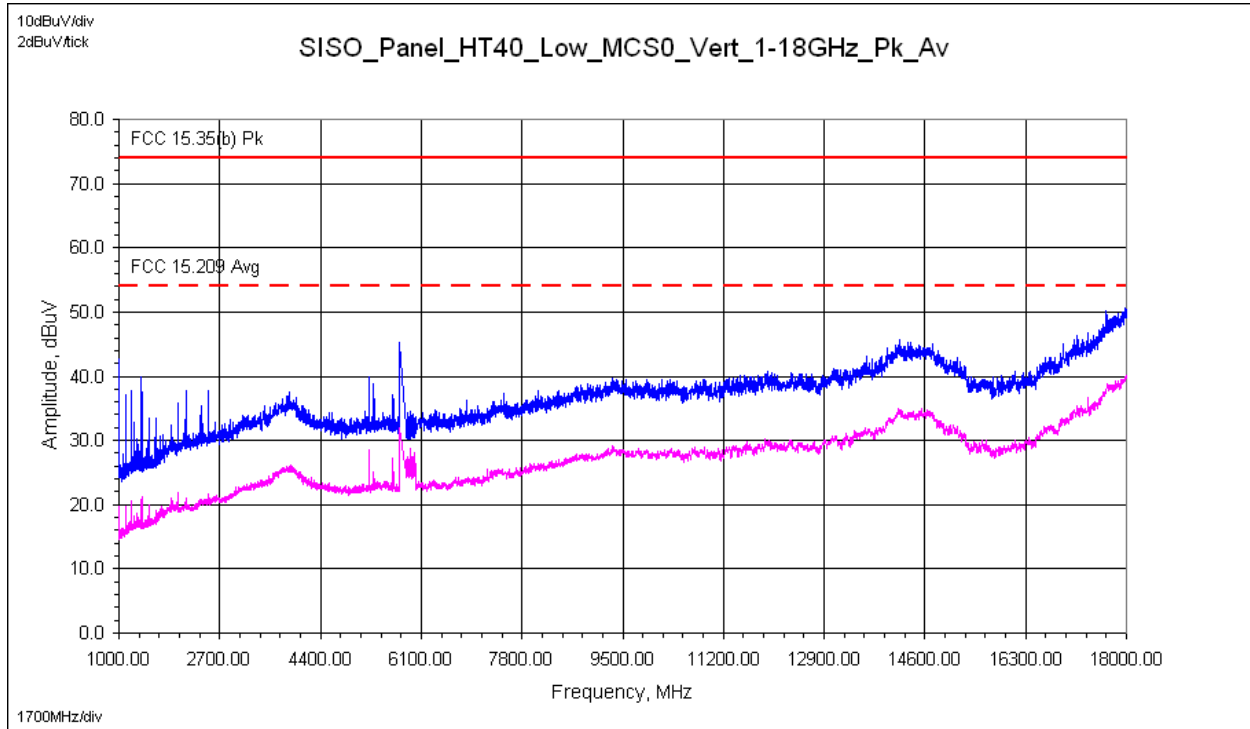

Horizontal Antenna

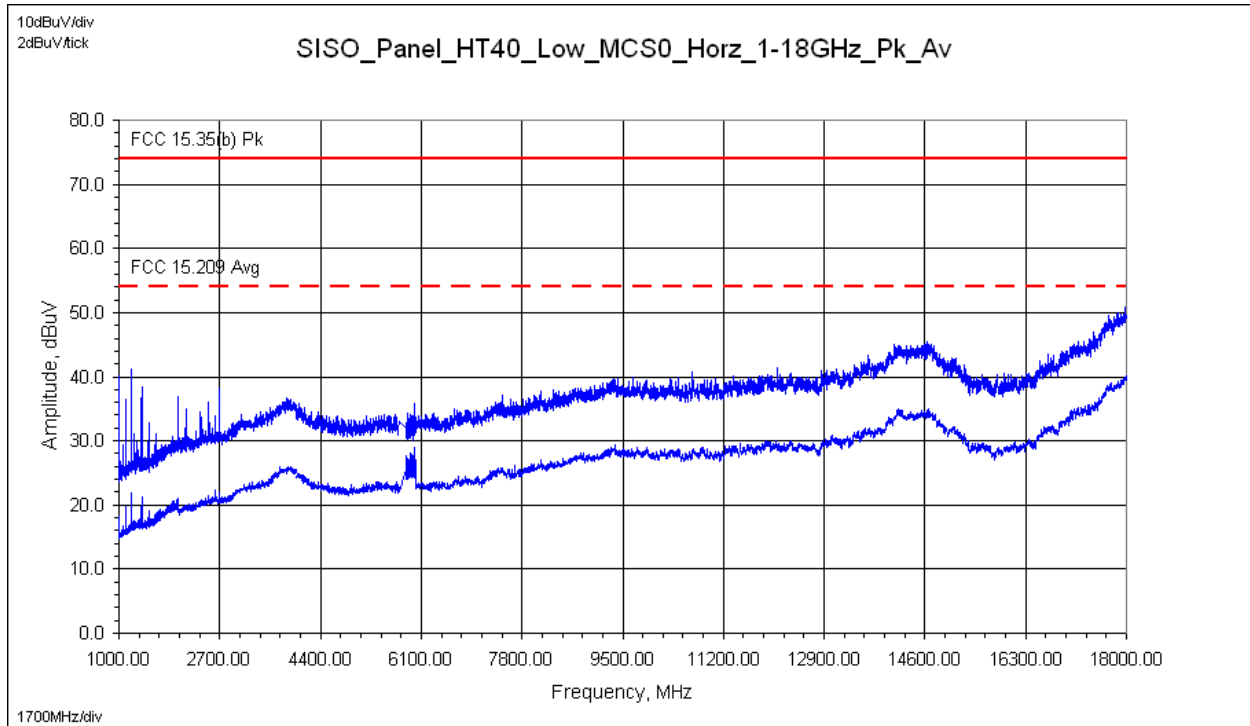


Reference only – max hold peak detector measurements referenced to average & peak limits


11.20 Plots: SISO Mode of Operation – HT40 High Channel: 5785 MHz

1GHz to 18GHz

Vertical Antenna

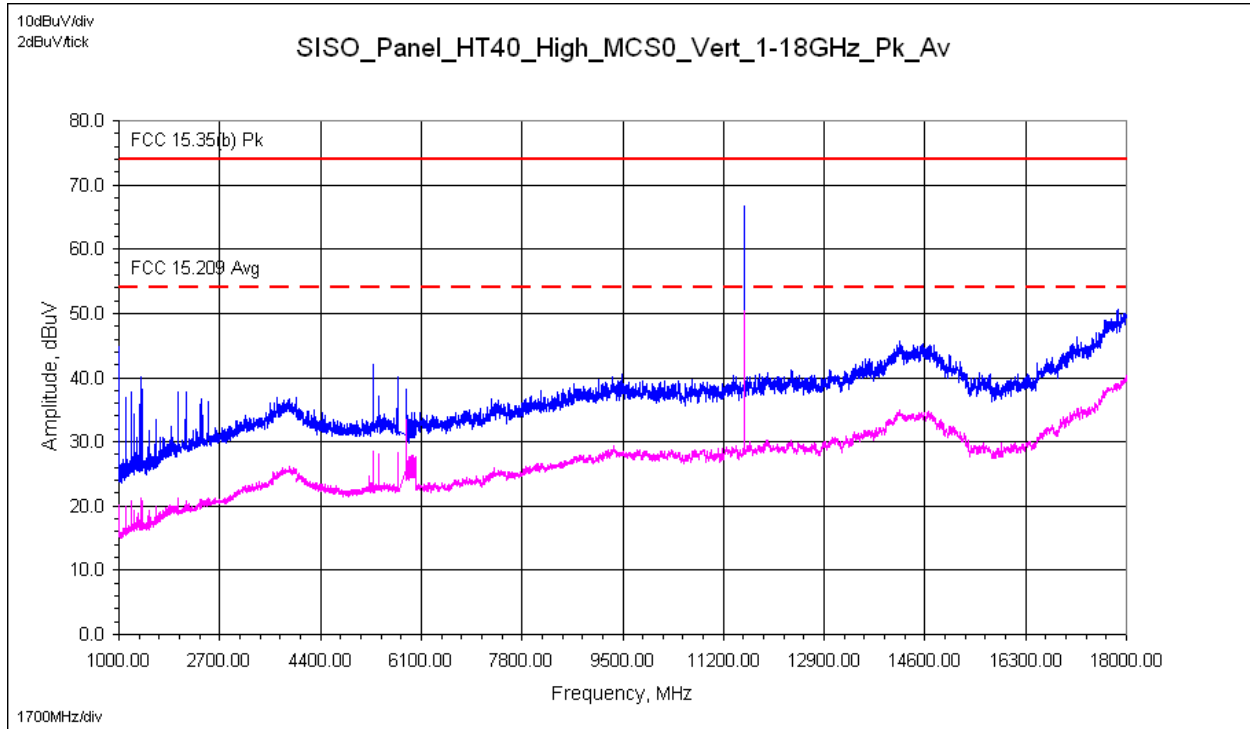

Horizontal Antenna

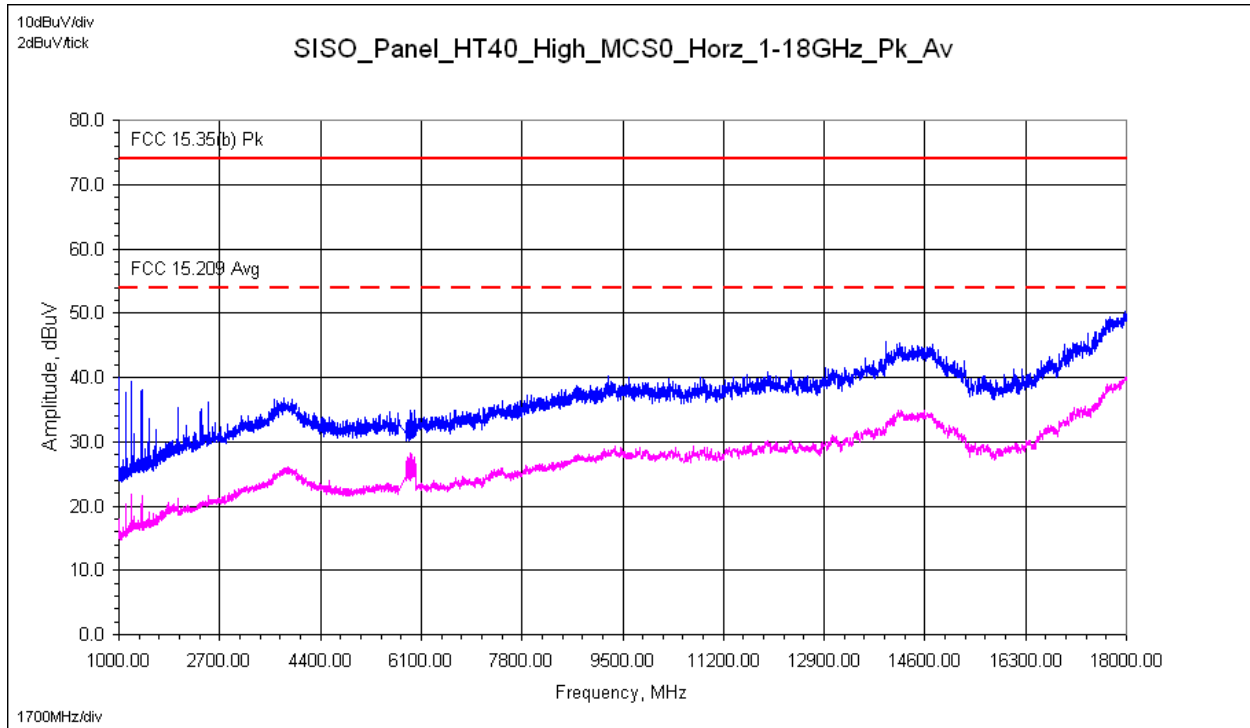

Reference only – max hold peak detector measurements referenced to average & peak limits

11.21 Test Data: SISO Mode of Operation

Tx Spurious Radiated Electromagnetic Emissions

Test Report #: G101503607	Test Area: CC1 Radiated	Temperature: <u>23.5</u> °C
Test Method: FCC 15.209/ 15.205/ 15.35(b)	Test Date: <u>02/12/2014</u> <u>02/13/2014</u>	Relative Humidity: <u>37.2</u> %
EUT Model #: Radio Module: W5800-01 Directional Panel Antenna: FP2-5-28	EUT Power: <u>120VAC/60Hz</u>	Air Pressure: <u>83.1</u> kPa
EUT Serial #: Radio Module: DEN1402111313 Directional Panel Antenna(s): 40266		

Manufacturer: FreeWave Technologies, Inc.

EUT Description: PCIe Radio Module

Notes: Product tested in SISO mode: single transmit chain/port – single antenna

Product continuously transmitting during all testing – worst-case modulation/data

SISO mode of Operation, MCS0 Data Rate, 27dBm power (worst-case)

Level Key
Pk – Peak
Qp – Quasi Peak
Av - Average

Freq	Level	Det	Cable	Ant	Preamp	Atten	Final	Pol	Hgt	Az	Delta1	Delta2	RBW
MHz	dBuV	Qp Av Pk	+ [dB]	+ [dB/m]	- [dB]	+ [dB]	= [dBuV]	(V/H)	(m)	(DEG)	FCC 15.209 Avg	FCC 15.35(b) Pk	(MHz)
Radio System: Model W5800-01 Radio Module with Directional Panel Antenna – SISO Mode of Operation													
Measurements: 1GHz to 18GHz – 802.11 a/n HT20													
1000.0100	60.46	Pk	2.21	23.82	37.13	0.00	49.36	V	1.34	175.0	N/A	- 24.64	1.000
1000.0100	54.10	Av	2.21	23.82	37.13	0.00	43.00	V	1.34	175.0	- 10.98	NA	1.000
1124.9800	53.18	Pk	2.36	24.63	37.26	0.00	42.91	V	1.80	176.0	N/A	- 31.09	1.000
1124.9800	45.47	Av	2.36	24.63	37.26	0.00	35.20	V	1.80	176.0	- 18.78	NA	1.000
1199.9600	56.19	Pk	2.44	25.07	37.18	0.00	46.51	V	1.17	80.0	N/A	- 27.49	1.000
1199.9600	46.34	Av	2.44	25.07	37.18	0.00	36.66	V	1.17	80.0	- 17.32	NA	1.000
1374.9600	55.93	Pk	2.61	25.13	36.76	0.00	46.91	V	1.17	72.0	N/A	- 27.09	1.000
1374.9600	46.89	Av	2.61	25.13	36.76	0.00	37.87	V	1.17	72.0	- 16.11	NA	1.000
1400.0000	51.48	Pk	2.63	25.09	36.71	0.00	42.49	H	2.31	0.0	N/A	- 31.51	1.000
1400.0000	46.98	Av	2.63	25.09	36.71	0.00	37.99	H	2.31	0.0	- 15.99	NA	1.000
5314.8080	53.85	Av	5.43	34.04	42.87	0.00	50.44	V	1.49	5.0	- 3.54	NA	1.000
5314.8080	59.29	Pk	5.43	34.04	42.87	0.00	55.88	V	1.49	5.0	N/A	- 18.12	1.000
11570.0000	51.33	Av	8.49	38.96	47.26	0.00	51.52	V	1.53	8.0	- 2.46	NA	1.000
11570.0000	61.05	Pk	8.49	38.96	47.26	0.00	61.24	V	1.53	8.0	N/A	- 12.76	1.000
5235.6970	46.95	Av	5.38	33.93	42.37	0.00	43.89	H	1.43	6.0	- 10.09	NA	1.000
5235.6970	54.19	Pk	5.38	33.93	42.37	0.00	51.13	H	1.41	0.0	N/A	- 22.87	1.000
Measurements: 1GHz to 18GHz – 802.11n HT40													
1000.0030	60.62	Pk	2.21	23.82	37.13	0.00	49.52	V	1.33	168.0	N/A	- 24.48	1.000
1000.0030	53.88	Av	2.21	23.82	37.13	0.00	42.78	V	1.33	168.0	- 11.20	NA	1.000
1199.9700	56.95	Pk	2.44	25.07	37.18	0.00	47.27	V	1.13	80.0	N/A	- 26.73	1.000
1199.9700	46.38	Av	2.44	25.07	37.18	0.00	36.70	V	1.13	80.0	- 17.28	NA	1.000
1374.9700	53.89	Pk	2.61	25.13	36.76	0.00	44.87	V	1.21	69.0	N/A	- 29.13	1.000
1374.9700	46.93	Av	2.61	25.13	36.76	0.00	37.91	V	1.21	69.0	- 16.07	NA	1.000
1199.9700	65.78	Pk	2.44	25.07	37.18	0.00	56.10	H	2.37	9.0	N/A	- 17.90	1.000
1199.9700	42.85	Av	2.44	25.07	37.18	0.00	33.17	H	2.37	9.0	- 20.81	NA	1.000

1400.0000	53.31	Pk	2.63	25.09	36.71	0.00	44.32	H	2.29	2.0	N/A	- 29.68	1.000
1400.0000	48.11	Av	2.63	25.09	36.71	0.00	39.12	H	2.29	2.0	- 14.86	NA	1.000
17355.0000	40.43	Av	10.72	43.14	46.02	0.00	48.27	V	1.44	7.0	- 5.71	NA	1.000
17355.0000	49.81	Pk	10.72	43.14	46.02	0.00	57.65	V	1.44	7.0	N/A	- 16.35	1.000

Note: Signals in yellow highlight – harmonics in restricted band

Example calculation:

Measure d Level	+	Cable Loss	+	Antenna Factor	-	Pre- Amp	+	Atten	=	Final Correcte d Reading	Specificatio n Limit	-	Final Correcte d Reading	=	Delta Specificatio n
(dBμV)		(dB)		(dB)		(dB)		(dB)		(dBμV/m)	(dBμV/m)		(dBμV/m)		
20.0		3.0		5.0		10.0		0.0		18.0	40.0		18.0		- 22.0


Notes:

- 1) The highest signals – as determined from pre-scan plots – were fully-maximized and measured.
- 2) For the general pre-scan plots, a notch filter was utilized. Note the notch filter was not used during band edge plots/measurements.
- 3) 802.11 a/n HT20/HT40 included in measurements as well as both SISO/MIMO modes of Tx operation.
- 4) No emissions found >18GHz.


Deviations, Additions, or Exclusions: None

11.22 Band Edge Plots: SISO Mode of Operation – HT20 Low Channel 5745 MHz

Vertical Antenna – Lower Band Edge – Peak Measurements

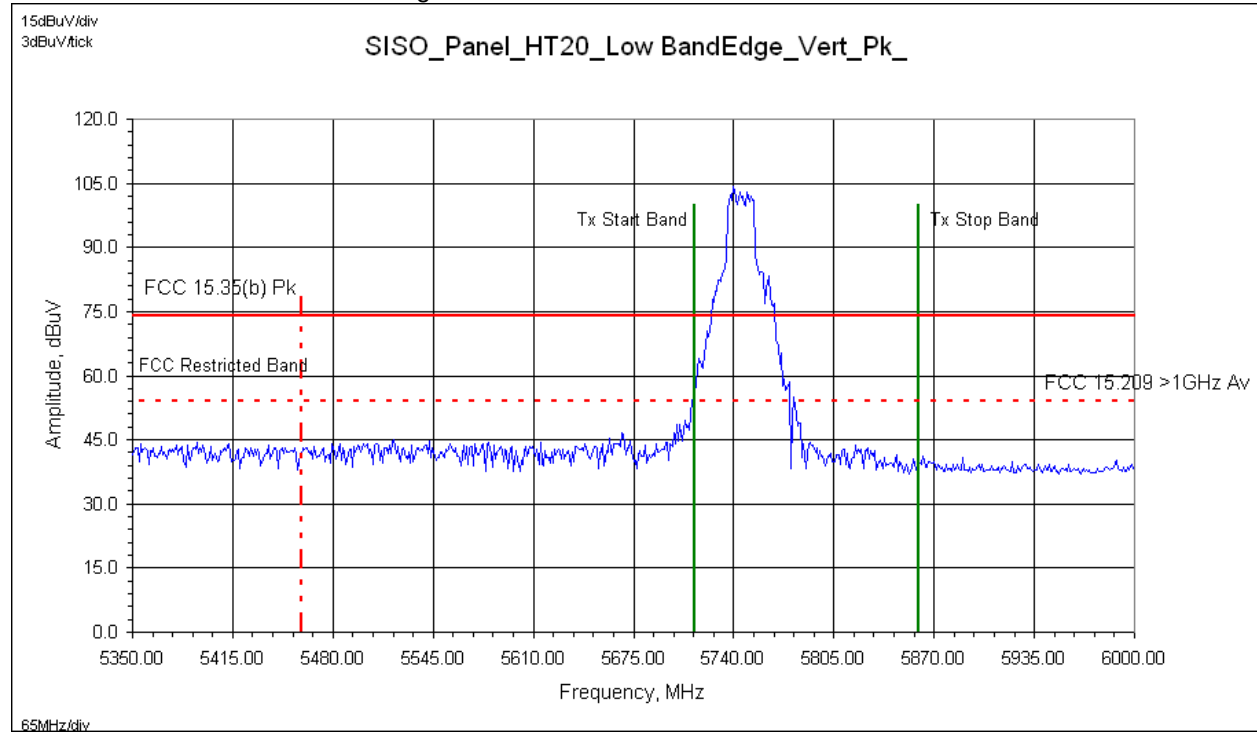

Horizontal Antenna – Lower Band Edge – Peak Measurements

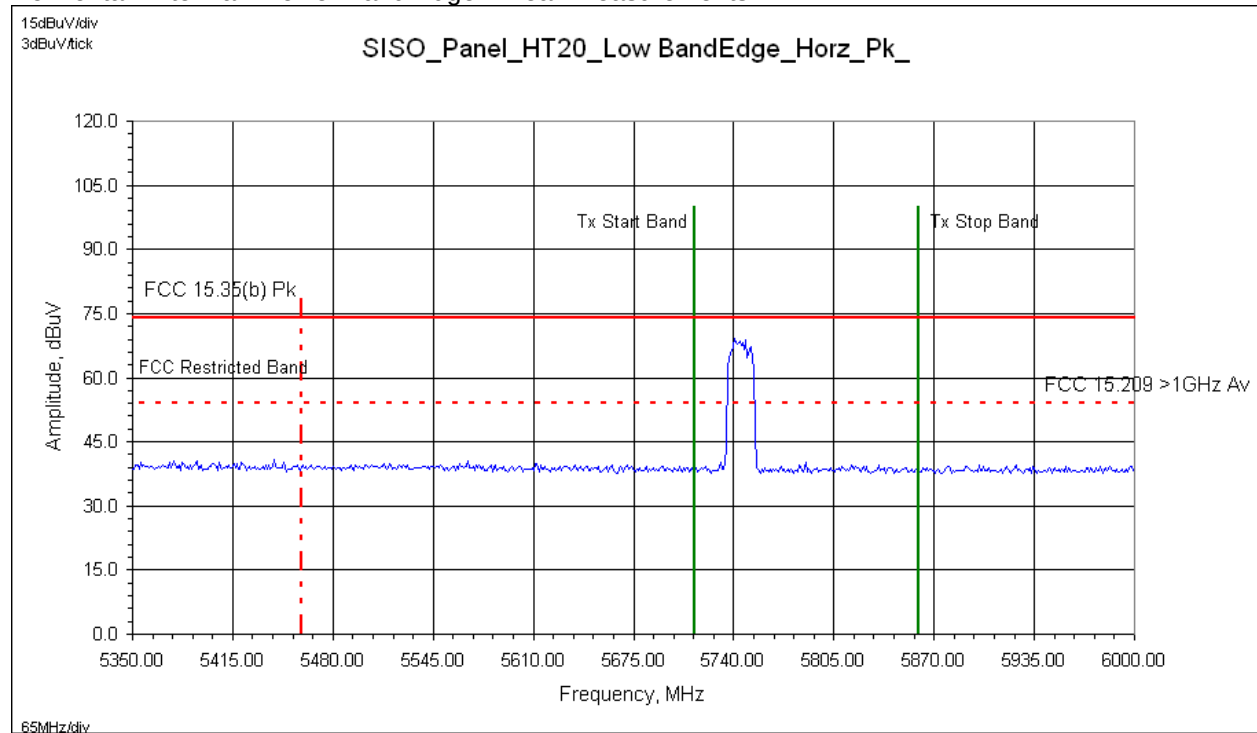


Reference only – max hold peak detector measurements referenced to average & peak limits


Legend: Green Vertical Lines (Tx allowable start/stop band)
Red Vertical Dashed-Lines (Restricted Band start/stop)
Blue Trace (Peak trace line)

11.23 Band Edge Plots: SISO Mode of Operation – HT20 Low Channel 5745 MHz

Vertical Antenna – Lower Band Edge – Average Measurements

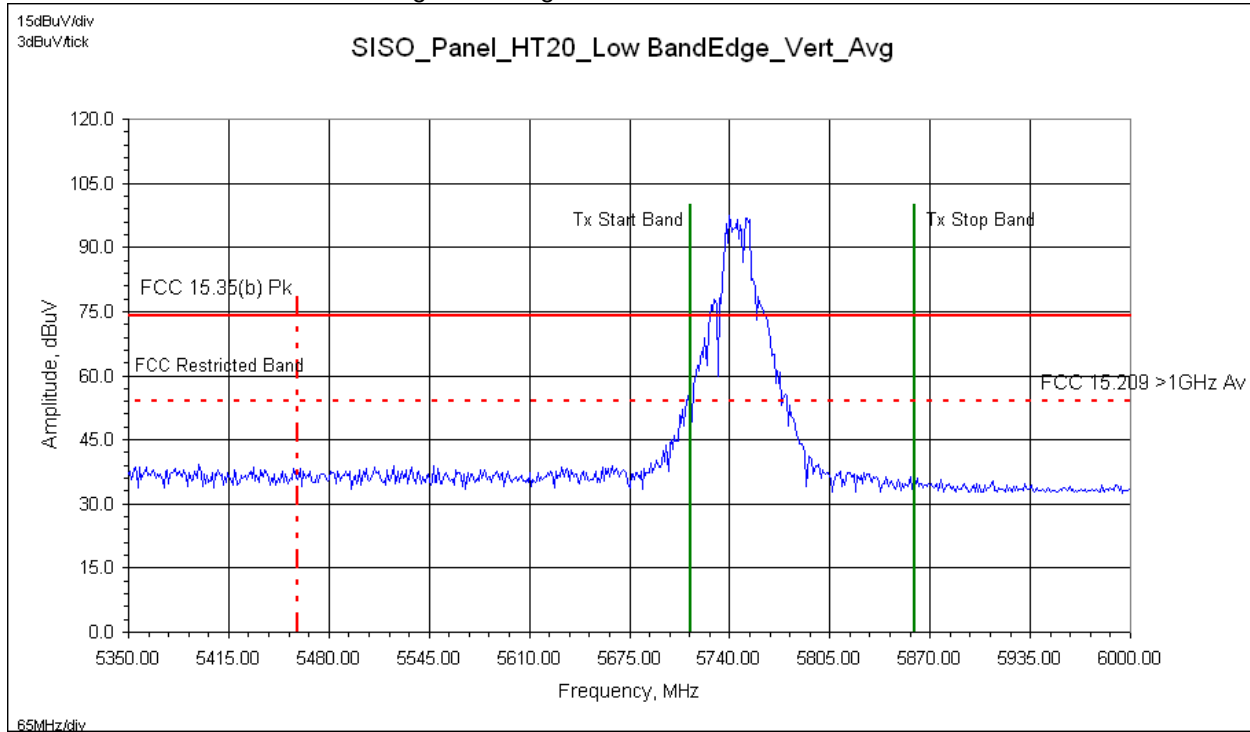

Horizontal Antenna – Lower Band Edge – Average Measurements

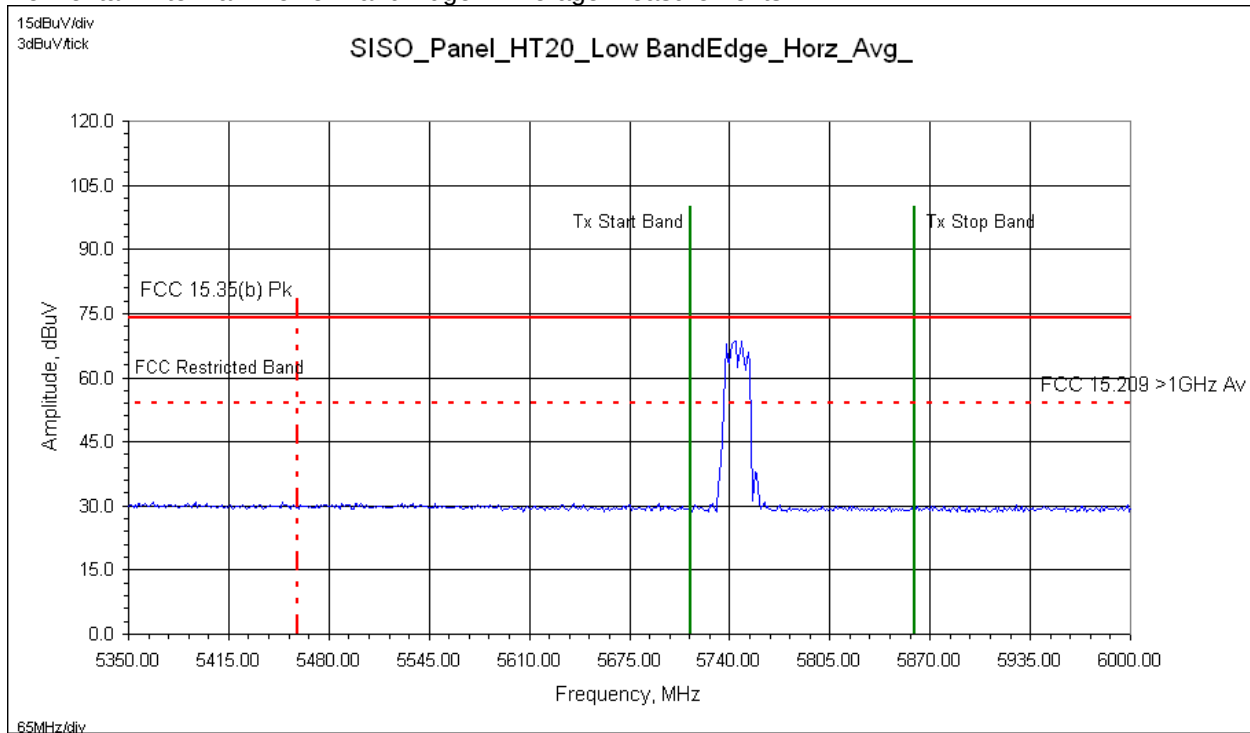


Reference only – max hold peak detector measurements referenced to average & peak limits


Legend: **Green Vertical Lines** (Tx allowable start/stop band)
Red Vertical Dashed-Lines (Restricted Band)
Blue Trace (Average trace line)

11.24 Band Edge Plots: SISO Mode of Operation – HT20 High Channel 5825 MHz

Vertical Antenna – Upper Band Edge – Peak Measurements

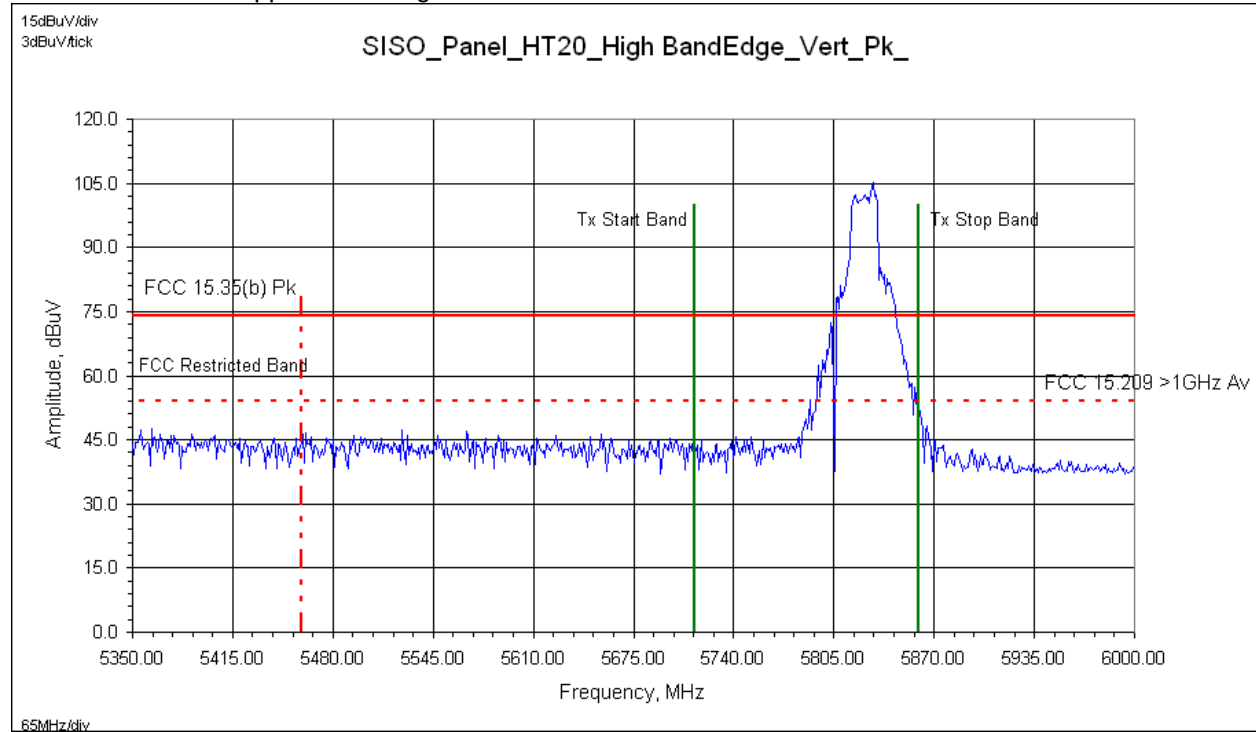

Horizontal Antenna – Upper Band Edge – Peak Measurements

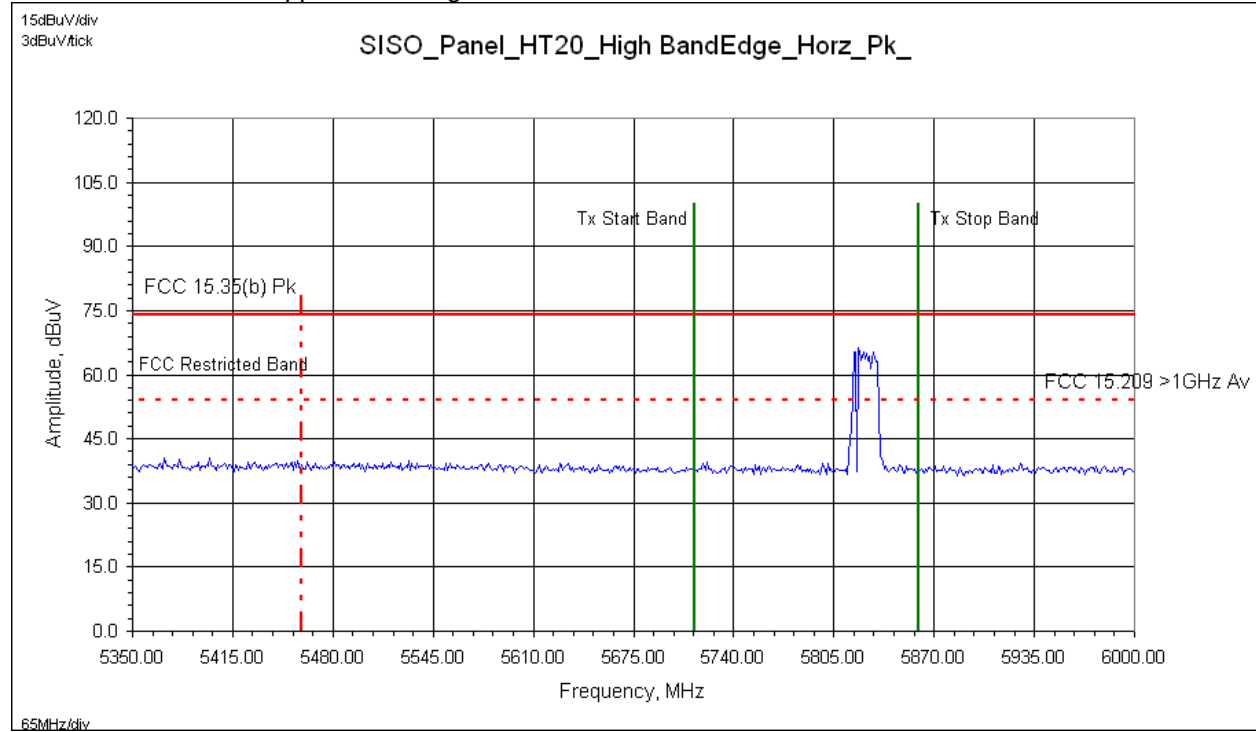


Reference only – max hold peak detector measurements referenced to average & peak limits


Legend: Green Vertical Lines (Tx allowable start/stop band)
Red Vertical Lines (Restricted Band)
Blue Trace (Peak trace line)

11.25 Band Edge Plots: SISO Mode of Operation – HT20 High Channel 5825 MHz

Vertical Antenna – Upper Band Edge – Average Measurements

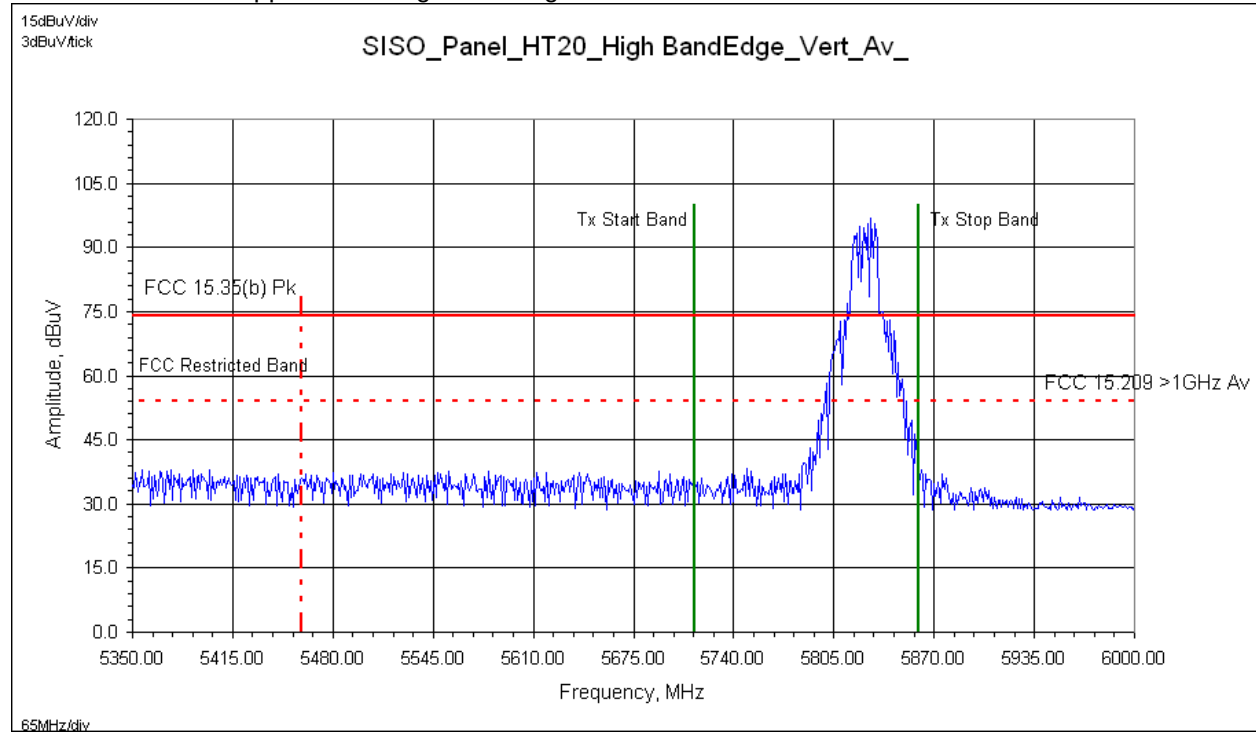

Horizontal Antenna – Upper Band Edge – Average Measurements

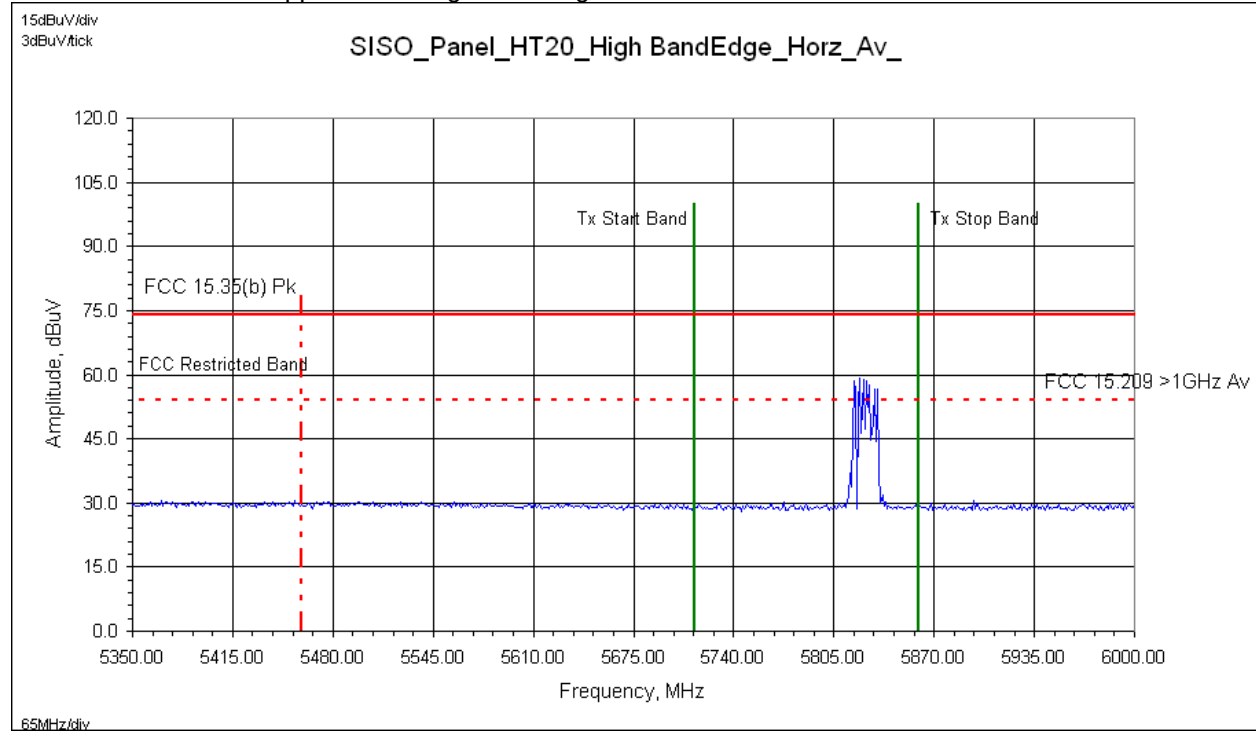


Reference only – max hold peak detector measurements referenced to average & peak limits


Legend: Green Vertical Lines (Tx allowable start/stop band)
Red Vertical Lines (Restricted Band)
Blue Trace (Average trace line)

11.26 Band Edge Plots: SISO Mode of Operation – HT40 Low Channel 5765 MHz

Vertical Antenna – Lower Band Edge – Peak Measurements

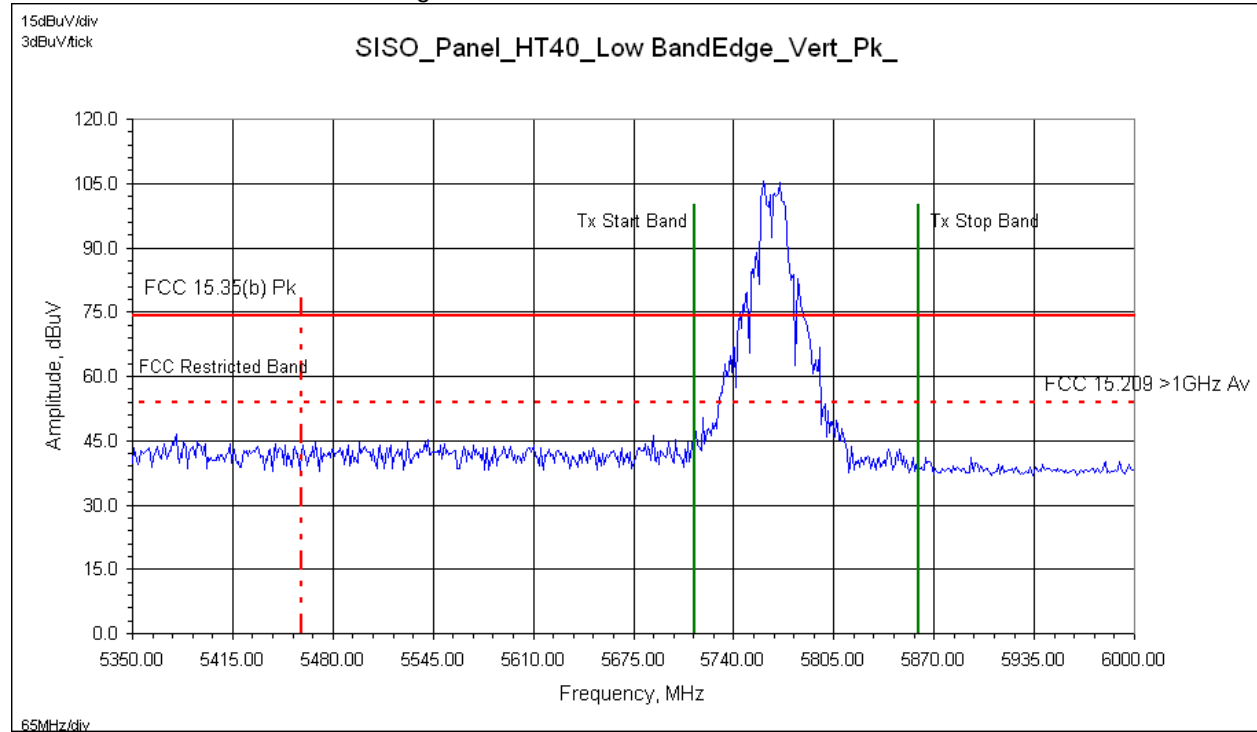

Horizontal Antenna – Lower Band Edge – Peak Measurements

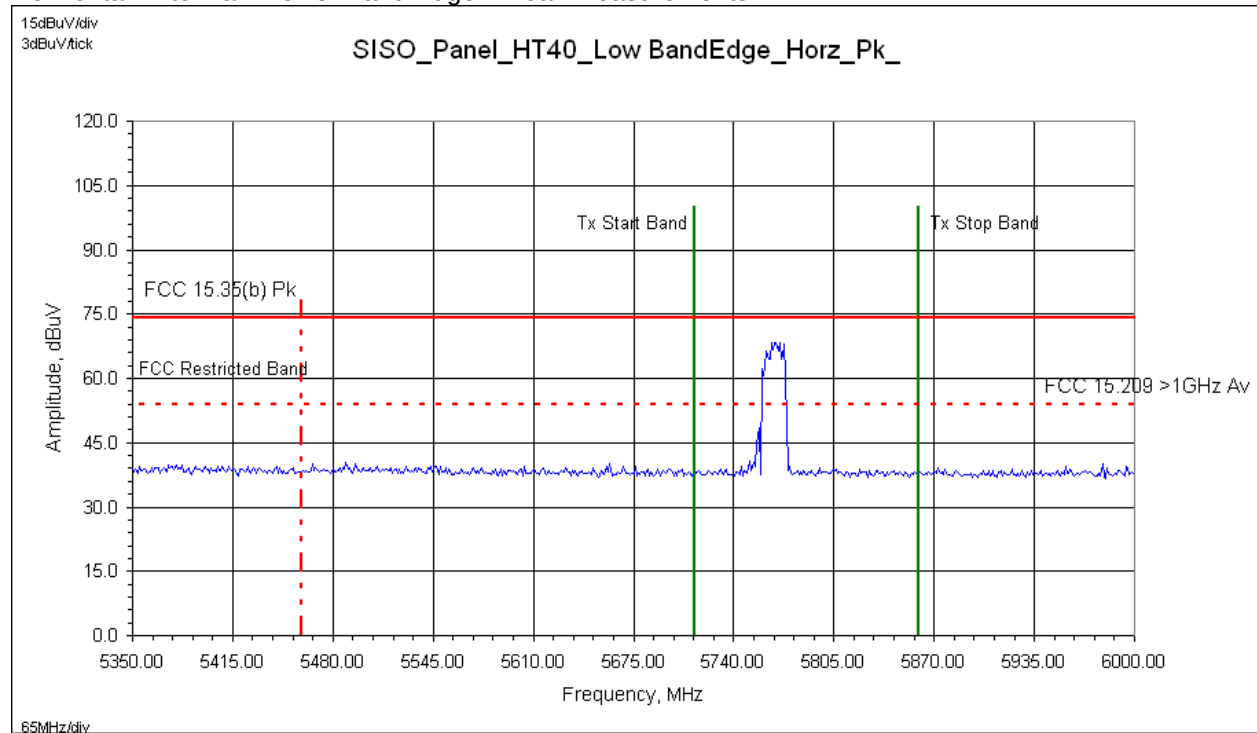


Reference only – max hold peak detector measurements referenced to average & peak limits


Legend: **Green Vertical Lines** (Tx allowable start/stop band)
Red Vertical Lines (Restricted Band)
Blue Trace (Peak trace line)

11.27 Band Edge Plots: SISO Mode of Operation – HT40 Low Channel 5765 MHz

Vertical Antenna – Lower Band Edge – Average Measurements

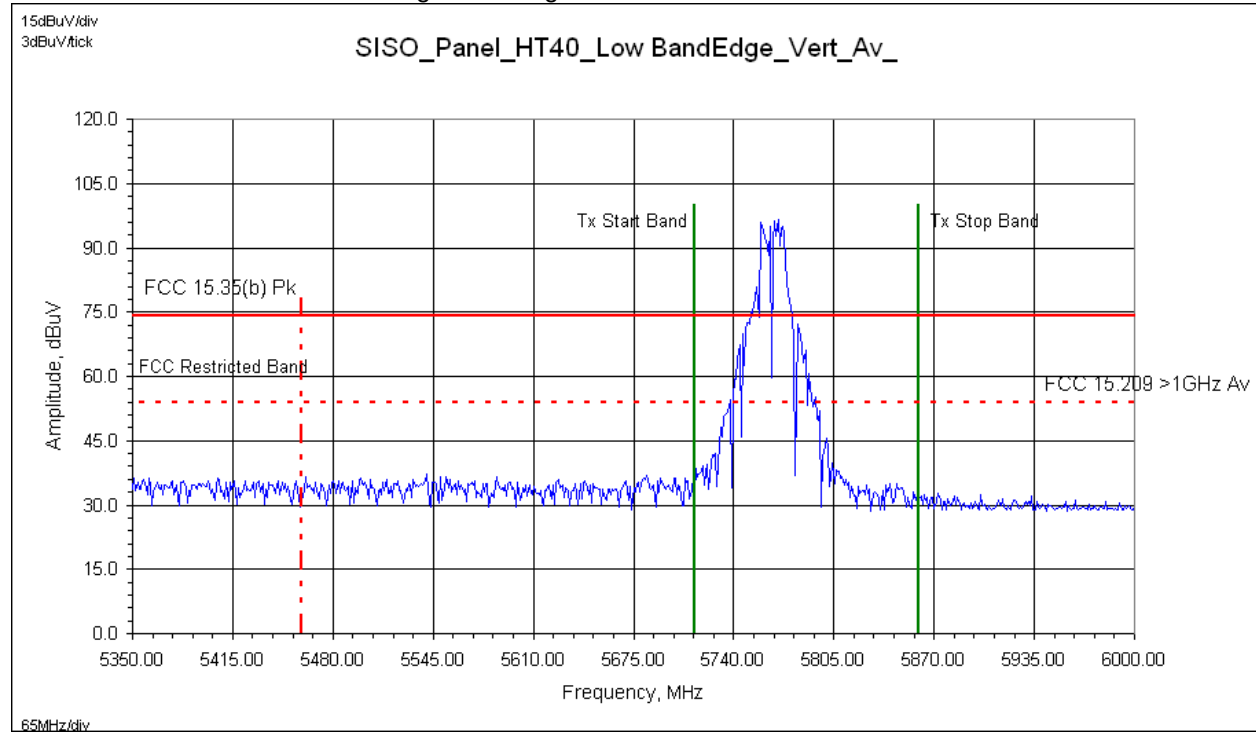

Horizontal Antenna – Lower Band Edge – Average Measurements

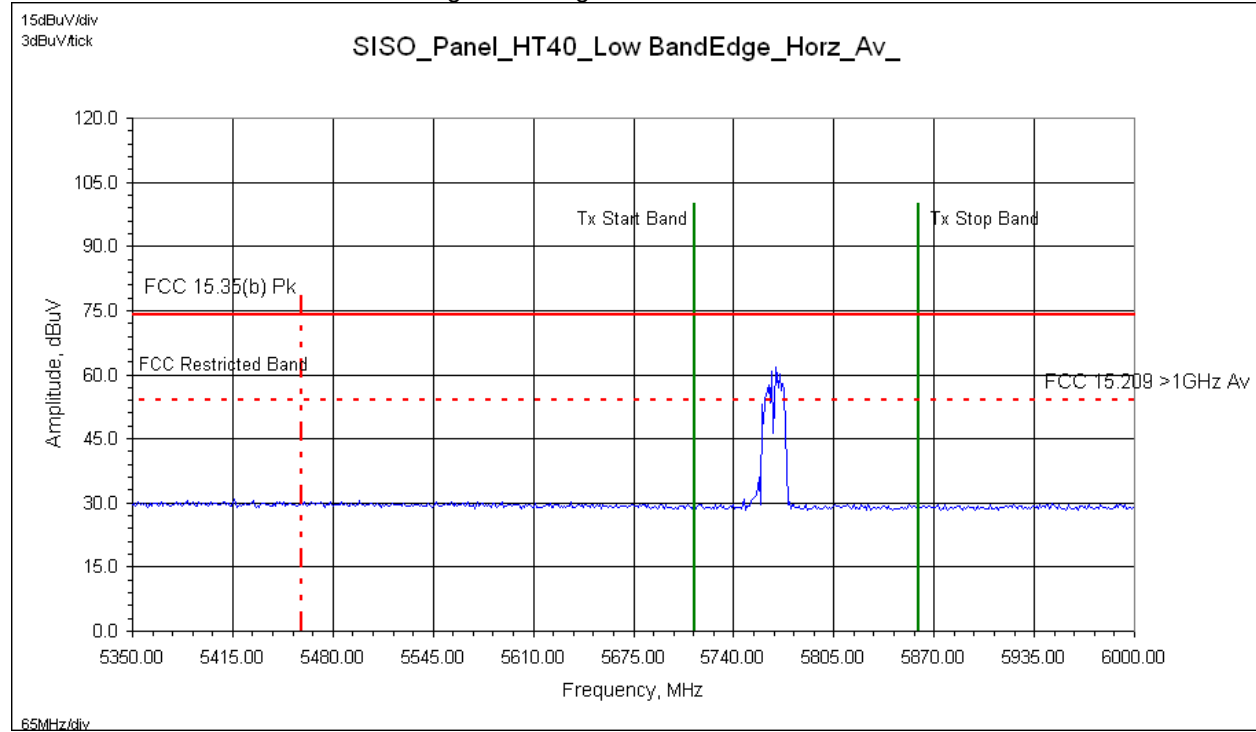


Reference only – max hold peak detector measurements referenced to average & peak limits


Legend: **Green Vertical Lines** (Tx allowable start/stop band)
Red Vertical Lines (Restricted Band)
Blue Trace (Average trace line)

11.28 Band Edge Plots: SISO Mode of Operation – HT40 High Channel 5785 MHz

Vertical Antenna – Upper Band Edge – Peak Measurements

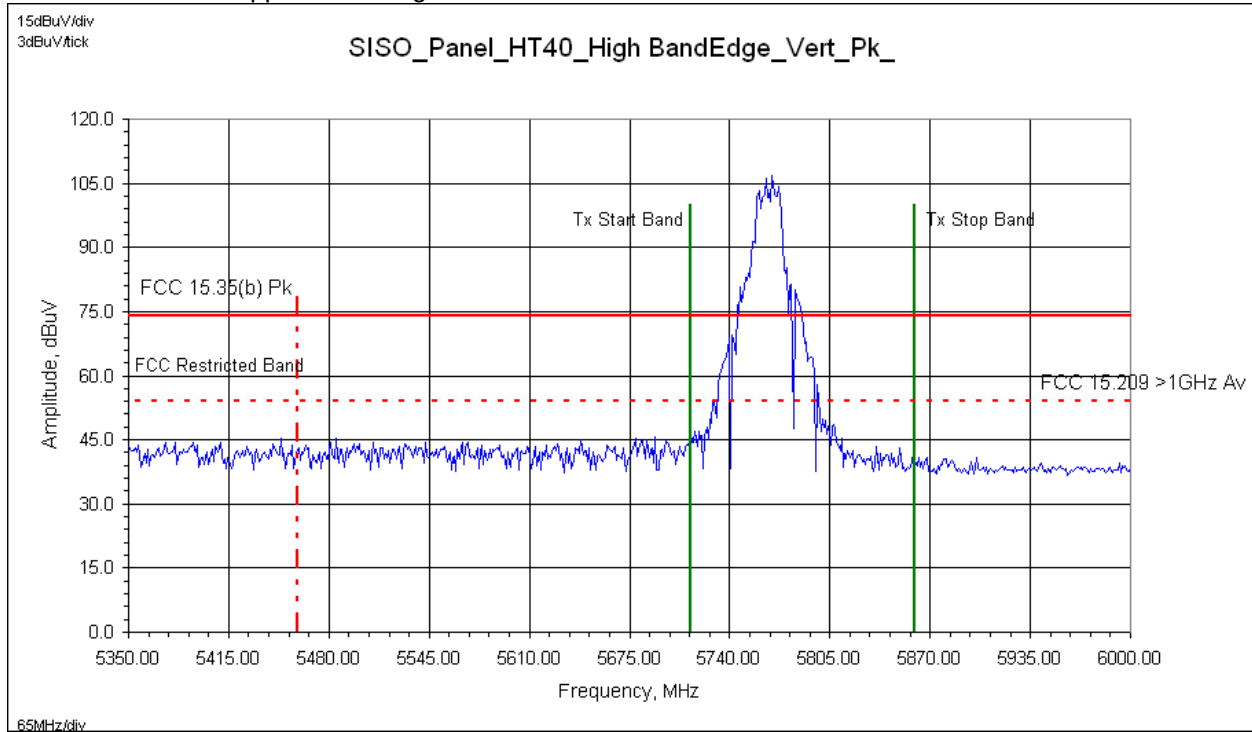

Horizontal Antenna – Upper Band Edge – Peak Measurements

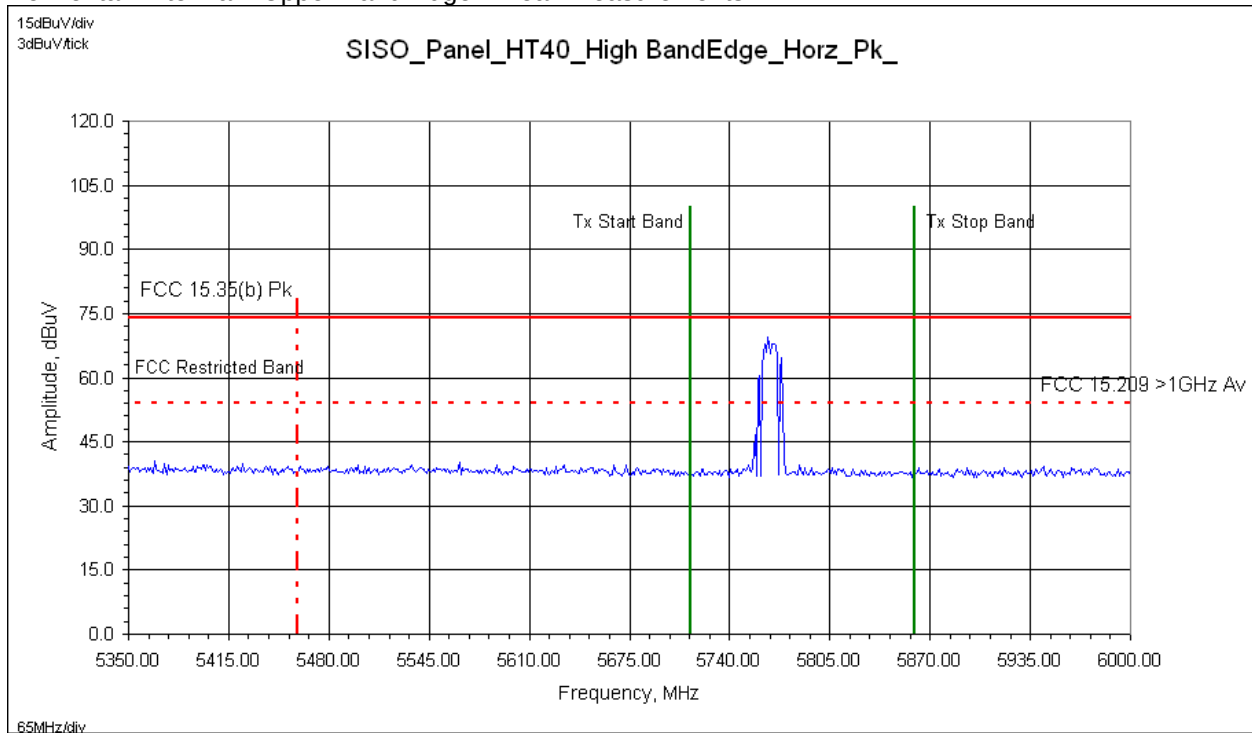


Reference only – max hold peak detector measurements referenced to average & peak limits


Legend: Green Vertical Lines (Tx allowable start/stop band)
Red Vertical Lines (Restricted Band)
Blue Trace (Peak trace line)

11.29 Band Edge Plots: SISO Mode of Operation – HT40 High Channel 5785 MHz

Vertical Antenna – Upper Band Edge – Average Measurements

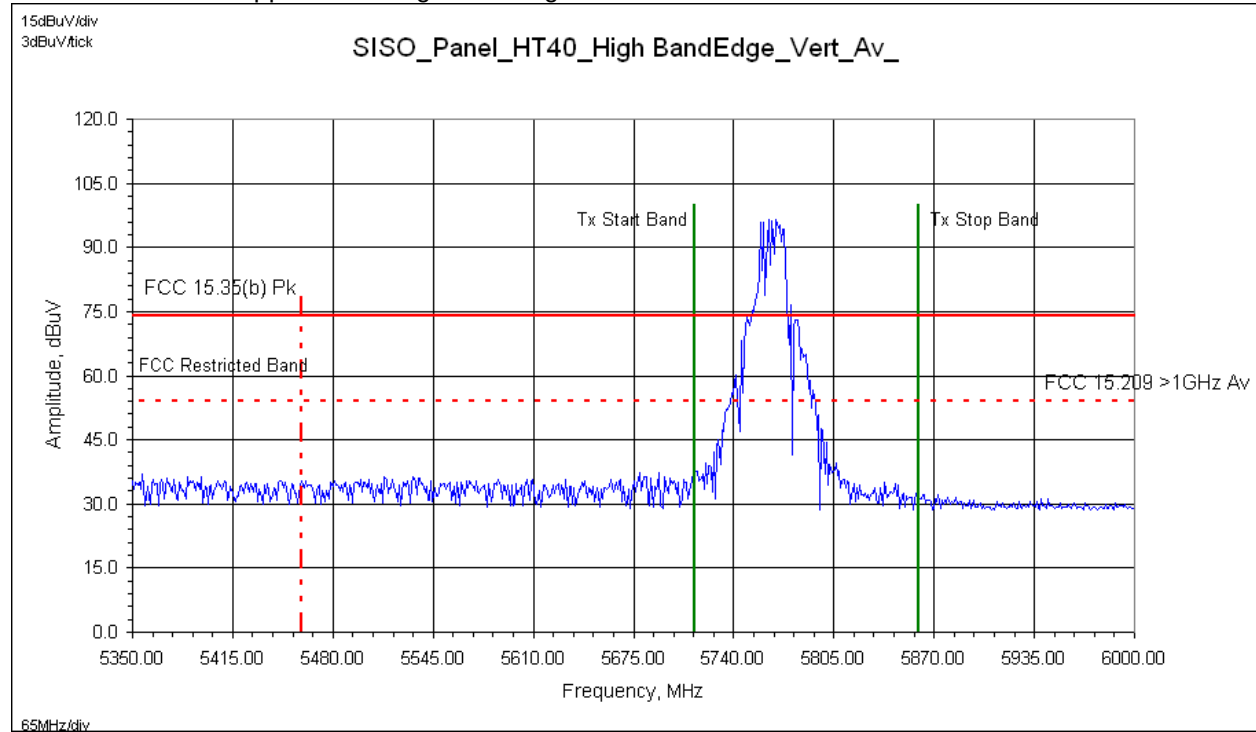

Horizontal Antenna – Upper Band Edge – Average Measurements

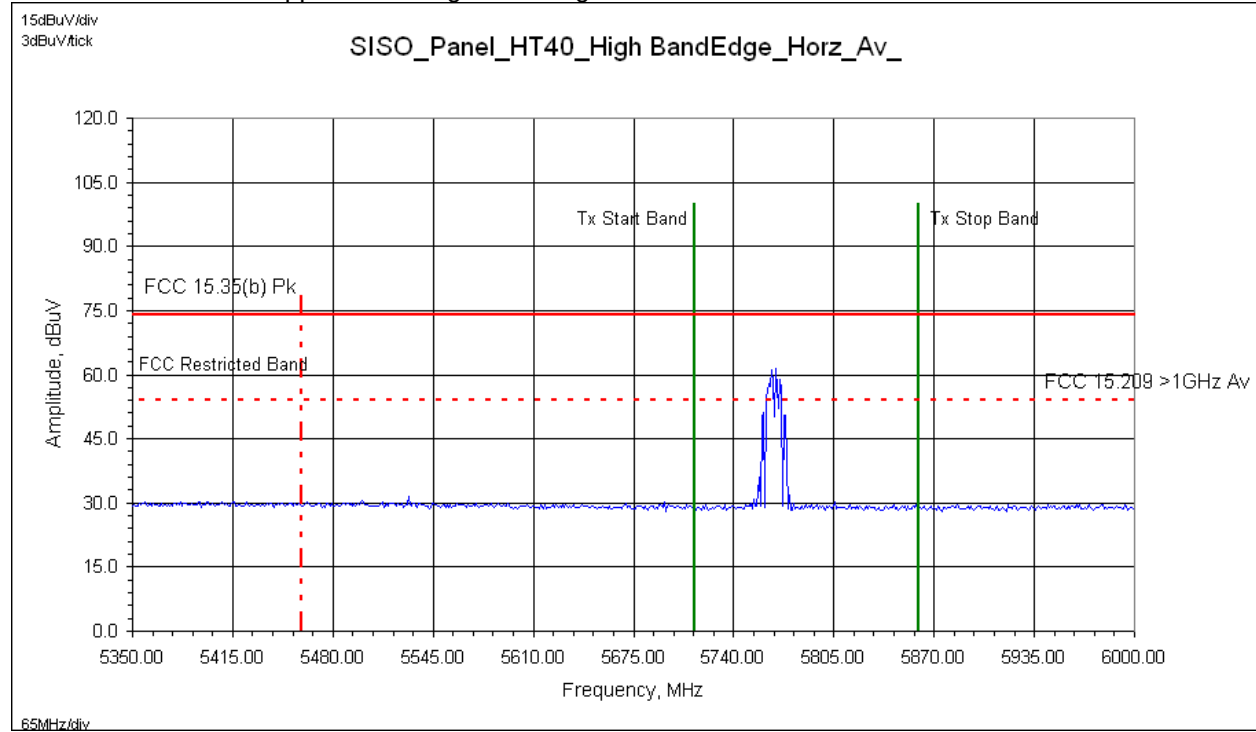

Reference only – max hold peak detector measurements referenced to average & peak limits

Legend: **Green Vertical Lines** (Tx allowable start/stop band)
Red Vertical Lines (Restricted Band)
Blue Trace (Average trace line)

11.30 Test Data: SISO Band Edge – FCC Restricted Band

Tx Spurious Radiated Emissions – Band Edge

Test Report #: G101503607	Test Area: CC1 Radiated	Temperature: <u>23.7</u> °C
Test Method: FCC 15.209/ 15.205/ 15.35(b)	Test Date: <u>02/12/2014</u> <u>02/13/2014</u>	Relative Humidity: <u>27.2</u> %
EUT Model #: Radio Module: W5800-01 Directional Panel Antenna: FP2-5-28	EUT Power: <u>120VAC/60Hz</u>	Air Pressure: <u>83.5</u> kPa
EUT Serial #: Radio Module: DEN1402111313 Directional Panel Antenna(s): 40266		

Manufacturer: FreeWave Technologies, Inc.

EUT Description: PCIe Radio Module

Notes: Product tested in SISO mode: single transmit chain/port – single antenna

Product continuously transmitting during all testing – worst-case modulation/data

SISO mode of Operation, MCS0 Data Rate, 27dBm power (worst-case)

Level Key
Pk – Peak
Qp – Quasi Peak
Av - Average

Freq	Level	Det	Cable	Ant	Preamp	Atten	Final	Pol	Hgt	Az	Delta1	Delta2	RBW
MHz	dBuV	Qp Av Pk	+ [dB]	+ [dB/m]	- [dB]	+ [dB]	= [dBuV]	(V/H)	(m)	(DEG)	FCC 15.209 Avg	FCC 15.35(b) Pk	(MHz)
Radio System: Model W5800-01 Radio Module with Directional Panel Antenna – SISO Mode of Operation													
Measurements: 802.11 a/n HT20 Lower Band Edge – FCC Restricted Band													
5725.0000	56.31	Av	5.64	34.09	44.10	0.00	51.94	V	1.36	5.0	- 2.04	NA	1.000
5725.0000	65.13	Pk	5.64	34.09	44.10	0.00	60.76	V	1.36	5.0	N/A	- 13.24	1.000
5725.0000	44.88	Av	5.64	34.09	44.10	0.00	40.51	H	1.38	2.0	- 13.47	NA	1.000
5725.0000	54.22	Pk	5.64	34.09	44.10	0.00	49.85	H	1.38	2.0	N/A	- 24.15	1.000
Measurements: 802.11 a/n HT20 Upper Band Edge – FCC Restricted Band													
5850.0000	56.69	Av	5.70	34.15	44.41	0.00	52.13	V	1.44	6.0	- 1.85	NA	1.000
5850.0000	65.50	Pk	5.70	34.15	44.41	0.00	60.94	V	1.44	6.0	N/A	- 13.06	1.000
5850.0000	37.64	Av	5.70	34.15	44.41	0.00	33.08	H	1.52	0.0	- 20.90	NA	0.100
5850.0000	42.77	Pk	5.70	34.15	44.41	0.00	38.21	H	1.52	0.0	N/A	- 35.79	0.100
Measurements: 802.11n HT40 Lower Band Edge – FCC Restricted Band													
5725.0000	50.27	Av	5.64	34.09	44.10	0.00	45.90	V	1.44	6.0	- 8.08	NA	1.000
5725.0000	64.35	Pk	5.64	34.09	44.10	0.00	59.98	V	1.44	6.0	N/A	- 14.02	1.000
5725.0000	37.96	Av	5.64	34.09	44.10	0.00	33.59	H	1.45	7.0	- 20.39	NA	1.000
5725.0000	47.02	Pk	5.64	34.09	44.10	0.00	42.65	H	1.45	7.0	N/A	- 31.35	1.000
Measurements: 802.11n HT40 Upper Band Edge – FCC Restricted Band													
5725.0000	53.11	Av	5.64	34.09	44.10	0.00	48.74	V	1.45	5.0	- 5.24	NA	1.000
5725.0000	62.83	Pk	5.64	34.09	44.10	0.00	58.46	V	1.45	5.0	N/A	- 15.54	1.000
5725.0000	37.97	Av	5.64	34.09	44.10	0.00	33.60	H	1.45	10.0	- 20.38	NA	1.000
5725.0000	45.65	Pk	5.64	34.09	44.10	0.00	41.28	H	1.45	10.0	N/A	- 32.72	1.000

--	--	--	--	--	--	--	--	--	--	--	--	--	--

Example calculation:

Measure d Level	+	Cable Loss	+	Antenna Factor	-	Pre- Amp	+	Atten	=	Final Correcte d Reading	Specificatio n Limit	-	Final Correcte d Reading	=	Delta Specificatio n
(dBμV)		(dB)		(dB)		(dB)		(dB)		(dBμV/m)	(dBμV/m)		(dBμV/m)		
20.0		3.0		5.0		10.0		0.0		18.0	40.0		18.0		- 22.0

Notes:


- 1) The highest signals – as determined from pre-scan plots – were fully-maximized and measured.
- 2) A notch filter was not used during band edge plots/measurements.
- 3) 802.11 a/n HT20/HT40 included in measurements as well as both SISO/MIMO modes of Tx operation.

Deviations, Additions, or Exclusions: None


11.31 Plots: MIMO Mode of Operation – HT20 Low Channel: 5745MHz

30MHz to 1000MHz

Vertical Antenna

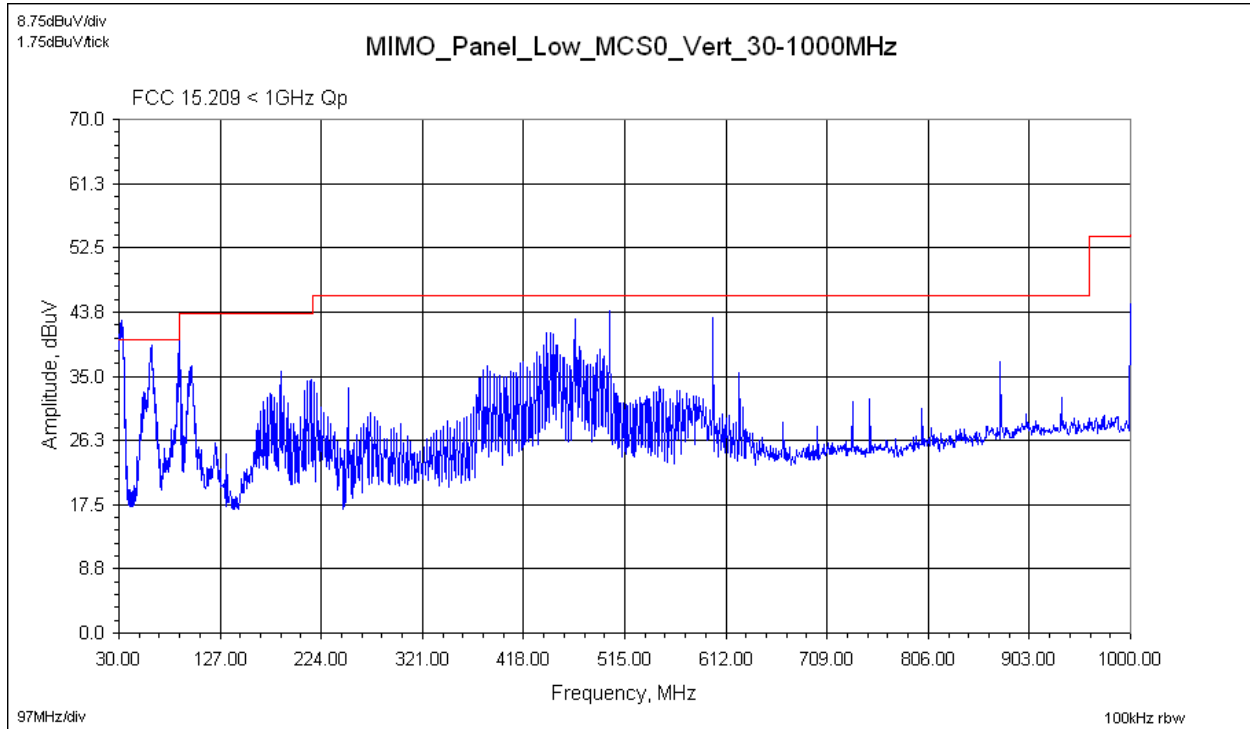



Horizontal Antenna

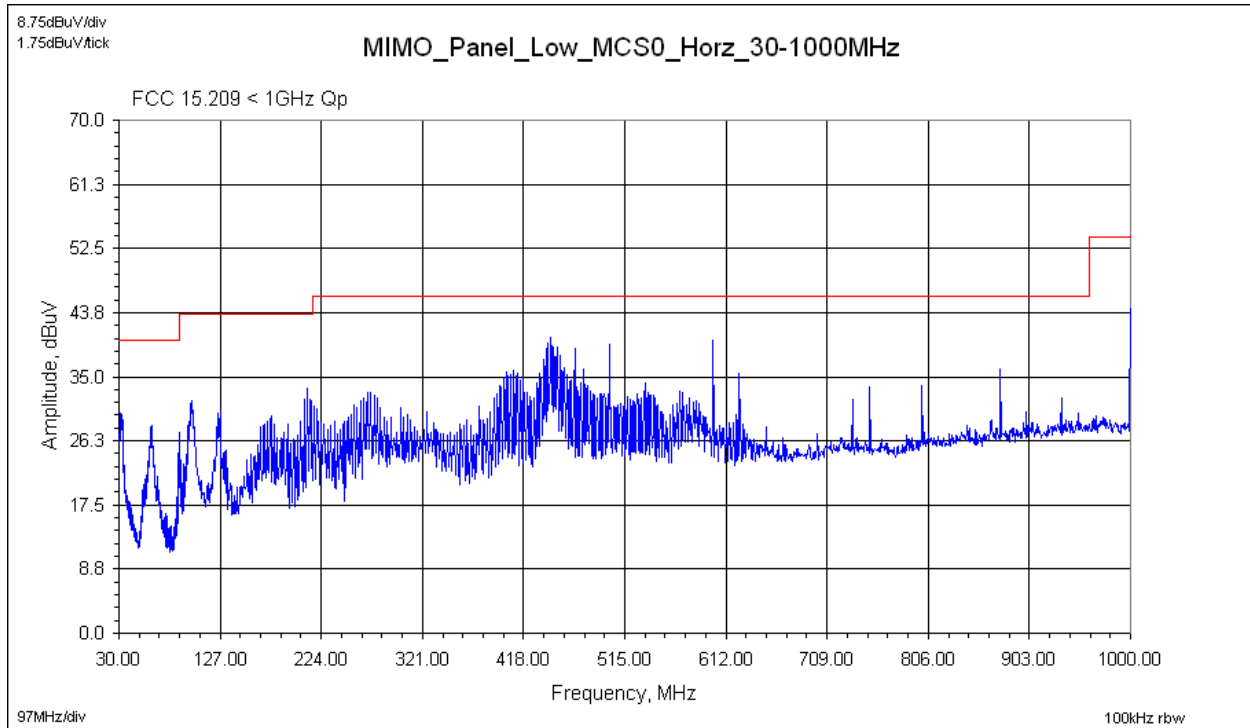

Reference only – max hold peak detector measurements referenced to quasi-peak limit

11.32 MIMO Mode of Operation – HT20 Mid Channel: 5785MHz



30MHz to 1000MHz

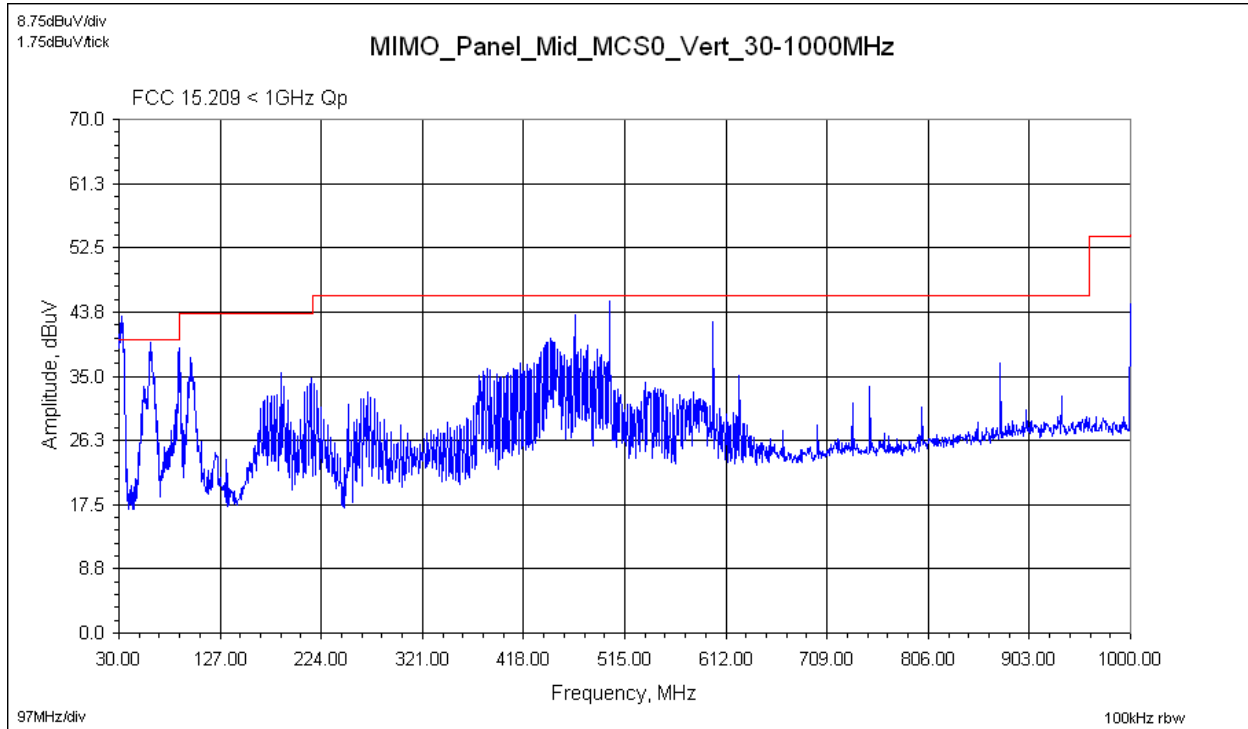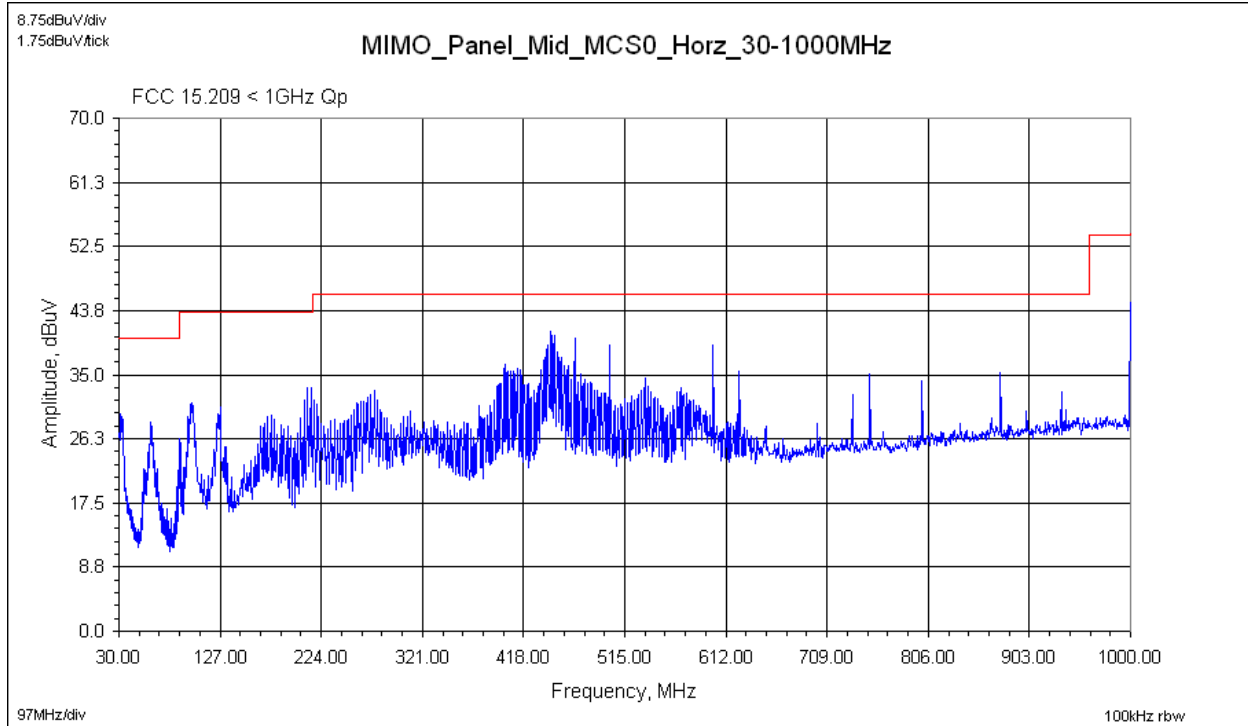Vertical Antenna**Horizontal Antenna**

Reference only – max hold peak detector measurements referenced to quasi-peak limit

11.33 MIMO Mode of Operation – HT20 High Channel: 5825MHz

30MHz to 1000MHz

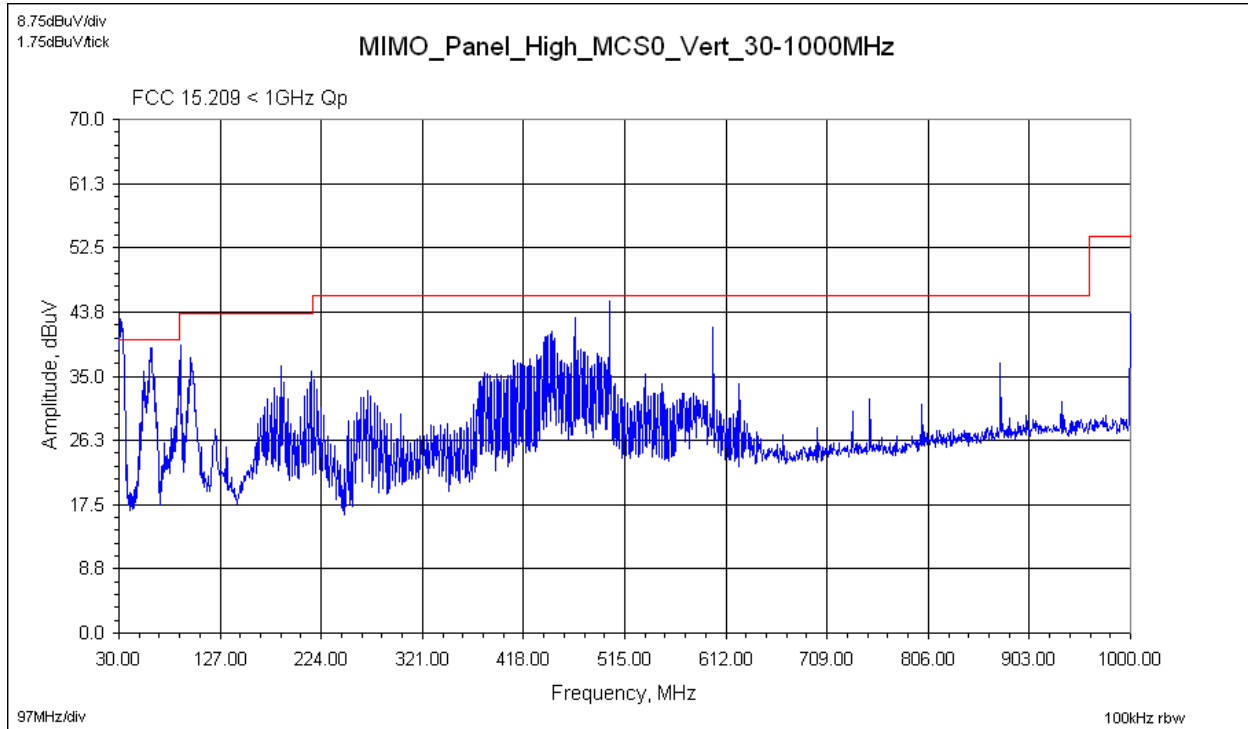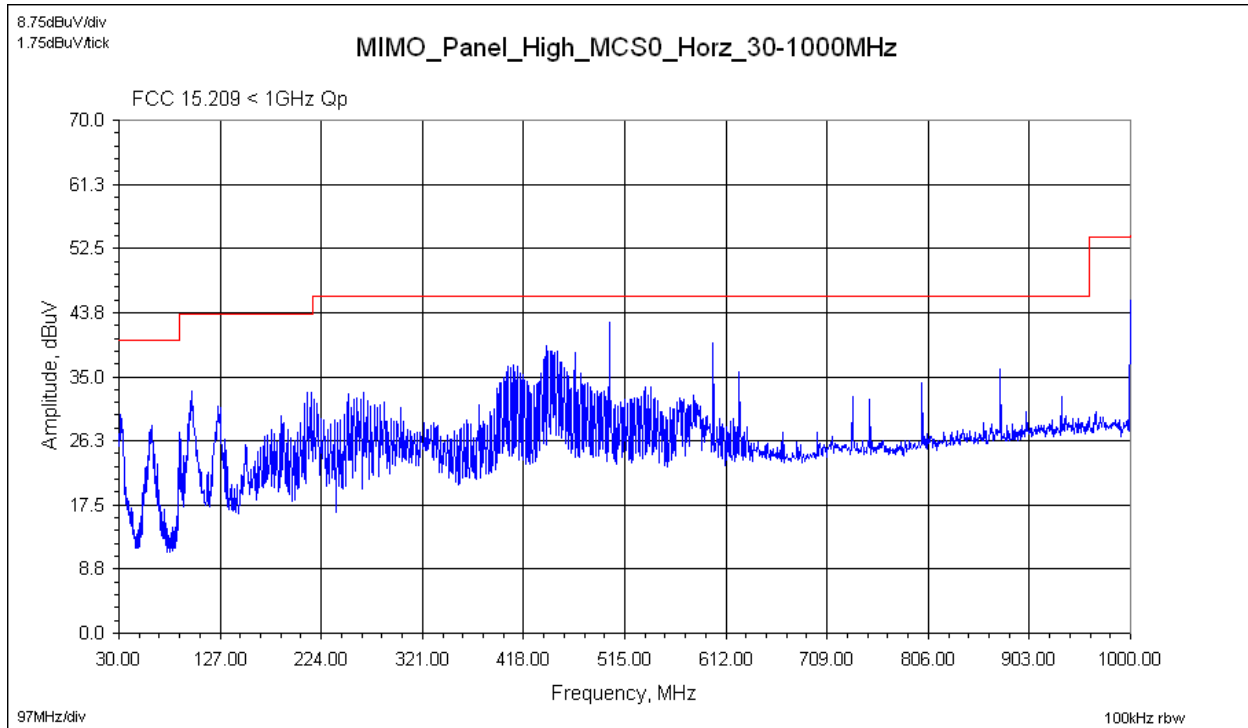
Vertical Antenna**Horizontal Antenna**

Reference only – max hold peak detector measurements referenced to quasi-peak limit


11.34 MIMO Mode of Operation – HT40 Channel: 5765MHz

30MHz to 1000MHz

Vertical Antenna

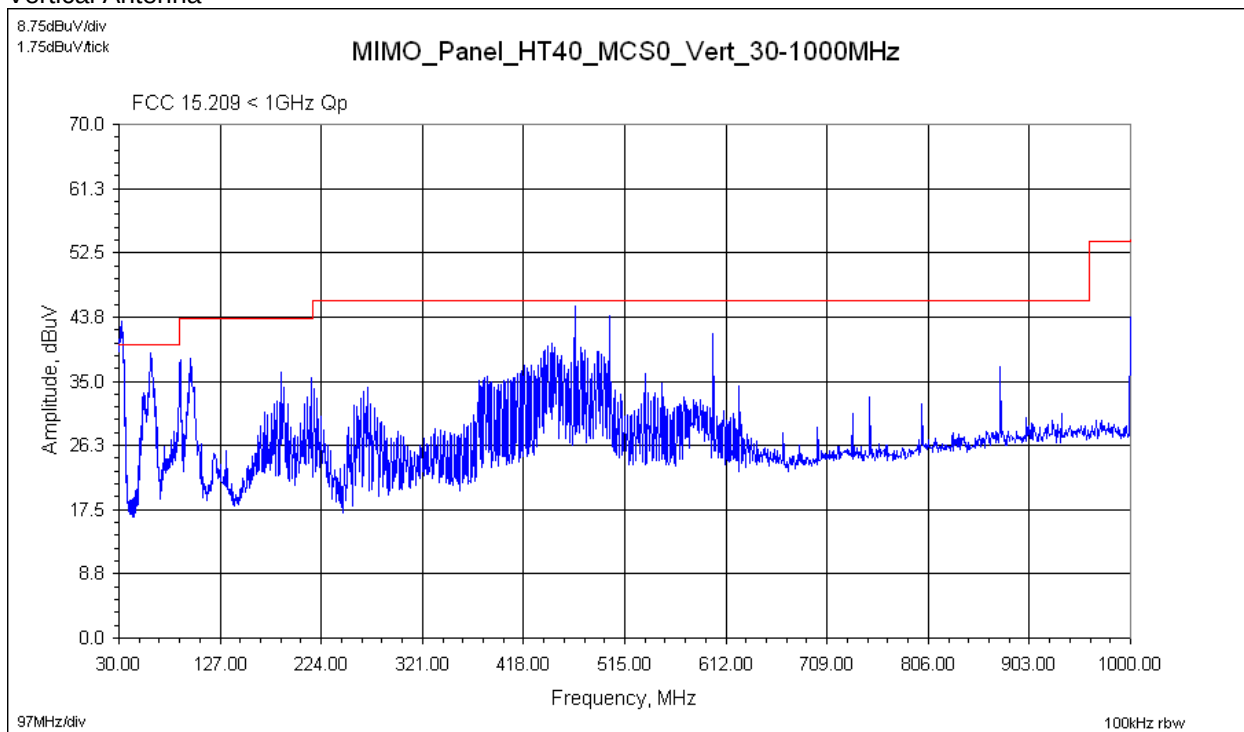



Horizontal Antenna

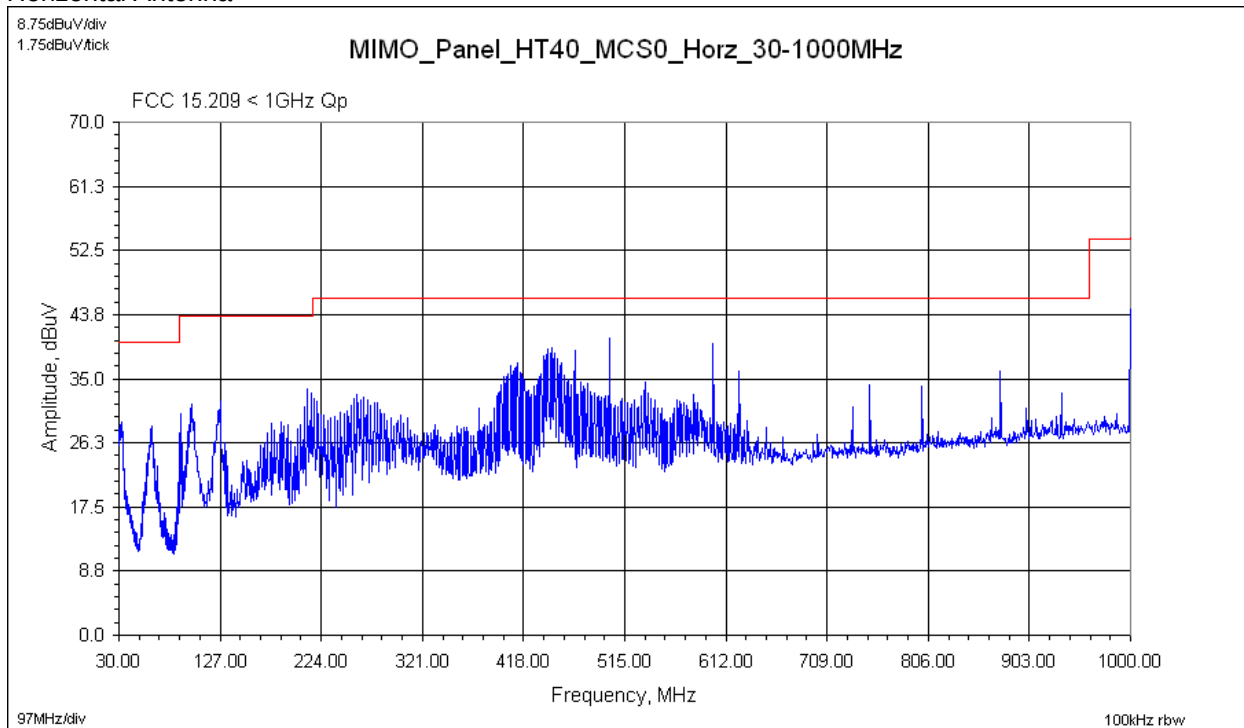

Reference only – max hold peak detector measurements referenced to quasi-peak limit

11.35 Plots: MIMO Mode of Operation – HT20 Low Channel: 5745 MHz

1GHz to 18GHz

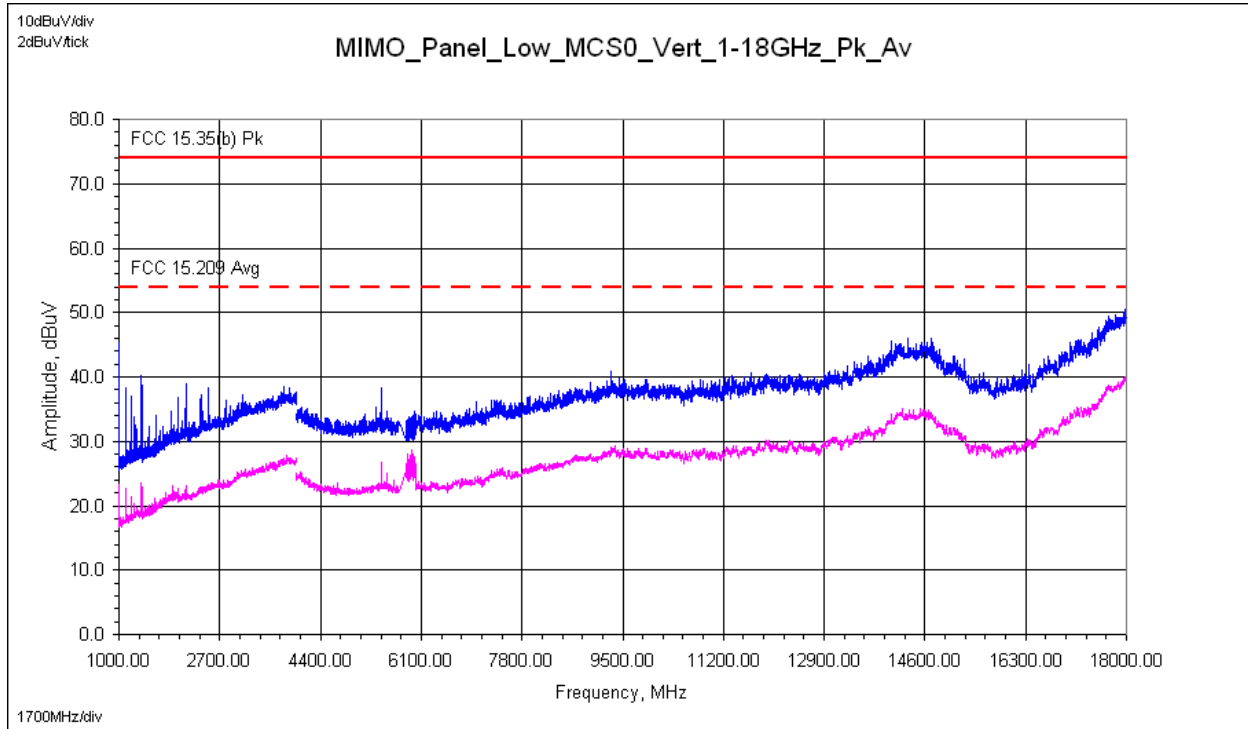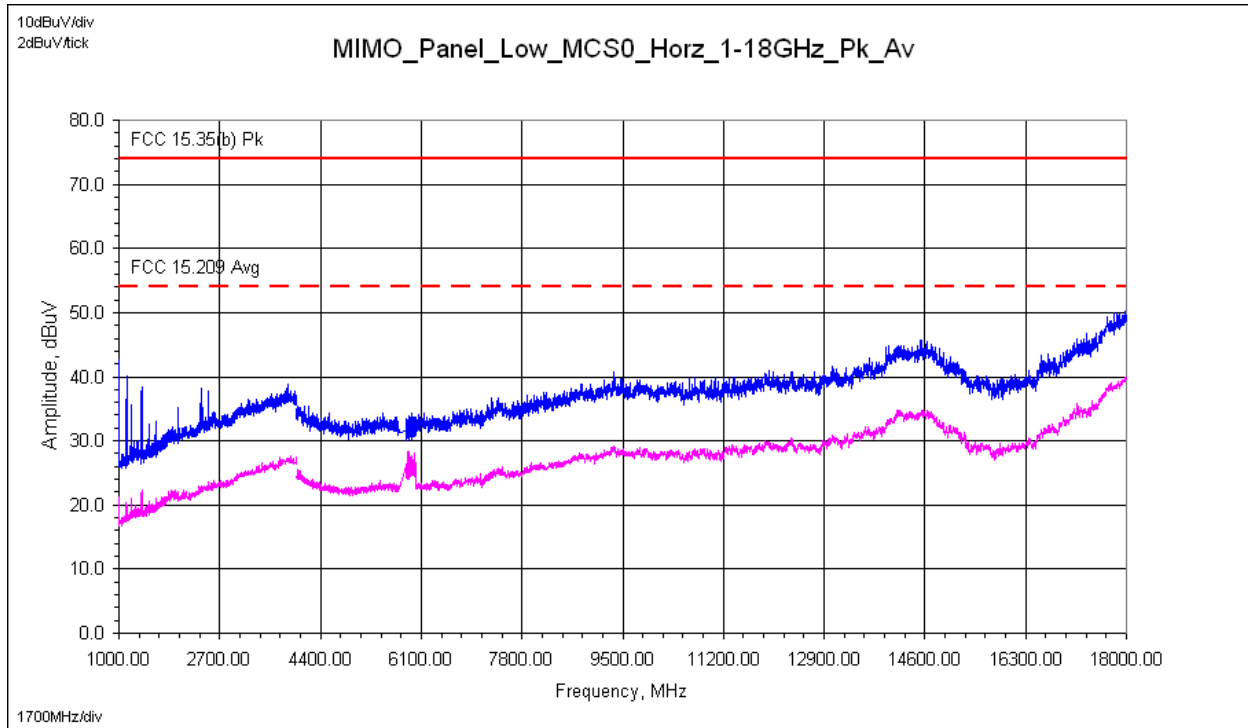
Vertical Antenna**Horizontal Antenna**

Reference only – max hold peak detector measurements referenced to average & peak limits


11.36 Plots: MIMO Mode of Operation – HT20 Mid Channel: 5785 MHz

1GHz to 18GHz

Vertical Antenna

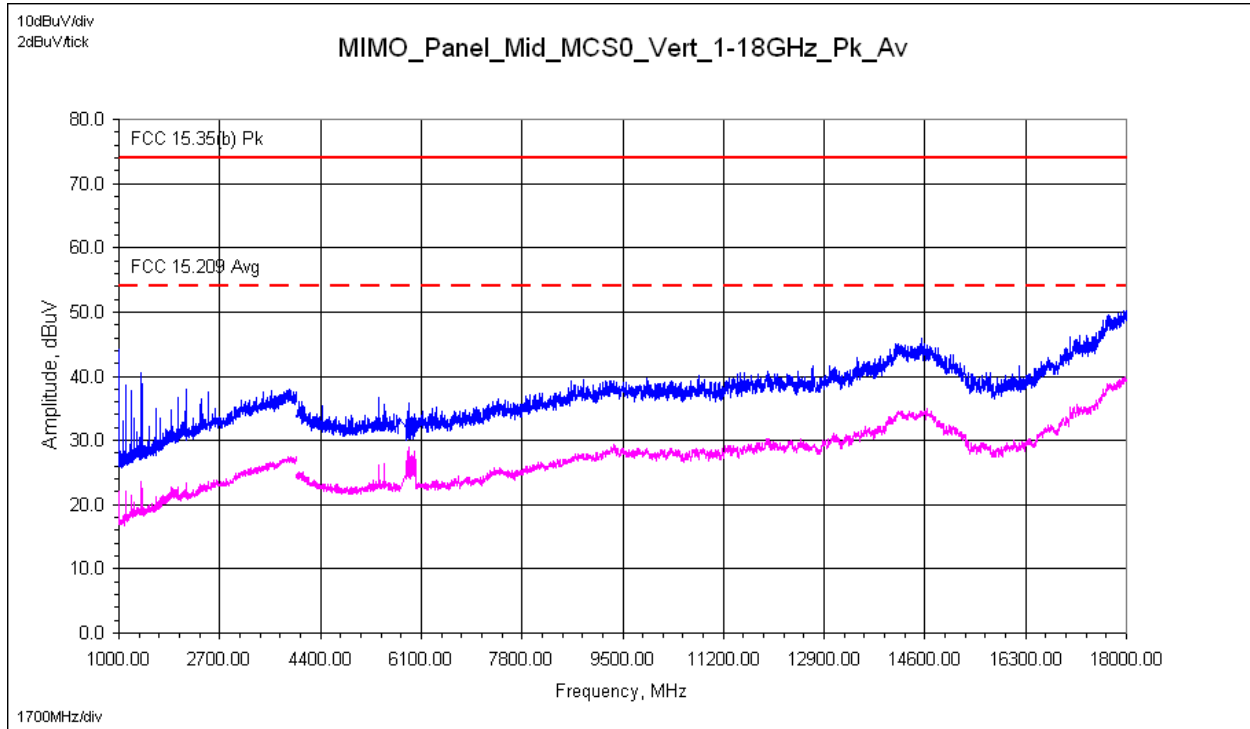

Horizontal Antenna

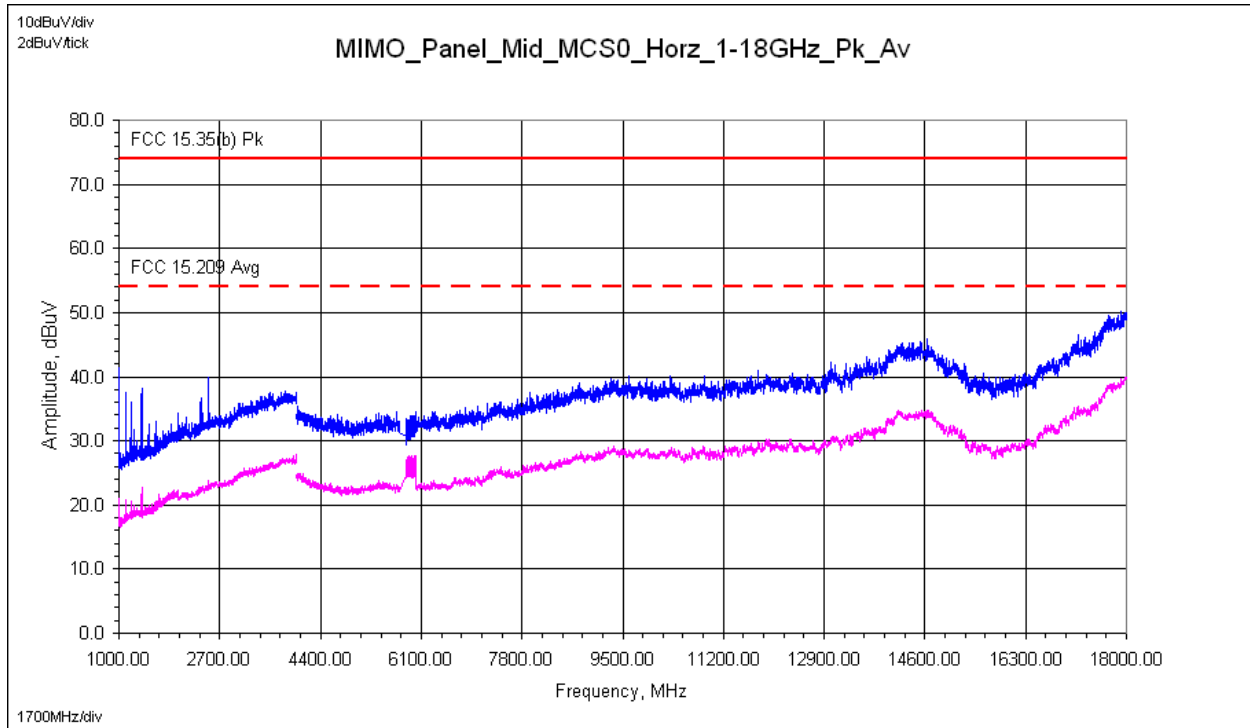


Reference only – max hold peak detector measurements referenced to average & peak limits


11.37 Plots: MIMO Mode of Operation – HT20 High Channel: 5825 MHz

1GHz to 18GHz

Vertical Antenna

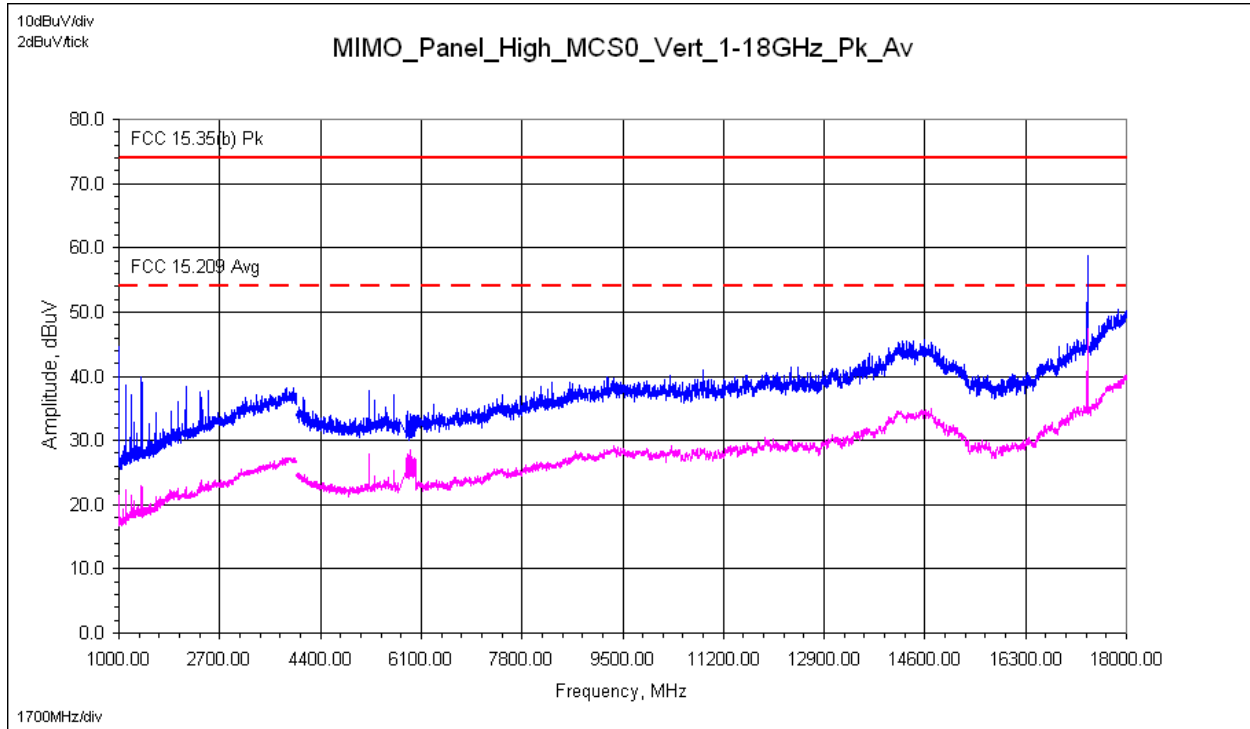

Horizontal Antenna

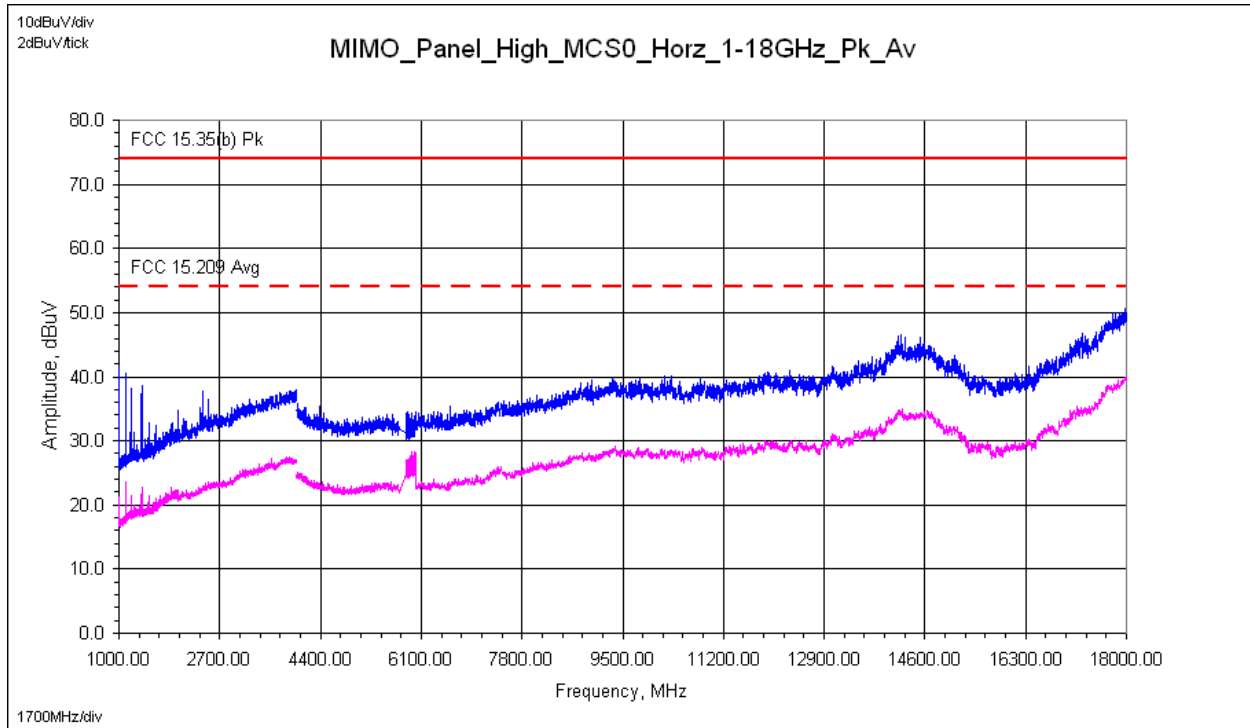


Reference only – max hold peak detector measurements referenced to average & peak limits


11.38 Plots: MIMO Mode of Operation – HT40 Low Channel: 5765 MHz

1GHz to 18GHz

Vertical Antenna

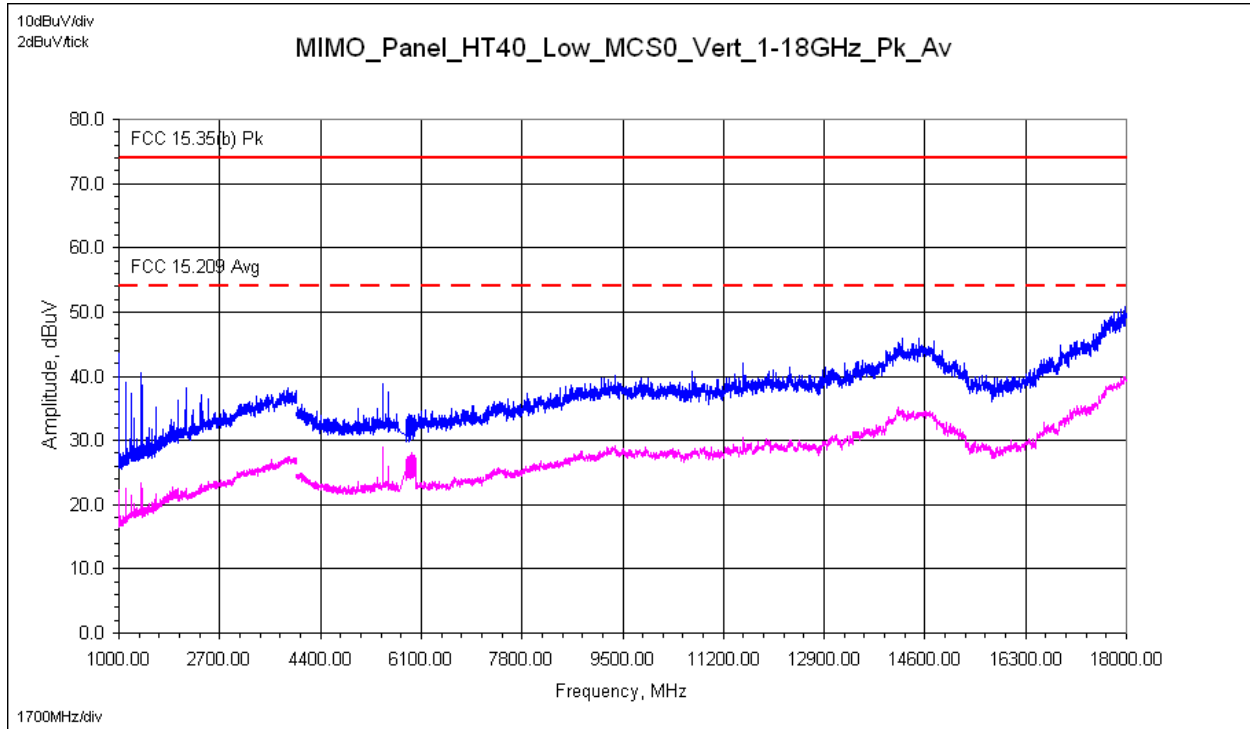

Horizontal Antenna

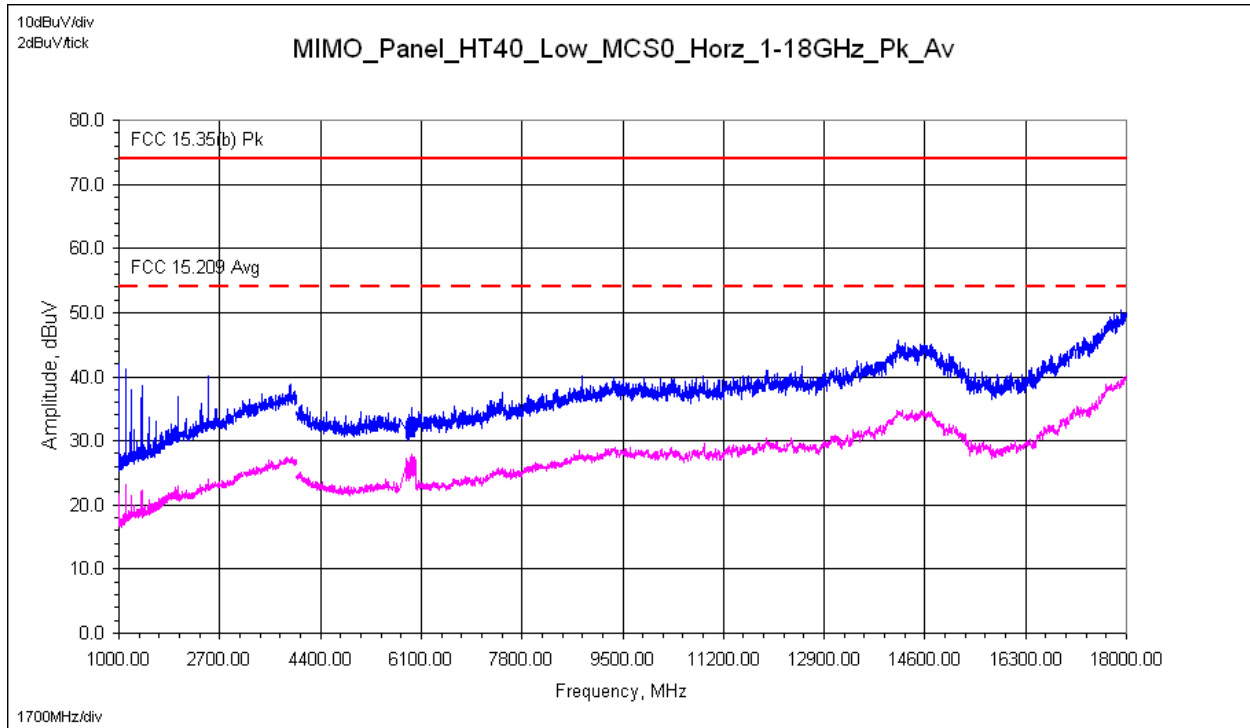


Reference only – max hold peak detector measurements referenced to average & peak limits


11.39 Plots: MIMO Mode of Operation – HT40 High Channel: 5785 MHz

1GHz to 18GHz

Vertical Antenna

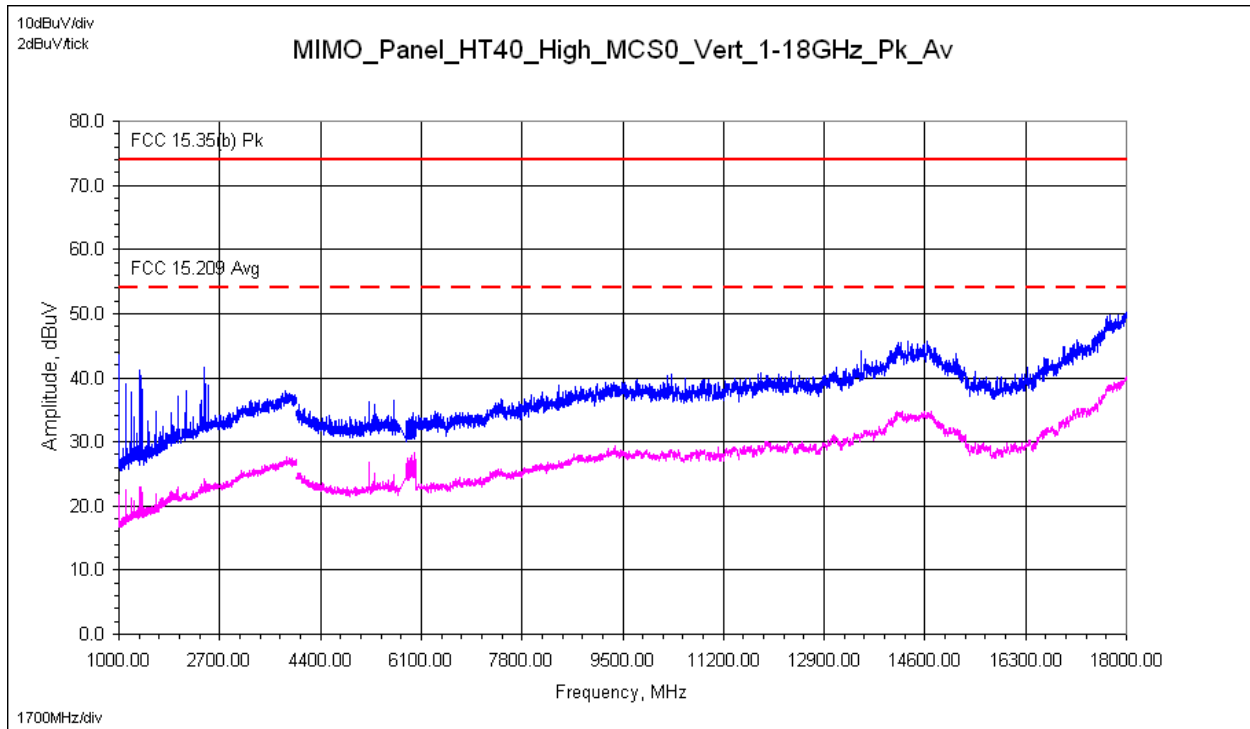

Horizontal Antenna

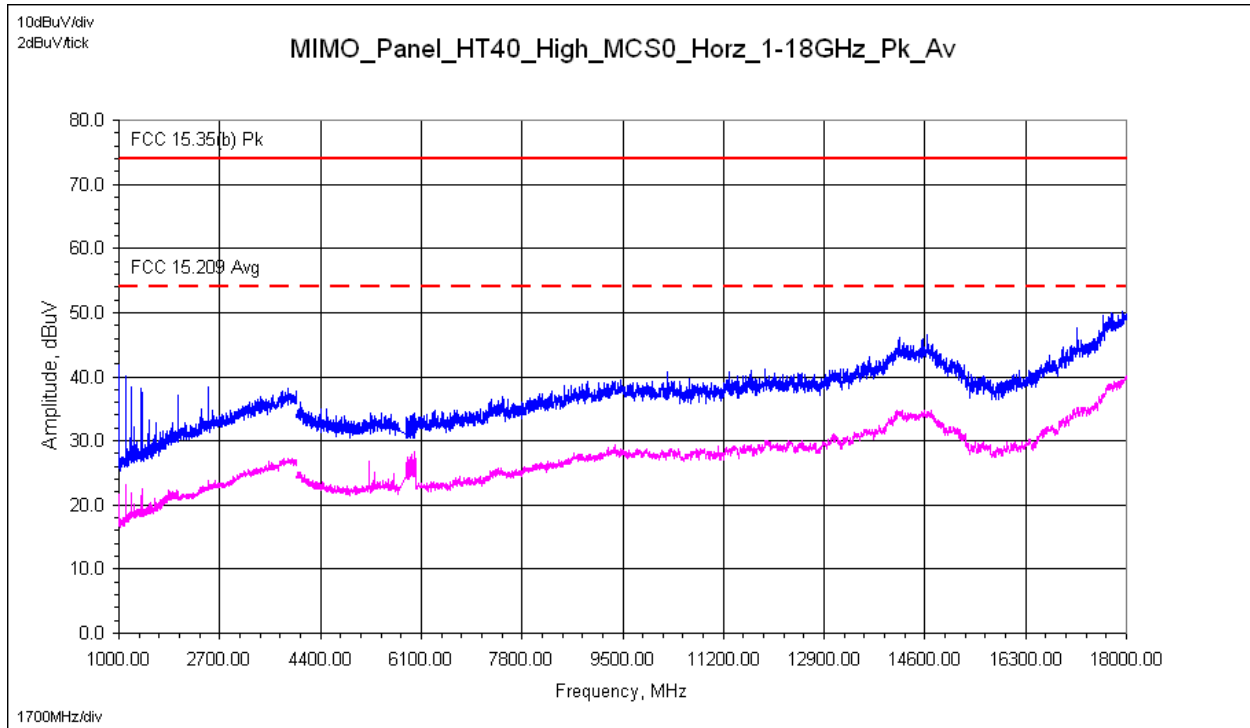

Reference only – max hold peak detector measurements referenced to average & peak limits

11.40 Test Data: MIMO Mode of Operation

Tx Spurious Radiated Electromagnetic Emissions

Test Report #: G101503607	Test Area: CC1 Radiated	Temperature: <u>23.7</u> °C
Test Method: FCC 15.209/ 15.205/ 15.35(b)	Test Date: <u>02/12/2014</u> <u>02/13/2014</u>	Relative Humidity: <u>28.2</u> %
EUT Model #: Radio Module: W5800-01 Directional Panel Antenna: FP2-5-28	EUT Power: <u>120VAC/60Hz</u>	Air Pressure: <u>83.5</u> kPa
EUT Serial #: Radio Module: DEN1402111313 Directional Panel Antennas: 40266/ 40267		

Manufacturer: FreeWave Technologies EUT Description: PCIe Radio Module Notes: Product tested in MIMO mode: 2 transmit chains/ports – dual antennas Product continuously transmitting during all testing – worst-case modulation/data MIMO mode of Operation, MCS0 Data Rate, 27dBm power, 24.00 dBm/port (worst-case power)	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="text-align: center;">Level Key</th> </tr> <tr> <td>Pk – Peak</td> </tr> <tr> <td>Qp – Quasi Peak</td> </tr> <tr> <td>Av - Average</td> </tr> </table>	Level Key	Pk – Peak	Qp – Quasi Peak	Av - Average
Level Key					
Pk – Peak					
Qp – Quasi Peak					
Av - Average					

Freq	Level	Det	Cable	Ant	Preamp	Atten	Final	Pol	Hgt	Az	Delta1	Delta2	RBW
MHz	dBuV	Qp Av Pk	+ [dB]	+ [dB/m]	- [dB]	+ [dB]	= [dBuV]	(V/H)	(m)	(DEG)	FCC 15.209 Qp	N/A	(MHz)
Radio System: Model W5800-01 Radio Module with Directional Panel Antenna – MIMO Mode of Operation													
Measurements: 30MHz to 1000MHz – 802.11a/n HT20													
33.8141	45.99	Qp	0.40	18.03	28.29	0.00	36.13	V	1.00	264.8	- 3.87	NA	0.120
61.0224	52.70	Qp	0.77	7.50	28.21	0.00	32.76	V	1.02	12.7	- 7.24	NA	0.120
61.0224	55.24	Qp	0.77	7.50	28.21	0.00	35.30	V	1.06	87.8	- 4.70	NA	0.120
88.5012	52.91	Qp	0.77	7.95	28.11	0.00	33.52	V	1.03	63.7	- 10.00	NA	0.120
98.8878	48.26	Qp	0.77	10.28	28.07	0.00	31.23	V	1.00	336.4	- 12.29	NA	0.120
447.2147	52.11	Qp	1.45	17.06	28.22	0.00	42.39	V	1.48	176.0	- 3.63	NA	0.120
500.0000	52.78	Qp	1.53	17.70	28.60	0.00	43.41	V	1.49	337.4	- 2.61	NA	0.120
600.0000	48.41	Qp	1.70	18.90	28.70	0.00	40.30	V	1.15	47.7	- 5.72	NA	0.120
999.9800	48.96	Qp	2.21	22.60	27.59	0.00	46.19	V	1.27	161.9	- 7.79	NA	0.120
444.0000	47.68	Qp	1.44	17.08	28.20	0.00	38.00	H	2.33	96.0	- 8.02	NA	0.120
600.0000	47.87	Qp	1.70	18.90	28.70	0.00	39.76	H	1.90	151.8	- 6.26	NA	0.120
999.9800	46.75	Qp	2.21	22.60	27.59	0.00	43.98	H	2.00	160.0	- 10.00	NA	0.120

Freq	Level	Det	Cable	Ant	Preamp	Atten	Final	Pol	Hgt	Az	Delta1	Delta2	RBW
MHz	dBuV	Qp Av Pk	+ [dB]	+ [dB/m]	- [dB]	+ [dB]	= [dBuV]	(V/H)	(m)	(DEG)	FCC 15.209 Avg	FCC 15.35(b) Pk	(MHz)
Measurements: 1GHz to 18GHz – 802.11a/n HT20													
1000.0100	58.37	Pk	2.21	23.82	37.13	0.00	47.27	V	1.40	140.0	N/A	- 26.73	1.000
1000.0100	51.56	Av	2.21	23.82	37.13	0.00	40.46	V	1.40	140.0	- 13.52	NA	1.000
1124.9800	53.78	Pk	2.36	24.63	37.26	0.00	43.51	V	1.61	1.0	N/A	- 30.49	1.000
1124.9800	48.96	Av	2.36	24.63	37.26	0.00	38.69	V	1.61	1.0	- 15.29	NA	1.000
1374.9600	53.20	Pk	2.61	25.13	36.76	0.00	44.18	V	1.66	33.0	N/A	- 29.82	1.000
1374.9600	47.72	Av	2.61	25.13	36.76	0.00	38.70	V	1.66	33.0	- 15.28	NA	1.000

1000.0100	56.95	Pk	2.21	23.82	37.13	0.00	45.85	H	1.56	9.0	N/A	- 28.15	1.000
1000.0100	49.76	Av	2.21	23.82	37.13	0.00	38.66	H	1.56	9.0	- 15.32	NA	1.000
2500.0000	49.56	Pk	3.59	28.71	37.66	0.00	44.20	H	1.37	66.0	N/A	- 29.80	1.000
2500.0000	39.41	Av	3.59	28.71	37.66	0.00	34.05	H	1.37	66.0	- 19.93	NA	1.000
5288.2210	57.29	Pk	5.41	33.99	42.71	0.00	53.98	V	1.25	24.0	N/A	- 20.02	1.000
5288.2210	53.34	Av	5.41	33.99	42.71	0.00	50.03	V	1.25	24.0	- 3.95	NA	1.000
5851.4420	53.91	Pk	5.70	34.15	44.41	0.00	49.35	V	1.44	10.0	N/A	- 24.65	1.000
5851.4420	43.58	Av	5.70	34.15	44.41	0.00	39.02	V	1.44	10.0	- 14.96	NA	1.000
11510.0000	58.80	Pk	8.47	38.85	47.26	0.00	58.85	V	1.70	17.0	N/A	- 15.15	1.000
11510.0000	49.58	Av	8.47	38.85	47.26	0.00	49.63	V	1.70	17.0	- 4.35	NA	1.000
11570.0000	62.27	Pk	8.49	38.96	47.26	0.00	62.46	V	1.76	16.0	N/A	- 11.54	1.000
11570.0000	49.47	Av	8.49	38.96	47.26	0.00	49.66	V	1.76	16.0	- 4.32	NA	1.000
11510.0000	50.32	Pk	8.47	38.85	47.26	0.00	50.37	H	1.76	17.0	N/A	- 23.63	1.000
11510.0000	44.54	Av	8.47	38.85	47.26	0.00	44.59	H	1.76	17.0	- 9.39	NA	1.000
Measurements: 1GHz to 18GHz – 802.11n HT40													
1000.0100	59.02	Pk	2.21	23.82	37.13	0.00	47.92	V	1.42	0.0	N/A	- 26.08	1.000
1000.0100	52.57	Av	2.21	23.82	37.13	0.00	41.47	V	1.42	0.0	- 12.51	NA	1.000
1199.9700	55.91	Pk	2.44	25.07	37.18	0.00	46.23	V	1.19	83.0	N/A	- 27.77	1.000
1199.9700	46.02	Av	2.44	25.07	37.18	0.00	36.34	V	1.19	83.0	- 17.64	NA	1.000
1374.9700	53.41	Pk	2.61	25.13	36.76	0.00	44.39	V	1.34	72.0	N/A	- 29.61	1.000
1374.9700	46.67	Av	2.61	25.13	36.76	0.00	37.65	V	1.34	72.0	- 16.33	NA	1.000
1374.9700	55.17	Pk	2.61	25.13	36.76	0.00	46.15	H	2.26	9.0	N/A	- 27.85	1.000
1374.9700	42.94	Av	2.61	25.13	36.76	0.00	33.92	H	2.26	9.0	- 20.06	NA	1.000
1400.0000	53.22	Pk	2.63	25.09	36.71	0.00	44.23	H	2.33	8.0	N/A	- 29.77	1.000
1400.0000	48.05	Av	2.63	25.09	36.71	0.00	39.06	H	2.33	8.0	- 14.92	NA	1.000
11650.0000	64.12	Pk	8.53	39.11	47.26	0.00	64.49	V	1.36	16.0	N/A	- 9.51	1.000
11650.0000	48.71	Av	8.53	39.11	47.26	0.00	49.08	V	1.36	16.0	- 4.90	NA	1.000
17475.0000	54.66	Pk	10.77	43.76	46.01	0.00	63.18	V	1.70	35.0	N/A	- 10.82	1.000
17475.0000	39.88	Av	10.77	43.76	46.01	0.00	48.40	V	1.70	35.0	- 5.58	NA	1.000

Note: Signals in yellow highlight – harmonics in restricted band

Example calculation:

Measure d Level	+	Cable Loss	+	Antenna Factor	-	Pre- Amp	+	Atten	=	Final Correcte d Reading	Specificatio n Limit	-	Final Correcte d Reading	=	Delta Specificatio n
(dBμV)		(dB)		(dB)		(dB)		(dB)		(dBμV/m)	(dBμV/m)		(dBμV/m)		
20.0		3.0		5.0		10.0		0.0		18.0	40.0		18.0		- 22.0


Notes:

- 1) The highest signals – as determined from pre-scan plots – were fully-maximized and measured.
- 2) For the general pre-scan plots, a notch filter was utilized. Note the notch filter was not used during band edge plots/measurements.
- 3) 802.11 a/n HT20/HT40 included in measurements as well as both SISO/MIMO modes of Tx operation.


4) No emissions found >18GHz.

11.41 Band Edge Plots: MIMO Mode of Operation – HT20 Low Channel 5745 MHz

Vertical Antenna – Lower Band Edge – Peak Measurements

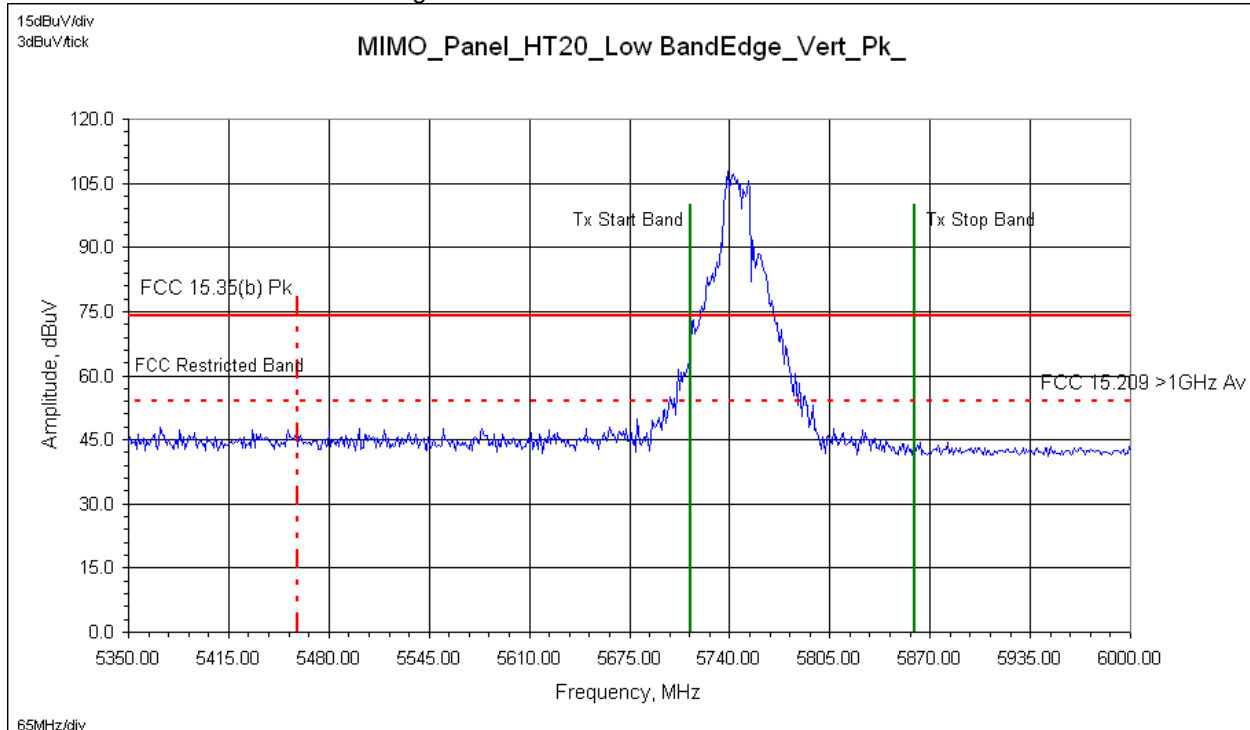

Horizontal Antenna – Lower Band Edge – Peak Measurements

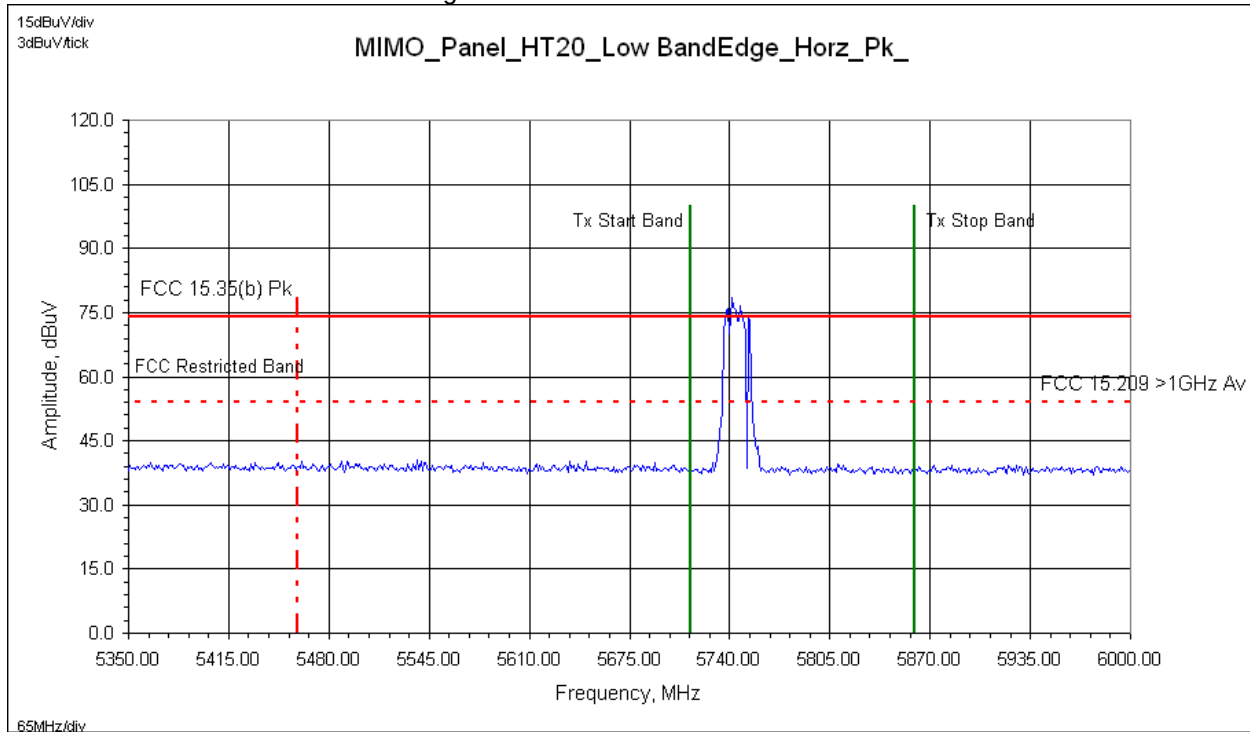

Reference only – max hold peak detector measurements referenced to average & peak limits


Legend: Green Vertical Lines (Tx allowable start/stop band)

Intertek	
Report Number: 101503607DEN-001B	Issued: TBD


Red Vertical Dashed-Lines (Restricted Band start/stop)
Blue Trace (Peak trace line)

11.42 Band Edge Plots: MIMO Mode of Operation – HT20 Low Channel 5745 MHz

Vertical Antenna – Lower Band Edge – Average Measurements

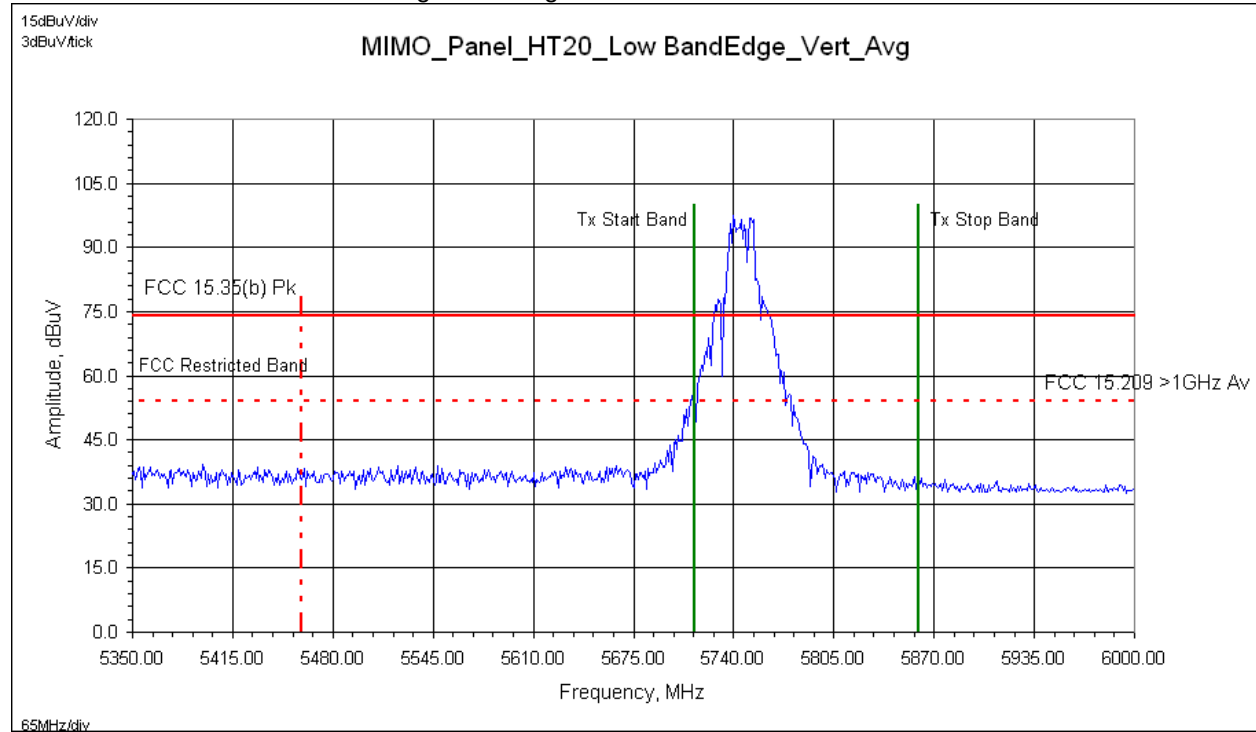

Horizontal Antenna – Lower Band Edge – Average Measurements

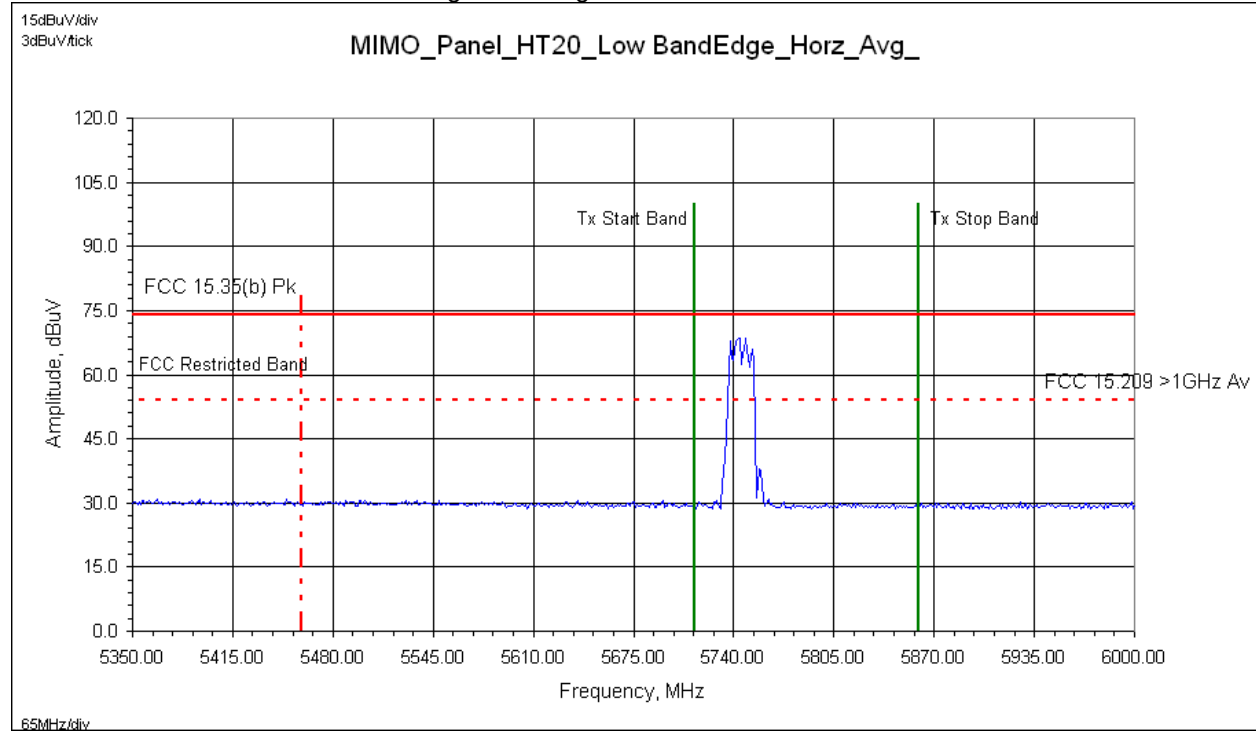


Reference only – max hold peak detector measurements referenced to average & peak limits


Legend: **Green Vertical Lines** (Tx allowable start/stop band)
Red Vertical Dashed-Lines (Restricted Band)
Blue Trace (Average trace line)

11.43 Band Edge Plots: MIMO Mode of Operation – HT20 High Channel 5825 MHz

Vertical Antenna – Upper Band Edge – Peak Measurements

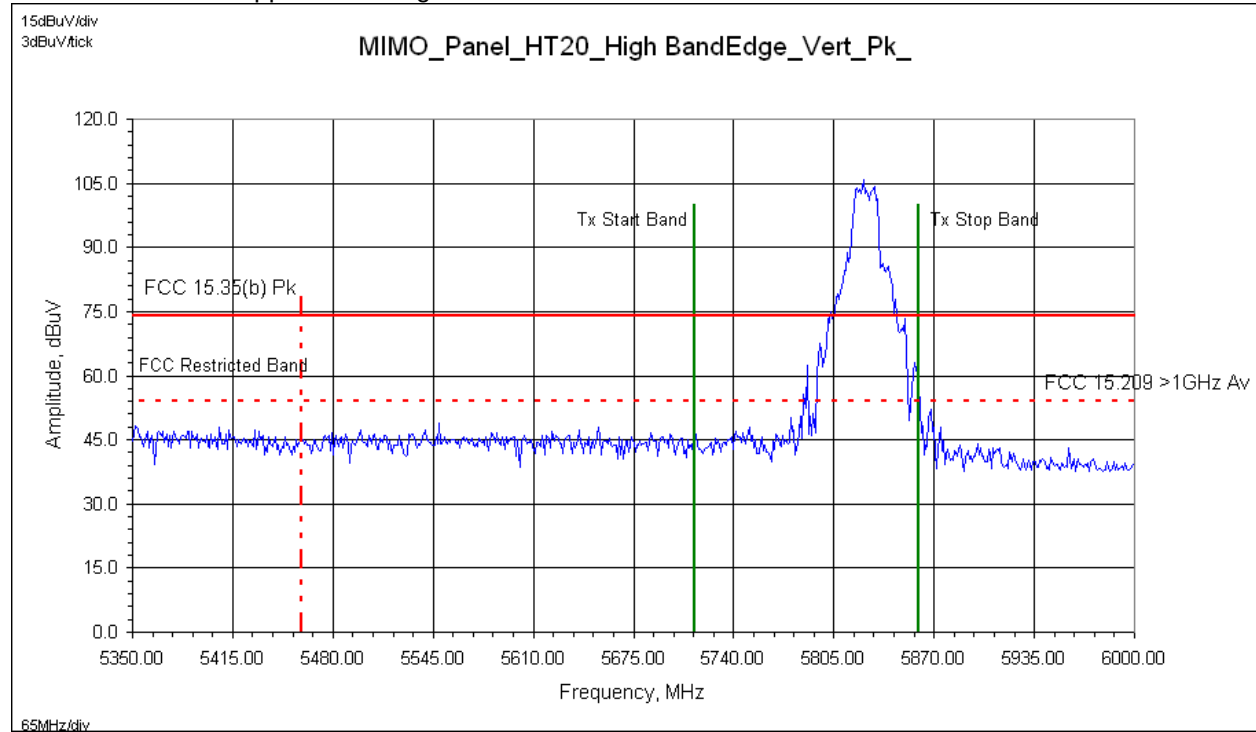

Horizontal Antenna – Upper Band Edge – Peak Measurements

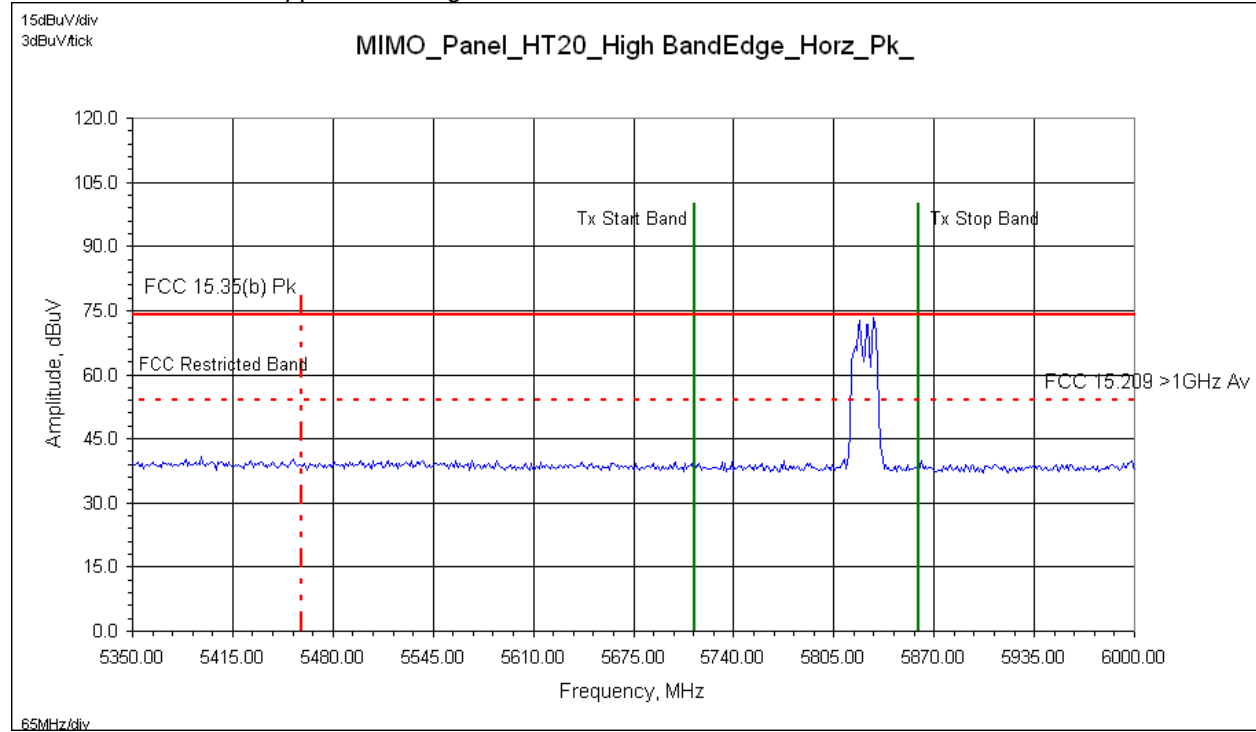


Reference only – max hold peak detector measurements referenced to average & peak limits


Legend: **Green Vertical Lines** (Tx allowable start/stop band)
Red Vertical Lines (Restricted Band)
Blue Trace (Peak trace line)

11.44 Band Edge Plots: MIMO Mode of Operation – HT20 High Channel 5825 MHz

Vertical Antenna – Upper Band Edge – Average Measurements

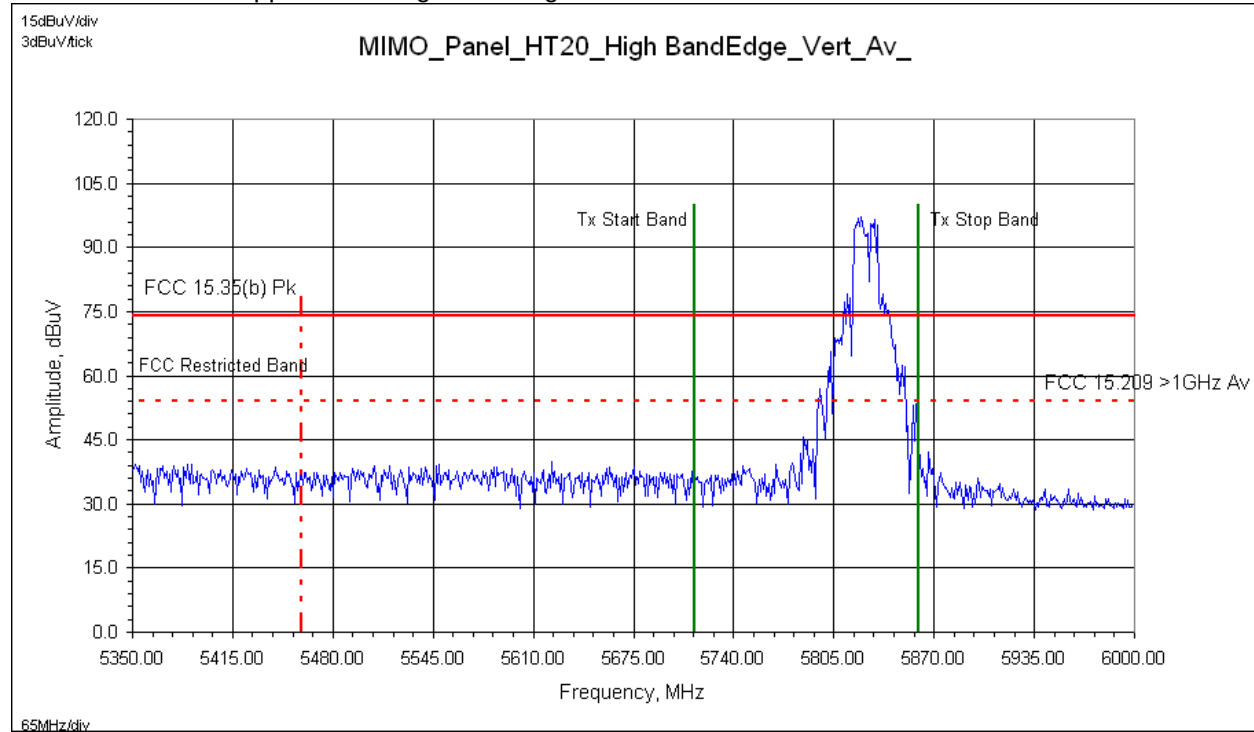

Horizontal Antenna – Upper Band Edge – Average Measurements

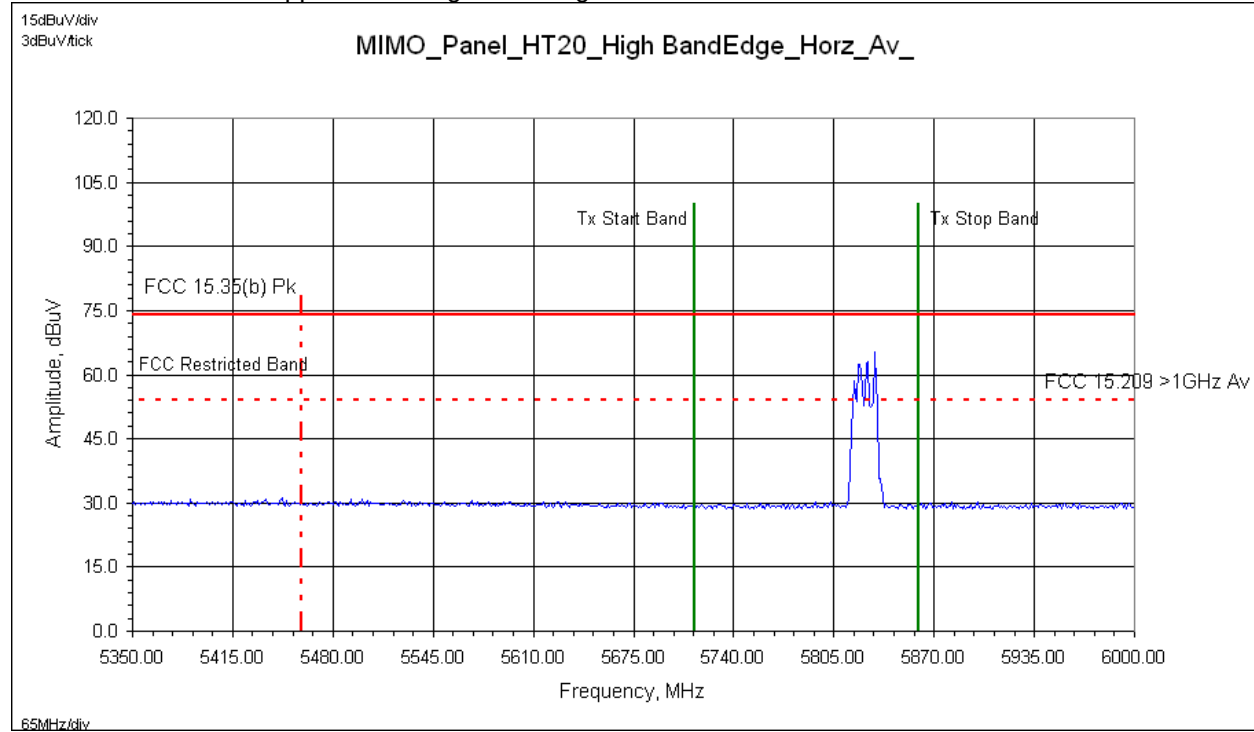


Reference only – max hold peak detector measurements referenced to average & peak limits


Legend: **Green Vertical Lines** (Tx allowable start/stop band)
Red Vertical Lines (Restricted Band)
Blue Trace (Average trace line)

11.45Band Edge Plots: MIMO Mode of Operation – HT40 Low Channel 5765 MHz

Vertical Antenna – Lower Band Edge – Peak Measurements

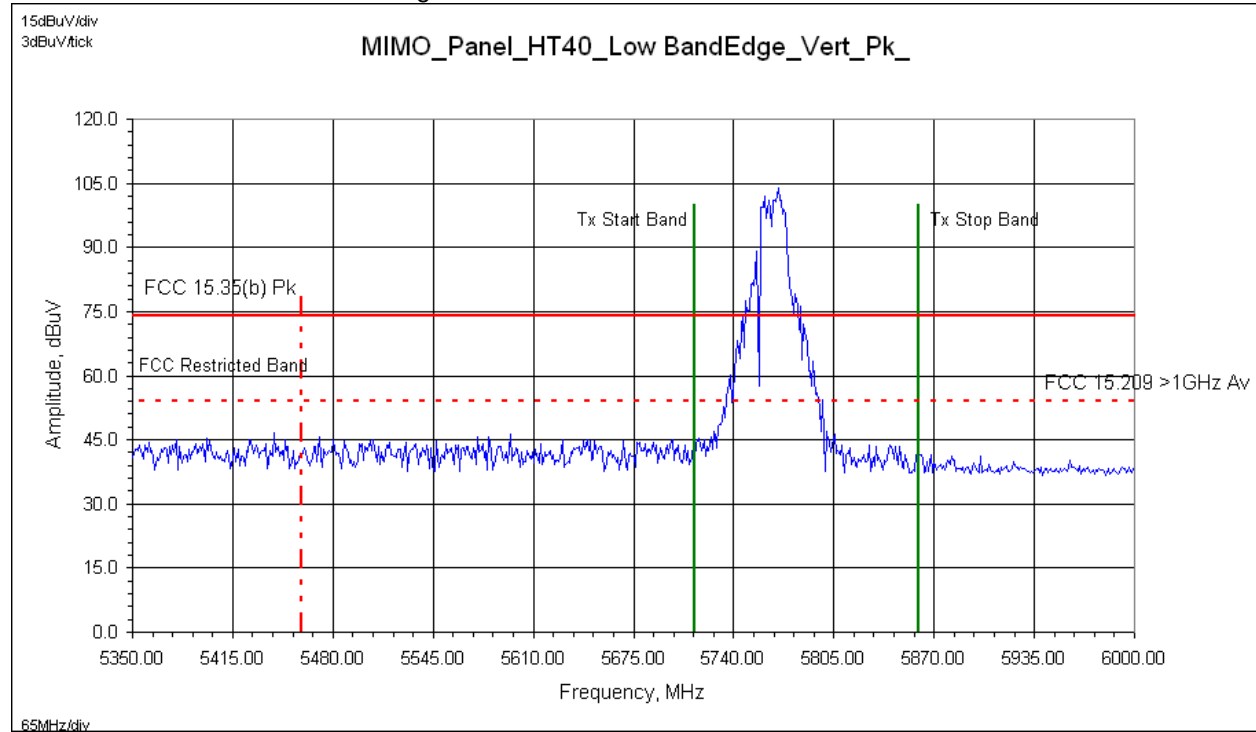

Horizontal Antenna – Lower Band Edge – Peak Measurements

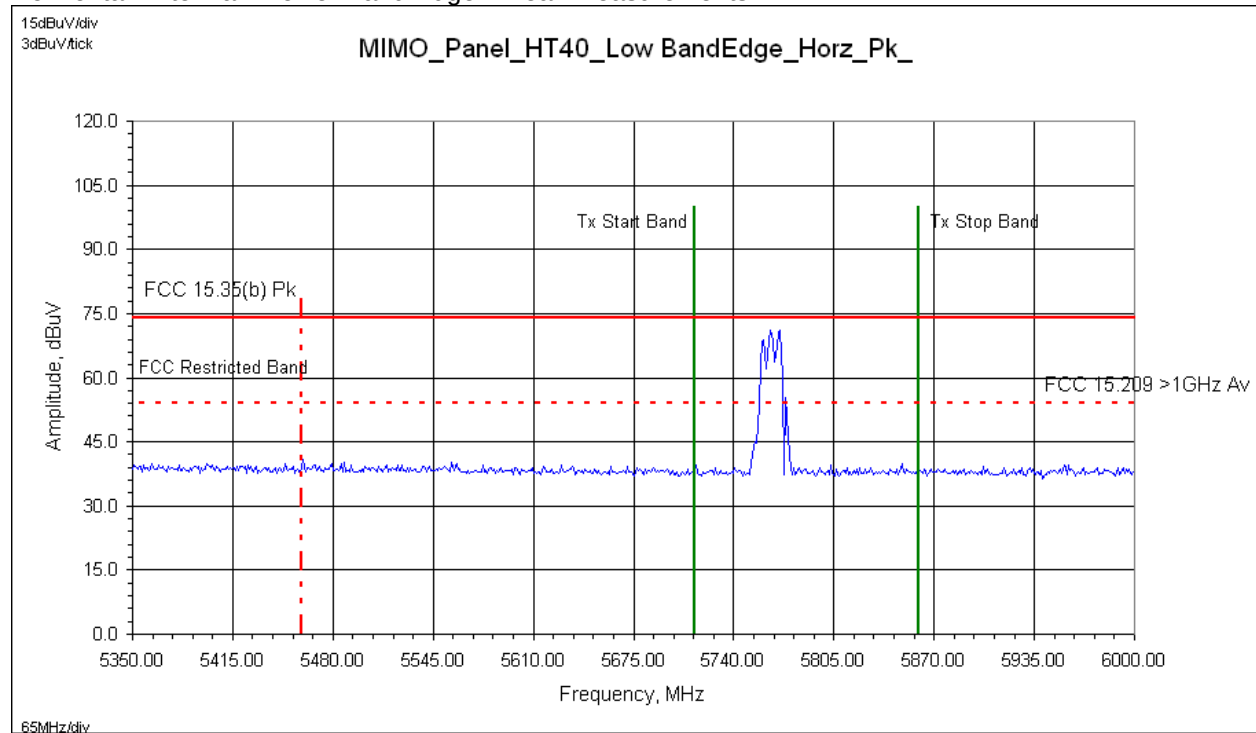


Reference only – max hold peak detector measurements referenced to average & peak limits


Legend: Green Vertical Lines (Tx allowable start/stop band)
Red Vertical Lines (Restricted Band)
Blue Trace (Peak trace line)

11.46 Band Edge Plots: MIMO Mode of Operation – HT40 Low Channel 5765 MHz

Vertical Antenna – Lower Band Edge – Average Measurements

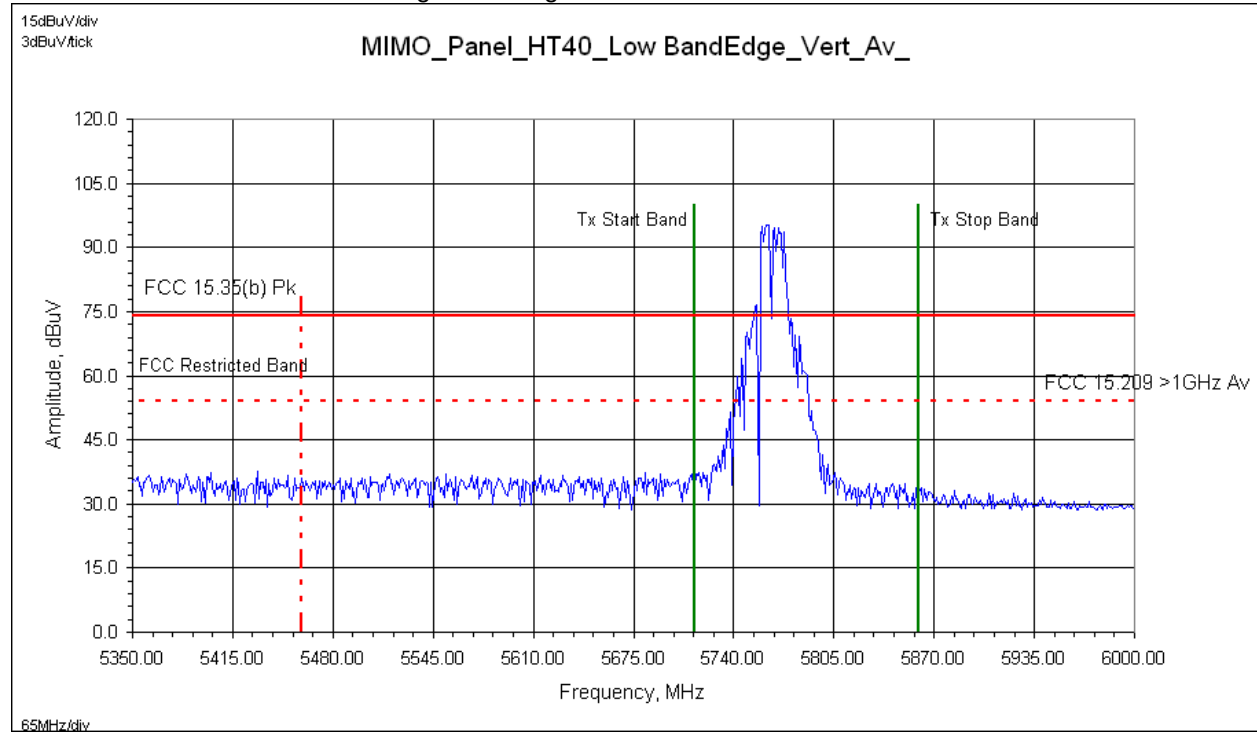

Horizontal Antenna – Lower Band Edge – Average Measurements

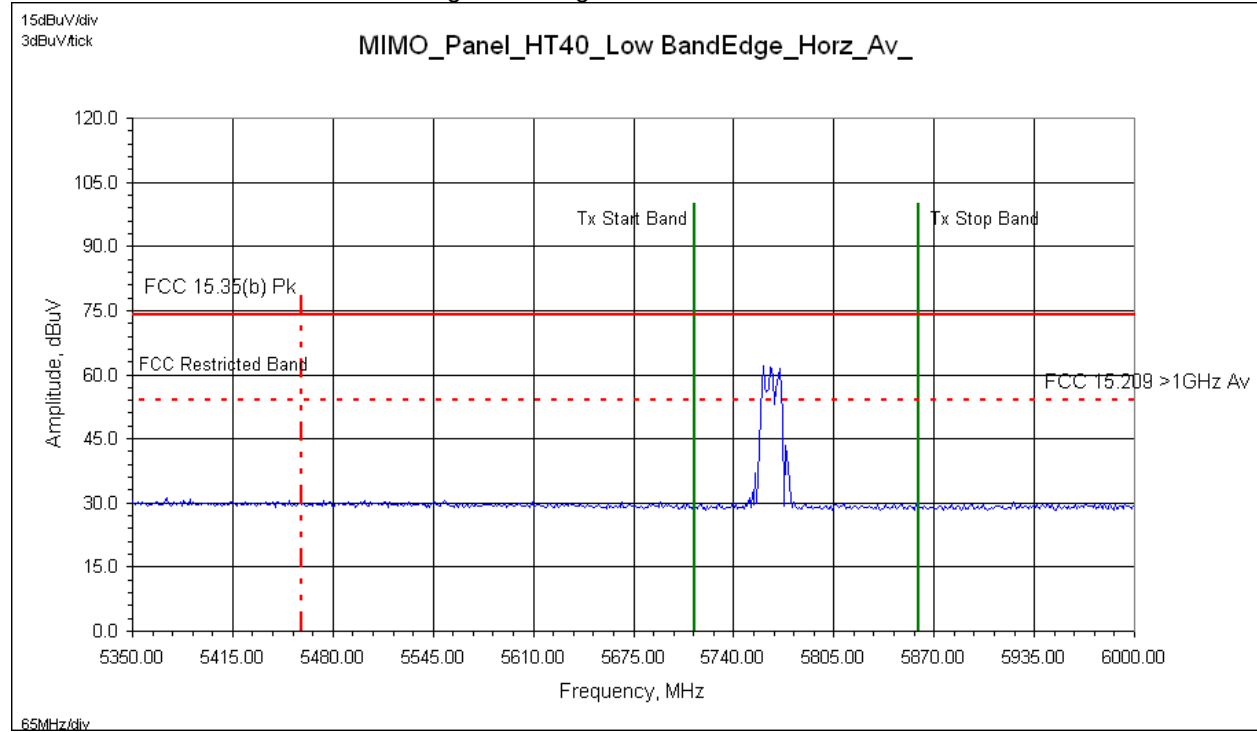


Reference only – max hold peak detector measurements referenced to average & peak limits


Legend: Green Vertical Lines (Tx allowable start/stop band)
Red Vertical Lines (Restricted Band)
Blue Trace (Average trace line)

11.47 Band Edge Plots: MIMO Mode of Operation – HT40 High Channel 5785 MHz

Vertical Antenna – Upper Band Edge – Peak Measurements

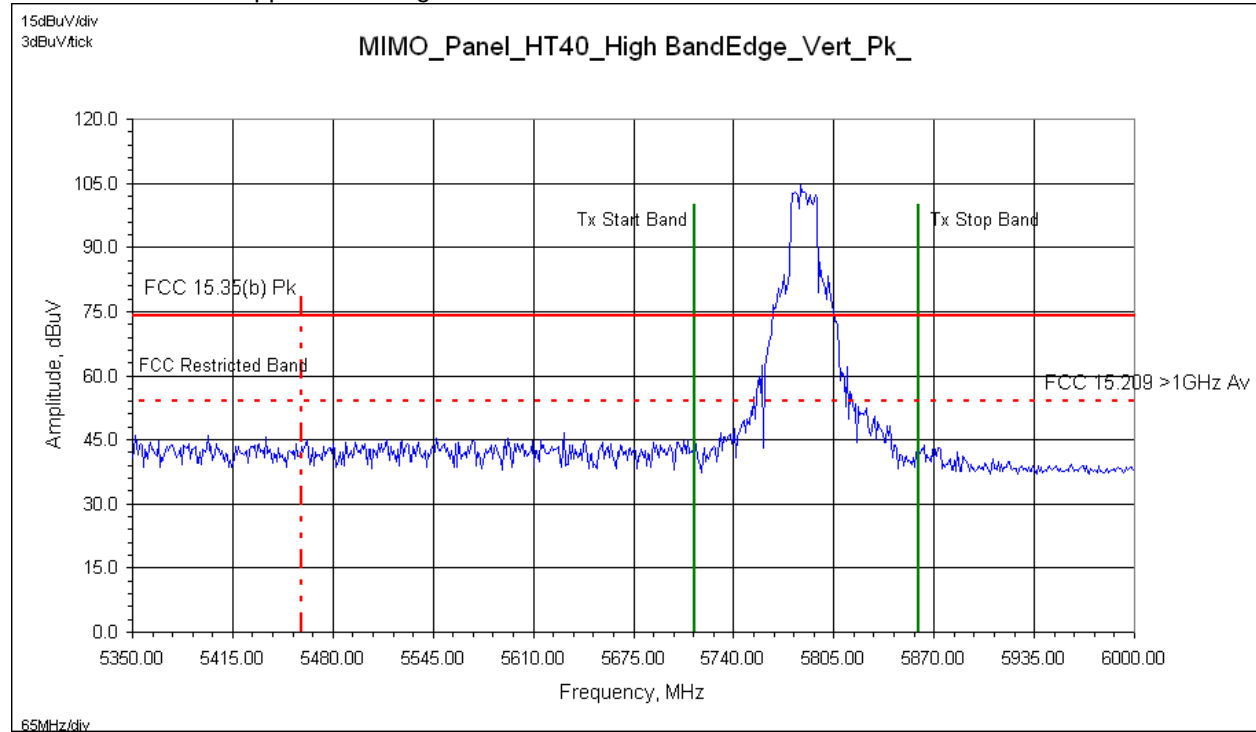

Horizontal Antenna – Upper Band Edge – Peak Measurements

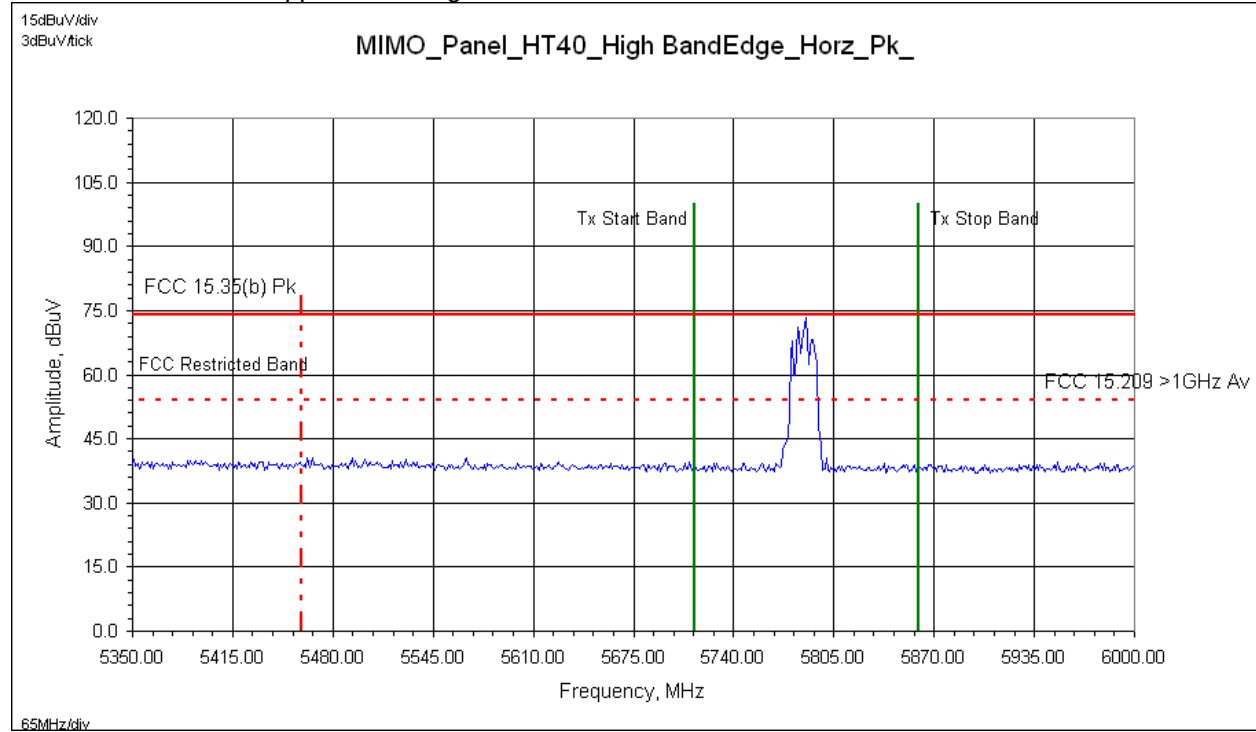


Reference only – max hold peak detector measurements referenced to average & peak limits


Legend: Green Vertical Lines (Tx allowable start/stop band)
Red Vertical Lines (Restricted Band)
Blue Trace (Peak trace line)

11.48Band Edge Plots: MIMO Mode of Operation – HT40 High Channel 5785 MHz

Vertical Antenna – Upper Band Edge – Average Measurements

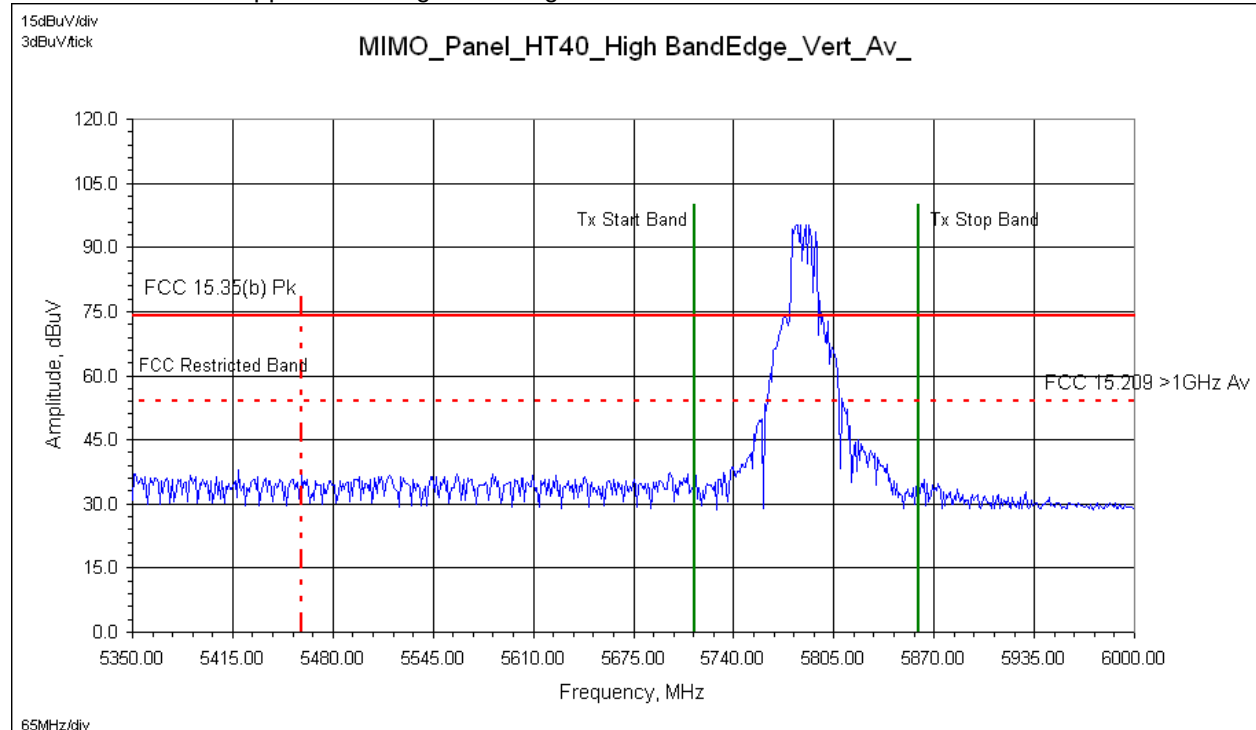

Horizontal Antenna – Upper Band Edge – Average Measurements

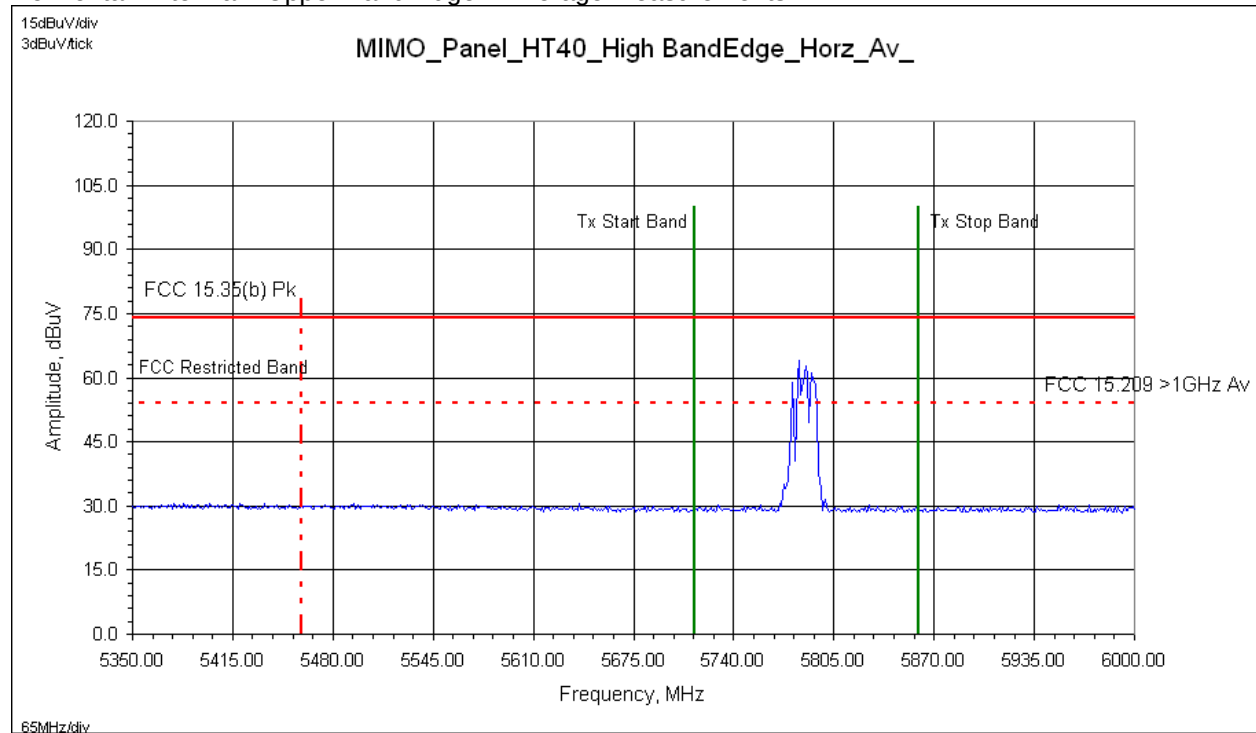

Reference only – max hold peak detector measurements referenced to average & peak limits

Legend: Green Vertical Lines (Tx allowable start/stop band)
Red Vertical Lines (Restricted Band)
Blue Trace (Average trace line)

Example calculation:

Measure d Level	+	Cable Loss	+	Antenna Factor	-	Pre- Amp	+	Atten	=	Final Correcte d Reading	Specificatio n Limit	-	Final Correcte d Reading	=	Delta Specificatio n
(dBμV)		(dB)		(dB)		(dB)		(dB)		(dBμV/m)	(dBμV/m)		(dBμV/m)		
20.0		3.0		5.0		10.0		0.0		18.0	40.0		18.0		- 22.0

Notes:

- 1) The highest signals – as determined from pre-scan plots – were fully-maximized and measured.
- 2) The notch filter was not used during band edge plots/measurements.
- 3) 802.11 a/n HT20/HT40 included in measurements as well as both SISO/MIMO modes of Tx operation.

Deviations, Additions, or Exclusions: None

Intertek	
Report Number: 101503607DEN-001B	Issued: TBD

12 Power Spectral Density – PSD

12.1 Test Results:

Test not required for Class II Permissive Change.

13 Radiated Emissions (Digital Part of Receiver)

13.1 Test Results:

Test not required for Class II Permissive Change.

14 AC Mains Conducted Emissions - Transmitter

14.1 Test Results:

Test not required for Class II Permissive Change.

15 RF Exposure Requirement

15.1 Test Results:

To be supplied by the customer.

16 Duty Cycle/ Duty Cycle Correction Factor

16.1 Results:

Test not required for Class II Permissive Change.

17 Appendix A: Antenna Specifications



Xcelerator™ Series

Flat Panel Antenna

5.15 - 5.85 GHz

Key Features

- Enhanced system performance in aesthetically pleasing package
- Superior VSWR of 1.4:1 across the 5.15 - 5.85 GHz frequency band
- Excellent front-to-back ratio of 40 dB
- Low profile: Less than 1/2" thick
- Superior Radio Waves design and construction for years of reliable service
- Three year warranty



Xcelerator Model FP.5-5-18

The Leader in Microwave Antenna Innovation™

Electrical Specifications, typical

Model #	FP.5-5-18	FP1-5-24	FP2-5-28
Frequency, GHz	5.15 - 5.85	5.15 - 5.85	5.15 - 5.85
Gain, dBi (nominal)			
Low	17.7	23.6	27.8
Mid	17.9	23.8	28.0
High	18.1	24.2	28.2
Beamwidth -3dB	18 degrees	9 degrees	4.5 degrees
X-Pol. Rejection (dB)	25	30	30
F/B Ratio (dB)	30	40	40
VSWR, Max	1.4:1	1.4:1	1.4:1
Dimensions (inches)	6 x 6 x .5	12 x 12 x .5	24 x 24 x .5
Weight (lbs.)	3	5	10
RF Interface	"N" (F)	"N" (F)	"N" (F)
Mount	Included	Included	Included

Note:

Product specifications may change without notice.

Radio Waves, Inc. • 495 R Billerica Avenue • N. Billerica, MA 01862 USA • Tel: (978) 459-8800 • Fax: (978) 459-3310
sales@radiowavesinc.com www.radiowavesinc.com

DS-Xcelerator Rev. E

18 Measurement Uncertainty

The measured value related to the corresponding limit will be used to decide whether the equipment meets the requirements.

The measurement uncertainty figures were calculated and correspond to a coverage factor of $k = 2$, providing a confidence level of respectively 95.45 % in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian).

Measurement uncertainty Table

Parameter	Uncertainty $\pm$	Notes
Radiated emissions, 10kHz to 30 MHz	3.4 dB	
Radiated emissions, 30 to 200 MHz HP	2.2 dB	
Radiated emissions, 30 to 200 MHz VP	3.8 dB	
Radiated emissions, 200 to 1000 MHz HP	2.8 dB	
Radiated emissions, 200 to 1000 MHz VP	2.7 dB	
Radiated emissions, 1 to 18 GHz	5.2 dB	
Conducted port emissions 10kHz to 1000 MHz	1.0 dB	
Conducted port emissions 1 – 26.5 GHz	1.6 dB	
AC mains Conducted emissions, 9kHz to 30 MHz	3.14 dB	

Intertek	
Report Number: 101503607DEN-001B	Issued: TBD

19 Revision History

Revision Level	Date	Report Number	Notes
0	2/26/2014	101503607DEN-001B	Original Issue