
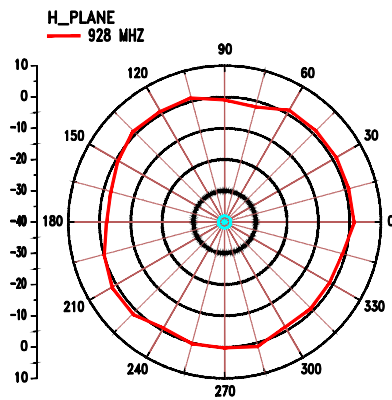
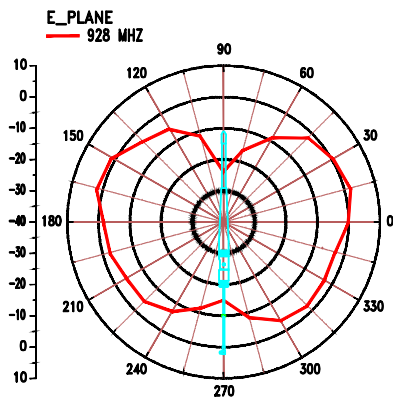
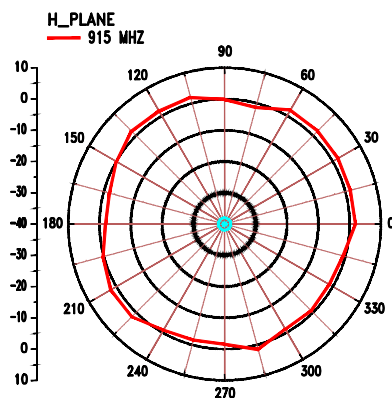
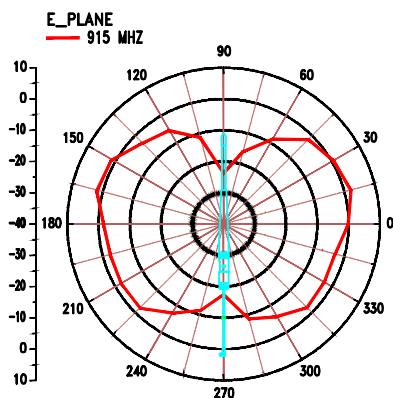
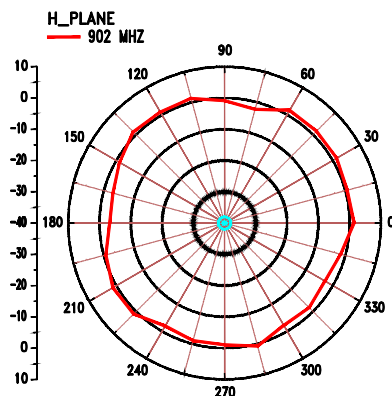


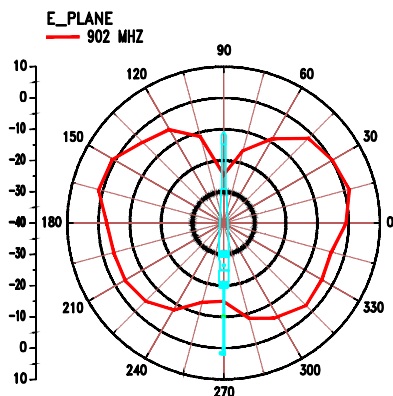


Electrical Properties:

Frequency Range: 902~928 MHz
 Impedance: 50Ω nominal
 VSWR: <2.0:1
 Gain: *2.0 dBi
 Radiation: Omni
 Polarization: Vertical
 Wave: Half-Wave Dipole

*Gain is measured under no flying lead.

Mechanical Properties:

Cable: M17/93-RG178
 Cable Length: Length L=6 inches.
 Material: Polyurethane(Black); BASF
 Overmold: Polyurethane(Black); BASF and
 Swivel: Polycarbonate(Black); Bayer
 Operation Temp.: -20°C to +65°C
 Storage Temp.: -30°C to +75°C

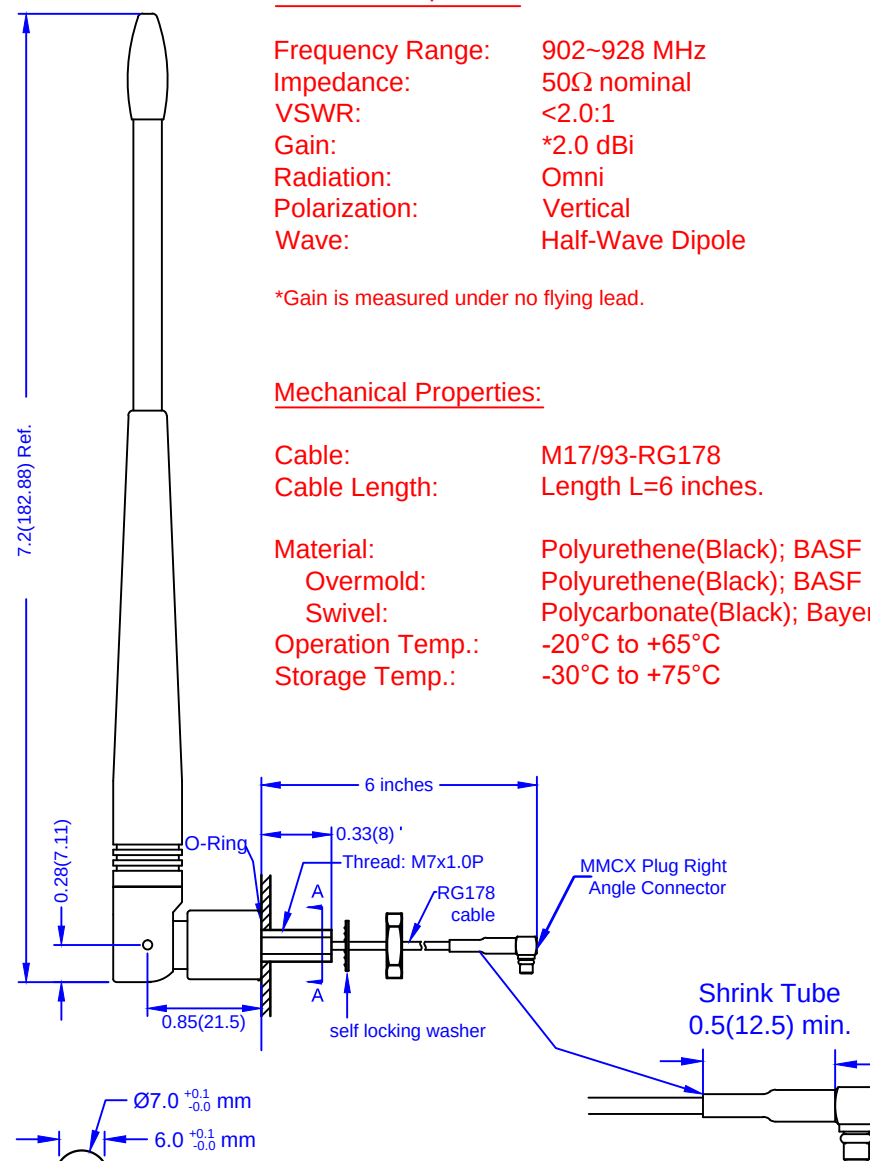

Double D cut
 Mounting Hole
 A-A View

TITLE		DATE	SHEET
900MHz Fixed Mount Swivel Antenna - 467 Model		042524	1 of 2
UNIT	DWG. NO.	S467FL-6-RMM-915S	
in.(mm)		NEARSON	
SCALE			
0.7:1			