


ENVELOPE

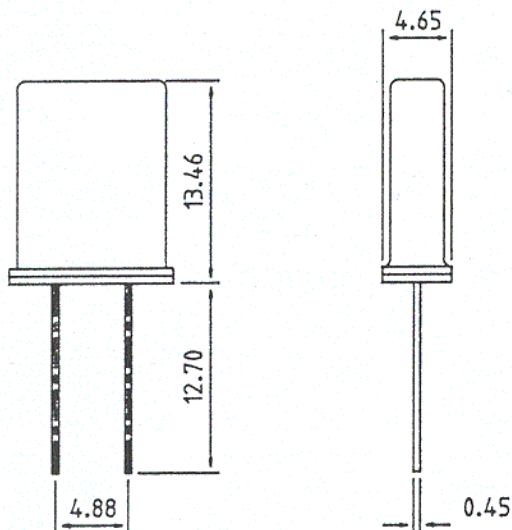

ELECTRICAL SPECIFICATIONS

FREQUENCY: 12.800 MHz

MODE: FUNDAMENTAL, AT CUT

TEMPERATURE STABILITY: ± 5 ppm FROM -10 TO 60 deg. C.

CALIBRATION TOLERANCE: ± 10 ppm

LOAD CAPACITANCE: 20 pF

SHUNT CAPACITANCE (C_0): 7.5 pF MAXIMUM

MOTIONAL INDUCTANCE (L_m): 4.15 mH to 5.07 mH

ESR: 30 OHMS MAXIMUM

HOLDER: HC-49/U

RF TECHNOLOGY PTD. LTD.

FCC ID: KRET70A

JOB #: 182U0

EXHIBIT #: 6