



**FCC Certification Test Report**  
**for**  
**Broadcast Sports, Inc.**  
**FCC ID: KTB-HUB97**

**May 6, 2004**

(Revision 1, June 21, 2004)

Prepared for:

**Broadcast Sports, Inc.**  
**1360 Blair Drive**  
**Odenton, MD 21113**

Prepared By:

**Washington Laboratories, Ltd.**  
**7560 Lindbergh Drive**  
**Gaithersburg, Maryland 20879**



# **FCC Certification Test Program**

## **FCC Certification Test Report for the Broadcast Sports, Inc. Hub Video Transmitter FCC ID: KTB-HUB97**

**May 6, 2004**

WLL JOB# 7960

Prepared by: Michael Violette  
President

Reviewed by: Greg Snyder.  
Chief EMC Engineer

## **Abstract**

This report has been prepared on behalf of Broadcast Sports, Inc. to support the attached Application for Equipment Authorization. The test report and application are submitted for a Licensed Non-Broadcast Station Transmitter under Part 74 F of the FCC Rules and Regulations. This Federal Communication Commission (FCC) Certification Test Report documents the test configuration and test results for a Broadcast Sports, Inc. Hub Video Transmitter.

Testing was performed on an Open Area Test Site (OATS) of Washington Laboratories, Ltd, 7560 Lindbergh Drive, Gaithersburg, MD 20879. Site description and site attenuation data have been placed on file with the FCC's Sampling and Measurements Branch at the FCC laboratory in Columbia, MD. Washington Laboratories, Ltd. has been accepted by the FCC and approved by NIST NVLAP (NVLAP Lab Code: 200066-0) as an independent FCC test laboratory.

The Broadcast Sports, Inc. Hub Video Transmitter complies with the limits for a Licensed Non-Broadcast Station Transmitter device under Part 74 F of the FCC Rules and Regulations.

## Table of Contents

|                                                          |    |
|----------------------------------------------------------|----|
| Abstract .....                                           | ii |
| 1 Introduction.....                                      | 1  |
| 1.1 Compliance Statement .....                           | 1  |
| 1.2 Test Scope .....                                     | 1  |
| 1.3 Contract Information.....                            | 1  |
| 1.4 Test Dates .....                                     | 1  |
| 1.5 Test and Support Personnel .....                     | 1  |
| 1.6 Abbreviations.....                                   | 2  |
| 2 Equipment Under Test .....                             | 3  |
| 2.1 EUT Identification & Description .....               | 3  |
| 2.2 Test Configuration .....                             | 4  |
| 2.3 Testing Algorithm.....                               | 4  |
| 2.4 Test Location .....                                  | 4  |
| 2.5 Measurements .....                                   | 5  |
| 2.5.1 References.....                                    | 5  |
| 2.6 Measurement Uncertainty .....                        | 5  |
| 3 Test Equipment .....                                   | 6  |
| 4 Test Results.....                                      | 7  |
| 4.1 RF Power Output: (FCC Part §2.1046) .....            | 7  |
| 4.2 Modulation Characteristics (FCC Part §2.201) .....   | 7  |
| 4.3 Emission Designator .....                            | 10 |
| 4.4 Occupied Bandwidth: (FCC Part §2.1049).....          | 12 |
| 4.5 Emissions and emission limitations to § 74.637.....  | 15 |
| 4.6 Radiated Spurious Emissions: (FCC Part §2.1053)..... | 26 |
| <b>4.6.1 Test Procedure</b> .....                        | 26 |
| 4.7 Frequency Stability: (FCC Part §2.1055) .....        | 30 |

## List of Tables

|                                                                    |    |
|--------------------------------------------------------------------|----|
| Table 1. Device Summary.....                                       | 4  |
| Table 2: Test Equipment List.....                                  | 6  |
| Table 3. RF Power Output .....                                     | 7  |
| Table 4. Deviation Measurements .....                              | 7  |
| Table 5. Modulation Parameters.....                                | 11 |
| Table 6. Occupied Bandwidth Results.....                           | 14 |
| <b>Table 7: EIRP Radiated Emissions Test Data: Channel 1</b> ..... | 27 |
| <b>Table 8: EIRP Radiated Emissions Test Data: Channel 8</b> ..... | 28 |
| <b>Table 9: EIRP Radiated Emissions Test Data: Channel 8</b> ..... | 29 |
| Table 10. Frequency Deviation as a Function of Temperature.....    | 30 |
| Table 11. Frequency Deviation as a Function of Voltage .....       | 31 |

## List of Figures

|                                                    |    |
|----------------------------------------------------|----|
| Figure 1. Modulated Carrier, Channel 1 .....       | 8  |
| Figure 2. Modulated Carrier, Channel 8.....        | 9  |
| Figure 3. Modulated Carrier, Channel 11 .....      | 10 |
| Figure 4. Occupied Bandwidth, Channel 1 .....      | 12 |
| Figure 5. Occupied Bandwidth, Channel 8.....       | 13 |
| Figure 6. Occupied Bandwidth, Channel 11.....      | 14 |
| <b>Figure 7. Emissions Mask, Channel 1</b> .....   | 16 |
| <b>Figure 8. Emissions Mask, Channel 1</b> .....   | 17 |
| <b>Figure 14. Emissions Mask, Channel 8</b> .....  | 18 |
| <b>Figure 15. Emissions Mask, Channel 8</b> .....  | 19 |
| <b>Figure 16. Emissions Mask, Channel 8</b> .....  | 20 |
| <b>Figure 17. Emissions Mask, Channel 8</b> .....  | 21 |
| <b>Figure 10. Emissions Mask, Channel 11</b> ..... | 22 |
| <b>Figure 11. Emissions Mask, Channel 11</b> ..... | 23 |
| <b>Figure 12. Emissions Mask, Channel 11</b> ..... | 24 |
| <b>Figure 13. Emissions Mask, Channel 11</b> ..... | 25 |

## **1 Introduction**

### **1.1 Compliance Statement**

The Broadcast Sports, Inc. Hub Video Transmitter complies with the limits for a Licensed Non-Broadcast Station Transmitter device under Part 74F of the FCC Rules and Regulations.

### **1.2 Test Scope**

Tests for radiated and conducted emissions were performed. All measurements were performed according to the 2001 version of ANSI C63.4 and EIA/TIA 603. The measurement equipment conforms to ANSI C63.2 Specifications for Electromagnetic Noise and Field Strength Instrumentation.

### **1.3 Contract Information**

|                        |                                                                 |
|------------------------|-----------------------------------------------------------------|
| Customer:              | Broadcast Sports, Inc.<br>1360 Blair Drive<br>Odenton, MD 21113 |
| Purchase Order Number: | 4472DW                                                          |
| Quotation Number:      | 60412-A                                                         |

### **1.4 Test Dates**

Testing was performed from February 9 to February 24, 2004.

### **1.5 Test and Support Personnel**

|                              |                                         |
|------------------------------|-----------------------------------------|
| Washington Laboratories, LTD | Greg Snyder, Chad Beattie, James Ritter |
|------------------------------|-----------------------------------------|

## 1.6 Abbreviations

|       |                                         |
|-------|-----------------------------------------|
| A     | Ampere                                  |
| Ac    | alternating current                     |
| AM    | Amplitude Modulation                    |
| Amps  | Amperes                                 |
| b/s   | bits per second                         |
| BW    | Bandwidth                               |
| CE    | Conducted Emission                      |
| cm    | centimeter                              |
| CW    | Continuous Wave                         |
| dB    | decibel                                 |
| dc    | direct current                          |
| EMI   | Electromagnetic Interference            |
| EUT   | Equipment Under Test                    |
| FM    | Frequency Modulation                    |
| G     | giga - prefix for $10^9$ multiplier     |
| Hz    | Hertz                                   |
| IF    | Intermediate Frequency                  |
| k     | kilo - prefix for $10^3$ multiplier     |
| M     | Mega - prefix for $10^6$ multiplier     |
| m     | Meter                                   |
| $\mu$ | micro - prefix for $10^{-6}$ multiplier |
| NB    | Narrowband                              |
| LISN  | Line Impedance Stabilization Network    |
| RE    | Radiated Emissions                      |
| RF    | Radio Frequency                         |
| rms   | root-mean-square                        |
| SN    | Serial Number                           |
| S/A   | Spectrum Analyzer                       |
| V     | Volt                                    |


## 2 Equipment Under Test

### 2.1 EUT Identification & Description

The HUB97 is a portable video transmitter specifically designed to meet the growing needs of the mobile television broadcast industry. The unit is designed to be Certificated per CFR 47, Part 74, Subpart F and functions as a stand alone transmitter for a TV ENG station. The transmitter has 16 preset channels including those in the RF ENG 2.0 GHz. and 2.5 GHz. bands as well as 2 channels in the 2.3 GHz. band. Optionally, the device can be factory tuned to any frequency between 1999 to 2500 Mhz in 250 kHz steps in accordance with FCC specifications.

The HUB97 features several capabilities that make it an ideal building block for a modular system requiring high density packaging. Four NTSC video inputs allow the user to easily switch between four video sources with no transmission delays. Additionally, a programmable audio sub carrier provides for the transmission of voice or telemetry. An RS-422 interface enables the unit to be remotely operated and provides control of all internal functions and status monitoring. The unit's small size and functional interface make it readily chassis mountable.

#### HUB97 FRONT VIEW

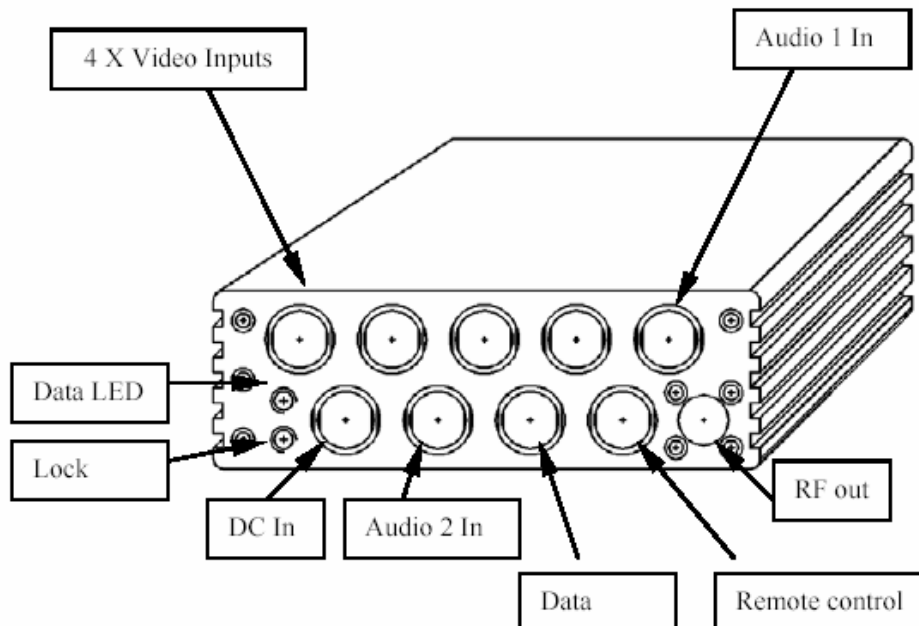

**Table 1. Device Summary**

| ITEM                    | DESCRIPTION                                                    |
|-------------------------|----------------------------------------------------------------|
| Manufacturer:           | Broadcast Sports, Inc.                                         |
| FCC ID Number           | KTB-HUB97                                                      |
| EUT Name:               | Video Transmitter                                              |
| Model:                  | Hub                                                            |
| FCC Rule Parts:         | §74 F                                                          |
| Frequency Range:        | 1999MHz – 2496MHz                                              |
| Maximum Output Power:   | 1.5W                                                           |
| Modulation:             | FM                                                             |
| Necessary Bandwidth:    | 8.724MHz                                                       |
| Keying:                 | Continuous                                                     |
| Type of Information:    | Video & Audio                                                  |
| Number of Channels:     | 16 (0-15)                                                      |
| Power Output Level      | Fixed                                                          |
| Antenna Type            | Connector                                                      |
| Frequency Tolerance:    | >0.005%                                                        |
| Emission Type(s):       | FM                                                             |
| Interface Cables:       | 4 Video Inputs<br>2 Audio<br>DC in<br>Remote control<br>RF out |
| Power Source & Voltage: | 12Vdc from vehicle                                             |
| Emissions Designator    | 8M72F3W                                                        |

## 2.2 Test Configuration

The Hub was configured with the required cables, power supply, and a Tektronix NTSC Pathfinder™ Signal Generator.

## 2.3 Testing Algorithm

The Hub was operated continuously by supplying an NTSC signal to the input, adjusted for peak signal, which modulated the carrier.

Worst-case emission levels are provided in the test results data.

## 2.4 Test Location

All measurements herein were performed at Washington Laboratories, Ltd. test center in Gaithersburg, MD. Site description and site attenuation data have been placed on file with the FCC's Sampling and Measurements Branch at the FCC laboratory in Columbia, MD. Washington Laboratories, Ltd. has been accepted by the FCC and approved by NIST NVLAP (NVLAP Lab Code: 200066-0) as an independent FCC test laboratory.

## 2.5 Measurements

### 2.5.1 References

ANSI C63.2 Specifications for Electromagnetic Noise and Field Strength Instrumentation

ANSI C63.4 American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

Land Mobile FM or PM Communications Equipment Measurement and Performance Standards (ANSI/TIA/EIA-603-93)

## 2.6 Measurement Uncertainty

All results reported herein relate only to the equipment tested. For the purposes of the measurements performed by Washington Laboratories, the measurement uncertainty is  $\pm 2.3$  dB. This has been calculated for a *worst-case situation* (radiated emissions measurements performed on an open area test site).

The following measurement uncertainty calculation is provided:

$$\text{Total Uncertainty} = (A^2 + B^2 + C^2)^{1/2}/(n-1)$$

where:

A = Antenna calibration uncertainty, in dB = 2 dB

B = Spectrum Analyzer uncertainty, in dB = 1 dB

C = Site uncertainty, in dB = 4 dB

n = number of factors in uncertainty calculation = 3

Thus, Total Uncertainty =  $0.5 (2^2 + 1^2 + 4^2)^{1/2} = \pm 2.3$  dB.

### 3 Test Equipment

Table 2 shows a list of the test equipment used for measurements along with the calibration information.

**Table 2: Test Equipment List**

| <b>Equipment</b>                                       | <b>Serial Number</b> | <b>Calibration Due</b> |
|--------------------------------------------------------|----------------------|------------------------|
| Sunol JB1 Biconilog Antenna                            | A090501              | 10/21/04               |
| ARA DRG118/A Microwave Horn Antenna                    | 1010                 | 2/17/06                |
| ARA Biconilog Antenna                                  | 1044                 | 6/20/2004              |
| A.H. Systems Log Periodic Antenna: SAS-200/518         | 117                  | 3/11/2006              |
| Narda Standard Gain Horn Antenna: V638                 | - -                  | 7/22/2004              |
| Hewlett-Packard Spectrum Analyzer: HP 8568B (Site 1)   | 2928A04750           | 7/02/04                |
| Hewlett-Packard Quasi-Peak Adapter: HP 85650A (Site 1) | 3303A01786           | 7/08/04                |
| Hewlett-Packard RF Preselector: HP 85685A (Site 1)     | 3146A01296           | 7/02/04                |
| Hewlett-Packard Spectrum Analyzer: HP 8593A            | 3009A00739           | 6/25/04                |
| Hewlett-Packard Spectrum Analyzer: HP 8563A            | 500                  | 4/04/04                |
| Hewlett-Packard Microwave Preamp: 8449B                | 3008A00729           | 2/11/05                |
| A.H. Systems Pre-Amplifier 18GHz-40 GHz                | 126                  | 1/6/2005               |
| Hewlett-Packard Synth. Signal Generator: 8672A         | 2311A03131           | 3/23/2005              |
| Hewlett-Packard Power Meter: 438A                      | 3048U02786           | 3/10/2005              |
| Hewlett-Packard 30dB Attenuator: 8481B                 | 331BA04749           | 3/10/2005              |
| Hewlett-Packard Power Head: 8481B                      | 331BA04749           | 3/10/2005              |
| Solar Electronics LISN 8012-50-R-24-BNC                | 8379493              | 6/30/04                |

## 4 Test Results

### 4.1 RF Power Output: (FCC Part §2.1046)

The output from the transmitter was connected to a power meter and the output power measured.

**Table 3. RF Power Output**

| Channel and/or Frequency | Measured<br>Level<br>(dBm) | Measured<br>Level<br>(Watts) | Rated<br>(Watts) | Limit<br>(Watts) |
|--------------------------|----------------------------|------------------------------|------------------|------------------|
| Channel 1: 1999 MHz      | 30.04                      | 1.008                        | 1.5              | 12               |
| Channel 8: 2454 MHz      | 29.80                      | 0.954                        | 1.5              | 12               |
| Channel 11: 2316 MHz     | 30.92                      | 1.24                         | 1.5              | 12               |

### 4.2 Modulation Characteristics (FCC Part §2.201)

To determine the deviation frequency, an RF signal generator was input to the modulation input of the transmitter. The transmitter output was connected to a spectrum analyzer. The 1Vp-p sinewave modulating frequency was increased and the carrier observed on the spectrum analyzer.

As the modulation frequency is increased, the fundamental signal was observed for nulls. At the null the side lobes were measured and compared to the Bessel Function chart for a modulation index of 2.4. Only one null was located as the modulation frequency was scanned up through 15MHz.

The spectrum was plotted at each of the three carrier frequencies measured and the first four Bessel terms measured. Adjusting the modulation frequency for a null in carrier and where the Bessel functions yield:

Jc1 = -5.8 dB

Jc2 = -7.3 dB

Jc3 = -14.1 dB

Jc4 = -23.9 dB

Deviations for each channel are recorded in Table 4.

**Table 4. Deviation Measurements**

| Frequency            | Deviation Frequency (MHz) |
|----------------------|---------------------------|
| Channel 1: 1999 MHz  | 1.22                      |
| Channel 8: 2454 MHz  | 1.283                     |
| Channel 11: 2316 MHz | 1.269                     |

Modulation Index: 2.4

The data are as follows:

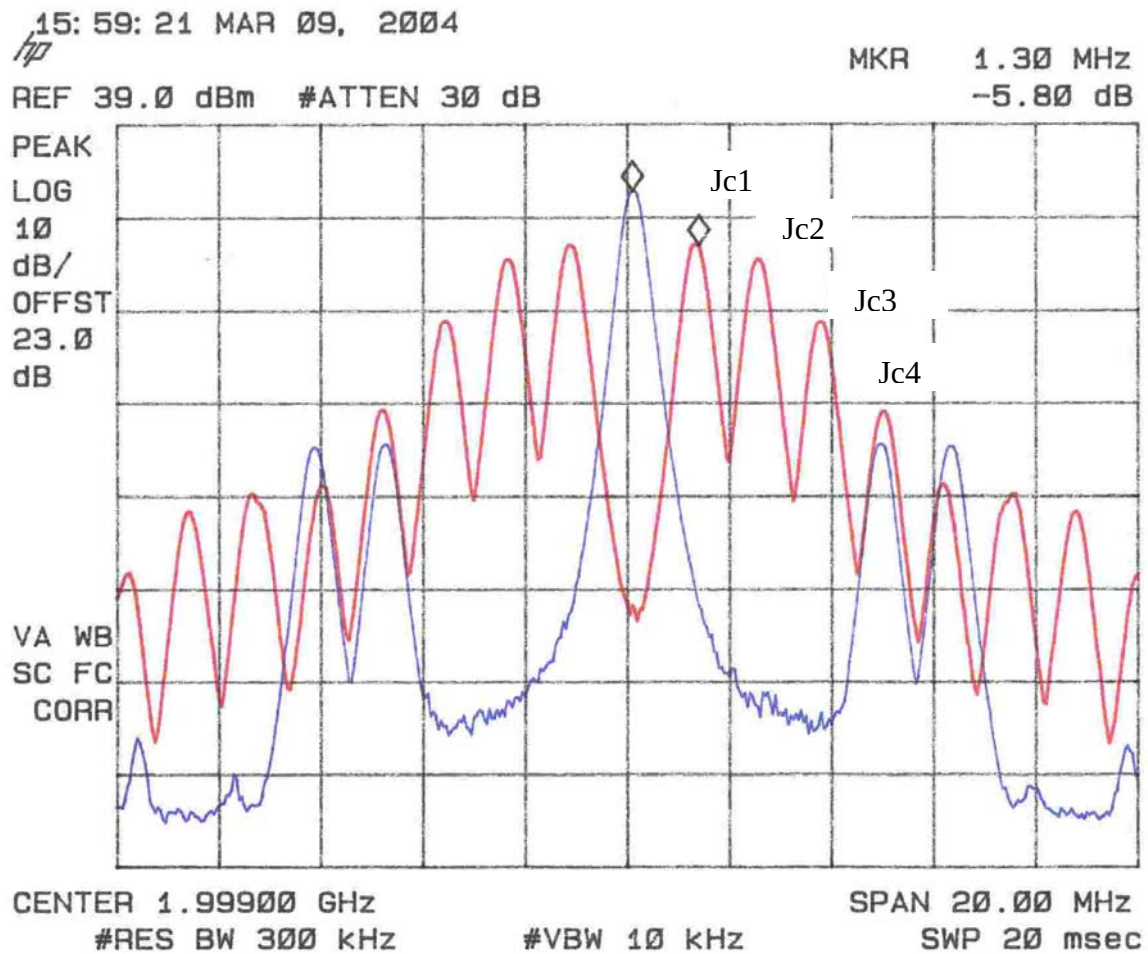


Figure 1. Modulated Carrier, Channel 1


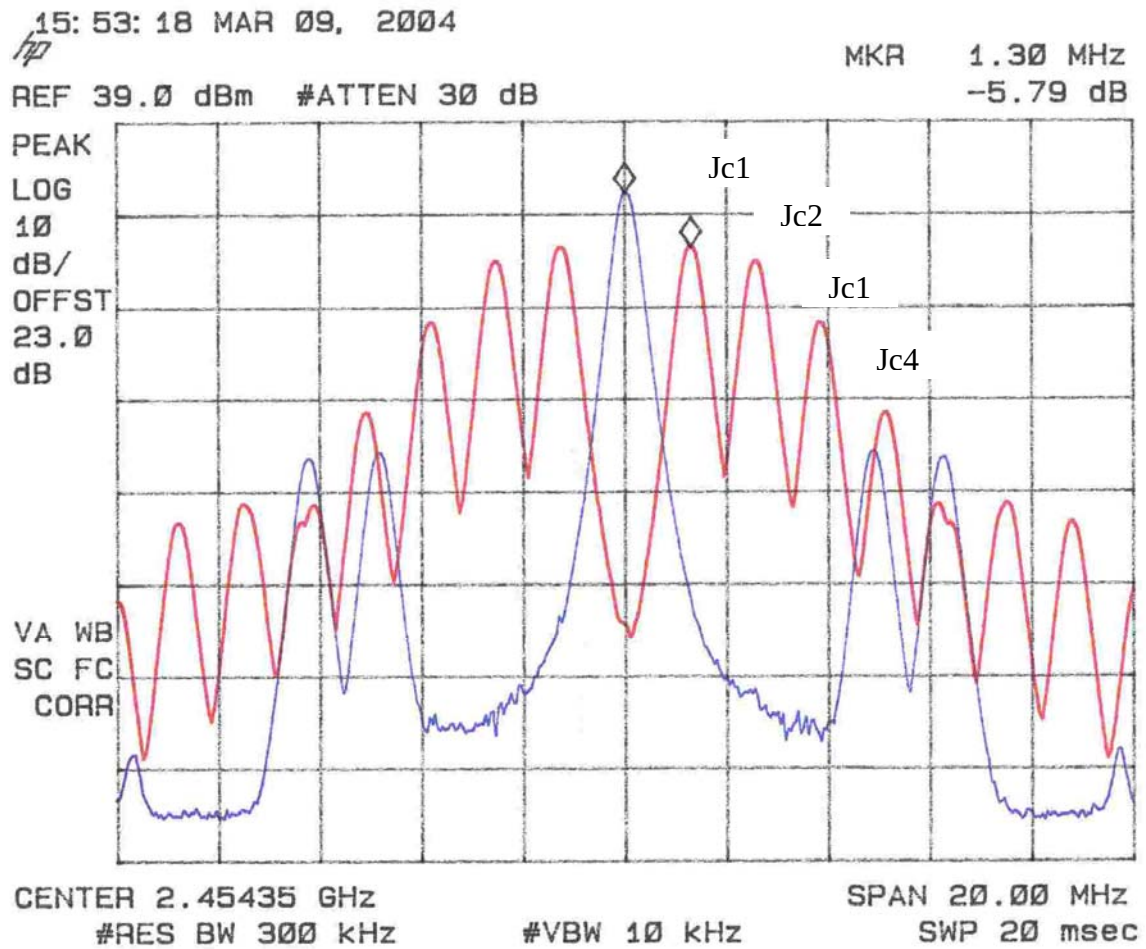


Figure 2. Modulated Carrier, Channel 8

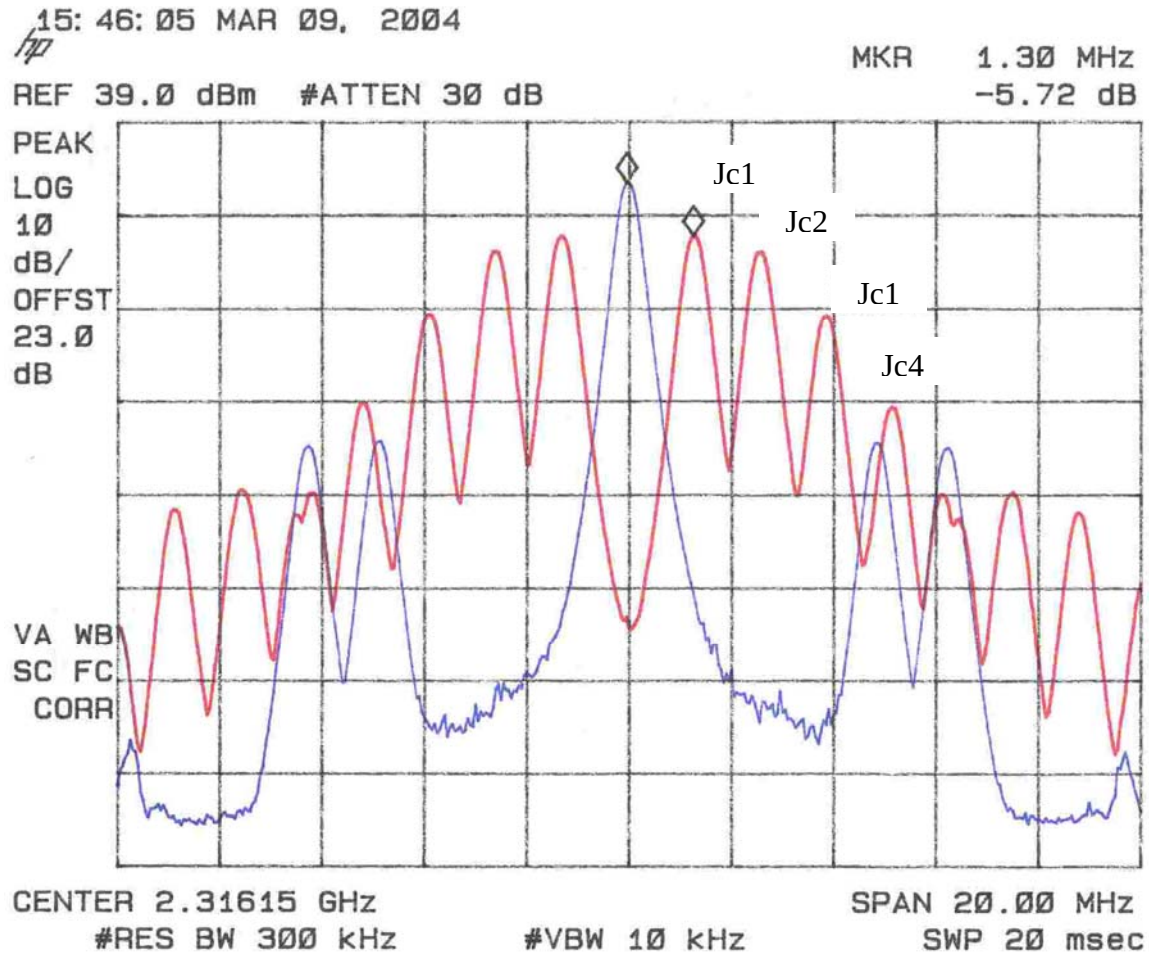

**Figure 3. Modulated Carrier, Channel 11**

#### 4.3 Emission Designator

The emission designator is determined from the necessary bandwidth, the type of modulation and the information conveyed in the signal.

Necessary bandwidth is determined from:

$$B_n = 2M + 2DK$$

Where,

$$M = \text{Deviation} = 1.283$$

$$D = \text{Deviation} \times \text{Modulation Index} = 1.283 \text{ MHz} \times 2.4 = 3.079 \text{ MHz}$$

And  $K=1$

**Table 5. Modulation Parameters**

| <b>Parameter</b>                                | <b>Result</b> |
|-------------------------------------------------|---------------|
| Modulation Index<br>(from Bessel function plot) | 2.4           |
| M Deviation                                     | 1.283 MHz     |
| Deviation = 2.4M                                | 3.079 MHz     |

Thus,

$$B_n = 2M + 2DK = (2 \times 1.283) + (2 \times 3.079) = 8.724 \text{ MHz}$$

First Symbol: F (Frequency Modulation)

Second Symbol: 3 (Single channel carrying analogue information)

Third Symbol: W (video and audio)

Emission Designator: 8M72F3W

#### 4.4 Occupied Bandwidth: (FCC Part §2.1049)

Occupied bandwidth was performed by coupling the output of the EUT to the input of a spectrum analyzer.

At full modulation, the occupied bandwidth was measured as shown:



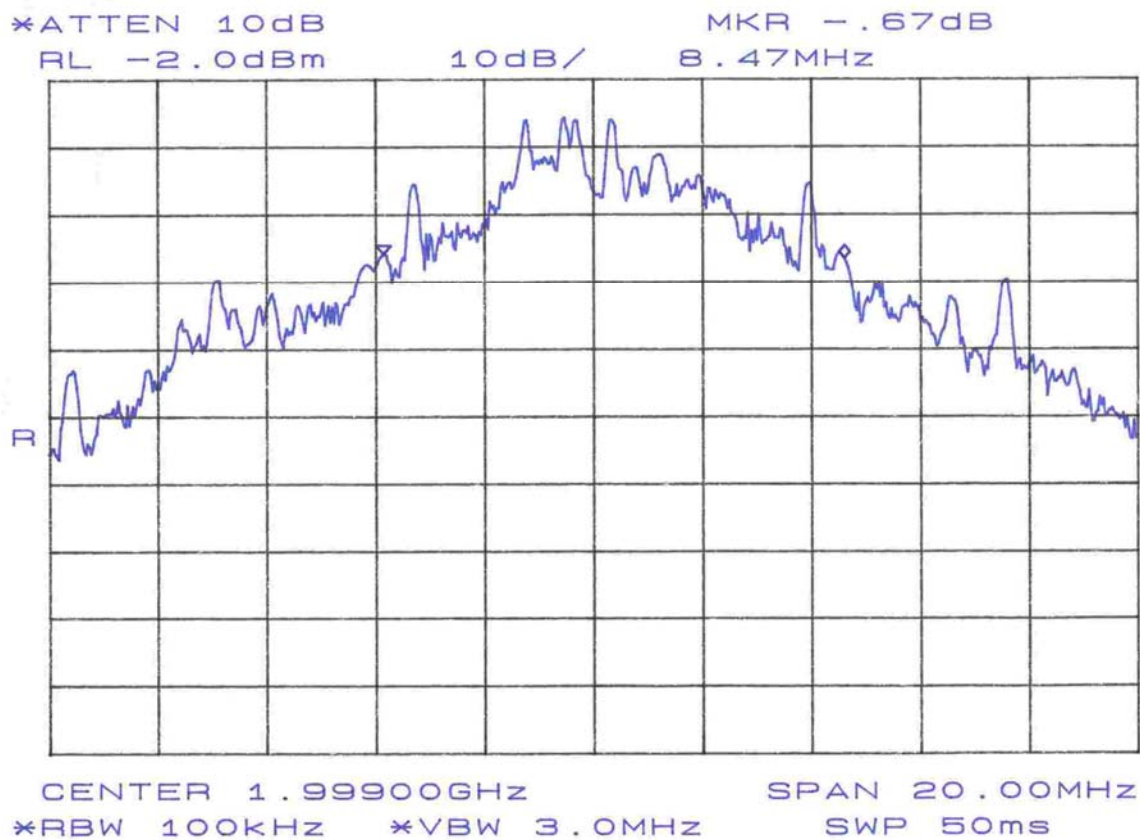


Figure 4. Occupied Bandwidth, Channel 1

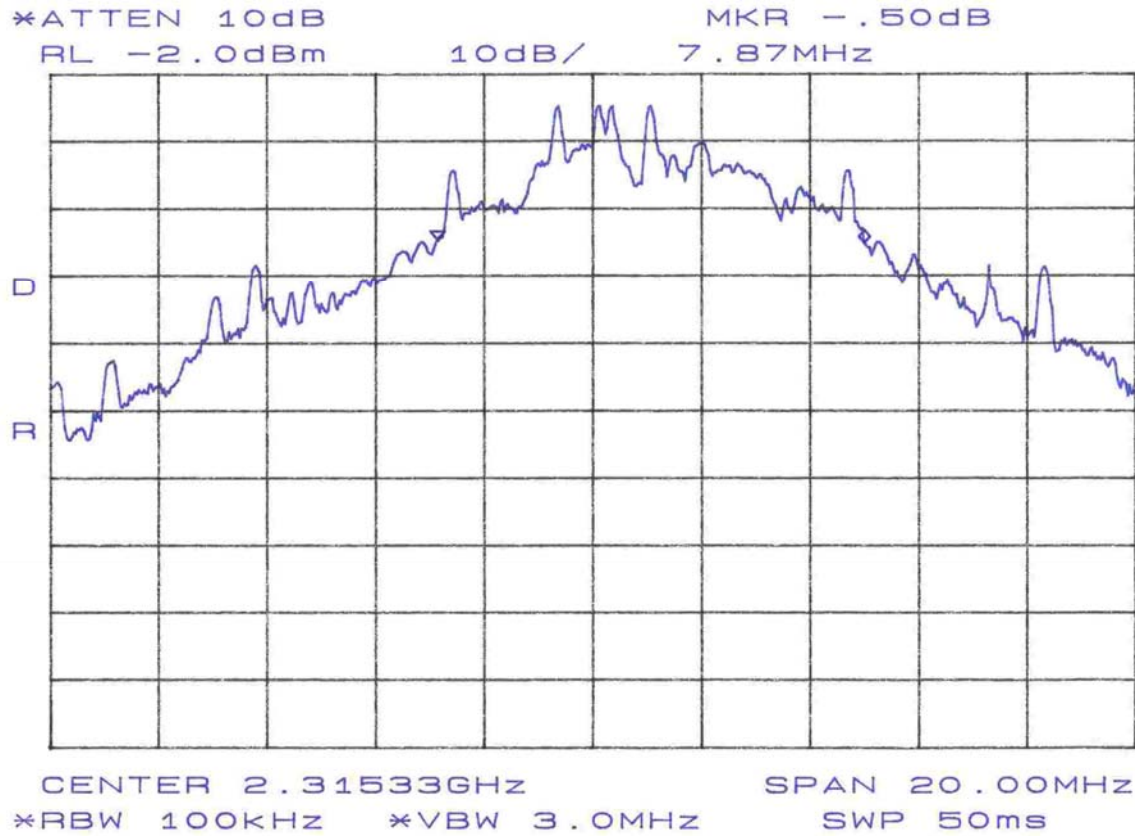

**Figure 5. Occupied Bandwidth, Channel 8**

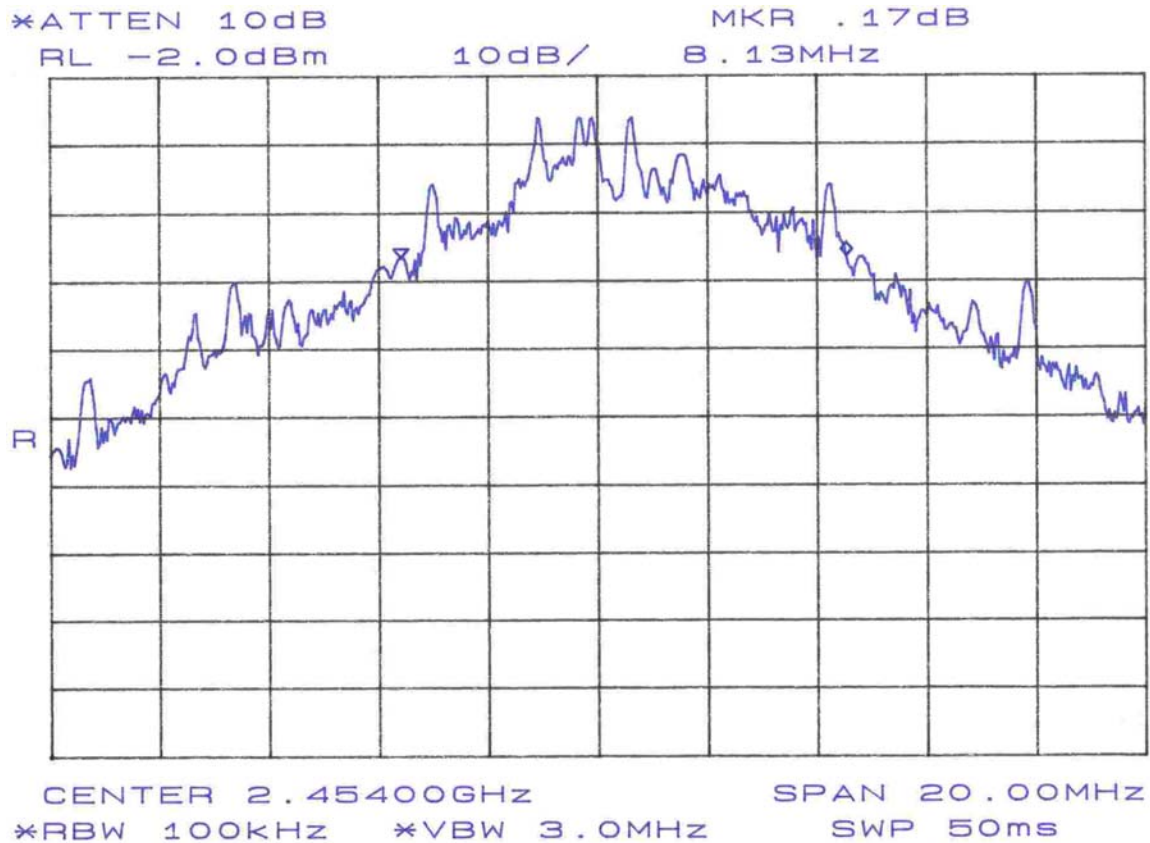

**Figure 6. Occupied Bandwidth, Channel 11**

Table 6 provides a summary of the Occupied Bandwidth Results.

### Table 6. Occupied Bandwidth Results


| Frequency              | Bandwidth |
|------------------------|-----------|
| Low Channel: 1999MHz   | 8.47MHz   |
| Mid Channel: 2315.3MHz | 7.87MHz   |
| High Channel: 2454MHz  | 8.13MHz   |

#### **4.5 Emissions and emission limitations to § 74.637**

Emissions limitations are specified in § 74.637. The output of the transmitter was connected to the input of the spectrum analyzer and the transmitter modulated. The emissions from 30 MHz to the tenth harmonic of the operating frequency were measured and provided in the following figures.

The masks are based on 74.637(a)(1) with an authorized bandwidth of 18 MHz. Note that the tighter limit specified for emissions removed from the carrier by more than 250% of the authorized bandwidth was inadvertently applied starting at 150% of the authorized bandwidth.

For the emission mask measurements the resolution bandwidth was set to 100kHz and the video bandwidth was set to 3MHz.

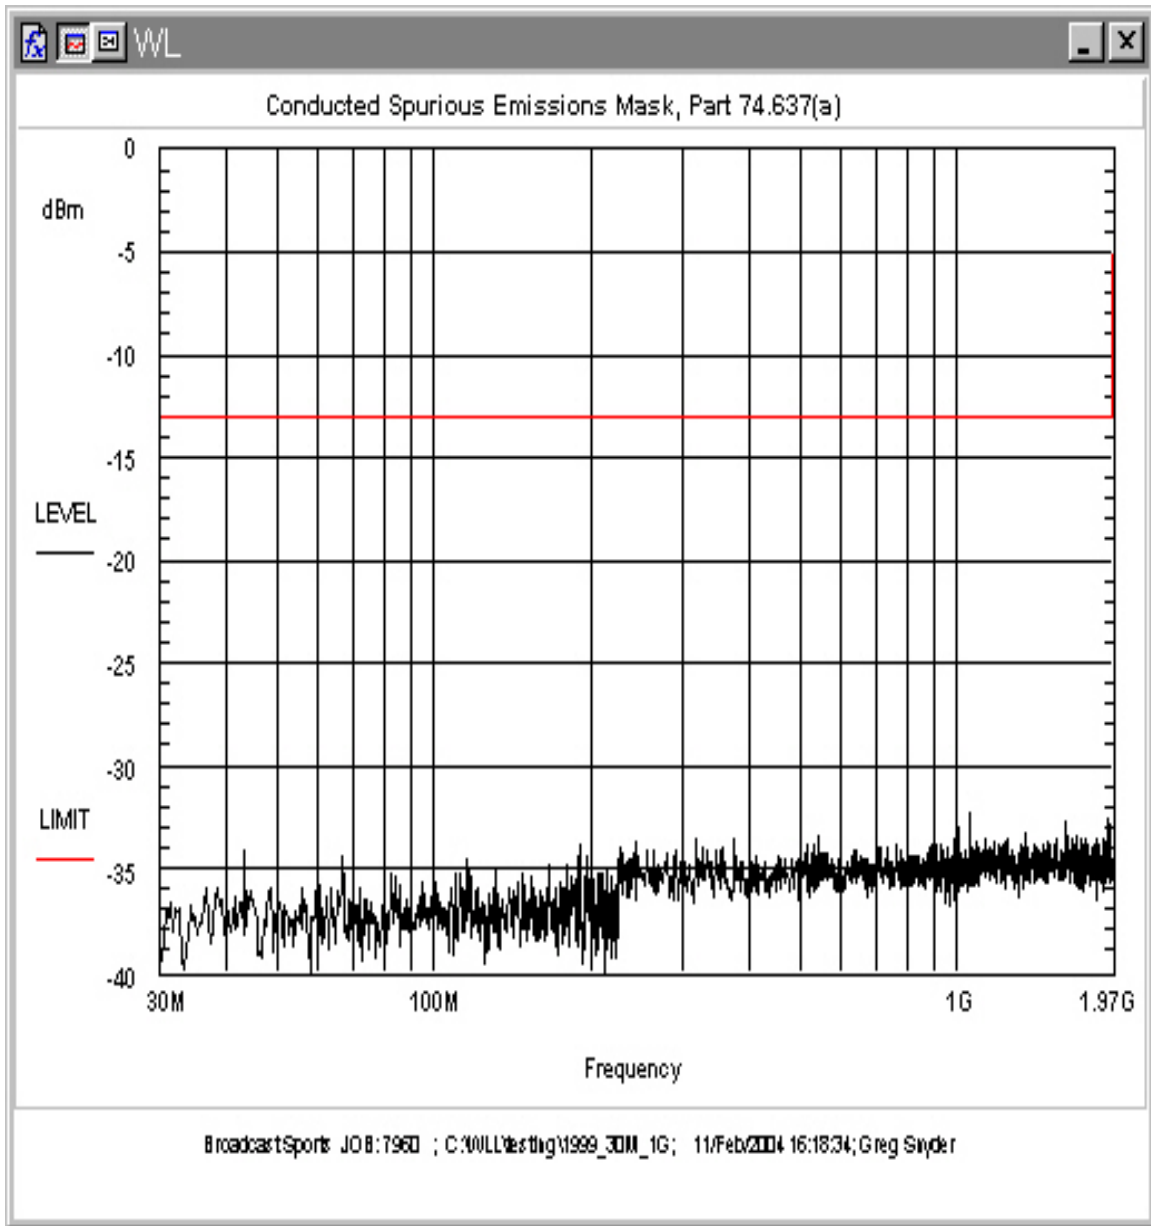

**Figure 7. Emissions Mask, Channel 1**


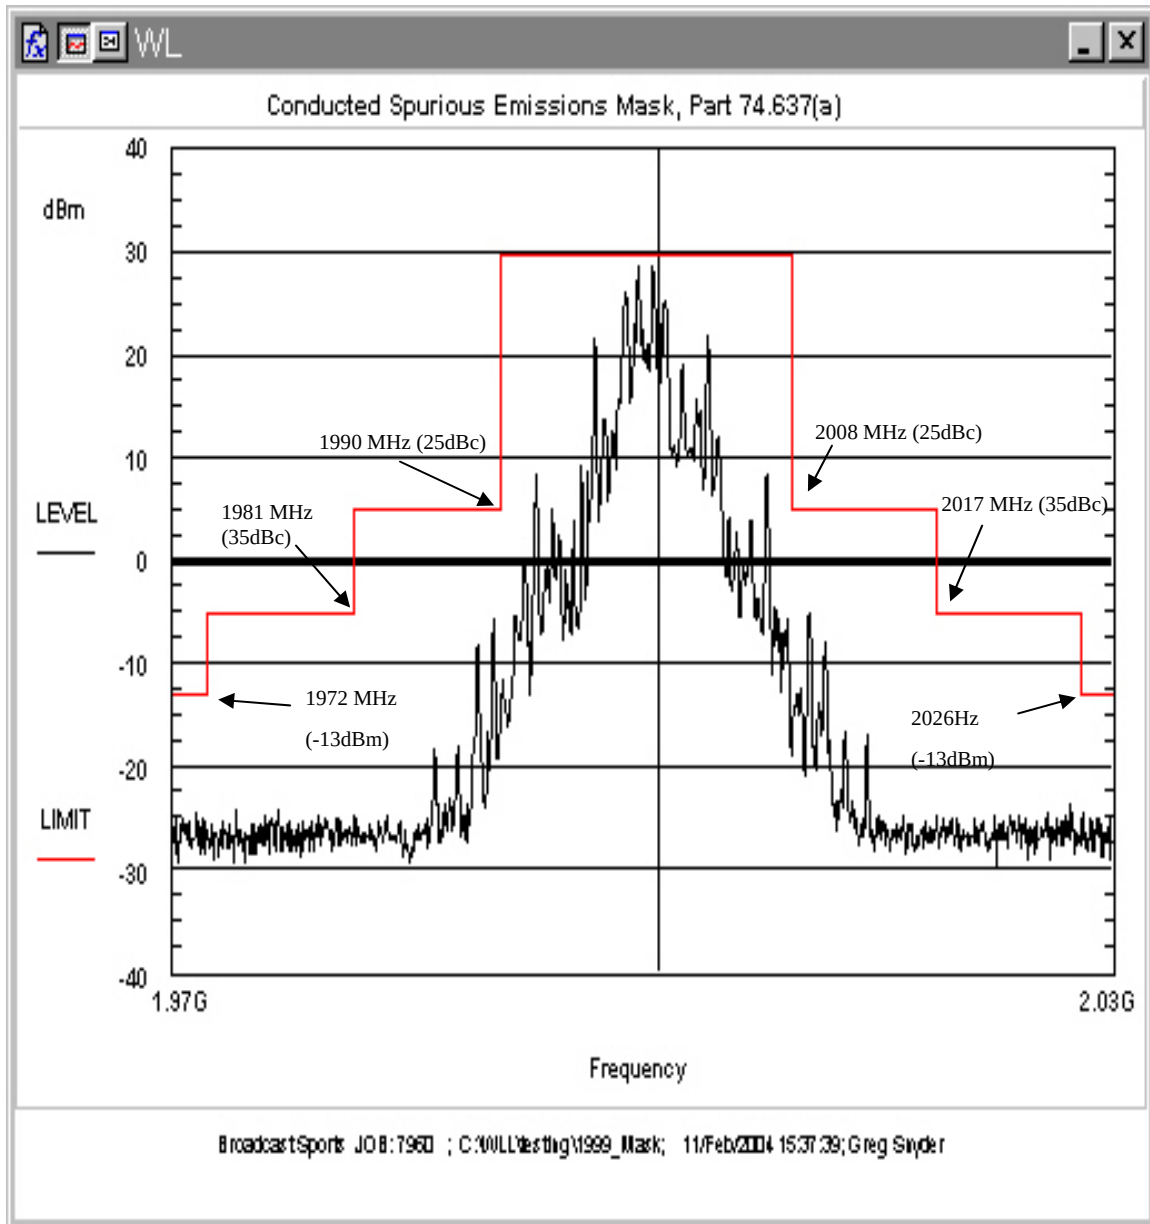


Figure 8. Emissions Mask, Channel 1

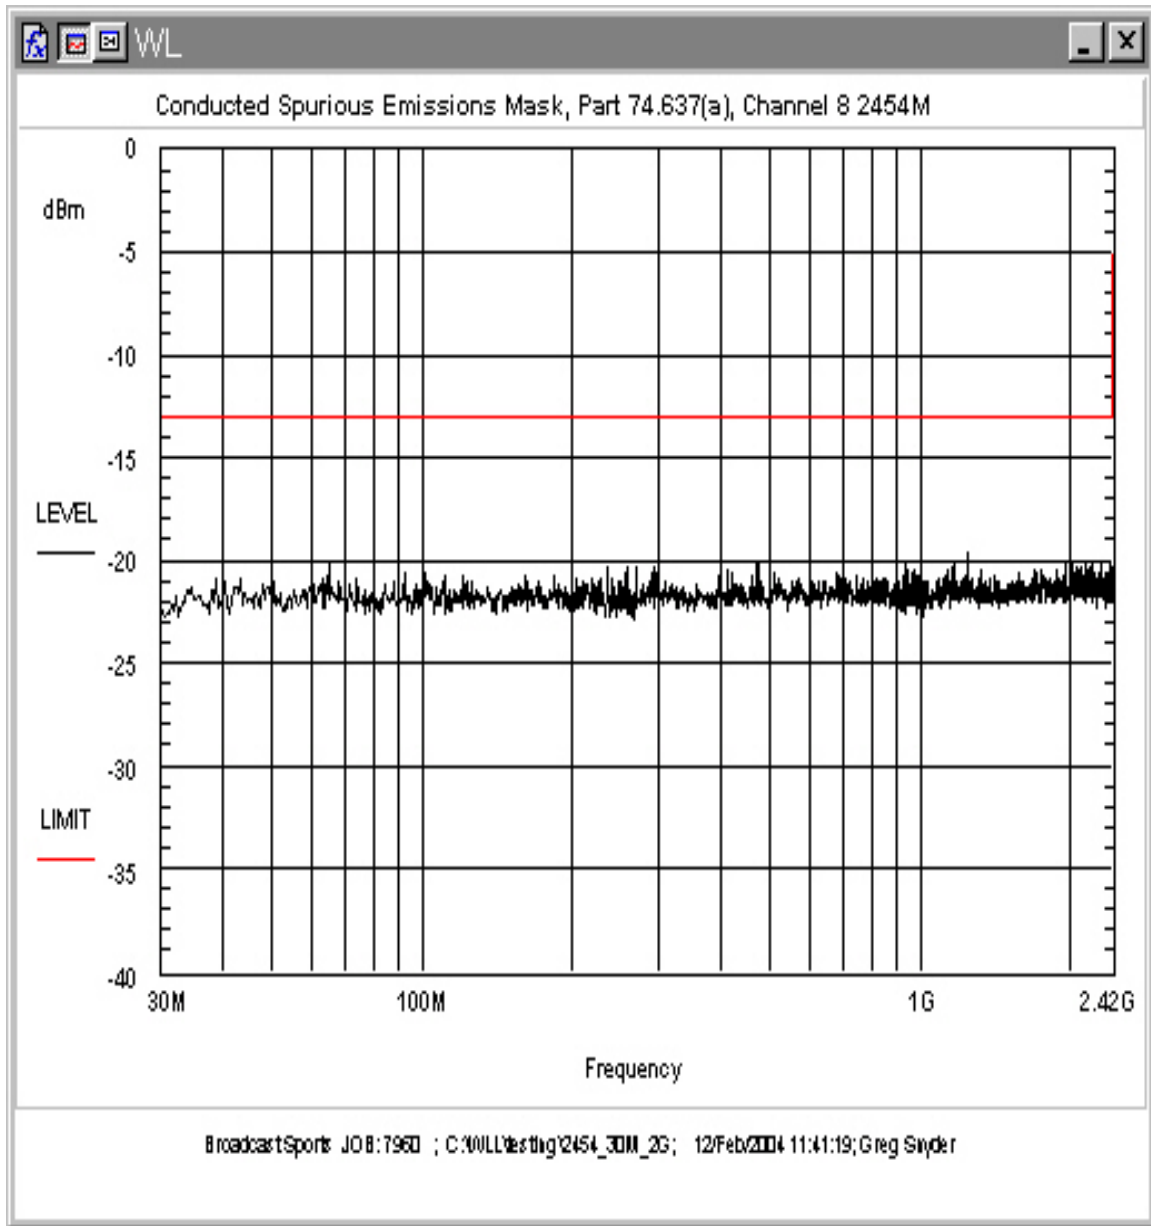

**Figure 9. Emissions Mask, Channel 8**


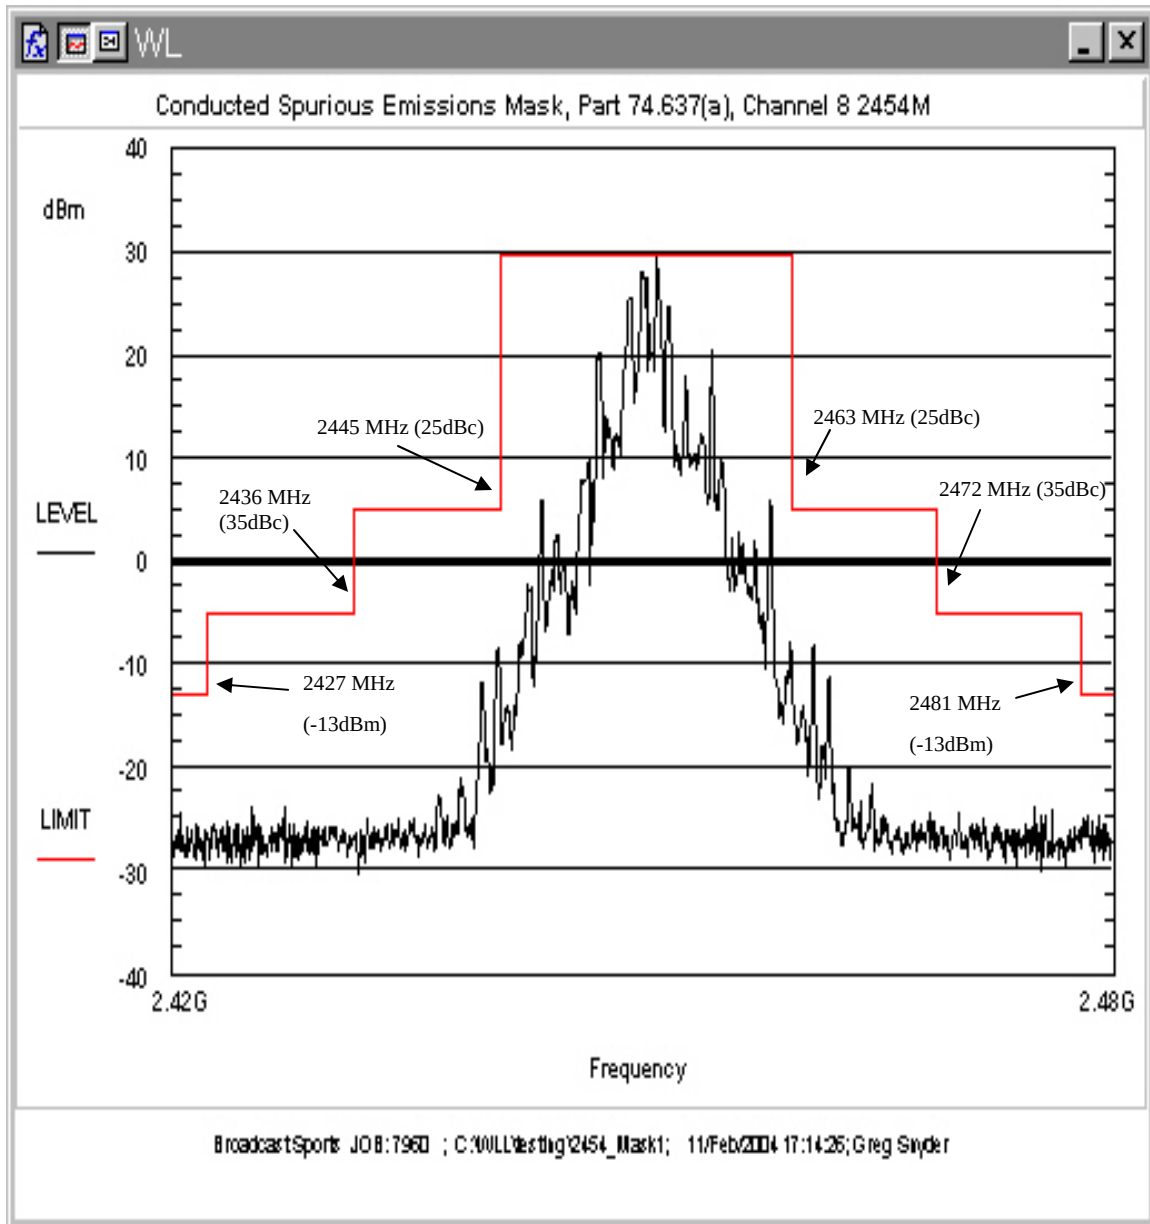


Figure 10. Emissions Mask, Channel 8

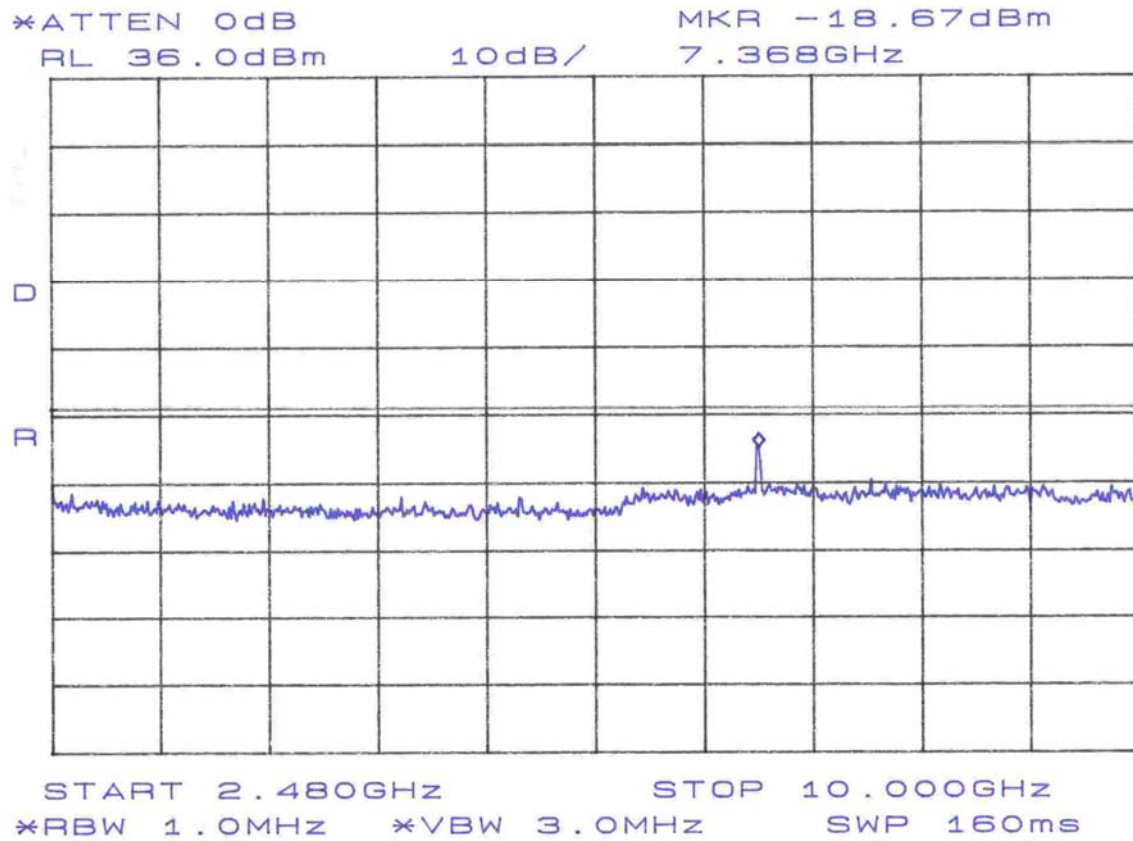

**Figure 11. Emissions Mask, Channel 8**


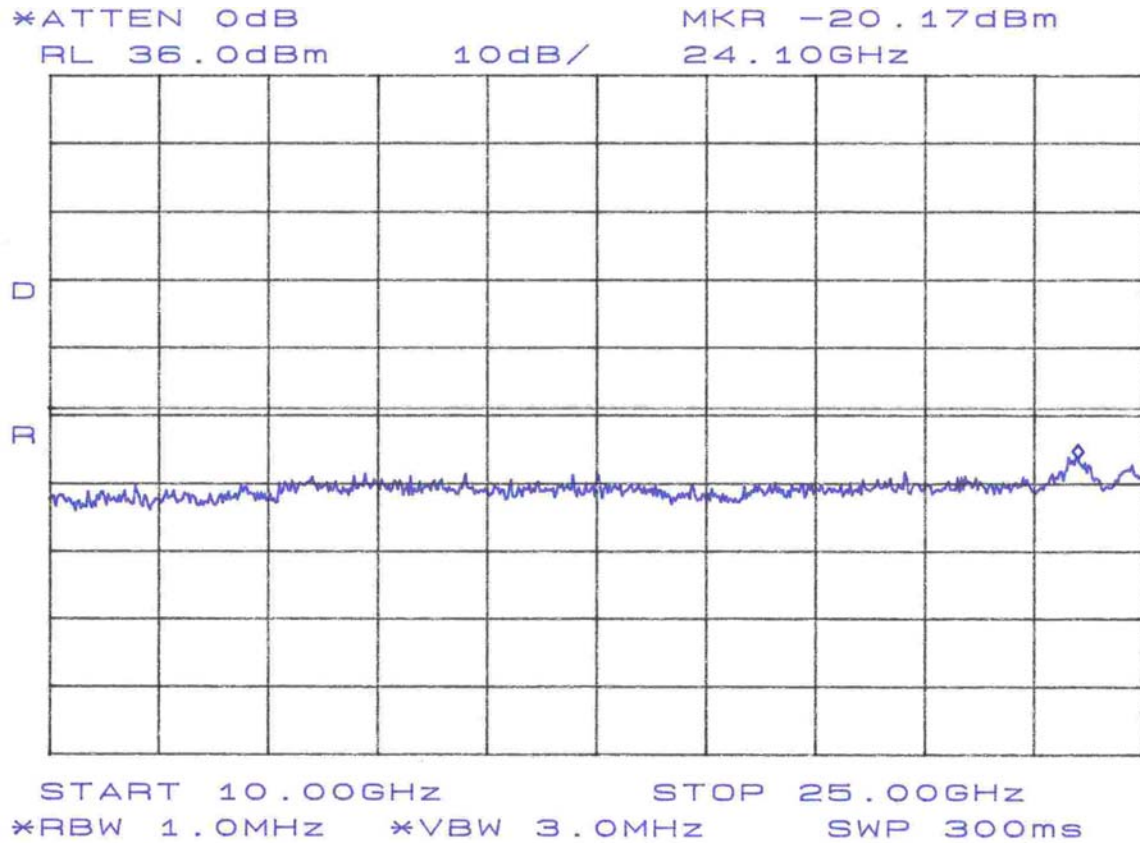


Figure 12. Emissions Mask, Channel 8

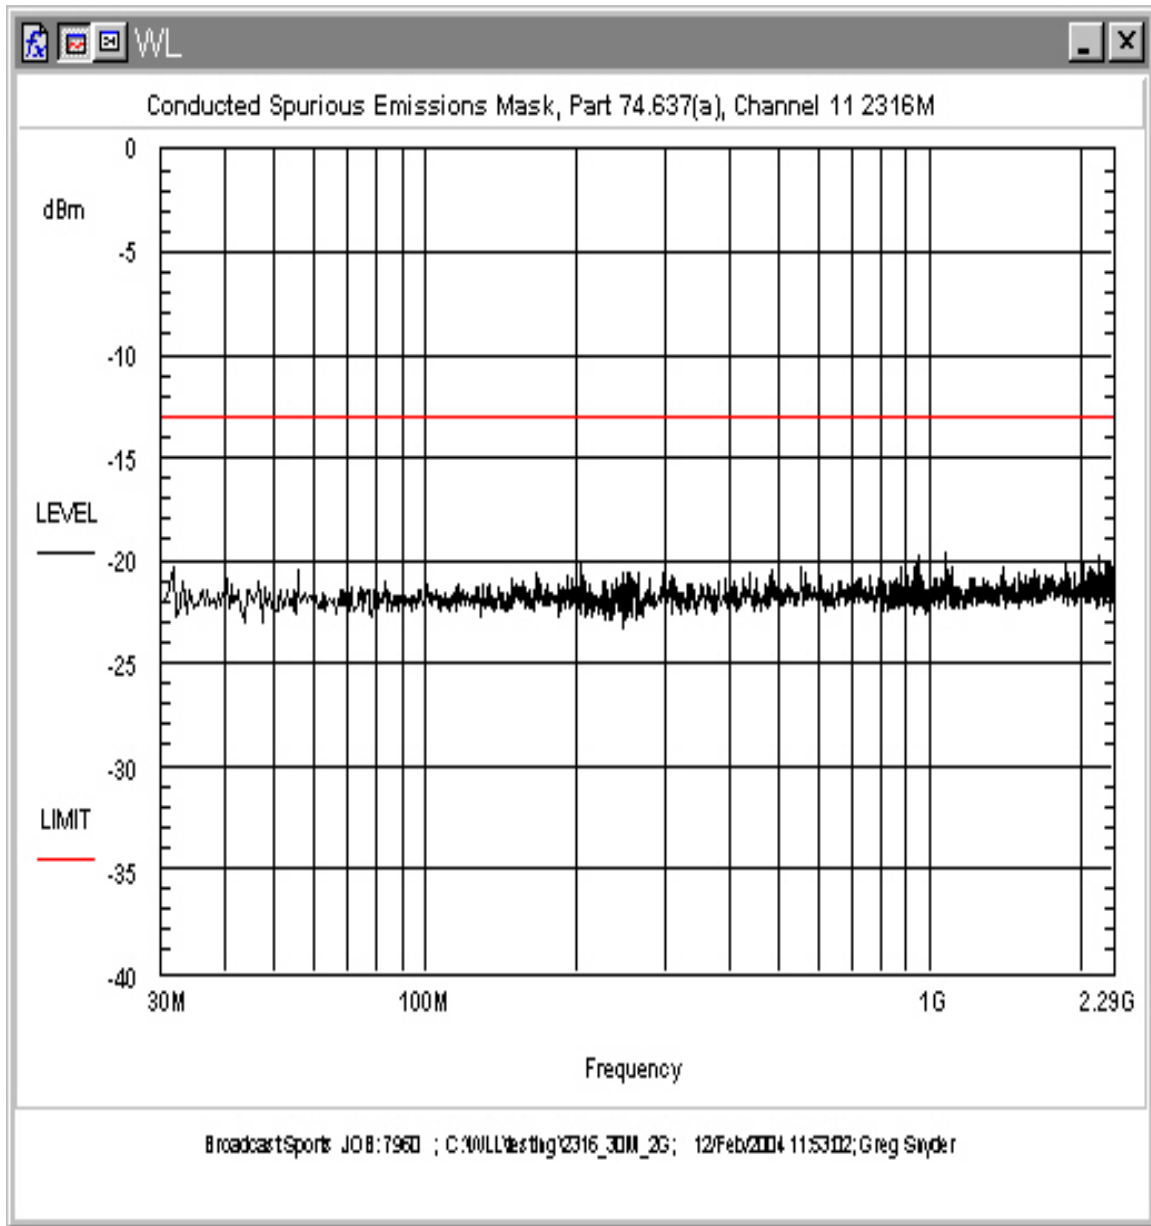

**Figure 13. Emissions Mask, Channel 11**



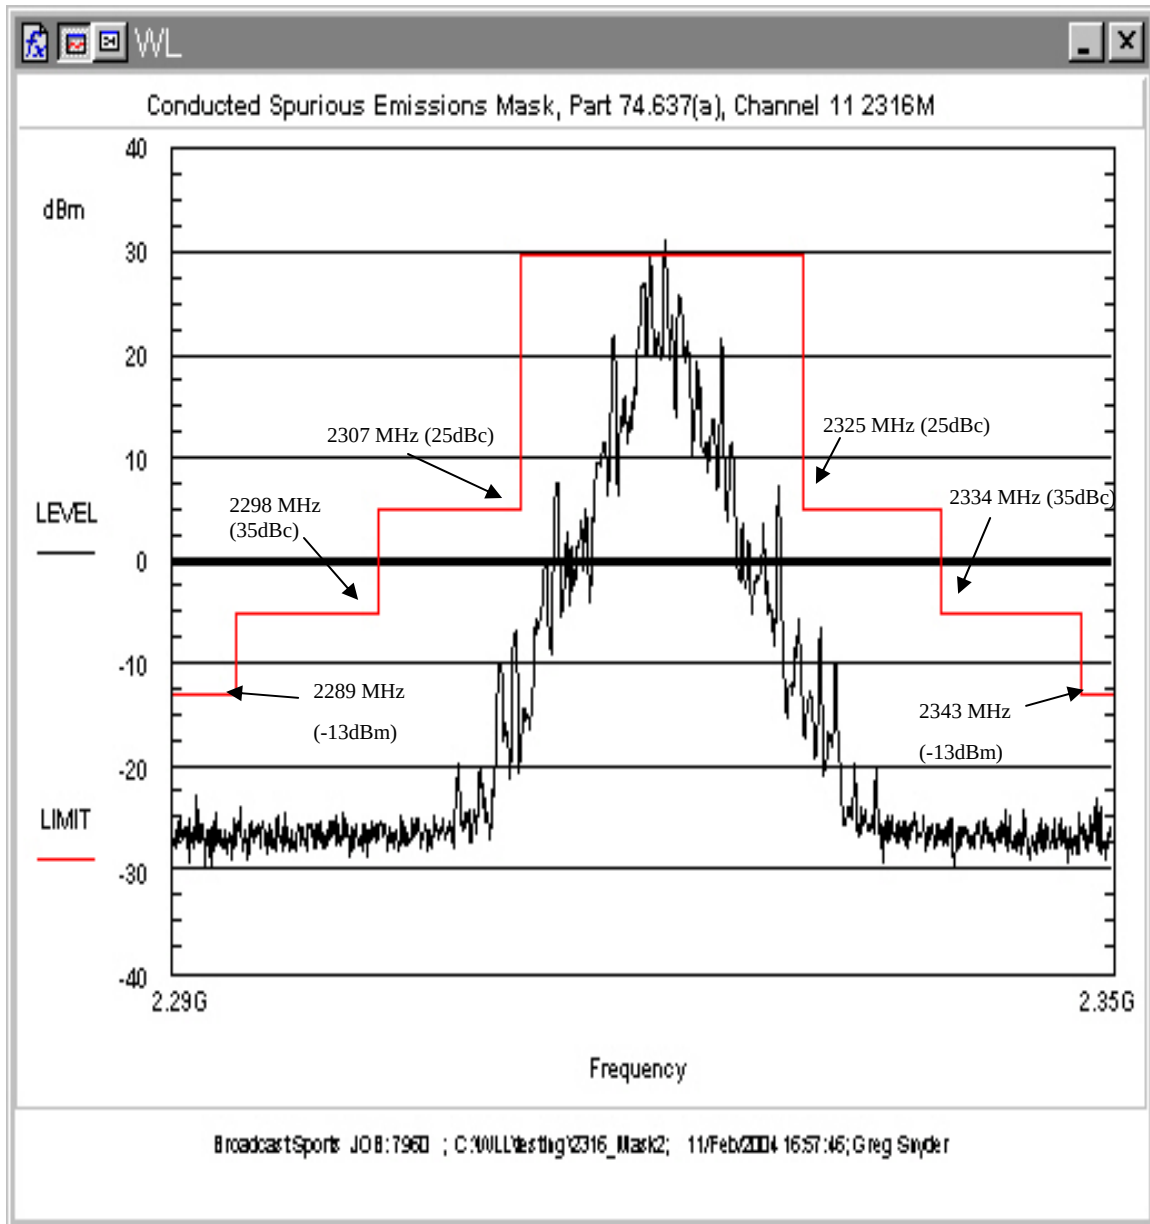


Figure 14. Emissions Mask, Channel 11

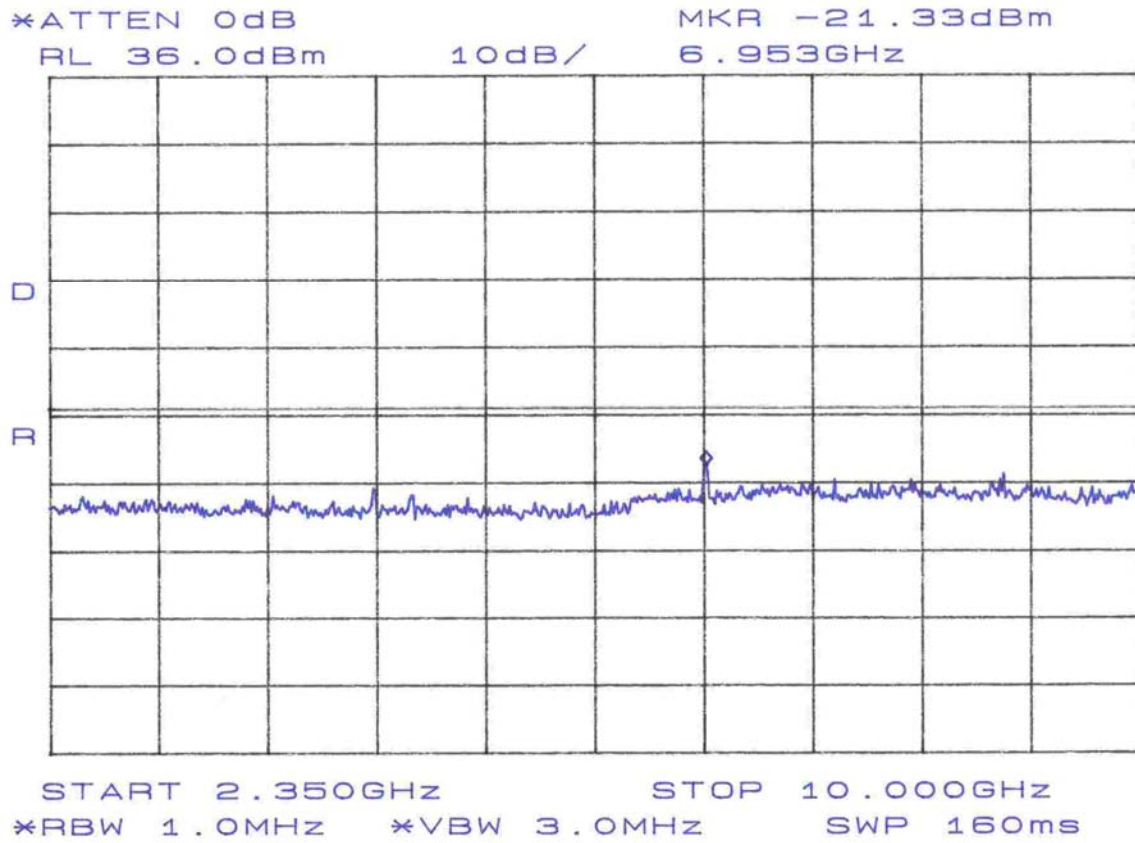

**Figure 15. Emissions Mask, Channel 11**

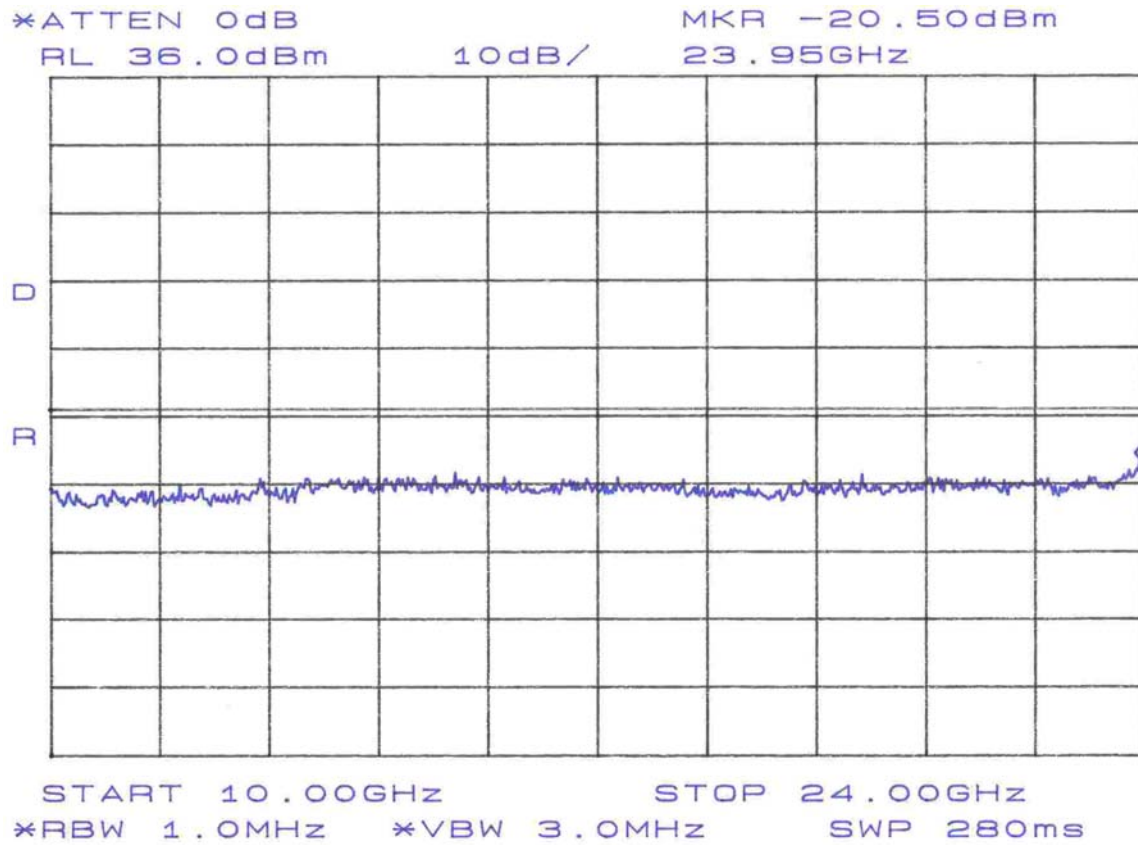

**Figure 16. Emissions Mask, Channel 11**

#### **4.6 Radiated Spurious Emissions: (FCC Part §2.1053)**

The EUT must comply with requirements for radiated spurious emissions.

##### **4.6.1 Test Procedure**

The EUT was placed on motorized turntable for radiated testing on a 3-meter open field test site. The emissions from the EUT were measured continuously at every azimuth by rotating the turntable. Receiving antennas were mounted on an antenna mast to determine the height of maximum emissions. The height of the antenna was varied between 1 and 4 meters. The peripherals were placed on the table in accordance with ANSI C63.4-2001. Cables were varied in position to produce maximum emissions. Both the horizontal and vertical field components were measured.

The Effective Isotropic Radiated Power (EIRP) levels were measured and compared with the limit of -13 dBm per FCC Part 74. The limit of -13dB is derived from the formula of  $43+10\text{LOG}(P)$  dB per §74.637(a)(1)(iii).

Emissions were measured for Channel 1, Channel 8 and Channel 11 and are reported in the following tables. Emissions were scanned up to the 10<sup>th</sup> harmonic of the fundamental. Worst case measurements are reported. The signal substitution method was used to obtain EIRP levels.

**Table 7: EIRP Radiated Emissions Test Data: Channel 1**

CLIENT: Broadcast Sports DATE: 02.10.04  
TESTER: Chad M. Beattie/James Ritter JOB #: 7960  
**EUT Information:** HUB  
EUT: HUB  
CONFIGURATION: CH1 (1999MHZ TX)  
CLOCKS: Modulated with NTSC video/audio  
**Test Equipment/Limit:** CLASS: B  
ANTENNA: A\_00425 LIMIT: EIRP  
CABLE: CSITE1\_HF AMPLIFIER (dB) A\_00066

| Frequency<br>(MHz) | Polarity<br>H/V | Azimuth<br>Degree | Ant.<br>Hght<br>(m) | SA<br>Level<br>(QP)<br>(dBµV) | Sub.<br>Ant.<br>Gain<br>dBi | Sig.<br>Gen.<br>Level<br>dBm | EIRP<br>Level<br>dBm | Limit<br>(dBm) | Margin<br>dB |
|--------------------|-----------------|-------------------|---------------------|-------------------------------|-----------------------------|------------------------------|----------------------|----------------|--------------|
| CH1                |                 |                   |                     |                               |                             |                              |                      |                |              |
| 1999.00            | V               | 157.5             | 1.0                 | 67.1                          | 4.1                         | -35.5                        | -31.4                | -13.0          | -18.4        |
| 3998.00            | V               | 157.5             | 1.0                 | 57.2                          | 4.9                         | -46.8                        | -41.9                | -13.0          | -28.9        |
| 5997.00            | V               | 157.5             | 1.0                 | 57.2                          | 5.2                         | -40.3                        | -35.1                | -13.0          | -22.1        |
| 7996.00            | V               | 157.5             | 1.0                 | 48.3                          | 5.6                         | -47.5                        | -41.9                | -13.0          | -28.9        |
| 9995.00            | V               | 135.0             | 1.0                 | 47.5                          | 4.1                         | -44.5                        | -40.4                | -13.0          | -27.4        |
| 11994.00           | V               | 0.0               | 1.0                 | 45.3                          | 2.3                         | -42.5                        | -40.2                | -13.0          | -27.2        |
| 13993.00           | V               | 0.0               | 1.0                 | 45.2                          | 3.6                         | -34.0                        | -30.4                | -13.0          | -17.4        |
| 15992.00           | V               | 0.0               | 1.0                 | 45.5                          | -1.0                        | -33.3                        | -34.3                | -13.0          | -21.3        |
| 1999.00            | H               | 225.0             | 1.0                 | 65.7                          | 4.1                         | -39.8                        | -35.7                | -13.0          | -22.7        |
| 3998.00            | H               | 135.0             | 1.0                 | 52.8                          | 4.9                         | -49.0                        | -44.1                | -13.0          | -31.1        |
| 5997.00            | H               | 157.5             | 1.0                 | 51.0                          | 5.2                         | -47.8                        | -42.6                | -13.0          | -29.6        |
| 7996.00            | H               | 0.0               | 1.0                 | 44.8                          | 5.6                         | -50.5                        | -44.9                | -13.0          | -31.9        |
| 9995.00            | H               | 0.0               | 1.0                 | 44.7                          | 4.1                         | -47.8                        | -43.7                | -13.0          | -30.7        |
| 11994.00           | H               | 0.0               | 1.0                 | 47.2                          | 2.3                         | -37.0                        | -34.7                | -13.0          | -21.7        |
| 13993.00           | H               | 0.0               | 1.0                 | 45.2                          | 3.6                         | -33.8                        | -30.2                | -12.0          | -18.2        |
| 15992.00           | H               | 0.0               | 1.0                 | 46.5                          | -1.0                        | -29.3                        | -30.3                | -13.0          | -17.3        |

**Table 8: EIRP Radiated Emissions Test Data: Channel 8**

CLIENT: Broadcast Sports DATE: 02.10.04  
TESTER: Chad M. Beattie/James Ritter JOB #: 7960  
**EUT Information:** HUB  
EUT: HUB  
CONFIGURATION: CH8 (2454MHZ TX)  
CLOCKS: Modulated with NTSC video/audio  
**Test Equipment/Limit:** CLASS: B  
ANTENNA: A\_00425 LIMIT: EIRP  
CABLE: CSITE1\_HF AMPLIFIER (dB) A\_00066

| Frequency<br>(MHz) | Polarity<br>H/V | Azimuth<br>Degree | Ant.<br>Hght<br>(m) | SA<br>Level<br>(QP)<br>(dBµV) | Sub.<br>Ant.<br>Gain<br>dBi | Sig.<br>Gen.<br>Level<br>dBm | EIRP<br>Level<br>dBm | Limit<br>(dBm) | Margin<br>dB |
|--------------------|-----------------|-------------------|---------------------|-------------------------------|-----------------------------|------------------------------|----------------------|----------------|--------------|
| CH8                |                 |                   |                     |                               |                             |                              |                      |                |              |
| 2454.00            | V               | 0.0               | 1.0                 | 69.7                          | 3.9                         | -30.5                        | -26.6                | -13.0          | -13.6        |
| 4908.00            | V               | 225.0             | 1.0                 | 63.7                          | 6.1                         | -34.0                        | -27.9                | -13.0          | -14.9        |
| 7362.00            | V               | 180.0             | 1.0                 | 51.3                          | 5.7                         | -39.1                        | -33.4                | -13.0          | -20.4        |
| 9816.00            | V               | 0.0               | 1.0                 | 47.3                          | 4.0                         | -46.5                        | -42.5                | -13.0          | -29.5        |
| 12270.00           | V               | 0.0               | 1.0                 | 44.5                          | 2.2                         | -43.1                        | -40.9                | -13.0          | -27.9        |
| 14724.00           | V               | 0.0               | 1.0                 | 45.2                          | 1.2                         | -38.0                        | -36.8                | -13.0          | -23.8        |
| 2454.00            | H               | 225.0             | 1.0                 | 70.0                          | 3.9                         | -29.0                        | -25.1                | -14.0          | -11.1        |
| 4908.00            | H               | 292.5             | 1.0                 | 59.5                          | 6.1                         | -37.5                        | -31.4                | -13.0          | -18.4        |
| 7362.00            | H               | 180.0             | 1.0                 | 47.8                          | 5.7                         | -45.8                        | -40.1                | -13.0          | -27.1        |
| 9816.00            | H               | 0.0               | 1.0                 | 46.5                          | 4.0                         | -47.3                        | -43.3                | -13.0          | -30.3        |
| 12270.00           | H               | 0.0               | 1.0                 | 44.3                          | 2.2                         | -45.5                        | -43.3                | -13.0          | -30.3        |
| 14724.00           | H               | 0.0               | 1.0                 | 44.7                          | 1.2                         | -39.0                        | -37.8                | -13.0          | -24.8        |

**Table 9: EIRP Radiated Emissions Test Data: Channel 11**

CLIENT: Broadcast Sports DATE: 02.10.04  
TESTER: Chad M. Beattie/James Ritter JOB #: 7960  
**EUT Information:** **Test Requirements:**  
EUT: HUB TEST STANDARD: Part 74  
CONFIGURATION: CH11 (2316MHZ TX) DISTANCE: 3m  
CLOCKS: Modulated with NTSC video/audio CLASS: B  
**Test Equipment/Limit:**  
ANTENNA: A\_00425 LIMIT: EIRP  
CABLE: CSITE1\_HF AMPLIFIER (dB) A\_00066

| Frequency<br>(MHz) | Polarity<br>H/V | Azimuth<br>Degree | Ant.<br>Hght<br>(m) | SA<br>Level<br>(QP)<br>(dBμV) | Sub.<br>Ant.<br>Gain<br>dBi | Sig.<br>Gen.<br>Level<br>dBm | EIRP<br>Level<br>dBm | Limit<br>(dBm) | Margin<br>dB |
|--------------------|-----------------|-------------------|---------------------|-------------------------------|-----------------------------|------------------------------|----------------------|----------------|--------------|
| CH11               |                 |                   |                     |                               |                             |                              |                      |                |              |
| 2316.00            | V               | 225.0             | 1.0                 | 70.3                          | 3.9                         | -32.5                        | -28.6                | -13.0          | -15.6        |
| 4632.00            | V               | 180.0             | 1.0                 | 66.8                          | 6.0                         | -31.7                        | -25.7                | -13.0          | -12.7        |
| 6948.00            | V               | 157.5             | 1.0                 | 64.7                          | 5.3                         | -29.7                        | -24.4                | -13.0          | -11.4        |
| 9264.00            | V               | 0.0               | 1.0                 | 46.0                          | 3.4                         | -43.5                        | -40.1                | -13.0          | -27.1        |
| 11580.00           | V               | 0.0               | 1.0                 | 44.0                          | 3.6                         | -41.0                        | -37.4                | -13.0          | -24.4        |
| 13896.00           | V               | 0.0               | 1.0                 | 44.7                          | 3.7                         | -41.5                        | -37.8                | -13.0          | -24.8        |
| 2316.00            | H               | 225.0             | 1.0                 | 67.2                          | 3.9                         | -35.5                        | -31.6                | -15.0          | -16.6        |
| 4632.00            | H               | 157.5             | 1.0                 | 63.7                          | 6.0                         | -36.6                        | -30.6                | -14.0          | -16.6        |
| 6948.00            | H               | 157.5             | 1.0                 | 60.2                          | 5.3                         | -28.5                        | -23.2                | -13.0          | -10.2        |
| 9264.00            | H               | 0.0               | 1.0                 | 45.7                          | 3.4                         | -43.5                        | -40.1                | -13.0          | -27.1        |
| 11580.00           | H               | 0.0               | 1.0                 | 45.8                          | 3.6                         | -36.8                        | -33.2                | -13.0          | -20.2        |
| 13896.00           | H               | 0.0               | 1.0                 | 44.0                          | 3.7                         | -38.3                        | -34.6                | -13.0          | -21.6        |

#### 4.7 Frequency Stability: (FCC Part §2.1055)

Frequency as a function of temperature and voltage variation shall be maintained within the FCC-prescribed tolerances.

The temperature stability was measured with the unit in an environmental chamber used to vary the temperature of the sample. The sample was held at each temperature step to allow the temperature of the sample to stabilize.

The EUT is powered by DC voltage supplied externally. The manufacturer's power requirements for the EUT include the following:

Low DC Voltage of 10 VDC (manufacturer's specification)

High DC Voltage of 13.8VDC (manufacturer's specifications)

The frequency stability of the transmitter was examined at the voltage extremes and for the temperature range of -30°C to +50°C. The carrier frequency was measured while the EUT was in the temperature chamber. The reference frequency of the EUT was measured at the ambient room temperature with the frequency counter.

**Table 10. Frequency Deviation as a Function of Temperature**

CLIENT: Broadcast Sports  
MODEL NO: Hub Video Transmitter  
DATE: 3/11/2004  
JOB #: 7960  
BY: Chad Beattie  
Limit: .005%

| Temperature | Frequency  | Difference | Deviation |
|-------------|------------|------------|-----------|
| Degrees C   | MHz        | Hz         | (%)       |
| -30         | 2454.28892 | 64190      | 12.27     |
| -20         | 2454.29262 | 67890      | 12.27     |
| -10         | 2454.29023 | 65500      | 12.27     |
| 0           | 2454.28153 | 56800      | 12.27     |
| 10          | 2454.27635 | 51620      | 12.27     |
| 20          | 2454.25635 | 31620      | 12.27     |
| 30          | 2454.25508 | 30350      | 12.27     |
| 40          | 2454.23878 | 14050      | 12.27     |
| 50          | 2454.22985 | 5120       | 12.27     |

**Table 11. Frequency Deviation as a Function of Voltage**

| Voltage  | Frequency   | Difference | Deviation | Voltage |
|----------|-------------|------------|-----------|---------|
| Volts    | MHz         | Hz         | (%)       | Volts   |
| At rated | 2316.125000 | 0          | 0.0       | 12VDC   |
| At 85%   | 2316.124100 | 900        | 0.000039  | 10.9VDC |
| At 115%  | 2316.124900 | 100        | 0.000004  | 13.8VDC |

**Transmit turns off below 10.9VDC**