

APPLICATION FOR CERTIFICATION

On Behalf of
Chungear Industrial Co., Ltd.

Fan/Light Remote Control (Transmitter)

Model : BCF-00V9XD

FCC ID : KUJCE9005

Prepared for : Chungear Industrial Co., Ltd.
106 Kanho Rd., Taichung,
Taiwan, R.O.C.

Prepared by : Taiwan Tokin EMC Eng. Corp.
No. 53-11, Tin-Fu Tsun, Lin-Kou,
Taipei Hsien, Taiwan, R.O.C.

Tel : (02) 2609-9301, 2609-2133
Fax: (02) 2609-9303

File Number : ATM-G90673
Report Number : TTEMC-F01116-02
Date of Test : Aug. 09 ~ 16, 2001
Date of Report : Sep. 05, 2001

TABLE OF CONTENTS

Description	Page
Test Report Certification	3
1.GENERAL INFORMATION	4
1.1. Description of Device (EUT)	4
1.2. Description of Test Facility	5
1.3. Measurement Uncertainty	5
2.POWERLINE CONDUCTED TEST	6
3.RADIATED EMISSION TEST	7
3.1. Test Equipment	7
3.2. Test Setup	7
3.3. Radiation Limit (§15.231)	8
3.4. EUT's Configuration during Compliance Measurement	8
3.5. Operating Condition of EUT	8
3.6. Test Procedure	8
3.7. Test Results	9
3.8. Radiated Emission Noise Measurement Results	10
4.EMISSION BANDWIDTH TEST	16
4.1. Test Equipment	16
4.2. Block Diagram of Test Setup	16
4.3. Specification Limits (§15.231-(c))	16
4.4. EUT's Configuration during Compliance Measurement	16
4.5. Emission Bandwidth Measurement Results	16
5.DEVIATION TO TEST SPECIFICATIONS	18
6.PHOTOGRAPHS	19
6.1. Photos of Radiated Measurement at Open Field Test Site(30~1000MHz)	19
6.2. Photos of Radiated Measurement at Open Field Test Site(1~3GHz)	21
6.3. Photos of Emission Bandwidth Measurement	22

TEST REPORT CERTIFICATION

Applicant : Chungear Industrial Co., Ltd.
Manufacturer : Chungear Industrial Co., Ltd.
FCC ID : KUJCE9005
EUT Description : Fan/Light Remote Control (Transmitter)
(A) MODEL NO. : BCF-00V9XD
(B) SERIAL NO. : N/A
(C) POWER SUPPLY : DC 9V

Measurement Procedure Used:

FCC RULES AND REGULATIONS PART 15 SUBPART C, MAY 2001
AND FCC/OET MP-4

The device described above was tested by TAIWAN TOKIN EMC ENG. CORP. to determine the maximum emission levels emanating from the device. The maximum emission levels were compared to the FCC Part 15 subpart C limits both radiated and conducted emissions.

The measurement results are contained in this test report and TAIWAN TOKIN EMC ENG. CORP. is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliant with the FCC official limits.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Taiwan Tokin EMC Eng. corp.

Date of Test : Aug. 09 ~ 16, 2001

Prepared by : Cherry Wang 9/10/2001
(CHERRY WANG)

Test Engineer : Allen Wang Sep. 10, 2001
(ALLEN WANG)

Approve & Authorized Signer : Leon Liu Sep. 10 2001
(LEON LIU)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Description	:	Fan/Light Remote Control (Transmitter)
Model Number	:	BCF-00V9XD
FCC ID	:	KUJCE9005
Applicant	:	Chungear Industrial Co., Ltd. 160 Kanho Rd., Taichung, Taiwan, R.O.C.
Manufacturer	:	Chungear Industrial Co., Ltd. 160 Kanho Rd., Taichung, Taiwan, R.O.C.
Fundamental Frequency	:	433.9MHz
Power Supply	:	DC 9V
Date of Receipt of Sample	:	May 29, 2001
Date of Test	:	Aug. 09 ~ 16, 2001

Fan/Light Remote Control -Receiver
 Model No.: BCF-2DV16D
 FCC ID : By DoC

1.2. Description of Test Facility

Site Description (No. 5 Open Site)	:	Jan. 29, 2001 Re-File on Federal Communication Commission FCC Engineering Laboratory 7435 Oakland Mills Road Columbia, MD 21046, U.S.A. Registration Number: 90992
Name of Firm	:	Taiwan Tokin EMC Eng. Corp.
Site Location #1	:	No. 53-11, Tin-Fu Tsun, Lin-Kou, Taipei Hsien, Taiwan, R.O.C.
Site Location #2	:	No. 67-4, Tin-Fu Tsun, Lin-Kou, Taipei Hsien, Taiwan, R.O.C.
NVLAP Lab Code	:	200077-0

1.3. Measurement Uncertainty

- (1) Radiation Uncertainty $U_r = \pm 4.01\text{dB}$
- (2) Conduction Uncertainty $U_c = \pm 2.26\text{dB}$

2. POWERLINE CONDUCTED TEST

【This EUT input voltage is DC power operated, so no conductive emissions were performed according to FCC Part 15 C section § 15.207】

3. RADIATED EMISSION TEST

3.1. Test Equipment

The following test equipment are used during the radiated emission tests :


Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer (for 30MHz~4GHz)	HP	8595E	3829A03778	Aug. 17, 01'	1 Year
2.	Test Receiver	R&S	ESVS10	849231/017	Dec. 01, 00'	1 Year
3.	Biconical Antenna	Chase	VBA6106A	1227	Apr. 16, 01'	1 Year
4.	Log Periodic Antenna	Chase	UPA6109	1061	Apr. 16, 01'	1 Year
5.	Amplifier (for 1~4GHz)	HP	8449B	3008A01284	Jul.04, 01'	1 Year
6.	Horn Antenna (for 1~4GHz)	EMCO	3115	9112-3775	Apr.17, 01'	1 Year

3.2. Test Setup

3.2.1. Block Diagram of connection between EUT and simulators



3.2.2. Open Field Test Site (3M) Setup Diagram

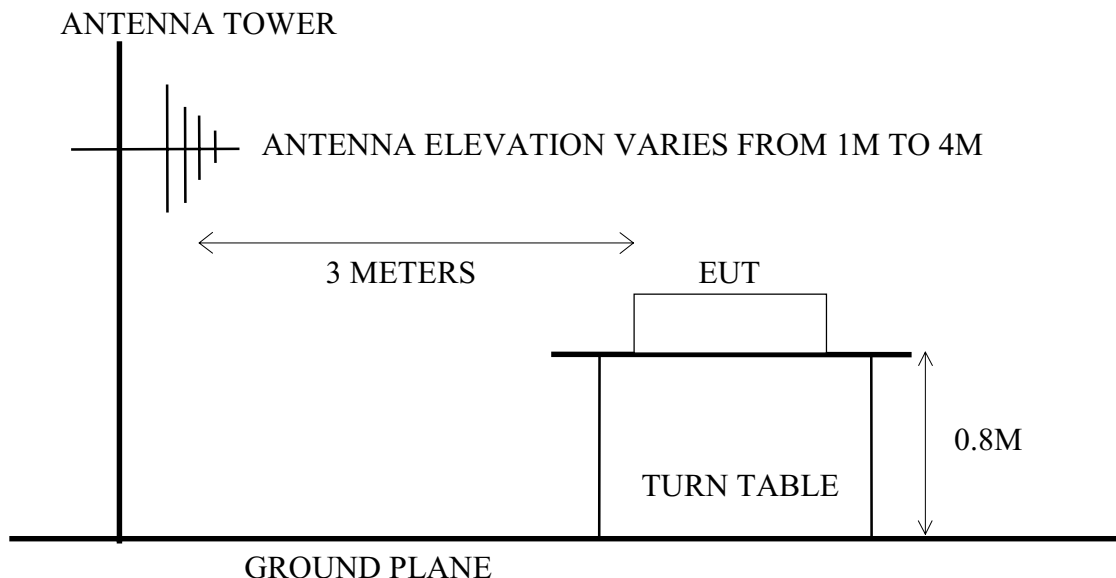

3.3. Radiation Limit (§15.231)

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMITS	
		$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
Fundamental Freq.	3	10996	80.82 (Quasi-Peak)
Spurious Emission	3	1099	60.82 (Peak)

Remark: (1) Emission level ($\text{dB}\mu\text{V/m}$) = $20 \log$ Emission level ($\mu\text{V/m}$)

(2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

3.4. EUT's Configuration during Compliance Measurement

The following equipment were installed on radiated measurement to meet the commission requirement and operating in a manner which tended to maximize its emission characteristics in a normal application.

3.4.1. Fan/Light Remote Control (Transmitter) (EUT)

Model Number	:	BCF-00V9XD
Serial Number	:	N/A
FCC ID.	:	KUJCE9005
Manufacturer	:	Chungear Industrial Co., Ltd.
Fundamental Frequency	:	433.9MHz

3.5. Operating Condition of EUT

3.5.1. Setup the EUT and simulator as shown on 3.2.

3.5.2. Turned on the power of all equipment.

3.5.3. The EUT (Fan/Light Remote Control (Transmitter)) was emitted the fundamental frequency with data code.

3.5.4. The EUT was at worked on Fan and Light function mode.

3.5.5. Repeated the above procedures from 3.5.3 to 3.5.4.

3.6. Test Procedure

The EUT and its simulators were placed on a turn table which was 0.8 meter above the ground. The turn table rotated 360 degrees to determine the position of the maximum emission level. For 30MHz to 4GHz frequency range, EUT was set 3 meters away from the receiving antenna which was mounted on a antenna tower. The antenna moved up and down between 1 to 4 meters for 30MHz to 4GHz frequency range to find out the maximum emission level. Broadband antenna such as calibrated biconical and log- periodical antenna or horn antenna were used as a receiving antenna. Both horizontal and vertical polarization of the antenna were set on measurement. In order to find the maximum emission, all of the interface cables were manipulated according to FCC/OET MP-4 regulation.

The bandwidth of test receiver was set at 120KHz and resolution bandwidth of spectrum analyzer was set at 1MHz.

EUT with the following test modes were done during radiated measurement and all the test results are listed in section 3.8.

No.	Test Model No.	Test Modes
1.	BCF-00V9XD	EUT on Stand, Fan Mode
2.		EUT on Stand, Light Mode
3.		EUT on Side, Fan Mode
4.		EUT on Side, Light Mode
5.		EUT on Lie, Fan Mode
6.		EUT on Lie, Light Mode

3.7. Test Results

PASSED. Please refer to the following pages.

3.8. Radiated Emission Noise Measurement Results

The frequency spectrum from 30 MHz to 4GHz is investigated. All the emissions not reported below are too low against the FCC part 15 subpart C limit.

Date of Test : Aug. 09, 2001 Temperature : 25°C

EUT : Fan/Light Remote Control (Transmitter), M/N: BCF-00V9XD Humidity : 63%

Test Mode : EUT on Stand, Fan Mode

Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	(Pre-Amp) Factor dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Limits dBμV/m	Margin dB
Fundamental Frequency (Quasi-Peak Values)							
433.700	17.37	3.93	0.00	47.67	68.97	80.82	11.85
Spurious Frequency							
867.500	24.28	5.92	0.00	17.01	47.21	60.82	13.61
1301.237	25.44	4.56	32.35	48.41	46.06	60.82	14.76
1734.982	26.35	5.43	32.17	42.70	42.31	60.82	18.51
2168.728	27.09	6.32	32.10	44.08	45.39	60.82	15.43
2602.474	27.77	6.97	32.23	39.41	41.92	60.82	18.90
3036.219	28.49	7.53	32.32	42.28	45.98	60.82	14.84
3469.965	30.42	8.06	32.32	39.80	45.96	60.82	14.86
3903.710	32.12	8.53	32.33	36.23	44.55	60.82	16.27
4337.456	32.86	9.06	32.37	32.65	42.20	60.82	18.62
Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	(Pre-Amp) Factor dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Limits dBμV/m	Margin dB
Fundamental Frequency (Quasi-Peak Values)							
433.700	17.20	3.93	0.00	51.32	72.45	80.82	8.37
Spurious Frequency							
867.500	24.29	5.92	0.00	20.18	50.39	60.82	10.43
1301.237	25.44	4.56	32.35	50.39	48.04	60.82	12.78
1734.982	26.35	5.43	32.17	45.62	45.23	60.82	15.59
2168.728	27.09	6.32	32.10	45.81	47.12	60.82	13.70
2602.474	27.77	6.97	32.23	39.09	41.60	60.82	19.22
3036.219	28.49	7.53	32.32	38.22	41.92	60.82	18.90
3469.965	30.42	8.06	32.32	38.13	44.29	60.82	16.53
3903.710	32.12	8.53	32.33	33.89	42.21	60.82	18.61
4337.456	32.86	9.06	32.37	34.52	44.07	60.82	16.75

- Remark :
1. For Fundamental Frequency, the readings are Quasi-Peak values below 1000MHz; For Spurious Frequency, the readings are Quasi-Peak values below 1000MHz; the readings are peak values above 1GHz.
 2. Emission Level = Antenna Factor + Cable Loss + Meter Reading – Pre-Amp Factor.
 3. Measurement was up to 10th harmonic (~4GHz), but the emissions level were too low against the official limit and not report.

Date of Test : Aug. 09, 2001 Temperature : 25°C

EUT : Fan/Light Remote Control Humidity : 63%
(Transmitter), M/N: BCF-00V9XD

Test Mode : EUT on Stand, Light Mode

Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	(Pre-Amp) Factor dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Limits dBμV/m	Margin dB
Fundamental Frequency (Quasi-Peak Values)							
433.952	17.37	3.93	0.00	50.33	71.63	80.82	9.19
Spurious Frequency							
867.903	24.37	5.96	0.00	19.62	49.95	60.82	10.87
1301.855	25.44	4.56	32.35	48.57	46.22	60.82	14.60
1735.806	26.35	5.43	32.17	45.38	44.99	60.82	15.83
2169.758	27.10	6.33	32.11	42.43	43.75	60.82	17.07
2603.710	27.78	6.98	32.24	42.16	44.68	60.82	16.14
3037.661	28.49	7.53	32.32	42.30	46.00	60.82	14.82
3471.613	30.42	8.06	32.32	37.78	43.94	60.82	16.88
3905.564	32.12	8.53	32.33	34.44	42.76	60.82	18.06
4339.516	32.86	9.06	32.37	33.73	43.28	60.82	17.54

Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	(Pre-Amp) Factor dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Limits dBμV/m	Margin dB
Fundamental Frequency (Quasi-Peak Values)							
433.952	17.20	3.93	0.00	51.07	72.20	80.82	8.62
Spurious Frequency							
867.903	24.37	5.96	0.00	20.14	50.47	60.82	10.35
1301.855	25.44	4.56	32.35	47.61	45.26	60.82	15.56
1735.806	26.35	5.43	32.17	42.97	42.58	60.82	18.24
2169.758	27.10	6.33	32.11	41.31	42.63	60.82	18.19
2603.710	27.78	6.98	32.24	40.97	43.49	60.82	17.33
3037.661	28.49	7.53	32.32	40.39	44.09	60.82	16.73
3471.613	30.42	8.06	32.32	37.62	43.78	60.82	17.04
3905.564	32.12	8.53	32.33	33.98	42.30	60.82	18.52
4339.516	32.86	9.06	32.37	32.57	42.12	60.82	18.70

- Remark :
1. For Fundamental Frequency, the readings are Quasi-Peak values below 1000MHz; For Spurious Frequency, the readings are Quasi-Peak values below 1000MHz; the readings are peak values above 1GHz.
 2. Emission Level = Antenna Factor + Cable Loss + Meter Reading – Pre-Amp Factor.
 3. Measurement was up to 10th harmonic (~4GHz), but the emissions level were too low against the official limit and not report.

Date of Test : Aug. 09, 2001 Temperature : 25°C

EUT : Fan/Light Remote Control (Transmitter), M/N: BCF-00V9XD Humidity : 63%

Test Mode : EUT on Side, Fan Mode

Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	(Pre-Amp) Factor dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Limits dBμV/m	Margin dB
Fundamental Frequency (Quasi-Peak Values)							
433.700	17.37	3.93	0.00	51.20	72.50	80.82	8.32
Spurious Frequency							
867.500	24.28	5.92	0.00	19.85	50.05	60.82	10.77
1301.237	25.44	4.56	32.35	48.00	45.65	60.82	15.17
1734.982	26.35	5.43	32.17	44.09	43.70	60.82	17.12
2168.728	27.09	6.32	32.10	42.15	43.46	60.82	17.36
2602.474	27.77	6.97	32.23	39.11	41.62	60.82	19.20
3036.219	28.49	7.53	32.32	39.64	43.34	60.82	17.48
3469.965	30.42	8.06	32.32	36.56	42.72	60.82	18.10
3903.710	32.12	8.53	32.33	32.92	41.24	60.82	19.58
4337.456	32.86	9.06	32.37	33.91	43.46	60.82	17.36

Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	(Pre-Amp) Factor dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Limits dBμV/m	Margin dB
Fundamental Frequency (Quasi-Peak Values)							
433.700	17.20	3.93	0.00	48.97	70.10	80.82	10.72
Spurious Frequency							
867.500	24.29	5.92	0.00	18.36	48.57	60.82	12.25
1301.237	25.44	4.56	32.35	49.59	47.24	60.82	13.58
1734.982	26.35	5.43	32.17	46.53	46.14	60.82	14.68
2168.728	27.09	6.32	32.10	44.75	46.06	60.82	14.76
2602.474	27.77	6.97	32.23	44.72	47.23	60.82	13.59
3036.219	28.49	7.53	32.32	41.08	44.78	60.82	16.04
3469.965	30.42	8.06	32.32	39.24	45.40	60.82	15.42
3903.710	32.12	8.53	32.33	36.88	45.20	60.82	15.62
4337.456	32.86	9.06	32.37	34.85	44.40	60.82	16.42

- Remark :
1. For Fundamental Frequency, the readings are Quasi-Peak values below 1000MHz; For Spurious Frequency, the readings are Quasi-Peak values below 1000MHz; the readings are peak values above 1GHz.
 2. Emission Level = Antenna Factor + Cable Loss + Meter Reading – Pre-Amp Factor.
 3. Measurement was up to 10th harmonic (~4GHz), but the emissions level were too low against the official limit and not report.

Date of Test : Aug. 09, 2001 Temperature : 25°C

EUT : Fan/Light Remote Control Humidity : 63%
(Transmitter), M/N: BCF-00V9XD

Test Mode : EUT on Side, Light Mode

Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	(Pre-Amp) Factor dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Limits dBμV/m	Margin dB
Fundamental Frequency (Quasi-Peak Values)							
433.952	17.37	3.93	0.00	49.16	70.46	80.82	10.36
Spurious Frequency							
867.903	24.37	5.96	0.00	17.72	48.05	60.82	12.77
1301.855	25.44	4.56	32.35	47.93	45.58	60.82	15.24
1735.806	26.35	5.43	32.17	43.64	43.25	60.82	17.57
2169.758	27.10	6.33	32.11	42.77	44.09	60.82	16.73
2603.710	27.78	6.98	32.24	40.27	42.79	60.82	18.03
3037.661	28.49	7.53	32.32	38.57	42.27	60.82	18.55
3471.613	30.42	8.06	32.32	40.73	46.89	60.82	13.93
3905.564	32.12	8.53	32.33	34.23	42.55	60.82	18.27
4339.516	32.86	9.06	32.37	34.48	44.03	60.82	16.79

Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	(Pre-Amp) Factor dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Limits dBμV/m	Margin dB
Fundamental Frequency (Quasi-Peak Values)							
433.952	17.20	3.93	0.00	50.19	71.32	80.82	9.50
Spurious Frequency							
867.903	24.37	5.96	0.00	17.53	47.86	60.82	12.96
1301.855	25.44	4.56	32.35	50.08	47.73	60.82	13.09
1735.806	26.35	5.43	32.17	48.00	47.61	60.82	13.21
2169.758	27.10	6.33	32.11	43.87	45.19	60.82	15.63
2603.710	27.78	6.98	32.24	39.77	42.29	60.82	18.53
3037.661	28.49	7.53	32.32	35.65	39.35	60.82	21.47
3471.613	30.42	8.06	32.32	38.29	44.45	60.82	16.37
3905.564	32.12	8.53	32.33	39.58	47.90	60.82	12.92
4339.516	32.86	9.06	32.37	32.59	42.14	60.82	18.68

- Remark :
1. For Fundamental Frequency, the readings are Quasi-Peak values below 1000MHz; For Spurious Frequency, the readings are Quasi-Peak values below 1000MHz; the readings are peak values above 1GHz.
 2. Emission Level = Antenna Factor + Cable Loss + Meter Reading – Pre-Amp Factor.
 3. Measurement was up to 10th harmonic (~4GHz), but the emissions level were too low against the official limit and not report.

Date of Test : Aug. 09, 2001 Temperature : 25°C

EUT : Fan/Light Remote Control (Transmitter), M/N: BCF-00V9XD Humidity : 63%

Test Mode : EUT on Lie, Fan Mode

Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	(Pre-Amp) Factor dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Limits dBμV/m	Margin dB
Fundamental Frequency (Quasi-Peak Values)							
433.700	17.37	3.93	0.00	47.92	69.22	80.82	11.60
Spurious Frequency							
867.500	24.28	5.92	0.00	18.53	48.73	60.82	12.09
1301.237	25.44	4.56	32.35	48.73	46.38	60.82	14.44
1734.982	26.35	5.43	32.17	42.24	41.85	60.82	18.97
2168.728	27.09	6.32	32.10	42.75	44.06	60.82	16.76
2602.474	27.77	6.97	32.23	40.82	43.33	60.82	17.49
3036.219	28.49	7.53	32.32	38.89	42.59	60.82	18.23
3469.965	30.42	8.06	32.32	41.14	47.30	60.82	13.52
3903.710	32.12	8.53	32.33	36.63	44.95	60.82	15.87
4337.456	32.86	9.06	32.37	34.68	44.23	60.82	16.59

Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	(Pre-Amp) Factor dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Limits dBμV/m	Margin dB
Fundamental Frequency (Quasi-Peak Values)							
433.700	17.20	3.93	0.00	49.71	70.84	80.82	9.98
Spurious Frequency							
867.500	24.29	5.92	0.00	18.85	49.06	60.82	11.76
1301.237	25.44	4.56	32.35	48.62	46.27	60.82	14.55
1734.982	26.35	5.43	32.17	42.76	42.37	60.82	18.45
2168.728	27.09	6.32	32.10	41.15	42.46	60.82	18.36
2602.474	27.77	6.97	32.23	41.52	44.03	60.82	16.79
3036.219	28.49	7.53	32.32	40.06	43.76	60.82	17.06
3469.965	30.42	8.06	32.32	38.89	45.05	60.82	15.77
3903.710	32.12	8.53	32.33	34.43	42.75	60.82	18.07
4337.456	32.86	9.06	32.37	35.59	45.14	60.82	15.68

- Remark :
1. For Fundamental Frequency, the readings are Quasi-Peak values below 1000MHz; For Spurious Frequency, the readings are Quasi-Peak values below 1000MHz; the readings are peak values above 1GHz.
 2. Emission Level = Antenna Factor + Cable Loss + Meter Reading – Pre-Amp Factor.
 3. Measurement was up to 10th harmonic (~4GHz), but the emissions level were too low against the official limit and not report.

Date of Test : Aug. 09, 2001 Temperature : 25°C

EUT : Fan/Light Remote Control (Transmitter), M/N: BCF-00V9XD Humidity : 63%

Test Mode : EUT on Lie, Light Mode

Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	(Pre-Amp) Factor dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Limits dBμV/m	Margin dB
Fundamental Frequency (Quasi-Peak Values)							
433.952	17.37	3.93	0.00	48.93	70.23	80.82	10.59
Spurious Frequency							
867.903	24.37	5.96	0.00	19.72	50.05	60.82	10.77
1301.855	25.44	4.56	32.35	50.51	48.16	60.82	12.66
1735.806	26.35	5.43	32.17	45.05	44.66	60.82	16.16
2169.758	27.10	6.33	32.11	44.25	45.57	60.82	15.25
2603.710	27.78	6.98	32.24	41.46	43.98	60.82	16.84
3037.661	28.49	7.53	32.32	41.19	44.89	60.82	15.93
3471.613	30.42	8.06	32.32	38.81	44.97	60.82	15.85
3905.564	32.12	8.53	32.33	38.20	46.52	60.82	14.30
4339.516	32.86	9.06	32.37	34.24	43.79	60.82	17.03

Emission Frequency MHz	Antenna Factor dB/m	Cable Loss dB	(Pre-Amp) Factor dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Limits dBμV/m	Margin dB
Fundamental Frequency (Quasi-Peak Values)							
433.952	17.20	3.93	0.00	49.89	71.02	80.82	9.80
Spurious Frequency							
867.903	24.37	5.96	0.00	22.57	52.90	60.82	7.92
1301.855	25.44	4.56	32.35	48.90	46.55	60.82	14.27
1735.806	26.35	5.43	32.17	44.60	44.21	60.82	16.61
2169.758	27.10	6.33	32.11	43.36	44.68	60.82	16.14
2603.710	27.78	6.98	32.24	40.79	43.31	60.82	17.51
3037.661	28.49	7.53	32.32	41.99	45.69	60.82	15.13
3471.613	30.42	8.06	32.32	36.13	42.29	60.82	18.53
3905.564	32.12	8.53	32.33	35.61	43.93	60.82	16.89
4339.516	32.86	9.06	32.37	34.30	43.85	60.82	16.97

- Remark :
1. For Fundamental Frequency, the readings are Quasi-Peak values below 1000MHz; For Spurious Frequency, the readings are Quasi-Peak values below 1000MHz; the readings are peak values above 1GHz.
 2. Emission Level = Antenna Factor + Cable Loss + Meter Reading – Pre-Amp Factor.
 3. Measurement was up to 10th harmonic (~4GHz), but the emissions level were too low against the official limit and not report.


4. EMISSION BANDWIDTH TEST

4.1. Test Equipment

The following test equipment were used during the Emission Bandwidth Test :

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	HP	8590L	3710A01838	Aug.06, 01'	1 Year

4.2. Block Diagram of Test Setup

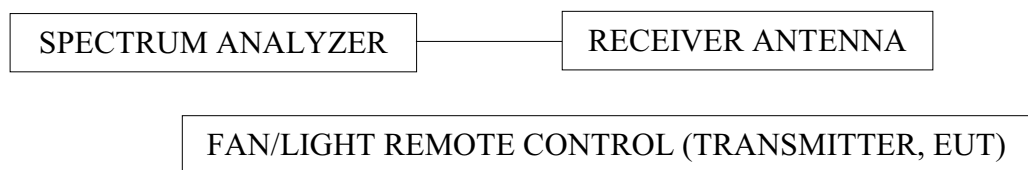

4.3. Specification Limits (§15.231-(c))

The bandwidth of emission shall be no wider than 0.25% of the center frequency for device operating above 70MHz and below 900MHz. Bandwidth is determined at the points 20dB down from the modulated carrier.

4.4. EUT's Configuration during Compliance Measurement

The configuration of EUT were same as section 3.4.

4.5. Emission Bandwidth Measurement Results

Fundamental Frequency: 433.9MHz

Date of Test: Aug. 16, 2001

No.	Test Model	Mode	Center Frequency	Bandwidth	Tolerance (%)
1.	BCF-00V9XD	Fan	433.7010MHz	136.0kHz	0.031%
2.		Light	433.9520MHz	106.5kHz	0.024%

The bandwidth test graphs are attached in next page.

(1) BCF-00V9XD/Fan Mode (2) BCF-00V9XD/Light Mode


19:12:23 AUG 16, 2001

/77

MKR Δ 136.0 kHzREF 85.5 dB μ V

#AT 20 dB

-.50 dB

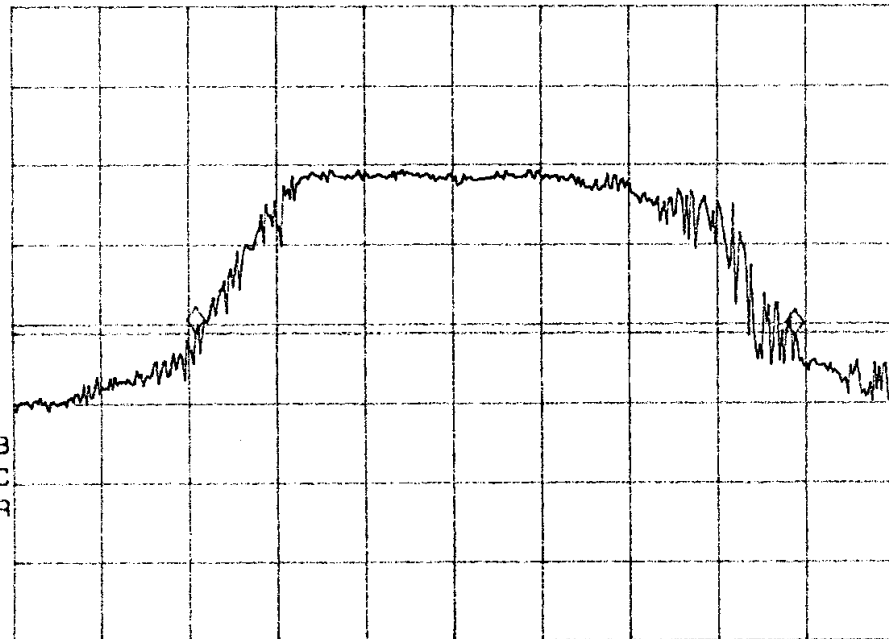PEAK
LOG
10
dB/DL
44.4
dB μ VVA SB
SC FC
CORR

CENTER 433.7010 MHz

#RES BW 10 kHz

#VBW 10 kHz

SPAN 200.0 kHz

#SWP 150 msec


19:08:09 AUG 16, 2001

/77

MKR Δ 106.5 kHzREF 88.5 dB μ V

#AT 20 dB

.33 dB

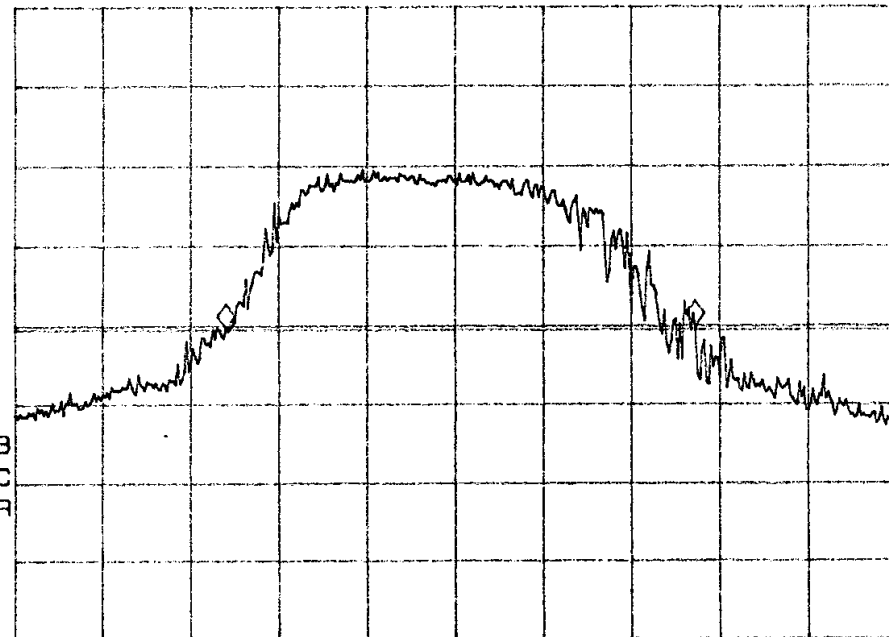PEAK
LOG
10
dB/DL
48.0
dB μ VVA SB
SC FC
CORR

CENTER 433.9520 MHz

#RES BW 10 kHz

#VBW 10 kHz

SPAN 200.0 kHz

#SWP 150 msec

5. DEVIATION TO TEST SPECIFICATIONS

【NONE】