

APPLICATION FOR CERTIFICATION  
On Behalf of  
Chungear Industrial Co., Ltd.

Fan/Light Remote Controller (Transmitter)

Model : E01BT-1(BCF-0049X2)

FCC ID : KUJCE9101

Prepared for : Chungear Industrial Co., Ltd.  
106 Kanho Rd., Taichung,  
Taiwan, R.O.C.

Prepared by : Audix Corporation  
Technical Division EMC Department  
No. 53-11, Tin-Fu Tsun, Lin-Kou Hsiang,  
Taipei Hsien 24443, Taiwan, R.O.C.

Tel : (02) 2609-9301, 2609-2133  
Fax : (02) 2609-9303

File Number : ATM-G91666  
Report Number : TTEMC-F91119  
Date of Test : Jul. 18 ~ 31, 2002  
Date of Report : Jun. 10, 2003

## TABLE OF CONTENTS

| Description                                                                     | Page |
|---------------------------------------------------------------------------------|------|
| TEST REPORT CERTIFICATION .....                                                 | 3    |
| 1. GENERAL INFORMATION .....                                                    | 4    |
| 1.1. Description of Device (EUT) .....                                          | 4    |
| 1.2. Description of Test Facility .....                                         | 5    |
| 1.3. Measurement Uncertainty .....                                              | 5    |
| 2. POWERLINE CONDUCTED TEST .....                                               | 6    |
| 3. RADIATED EMISSION TEST .....                                                 | 7    |
| 3.1. Test Equipment .....                                                       | 7    |
| 3.2. Test Setup .....                                                           | 7    |
| 3.3. Radiation Limit (§15.231) .....                                            | 8    |
| 3.4. EUT's Configuration during Compliance Measurement .....                    | 8    |
| 3.5. Operating Condition of EUT .....                                           | 9    |
| 3.6. Test Procedure .....                                                       | 9    |
| 3.7. Test Results .....                                                         | 9    |
| 3.8. Radiated Emission Noise Measurement Results .....                          | 10   |
| 4. EMISSION BANDWIDTH TEST .....                                                | 16   |
| 4.1. Test Equipment .....                                                       | 16   |
| 4.2. Block Diagram of Test Setup .....                                          | 16   |
| 4.3. Specification Limits (§15.231-(c)) .....                                   | 16   |
| 4.4. EUT's Configuration during Compliance Measurement .....                    | 16   |
| 4.5. Emission Bandwidth Measurement Results .....                               | 16   |
| 5. PERIODIC OPERATED TEST .....                                                 | 18   |
| 5.1. Test Equipment .....                                                       | 18   |
| 5.2. Block Diagram of Test Setup .....                                          | 18   |
| 5.3. Specification Limits [§15.231-(a)-(1)] .....                               | 18   |
| 5.4. EUT's Configuration during Compliance Measurement .....                    | 18   |
| 5.5. Periodic Operated Measurement Results .....                                | 18   |
| 6. DEVIATION TO TEST SPECIFICATIONS .....                                       | 20   |
| 7. PHOTOGRAPHS .....                                                            | 21   |
| 7.1. Photos of Radiated Measurement at Semi-Anechoic Chamber (30~1000MHz) ..... | 21   |
| 7.2. Photos of Radiated Measurement at Semi-Anechoic Chamber (1~3GHz) .....     | 22   |
| 7.3. Photos of Emission Bandwidth Measurement .....                             | 24   |
| 7.4. Photos of Periodic Operated Measurement .....                              | 24   |

# TEST REPORT CERTIFICATION

Applicant : Chungear Industrial Co., Ltd.  
 Manufacturer : Chungear Industrial Co., Ltd.  
 EUT Description : Fan/Light Remote Controller (Transmitter)  
 FCC ID : KUJCE9101  
 (A) MODEL NO. : E01BT-1(BCF-0049X2)  
 (B) SERIAL NO. : N/A  
 (C) POWER SUPPLY : DC 9V

Measurement Procedure Used:

FCC RULES AND REGULATIONS PART 15 SUBPART C, MAY 2002  
AND ANSI C63.4/1992

The device described above was tested by AUDIX CORPORATION to determine the maximum emission levels emanating from the device. The maximum emission levels were compared to the FCC Part 15 subpart C limits both radiated and conducted emissions and output signal levels.

The measurement results are contained in this test report and AUDIX CORPORATION is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliant with the FCC official limits.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX CORPORATION.

Date of Test : Jul. 18 ~ 31, 2002

Prepared by : Cherry Wang 6/22/2003  
 (Cherry Wang/Assistant Manager)

Test Engineer : Allen Wang Jun. 14 2003  
 (Allen Wang/Deputy Manager)

Approve & Authorized Signer : Leon Liu Jun. 14 2003  
 (Leon Liu/Manager)

# 1. GENERAL INFORMATION

## 1.1. Description of Device (EUT)

|                           |   |                                                                                 |
|---------------------------|---|---------------------------------------------------------------------------------|
| Description               | : | Fan/Light Remote Controller (Transmitter)                                       |
| Model Number              | : | E01BT-1(BCF-0049X2)                                                             |
| FCC ID                    | : | KUJCE9101                                                                       |
| Applicant                 | : | Chungear Industrial Co., Ltd.<br><br>160 Kanho Rd., Taichung,<br>Taiwan, R.O.C. |
| Manufacturer              | : | Chungear Industrial Co., Ltd.<br><br>160 Kanho Rd., Taichung,<br>Taiwan, R.O.C. |
| Fundamental Frequency     | : | 299.6MHz                                                                        |
| Power Supply              | : | DC 9V                                                                           |
| Date of Receipt of Sample | : | Jul. 13, 2002                                                                   |
| Date of Test              | : | Jul. 18 ~ 31, 2002                                                              |

Fan/Light Remote Controller -Receiver  
 Model No.: JY326B  
 FCC ID : By DoC

Fan/Light Remote Controller -Receiver  
 Model No.: JY199  
 FCC ID : By DoC

### Remark:

Antenna requirement: This EUT's transmitter antenna is design in soldered to a printed circuit board, comply with §15.203 and inform to user that any change and modify is prohibited.

## 1.2. Description of Test Facility

|                                                                                         |   |                                                                                                                            |
|-----------------------------------------------------------------------------------------|---|----------------------------------------------------------------------------------------------------------------------------|
| Site Description<br>(Semi-Anechoic Chamber)                                             | : | May 16, 2003 Re-File on<br>Federal Communication Commission<br>Registration Number: 90993                                  |
| Test Site                                                                               | : | Semi-Anechoic Chamber                                                                                                      |
| Name of Firm                                                                            | : | Audix Corporation<br>Technical Division EMC Department<br>No. 53-11, Tin-Fu Tsun, Lin-Kou,<br>Taipei Hsien, Taiwan, R.O.C. |
| Site Location #1                                                                        | : | No. 53-11, Tin-Fu Tsun, Lin-Kou,<br>Taipei Hsien, Taiwan, R.O.C.                                                           |
| Site Location #2                                                                        | : | No. 67-4, Tin-Fu Tsun, Lin-Kou,<br>Taipei Hsien, Taiwan, R.O.C.                                                            |
| NVLAP Lab. Code<br>(NVLAP is a NATA accredited body under Mutual Recognition Agreement) | : | 200077-0                                                                                                                   |

## 1.3. Measurement Uncertainty

| Test Item                        | Frequency Range | Uncertainty (dB)  |
|----------------------------------|-----------------|-------------------|
| Conduction Test                  | 150KHz~30MHz    | $\pm 2.66$ dB     |
| Radiation Test<br>(Distance: 3m) | 30MHz~300MHz    | +4.26dB / -4.22dB |
|                                  | 300MHz~1000MHz  | +5.28dB / -4.0dB  |

Remark : Uncertainty =  $K_{\mu c}(y)$

## **2. POWERLINE CONDUCTED TEST**

**【The EUT only employ battery power for operation, no conductive emissions limits are required according to FCC Part 15 Section §15.207】**

### 3. RADIATED EMISSION TEST

#### 3.1. Test Equipment

The following test equipment are used during the radiated emission tests :

##### 3.1.1. For 30MHz~1000MHz Frequency (at Semi-Anechoic Chamber)

| Item | Type              | Manufacturer  | Model No.   | Serial No. | Last Cal.    | Cal. Interval |
|------|-------------------|---------------|-------------|------------|--------------|---------------|
| 1.   | Spectrum Analyzer | HP            | 8593EM      | 3826A00248 | Sep. 04, 01' | 1 Year        |
| 2.   | Test Receiver     | Rohde&Schwarz | ESVP        | 879691/036 | Jun.09, 02'  | 1 Year        |
| 3.   | Pre-Amplifier     | HP            | 8447D       | 2944A06305 | Mar.05, 02'  | 1 Year        |
| 4.   | Broadband Antenna | Schwarzbeck   | BBA 9106    | A3L        | Jan. 08, 02' | 1 Year        |
| 5.   | Broadband Antenna | Schwarzbeck   | UHALP9108-A | 0139       | Jan. 08, 02' | 1 Year        |

##### 3.1.2. For 1GHz~3GHz frequency (at Semi-Anechoic Chamber)


| Item | Type              | Manufacturer | Model No. | Serial No. | Last Cal.   | Cal. Interval |
|------|-------------------|--------------|-----------|------------|-------------|---------------|
| 1.   | Spectrum Analyzer | HP           | 8593EM    | 3826A00248 | Sep.04, 01' | 1 Year        |
| 2.   | Amplifier         | HP           | 8449B     | 3008A00529 | Jan.05, 02' | 1 Year        |
| 3.   | Horn Antenna      | EMCO         | 3115      | 9112-3775  | Apr.16, 02' | 1 Year        |

#### 3.2. Test Setup

##### 3.2.1. Block Diagram of connection between EUT and simulators

**FAN/LIGHT REMOTE CONTROLLER (TRANSMITTER)  
(EUT)**

##### 3.2.2. Open Field Test Site (3M) Setup Diagram

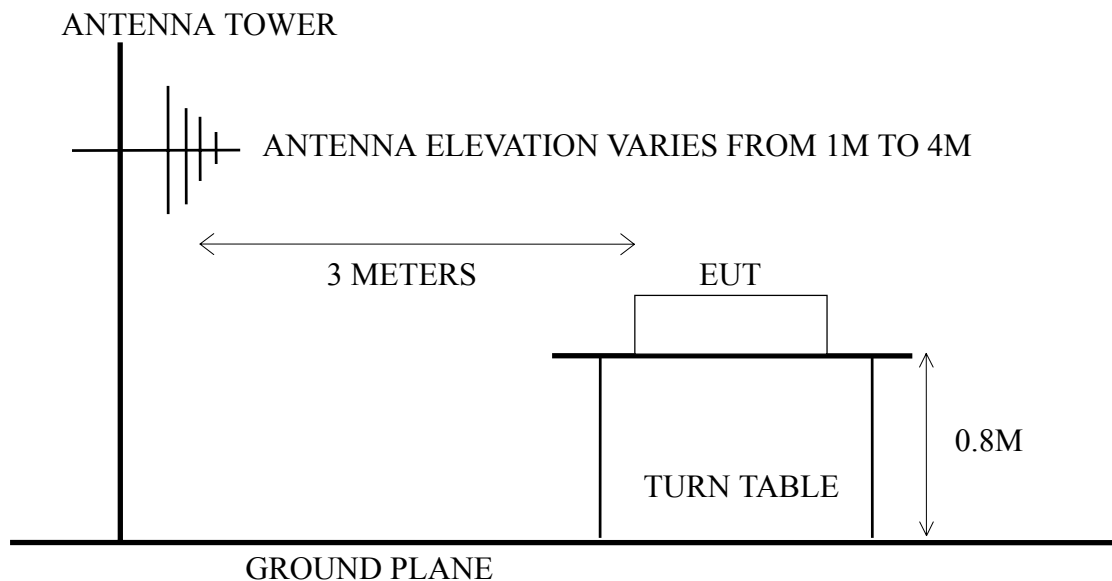

### 3.3. Radiation Limit (§15.231)

#### 3.3.1. Radiation Limit (§15.231)

| FREQUENCY<br>MHz  | DISTANCE<br>Meters | FIELD STRENGTHS LIMITS |                          |
|-------------------|--------------------|------------------------|--------------------------|
|                   |                    | $\mu\text{V/m}$        | $\text{dB}\mu\text{V/m}$ |
| Fundamental Freq. | 3                  | 5400.0                 | 74.64 (Quasi-Peak)       |
| Spurious Emission | 3                  | 540.0                  | 54.64 (Quasi-Peak)       |

- Remark :
- (1) Emission level ( $\text{dB}\mu\text{V/m}$ ) =  $20 \log$  Emission level ( $\mu\text{V/m}$ )
  - (2) The tighter limit applies at the edge between two frequency bands.
  - (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
  - (4) Where limit of Fundamental Freq. is calculated by:  
 $41.6667 \times 299.6 - 7083.3333 = 5400.0 \mu\text{V/m} = 74.64 \text{dB}\mu\text{V/m}$   
 limit of spurious emission is  $74.64 \text{dB}\mu\text{V/m} - 20 \text{dB} = 54.64 \text{dB}\mu\text{V/m}$
  - (5) The limits in this table are based on CFR 47 Part 15.205(a)(b) and Part 15.209 (a) and Part 15.231(b).

#### 3.3.2. Radiated Emission Limits (§15.209, Class B)

| FREQUENCY<br>MHz | DISTANCE<br>Meters | FIELD STRENGTHS LIMITS |                          |
|------------------|--------------------|------------------------|--------------------------|
|                  |                    | $\mu\text{V/m}$        | $\text{dB}\mu\text{V/m}$ |
| 30 ~ 88          | 3                  | 100                    | 40.0                     |
| 88 ~ 216         | 3                  | 150                    | 43.5                     |
| 216 ~ 960        | 3                  | 200                    | 46.0                     |
| Above 960        | 3                  | 500                    | 54.0                     |

- Remark :
- (1) Emission level ( $\text{dB}\mu\text{V/m}$ ) =  $20 \log$  Emission level ( $\mu\text{V/m}$ )
  - (2) The tighter limit applies at the edge between two frequency bands.
  - (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

### 3.4. EUT's Configuration during Compliance Measurement

The following equipment were installed on radiated measurement to meet the commission requirement and operating in a manner which tended to maximize its emission characteristics in a normal application.

#### 3.4.1. Fan/Light Remote Controller (Transmitter) (EUT)

Model Number : E01BT-1(BCF-0049X2)  
 Serial Number : N/A  
 Manufacturer : Chungear Industrial Co., Ltd.  
 Fundamental Frequency : 299.6MHz

### 3.5. Operating Condition of EUT

- 3.5.1. Setup the EUT and simulator as shown on 3.2.
- 3.5.2. Turned on the power of all equipment.
- 3.5.3. The EUT (Fan/Light Remote Controller (Transmitter)) was emitted the fundamental frequency with data code.
- 3.5.4. The EUT was at worked on maximum transmitting status (high & Light on) during all testing.
- 3.5.5. Repeated the above procedures from 3.5.3 to 3.5.4.

### 3.6. Test Procedure

The EUT and its simulators were placed on a turn table which was 0.8 meter above the ground. The turn table rotated 360 degrees to determine the position of the maximum emission level. For 30MHz to 3GHz frequency range, EUT was set 3 meters away from the receiving antenna which was mounted on a antenna tower. The antenna moved up and down between 1 to 4 meters for 30MHz to 3GHz frequency range to find out the maximum emission level. Broadband antenna such as calibrated biconical and log- periodical antenna or horn antenna were used as a receiving antenna. Both horizontal and vertical polarization of the antenna were set on measurement. In order to find the maximum emission, all of the interface cables were manipulated according to FCC ANSI C63.4-1992 regulation.

The bandwidth of test receiver was set at 120KHz and resolution bandwidth of spectrum analyzer was set at 1MHz.

EUT with three kinds of position (on Stand 、 Side 、 Lie) were done during radiated measurement and all the test results are listed in section 3.8.

### 3.7. Test Results

**PASSED.** Please refer to the following pages.

### 3.8. Radiated Emission Noise Measurement Results

The frequency spectrum from 30 MHz to 3GHz is investigated. All the emissions not reported below are too low against the FCC Part 15 official limits.

|                 |                                              |               |      |
|-----------------|----------------------------------------------|---------------|------|
| Date of Test :  | Jul. 31, 2002                                | Temperature : | 22°C |
| EUT :           | Fan/Light Remote Controller<br>(Transmitter) | Humidity :    | 63%  |
| Test Position : | EUT on Stand                                 |               |      |

| Emission Frequency<br>MHz                                   | Antenna Factor<br>dB/m | Cable Loss<br>dB | Meter Reading<br>Horizontal<br>dBμV | Emission Level<br>Horizontal<br>dBμV/m | Limits<br>dBμV/m | Margin<br>dB |
|-------------------------------------------------------------|------------------------|------------------|-------------------------------------|----------------------------------------|------------------|--------------|
| Fundamental Freq. (Quasi-Peak Value)                        |                        |                  |                                     |                                        |                  |              |
| 299.600                                                     | 26.80                  | 3.90             | 34.31                               | 65.01                                  | 74.64            | 9.63         |
| Spurious / Harmonic Freq. (Below 1000MHz, Quasi-Peak Value) |                        |                  |                                     |                                        |                  |              |
| 599.200                                                     | 19.50                  | 6.30             | 24.91                               | 50.71                                  | 54.64            | 3.93         |
| 898.300                                                     | 23.00                  | 7.30             | 19.26                               | 49.56                                  | 54.64            | 5.08         |
| Spurious / Harmonic Freq. (Above 1GHz, Average Value)       |                        |                  |                                     |                                        |                  |              |
| * 1196.200                                                  | 25.29                  | 4.58             | 12.79                               | 42.66                                  | 54.00            | 11.34        |
| * 1496.300                                                  | 25.40                  | 5.41             | 11.36                               | 42.17                                  | 54.00            | 11.83        |
| 1795.500                                                    | 26.90                  | 6.93             | 7.60                                | 41.43                                  | 54.64            | 13.21        |
| 2094.700                                                    | 28.00                  | 5.98             | 6.59                                | 40.57                                  | 54.64            | 14.07        |
| 2392.200                                                    | 28.61                  | 6.35             | 2.60                                | 37.56                                  | 54.64            | 17.08        |
| * 2692.210                                                  | 29.63                  | 6.78             | 0.19                                | 36.60                                  | 54.00            | 17.40        |
| 2998.682                                                    | 30.81                  | 7.22             | -3.51                               | 34.52                                  | 54.64            | 20.12        |

- Remark : 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading.  
 2. Measurement was up to 10th harmonic (~3GHz), but the emissions level were too low against the official limit and not report.  
 3. '\*' The field strength of emission appearing within Part 15.205(a) shall not exceed the limits shown in section 15.209.

|                 |                                              |               |      |
|-----------------|----------------------------------------------|---------------|------|
| Date of Test :  | Jul. 31, 2002                                | Temperature : | 22°C |
| EUT :           | Fan/Light Remote Controller<br>(Transmitter) | Humidity :    | 63%  |
| Test Position : | EUT on Stand                                 |               |      |

| Emission<br>Frequency<br>MHz                                | Antenna<br>Factor<br>dB/m | Cable<br>Loss<br>dB | Meter Reading<br>Vertical<br>dBμV | Emission Level<br>Vertical<br>dBμV/m | Limits<br>dBμV/m | Margin<br>dB |
|-------------------------------------------------------------|---------------------------|---------------------|-----------------------------------|--------------------------------------|------------------|--------------|
| Fundamental Freq. (Quasi-Peak Value)                        |                           |                     |                                   |                                      |                  |              |
| 299.600                                                     | 26.66                     | 3.90                | 31.27                             | 61.83                                | 74.64            | 12.81        |
| Spurious / Harmonic Freq. (Below 1000MHz, Quasi-Peak Value) |                           |                     |                                   |                                      |                  |              |
| 599.200                                                     | 20.40                     | 6.30                | 20.64                             | 47.34                                | 54.64            | 7.30         |
| 898.300                                                     | 23.04                     | 7.30                | 11.08                             | 41.42                                | 54.64            | 13.22        |
| Spurious / Harmonic Freq. (Above 1GHz, Average Value)       |                           |                     |                                   |                                      |                  |              |
| * 1196.200                                                  | 25.29                     | 4.58                | 11.46                             | 41.33                                | 54.00            | 12.67        |
| * 1496.300                                                  | 25.40                     | 5.41                | 9.67                              | 40.48                                | 54.00            | 13.52        |
| 1795.500                                                    | 26.90                     | 6.93                | 3.77                              | 37.60                                | 54.64            | 17.04        |
| 2094.700                                                    | 28.00                     | 5.98                | 4.32                              | 38.30                                | 54.64            | 16.34        |
| 2392.200                                                    | 28.61                     | 6.35                | 2.19                              | 37.15                                | 54.64            | 17.49        |
| * 2692.210                                                  | 29.63                     | 6.78                | 0.11                              | 36.52                                | 54.00            | 17.48        |
| 2992.077                                                    | 30.78                     | 7.20                | -2.06                             | 35.92                                | 54.64            | 18.72        |

- Remark :
1. Emission Level = Antenna Factor + Cable Loss + Meter Reading.
  2. Measurement was up to 10th harmonic (~3GHz), but the emissions level were too low against the official limit and not report.
  3. ‘\*’ The field strength of emission appearing within Part 15.205(a) shall not exceed the limits shown in section 15.209.

|                 |                                              |               |      |
|-----------------|----------------------------------------------|---------------|------|
| Date of Test :  | Jul. 31, 2002                                | Temperature : | 22°C |
| EUT :           | Fan/Light Remote Controller<br>(Transmitter) | Humidity :    | 63%  |
| Test Position : | EUT on Side                                  |               |      |

| Emission<br>Frequency<br>MHz                                | Antenna<br>Factor<br>dB/m | Cable<br>Loss<br>dB | Meter Reading<br>Horizontal<br>dBμV | Emission Level<br>Horizontal<br>dBμV/m | Limits<br>dBμV/m | Margin<br>dB |
|-------------------------------------------------------------|---------------------------|---------------------|-------------------------------------|----------------------------------------|------------------|--------------|
| Fundamental Freq. (Quasi-Peak Value)                        |                           |                     |                                     |                                        |                  |              |
| 299.600                                                     | 26.80                     | 3.90                | 33.89                               | 64.59                                  | 74.64            | 10.05        |
| Spurious / Harmonic Freq. (Below 1000MHz, Quasi-Peak Value) |                           |                     |                                     |                                        |                  |              |
| 599.200                                                     | 19.50                     | 6.30                | 20.55                               | 46.35                                  | 54.64            | 8.29         |
| 898.300                                                     | 23.00                     | 7.30                | 13.60                               | 43.90                                  | 54.64            | 10.74        |
| Spurious / Harmonic Freq. (Above 1GHz, Average Value)       |                           |                     |                                     |                                        |                  |              |
| * 1196.200                                                  | 25.29                     | 4.58                | 13.36                               | 43.23                                  | 54.00            | 10.77        |
| * 1496.300                                                  | 25.40                     | 5.41                | 11.17                               | 41.98                                  | 54.00            | 12.02        |
| 1795.500                                                    | 26.90                     | 6.93                | 0.56                                | 34.39                                  | 54.64            | 20.25        |
| 2094.700                                                    | 28.00                     | 5.98                | 0.41                                | 34.39                                  | 54.64            | 20.25        |
| 2392.200                                                    | 28.61                     | 6.35                | -0.63                               | 34.33                                  | 54.64            | 20.31        |
| * 2692.210                                                  | 29.63                     | 6.78                | -3.08                               | 33.33                                  | 54.00            | 20.67        |
| 2992.077                                                    | 30.78                     | 7.20                | -5.41                               | 32.57                                  | 54.64            | 22.07        |

- Remark :
1. Emission Level = Antenna Factor + Cable Loss + Meter Reading.
  2. Measurement was up to 10th harmonic (~3GHz), but the emissions level were too low against the official limit and not report.
  3. ‘\*’ The field strength of emission appearing within Part 15.205(a) shall not exceed the limits shown in section 15.209.

|                 |                                                      |               |             |
|-----------------|------------------------------------------------------|---------------|-------------|
| Date of Test :  | <u>Jul. 31, 2002</u>                                 | Temperature : | <u>22°C</u> |
| EUT :           | <u>Fan/Light Remote Controller<br/>(Transmitter)</u> | Humidity :    | <u>63%</u>  |
| Test Position : | <u>EUT on Side</u>                                   |               |             |

| Emission<br>Frequency<br>MHz                                | Antenna<br>Factor<br>dB/m | Cable<br>Loss<br>dB | Meter Reading<br>Vertical<br>dBμV | Emission Level<br>Vertical<br>dBμV/m | Limits<br>dBμV/m | Margin<br>dB |
|-------------------------------------------------------------|---------------------------|---------------------|-----------------------------------|--------------------------------------|------------------|--------------|
| -----                                                       |                           |                     |                                   |                                      |                  |              |
| Fundamental Freq. (Quasi-Peak Value)                        |                           |                     |                                   |                                      |                  |              |
| 299.600                                                     | 26.66                     | 3.90                | 33.59                             | 64.15                                | 74.64            | 10.49        |
| Spurious / Harmonic Freq. (Below 1000MHz, Quasi-Peak Value) |                           |                     |                                   |                                      |                  |              |
| 599.200                                                     | 20.40                     | 6.30                | 19.57                             | 46.27                                | 54.64            | 8.37         |
| 898.300                                                     | 23.04                     | 7.30                | 14.42                             | 44.76                                | 54.64            | 9.88         |
| Spurious / Harmonic Freq. (Above 1GHz, Average Value)       |                           |                     |                                   |                                      |                  |              |
| * 1196.200                                                  | 25.29                     | 4.58                | 12.35                             | 42.22                                | 54.00            | 11.78        |
| * 1496.300                                                  | 25.40                     | 5.41                | 4.67                              | 35.48                                | 54.00            | 18.52        |
| 1795.500                                                    | 26.90                     | 6.93                | 1.12                              | 34.95                                | 54.64            | 19.69        |
| 2094.700                                                    | 28.00                     | 5.98                | -1.64                             | 32.34                                | 54.64            | 22.30        |
| 2392.200                                                    | 28.61                     | 6.35                | -2.60                             | 32.36                                | 54.64            | 22.28        |
| * 2692.210                                                  | 29.63                     | 6.78                | -4.02                             | 32.39                                | 54.00            | 21.61        |
| 2992.077                                                    | 30.78                     | 7.20                | -5.05                             | 32.93                                | 54.64            | 21.71        |
| -----                                                       |                           |                     |                                   |                                      |                  |              |

- Remark : 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading.  
2. Measurement was up to 10th harmonic (~3GHz), but the emissions level were too low against the official limit and not report.  
3. '\*' The field strength of emission appearing within Part 15.205(a) shall not exceed the limits shown in section 15.209.

|                 |                                                      |               |             |
|-----------------|------------------------------------------------------|---------------|-------------|
| Date of Test :  | <u>Jul. 31, 2002</u>                                 | Temperature : | <u>22°C</u> |
| EUT :           | <u>Fan/Light Remote Controller<br/>(Transmitter)</u> | Humidity :    | <u>63%</u>  |
| Test Position : | <u>EUT on Lie</u>                                    |               |             |

| Emission<br>Frequency<br>MHz                                | Antenna<br>Factor<br>dB/m | Cable<br>Loss<br>dB | Meter Reading<br>Horizontal<br>dBμV | Emission Level<br>Horizontal<br>dBμV/m | Limits<br>dBμV/m | Margin<br>dB |
|-------------------------------------------------------------|---------------------------|---------------------|-------------------------------------|----------------------------------------|------------------|--------------|
| -----                                                       |                           |                     |                                     |                                        |                  |              |
| Fundamental Freq. (Quasi-Peak Value)                        |                           |                     |                                     |                                        |                  |              |
| 299.600                                                     | 26.80                     | 3.90                | 38.07                               | 68.77                                  | 74.64            | 5.87         |
| Spurious / Harmonic Freq. (Below 1000MHz, Quasi-Peak Value) |                           |                     |                                     |                                        |                  |              |
| 599.200                                                     | 19.50                     | 6.30                | 20.57                               | 46.37                                  | 54.64            | 8.27         |
| 898.300                                                     | 23.00                     | 7.30                | 15.64                               | 45.94                                  | 54.64            | 8.70         |
| Spurious / Harmonic Freq. (Above 1GHz, Average Value)       |                           |                     |                                     |                                        |                  |              |
| * 1196.200                                                  | 25.29                     | 4.58                | 15.17                               | 45.04                                  | 54.00            | 8.96         |
| * 1496.300                                                  | 25.40                     | 5.41                | 12.81                               | 43.62                                  | 54.00            | 10.38        |
| 1795.500                                                    | 26.90                     | 6.93                | 8.82                                | 42.65                                  | 54.64            | 11.99        |
| 2094.056                                                    | 28.00                     | 5.98                | 0.41                                | 34.39                                  | 54.64            | 20.25        |
| 2392.200                                                    | 28.61                     | 6.35                | 0.78                                | 35.74                                  | 54.64            | 18.90        |
| * 2692.210                                                  | 29.63                     | 6.78                | -1.15                               | 35.26                                  | 54.00            | 18.74        |
| 2992.077                                                    | 30.78                     | 7.20                | -4.27                               | 33.71                                  | 54.64            | 20.93        |
| -----                                                       |                           |                     |                                     |                                        |                  |              |

- Remark : 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading.  
2. Measurement was up to 10th harmonic (~3GHz), but the emissions level were too low against the official limit and not report.  
3. '\*' The field strength of emission appearing within Part 15.205(a) shall not exceed the limits shown in section 15.209.

|                 |                                              |               |      |
|-----------------|----------------------------------------------|---------------|------|
| Date of Test :  | Jul. 31, 2002                                | Temperature : | 22°C |
| EUT :           | Fan/Light Remote Controller<br>(Transmitter) | Humidity :    | 63%  |
| Test Position : | EUT on Lie                                   |               |      |

| Emission Frequency<br>MHz                                   | Antenna Factor<br>dB/m | Cable Loss<br>dB | Meter Reading<br>Vertical<br>dBμV | Emission Level<br>Vertical<br>dBμV/m | Limits<br>dBμV/m | Margin<br>dB |
|-------------------------------------------------------------|------------------------|------------------|-----------------------------------|--------------------------------------|------------------|--------------|
| Fundamental Freq. (Quasi-Peak Value)                        |                        |                  |                                   |                                      |                  |              |
| 299.600                                                     | 26.66                  | 3.90             | 32.68                             | 63.24                                | 74.64            | 11.40        |
| Spurious / Harmonic Freq. (Below 1000MHz, Quasi-Peak Value) |                        |                  |                                   |                                      |                  |              |
| 599.200                                                     | 20.40                  | 6.30             | 20.77                             | 47.47                                | 54.64            | 7.17         |
| 898.300                                                     | 23.04                  | 7.30             | 10.92                             | 41.26                                | 54.64            | 13.38        |
| Spurious / Harmonic Freq. (Above 1GHz, Average Value)       |                        |                  |                                   |                                      |                  |              |
| * 1196.600                                                  | 25.29                  | 4.58             | 15.41                             | 45.28                                | 54.00            | 8.72         |
| * 1496.300                                                  | 25.40                  | 5.41             | 11.73                             | 42.54                                | 54.00            | 11.46        |
| 1795.200                                                    | 26.90                  | 6.93             | 0.25                              | 34.08                                | 54.64            | 20.56        |
| 2094.400                                                    | 28.00                  | 5.98             | -0.67                             | 33.31                                | 54.64            | 21.33        |
| 2392.500                                                    | 28.61                  | 6.35             | -1.33                             | 33.63                                | 54.64            | 21.01        |
| * 2692.210                                                  | 29.63                  | 6.78             | -4.15                             | 32.26                                | 54.00            | 21.74        |
| 2992.077                                                    | 30.78                  | 7.20             | -5.27                             | 32.71                                | 54.64            | 21.93        |

- Remark : 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading.  
2. Measurement was up to 10th harmonic (~3GHz), but the emissions level were too low against the official limit and not report.  
3. ‘\*’ The field strength of emission appearing within Part 15.205(a) shall not exceed the limits shown in section 15.209.


## 4. EMISSION BANDWIDTH TEST

### 4.1. Test Equipment

The following test equipment were used during the Emission Bandwidth Test :

| Item | Type              | Manufacturer | Model No. | Serial No. | Last Cal.    | Cal. Interval |
|------|-------------------|--------------|-----------|------------|--------------|---------------|
| 1.   | Spectrum Analyzer | HP           | 8593EM    | 3826A00248 | Sep. 04, 01' | 1 Year        |

### 4.2. Block Diagram of Test Setup

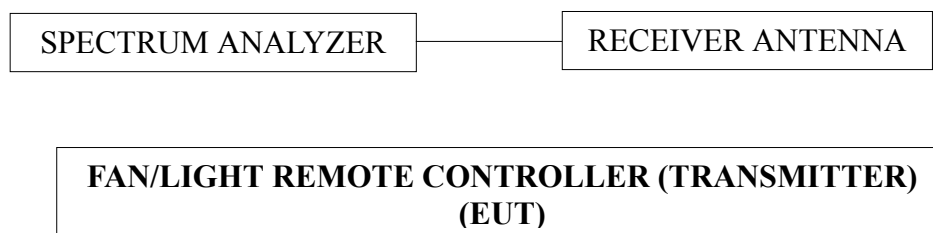

### 4.3. Specification Limits (§15.231-(c))

The bandwidth of emission shall be no wider than 0.25% of the center frequency for device operating above 70MHz and below 900MHz. Bandwidth is determined at the points 20dB down from the modulated carrier.

### 4.4. EUT's Configuration during Compliance Measurement

The configuration of EUT were same as section 3.4.

### 4.5. Emission Bandwidth Measurement Results


Fundamental Frequency: 299.6MHz

Date of Test: Jul. 18, 2002

| No. | Center Frequency | Bandwidth | Tolerance (%) |
|-----|------------------|-----------|---------------|
| 1.  | 299.7565MHz      | 53.5kHz   | 0.0178%       |

The graph of bandwidth measured is attached in next page.

## (Graph of Bandwidth Measurement)

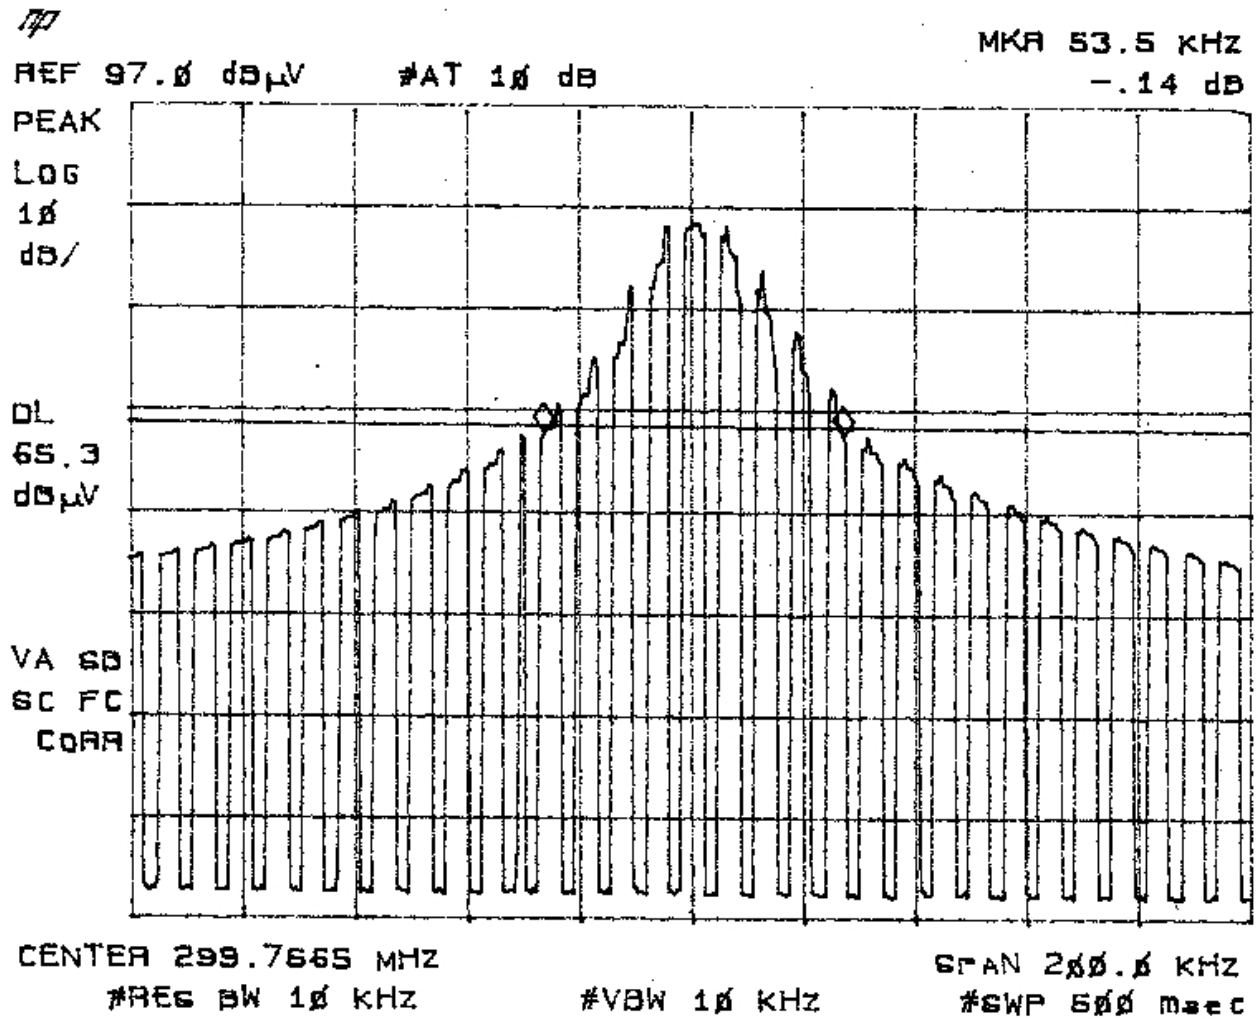


## 5. PERIODIC OPERATED TEST

### 5.1. Test Equipment

The following test equipment were used during the Emission Bandwidth Test :

| Item | Type              | Manufacturer | Model No. | Serial No. | Last Cal.    | Cal. Interval |
|------|-------------------|--------------|-----------|------------|--------------|---------------|
| 2.   | Spectrum Analyzer | HP           | 8593EM    | 3826A00248 | Sep. 04, 01' | 1 Year        |

### 5.2. Block Diagram of Test Setup

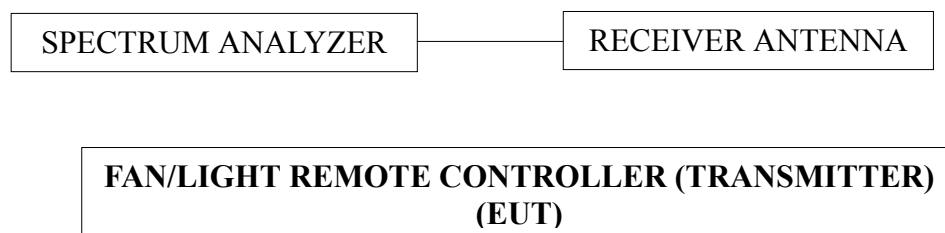

### 5.3. Specification Limits [§15.231-(a)-(1)]

The operation of this device is manually operated transmitter that is automatically deactivated the transmitter within not more than 5 seconds of being released, Compliance with §15.231 (a)- (1).

### 5.4. EUT's Configuration during Compliance Measurement


The configuration of EUT were same as section 3.4.

### 5.5. Periodic Operated Measurement Results

**PASS.**  $T < 5\text{sec.}$

The graph of testing is attached in next page.

## Graph of Periodic Operated Measurement

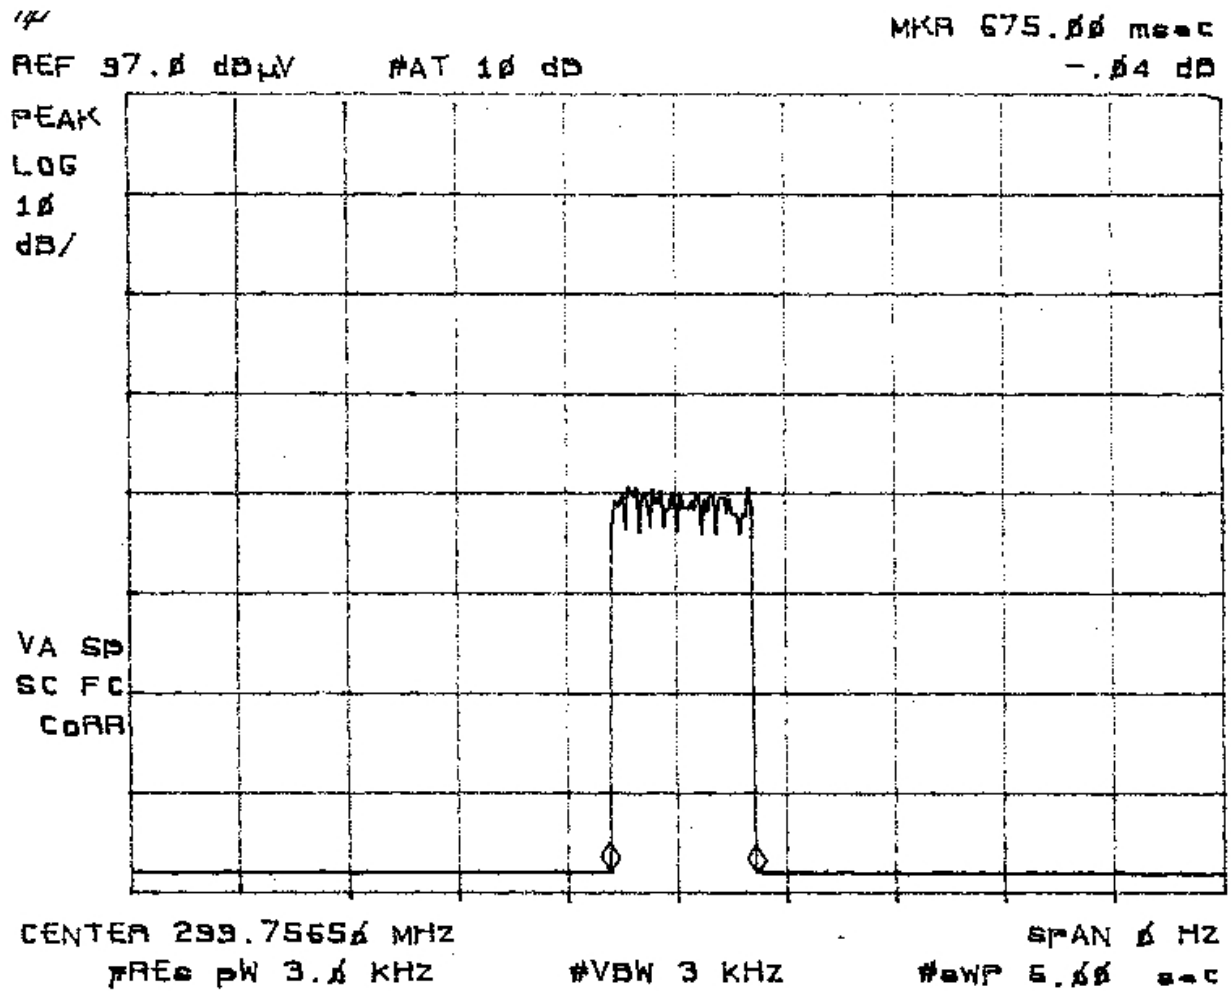

## **6. DEVIATION TO TEST SPECIFICATIONS**

**【NONE】**