

hp

REF -10.0 dBm

AT 10 dB

PEAK

LOG


10

dB/

WA SB

SC VS

CORR

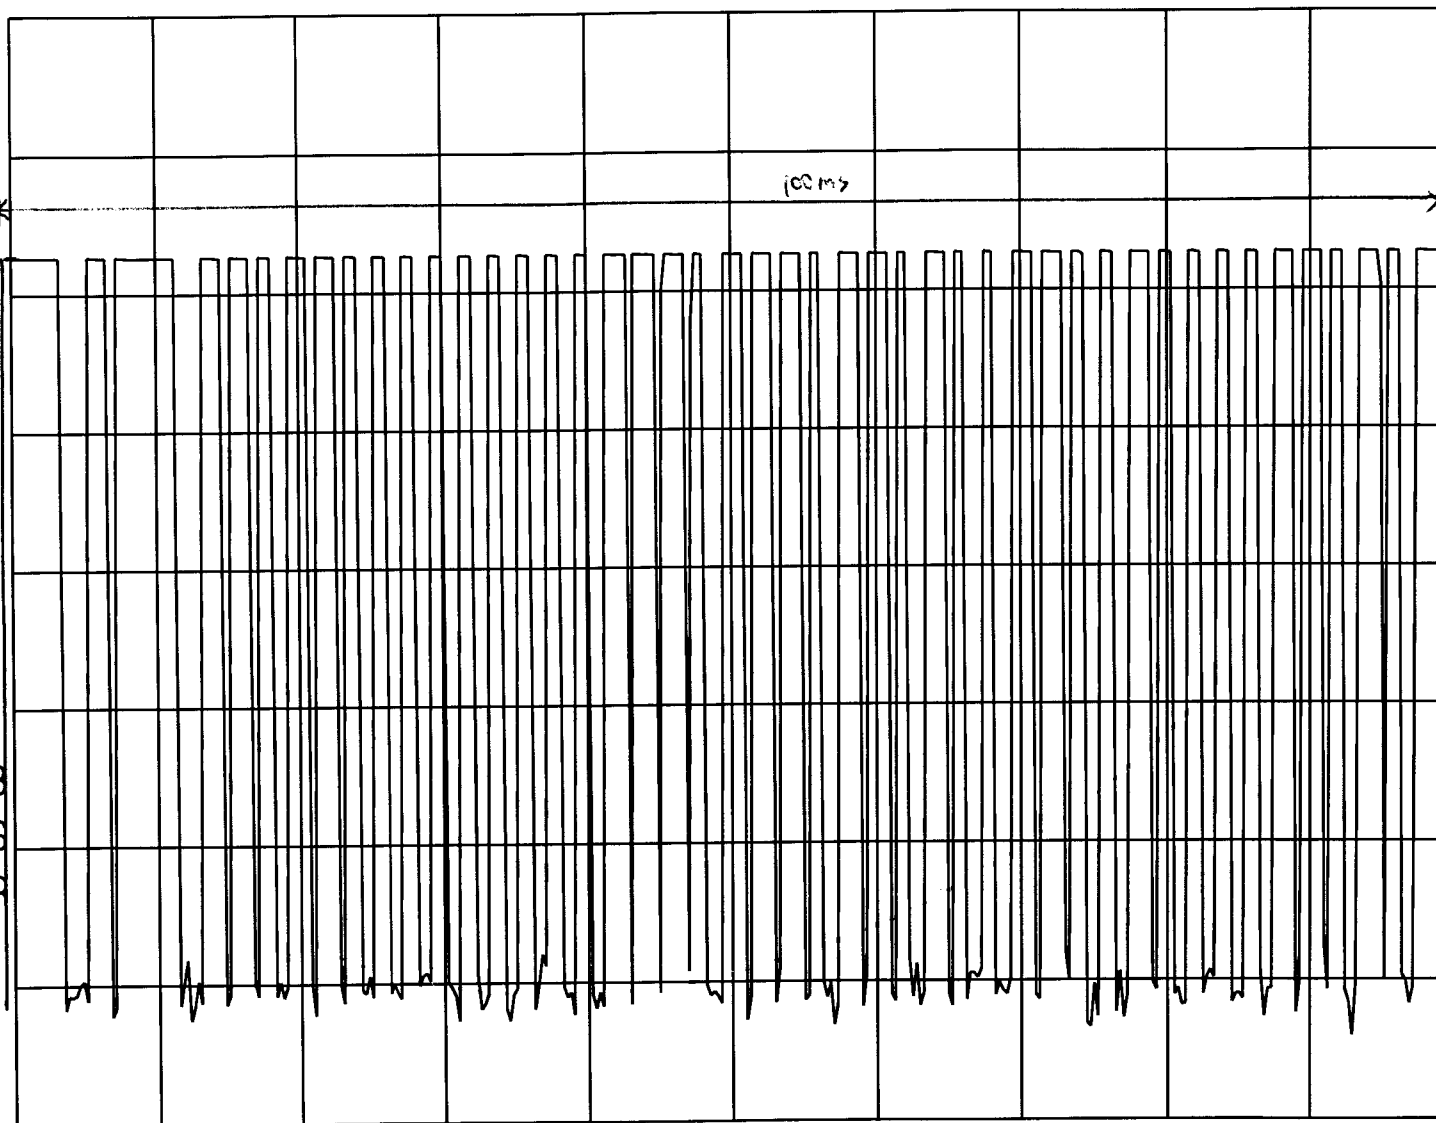

CENTER 300.155 MHz

#RES BW 100 kHz

#VBW 100 kHz

SPAN 0 Hz

#SWP 100 msec

Worst Case

Average Factor

$$= \frac{4 \times 2 + 1.5 \times 21 + 0.75 \times 24}{100}$$

$$= \frac{57.5}{100}$$

$$= 0.575 \text{ or } -4.8 \text{ dB}$$

hp

REF -30.0 dBm

AT 10 dB

PEAK

LOG


10

dB/

WA SB

SC VS

CORR

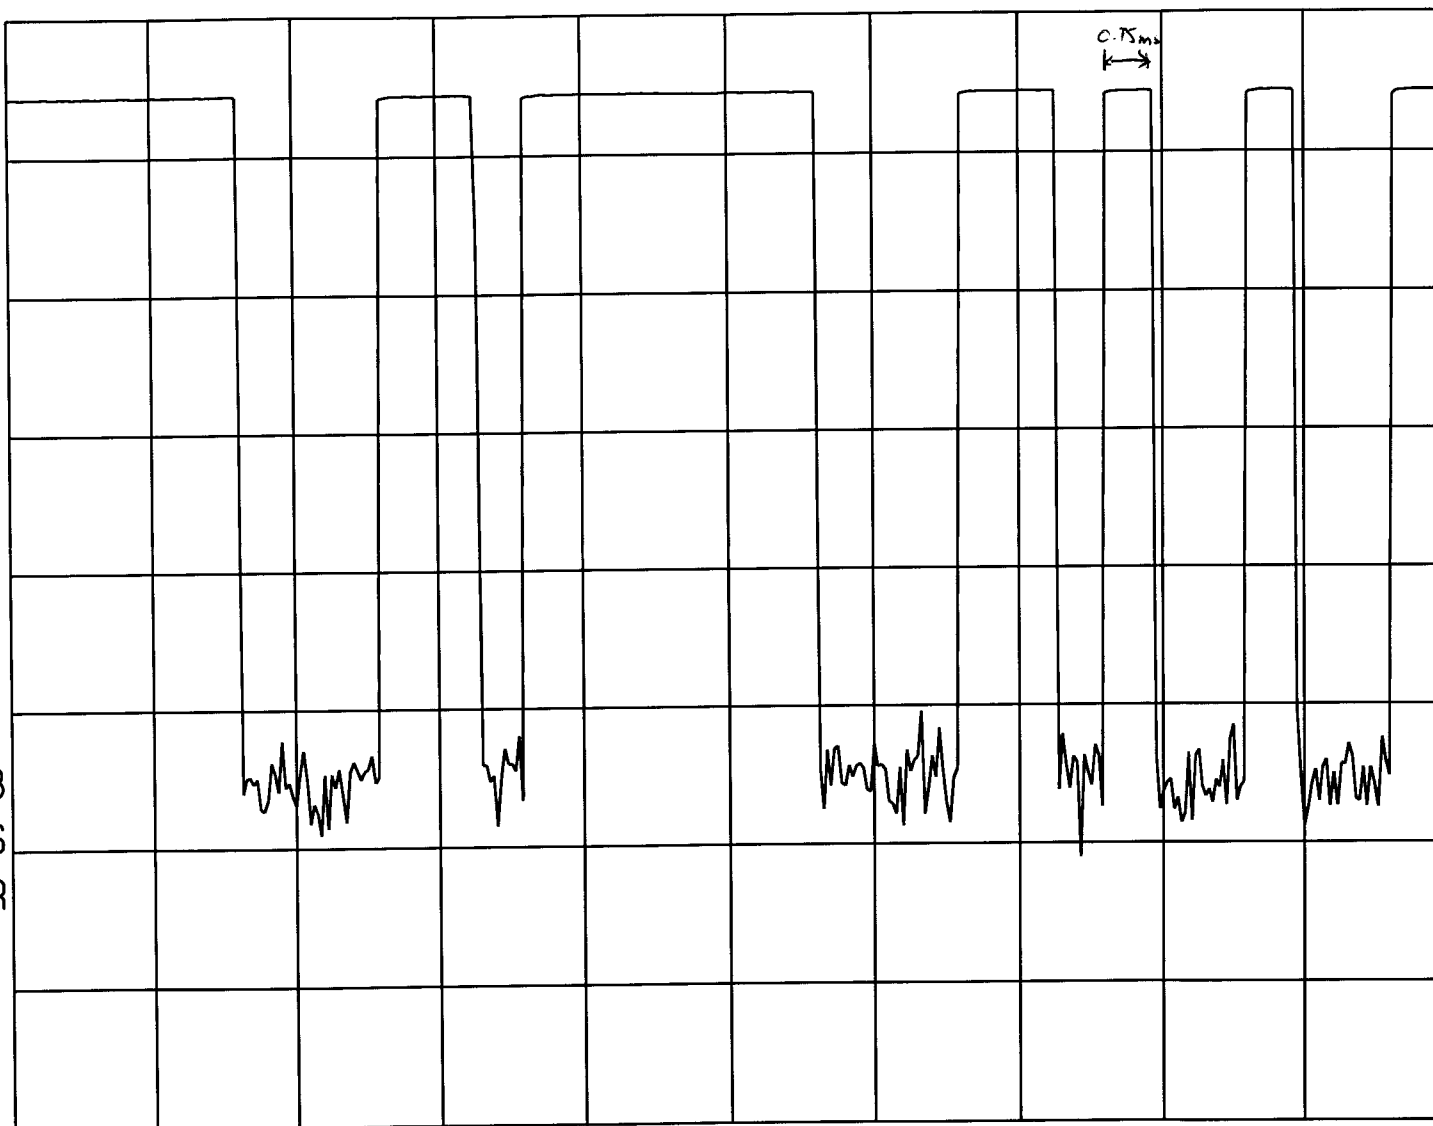

CENTER 390.573 MHz

SPAN 0 Hz

#RES BW 100 kHz

#VBW 100 kHz

#SWP 20.0 msec

hp

MKR 4.0120 msec

REF -30.0 dBm

AT 10 dB

.21 dB

PEAK

LOG


10

dB/

WA SB

SC VS

CORR

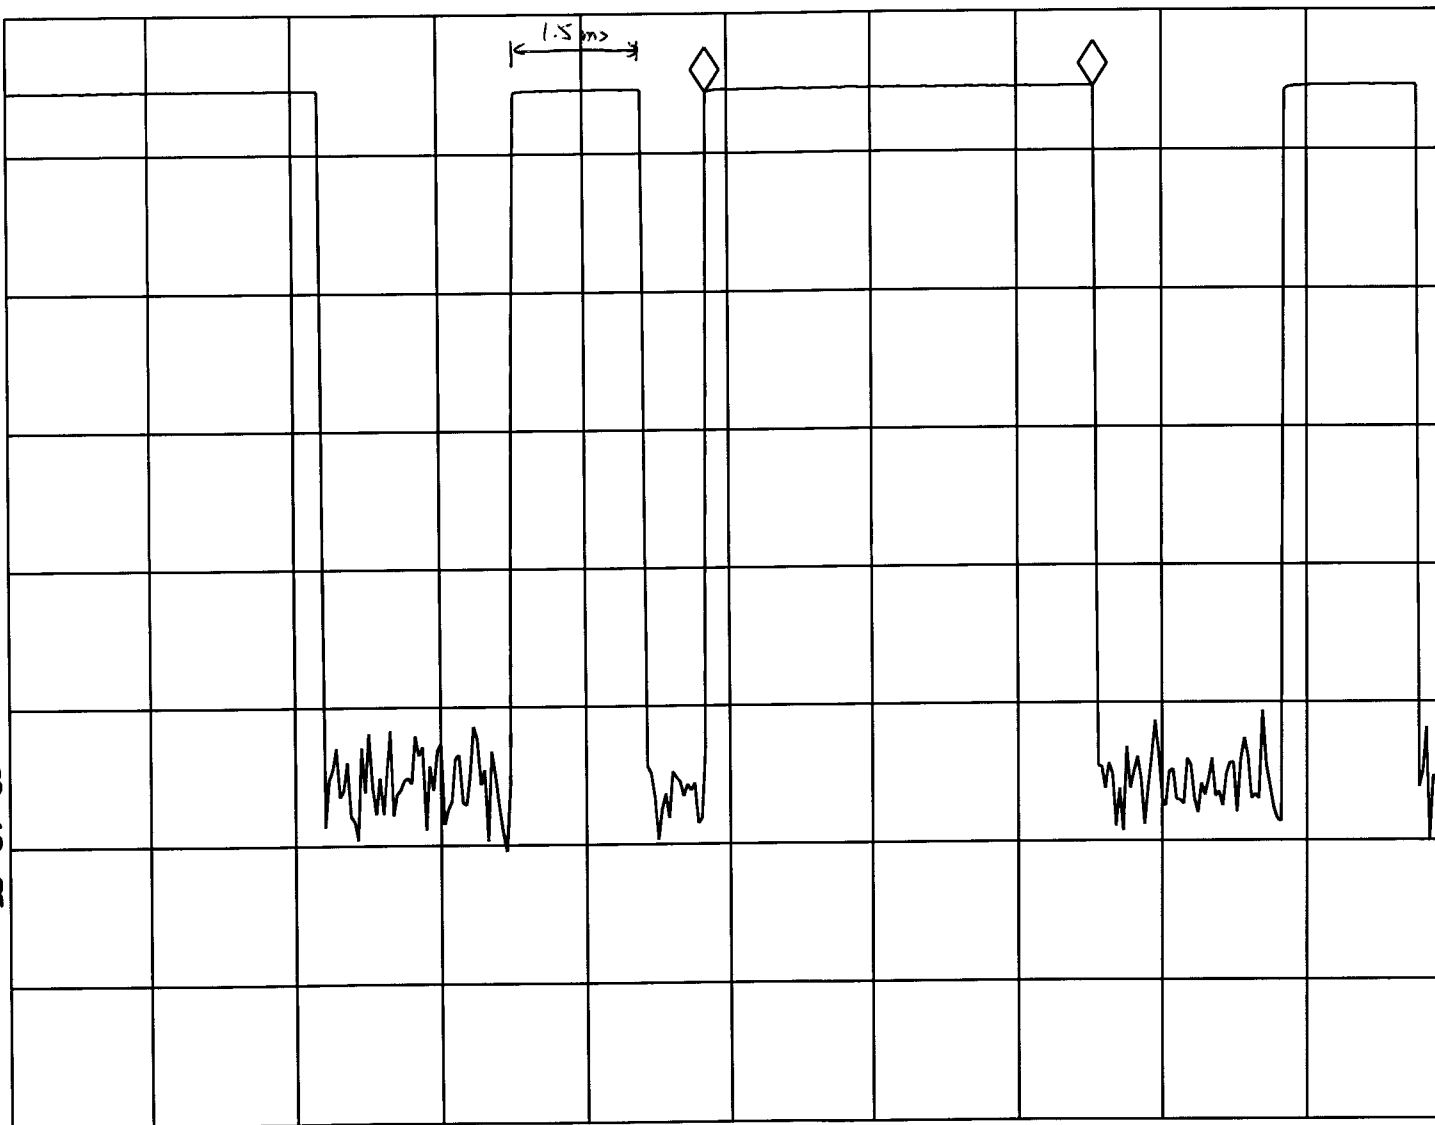

CENTER 390.573 MHz

SPAN 0 Hz

#RES BW 100 kHz

#VBW 100 kHz

#SWP 15.0 msec

hp

REF -30.0 dBm

AT 10 dB

PEAK

LOG


10

dB/

WA SB

SC VS

CORR

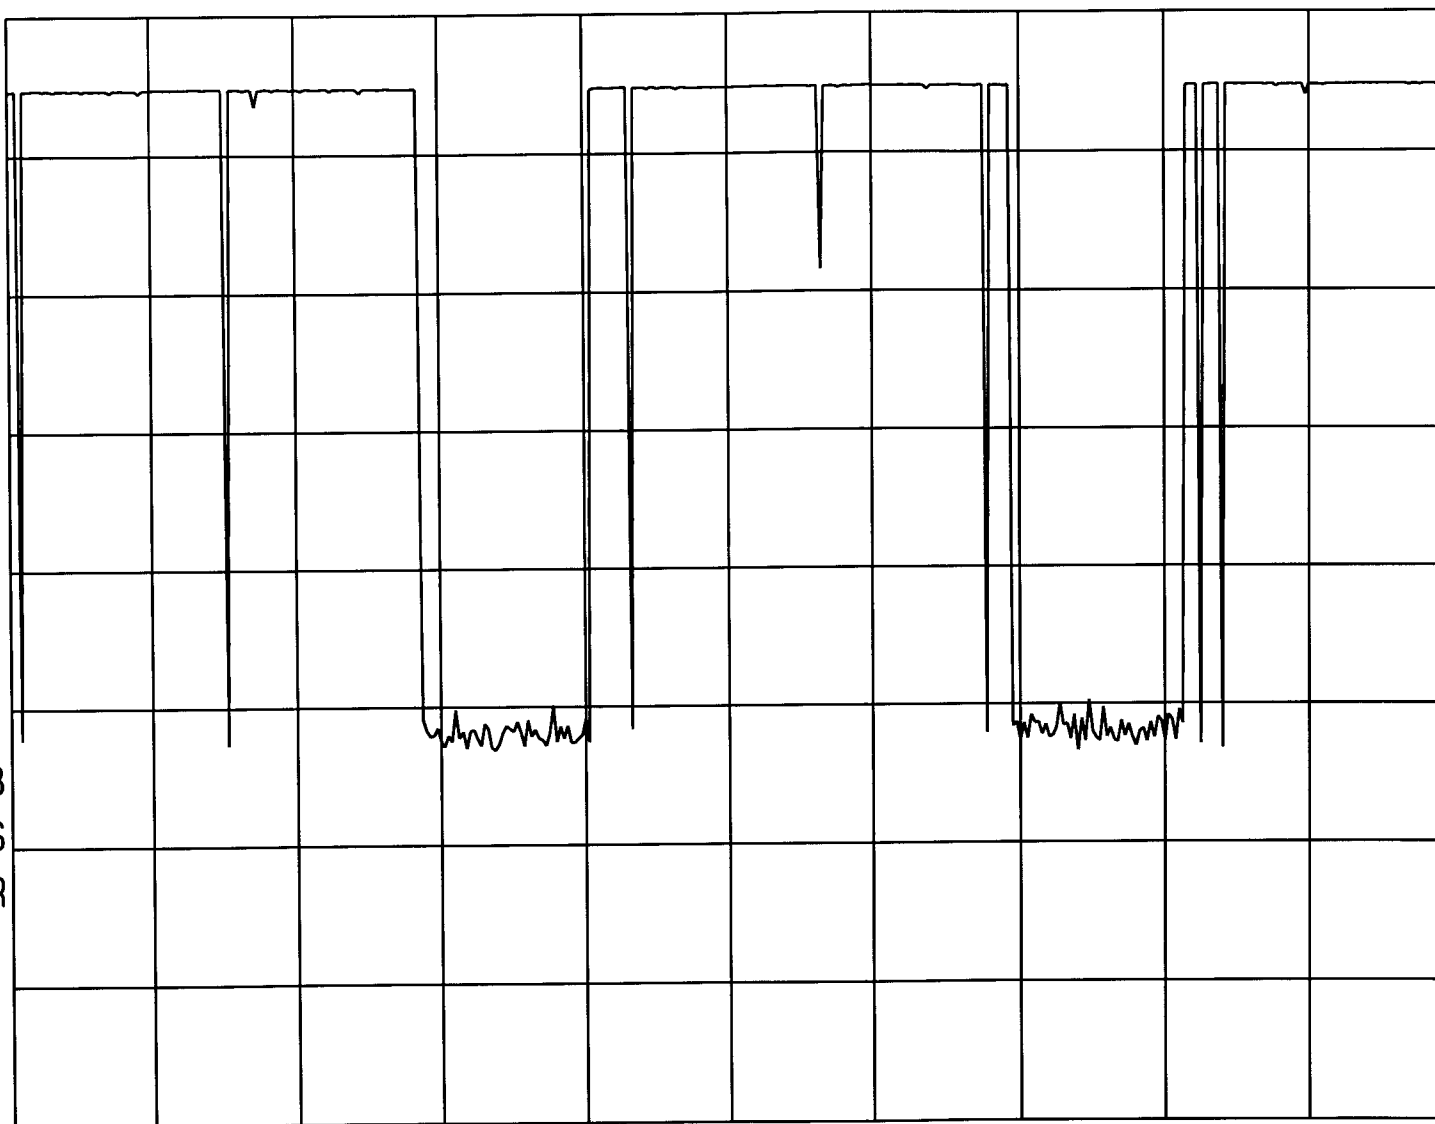

CENTER 390.573 MHz

SPAN 0 Hz

#RES BW 100 kHz

#VBW 100 kHz

#SWP 500 msec

hp

REF -30.0 dBm

AT 10 dB

MKR 1.8875 sec

-34.95 dBm

PEAK

LOG


10

dB/

WA SB

SC VC

CORR

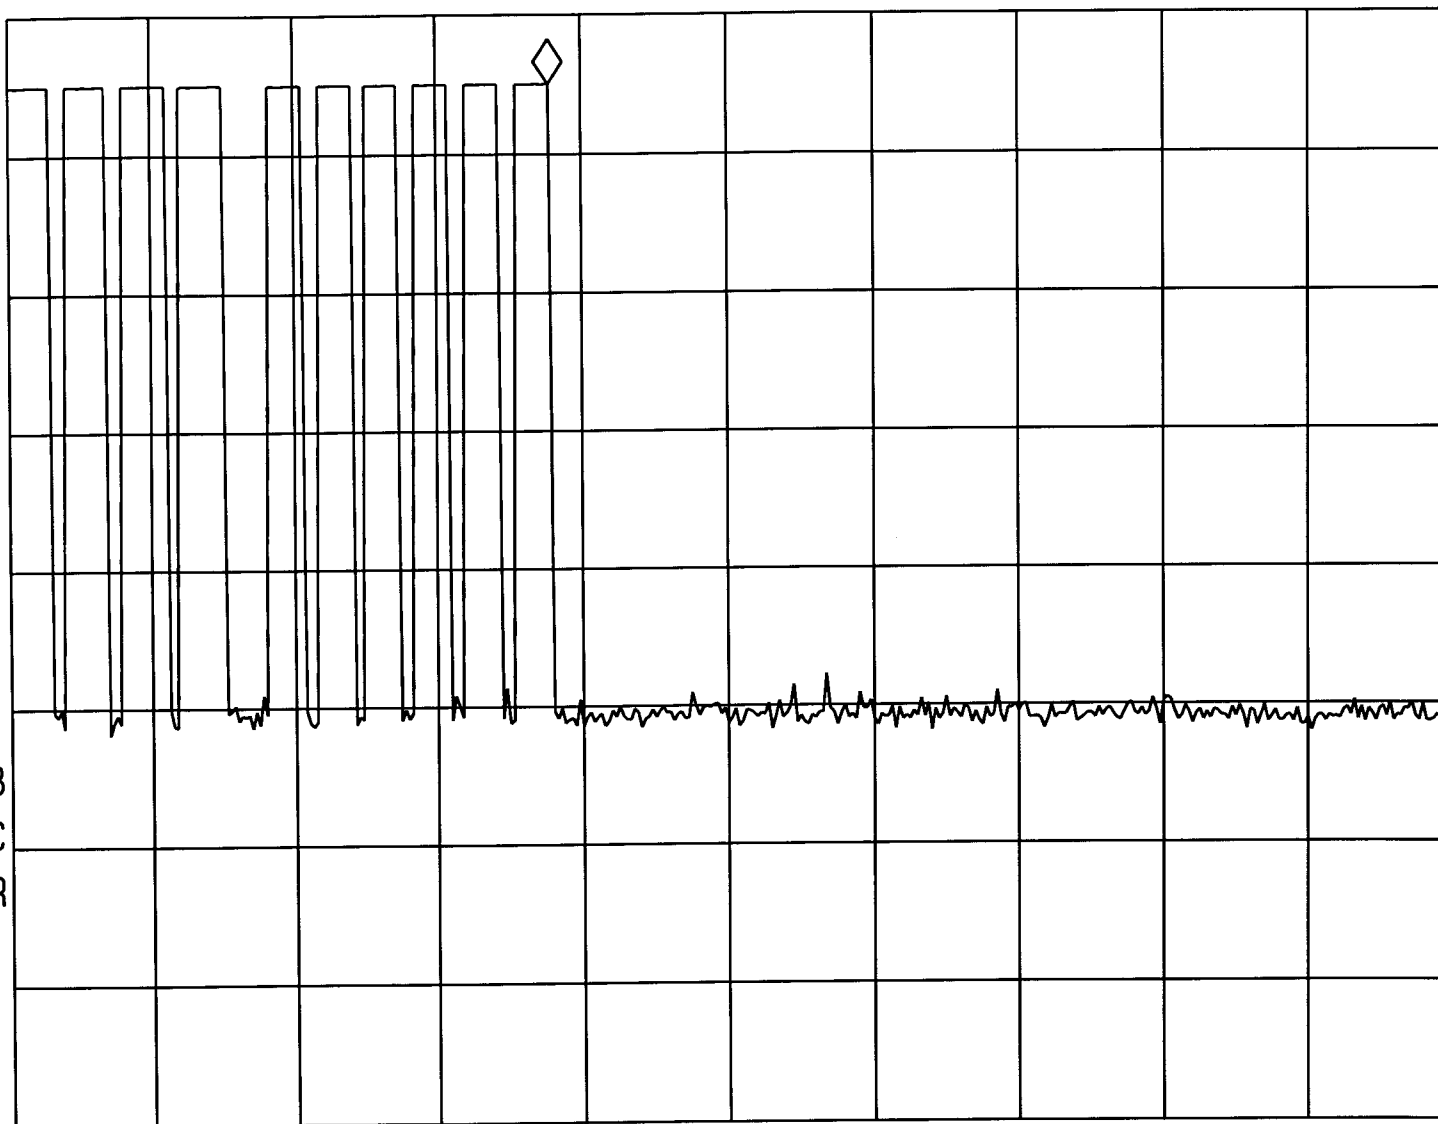

CENTER 390.573 MHz

SPAN 0 Hz

#RES BW 100 kHz

#VBW 100 kHz

#SWP 5.00 sec