

hp

REF -14.0 dBm

AT 10 dB

PEAK

LOG

10

dB/

WA SB

SC VC


CORR

Duty Cycle

$$= (4 \times 2 + 1.4 \times 19 + 0.7 \times 26) / 100$$

$$= 52.8 / 100 = 0.528$$

Average Factor = -5.5 dB

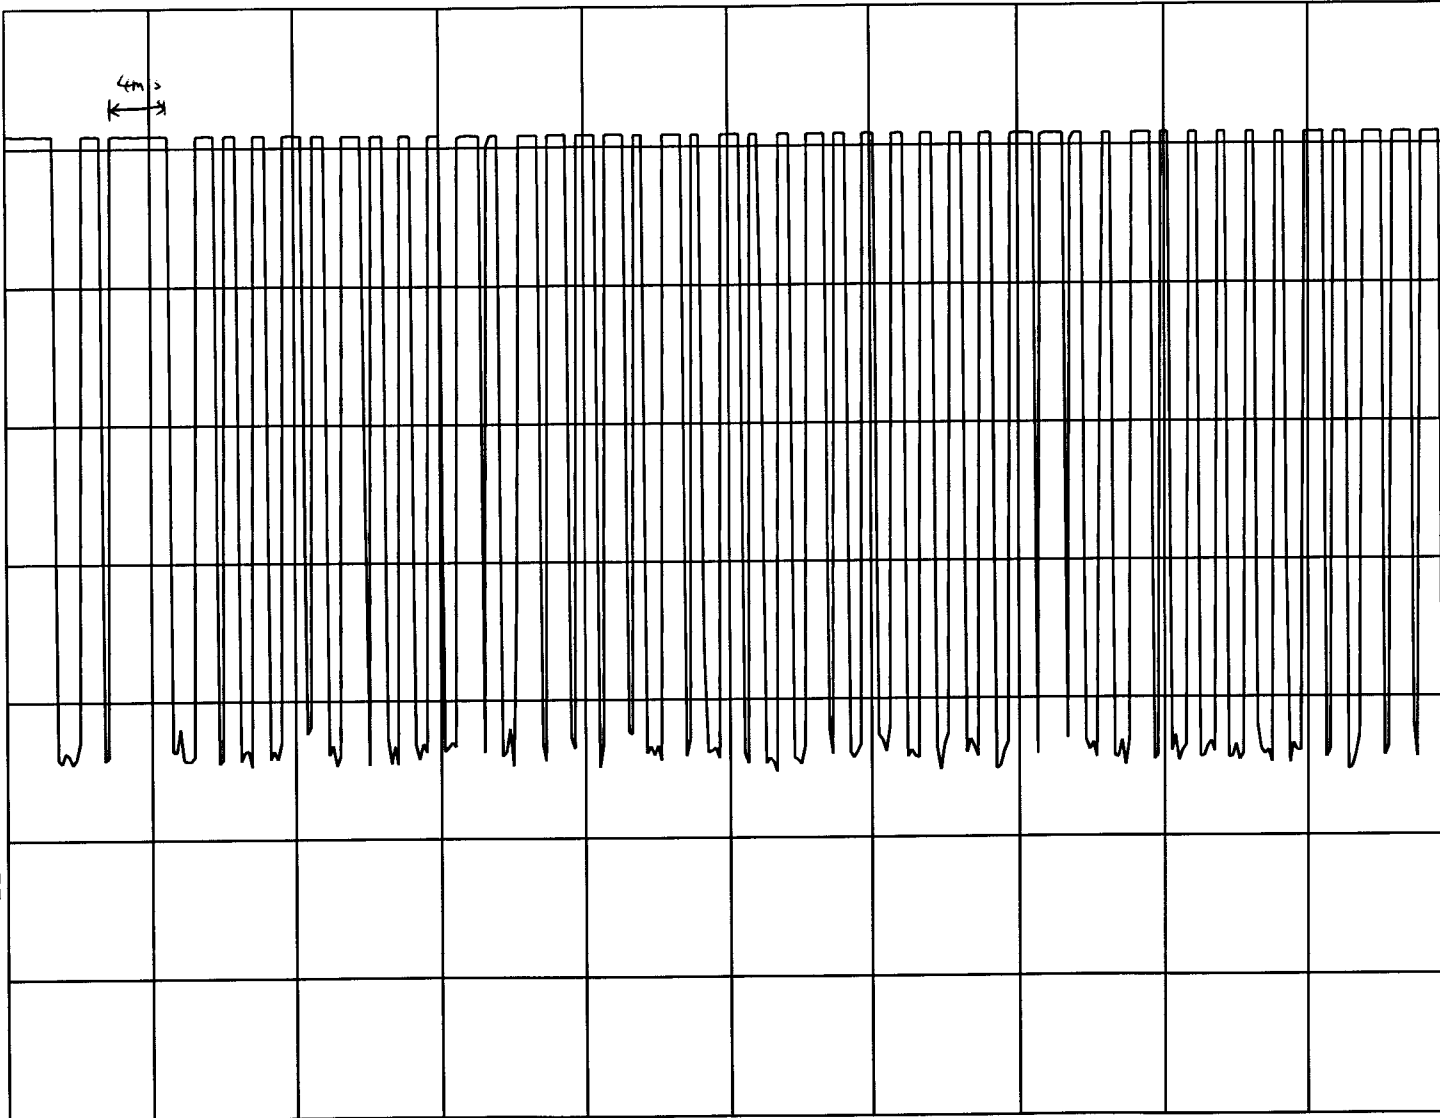

CENTER 433.913 MHz

SPAN 0 Hz

#RES BW 3.0 MHz

#VBW 3 MHz

#SWP 100 msec

hp

REF -14.0 dBm

AT 10 dB

PEAK

LOG


10

dB/

WA SB

SC VC

CORR

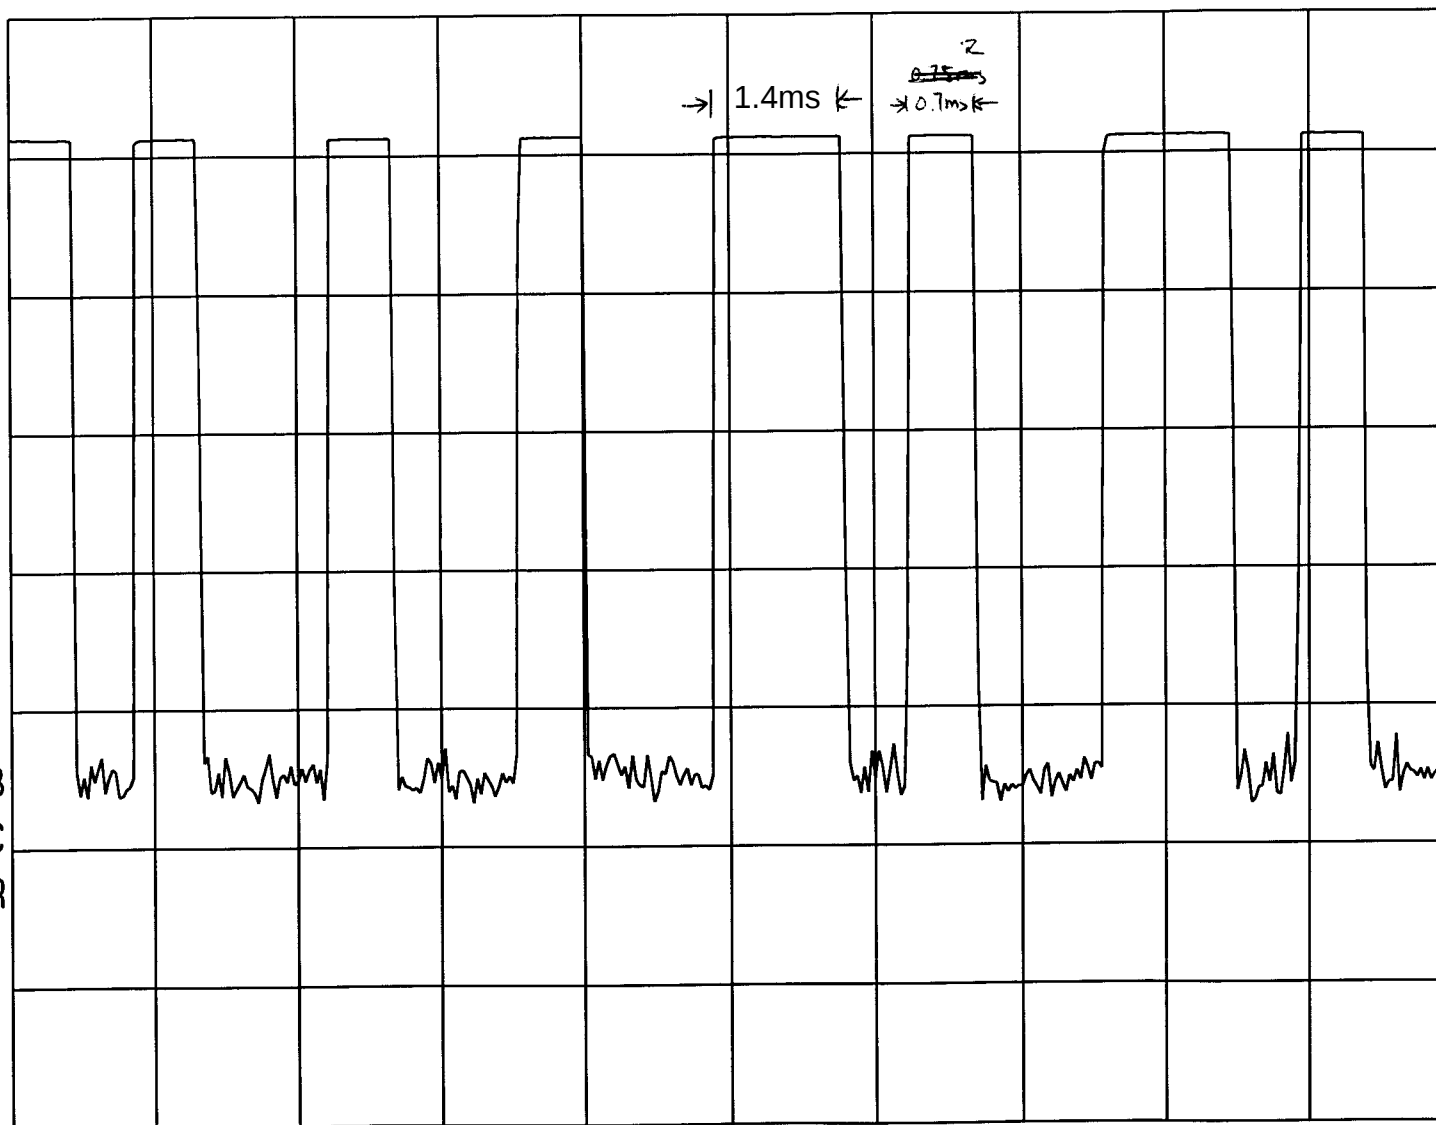

CENTER 433.913 MHz

SPAN 0 Hz

#RES BW 3.0 MHz

#VBW 3 MHz

#SWP 15.0 msec

hp

MKR 206.25 msec

REF -14.0 dBm

AT 10 dB

.03 dB

PEAK

LOG


10

dB/

WA SB

SC VS

CORR

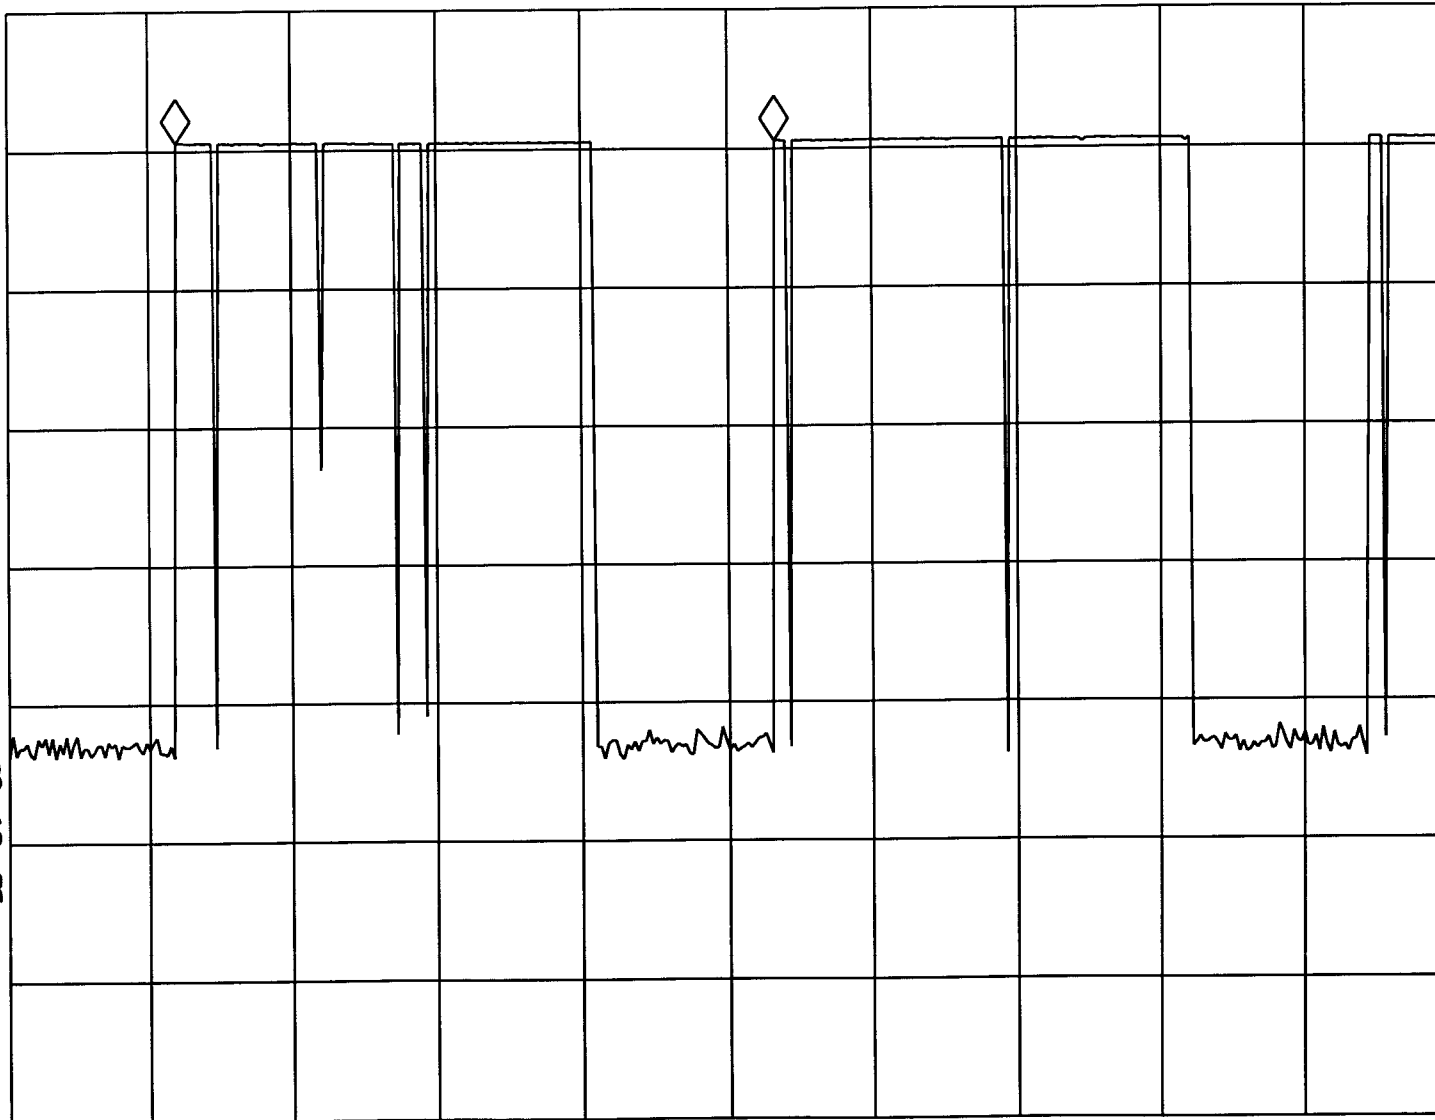

CENTER 433.913 MHz

SPAN 0 Hz

#RES BW 3.0 MHz

#VBW 3 MHz

#SWP 500 msec

typ

MKR 1.4400 sec

REF .0 dBm

AT 10 dB

-25.59 dBm

PEAK

LOG

10

dB/

VA SB

SC VC

CORR



CENTER 433.914 MHz

SPAN 0 Hz

#RES BW 3.0 MHz

#VBW 3 MHz

#SWP 2.00 sec