

**CETECOM™****CETECOM ICT Services**
consulting - testing - certification >>>

TEST REPORT

Test report no.: 1-9728/15-01-03

Deutsche
Akkreditierungsstelle
D-PL-12076-01-00

Testing laboratory

CETECOM ICT Services GmbH

Untertuerkheimer Strasse 6 – 10

66117 Saarbruecken / Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

Internet: <http://www.cetecom.com>e-mail: ict@cetecom.com**Accredited Testing Laboratory:**

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-00

Applicant

Rohde & Schwarz GmbH & Co KG

Mühldorfstr. 15

81671 München / GERMANY

Phone: +49 89 129-1294

Fax: + 49 89 4129 66571

Contact: Thorsten Ansahl

e-mail: thorsten.ansahl@rohde-schwarz.com

Phone: + 49 89 4129 16571

Manufacturer

Rohde & Schwarz GmbH & Co KG

Mühldorfstr. 15

81671 München / GERMANY

Test standard/s

47 CFR Part 15

Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

RSS - 247 Issue 1

Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence - Exempt Local Area Network (LE-LAN) Devices

RSS - Gen Issue 4

Spectrum Management and Telecommunications Radio Standards Specifications - General Requirements and Information for the Certification of Radio Apparatus

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item: Portable Measurement Device**Model name:** RTH1004**FCC ID:** KVVW-RTH13175000**IC:** 4431C-RTH13175000

Frequency: 2400 MHz to 2483.5 MHz band

Technology tested: WLAN


Antenna: Integrated PCB antennas

Power supply: 11.25 V by Lithium Ion battery RRC2040-2

Temperature range: +23°C

This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorised:

Jörg Warken
Lab Manager
Radio Communications & EMC

Test performed:

Stefan BöS
Lab Manager
Radio Communications & EMC

1 Table of contents

1	Table of contents	2
2	General information	3
2.1	Notes and disclaimer	3
2.2	Application details	3
3	Test standard/s	3
3.1	Measurement guidance	4
4	Test environment	5
5	Test item	5
5.1	Additional information	5
6	Test laboratories sub-contracted	5
7	Description of the test setup	6
7.1	Shielded semi anechoic chamber	7
7.2	Shielded fully anechoic chamber	8
7.3	Radiated measurements > 12.75 GHz	9
7.4	AC conducted	10
8	Measurement uncertainty	11
9	Sequence of testing	12
9.1	Sequence of testing 9 kHz to 30 MHz	12
9.2	Sequence of testing 30 MHz to 1 GHz	13
9.3	Sequence of testing 1 GHz to 12.75 GHz	14
9.4	Sequence of testing above 12.75 GHz	15
10	Summary of measurement results	16
11	Additional comments	17
12	Measurement results	18
12.1	Antenna gain	18
12.2	Identify worst case data rate	19
12.3	Maximum output power	20
12.4	Band edge compliance radiated	22
12.5	Spurious emissions radiated below 30 MHz	29
12.6	Spurious emissions radiated 30 MHz to 1 GHz	34
12.7	Spurious emissions radiated above 1 GHz	37
12.8	Spurious emissions conducted below 30 MHz (AC conducted)	43
Annex A	Document history	46
Annex B	Further information	46
Annex C	Accreditation Certificate	47

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

The testing service provided by CETECOM ICT Services GmbH has been rendered under the current "General Terms and Conditions for CETECOM ICT Services GmbH".

CETECOM ICT Services GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM ICT Services GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM ICT Services GmbH test report include or imply any product or service warranties from CETECOM ICT Services GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM ICT Services GmbH.

All rights and remedies regarding vendor's products and services for which CETECOM ICT Services GmbH has prepared this test report shall be provided by the party offering such products or services and not by CETECOM ICT Services GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

2.2 Application details

Date of receipt of order:	2015-05-29
Date of receipt of test item:	2015-06-22
Start of test:	2015-06-22
End of test:	2015-06-23
Person(s) present during the test:	-/-

3 Test standard/s

Test standard	Date	Test standard description
47 CFR Part 15	2013-10-01	Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices
RSS - 247 Issue 1	May 2015	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence - Exempt Local Area Network (LE-LAN) Devices
RSS - Gen Issue 4	November 2014	Spectrum Management and Telecommunications Radio Standards Specifications - General Requirements and Information for the Certification of Radio Apparatus

3.1 Measurement guidance

DTS : KDB 558074	2014-06	Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247
ANSI C63.4-2014	-/-	American national standard for methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz
ANSI C63.10-2013	-/-	American national standard of procedures for compliance testing of unlicensed wireless devices

4 Test environment

Temperature:	T_{nom}	+22 °C during room temperature tests
	T_{max}	No tests under extreme conditions
	T_{min}	No tests under extreme conditions
Relative humidity content:		53 %
Barometric pressure:		not relevant for this kind of testing
Power supply:	V_{nom}	11.25 V by Lithium Ion battery RRC2040-2
	V_{max}	No tests under extreme conditions
	V_{min}	No tests under extreme conditions

5 Test item

Kind of test item	:	Portable Measurement Device
Type identification	:	RTH1004
HMN	:	-/-
PMN	:	RTH
HVIN	:	1317.5000
FVIN	:	-/-
S/N serial number	:	radiated: 900045 conducted: 900047
HW hardware status	:	1317.5000.04 (SN: 900045, MB: 1317.5445.02 TAZ: 07.01 SN: 101118)
SW software status	:	Phy firmware version: 8.2.0.0.224 Firmware: 8.9.0.0.31
Frequency band	:	2400 MHz to 2483.5 MHz band
Type of radio transmission	:	FHSS, OFDM
Use of frequency spectrum	:	
Type of modulation	:	BPSK, QPSK, 16QAM, 64QAM,
Number of channels	:	11
Antenna	:	Integrated PCB antennas
Power supply	:	11.25 V by Lithium Ion battery RRC2040-2
Temperature range	:	+23 °C

5.1 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup- and EUT-photos are included in test report: 1-9728/15-01-01_AnnexA
1-9728/15-01-01_AnnexB
1-9728/15-01-01_AnnexD

6 Test laboratories sub-contracted

None

7 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signalling equipment as well as measuring receivers and analysers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).


In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

Agenda: Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
v/k!	Attention: extended calibration interval		
NK!	Attention: not calibrated	*)	next calibration ordered / currently in progress

7.1 Shielded semi anechoic chamber

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are confirmed with specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.

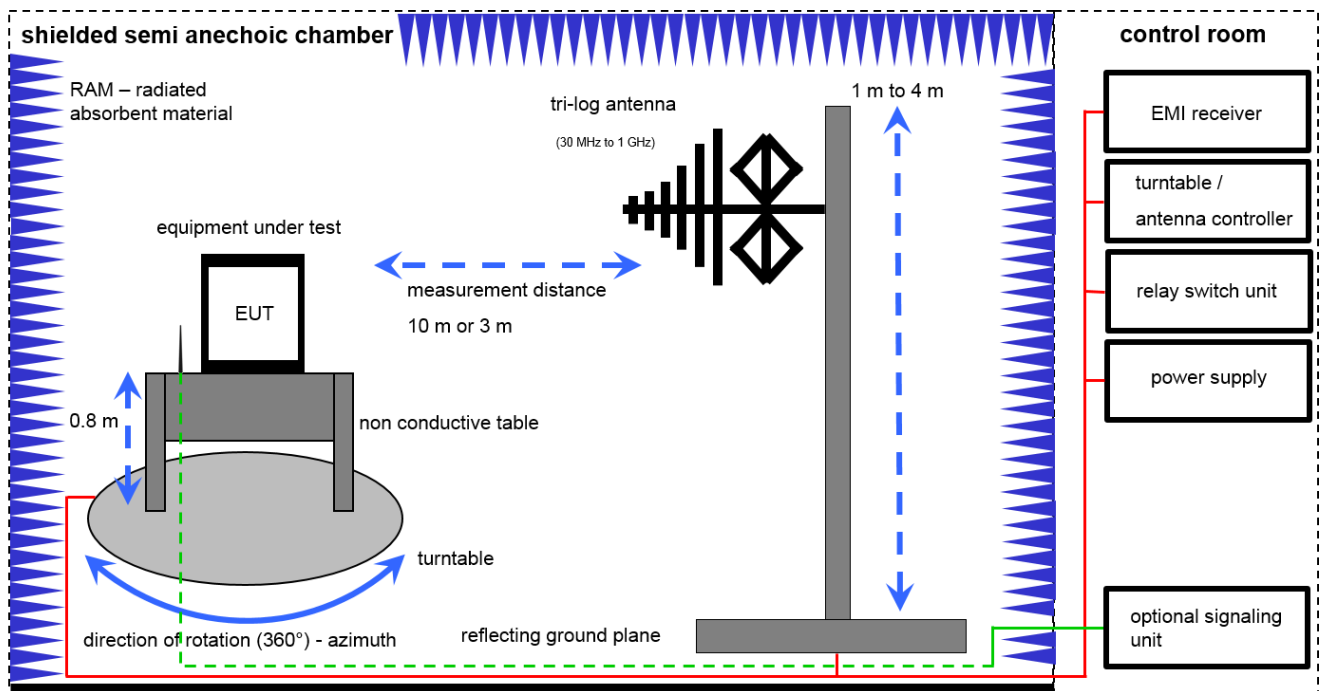

$$SS = U_R + CL + AF$$

(SS-signal strength; U_R -voltage at the receiver; CL-loss of the cable; AF-antenna factor)


Example calculation:

$$SS \text{ [dB}\mu\text{V/m]} = 12.35 \text{ [dB}\mu\text{V/m]} + 1.90 \text{ [dB]} + 16.80 \text{ [dB}\mu\text{V/m]} = 31.05 \text{ [dB}\mu\text{V/m]} \text{ (35.69 } \mu\text{V/m)}$$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufact.	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	45	Switch-Unit	3488A	HP	2719A14505	300000368	ne		
2	45	EMI Test Receiver	ESCI 3	R&S	100083	300003312	k	26.01.2015	26.01.2016
3	45	Antenna Tower	Model 2175	ETS-Lindgren	64762	300003745	izw		
4	45	Positioning Controller	Model 2090	ETS-Lindgren	64672	300003746	izw		
5	45	Turntable Interface-Box	Model 105637	ETS-Lindgren	44583	300003747	izw		
6	45	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	295	300003787	k	22.04.2014	22.04.2016

7.2 Shielded fully anechoic chamber

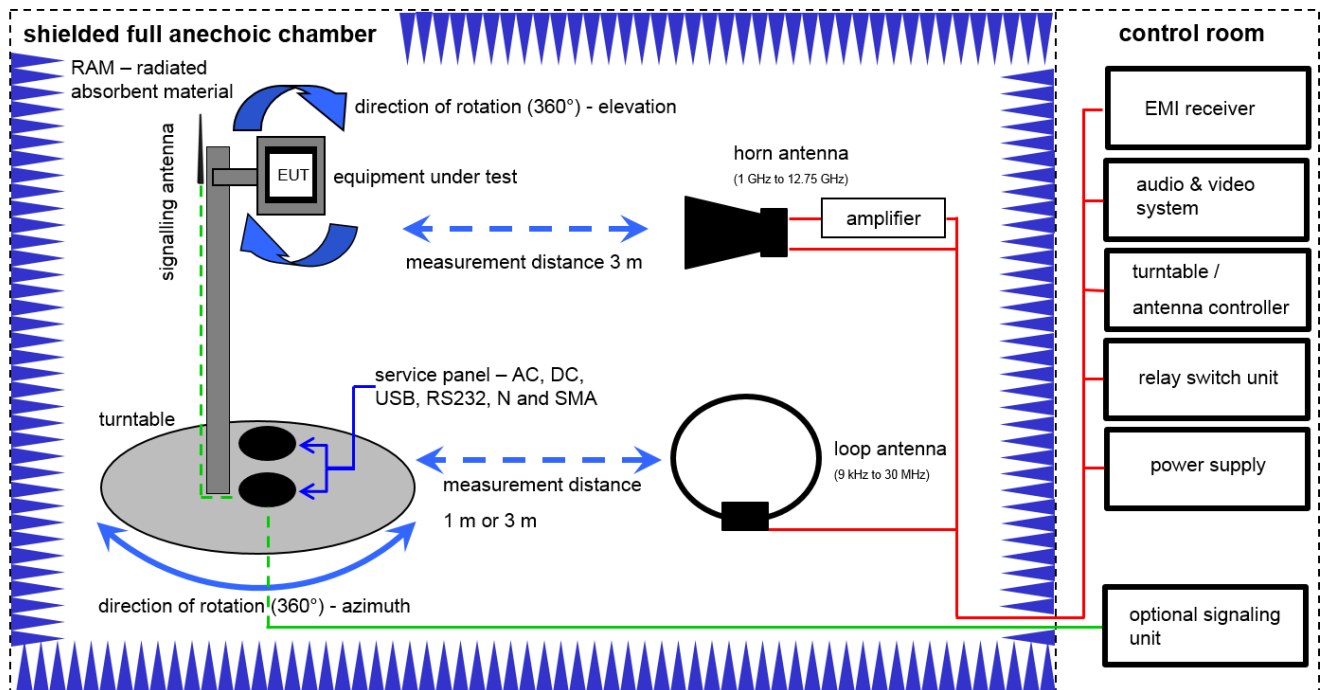

Field strength measurements:

$$SS = U_R + CA + AF$$

(SS-signal strength; U_R -voltage at the receiver; CA-loss of the signal path; AF-antenna factor)

Example calculation:

$$SS \text{ [dB}\mu\text{V/m]} = 40.0 \text{ [dB}\mu\text{V/m]} + (-35.8) \text{ [dB]} + 32.9 \text{ [dB}\mu\text{V/m]} = 37.1 \text{ [dB}\mu\text{V/m]} (71.61 \mu\text{V/m})$$

Substitution measurements:

$$SP = P_R + CA$$

(SP-signal power; P_R -Power at the receiver; CA-loss of the signal path)


Example calculation:

$$SP \text{ [dBm]} = -40.0 \text{ [dB}\mu\text{V/m]} + (4.6) \text{ [dB]} = -35.4 \text{ [dBm]} (2.9 \mu\text{W})$$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufact.	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	n. a.	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3088	300001032	vIKII	20.05.2015	20.05.2017
2	n. a.	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996	ev		
3	n. a.	Switch / Control Unit	3488A	HP	*	300000199	ne		
4	90	Active Loop Antenna 10 kHz to 30 MHz	6502	Kontron Psychotech	8905-2342	300000256	k	13.06.2015	13.06.2017
5	90	Band Reject filter	WRCG2400/2483-2375/2505-50/10SS	Wainwright	11	300003351	ev		
6	90	Highpass Filter	WHKX7.0/18G-8SS	Wainwright	18	300003789	ne		
7	90	MXE EMI Receiver 20 Hz to 26,5 GHz	N9038A	Agilent Technologies	MY51210197	300004405	k	06.03.2015	06.03.2016
8	90	4U RF Switch Platform	L4491A	Agilent Technologies	MY50000037	300004509	ne		

7.3 Radiated measurements > 12.75 GHz

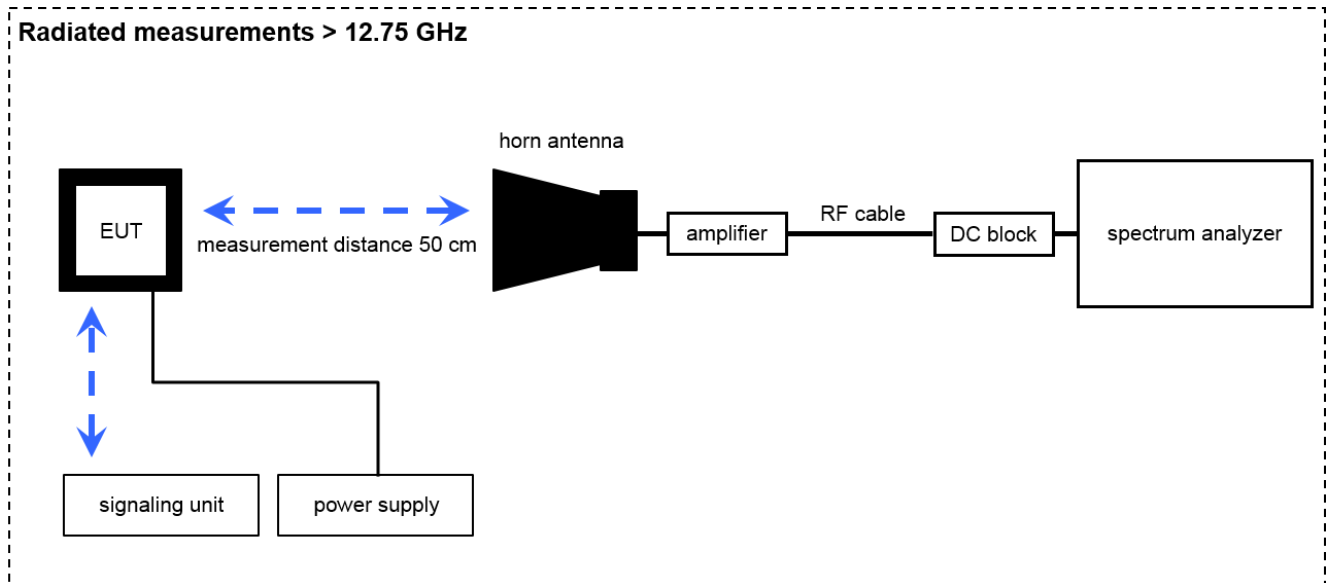

Field strength measurements:

$$SS = U_R + CA + AF$$


(SS-signal strength; U_R -voltage at the receiver; CA-loss of the signal path; AF-antenna factor)

Example calculation:

$$SS \text{ [dB}\mu\text{V/m]} = 40.0 \text{ [dB}\mu\text{V/m]} + (-35.8) \text{ [dB]} + 32.9 \text{ [dB}\mu\text{V/m]} = 37.1 \text{ [dB}\mu\text{V/m]} \text{ (71.61 } \mu\text{V/m)}$$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufact.	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	A026	Std. Gain Horn Antenna 12.4 to 18.0 GHz	639	Narda	8402	300000787	k	22.07.2015	22.07.2017
2	A029	Std. Gain Horn Antenna 18.0 to 26.5 GHz	638	Narda	8205	300002442	k	19.07.2015	19.07.2017
3	A029	Signal Analyzer 40 GHz	FSV40	R&S	101042	300004517	k	22.01.2015	22.01.2016
4	A029	Amplifier 2-40 GHz	JS32-02004000-57-5P	MITEQ	1777200	300004541	ev		

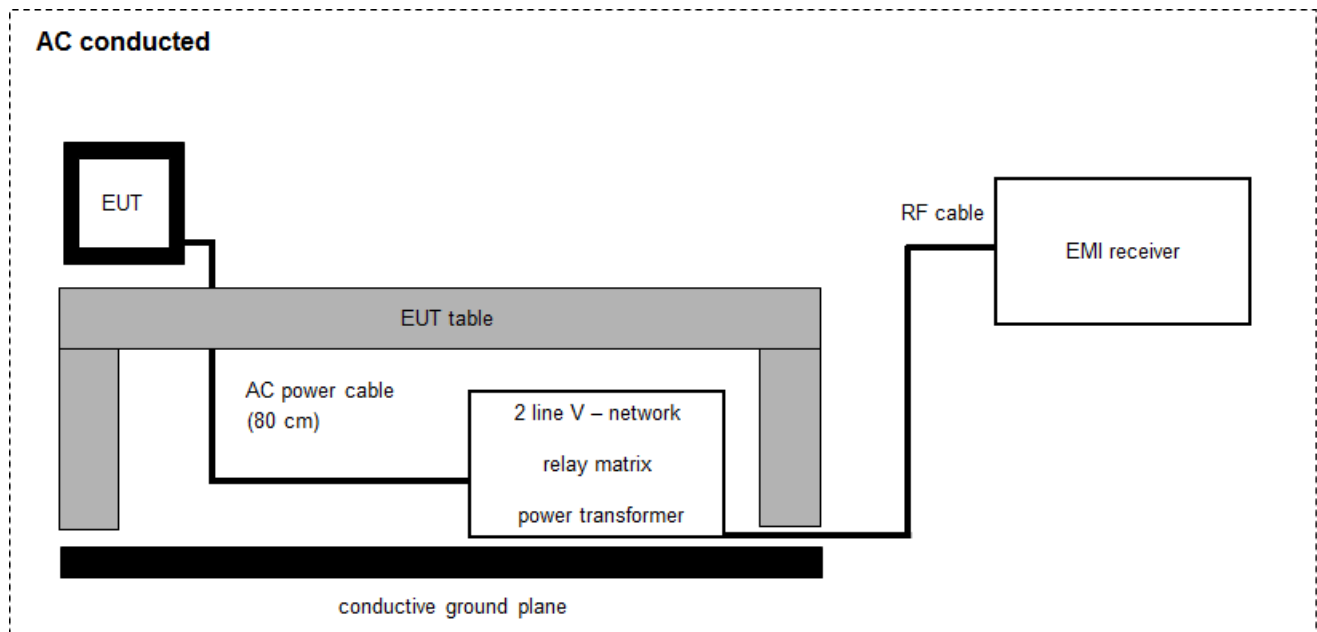7.4 AC conducted

$$FS = UR + CF + VC$$

(FS-field strength; UR-voltage at the receiver; CR-loss of the cable and filter; VC-correction factor of the ISN)

Example calculation:

$$FS [dB\mu V/m] = 37.62 [dB\mu V/m] + 9.90 [dB] + 0.23 [dB] = 47.75 [dB\mu V/m] (244.06 \mu V/m)$$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	A	Netznachbildung	ESH3-Z5	R&S	892475/017	300002209	k	17.06.2014	17.06.2016
2	A	EMI-Receiver	8542E	HP	3617A00170	300000568	k	28.01.2015	28.01.2016
3	A	Analyzer-Reference-System (Harmonics and Flicker)	ARS 16/1	SPS	A3509 07/0 0205	300003314	Ve	11.02.2014	11.02.2016

8 Measurement uncertainty

Measurement uncertainty	
Test case	Uncertainty
Maximum output power	± 1 dB
Band edge compliance radiated	± 3 dB
Spurious emissions conducted	± 3 dB
Spurious emissions radiated below 30 MHz	± 3 dB
Spurious emissions radiated 30 MHz to 1 GHz	± 3 dB
Spurious emissions radiated above 1 GHz	± 3.7 dB
Spurious emissions conducted below 30 MHz (AC conducted)	± 2.6 dB

9 Sequence of testing

9.1 Sequence of testing 9 kHz to 30 MHz

Setup

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter (see ANSI C 63.4) – see each test details
- The EUT was set into operation.

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1.5 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK (QPK / see ANSI C 63.4) detector
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

9.2 Sequence of testing 30 MHz to 1 GHz

Setup

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 10 or 3 meter (see ANSI C 63.4) – see each test details
- The EUT was set into operation.
-

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions
-

Final measurement

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP (Quasi-Peak / see ANSI C 63.4) detector with an EMI receiver
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

9.3 Sequence of testing 1 GHz to 12.75 GHz

Setup

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter (see ANSI C 63.4) – see each test details
- The EUT was set into operation.

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height is 1.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement

- The final measurement will be performed with minimum the six highest peaks according the requirements of the ANSI C63.4.
- According to the maximum found antenna polarisation and turntable position of the premeasurement the software maximizes the peaks by rotating the turntable position (0° to 360°). This measurement is repeated for different EUT-table positions (0° to 150° in 30°-steps). This procedure is repeated for both antenna polarisations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and RMS (RMS / see ANSI C 63.4) detector
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

9.4 Sequence of testing above 12.75 GHz

Setup

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 0.5 meter
- The EUT was set into operation.

Premeasurement

- The antenna is moved spherical over the EUT in different polarisations of the antenna.

Final measurement

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and RMS (RMS / see ANSI C 63.4) detector
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

10 Summary of measurement results

☐	No deviations from the technical specifications were ascertained
☐	There were deviations from the technical specifications ascertained
☒	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15 RSS - 247, Issue 1	See table!	2015-09-24	Only radiated tests performed

Test specification clause	Test case	Guideline	Temperature conditions	Power source voltages	Mode	C	NC	NA	NP	Remark
§15.247(b)(4) RSS - 247 / 5.4 (4)	System gain	-/-	Nominal	Nominal	DSSS	☒	☐	☐	☐	
§15.247(e) RSS - 247 / 5.2 (2)	Power spectral density	KDB 558074 DTS clause: 10.6	Nominal	Nominal	DSSS OFDM	☐	☐	☐	☒	*)
§15.247(a)(2) RSS - 247 / 5.2 (1)	DTS bandwidth – 6 dB bandwidth	KDB 558074 DTS clause: 8.1	Nominal	Nominal	DSSS OFDM	☐	☐	☐	☒	*)
RSS Gen clause 4.6.1	Occupied bandwidth	-/-	Nominal	Nominal	DSSS OFDM	☐	☐	☐	☒	*)
§15.247(b)(3) RSS - 247 / 5.4 (4)	Maximum output power	KDB 558074 DTS clause: 9.2.2.5	Nominal	Nominal	DSSS OFDM	☒	☐	☐	☐	
§15.247(d) RSS - 247 / 5.5	Detailed spurious emissions @ the band edge - conducted	-/-	Nominal	Nominal	DSSS OFDM	☐	☐	☐	☒	*)
§15.205 RSS - 247 / 5.5 RSS - Gen	Band edge compliance radiated	KDB 558074 DTS clause: 13.3.2	Nominal	Nominal	DSSS OFDM	☒	☐	☐	☐	
§15.247(d) RSS - 247 / 5.5	TX spurious emissions conducted	KDB 558074 DTS clause: 11.1 & 11.2 11.3	Nominal	Nominal	DSSS OFDM	☐	☐	☐	☒	*)
§15.209(a) RSS-Gen	TX spurious emissions radiated below 30 MHz	-/-	Nominal	Nominal	DSSS OFDM	☒	☐	☐	☐	Only 1 mode tested to show compliance
§15.247(d) RSS - 247 / 5.5 RSS-Gen	TX spurious emissions radiated 30 MHz to 1 GHz	-/-	Nominal	Nominal	DSSS OFDM	☒	☐	☐	☐	Only 1 mode tested to show compliance
§15.247(d) RSS - 247 / 5.5 RSS-Gen	TX spurious emissions radiated above 1 GHz	-/-	Nominal	Nominal	DSSS OFDM	☒	☐	☐	☐	Only 1 mode tested to show compliance
§15.109 RSS-Gen	RX spurious emissions radiated 30 MHz to 1 GHz	-/-	Nominal	Nominal	RX / idle	☒	☐	☐	☐	
§15.109 RSS-Gen	RX spurious emissions radiated above 1 GHz	-/-	Nominal	Nominal	RX / idle	☒	☐	☐	☐	
§15.107(a) §15.207	Conducted emissions < 30 MHz	-/-	Nominal	Nominal	DSSS OFDM	☒	☐	☐	☐	

*) please see results of modul test report FR400971C from Sporton International Inc.

Note: C = Compliant; NC = Not compliant; NA = Not Applicable; NP = Not Performed

11 Additional comments

- Reference documents: Modul test report FR4O0971C from Sporton International Inc. with the FCC-ID Z64-WL18DBMOD
- Special test descriptions: This report only contains radiated measurements. The conducted results are related to the origin module test report FR4O0971C from Sporton International Inc. with the FCC-ID Z64-WL18DBMOD
- Configuration descriptions: None
- Test mode:
- ☐ No test mode available.
Iperf was used to ping another device with the largest support packet size
 - ☒ Special software is used.
EUT is transmitting pseudo random data by itself
- Antennas and transmit operating modes:
- ☐ Operating mode 1 (single antenna)
 - Equipment with 1 antenna,
 - Equipment with 2 diversity antennas operating in switched diversity mode by which at any moment in time only 1 antenna is used,
 - Smart antenna system with 2 or more transmit/receive chains, but operating in a mode where only 1 transmit/receive chain is used)
 - ☒ Operating mode 2 (multiple antennas, no beamforming)
 - Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously but without beamforming.
 - ☐ Operating mode 3 (multiple antennas, with beamforming)
 - Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously with beamforming.
In addition to the antenna assembly gain (G), the beamforming gain (Y) may have to be taken into account when performing the measurements.

12 Measurement results

12.1 Antenna gain

Limits:

FCC	IC
Antenna gain	
6 dBi	

Results: withdrawn from Modul test report FR4O0971C from Sporton International Inc. (Clause 3.2.5)

T _{nom}	V _{nom}	lowest channel 2402 MHz	middle channel 2441 MHz	highest channel 2480 MHz
Gain [dBi] Calculated		3.2	3.2	3.2

12.2 Identify worst case data rate

Measurement:

All modes of the module will be measured with an average power meter or spectrum analyzer to identify the maximum transmission power.

In further tests only the identified worst case modulation scheme or bandwidth will be measured and this mode is used as representative mode for all other modulation schemes.

Additional the band edge compliance test will be performed in the lowest and highest modulation scheme.

Measurement parameters:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	3 MHz
Video bandwidth:	3 MHz
Trace-Mode:	Max hold

Results: (withdrawn from modul report FR4O0971C from Sporton International Inc.)

Modulation	Modulation scheme / bandwidth
DSSS / b – mode	1 Mbit/s
OFDM / g – mode	6 Mbit/s
OFDM / n HT20 – mode	MCS0
OFDM / n HT40 – mode	MCS12

12.3 Maximum output power

Description:

Measurement of the maximum output power conducted and radiated. The measurements are performed using the data rate producing the highest conducted output power.

Measurement:

Measurement parameter	
According to DTS clause: 9.2.2.5	
Detector:	RMS
Sweep time:	Auto
Resolution bandwidth:	1 – 5 % of the OBW
Video bandwidth:	≥3x RBW
Span:	Depends on the signal
Integration bandwidth:	99 % power - bandwidth (OBW)
Trace-Mode:	Max hold (allow trace to fully stabilize)
Measurement function:	Channel power with OBW

Limits:

FCC	IC
Maximum Output Power	
Conducted: 1.0 W – Antenna Gain max. 6 dBi	

Results: (conducted)

	Maximum Output Power [dBm]								
Frequency	2412 MHz			2437 MHz			2462 MHz		
Output power conducted DSSS / b – mode (SISO)	15.87			16.00			15.83		
Output power conducted DSSS / g – mode (SISO)	12.98			15.60			12.50		
Output power conducted DSSS / n HT20 – mode (SISO)	12.82			14.76			12.60		
Output power conducted DSSS / n HT20 – mode (MIMO)	Port 1	10.90	13.87	Port 1	12.10	14.82	Port 1	10.88	14.00
	Port 2	10.81		Port 2	11.15		Port 2	11.10	
Frequency	2422 MHz			2437 MHz			2452 MHz		
Output power conducted DSSS / n HT40 – mode (SISO)	10.86			13.00			10.85		

Results: (radiated)

	Maximum Output Power [dBm]								
Frequency	2412 MHz			2437 MHz			2462 MHz		
Output power conducted *) DSSS / b – mode (SISO)	19.07			19.20			19.03		
Output power conducted *) DSSS / g – mode (SISO)	16.18			18.80			15.70		
Output power conducted *) DSSS / n HT20 – mode (SISO)	16.02			17.96			15.80		
Output power conducted *) DSSS / n HT20 – mode (MIMO)	Port 1	14.10	17.07	Port 1	15.30	18.02	Port 1	14.08	17.20
	Port 2	14.01		Port 2	14.35		Port 2	14.30	
Frequency	2422 MHz			2437 MHz			2452 MHz		
Output power conducted *) DSSS / n HT40 – mode (SISO)	14.06			16.20			14.05		

*) calculated with antenna gain (see clause 12.1)

12.4 Band edge compliance radiated

Description:

Measurement of the radiated band edge compliance. The EUT is turned in the position that results in the maximum level at the band edge. Then a sweep over the corresponding restricted band is performed. The EUT is set to channel 1 for the lower restricted band and to channel 11 for the upper restricted band. The measurement is repeated for all modulations. Measurement distance is 3m.

Measurement:

Measurement parameter for peak measurements	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1 MHz
Video bandwidth:	1 MHz
Span:	See plot!
Trace-Mode:	Max Hold
Test setup:	See sub clause 8.3
Measurement uncertainty	See sub clause 9

Measurement parameter for average measurements	
According to DTS clause: 13.3.2	
Detector:	RMS
Sweep time:	Auto
Resolution bandwidth:	100 kHz
Video bandwidth:	300 kHz
Span:	2 MHz
Trace-Mode:	RMS Average over 101 sweeps

Limits:


FCC	IC
Band Edge Compliance Radiated	
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).	
74 dBµV/m Peak 54 dBµV/m AVG	

Results:


Scenario	Band Edge Compliance Radiated [dB]			
Modulation	DSSS / b – mode	OFDM / g – mode	OFDM / n HT20 – mode	OFDM / n HT40 – mode
Lower band edge	> 20 dB (Peak) > 20 dB (AVG)	> 20 dB (Peak) > 20 dB (AVG)	> 20 dB (Peak) > 20 dB (AVG)	> 20 dB (Peak) > 20 dB (AVG)
Upper band edge	> 20 dB (Peak) > 20 dB (AVG)	> 20 dB (Peak) > 20 dB (AVG)	> 20 dB (Peak) > 20 dB (AVG)	> 20 dB (Peak) > 20 dB (AVG)

Plots: DSSS/ b – mode peak / average

Plot 1: TX mode, lower band edge, vertical & horizontal polarization

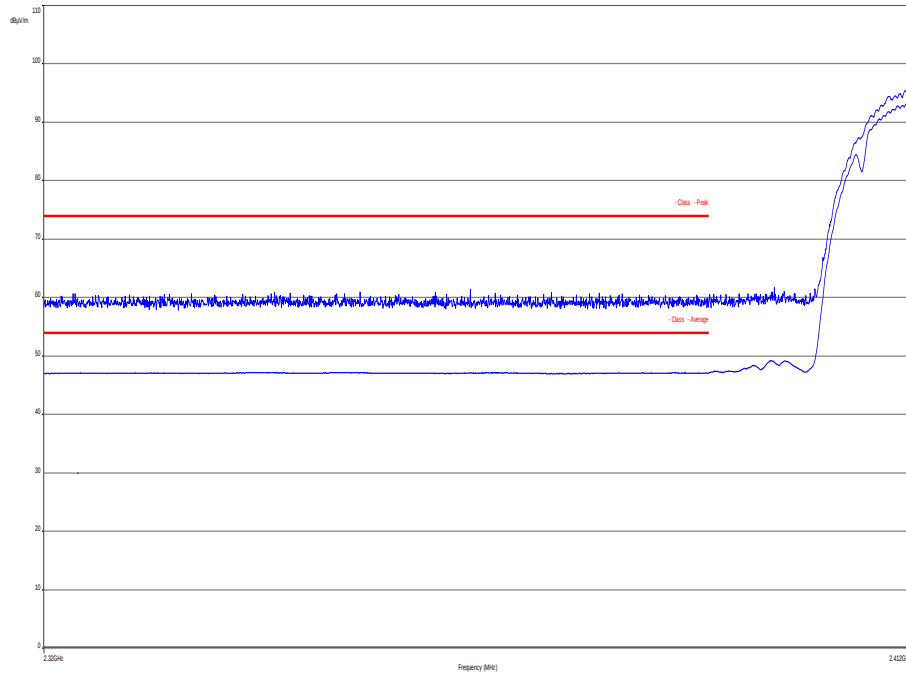


Plot 2: TX mode, upper band edge, vertical & horizontal polarization

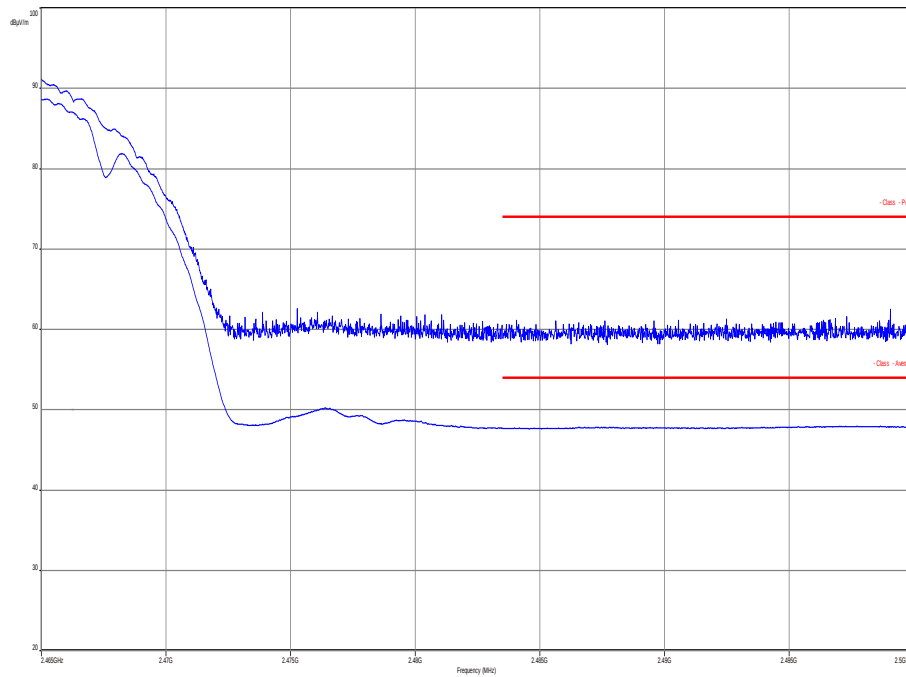


Plots: OFDM / g – mode peak / average

Plot 1: TX mode, lower band edge, vertical & horizontal polarization

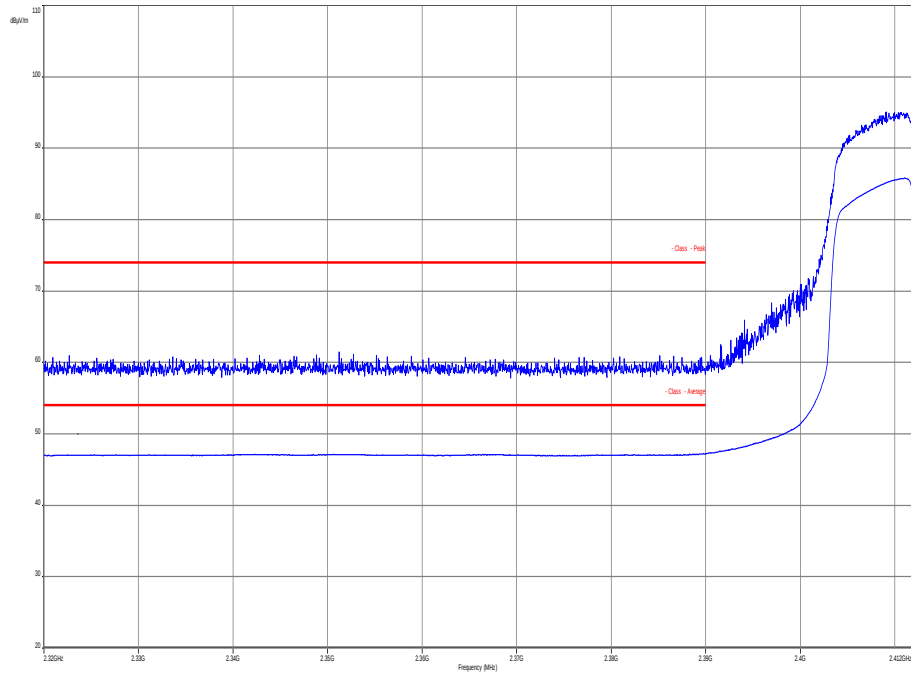


Plot 2: TX mode, upper band edge, vertical & horizontal polarization

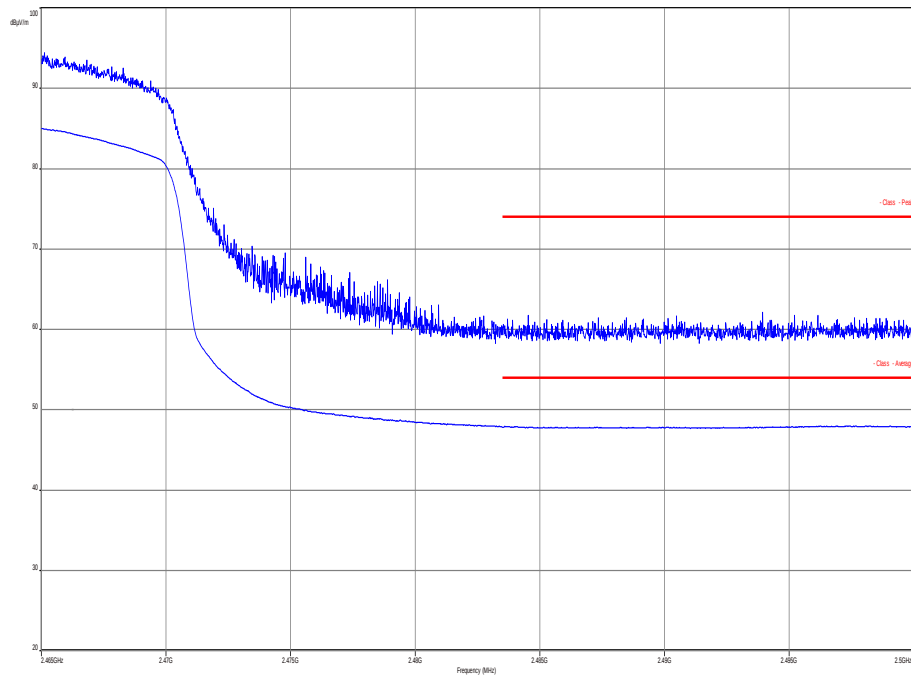


Plots: OFDM / n HT20 (SISO) – mode peak / average

Plot 1: TX mode, lower band edge, vertical & horizontal polarization

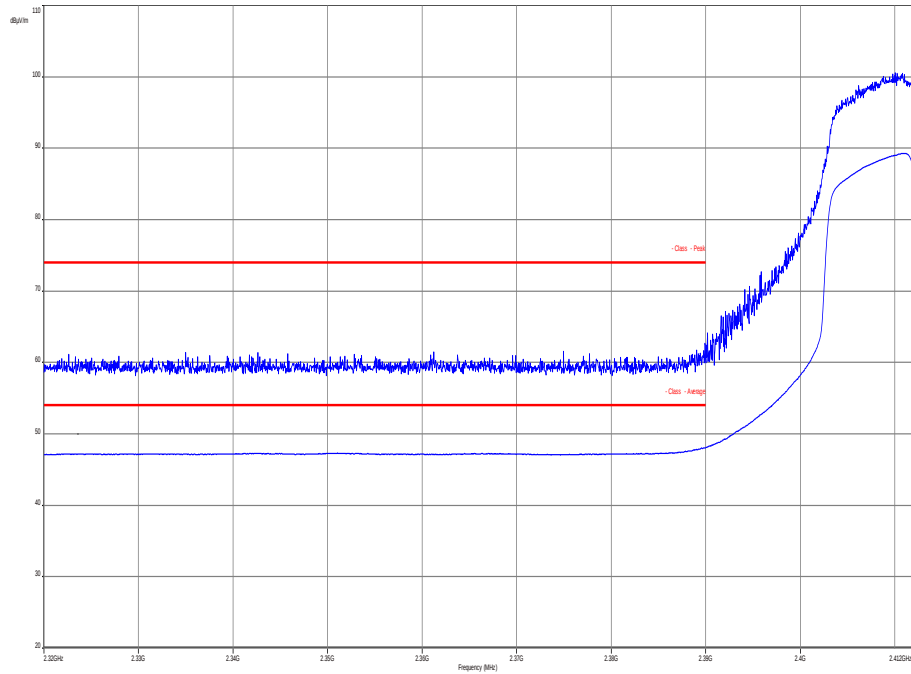


Plot 2: TX mode, upper band edge, vertical & horizontal polarization

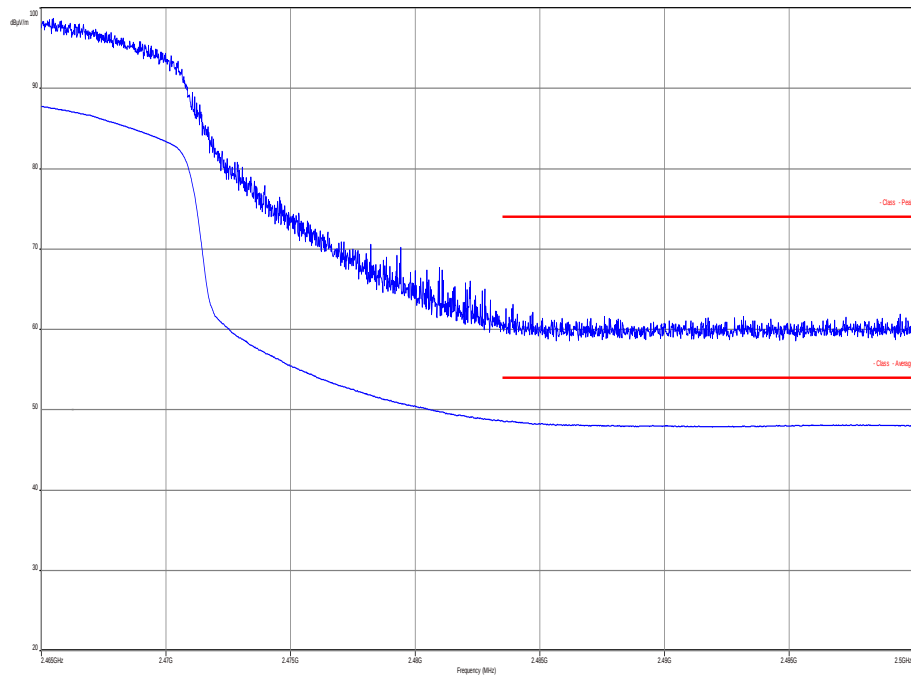


Plots: OFDM / n HT20 (MIMO) – mode peak / average

Plot 1: TX mode, lower band edge, vertical & horizontal polarization

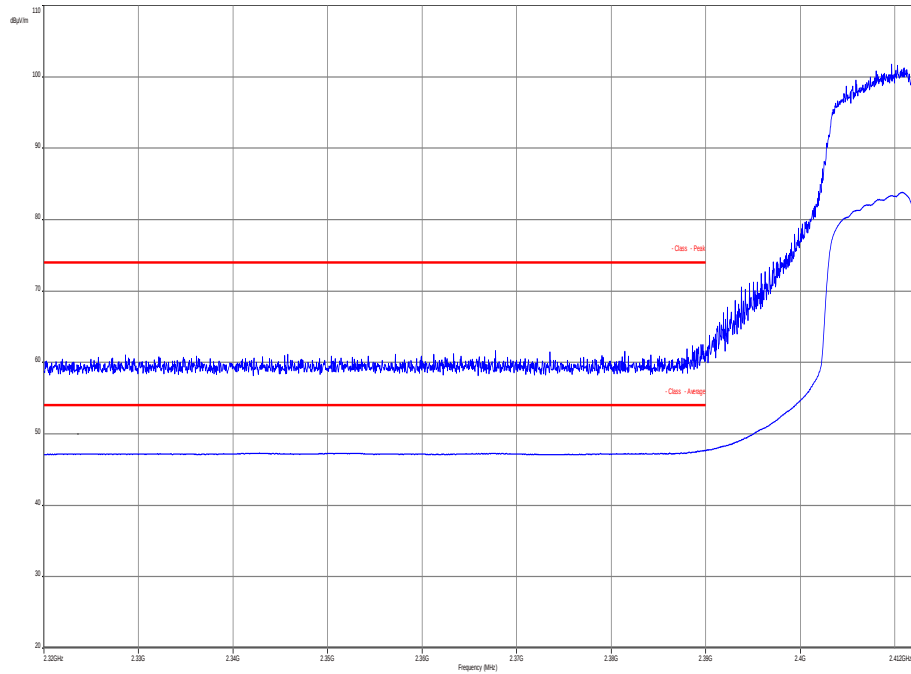


Plot 2: TX mode, upper band edge, vertical & horizontal polarization

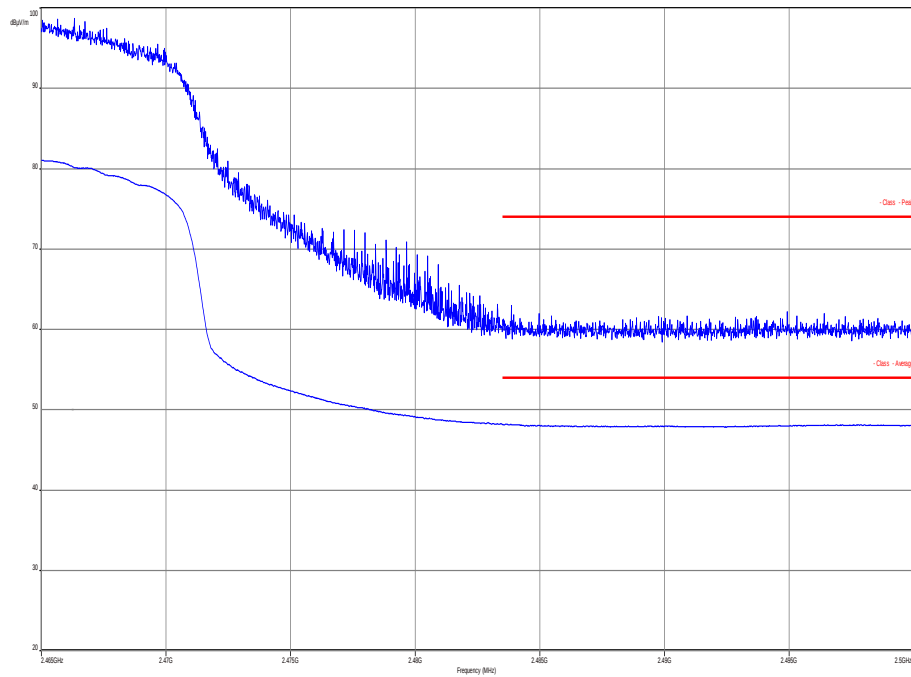


Plots: OFDM / n HT40 – mode peak / average

Plot 1: TX mode, lower band edge, vertical & horizontal polarization

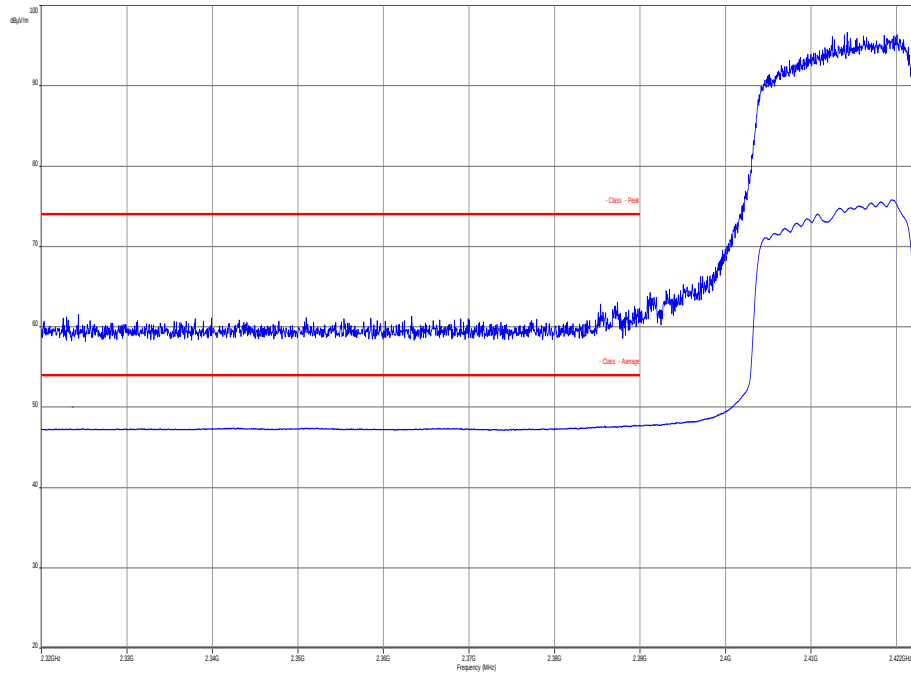

Plot 2: TX mode, upper band edge, vertical & horizontal polarization

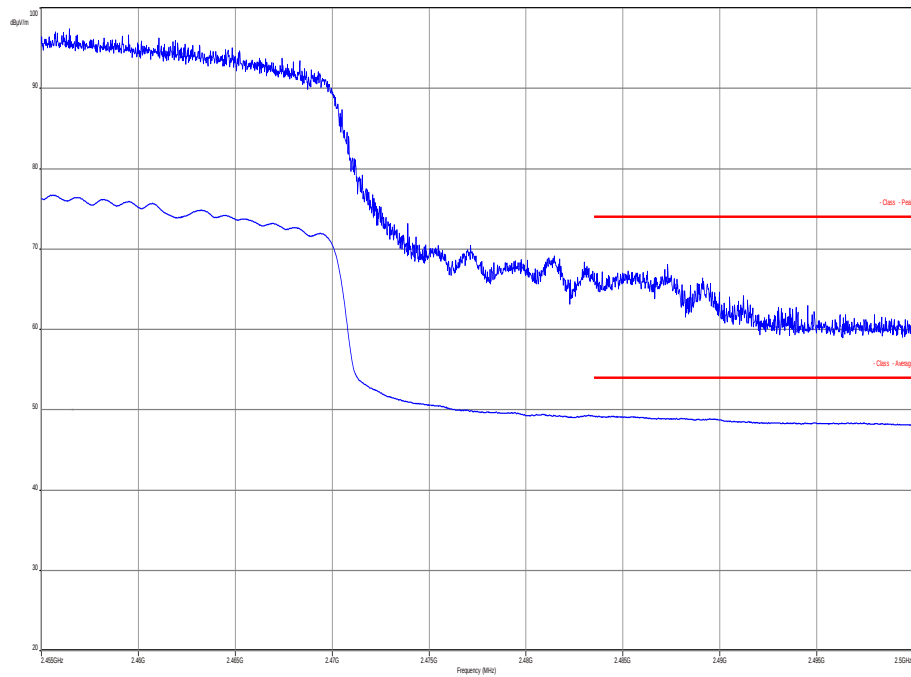

12.5 Spurious emissions radiated below 30 MHz**Description:**

Measurement of the radiated spurious emissions in transmit mode below 30 MHz. The measurement is performed with the data rate producing the highest output power. The limits are recalculated to a measurement distance of 3 m with 40 dB/decade according CFR Part 2.

Measurement:



Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold
Test setup:	See sub clause 8.3
Measurement uncertainty	See sub clause 9

Limits:


FCC		IC
TX Spurious Emissions Radiated < 30 MHz		
Frequency (MHz)	Field Strength (dBμV/m)	Measurement distance
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30



Results:

TX Spurious Emissions Radiated < 30 MHz [dBμV/m]		
F [MHz]	Detector	Level [dBμV/m]
All detected peaks are more than 20 dB below the limit.		

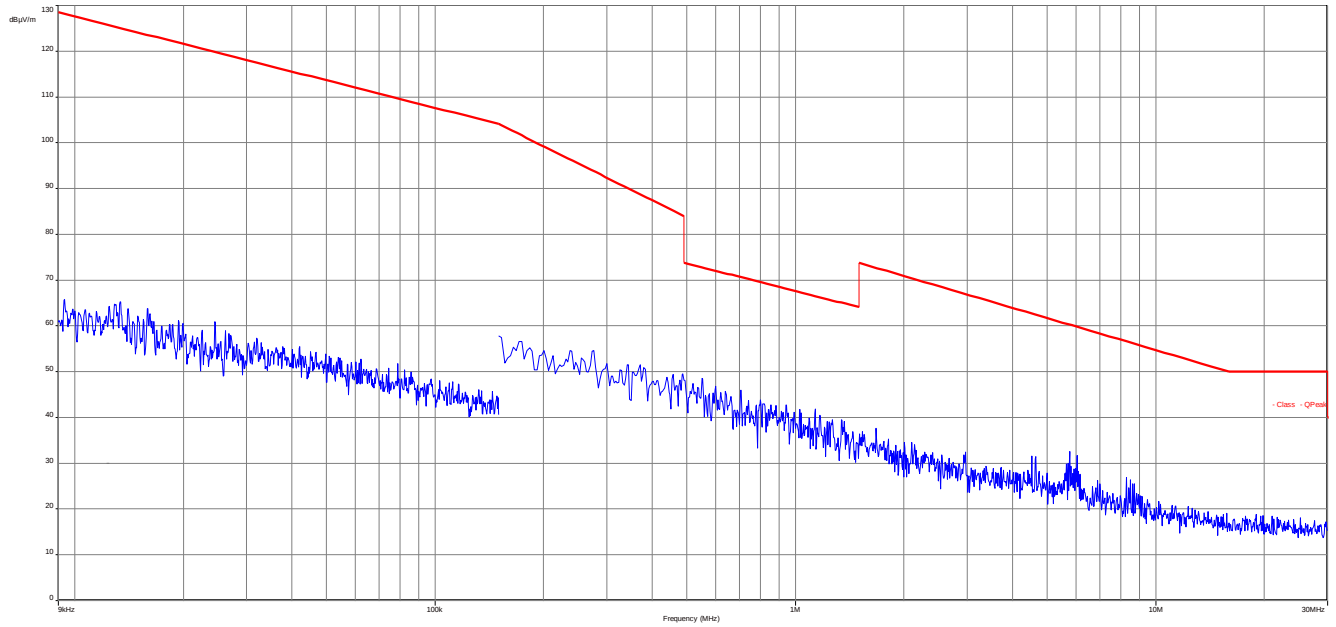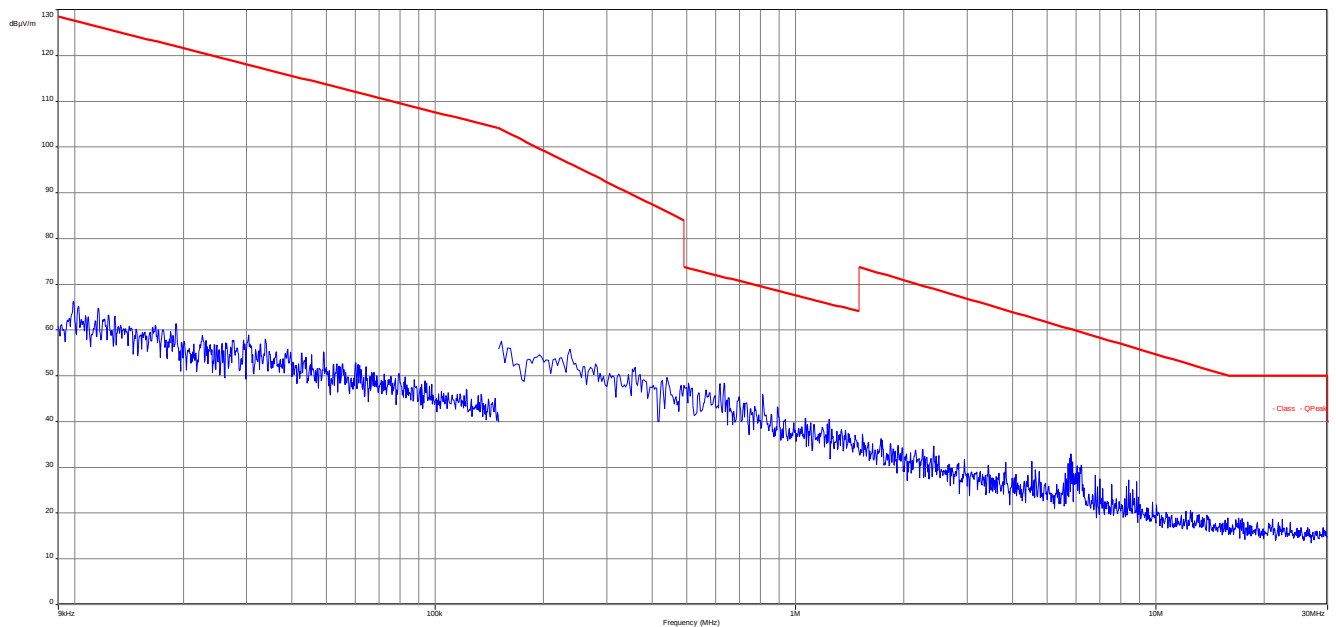
Plots: DSSS**Plot 1: 9 kHz to 30 MHz, low channel****Plot 2: 9 kHz to 30 MHz, mid channel**

Plot 3: 9 kHz to 30 MHz, high channel

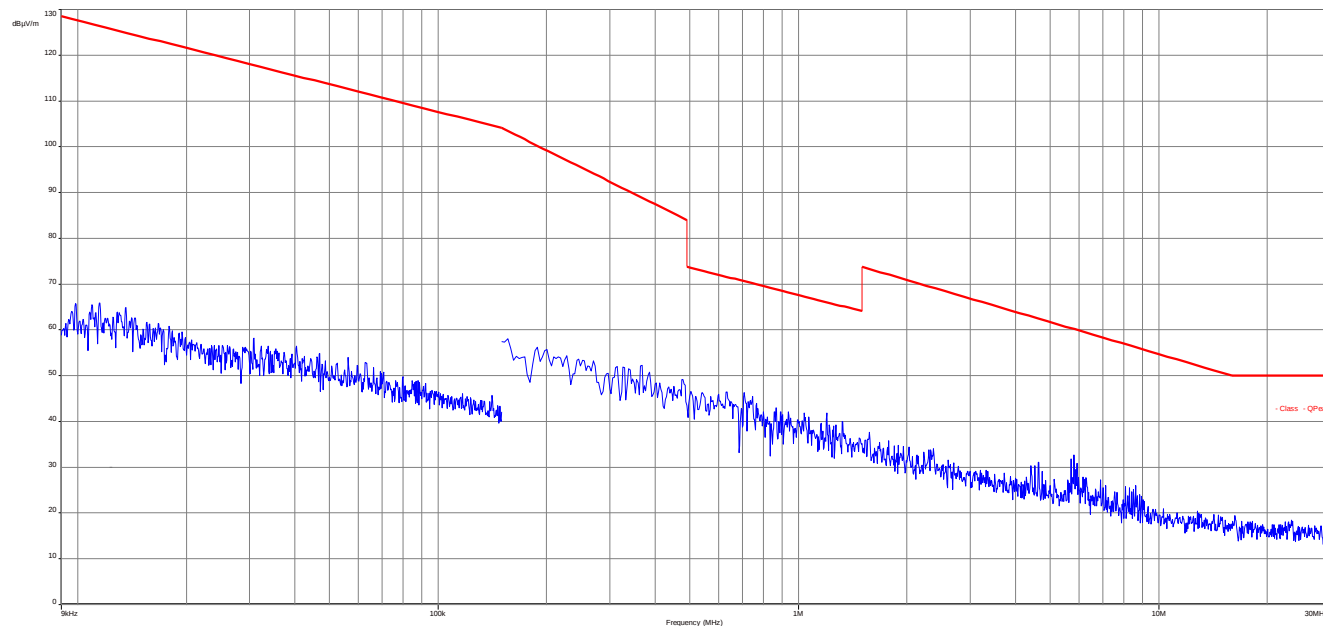

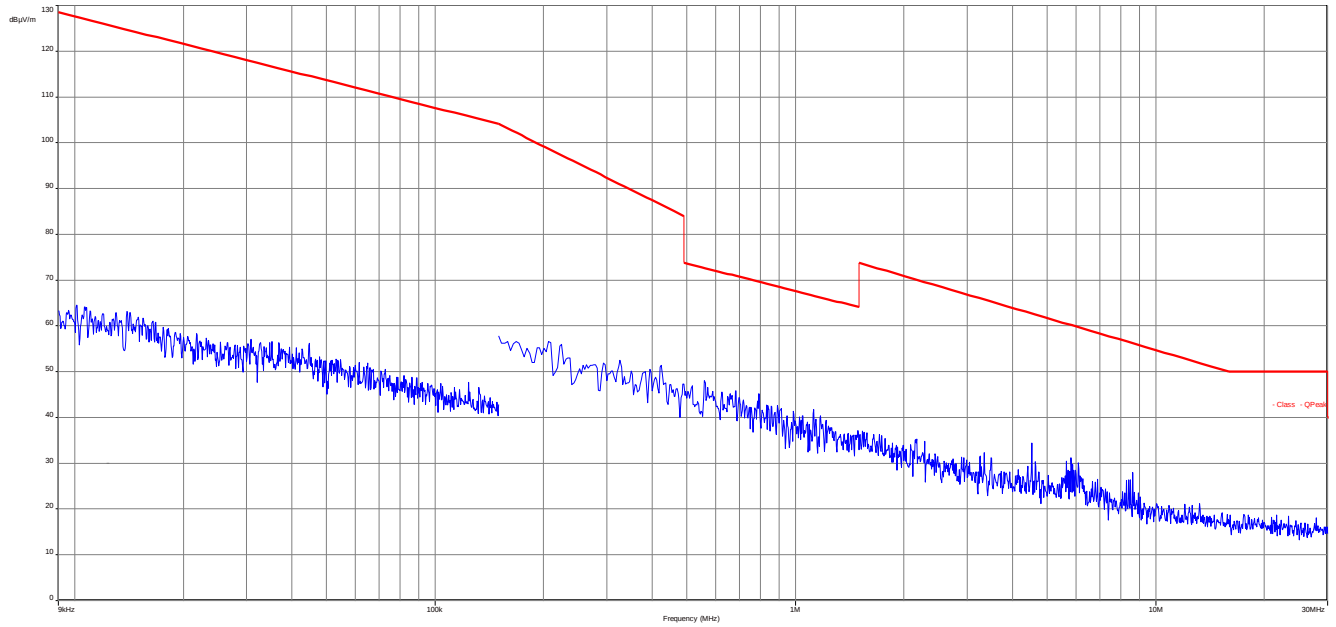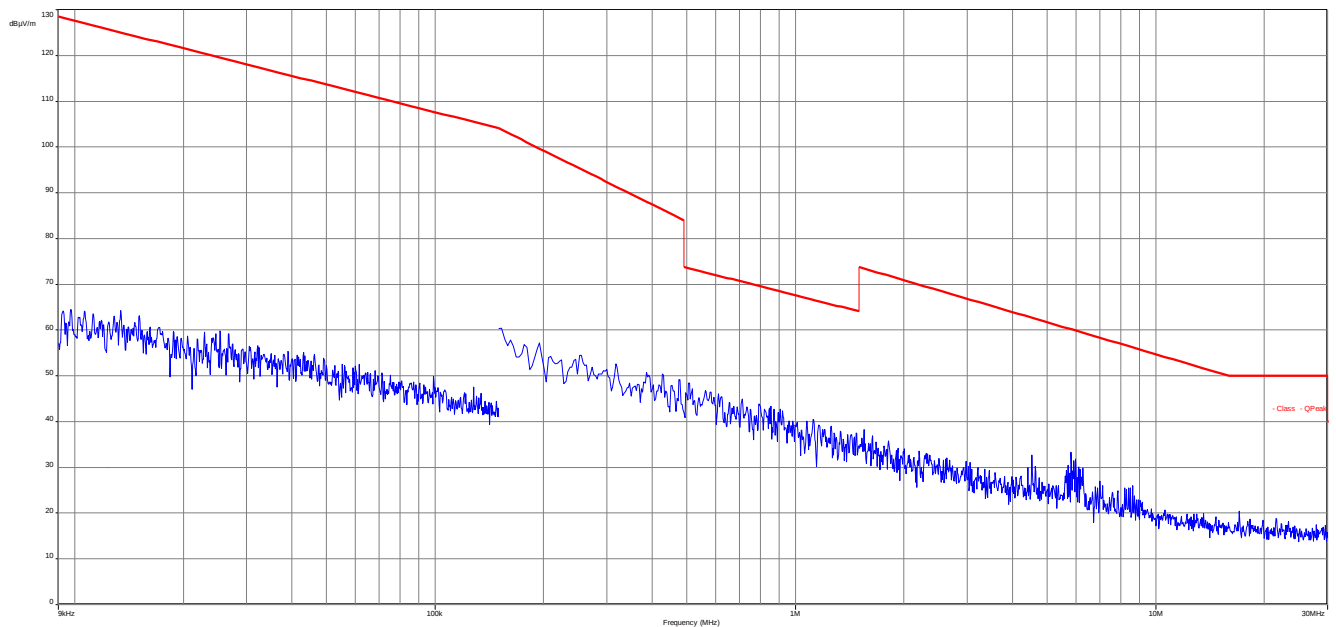Plots: OFDM**Plot 1: 9 kHz to 30 MHz, low channel****Plot 2: 9 kHz to 30 MHz, mid channel**

Plot 3: 9 kHz to 30 MHz, high channel

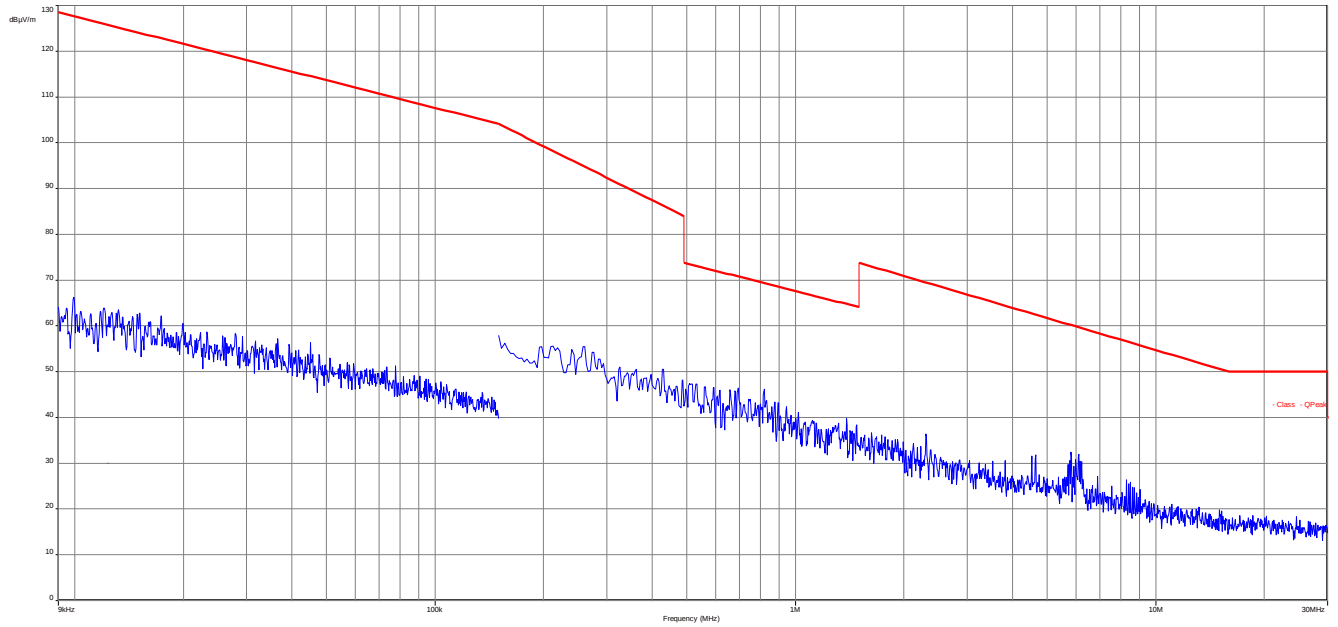

12.6 Spurious emissions radiated 30 MHz to 1 GHz

Description:

Measurement of the radiated spurious emissions and cabinet radiations below 1 GHz.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Resolution bandwidth:	F < 1 GHz: 120 kHz
Video bandwidth:	3 x RBW
Span:	30 MHz to 1 GHz
Trace-Mode:	Max Hold
Measured Modulation	☒ DSSS b – mode ☐ OFDM g – mode ☐ OFDM n HT20 – mode ☐ OFDM n HT40 – mode ☒ RX / Idle – mode
Test setup:	See sub clause 8.2
Measurement uncertainty	See sub clause 9


The modulation with the highest output power was used to perform the transmitter spurious emissions. If spurious were detected a re-measurement was performed on the detected frequency with each modulation.

Limits:

FCC		IC
TX Spurious Emissions Radiated		
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).		
Frequency (MHz)	Field Strength (dBμV/m)	Measurement distance
30 - 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10

Plot: TX-mode (valid for all modes)

Plot 1: 30 MHz to 1 GHz, vertical & horizontal polarization

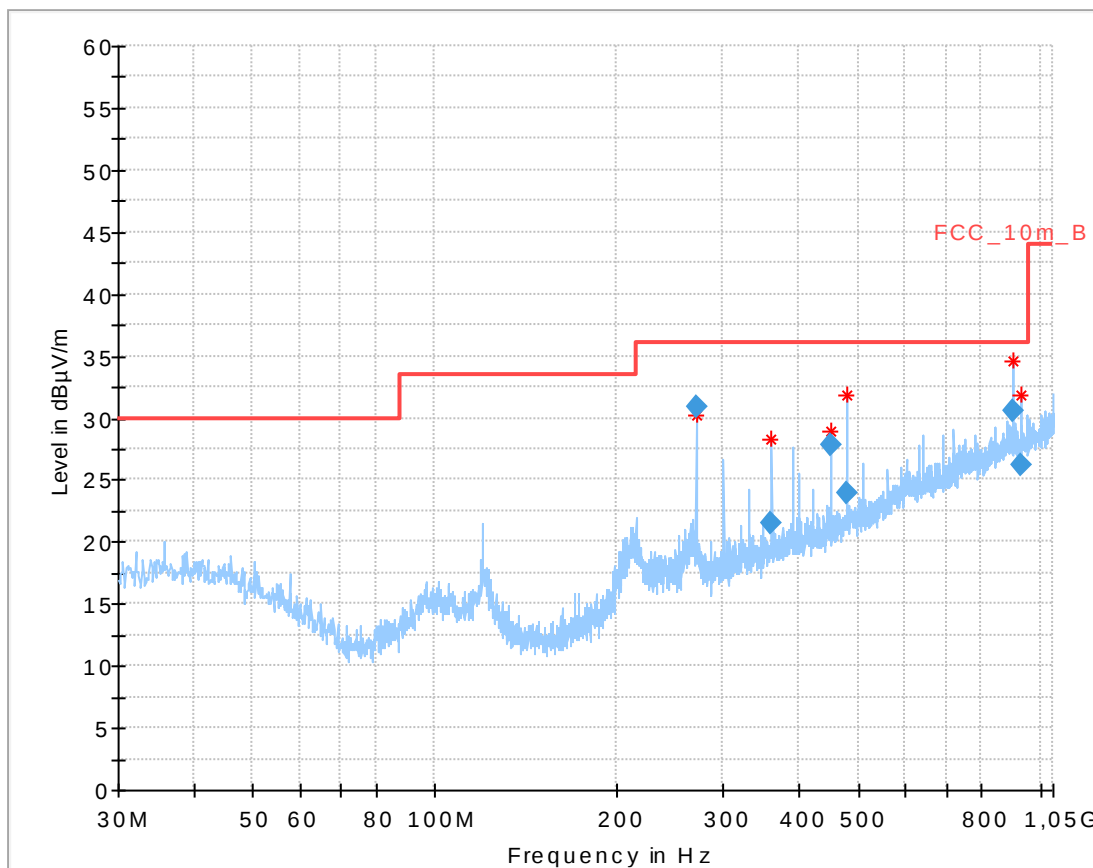


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
270.004650	30.92	36.00	5.08	1000.0	120.000	274.0	H	98	13.8
360.008400	21.49	36.00	14.51	1000.0	120.000	272.0	H	96	16.2
449.999700	27.76	36.00	8.24	1000.0	120.000	274.0	V	187	17.6
479.972400	23.94	36.00	12.06	1000.0	120.000	274.0	V	52	18.3
899.985150	30.62	36.00	5.38	1000.0	120.000	100.0	H	207	24.1
927.463650	26.24	36.00	9.76	1000.0	120.000	174.0	H	230	24.2

Plot: RX / Idle mode

Plot 1: 30 MHz to 1 GHz, vertical & horizontal polarization

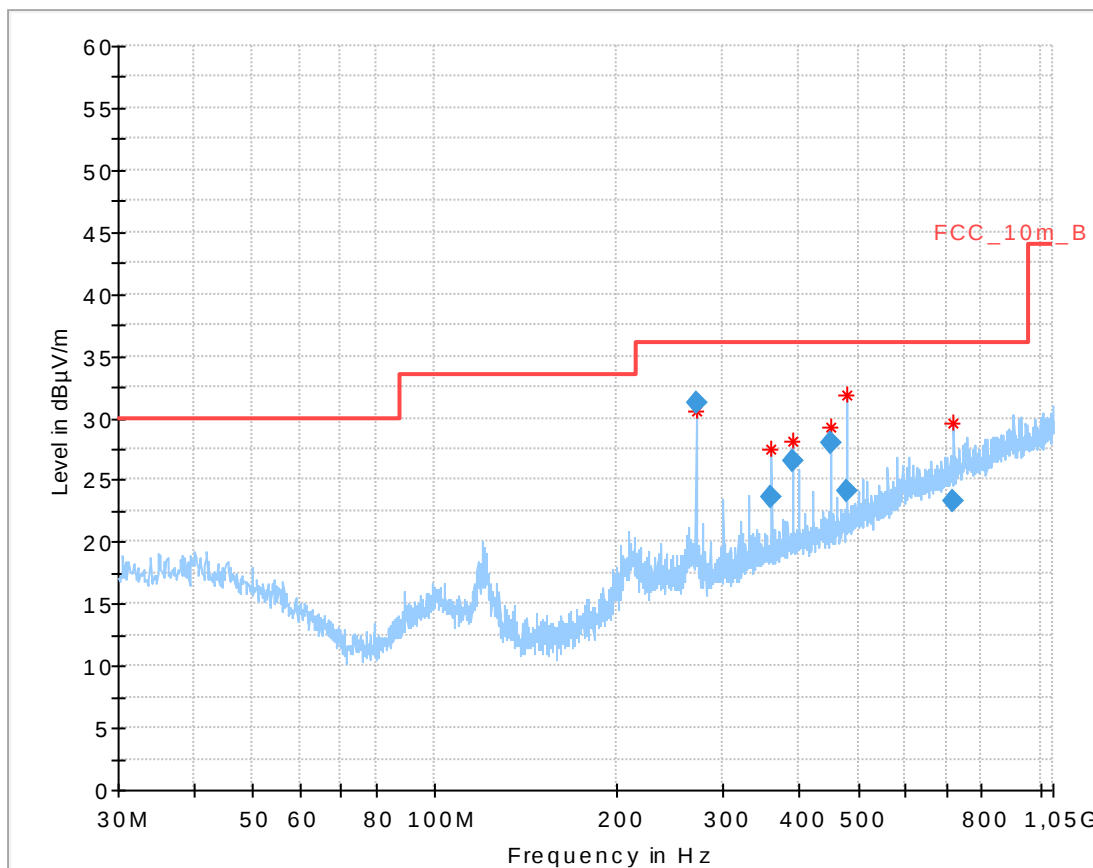

Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
269.993700	31.16	36.00	4.84	1000.0	120.000	271.0	H	97	13.8
359.983500	23.58	36.00	12.42	1000.0	120.000	272.0	H	96	16.2
390.023250	26.58	36.00	9.42	1000.0	120.000	100.0	V	95	16.7
450.000000	27.95	36.00	8.05	1000.0	120.000	273.0	V	142	17.6
479.998800	24.02	36.00	11.98	1000.0	120.000	273.0	V	162	18.3
719.994150	23.26	36.00	12.74	1000.0	120.000	100.0	H	282	22.0

12.7 Spurious emissions radiated above 1 GHz

Description:

Measurement of the radiated spurious emissions above 1 GHz in transmit mode and receiver / idle mode.

Measurement:

Measurement parameter	
Detector:	Peak / RMS
Sweep time:	Auto
Resolution bandwidth:	F > 1 GHz: 1 MHz
Video bandwidth:	3 x RBW
Span:	1 GHz to 26 GHz
Trace-Mode:	Max Hold
Measured Modulation	☒ DSSS b – mode ☐ OFDM g – mode ☐ OFDM n HT20 – mode ☐ OFDM n HT40 – mode ☒ RX / Idle – mode

Limits:

FCC		IC
TX Spurious Emissions Radiated		
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).		
Frequency (MHz)	Field Strength (dBμV/m)	Measurement distance
Above 960	54.0	3

Results: Transmit-mode


TX Spurious Emissions Radiated [dB μ V/m]		
F [MHz]	Detector	Level [dB μ V/m]
270	Peak	33.3
390	Peak	37.2
450	Peak	35.1
4824	Peak	49.3
14622	Peak	36.0
19496	Peak	39.4

Results: RX / idle – mode

RX Spurious Emissions Radiated [dB μ V/m]		
F [MHz]	Detector	Level [dB μ V/m]
270	Peak	33.3
390	Peak	37.0
450	Peak	36.0
4884	Peak	41.7


Plots:


Plot 1: Transmit mode, 1 GHz to 12.75 GHz, vertical & horizontal polarization

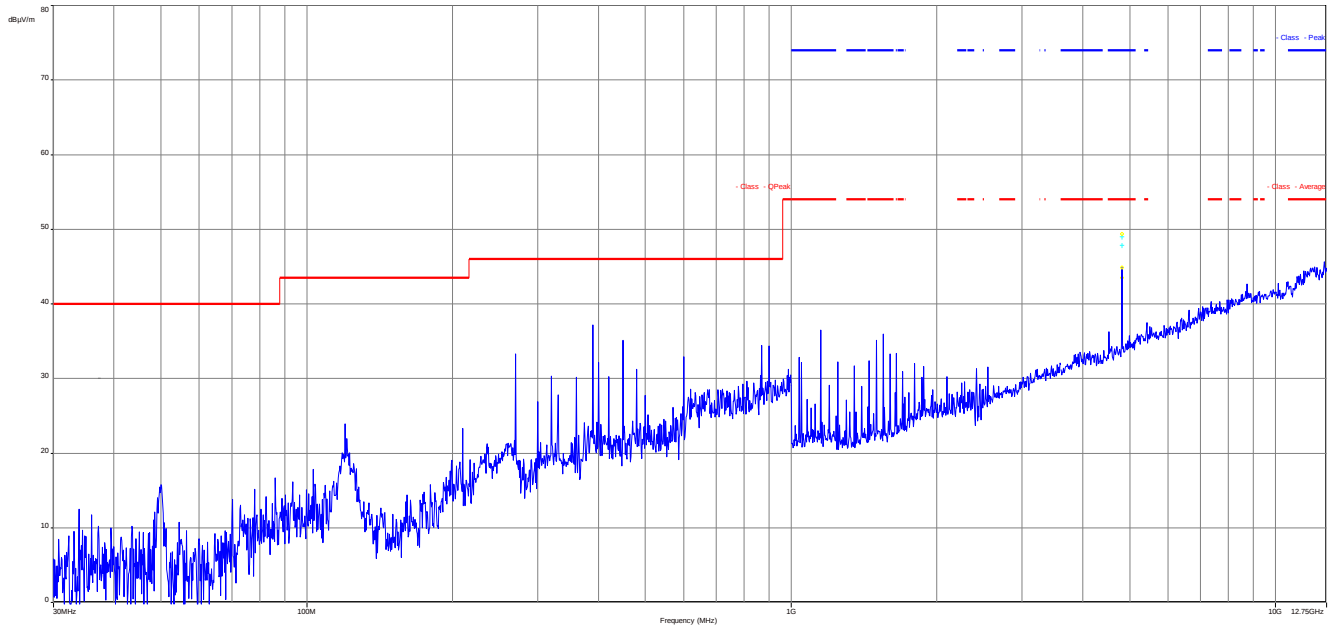

The carrier signal is notched with a 2.4 GHz band rejection filter.


Plot 2: Transmit mode, 12.75 GHz to 18 GHz, vertical & horizontal polarization

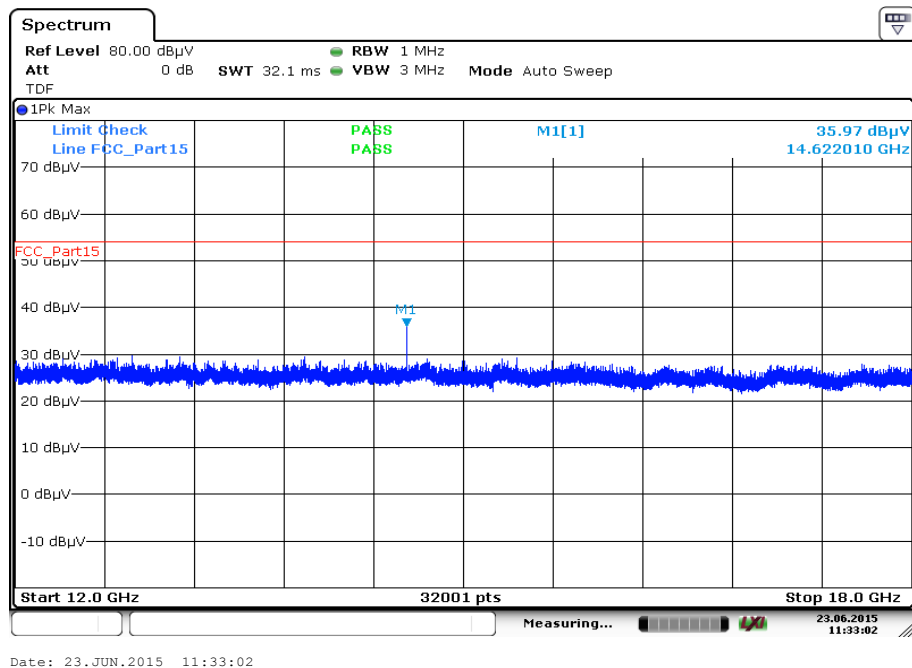

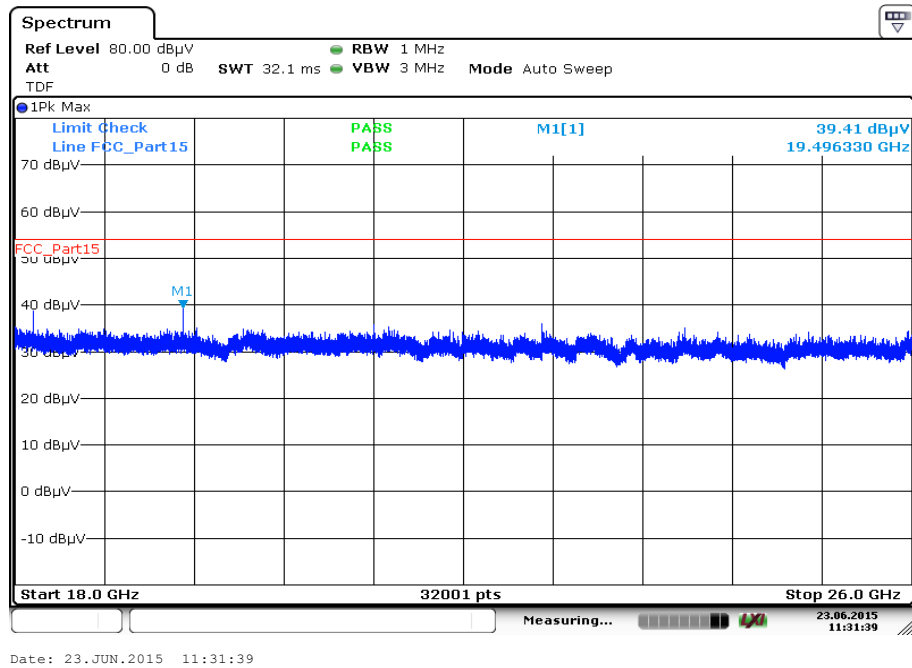
Plot 3: Transmit mode, 18 GHz to 26 GHz, vertical & horizontal polarization


Plots: RX / idle mode

Plot 1: 1 GHz to 12.75 GHz, vertical & horizontal polarization

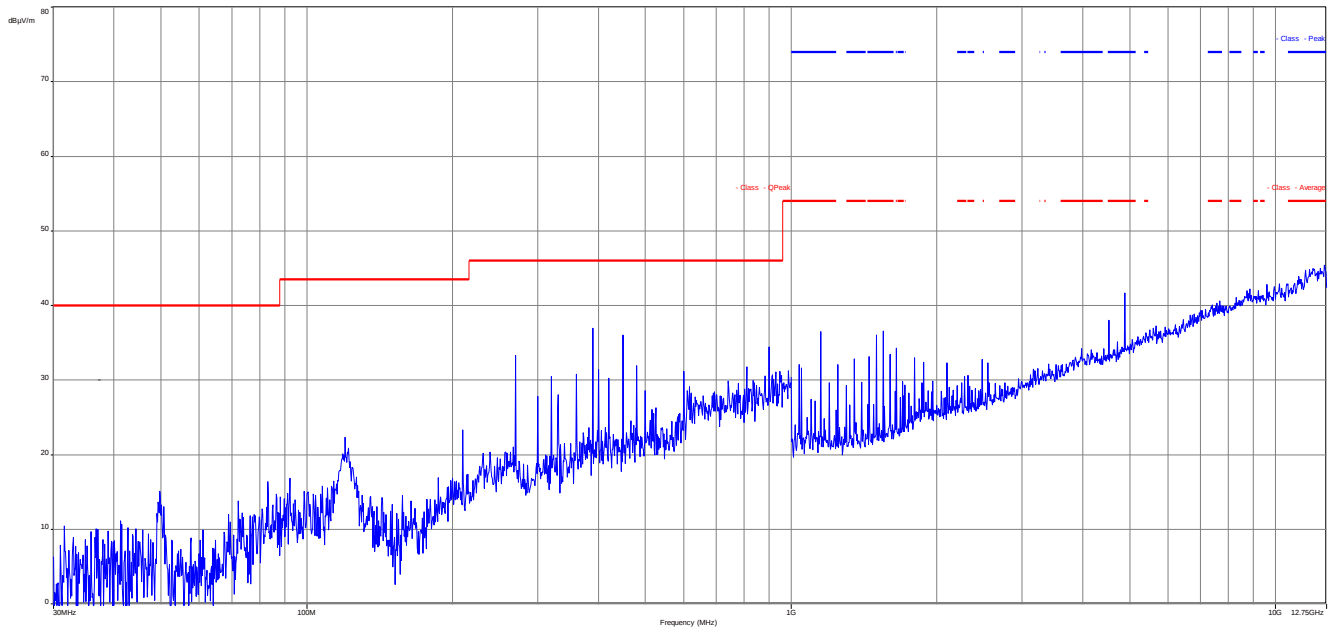

Plot 2: 12.75 GHz to 18 GHz, vertical & horizontal polarization

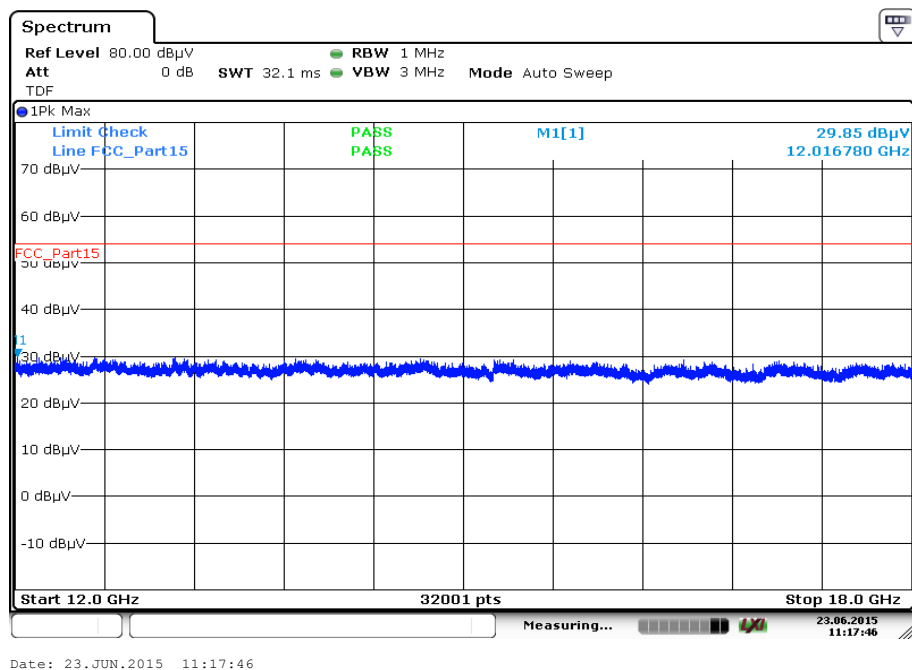

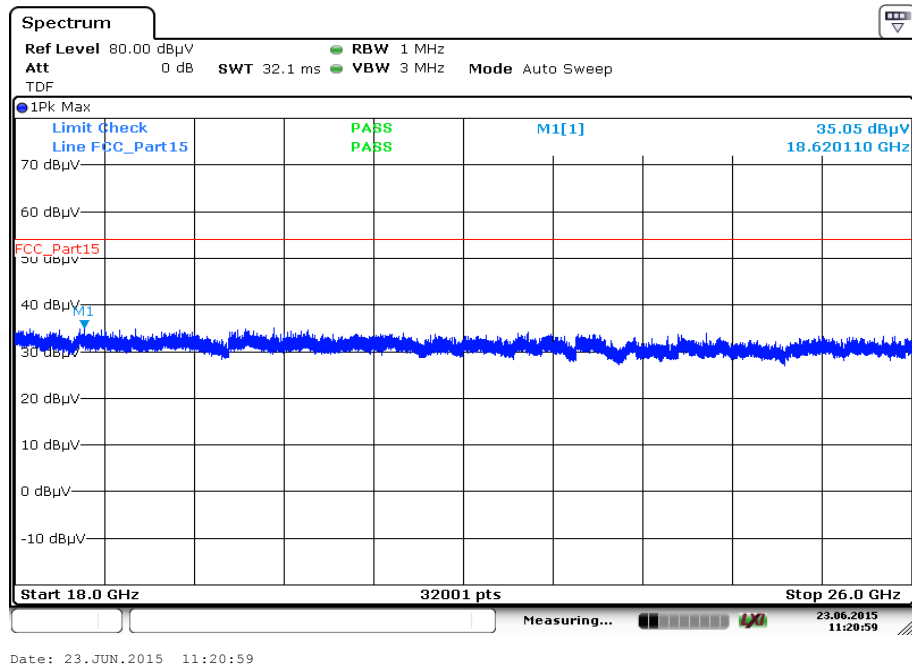Plot 3: 18 GHz to 26 GHz, vertical & horizontal polarization

12.8 Spurious emissions conducted below 30 MHz (AC conducted)

Description:

Measurement of the conducted spurious emissions in transmit mode below 30 MHz. The EUT is set to transmit mode. The measurement is performed with the data rate producing the highest output power. Both power lines, phase and neutral line, are measured. Found peaks are remeasured with average and quasi peak detection to show compliance to the limits.

Measurement:

Measurement parameter	
Detector:	Peak - Quasi Peak / Average
Sweep time:	Auto
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold


Limits:

FCC		IC
TX Spurious Emissions Conducted < 30 MHz		
Frequency (MHz)	Quasi-Peak (dBμV/m)	Average (dBμV/m)
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30.0	60	50

*Decreases with the logarithm of the frequency


Results:

Plot 1: 150 kHz to 30 MHz, phase line

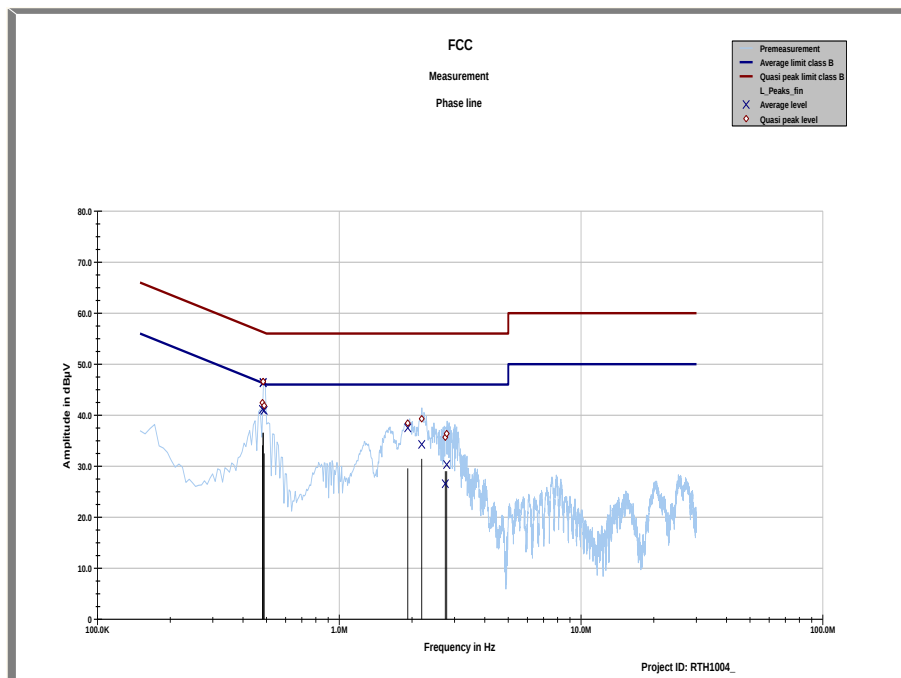

Frequency MHz	Quasi peak level dBμV	Margin quasi peak dBμV	Average level dBμV	Margin average dBμV
0.48109	42.46	13.86	41.13	5.41
0.48425	46.56	9.71	46.34	0.11
0.48449	46.60	9.66	46.43	0.02
0.48909	41.88	14.31	40.94	5.37
1.9194	38.44	17.56	37.51	8.49
2.1929	39.30	16.70	34.27	11.73
2.7449	35.68	20.32	26.56	19.44
2.7801	36.40	19.60	30.31	15.69

Plot 2: 150 kHz to 30 MHz, neutral line

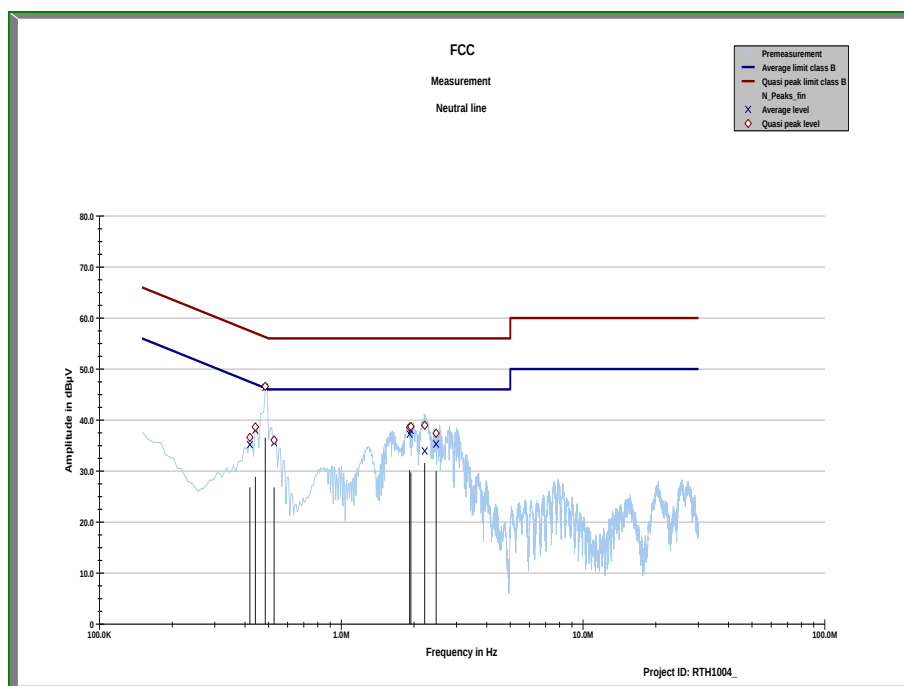

Frequency MHz	Quasi peak level dBµV	Margin quasi peak dBµV	Average level dBµV	Margin average dBµV
0.4189	36.60	20.87	35.18	13.14
0.44122	38.65	18.39	38.02	9.66
0.48469	46.61	9.65	46.43	0.01
0.52749	36.09	19.91	35.60	10.40
1.9172	38.60	17.40	37.24	8.76
1.9399	38.73	17.27	37.99	8.01
2.2135	38.97	17.03	33.94	12.06
2.4672	37.41	18.59	35.31	10.69

Annex A Document history

Version	Applied changes	Date of release
	Initial release	2015-09-24

Annex B Further information**Glossary**

AVG	-	Average
DUT	-	Device under test
EMC	-	Electromagnetic Compatibility
EN	-	European Standard
EUT	-	Equipment under test
ETSI	-	European Telecommunications Standard Institute
FCC	-	Federal Communication Commission
FCC ID	-	Company Identifier at FCC
HW	-	Hardware
IC	-	Industry Canada
Inv. No.	-	Inventory number
N/A	-	Not applicable
PP	-	Positive peak
QP	-	Quasi peak
S/N	-	Serial number
SW	-	Software
PMN		Product marketing name
HMN		Host marketing name
HVIN		Hardware version identification number
FVIN		Firmware version identification number

Annex C Accreditation Certificate

Front side of certificate



Deutsche Akkreditierungsstelle GmbH

Befähigung gemäß § 8 Absatz 1 AkkStelleG i.V.m. § 1 Absatz 1 AkkStelleGBV
Unterzeichnerin der Multilateralen Abkommen
von EA, ILAC und IAF zur gegenseitigen Anerkennung

Akkreditierung



Die Deutsche Akkreditierungsstelle GmbH bestätigt hiermit, dass das Prüflaboratorium

CETECOM ICT Services GmbH
Untertürkheimer Straße 6-10, 66117 Saarbrücken

die Kompetenz nach DIN EN ISO/IEC 17025:2005 besitzt, Prüfungen in folgenden Bereichen durchzuführen:

Drahtgebundene Kommunikation einschließlich xDSL
VoIP und DECT
Akustik
Funk einschließlich WLAN
Short Range Devices (SRD)
RFID
WiMax und Richtfunk
Mobilfunk (GSM / GPRS, Over the Air (OTA) Performance)
Elektromagnetische Verträglichkeit (EMV) einschließlich Automotive
Produktsicherheit
SAR und Hearing Aid Compatibility (HAC)
Umweltsimulation
Smart Card Terminals
Bluetooth
Wi-Fi Services

Die Akkreditierungsurkunde gilt nur in Verbindung mit dem Bescheid vom 07.03.2014 mit der Akkreditierungsnummer D-PL-12076-01 und ist gültig bis 17.01.2018. Sie besteht aus diesem Deckblatt, der Rückseite des Deckblatts und der folgenden Anlage mit insgesamt 77 Seiten.

Registrierungsnummer der Urkunde: D-PL-12076-01-00

Frankfurt am Main, 07.03.2014

Cette Stelle ist für die Kontrolle

In Auftrag der DAKKS
Abteilungsleiter

Back side of certificate

Deutsche Akkreditierungsstelle GmbH

Standort Berlin
Spittelmarkt 10
10117 Berlin

Standort Frankfurt am Main
Gartenstraße 6
60594 Frankfurt am Main

Standort Braunschweig
Bundesallee 100
38116 Braunschweig

Die auszugsweise Veröffentlichung der Akkreditierungsurkunde bedarf der vorherigen schriftlichen Zustimmung der Deutsche Akkreditierungsstelle GmbH (DAKKS). Ausgenommen davon ist die separate Weiterverbreitung des Deckblattes durch die umseitig genannte Kurznachrichtendienststelle in unveränderter Form.

Es darf nicht der Anschein erweckt werden, dass sich die Akkreditierung auch auf Bereiche erstreckt, die über den durch die DAKKS bestätigten Akkreditierungsbereich hinausgehen.

Die Akkreditierung erfolgte gemäß des Gesetzes über die Akkreditierungsstelle (AkkStelleG) vom 31. Juli 2009 (BGBl. I S. 2625) sowie der Verordnung (EG) Nr. 765/2008 des Europäischen Parlaments und des Rates vom 9. Juli 2008 über die Vorschriften für die Akkreditierung und Marktüberwachung im Zusammenhang mit der Vermarktung von Produkten (Abl. L 218 vom 9. Juli 2008, S. 30). Die DAKKS ist Unterzeichnerin der Multilateralen Abkommen zur gegenseitigen Anerkennung der Europäischen Organisation für Akkreditierung (EA), des International Accreditation Forum (IAF) und der International Laboratory Accreditation Cooperation (ILAC). Die Unterzeichner dieser Abkommen erkennen ihre Akkreditierungen gegenseitig an.

Der aktuelle Stand der Mitgliedschaft kann folgenden Webseiten entnommen werden:
EA: www.european-accreditation.org
IAF: www.iaf.or.jp
ILAC: www.ilac.or.jp

Note:

The current certificate including annex is published on our website (see link below) or may be received from CETECOM ICT Services on request.

<http://www.cetecom.com/eu/de/cetecom-group/europa/deutschland-saarbruecken/akkreditierungen.html>