

test report

Ważne porady

100

EXHIBIT 10

000000

CRD

THE UNIVERSITY OF CHICAGO PRESS

CONCRETE

CONCEPTS

000000

Robert J. Schuchman

100-443883-10

100

1998, 1999, 2000, 2001, 2002, 2003, 2004, 2005, 2006, 2007, 2008, 2009, 2010, 2011, 2012, 2013, 2014, 2015, 2016, 2017, 2018, 2019, 2020, 2021, 2022, 2023, 2024, 2025, 2026, 2027, 2028, 2029, 2030, 2031, 2032, 2033, 2034, 2035, 2036, 2037, 2038, 2039, 2040, 2041, 2042, 2043, 2044, 2045, 2046, 2047, 2048, 2049, 2050, 2051, 2052, 2053, 2054, 2055, 2056, 2057, 2058, 2059, 2060, 2061, 2062, 2063, 2064, 2065, 2066, 2067, 2068, 2069, 2070, 2071, 2072, 2073, 2074, 2075, 2076, 2077, 2078, 2079, 2080, 2081, 2082, 2083, 2084, 2085, 2086, 2087, 2088, 2089, 2090, 2091, 2092, 2093, 2094, 2095, 2096, 2097, 2098, 2099, 2100, 2101, 2102, 2103, 2104, 2105, 2106, 2107, 2108, 2109, 2110, 2111, 2112, 2113, 2114, 2115, 2116, 2117, 2118, 2119, 2120, 2121, 2122, 2123, 2124, 2125, 2126, 2127, 2128, 2129, 2130, 2131, 2132, 2133, 2134, 2135, 2136, 2137, 2138, 2139, 2140, 2141, 2142, 2143, 2144, 2145, 2146, 2147, 2148, 2149, 2150, 2151, 2152, 2153, 2154, 2155, 2156, 2157, 2158, 2159, 2160, 2161, 2162, 2163, 2164, 2165, 2166, 2167, 2168, 2169, 2170, 2171, 2172, 2173, 2174, 2175, 2176, 2177, 2178, 2179, 2180, 2181, 2182, 2183, 2184, 2185, 2186, 2187, 2188, 2189, 2190, 2191, 2192, 2193, 2194, 2195, 2196, 2197, 2198, 2199, 2200, 2201, 2202, 2203, 2204, 2205, 2206, 2207, 2208, 2209, 2210, 2211, 2212, 2213, 2214, 2215, 2216, 2217, 2218, 2219, 2220, 2221, 2222, 2223, 2224, 2225, 2226, 2227, 2228, 2229, 2230, 2231, 2232, 2233, 2234, 2235, 2236, 2237, 2238, 2239, 2240, 2241, 2242, 2243, 2244, 2245, 2246, 2247, 2248, 2249, 2250, 2251, 2252, 2253, 2254, 2255, 2256, 2257, 2258, 2259, 2260, 2261, 2262, 2263, 2264, 2265, 2266, 2267, 2268, 2269, 2270, 2271, 2272, 2273, 2274, 2275, 2276, 2277, 2278, 2279, 2280, 2281, 2282, 2283, 2284, 2285, 2286, 2287, 2288, 2289, 2290, 2291, 2292, 2293, 2294, 2295, 2296, 2297, 2298, 2299, 2300, 2301, 2302, 2303, 2304, 2305, 2306, 2307, 2308, 2309, 2310, 2311, 2312, 2313, 2314, 2315, 2316, 2317, 2318, 2319, 2320, 2321, 2322, 2323, 2324, 2325, 2326, 2327, 2328, 2329, 2330, 2331, 2332, 2333, 2334, 2335, 2336, 2337, 2338, 2339, 2340, 2341, 2342, 2343, 2344, 2345, 2346, 2347, 2348, 2349, 2350, 2351, 2352, 2353, 2354, 2355, 2356, 2357, 2358, 2359, 2360, 2361, 2362, 2363, 2364, 2365, 2366, 2367, 2368, 2369, 2370, 2371, 2372, 2373, 2374, 2375, 2376, 2377, 2378, 2379, 2380, 2381, 2382, 2383, 2384, 2385, 2386, 2387, 2388, 2389, 2390, 2391, 2392, 2393, 2394, 2395, 2396, 2397, 2398, 2399, 2400, 2401, 2402, 2403, 2404, 2405, 2406, 2407, 2408, 2409, 2410, 2411, 2412, 2413, 2414, 2415, 2416, 2417, 2418, 2419, 2420, 2421, 2422, 2423, 2424, 2425, 2426, 2427, 2428, 2429, 2430, 2431, 2432, 2433, 2434, 2435, 2436, 2437, 2438, 2439, 2440, 2441, 2442, 2443, 2444, 2445, 2446, 2447, 2448, 2449, 2450, 2451, 2452, 2453, 2454, 2455, 2456, 2457, 2458, 2459, 2460, 2461, 2462, 2463, 2464, 2465, 2466, 2467, 2468, 2469, 2470, 2471, 2472, 2473, 2474, 2475, 2476, 2477, 2478, 2479, 2480, 2481, 2482, 2483, 2484, 2485, 2486, 2487, 2488, 2489, 2490, 2491, 2492, 2493, 2494, 2495, 2496, 2497, 2498, 2499, 2500, 2501, 2502, 2503, 2504, 2505, 2506, 2507, 2508, 2509, 2510, 2511, 2512, 2513, 2514, 2515, 2516, 2517, 2518, 2519, 2520, 2521, 2522, 2523, 2524, 2525, 2526, 2527, 2528, 2529, 2530, 2531, 2532, 2533, 2534, 2535, 2536, 2537, 2538, 2539, 2540, 2541, 2542, 2543, 2544, 2545, 2546, 2547, 2548, 2549, 2550, 2551, 2552, 2553, 2554, 2555, 2556, 2557, 2558, 2559, 2560, 2561, 2562, 2563, 2564, 2565, 2566, 2567, 2568, 2569, 2570, 2571, 2572, 2573, 2574, 2575, 2576, 2577, 2578, 2579, 2580, 2581, 2582, 2583, 2584, 2585, 2586, 2587, 2588, 2589, 2590, 2591, 2592, 2593, 2594, 2595, 2596, 2597, 2598, 2599, 2600, 2601, 2602, 2603, 2604, 2605, 2606, 2607, 2608, 2609, 2610, 2611, 2612, 2613, 2614, 2615, 2616, 2617, 2618, 2619, 2620, 2621, 2622, 2623, 2624, 2625, 2626, 2627, 2628, 2629, 2630, 2631, 2632, 2633, 2634, 2635, 2636, 2637, 2638, 2639, 2640, 2641, 2642, 2643, 2644, 2645, 2646, 2647, 2648, 2649, 2650, 2651, 2652, 2653, 2654, 2655, 2656, 2657, 2658, 2659, 2660, 2661, 2662, 2663, 2664, 2665, 2666, 2667, 2668, 2669, 2670, 2671, 2672, 2673, 2674, 2675, 2676, 2677, 2678, 2679, 26



Table of Contents

Section I. Summary of Test Results
General
Summary of Test Data

Section 2. General Equipment Specification
Specifications
Description of Modifications for Class II Permissive Change
Modifications Made During Testing
Theory of Operation
System Diagram

Section 3. RF Power Output
Test Results
Measurement Data
Power Over Bandwidth Graphs

Section 4. Audio Frequency Response
Graphs
Table

Section 5. Audio Low-Pass Filter Response
Graphs
Table

Section 6. Modulation Limiting
Graphs
Table

Section 7. Occupied Bandwidth
Test Results
Measurement Data
Occupied Bandwidth Plots

Section 8. Spurious Emissions @ Antenna Terminals
Test Results
Measurement Data
Spurious Emissions Plots

Table of Contents, continued

Section 9. Field Strength of Spurious
Test Results
Test Data
Test Data - Radiated Emissions
Photographs of Test Setup

Section 10. Frequency Stability
Test Results
Measurement Data
Frequency Tables

Section 11. Test Equipment List

Annex A - Test Methodologies
RF Power Output
Audio Frequency Response
Audio Low-Pass Filter Frequency Response
Modulation Limiting
Occupied Bandwidth
Field Strength of Spurious Radiation
Frequency Stability
Transient Frequency Behaviour

Annex B - Test Diagrams
R.F. Power Output
Audio Frequency Response
Audio Low-Pass Filter Frequency Response
Modulation Limiting
Occupied Bandwidth
Spurious Emissions at Antenna Terminals
Filed Strength of Spurious Radiation
Frequency Stability
Transient Frequency Behaviour

Section 1. Summary of Test Results

Manufacturer: Rohde & Schwartz Canada Ltd.

Model No.: XU221

Serial No.: 845261/016

General: All measurements are traceable to national standards.

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 87, Subpart D.

☒	New Submission	☒	Production Unit
☐	Class II Permissive Change	☐	Pre-Production Unit

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST SPECIFICATIONS HAVE BEEN MADE.
See "Summary of Test Data".

NVLAP

NVLAP LAB CODE: 100351-0

TESTED BY: Murvell H. Hunt DATE: Nov 25, 98
TECHNICAL REVIEW: [Signature] DATE: 25 Nov. 1998
Tom Tidwell, Wireless Group Manager

KTL Ottawa Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. KTL Ottawa Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

Summary Of Test Data

NAME OF TEST	PARA. NO.	SPEC.	MEAS.	RESULT
RF Power Output	87.131	25	27.0	Complies
Audio Frequency Response	2.1047	None	Graph	Complies
Audio Low-Pass Filter Response	2.1047	None	Graph	Complies
Modulation Limiting	87.141	100%	Graph	Complies
Occupied Bandwidth	87.139	Graph	Graph	Complies
Spurious Emissions at Antenna Terminals	87.139	-13dBm	Graph	Complies
Field Strength of Spurious Emissions	87.139	75.2 dBµV	< 48dBµV	Complies
Frequency Stability	87.133	20 ppm	0.466	Complies

Footnotes For N/A's:

Test Conditions:
Temperature: 20 °C
Humidity: 30 %

Section 2. General Equipment Specification

Transmitter

Supply Voltage Input:	120 VAC
Frequency Range:	118 – 144 MHz
Tunable Bands:	1
Necessary Bandwidth:	6 kHz
Types of Modulation:	AM
Data Rate(s)	Not Applicable
Internal/External Data Source:	Not Applicable
Emission Designator:	6K00A3E
Output Impedance:	50 ohms
RF Power Output (rated):	25 W Unmodulated 35.125 W Fully Modulated 90% Modulated Depth Max
Duty Cycle:	Continuous
Channel Spacing(s):	25 kHz
Operator Selection of Operating Frequency:	None
Power Output Adjustment Capability:	None

NOT APPLICABLE

Description of Modifications For Class II Permissive Change

FCC PART 87, SUBPART D
PROJECT NO.: 8R00399

EQUIPMENT: VHF Transceiver
FCC ID: KVVW60439043

KTL Ottawa

NOT APPLICABLE

Modifications Made During Testing


FCC PART 87, SUBPART D
PROJECT NO.: 8R00399

EQUIPMENT: VHF Transceiver
FCC ID: KYW60439043

KTL Ottawa

Theory of Operation
The XU221 VFH transceiver unit is designed for operation in the band 118 – 144 MHz. This equipment uses conventional amplitude modulation, (full carrier, doubled side band). Amplitude modulation is internally limited to 90%. The rated RF power output is 25W unmodulated. During maximum 90% amplitude modulation the RF power output is $\left(1 + \frac{0.9}{2}\right) \times 25 = 35.125$.

System Diagram

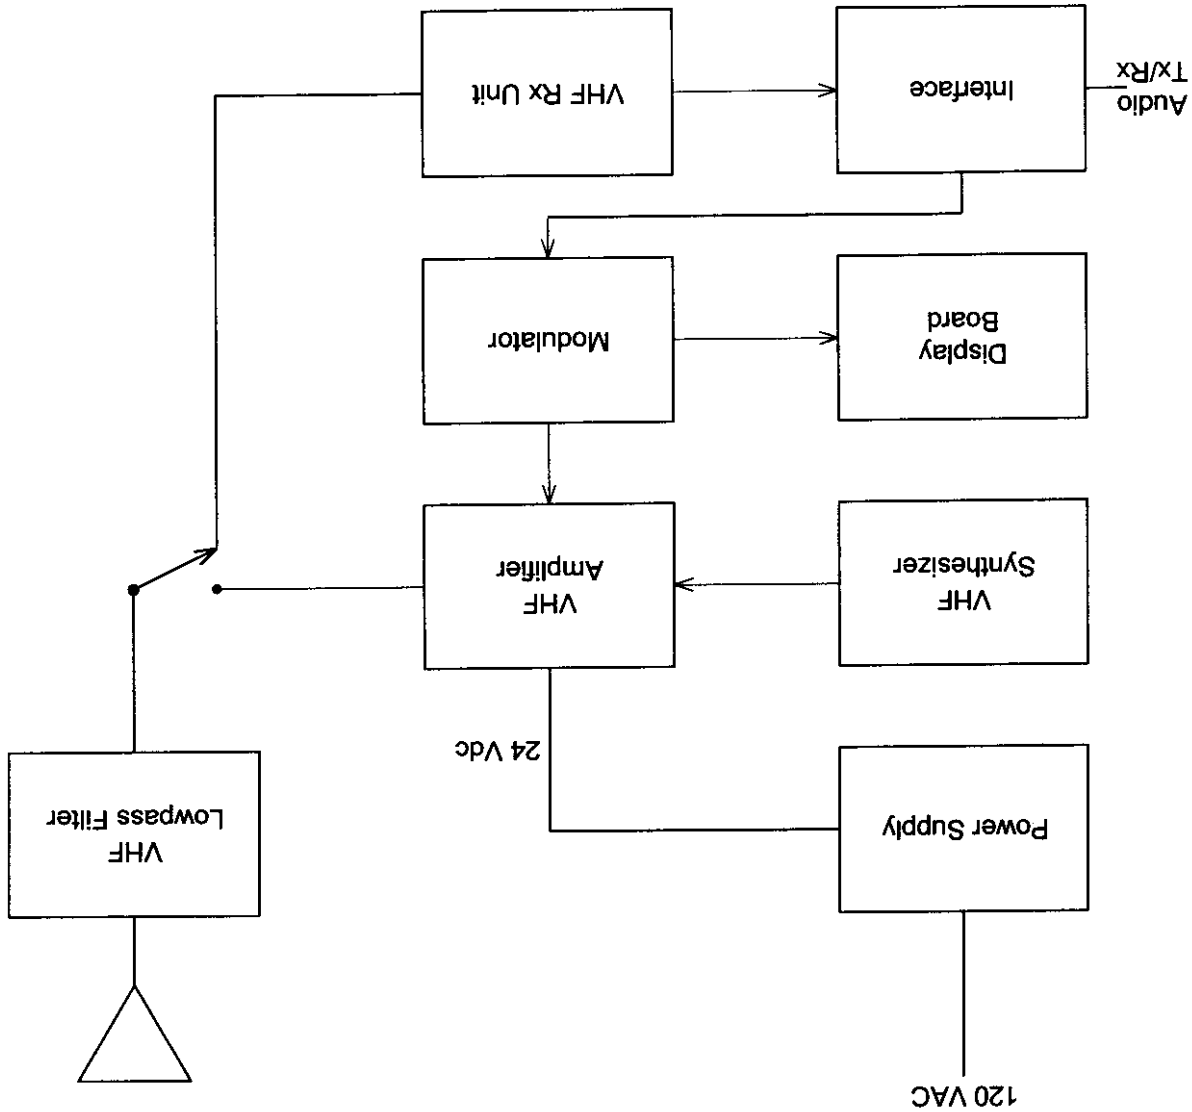

Section 3. RF Power Output

NAME OF TEST: RF Power Output	PARA. NO.: 2.1046
TESTED BY: Russell Grant	DATE: November 20, 1998

Test Results: Complies.


Measurement Data:

Frequency (MHz)	Rated Power (W)	Measured Power (W)	Measured/Rated (dB)
122.4	25 Unmodulated	27.0	+0.3
122.4 *	35.2 Modulated	38.0	+0.3

* The equipment was modulated with a 2500 Hz tone at 90.4 tone at 90.4% modulation depth. This equipment is internally set for a maximum modulation depth of 90%.

Section 4. Audio Frequency Response

NAME OF TEST: Audio Frequency Response	PARA. NO.: 2.1047
TESTED BY: Russell Grant	DATE: November 20, 1998

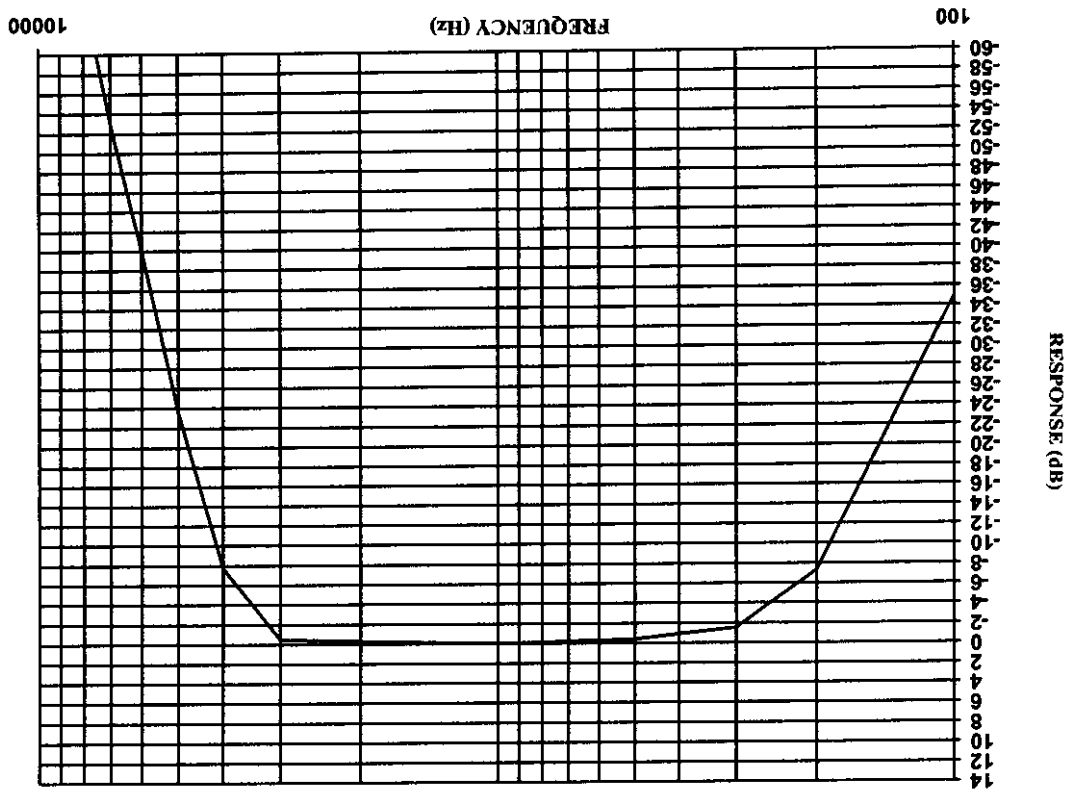


Audio Frequency Response

Frequency (Hz)	Response (dB)
100	-34.9
200	-7.3
300	-1.5
400	-0.4
500	-0.2
700	-0.1
1000	0
2000	-0.3
3000	-0.5
4000	-7.7
5000	-23.6
6000	-40.0

Section 5. Audio Low-Pass Filter Response

NAME OF TEST: Audio Low-Pass Filter Response	TESTED BY: Russell Grant
PARA. NO.: 2.1047	DATE: November 20, 1998

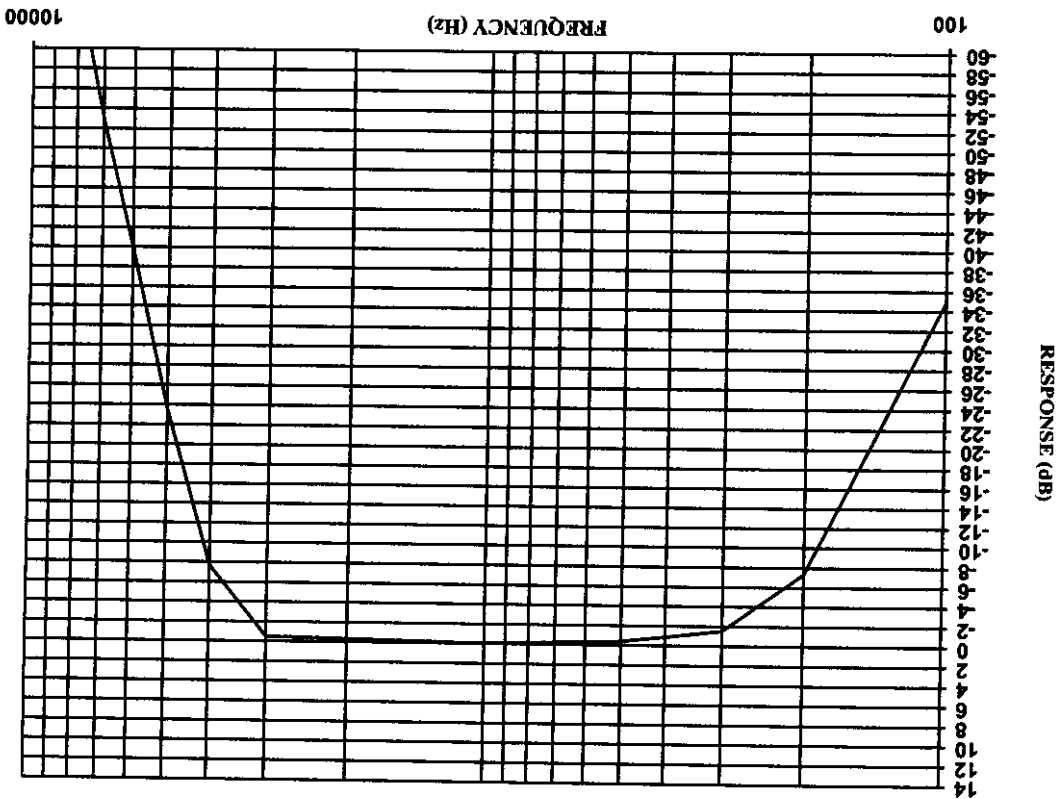


Audio Frequency Response

Frequency (Hz)	Response (dB)
100	-34.9
200	-7.3
300	-1.5
400	-0.4
500	-0.2
700	-0.1
1000	0
2000	-0.3
3000	-0.5
4000	-7.7
5000	-23.6
6000	-40.0

Section 6. Modulation Limiting

NAME OF TEST: Modulation Limiting	PARA. NO.: 2.1047
TESTED BY: Russell Grant	DATE: November 20, 1998

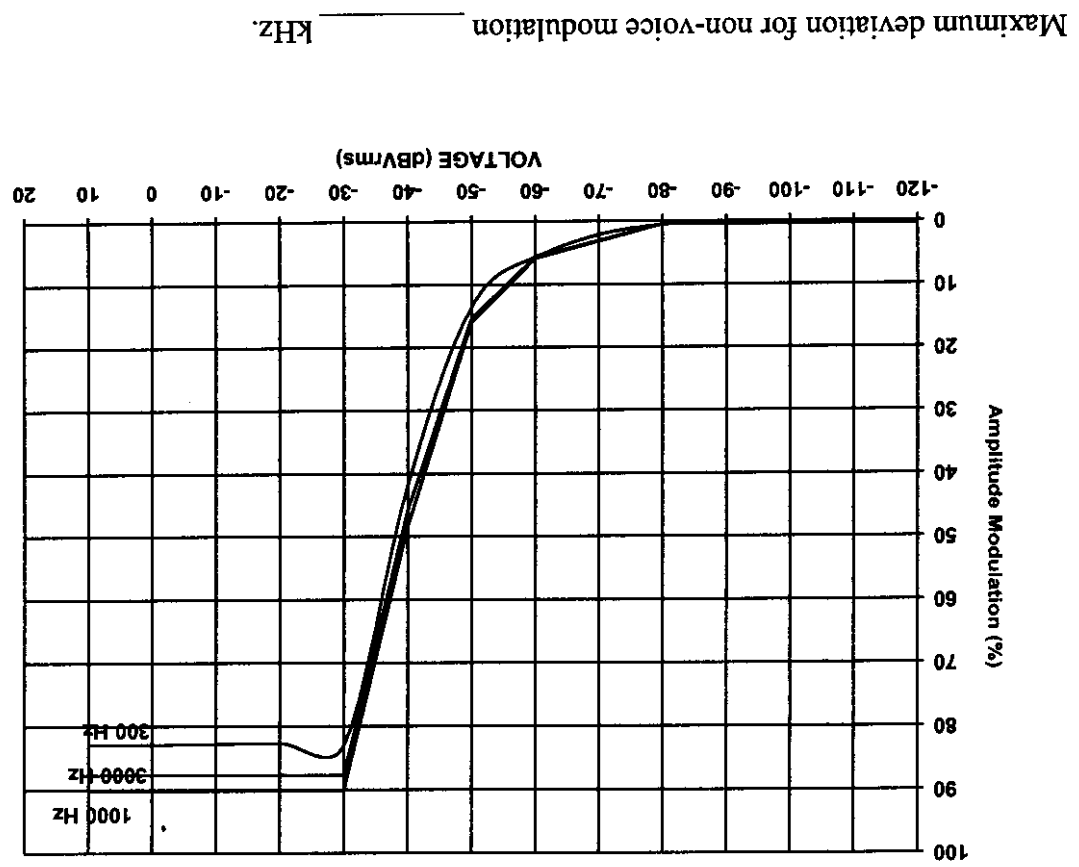

FCC PART 87, SUBPART D
PROJECT NO.: 8R00399

KTL Ottawa


EQUIPMENT: VHF Transceiver
FCC ID: KVVW60439043

Section 7. Occupied Bandwidth

NAME OF TEST: Occupied Bandwidth	PARA. NO.: 2.1047
TESTED BY: Russell Grant	DATE: November 20, 1998

Test Results: Complies.

Test Data: See attached graph(s).

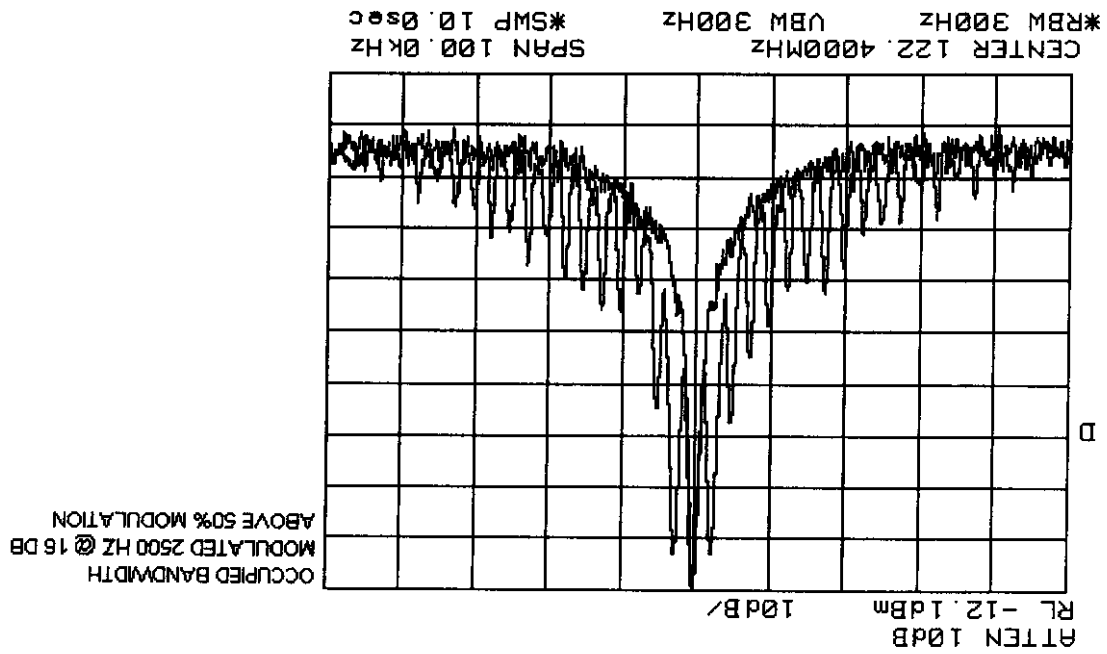

Section 8. Spurious Emissions at Antenna Terminals

NAME OF TEST: Spurious Emissions @ Antenna Terminals	PARA. NO.: 2.1051
TESTED BY: Russell Grant	
DATE: November 20, 1998	


Test Results:

Complies.

Test Data:

See attached graph(s).

All emissions < -23 dBm

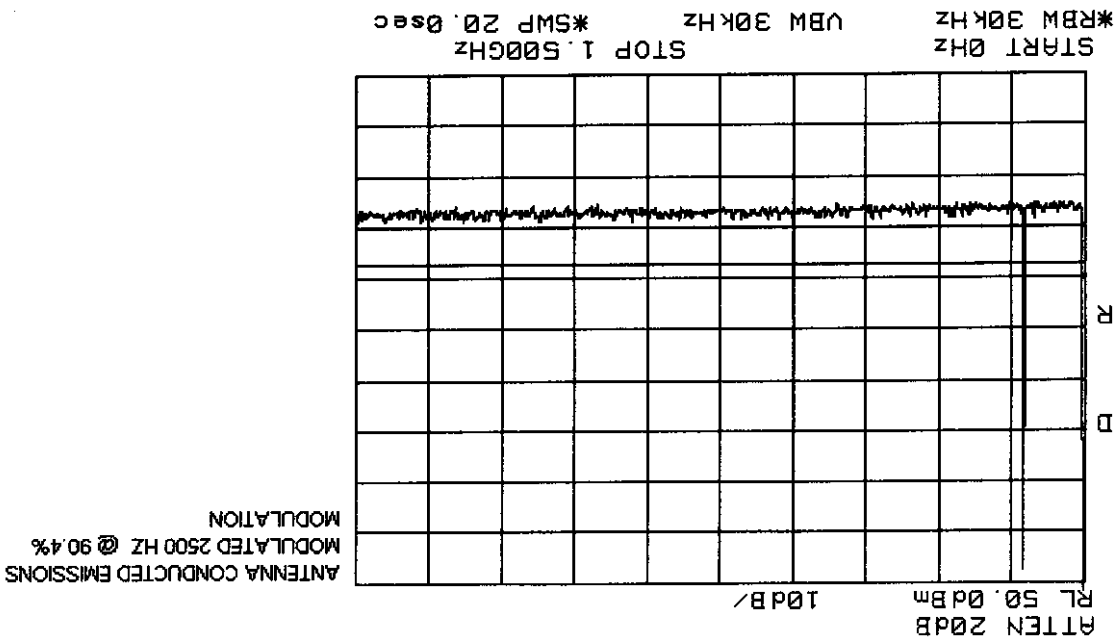

Section 9. Field Strength of Spurious Emissions

NAME OF TEST: Field Strength of Spurious Emissions	PARA. NO.: 2.1053
TESTED BY: Russell Grant	DATE: November 20, 1998

Test Results:

Complies.

Test Data:

No emissions were detected on a outdoor range at a distance of 3m.
Our measurement noise floor is 3 dBµV/m at 30 MHz and
increases uniformly to 48 dBµV/m at 1500 MHz.

NO EMISSIONS DETECTED

[illegible]

Notes:
The spectrum was search up to the 10th harmonic of the fundamental frequency.
B/C = Biconical, B/L = Biconilog, L/P = Log-Periodic, H = Horn, D/P = Dipole.
* Includes cable loss when amplifier is not used.
** Includes cable loss.
() Denotes failing emission level.

Section 10. Frequency Stability

NAME OF TEST: Frequency Stability	PARA. NO.: 2.1055
TESTED BY: Russell Grant	DATE: November 20, 1998

Test Results: Complies.

Measurement Data: See attached tables.

The maximum frequency drift is 57 Hz. This is 0.466 ppm.

Frequency Stability Tables

Time (min)	-30°C	-20°C	-10°C	0°C	+10°C
0	122.400057	122.400048	122.400041	122.400034	122.400023
1	122.400057	122.400048	122.400041	122.400034	122.400023
2	122.400057	122.400048	122.400041	122.400034	122.400023
3	122.400057	122.400048	122.400041	122.400034	122.400023
4	122.400057	122.400048	122.400041	122.400034	122.400023
5	122.400057	122.400048	122.400041	122.400034	122.400023

Time (min)	+20°C	+30°C	+40°C	+50°C	+60°C
0	122.400043	122.399981	122.399977	122.399973	122.399976
1	122.400043	122.399981	122.399977	122.399973	122.399976
2	122.400043	122.399981	122.399977	122.399973	122.399976
3	122.400043	122.399981	122.399977	122.399973	122.399976
4	122.400043	122.399981	122.399977	122.399973	122.399976
5	122.400043	122.399981	122.399977	122.399973	122.399976

Time (min)	85% STV	STV	110% STV
0	122.400043	122.400043	122.400043
1	122.400043	122.400043	122.400043
2	122.400043	122.400043	122.400043
3	122.400043	122.400043	122.400043
4	122.400043	122.400043	122.400043
5	122.400043	122.400043	122.400043

Section 11. Test Equipment List

CAL	EQUIPMENT	MANUFACTURER	MODEL	SERIAL	LAST	NEXT	CYCLE
1 Year	Spectrum Analyzer	Hewlett Packard	8565E	FA000981	May 20/98	May 20/99	1 Year
1 Year	Radio Test Set	Rohde & Schwarz	CMS 52	840.0009.52	July 23/98	July 23/99	1 Year
1 Year	Climate Chamber	Thermotron	SM-16C	15649-S	Aug. 7/98	Aug. 7/99	1 Year
1 Year	Selective Level Meter	Hewlett Packard	3586B	1928A01971	July 12/98	July 12/99	1 Year
1 Year	Attenuator	Narda	768-20	9507	July 24/98	July 24/99	1 Year
1 Year	Attenuator	Narda	765-20	9510	July 24/98	July 24/99	1 Year
1 Year	Attenuator	Narda	768-10	9704	July 24/98	July 24/99	1 Year
1 Year	Attenuator	Narda	768-10	9709	July 24/98	July 24/99	1 Year
1 Year	RF Millivoltmeter	Rohde & Schwarz	URV5	FA000420	July 23/98	July 23/99	1 Year
1 Year	Insertion Unit	Rohde & Schwarz	URV5-Z4	FA000905	July 23/98	July 23/99	1 Year
1 Year	Power Sensor	Rohde & Schwarz	URV5-Z5	FA000419	July 23/98	July 23/99	1 Year
1 Year	Receiver	Rohde & Schwarz	ESVP	892661/014	Mar. 31/98	Mar. 31/99	1 Year
2 Year	Horn Antenna	EMCO #2	3115	4336	Oct. 30/97	Oct. 30/99	2 Year
1 Year	Log Periodic Antenna	EMCO	LPA-25	1141	July 27/98	July 27/99	1 Year
1 Year	Biconical (1) Antenna	EMCO	3109	9204-2708	July 27/98	July 27/99	1 Year
1 Year	Frequency Counter	Hewlett Packard	HP5350A	2444A00135	Mar. 27/98	Mar. 27/99	1 Year

NA: Not Applicable
NCR: No Cal Required

ANNEX A TEST METHODOLOGIES

NAME OF TEST: RF Power Output	PARA. NO.: 2.1046
-------------------------------	-------------------

Minimum Standard: Para. No.87.131. Variable as per authorized emissions.

Method Of Measurement:

Detachable Antenna:
The average power at antenna terminals is measured using an in-line power meter.

Integral Antenna:
If the antenna is not detachable from the circuit then the Power Output is derived from the radiated field strength of the fundamental emission by using the plane wave relation $GP/4\pi R^2 = E^2/120\pi$ and proceeding as follows:

$$P = \frac{E^2 R^2}{30G} = \frac{E^2 3^2}{30G}$$

where,

P = the equivalent isotropic radiated power in watts
E = the maximum measured field strength in V/m
R = the measurement range (3 meters)
G = the numeric gain of the transmit antenna in relation to an isotropic radiator

NAME OF TEST: Audio Frequency Response
PARA. NO.: 2.1047

Test Method: TIA/EIA-603
Minimum Standard: Not Applicable

NAME OF TEST: Audio Low-Pass Filter Frequency Response
PARA. NO.: 2.1047

Test Method: TIA/EIA-603

Minimum Standard: Not Applicable

NAME OF TEST: Modulation Limiting
PARA. NO.: 2.1047

Test Method: TIA/EIA-603
Minimum Standard: Para. No. 87.141
100%

NAME OF TEST: Occupied Bandwidth	
PARA. NO.: 2.1049	

Minimum Standard: Para. No. 87.139 (a).

Test Method:

RBW: 1% of emission bandwidth in 0 - 1 GHz range. 1 MHz at frequencies above 1 GHz.
VBW: $\Rightarrow$ RBW

NAME OF TEST: Field Strength of Spurious	PARA. NO.: 2.1053
--	-------------------

Minimum Standard: Para. No. 87.139(a)..

Calculation of Field Strength Limit

An example of attenuation requirement of $43 + 10 \log P$ is equivalent to $(5 \times 10^{-5} \text{ Watts})$ at the antenna terminal. We determine the field strength limit by using the plane wave relation.

$$GP/4\pi R^2 = E^2/120\pi$$

For emissions ≤ 1 GHz:

$$G = 1.64 \text{ (Dipole Gain)}$$

$$P = 10^{-5} \text{ Watts (Maximum spurious output power)}$$

$$R = 3\text{m (Measurement Distance)}$$

$$E = \frac{\sqrt{30GP}}{R} = E = \frac{\sqrt{30 \times 1.64 \times (5 \times 10^{-5})}}{3} = 0.0165 \text{ V/m} = 84.3 \text{ dB}\mu\text{V/m}$$

For emissions > 1 GHz:

$$G = 1 \text{ (Isotropic Gain)}$$

$$P = 1 \times 10^{-5} \text{ Watts (Maximum spurious output power)}$$

$$R = 3\text{m (Measurement Distance)}$$

$$E = 84.3 - 20 \log \sqrt{1.64} = 82.2 \text{ dB}\mu\text{V/m @ 3m}$$

NAME OF TEST: Frequency Stability	PARA. NO.: 2.1055
-----------------------------------	-------------------


Minimum Standard: Para. No. 87.133.

KTL Ottawa
FCC PART 87, SUBPART D
PROJECT NO.: 8R00399
ANNEX A
EQUIPMENT: VHF Transceiver
FCC ID: KVVW60439043


TEST DIAGRAMS

ANNEX B


Para. No. 2.1046 - R.F. Power Output

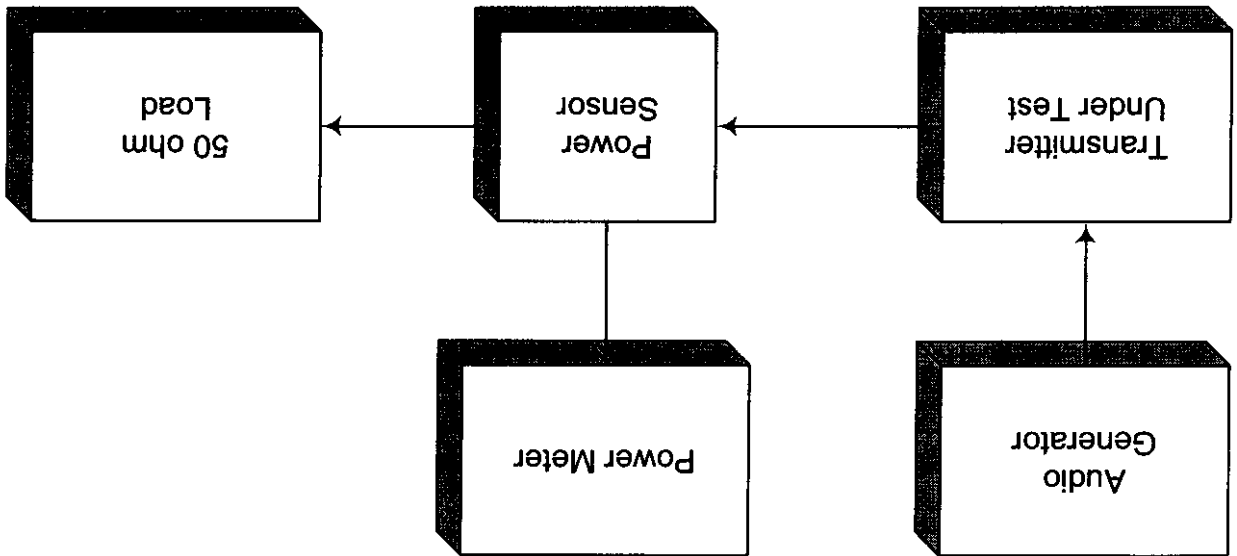


Para. No. 2.1047(a) - Audio Frequency Response

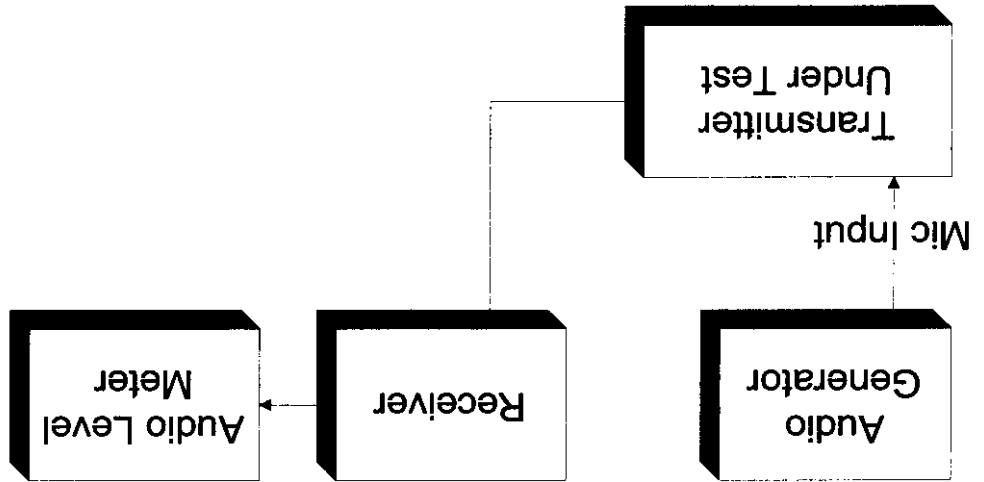


Para. No. 2.1047(b) - Modulation Limiting

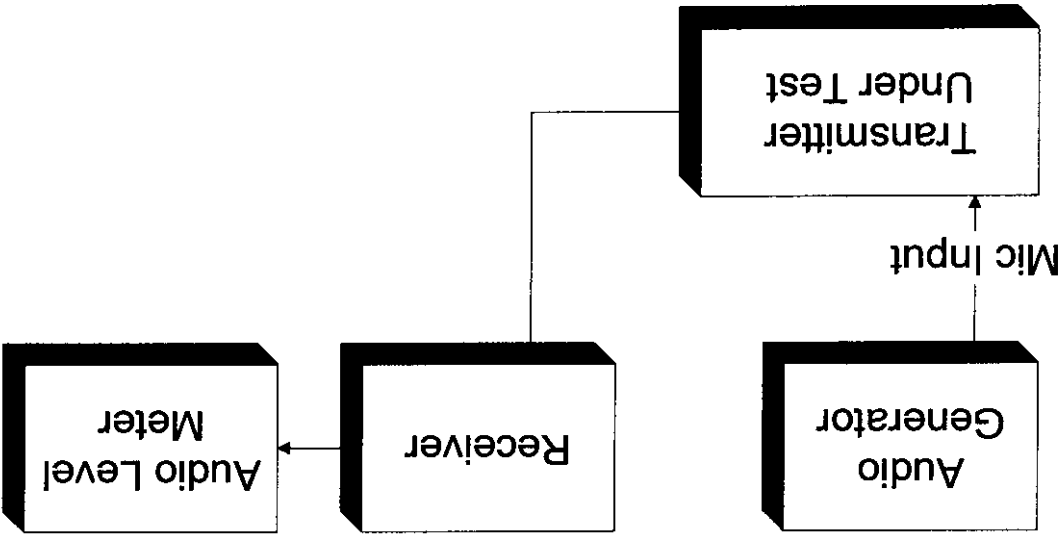


Para. No. 2.1049 - Occupied Bandwidth

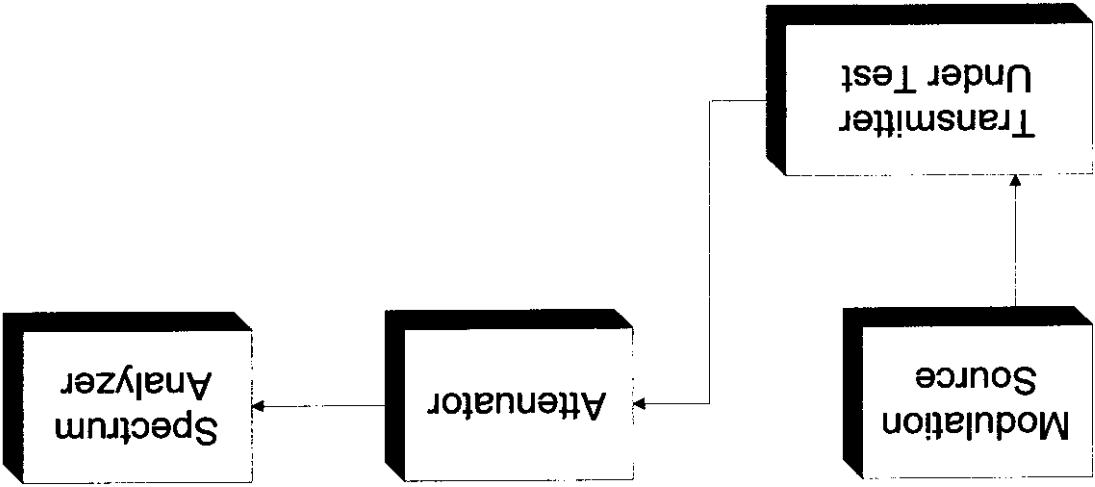

Para. No. 2.1051 - Spurious Emissions at Antenna Terminals

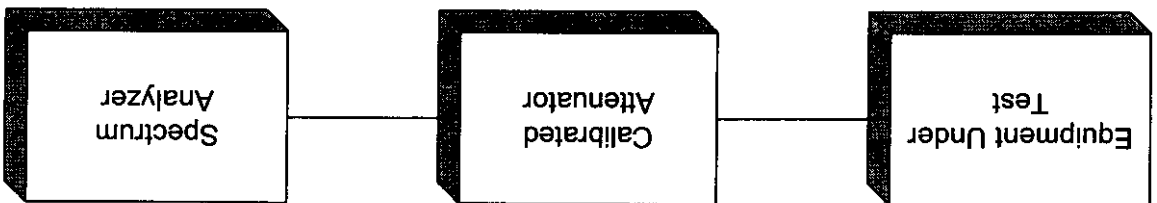

Para. No. 2.1053 - Field Strength of Spurious Radiation

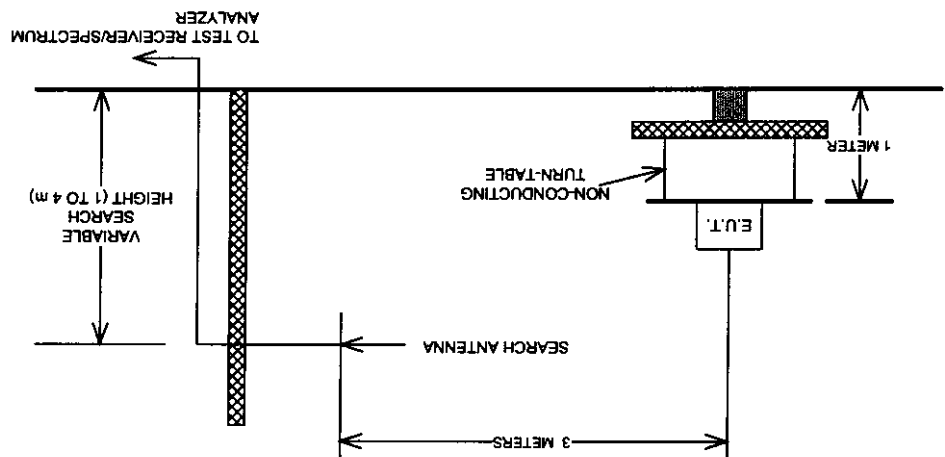

Para. No. 2.1055 - Frequency Stability

