

**CETECOM™****CETECOM ICT Services**  
consulting - testing - certification >>>

## TEST REPORT

Test report no.: 1-0529/15-02-06-A

Deutsche  
Akkreditierungsstelle  
D-PL-12076-01-00

### Testing laboratory

**CETECOM ICT Services GmbH**

Untertuerkheimer Strasse 6 – 10

66117 Saarbruecken / Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

Internet: <http://www.cetecom.com>e-mail: [ict@cetecom.com](mailto:ict@cetecom.com)**Accredited Testing Laboratory:**

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-00

### Applicant

**Sonova AG**

Laubisruetistrasse 28

8712 Staefa / SWITZERLAND

Phone: +41 5 89 28 01 01

Fax: +41 5 89 28 20 11

Contact: Valentina Shcherba

E-mail: [valentina.shcherba@sonova.com](mailto:valentina.shcherba@sonova.com)

Phone: +41 5 89 28 01 01

### Manufacturer

**Phonak AG**

Laubisruetistrasse 28

8712 Staefa / SWITZERLAND

### Test standard/s

47 CFR Part 15

Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

RSS - 210 Issue 8

Spectrum Management and Telecommunications Radio Standards Specification - Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment

RSS - 210 Issue 8  
Amendment 1RSS-210, Amendment 1 — Licence-Exempt, Low-Power Radio Apparatus  
Operating in the Television Bands (February 2015)

For further applied test standards please refer to section 3 of this test report.

### Test Item

**Kind of test item:** Wireless hearing aid**Model name:** Phonak Naída V90-SP**FCC ID:** KWC-BTEVSP**IC:** 2262A-BTEVSP

Frequency: 10.6 MHz

Technology tested: Base band modulation

Antenna: 1 integrated ferrite coil antenna (inductive)


Power supply: 1.45 V DC by Zinc-Air p13 type battery

Temperature range: 0°C to +35°C



This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

### Test report authorized:

Andreas Luckenbill  
Lab Manager  
Radio Communications & EMC

### Test performed:

Marco Bertolino  
Lab Manager  
Radio Communications & EMC

**1 Table of contents**

|         |                                                             |    |
|---------|-------------------------------------------------------------|----|
| 1       | Table of contents .....                                     | 2  |
| 2       | General information .....                                   | 3  |
| 2.1     | Notes and disclaimer .....                                  | 3  |
| 2.2     | Application details .....                                   | 3  |
| 3       | Test standard/s and references .....                        | 4  |
| 4       | Test environment .....                                      | 5  |
| 5       | Test item .....                                             | 5  |
| 5.1     | General description .....                                   | 5  |
| 5.2     | Additional information .....                                | 6  |
| 6       | Test laboratories sub-contracted .....                      | 6  |
| 7       | Description of the test setup .....                         | 6  |
| 7.1     | Shielded semi anechoic chamber .....                        | 7  |
| 7.2     | Shielded fully anechoic chamber .....                       | 8  |
| 7.3     | Conducted measurements .....                                | 9  |
| 8       | Sequence of testing .....                                   | 10 |
| 8.1     | Sequence of testing radiated spurious 9 kHz to 30 MHz ..... | 10 |
| 8.2     | Sequence of testing radiated spurious 30 MHz to 1 GHz ..... | 11 |
| 9       | Measurement uncertainty .....                               | 12 |
| 10      | Summary of measurement results .....                        | 13 |
| 11      | Additional comments .....                                   | 13 |
| 12      | Measurement results .....                                   | 14 |
| 12.1    | Occupied bandwidth .....                                    | 14 |
| 12.2    | Field strength of the fundamental .....                     | 16 |
| 12.3    | Field strength of the harmonics and spurious .....          | 17 |
| 12.4    | Receiver spurious emissions and cabinet radiations .....    | 20 |
| 13      | Observations .....                                          | 22 |
| Annex A | Document history .....                                      | 22 |
| Annex B | Further information .....                                   | 22 |
| Annex C | Accreditation Certificate .....                             | 23 |

## 2 General information

### 2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

The testing service provided by CETECOM ICT Services GmbH has been rendered under the current "General Terms and Conditions for CETECOM ICT Services GmbH".

CETECOM ICT Services GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM ICT Services GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM ICT Services GmbH test report include or imply any product or service warranties from CETECOM ICT Services GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM ICT Services GmbH.

All rights and remedies regarding vendor's products and services for which CETECOM ICT Services GmbH has prepared this test report shall be provided by the party offering such products or services and not by CETECOM ICT Services GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

**This test report replaces the test report with the number 1-0529/15-02-06 and dated 2016-01-15**

### 2.2 Application details

|                                    |            |
|------------------------------------|------------|
| Date of receipt of order:          | 2016-01-04 |
| Date of receipt of test item:      | 2016-01-05 |
| Start of test:                     | 2016-01-05 |
| End of test:                       | 2016-01-07 |
| Person(s) present during the test: | -/-        |

### 3 Test standard/s and references

| Test standard                 | Date          | Description                                                                                                                                               |
|-------------------------------|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| 47 CFR Part 15                | -/-           | Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices                                                                 |
| RSS - 210 Issue 8             | December 2010 | Spectrum Management and Telecommunications Radio Standards Specification - Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment     |
| RSS - 210 Issue 8 Amendment 1 | February 2015 | RSS-210, Amendment 1 — Licence-Exempt, Low-Power Radio Apparatus Operating in the Television Bands (February 2015)                                        |
| RSS - Gen Issue 4             | November 2014 | Spectrum Management and Telecommunications Radio Standards Specifications - General Requirements and Information for the Certification of Radio Apparatus |

| Guidance         | Version | Description                                                                                                                                                         |
|------------------|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ANSI C63.4-2014  | -/-     | American national standard for methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz |
| ANSI C63.10-2013 | -/-     | American national standard of procedures for compliance testing of unlicensed wireless devices                                                                      |

## 4 Test environment

|                           |   |                                     |                                                                                                                                      |
|---------------------------|---|-------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| Temperature               | : | $T_{nom}$<br>$T_{max}$<br>$T_{min}$ | +22 °C during room temperature tests<br>No tests under extreme conditions required.<br>No tests under extreme conditions required.   |
| Relative humidity content | : |                                     | 47 %                                                                                                                                 |
| Barometric pressure       | : |                                     | not relevant for this kind of testing                                                                                                |
| Power supply              | : | $V_{nom}$<br>$V_{max}$<br>$V_{min}$ | 1.45 V DC by Zinc-Air p13 type battery<br>No tests under extreme conditions required.<br>No tests under extreme conditions required. |

## 5 Test item

### 5.1 General description

|                            |   |                                                                                                                                                 |
|----------------------------|---|-------------------------------------------------------------------------------------------------------------------------------------------------|
| Kind of test item          | : | Wireless hearing aid                                                                                                                            |
| Type identification        | : | Phonak Naída V90-SP                                                                                                                             |
| Equivalent variants        | : | Please take a look at the external customer declaration!<br>ProductEqualityDeclaration_PhonakNaídaV for V90/70/50/30-SP                         |
| HMN                        | : | -/-                                                                                                                                             |
| PMN                        | : | Phonak Naída V-SP                                                                                                                               |
| HVIN                       | : | Phonak Naída V90-SP<br>Phonak Naída V70-SP<br>Phonak Naída V50-SP<br>Phonak Naída V30-SP                                                        |
| FVIN                       | : | -/-                                                                                                                                             |
| S/N serial number          | : | Radiated unit 1 (transmitter mode): 1546 H06RP<br>Radiated unit 2 (transmitter mode): 1546 H06RN<br>Radiated unit 3 (receiver mode): 1546 H06RM |
| HW hardware status         | : | Naída V90-SP: 050-0245-xx<br>xx = digits from 0-9 for color identification                                                                      |
| SW software status         | : | Target 4.3                                                                                                                                      |
| FW firmware version        | : | Naída V90-SP: 067-1067<br>Naída V70-SP: 067-1066<br>Naída V50-SP: 067-1065<br>Naída V30-SP: 067-1064                                            |
| Frequency band             | : | 10.2 MHz to 11.0 MHz<br>10.6 MHz (carrier frequency)                                                                                            |
| Type of radio transmission | : | Base band modulation                                                                                                                            |
| Use of frequency spectrum  | : |                                                                                                                                                 |
| Type of modulation         | : | 8-DPSK (DQPSK)                                                                                                                                  |
| Number of channels         | : | 1                                                                                                                                               |
| Antenna                    | : | 1 integrated ferrite coil antenna (inductive)                                                                                                   |
| Power supply               | : | 1.45 V DC by Zinc-Air p13 type battery                                                                                                          |
| Temperature range          | : | 0°C to +35°C                                                                                                                                    |

## 5.2 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup- and EUT-photos are included in test report:      1-0529/15-02-01\_AnnexA  
                                                                                                  1-0529/15-02-01\_AnnexB  
                                                                                                  1-0529/15-02-01\_AnnexD

## 6 Test laboratories sub-contracted

None

## 7 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

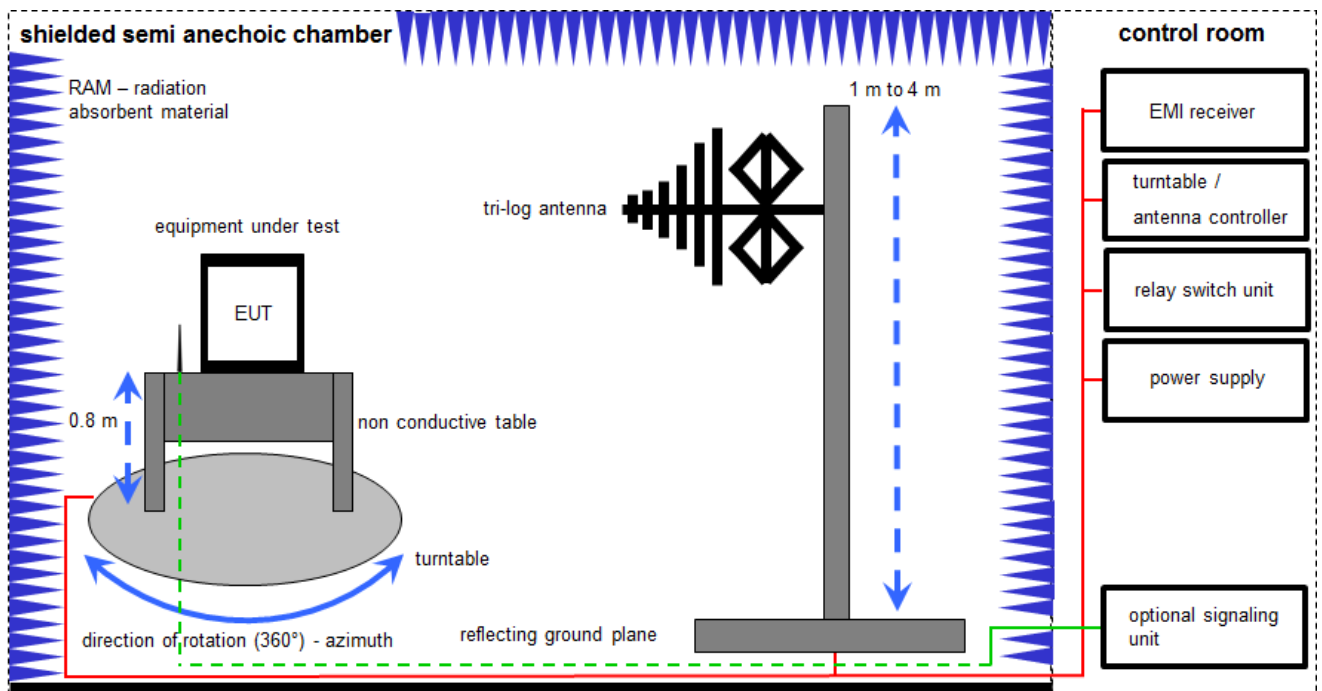
In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

### **Agenda:** Kind of Calibration

|      |                                            |     |                                                      |
|------|--------------------------------------------|-----|------------------------------------------------------|
| k    | calibration / calibrated                   | EK  | limited calibration                                  |
| ne   | not required (k, ev, izw, zw not required) | zw  | cyclical maintenance (external cyclical maintenance) |
| ev   | periodic self verification                 | izw | internal cyclical maintenance                        |
| Ve   | long-term stability recognized             | g   | blocked for accredited testing                       |
| vlk! | Attention: extended calibration interval   |     |                                                      |
| NK!  | Attention: not calibrated                  | *)  | next calibration ordered / currently in progress     |

## 7.1 Shielded semi anechoic chamber

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are confirmed with specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.



Measurement distance: tri-log antenna 10 meter

$FS = UR + CL + AF$

(FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)

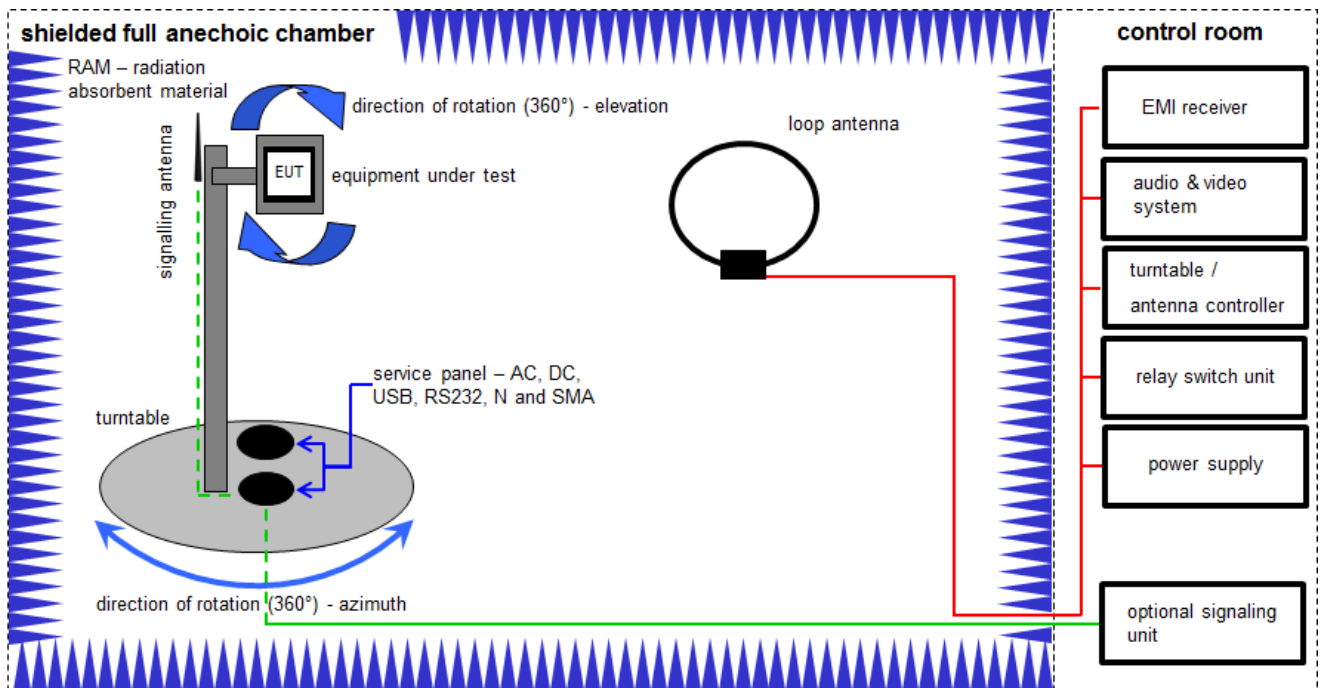
Example calculation:

$FS [dB\mu V/m] = 12.35 [dB\mu V/m] + 1.90 [dB] + 16.80 [dB/m] = 31.05 [dB\mu V/m] (35.69 \mu V/m)$

### Equipment table:

| No. | Lab / Item | Equipment                                    | Type         | Manufacturer | Serial No. | INV. No Cetecom | Kind of Calibration | Last Calibration | Next Calibration |
|-----|------------|----------------------------------------------|--------------|--------------|------------|-----------------|---------------------|------------------|------------------|
| 1   | A          | EMI Test Receiver                            | ESCI 3       | R&S          | 100083     | 300003312       | k                   | 26.01.2015       | 26.01.2016       |
| 2   | A          | Antenna Tower                                | Model 2175   | ETS-Lindgren | 64762      | 300003745       | izw                 | -/-              | -/-              |
| 3   | A          | Positioning Controller                       | Model 2090   | ETS-Lindgren | 64672      | 300003746       | izw                 | -/-              | -/-              |
| 4   | A          | Turntable Interface-Box                      | Model 105637 | ETS-Lindgren | 44583      | 300003747       | izw                 | -/-              | -/-              |
| 5   | A          | TRILOG Broadband Test-Antenna 30 MHz - 3 GHz | VULB9163     | Schwarzbeck  | 295        | 300003787       | k                   | 22.04.2014       | 22.04.2016       |

## 7.2 Shielded fully anechoic chamber



Measurement distance: loop antenna 3 meter / 1 meter

$$FS = UR + CA + AF$$

(FS-field strength; UR-voltage at the receiver; CA-loss of the signal path; AF-antenna factor)

Example calculation:

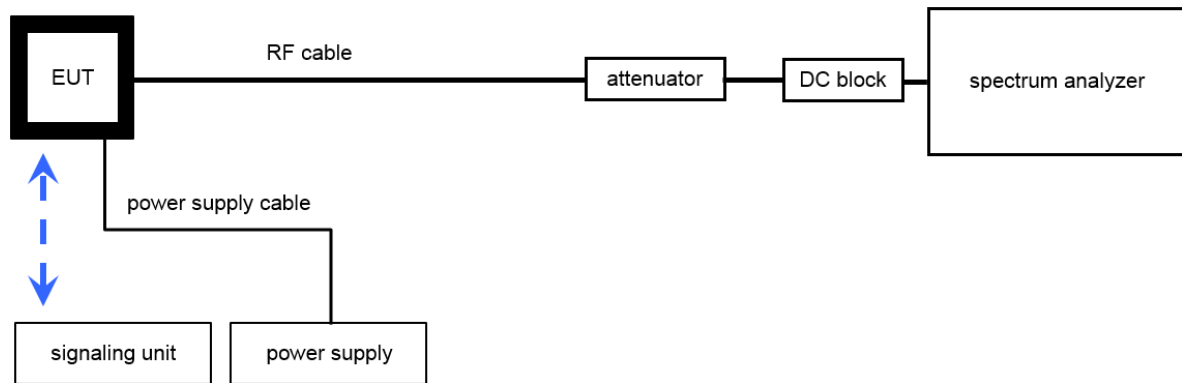
$$FS [dB\mu V/m] = 40.0 [dB\mu V/m] + (-35.8) [dB] + 32.9 [dB/m] = 37.1 [dB\mu V/m] (71.61 \mu V/m)$$

### Equipment table:

| No. | Lab / Item | Equipment                            | Type     | Manufacturer         | Serial No. | INV. No Cetecom | Kind of Calibration | Last Calibration | Next Calibration |
|-----|------------|--------------------------------------|----------|----------------------|------------|-----------------|---------------------|------------------|------------------|
| 1   | A          | Anechoic chamber                     | FAC 3/5m | MWB / TDK            | 87400/02   | 300000996       | ev                  | -/-              | -/-              |
| 2   | A          | Switch / Control Unit                | 3488A    | HP                   |            | 300000199       | ne                  | -/-              | -/-              |
| 3   | A          | Active Loop Antenna 10 kHz to 30 MHz | 6502     | EMCO/2               | 8905-2342  | 300000256       | k                   | 24.06.2015       | 24.06.2017       |
| 4   | A          | 4U RF Switch Platform                | L4491A   | Agilent Technologies | MY50000037 | 300004509       | ne                  | -/-              | -/-              |
| 5   | A          | EMI Test Receiver 9kHz-26,5GHz       | ESR26    | R&S                  | 101376     | 300005063       | k                   | 04.09.2015       | 04.09.2016       |

### 7.3 Conducted measurements

#### Conducted measurements normal conditions



OP = AV + CA  
 (OP-output power; AV-analyzer value; CA-loss signal path)

#### Example calculation:

OP [dBm] = 6.0 [dBm] + 11.7 [dB] = 17.7 [dBm] (58.88 mW)

#### Equipment table:

| No. | Lab / Item | Equipment                                         | Type              | Manufacturer   | Serial No.       | INV. No Cetecom | Kind of Calibration | Last Calibration | Next Calibration |
|-----|------------|---------------------------------------------------|-------------------|----------------|------------------|-----------------|---------------------|------------------|------------------|
| 1   | A          | RF-Cable                                          | ST18/SMAM/SMAM/72 | Huber & Suhner | Batch no. 699714 | 400001184       | ev                  | -/-              | -/-              |
| 2   | A          | DC-Blocker 0.1-40 GHz                             | 8141A             | Inmet          | Batch no. 699714 | 400001185       | ev                  | -/-              | -/-              |
| 3   | A          | EMI Test Receiver 9 kHz - 3 GHz incl. Preselector | ESPI3             | R&S            | 101713           | 300004059       | k                   | 23.01.2015       | 23.01.2016       |

## 8 Sequence of testing

### 8.1 Sequence of testing radiated spurious 9 kHz to 30 MHz

#### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a 2-axis positioner with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

#### Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1.5 m.
- At each turntable position the analyzer sweeps with positive-peak detector to find the maximum of all emissions.

#### Final measurement

- Identified emissions during the premeasurement are maximized by the software by rotating the turntable from 0° to 360°. In case of the 2-axis positioner is used the elevation axis is also rotated from 0° to 360°.
- The final measurement is done in the position (turntable and elevation) causing the highest emissions with quasi-peak (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. A plot with the graph of the premeasurement and the limit is stored.

## 8.2 Sequence of testing radiated spurious 30 MHz to 1 GHz

### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 10 m or 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

### Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 m to 3 m.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

### Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximize the peaks by changing turntable position  $\pm 45^\circ$  and antenna height between 1 and 4 m.
- The final measurement is done with quasi-peak detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

**9 Measurement uncertainty**

| Measurement uncertainty                            |             |
|----------------------------------------------------|-------------|
| Test case                                          | Uncertainty |
| Occupied bandwidth                                 | ± used RBW  |
| Field strength of the fundamental                  | ± 3 dB      |
| Field strength of the harmonics and spurious       | ± 3 dB      |
| Receiver spurious emissions and cabinet radiations | ± 3 dB      |
| Conducted limits                                   | ± 2.6 dB    |

## 10 Summary of measurement results

|                                     |                                                                                                                       |
|-------------------------------------|-----------------------------------------------------------------------------------------------------------------------|
| <input checked="" type="checkbox"/> | No deviations from the technical specifications were ascertained                                                      |
| <input type="checkbox"/>            | There were deviations from the technical specifications ascertained                                                   |
| <input type="checkbox"/>            | This test report is only a partial test report. The content and verdict of the performed test cases are listed below. |

| TC Identifier | Description                                       | Verdict    | Date       | Remark |
|---------------|---------------------------------------------------|------------|------------|--------|
| RF-Testing    | CFR Part 15<br>RSS 210 Issue 8<br>RSS Gen Issue 4 | See table! | 2016-02-03 | -/-    |

| Test specification clause          | Test case                                          | Temperature conditions | Power source conditions | C                                   | NC                       | NA                                  | NP                       | Remark                |
|------------------------------------|----------------------------------------------------|------------------------|-------------------------|-------------------------------------|--------------------------|-------------------------------------|--------------------------|-----------------------|
| RSS Gen Issue 4 (6.6)              | Occupied bandwidth                                 | Nominal                | Nominal                 | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/> | -/-                   |
| § 15.209                           | Field strength of the fundamental                  | Nominal                | Nominal                 | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/> | -/-                   |
| § 15.209<br>RSS Gen Issue 4 (6.13) | Field strength of the harmonics and spurious       | Nominal                | Nominal                 | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/> | -/-                   |
| § 15.109                           | Receiver spurious emissions and cabinet radiations | Nominal                | Nominal                 | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/> | -/-                   |
| §15.107<br>§15.207                 | Conducted limits                                   | Nominal                | Nominal                 | <input type="checkbox"/>            | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | Battery powered only! |

**Note:** NA = Not applicable; NP = Not performed; C = Complaint; NC = Not complaint

## 11 Additional comments

Reference documents: Customer Questionnaire 1-0529/15\_02  
ProductEqualityDeclaration\_PhonakNaidaV

Special test descriptions: None

Configuration descriptions: None

## 12 Measurement results

### 12.1 Occupied bandwidth

#### Measurement:

The emission bandwidth (x dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated x dB below the maximum in-band spectral density of the modulated signal.

| Measurement parameters   |                                     |
|--------------------------|-------------------------------------|
| Detector:                | Peak                                |
| Resolution bandwidth:    | 1 % – 5 % of the occupied bandwidth |
| Video bandwidth:         | ≥ 3x RBW                            |
| Trace mode:              | Max hold                            |
| Analyser function:       | 99 % power function                 |
| Used test setup:         | See sub clause 7.3 – A              |
| Measurement uncertainty: | See sub clause 8                    |

#### Limit:

| IC                                      |
|-----------------------------------------|
| for RSP-100 test report coversheet only |

#### Result:

| 99% emission bandwidth |
|------------------------|
| 496.25 kHz             |



## 12.2 Field strength of the fundamental

### Measurement:

The maximum detected field strength for the carrier signal.

| Measurement parameters   |                                |
|--------------------------|--------------------------------|
| Detector:                | Quasi peak / peak (worst case) |
| Resolution bandwidth:    | 9 kHz                          |
| Video bandwidth:         | $\geq 3 \times \text{RBW}$     |
| Trace mode:              | Max hold                       |
| Used test setup          | See sub clause 7.2 – A         |
| Measurement uncertainty: | See sub clause 8               |

### Limit:

| FCC & IC        |                               |                          |
|-----------------|-------------------------------|--------------------------|
| Frequency (MHz) | Field strength (dB $\mu$ V/m) | Measurement distance (m) |
| 1.705 – 30.0    | 30                            | 30                       |

### Recalculation:

| According to ANSI C63.10 |                                                                                                                                                                                 |                  |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| Frequency                | Formula                                                                                                                                                                         | Correction value |
| 10.6 MHz                 | $FS_{\text{limit}} = FS_{\text{max}} - 40 \log\left(\frac{d_{\text{nearfield}}}{d_{\text{measure}}}\right) - 20 \log\left(\frac{d_{\text{limit}}}{d_{\text{nearfield}}}\right)$ | -42.62           |

### Result:

| Field strength of the fundamental              |                   |                  |
|------------------------------------------------|-------------------|------------------|
| Frequency                                      | 10.6 MHz          |                  |
| Distance                                       | @ 1 m             | @ 30 m           |
| Measured / calculated value (peak measurement) | 49.3 dB $\mu$ V/m | 6.7 dB $\mu$ V/m |
| Measured / calculated value (QP measurement)   | 42.8 dB $\mu$ V/m | 0.2 dB $\mu$ V/m |

### 12.3 Field strength of the harmonics and spurious

#### Measurement:

The maximum detected field strength for the harmonics and spurious.

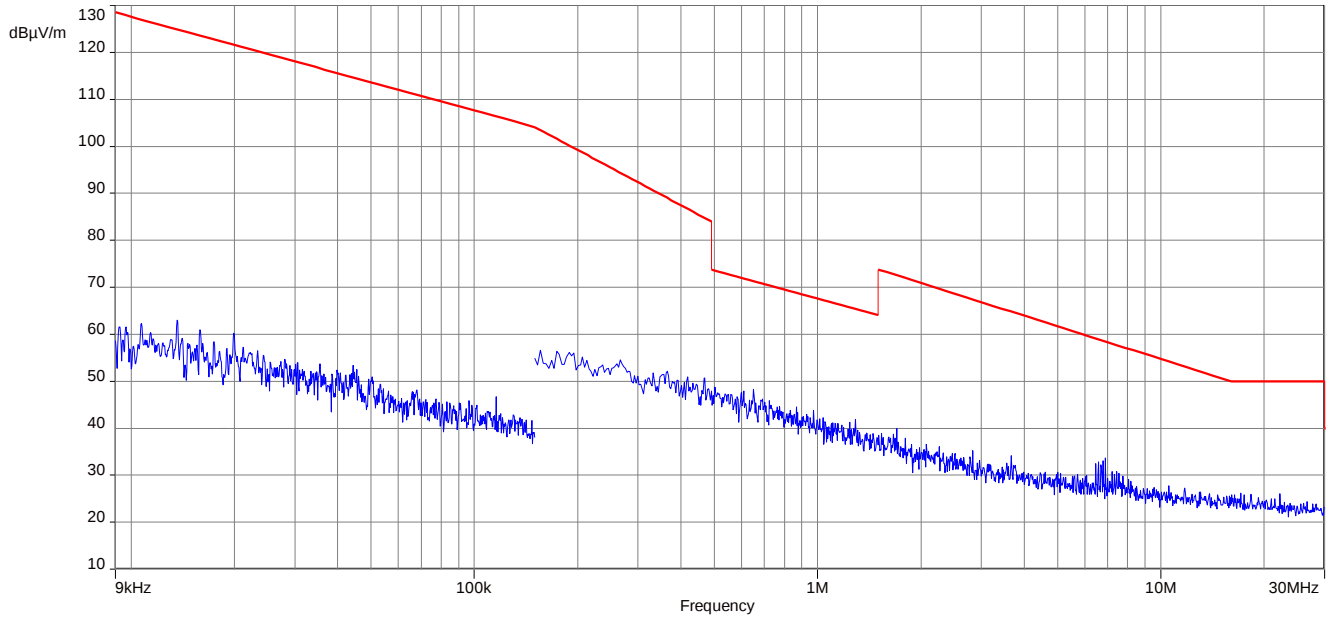
| Measurement parameters   |                                                                                    |
|--------------------------|------------------------------------------------------------------------------------|
| Detector:                | Quasi peak / average or peak (worst case – pre-scan)                               |
| Resolution bandwidth:    | F < 150 kHz: 200 Hz<br>150 kHz < F < 30 MHz: 9 kHz<br>30 MHz < F < 1 GHz: 120 kHz  |
| Video bandwidth:         | F < 150 kHz: 1 kHz<br>150 kHz < F < 30 MHz: 100 kHz<br>30 MHz < F < 1 GHz: 300 kHz |
| Trace mode:              | Max hold                                                                           |
| Used test setup:         | 9 kHz to 30 MHz: see sub clause 7.2 – A<br>30 MHz to 1 GHz: see sub clause 7.1 – A |
| Measurement uncertainty: | See sub clause 8                                                                   |

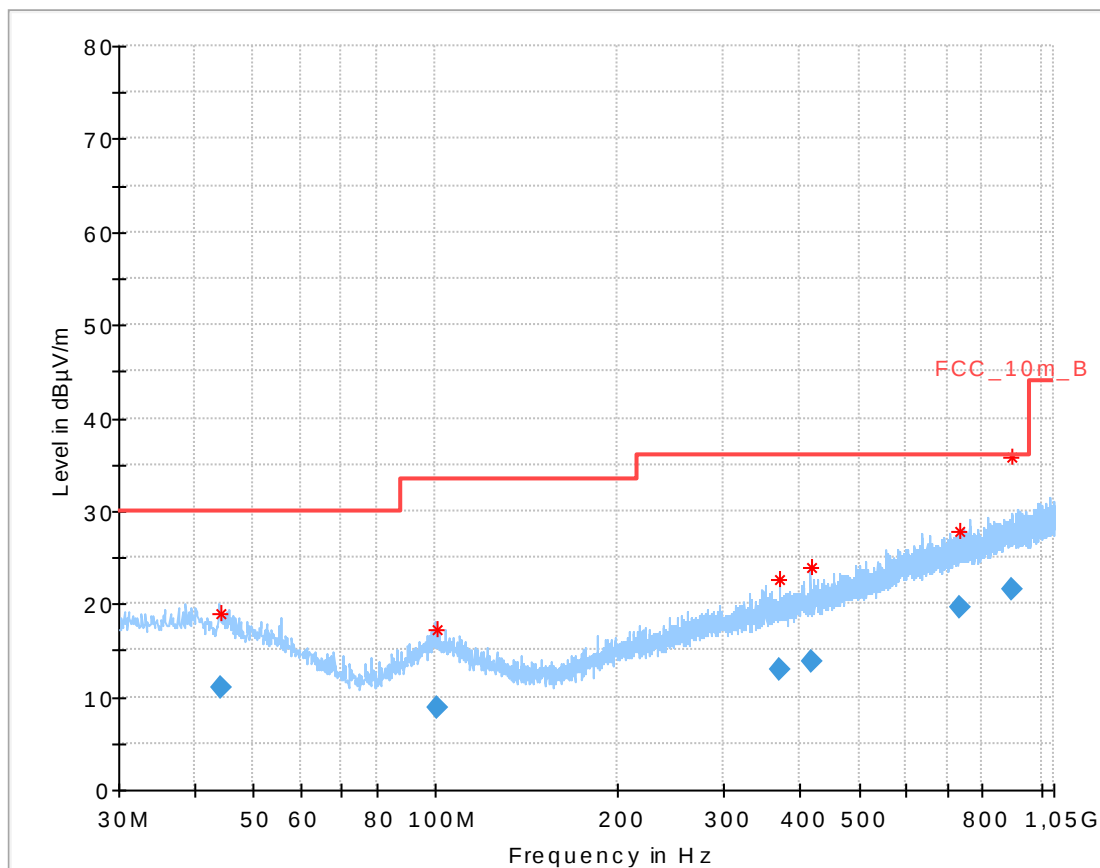
#### Limit:

| FCC & IC        |                         |                          |
|-----------------|-------------------------|--------------------------|
| Frequency (MHz) | Field strength (dBμV/m) | Measurement distance (m) |
| 0.009 – 0.490   | 2400/F(kHz)             | 300                      |
| 0.490 – 1.705   | 24000/F(kHz)            | 30                       |
| 1.705 – 30      | 30 (29.5 dBμV/m)        | 30                       |
| 30 – 88         | 100 (40 dBμV/m)         | 3                        |
| 88 – 216        | 150 (43.5 dBμV/m)       | 3                        |
| 216 – 960       | 200 (46 dBμV/m)         | 3                        |

#### Result:

| Detected emissions                                                                    |          |                            |                |
|---------------------------------------------------------------------------------------|----------|----------------------------|----------------|
| Frequency (MHz)                                                                       | Detector | Resolution bandwidth (kHz) | Detected value |
| All detected peak emissions below 30 MHz are more than 20 dB below the average limit. |          |                            |                |
| For emissions above 30 MHz, please look at the table below the 1 GHz plot.            |          |                            |                |
|                                                                                       |          |                            |                |

**Plots:****Plot 1: 9 kHz – 30 MHz, magnetic emissions**

**Plot 2:** 30 MHz – 1 GHz, vertical and horizontal polarisation**Final result:**

| Frequency (MHz) | QuasiPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|------------|
| 44.194350       | 11.02              | 30.00          | 18.98       | 1000.0          | 120.000         | 101.0       | V   | 322.0         | 13.9       |
| 100.839450      | 8.81               | 33.50          | 24.69       | 1000.0          | 120.000         | 101.0       | V   | 70.0          | 12.1       |
| 370.375050      | 12.98              | 36.00          | 23.02       | 1000.0          | 120.000         | 170.0       | H   | 28.0          | 16.4       |
| 416.394450      | 13.77              | 36.00          | 22.23       | 1000.0          | 120.000         | 170.0       | V   | 307.0         | 17.1       |
| 732.049500      | 19.58              | 36.00          | 16.42       | 1000.0          | 120.000         | 170.0       | V   | 230.0         | 22.3       |
| 897.436800      | 21.51              | 36.00          | 14.49       | 1000.0          | 120.000         | 170.0       | V   | 187.0         | 24.1       |

## 12.4 Receiver spurious emissions and cabinet radiations

### Measurement:

The maximum detected field strength for the spurious.

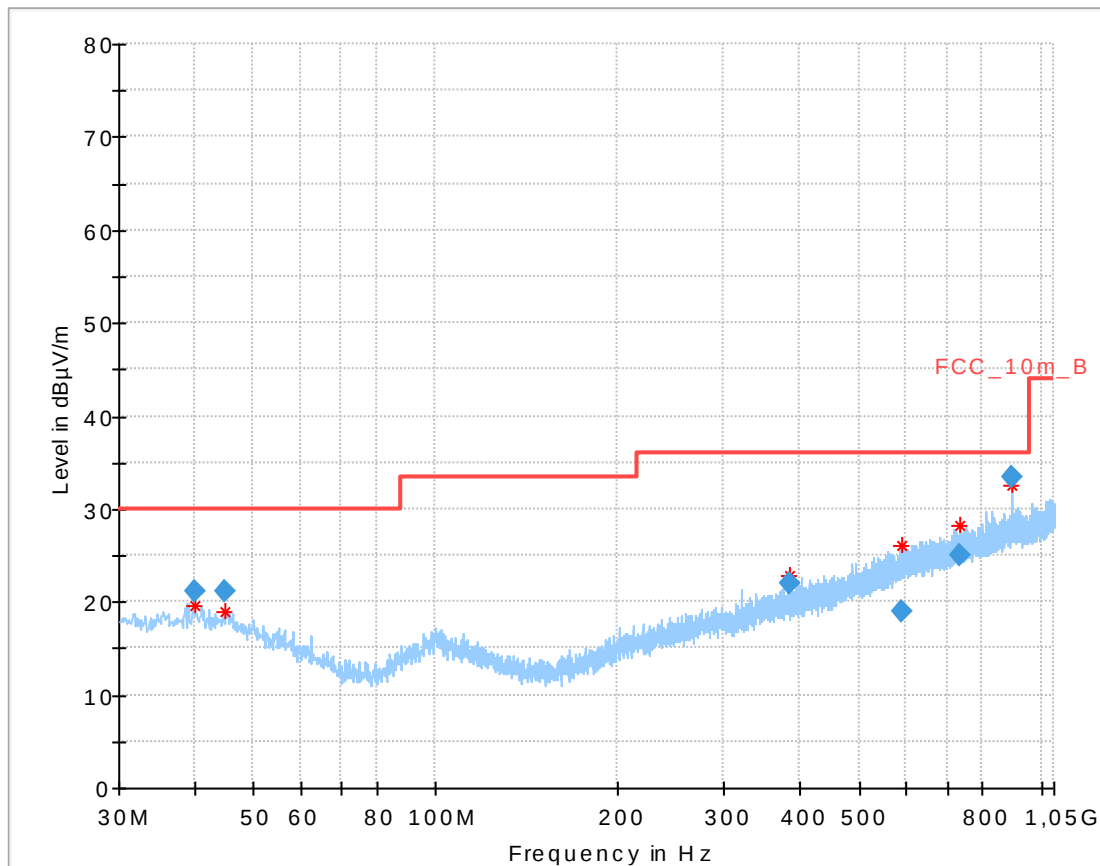
| Measurement parameters   |                                                                                    |
|--------------------------|------------------------------------------------------------------------------------|
| Detector:                | Quasi peak / average or peak (worst case – pre-scan)                               |
| Resolution bandwidth:    | F < 150 kHz: 200 Hz<br>150 kHz < F < 30 MHz: 9 kHz<br>30 MHz < F < 1 GHz: 120 kHz  |
| Video bandwidth:         | F < 150 kHz: 1 kHz<br>150 kHz < F < 30 MHz: 100 kHz<br>30 MHz < F < 1 GHz: 300 kHz |
| Trace mode:              | Max hold                                                                           |
| Used test setup          | 30 MHz to 1 GHz: see sub clause 7.1 - A                                            |
| Measurement uncertainty: | See sub clause 8                                                                   |

### Limit:

| FCC & IC        |                               |                          |
|-----------------|-------------------------------|--------------------------|
| Frequency (MHz) | Field strength (dB $\mu$ V/m) | Measurement distance (m) |
| 30 – 88         | 100 (40 dB $\mu$ V/m)         | 3                        |
| 88 – 216        | 150 (43.5 dB $\mu$ V/m)       | 3                        |
| 216 – 960       | 200 (46 dB $\mu$ V/m)         | 3                        |

### Result:

| Detected emissions                             |          |                            |                |
|------------------------------------------------|----------|----------------------------|----------------|
| Frequency (MHz)                                | Detector | Resolution bandwidth (kHz) | Detected value |
| Please look at the table below the 1 GHz plot. |          |                            |                |
|                                                |          |                            |                |
|                                                |          |                            |                |

**Plots:****Plot 1:** 30 MHz – 1 GHz, vertical and horizontal polarisation**Final result:**

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|------------|
| 39.976350       | 21.07              | 30.00          | 8.93        | 1000.0          | 120.000         | 98.0        | V   | 137.0         | 14.0       |
| 44.749800       | 21.10              | 30.00          | 8.90        | 1000.0          | 120.000         | 170.0       | H   | 71.0          | 13.9       |
| 384.391800      | 21.94              | 36.00          | 14.06       | 1000.0          | 120.000         | 170.0       | V   | 52.0          | 16.6       |
| 588.409800      | 18.90              | 36.00          | 17.10       | 1000.0          | 120.000         | 170.0       | H   | 24.0          | 20.4       |
| 735.256350      | 24.99              | 36.00          | 11.01       | 1000.0          | 120.000         | 98.0        | H   | 90.0          | 22.4       |
| 897.337800      | 33.46              | 36.00          | 2.54        | 1000.0          | 120.000         | 170.0       | H   | 114.0         | 24.1       |

### 13 Observations

No observations except those reported with the single test cases have been made.

### Annex A Document history

| Version | Applied changes  | Date of release |
|---------|------------------|-----------------|
|         | Initial release  | 2016-01-15      |
| A       | New manufacturer | 2016-02-03      |

### Annex B Further information

#### Glossary

|          |   |                                                |
|----------|---|------------------------------------------------|
| AVG      | - | Average                                        |
| DUT      | - | Device under test                              |
| EMC      | - | Electromagnetic Compatibility                  |
| EN       | - | European Standard                              |
| EUT      | - | Equipment under test                           |
| ETSI     | - | European Telecommunications Standard Institute |
| FCC      | - | Federal Communication Commission               |
| FCC ID   | - | Company Identifier at FCC                      |
| HW       | - | Hardware                                       |
| IC       | - | Industry Canada                                |
| Inv. No. | - | Inventory number                               |
| N/A      | - | Not applicable                                 |
| PP       | - | Positive peak                                  |
| QP       | - | Quasi peak                                     |
| S/N      | - | Serial number                                  |
| SW       | - | Software                                       |
| PMN      |   | Product marketing name                         |
| HMN      |   | Host marketing name                            |
| HVIN     |   | Hardware version identification number         |
| FVIN     |   | Firmware version identification number         |

## Annex C Accreditation Certificate

Front side of certificate

Back side of certificate



Deutsche Akkreditierungsstelle GmbH

Befähigte gemäß § 8 Absatz 1 AkkStelleG i.V.m. § 1 Absatz 1 AkkStelleGBV  
Unterzeichnerin der Multilateralen Abkommen  
von EA, ILAC und IAF zur gegenseitigen Anerkennung

### Akkreditierung



Die Deutsche Akkreditierungsstelle GmbH bestätigt hiermit, dass das Prüflaboratorium

**CETECOM ICT Services GmbH**  
Untertürkheimer Straße 6-10, 66117 Saarbrücken

die Kompetenz nach DIN EN ISO/IEC 17025:2005 besitzt, Prüfungen in folgenden Bereichen  
durchzuführen:

Drahtgebundene Kommunikation einschließlich xDSL  
VoIP und DECT  
Akustik  
Funk einschließlich WLAN  
Short Range Devices (SRD)  
RFID  
WiMax und Richtfunk  
Mobilfunk (GSM / DCS, Over the Air (OTA) Performance)  
Elektromagnetische Verträglichkeit (EMV) einschließlich Automotive  
Produktsicherheit  
SAR und Hearing Aid Compatibility (HAC)  
Umweltsimulation  
Smart Card Terminals  
Bluetooth  
Wi-Fi Services

Die Akkreditierungsurkunde gilt nur in Verbindung mit dem Bescheid vom 07.03.2014 mit der  
Akkreditierungsnummer D-PL-12076-01 und ist gültig 17.01.2018. Sie besteht aus diesem Deckblatt, der  
Rückseite des Deckblatts und der folgenden Anlage mit insgesamt 77 Seiten.

Registrierungsnummer der Urkunde: D-PL-12076-01-00

Frankfurt am Main, 07.03.2014

Datei: 030004 auf der Rückseite

Im Auftrag (D-PL-12076-01) 07.03.2014  
Akkreditierungsstelle

Deutsche Akkreditierungsstelle GmbH

Standort Berlin  
Spittelmarkt 10  
10117 Berlin

Standort Frankfurt am Main  
Gartenstraße 6  
60591 Frankfurt am Main

Standort Braunschweig  
Bundesallee 100  
38115 Braunschweig

Die auszugsweise Veröffentlichung der Akkreditierungsurkunde bedarf der vorherigen schriftlichen  
Zustimmung der Deutsche Akkreditierungsstelle GmbH (DAkkS). Ausgenommen davon ist die separate  
Weiterverbreitung des Deckblattes durch die uneingeschränkte Konformitätsbewertungsstelle in  
unveränderter Form.

Es darf nicht der Anschein erweckt werden, dass sich die Akkreditierung auch auf Bereiche erstreckt,  
die über den durch die DAkkS bestätigten Akkreditierungsbereich hinausgehen.

Die Akkreditierung erfolgte gemäß des Gesetzes über die Akkreditierungsstellen (AkkStelleG) vom  
31. Juli 2009 (BGBl. I S. 2675) sowie der Verordnung (EG) Nr. 765/2008 des Europäischen Parlaments  
und des Rates vom 9. Juli 2008 über die Vorschriften für die Akkreditierung und Marktüberwachung  
im Zusammenhang mit der Vermarktung von Produkten (Abt. L 218 vom 9. Juli 2008, S. 30).  
Die DAkkS ist Unterzeichnerin der Multilateralen Abkommen zur gegenseitigen Anerkennung der  
European Cooperation for Accreditation (EA), des International Accreditation Forum (IAF) und  
der International Laboratory Accreditation Cooperation (ILAC). Die Unterzeichner dieser Abkommen  
erkennen ihre Akkreditierungen gegenseitig an.

Der aktuelle Stand der Mitgliedschaft kann folgenden Webseiten entnommen werden:

EA: [www.european-accreditation.org](http://www.european-accreditation.org)ILAC: [www.ilac.org](http://www.ilac.org)IAF: [www.iaf.eu](http://www.iaf.eu)