

Date: 2003-12-23

# **TEST REPORT**

Page 1 of 18

No.: HM112159

## **FCC PART 15 SUBPART C CERTIFICATION REPORT**

### **FOR LOW POWER TRANSMITTER**

#### **TEST REPORT No.: HM112159**

Equipment Under Test [EUT]:

Model Number:

Applicant:

FCC ID:

Walkie Talkies

99130

Supreme Toys (Hong Kong) Ltd.

L2599130

Date: 2003-12-23

# **TEST REPORT**

Page 2 of 18

No.: HM112159

## **CONTENT:**

|                   |                                    |                  |
|-------------------|------------------------------------|------------------|
| Cover             | Page 1 of 18                       |                  |
| Content           | Page 2-3 of 18                     |                  |
| Conclusion        | Page 4 of 18                       |                  |
| <b><u>1.0</u></b> | <b><u>General Details</u></b>      |                  |
| 1.1               | Test Laboratory                    | Page 5 of 18     |
| 1.2               | Applicant Details                  | Page 5 of 18     |
|                   | Applicant                          |                  |
|                   | HKSTC Code Number for Applicant    |                  |
|                   | Manufacturer                       |                  |
| 1.3               | Equipment Under Test [EUT]         | Page 6 of 18     |
|                   | Description of EUT operation       |                  |
| 1.4               | Date of Order                      | Page 6 of 18     |
| 1.5               | Submitted Sample                   | Page 6 of 18     |
| 1.6               | Test Duration                      | Page 6 of 18     |
| 1.7               | Country of Origin                  | Page 6 of 18     |
| 1.8               | Additional Information of EUT      | Page 7 of 18     |
| <b><u>2.0</u></b> | <b><u>Technical Details</u></b>    |                  |
| 2.1               | Investigations Requested           | Page 8 of 18     |
| 2.2               | Test Standards and Results Summary | Page 8 of 18     |
| <b><u>3.0</u></b> | <b><u>Test Results</u></b>         |                  |
| 3.1               | Emission                           | Page 9-13 of 18  |
| 3.2               | Bandwidth Measurement              | Page 14-15 of 18 |

Date: 2003-12-23

No.: HM112159

## **TEST REPORT**

Page 3 of 18

### **Appendix A**

List of Measurement Equipment

Page 16 of 18

### **Appendix B**

Photographs

Page 17-18 of 18

Date: 2003-12-23

## **TEST REPORT**

Page 4 of 18

No.: HM112159

### **CONCLUSION**

The submitted product was deemed to have COMPLIED with the requirements of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this Test Report.

---

Verified by  
Ivan Toa

---

K C Lee  
for Chief Executive

Date: 2003-12-23

# **TEST REPORT**

Page 5 of 18

No.: HM112159

## **1.0 General Details**

### **1.1 Test Laboratory**

The Hong Kong Standards and Testing Centre Ltd.  
EMC Laboratory  
10 Dai Wang Street, Taipo Industrial Estate  
New Territories, Hong Kong

Telephone: 852 2666 1888  
Fax: 852 2664 4353

### **1.2 Applicant Details Applicant**

Supreme Toys (Hong Kong) Ltd.  
Rm. 907-9, 9F, Tower B, New Mandarin Plaza  
14 Science Museum Road, TST East, Kowloon, HK

**HKSTC Code Number for Applicant**

**SUT001**

### **Manufacturer**

Jackpot Plastic & Metal Manufactory  
Feng Gang, Guan Jing Tou Shur Ku District, Dongguan

Date: 2003-12-23

## **TEST REPORT**

Page 6 of 18

No.: HM112159

### **1.3 Equipment Under Test [EUT]**

#### **Description of Sample**

Product: Walkie Talkies  
Manufacturer: Jackpot Plastic & Metal Manufactory  
Brand Name: Jackpot Industrial Ltd.  
Model Number: 99130  
Input Voltage: 9Vd.c ("6F22" size battery x 1)

#### **1.3.1 Description of EUT Operation**

The Equipment Under Test(EUT) is a Supreme Toys (Hong Kong) Ltd., Walkie Talkies. The transmitter is a 2 button transmitter. The EUT continues to transmit while button is being pressed. It is voice transmission, Modulation by Mic and tape is frequency modulation.

### **1.4 Date of Order**

2003-11-17

### **1.5 Submitted Sample(s):**

4 Samples per model

### **1.6 Test Duration**

2003-12-17

### **1.7 Country of Origin**

China

Date: 2003-12-23

## TEST REPORT

Page 7 of 18

No.: HM112159

### 1.8 Additional Information of EUT

|                                    | Submitted                           | Not Available            |
|------------------------------------|-------------------------------------|--------------------------|
| User Manual                        | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Part List                          | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Circuit Diagram                    | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Printed Circuit Board [PCB] Layout | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Block diagram                      | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| FCC ID Label                       | <input checked="" type="checkbox"/> | <input type="checkbox"/> |

Date: 2003-12-23

## **TEST REPORT**

Page 8 of 18

No.: HM112159

### **2.0 Technical Details**

#### **2.1 Investigations Requested**

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15 and ANSI C63.4:2000 for FCC Certification.

#### **2.2 Test Standards and Results Summary Tables**

| <b>EMISSION<br/>Results Summary</b>                          |                  |                 |                  |                                     |                          |                                     |
|--------------------------------------------------------------|------------------|-----------------|------------------|-------------------------------------|--------------------------|-------------------------------------|
| Test Condition                                               | Test Requirement | Test Method     | Class / Severity | Test Result                         |                          |                                     |
|                                                              |                  |                 |                  | Pass                                | Failed                   | N/A                                 |
| Field Strength of Fundamental Emissions & Spurious Emissions | FCC 47CFR 15.235 | ANSI C63.4:2000 | N/A              | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            |
| Radiated Emissions, 30MHz to 1GHz                            | FCC 47CFR 15.209 | ANSI C63.4:2000 | Class B          | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            |
| Conducted Emissions on AC, 0.15MHz to 30MHz                  | FCC 47CFR 15.207 | ANSI C63.4:2000 | Class B          | <input type="checkbox"/>            | <input type="checkbox"/> | <input checked="" type="checkbox"/> |

Note: N/A - Not Applicable


**3.0 Test Results****3.1 Emission****3.1.1 Radiated Emissions (30 – 1000MHz)**

|                    |                          |
|--------------------|--------------------------|
| Test Requirement:  | FCC 47CFR 15.109 Class A |
| Test Method:       | ANSI C63.4: 2000         |
| Test Date:         | 2003-12-17               |
| Mode of Operation: | On mode                  |

**Test Method:**

The sample was placed 0.8m above the ground plane on the OATS \*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

\*: OATS [Open Area Test Site] located at HKSTC with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 90657.

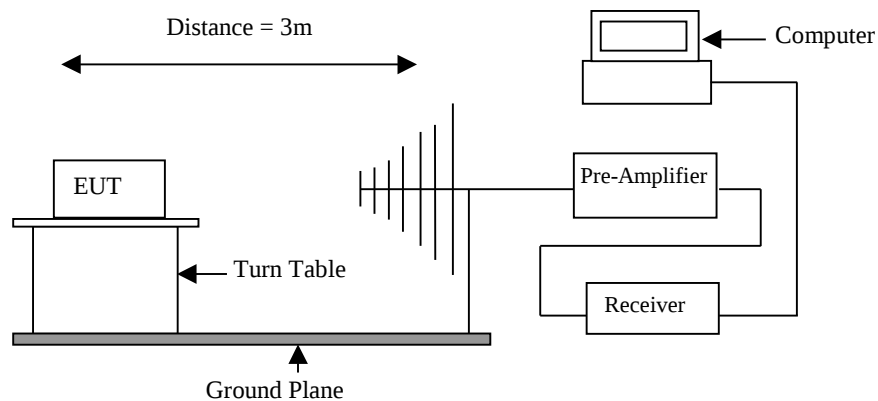**Test Setup:**

Date: 2003-12-23

## TEST REPORT

Page 10 of 18

No.: HM112159

### Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.235]:

| Frequency Range of<br>Fundamental<br>[MHz] | Field Strength of<br>Fundamental Emission<br>[Peak]<br>[μV/m] | Field Strength of<br>Fundamental Emission<br>[Average]<br>[μV/m] |
|--------------------------------------------|---------------------------------------------------------------|------------------------------------------------------------------|
| 49.82-49.90                                | 100,000                                                       | 10,000                                                           |

### Results: Transmitter

| Field Strength of Fundamental Emissions<br>Peak Value |                                 |                                |                             |                           |                   |                     |
|-------------------------------------------------------|---------------------------------|--------------------------------|-----------------------------|---------------------------|-------------------|---------------------|
| Frequency<br>MHz                                      | Measured<br>Level @3m<br>dBμV/m | Correction<br>Factor<br>dBμV/m | Field<br>Strength<br>dBμV/m | Field<br>Strength<br>μV/m | Limit @3m<br>μV/m | E-Field<br>Polarity |
| 49.86                                                 | 45.7                            | 10.2                           | 55.9                        | 623.7                     | 100,000           | Vertical            |

| Field Strength of Fundamental Emissions<br>Average |                                 |                                |                             |                           |                   |                     |
|----------------------------------------------------|---------------------------------|--------------------------------|-----------------------------|---------------------------|-------------------|---------------------|
| Frequency<br>MHz                                   | Measured<br>Level @3m<br>dBμV/m | Correction<br>Factor<br>dBμV/m | Field<br>Strength<br>dBμV/m | Field<br>Strength<br>μV/m | Limit @3m<br>μV/m | E-Field<br>Polarity |
| 49.86                                              | 45.5                            | 10.2                           | 55.7                        | 609.5                     | 10,000            | Vertical            |

### Remarks:

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

For effective averaging, the bandwidth of the video filter must be smaller than the resolution bandwidth. The higher the ratio of resolution bandwidth to video bandwidth, the greater the averaging will be recorded. Below setting for HP8572A EMI Receiver.

Resolution Bandwidth       =3MHz  
Video Bandwidth             =1Hz

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz ±5.7dB

Date: 2003-12-23

## TEST REPORT

Page 11 of 18

No.: HM112159

### Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

| Frequency Range<br>[MHz] | Quasi-Peak Limits<br>[μV/m] |
|--------------------------|-----------------------------|
| 30-88                    | 100                         |
| 88-216                   | 150                         |
| 216-960                  | 200                         |
| Above960                 | 500                         |

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

### Results: Transmitter

| Radiated Emissions<br>Quasi-Peak |                                 |                                |                             |                           |                   |                     |
|----------------------------------|---------------------------------|--------------------------------|-----------------------------|---------------------------|-------------------|---------------------|
| Frequency<br>MHz                 | Measured<br>Level @3m<br>dBμV/m | Correction<br>Factor<br>dBμV/m | Field<br>Strength<br>dBμV/m | Field<br>Strength<br>μV/m | Limit @3m<br>μV/m | E-Field<br>Polarity |
| 99.72                            | < 1.0                           | 11.0                           | < 12.0                      | < 4.0                     | 150               | Vertical            |
| 149.58                           | < 1.0                           | 11.3                           | < 12.3                      | < 4.1                     | 150               | Vertical            |
| 199.44                           | 24.8                            | 12.7                           | 37.5                        | 75.0                      | 150               | Horizontal          |
| 249.30                           | 19.2                            | 15.2                           | 34.4                        | 52.5                      | 200               | Horizontal          |
| 299.16                           | < 1.0                           | 16.9                           | < 17.9                      | < 7.9                     | 200               | Vertical            |
| 349.02                           | < 1.0                           | 17.2                           | < 18.2                      | < 8.1                     | 200               | Vertical            |
| 398.88                           | < 1.0                           | 18.8                           | < 19.8                      | < 9.8                     | 200               | Vertical            |
| 448.74                           | < 1.0                           | 19.7                           | < 20.7                      | < 10.8                    | 200               | Vertical            |
| 498.60                           | < 1.0                           | 20.6                           | < 21.6                      | < 12.0                    | 200               | Vertical            |

Remarks:

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz ±5.7dB

Date: 2003-12-23

## TEST REPORT

Page 12 of 18

No.: HM112159

### Limits for Radiated Emissions [FCC 47 CFR 15.109 Class B]:

| Frequency Range<br>[MHz] | Quasi-Peak Limits<br>[μV/m] |
|--------------------------|-----------------------------|
| 30-88                    | 100                         |
| 88-216                   | 150                         |
| 216-960                  | 200                         |
| Above960                 | 500                         |

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

### Results: Receiver

| Radiated Emissions<br>Quasi-Peak |                                 |                                |                             |                           |                   |                     |
|----------------------------------|---------------------------------|--------------------------------|-----------------------------|---------------------------|-------------------|---------------------|
| Frequency<br>MHz                 | Measured<br>Level @3m<br>dBμV/m | Correction<br>Factor<br>dBμV/m | Field<br>Strength<br>dBμV/m | Field<br>Strength<br>μV/m | Limit @3m<br>μV/m | E-Field<br>Polarity |
| 49.86                            | 21.6                            | 10.2                           | 31.8                        | 38.9                      | 100               | Vertical            |
| 99.72                            | < 1.0                           | 12.5                           | < 13.5                      | < 4.7                     | 150               | Vertical            |
| 149.58                           | < 1.0                           | 9.8                            | < 10.8                      | < 3.5                     | 150               | Vertical            |
| 199.44                           | < 1.0                           | 11.5                           | < 12.5                      | < 4.2                     | 150               | Vertical            |
| 249.30                           | < 1.0                           | 15.9                           | < 16.9                      | < 7.0                     | 200               | Vertical            |
| 299.16                           | < 1.0                           | 17.4                           | < 18.4                      | < 8.3                     | 200               | Vertical            |
| 349.02                           | < 1.0                           | 17.2                           | < 18.2                      | < 8.1                     | 200               | Vertical            |
| 398.88                           | < 1.0                           | 18.8                           | < 19.8                      | < 9.8                     | 200               | Vertical            |
| 448.74                           | < 1.0                           | 19.7                           | < 20.7                      | < 10.8                    | 200               | Vertical            |
| 498.60                           | < 1.0                           | 20.6                           | < 21.6                      | < 12.0                    | 200               | Vertical            |

Calculated measurement uncertainty : 30MHz to 1GHz ±5.7dB

**Date: 2003-12-23**

## **TEST REPORT**

**Page 13 of 18**

**No.: HM112159**

### **3.1.2 Conducted Emissions (0.15MHz to 30MHz)**

|                    |                  |
|--------------------|------------------|
| Test Requirement:  | FCC 47CFR 15.107 |
| Test Method:       | ANSI C63.4:2000  |
| Test Date:         | 2003-12-17       |
| Mode of Operation: | N/A              |

**Results:** N/A

The EUT is operated by a single source of internal battery power [located in the battery compartment], therefore power line conducted emission was deemed unnecessary.

Date: 2003-12-23

## **TEST REPORT**

Page 14 of 18

No.: HM112159

### **3.2 26dB Bandwidth of Fundamental Emission**

|                    |                                  |
|--------------------|----------------------------------|
| Test Requirement:  | FCC 47 CFR 15.235                |
| Test Method:       | ANSI C63.4:2000 (Section 13.1.7) |
| Test Date:         | 2003-12-17                       |
| Mode of Operation: | On mode                          |

#### **Test Method:**

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

#### **Test Setup:**

As Test Setup of clause 3.1.1 in this test report.

Date: 2003-12-23

## TEST REPORT

Page 15 of 18


No.: HM112159

Limits for 20dB Bandwidth of Fundamental Emission:

| Frequency Range<br>[MHz] | 20B Bandwidth<br>[KHz] | FCC Limits<br>[MHz] |
|--------------------------|------------------------|---------------------|
| 49.86                    | 37.6                   | within 49.82-49.90  |

### 20B Bandwidth of Fundamental Emission

09:11:24 JAN 16, 1995 23:49:37 NOV 12, 1997  
MARKER 49.8568 MHz 55.26 dB $\mu$ V/m  
ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 49.8568 MHz  
55.26 dB $\mu$ V/m

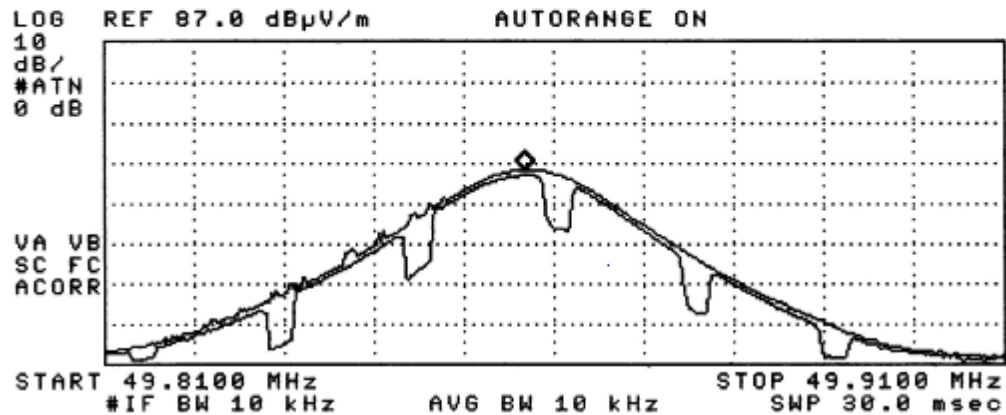

Date: 2003-12-23

## TEST REPORT

Page 16 of 18

No.: HM112159

### Appendix A

#### Test Equipment Audit

##### Radiated Emission

| EQP NO. | DESCRIPTION                                                                  | MANUFACTURER                                          | MODEL NO.                      | SERIAL NO.                             | LAST CAL |
|---------|------------------------------------------------------------------------------|-------------------------------------------------------|--------------------------------|----------------------------------------|----------|
| EM007   | SPECTRUM ANALYZER                                                            | HEWLETT PACKARD                                       | HP85660B                       | 3144A21192                             | 14/03/03 |
| EM008   | SPECTRUM ANALYZER DISPLAY                                                    | HEWLETT PACKARD                                       | HP85662A                       | 3144A20514                             | 14/03/03 |
| EM009   | QUASI PEAK ADAPTOR                                                           | HEWLETT PACKARD                                       | HP85650A                       | 3303A01702                             | 14/03/03 |
| EM010   | RF PRESELECTOR                                                               | HEWLETT PACKARD                                       | HP85685A                       | 3221A01410                             | 14/03/03 |
| EM011   | ATTENUATOR/SWITCH                                                            | HEWLETT PACKARD                                       | HP11713A                       | 2508A10595                             | 14/03/03 |
| EM012   | PRE-AMPLIFIER                                                                | HEWLETT PACKARD                                       | HP8449B                        | 3008A00262                             | 14/03/03 |
| EM013   | CONTROLLER (COMPUTER),<br>COLOR MONITOR, KEYBOARD &<br>MOUSE<br>FLOPPY DRIVE | HEWLETT PACKARD<br>HEWLETT PACKARD<br>HEWLETT PACKARD | HP9000<br>HP A1097C<br>HP9133L | 6226A60314<br>3151J39517<br>2623A02468 | CM       |
| EM020   | HORN ANTENNA                                                                 | EMCO                                                  | 3115                           | 4032                                   | 19/07/00 |
| EM022   | LOOP ANTENNA                                                                 | EMCO                                                  | 6502                           | 1189-2424                              | 04/08/00 |
| EM072   | SIGNAL GENERATOR                                                             | HEWLETT PACKARD                                       | 8640B                          | 1948A11892                             | N/A      |
| EM083   | HKSTC OPEN AREA TEST SITE                                                    | HKSTC                                                 | N/A                            | N/A                                    | 08/11/02 |
| EM131   | PORTABLE SPECTRUM<br>ANALYSER                                                | HEWLETT PACKARD                                       | 8595EM                         | 3710A00155                             | 18/12/01 |
| EM145   | EMI TEST RECEIVER                                                            | R & S                                                 | ESCS 30                        | 830245/021                             | 02/08/03 |
| EM194   | BICONILOG ANTENNA                                                            | EMCO                                                  | 3142B                          | 1795                                   | 14/05/02 |
| EM195   | ANTENNA POSITIONING MAST                                                     | EMCO                                                  | 2075                           | 2368                                   | N/A      |
| EM196   | MULTI-DEVICE CONTROLLER                                                      | EMCO                                                  | 2090                           | 1662                                   | N/A      |

##### Conducted Emission

| EQP NO. | DESCRIPTION                         | MANUFACTURER                     | MODEL NO.  | SERIAL NO.          | LAST CAL |
|---------|-------------------------------------|----------------------------------|------------|---------------------|----------|
| EM078   | VARIAC                              | SHANGHAI VOLTAGE                 | TDGC-3/0.5 | N/A                 | CM       |
| EM081   | SMALL SCREENED ROOM                 | MIKO INST HK                     | N/A        | N/A                 | 18/10/02 |
| EM119   | LISN                                | R & S                            | ESH3-Z5    | 0831.5518.5<br>2    | 01/10/02 |
| EM127   | ISOLATION TRANSFORMER 220<br>TO 300 | WING SUN                         | N/A        | N/A                 | CM       |
| EM142   | PULSES LIMITER                      | R & S                            | ESH3Z2     | 357.8810.52         | 03/07/02 |
| EM181   | EMI TEST RECEIVER                   | R & S                            | ESIB7      | 100072              | 28/11/01 |
| EM154   | SHIELDING ROOM                      | SIEMENA MATSUSHITA<br>COMPONENTS | N/A        | 803-740-057-<br>99A | 18/10/02 |
| EM197   | LISN                                | EMCO                             | 4825/2     | 1193                | 08/04/03 |

Remarks:

CM      Corrective Maintenance  
N/A      Not Applicable or Not Available  
TBD      To Be Determined

Date: 2003-12-23

## TEST REPORT

Page 17 of 18

No.: HM112159

### Appendix B

#### Photographs of EUT

Front View of the product




Rear View of the product



Inner Circuit Top View



Inner Circuit Bottom View

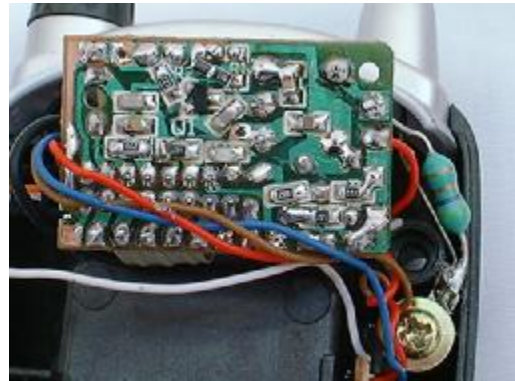

Date: 2003-12-23

## **TEST REPORT**

Page 18 of 18

No.: HM112159

### Photographs of EUT

Measurement of Radiated Emission Test Set Up



End of Document