

Report Number: 04-0017
Customer: Axonn, L.L.C.
Model: STU

FCC Part 25, Certification

2.10 Field Strength of Spurious Radiation (FCC Section 2.1053)

Spurious emissions were evaluated from 30 MHz to 16.2 GHz at an EUT to antenna distance of 1 or 3 meters. The EUT was tested with an external power source and modulated by its own internal sources. Both a low and high channel were tested. The EUT was placed on an open area test site and the spurious emissions tested as stipulated by EIT/TIA-603: 1992 section 2.2.12. Measurements for 30 to 1000 MHz were made with the analyzer's bandwidth set to 120 kHz. Measurements above 1 GHz were made with the analyzer's bandwidth set to 1 MHz. The worse case results are shown in Table 4.

FCC Minimum Standard (FCC Section 25.202(f))

For out-of-band emissions for frequencies removed from the midpoint of the assigned frequency segment by more than 250% of the authorized bandwidth (2.5 MHz), at least

$$43 + 10 \log (P_{\text{Watts}}) \text{ attenuation below the mean power of the transmitter.}$$

For Lowest Channel = $43 + 10 \log (0.153) = 34.8 \text{ dB}$

For Highest Channel = $43 + 10 \log (0.159) = 35.0 \text{ dB}$

Report Number: 04-0017
Customer: Axonn, L.L.C.
Model: STU

FCC Part 25, Certification

TABLE 4a
FIELD STRENGTH OF SPURIOUS RADIATION
Antenna with +4 dBi gain

$$\text{Limit: } 43 + 10 \log (P_{\text{Watts}}) = 43 + 10 \log (0.1462) = 34.6 \text{ dB}$$

Worse Case Mode = High Channel

Frequency (MHz)	Polarity (H or V)	Corrected Substitution Level Relative to Dipole (dBm)	Attenuated Level Below Carrier Power (dB)
3223	V	-34.9	56.5

SAMPLE CALCULATION:

Attenuated Level Below Carrier Power =
 $10 \log (\text{TX Power in mW}) - \text{Corrected Substitution Level (dBm)}$
 $10 \log (146.2) - -34.9 = 56.5$

Test Date: June 26, 2003

Tester
Signature: David P. Blethen Name: David Blethen

Report Number: 04-0017
 Customer: Axonn, L.L.C.
 Model: STU

FCC Part 25, Certification

TABLE 4b
FIELD STRENGTH OF SPURIOUS RADIATION
 Antenna with +5.5 dBi gain

$$\text{Limit: } 43 + 10 \log (P_{\text{watts}}) = 43 + 10 \log (0.153) = 34.8 \text{ dB}$$

Channel	Frequency (MHz)	Polarity (H or V)	Corrected Substitution Level Relative to Dipole (dBm)	Attenuated Level Below Carrier Power (dB)
Low	4.83368	V	-53.11	75.0
High	4.85618	H	-51.86	73.9

All other Harmonic frequencies were below 20 dB of the FCC Limits.

SAMPLE CALCULATION:

Attenuated Level Below Carrier Power =
 $10 \log (\text{TX Power in mW}) - \text{Corrected Substitution Level (dBm)}$
 $10 \log (0.153) - 53.11 = 75.0$

Test Date: October 1, 2004

Tester
 Signature:  Name: David Blethen

Report Number: 04-0017
Customer: Axonn, L.L.C.
Model: STU

FCC Part 25, Certification

2.11 Frequency Stability (FCC Section 2.1055 and 25.202(d))

The frequency tolerance of the carrier signal was measured by while ambient temperature was varied from -30 to 50 degrees centigrade. The frequency tolerance was verified at 10 degree increments. Additionally, the supply voltage was varied from 85% to 115% of the nominal value (except for hand carried, battery powered equipment which was additionally measured at battery endpoint).

FCC Minimum Standard

None

Report Number: 04-0017
 Customer: Axonn, L.L.C.
 Model: STU

FCC Part 25, Certification

FCC Verification
 Axonn Model G-SENS STU
 Frequency Stability vs. Temperature (At Startup)

Test Results Reviewed By:




Timothy R. Johnson
 NARTE Certified Engineer

Temperature (degrees C)	Measured Frequency (MHz)	Deviation (ppm)
-30	1611.254800	3.0
-20	1611.254605	2.9
-10	1611.255092	3.2
0	1611.253494	2.2
10	1611.253762	2.3
20	1611.253917	2.4
30	1611.253370	2.1
40	1611.253438	2.1
50	1611.254805	3.0

Actual TX Frequency was: 1611.250 MHz

Maximum Deviation = 0.001% or 10 ppm

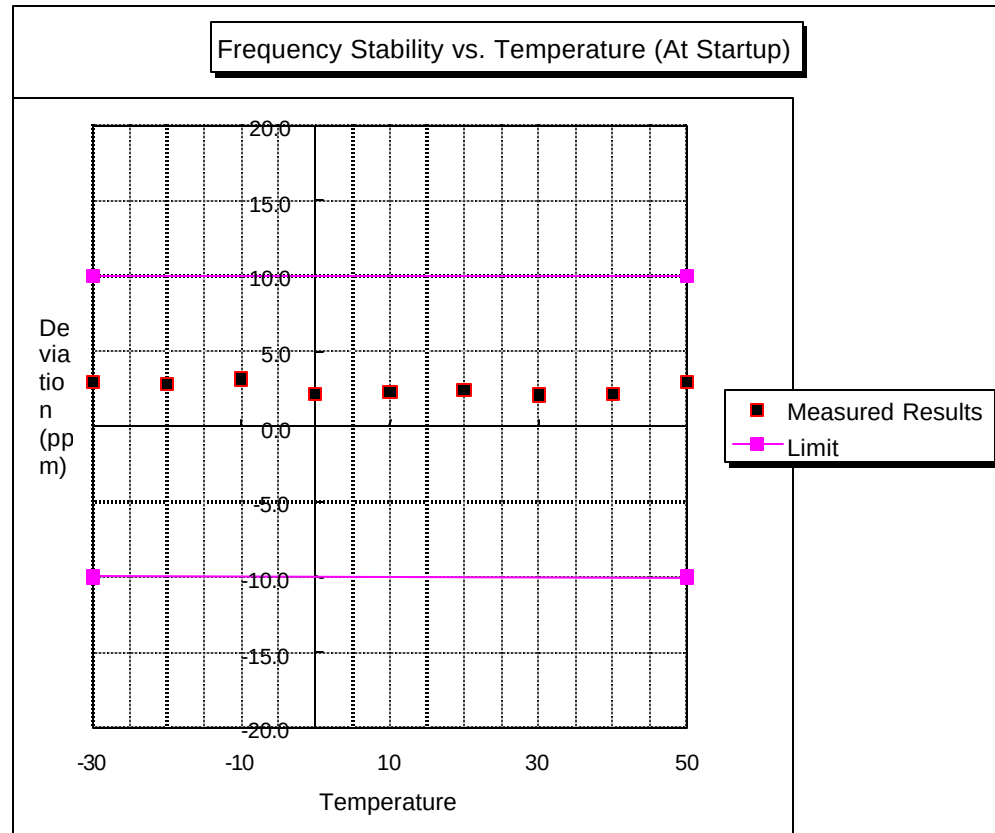

Report Number: 04-0017
Customer: Axonn, L.L.C.
Model: STU

FCC Part 25, Certification

FCC Verification
Axonn Model G-SENS STU
Frequency Stability vs. Temperature (2 minutes after startup)

Test Results Reviewed By:




Timothy R. Johnson
NARTE Certified Engineer

Temperature (degrees C)	Measured Frequency (MHz)	Deviation (ppm)
-30	1611.254700	2.9
-20	1611.254561	2.8
-10	1611.255036	3.1
0	1611.253346	2.1
10	1611.253730	2.3
20	1611.253989	2.5
30	1611.253366	2.1
40	1611.253609	2.2
50	1611.254733	2.9

Actual TX Frequency was: 1611.250 MHz

Maximum Deviation = 0.001% or 10 ppm

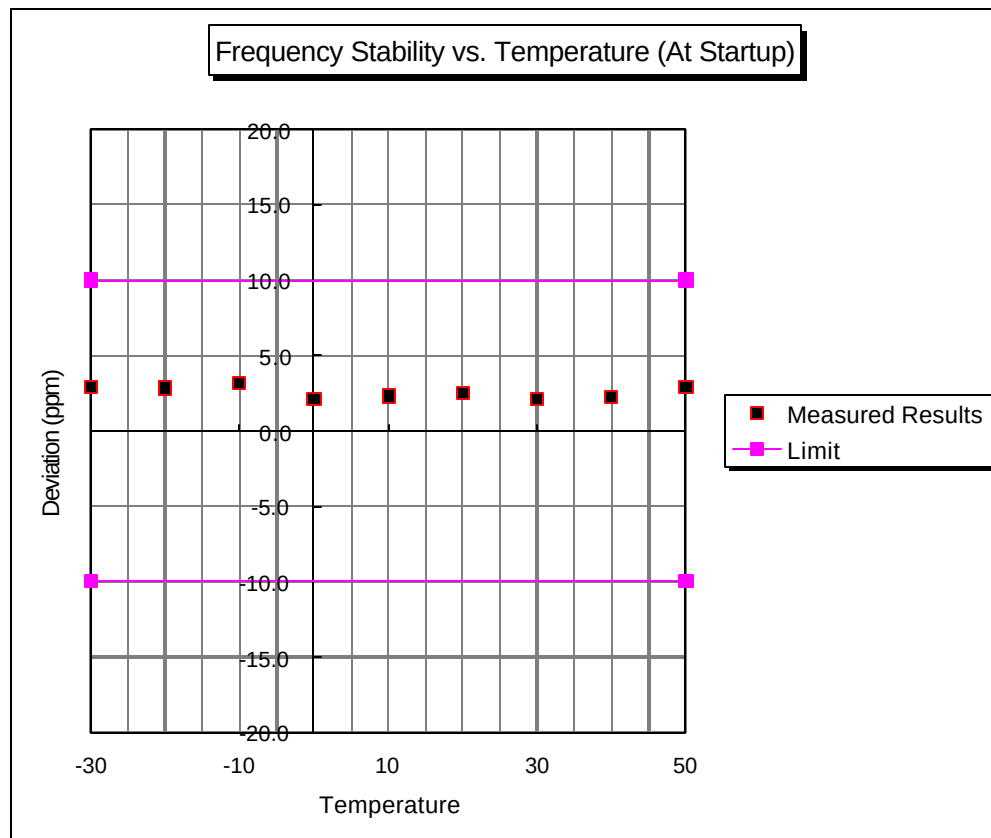


Report Number: 04-0017
Customer: Axonn, L.L.C.
Model: STU

FCC Part 25, Certification

FCC Verification
Axonn Model G-SENS STU
Frequency Stability vs. Temperature (5 minutes after startup)

Test Results Reviewed By:




Timothy R. Johnson
NARTE Certified Engineer

Temperature (degrees C)	Measured Frequency (MHz)	Deviation (ppm)
-30	1611.254900	3.0
-20	1611.254613	2.9
-10	1611.255040	3.1
0	1611.253374	2.1
10	1611.253757	2.3
20	1611.253953	2.5
30	1611.253318	2.1
40	1611.253554	2.2
50	1611.254673	2.9

Actual TX Frequency was: 1611.250 MHz

Maximum Deviation = 0.001% or 10 ppm

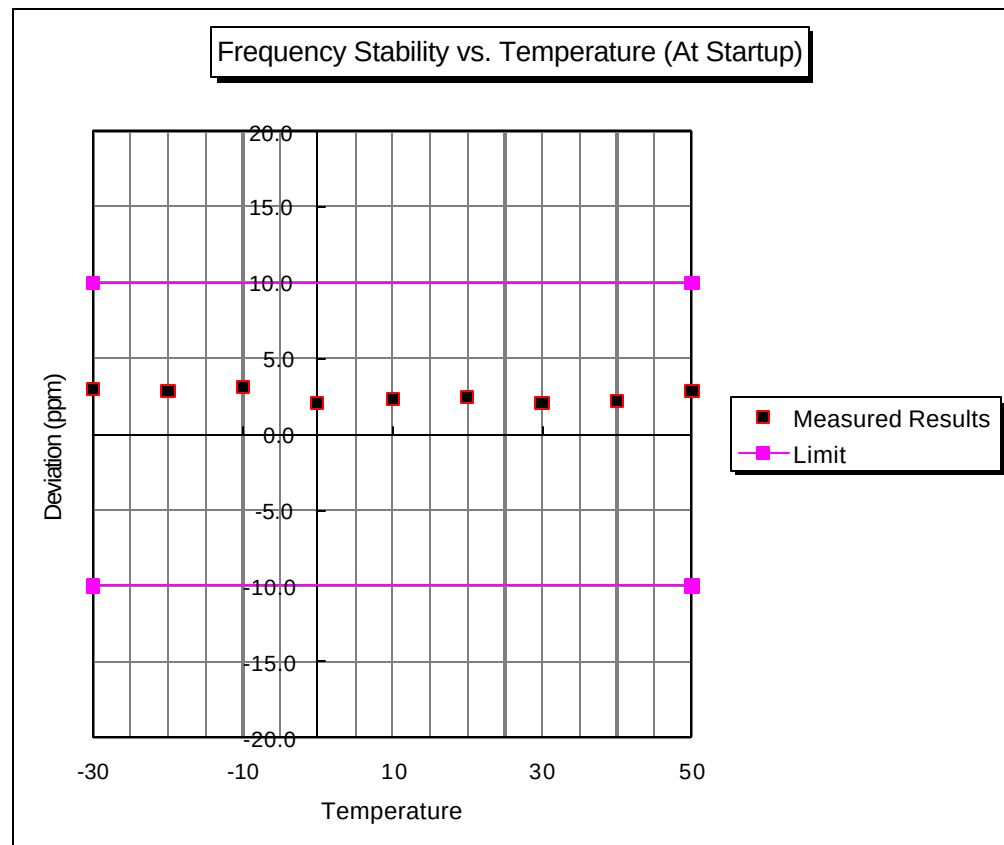

Report Number: 04-0017
Customer: Axonn, L.L.C.
Model: STU

FCC Part 25, Certification

FCC Verification
Axonn Model G-SENS STU
Frequency Stability vs. Temperature (10 minutes after startup)

Test Results Reviewed By:




Timothy R. Johnson
NARTE Certified Engineer

Temperature (degrees C)	Measured Frequency (MHz)	Deviation (ppm)
-30	1611.255050	3.1
-20	1611.254581	2.8
-10	1611.255036	3.1
0	1611.253398	2.1
10	1611.253773	2.3
20	1611.253973	2.5
30	1611.253346	2.1
40	1611.253562	2.2
50	1611.254661	2.9

Actual TX Frequency was: 1611.250 MHz

Maximum Deviation = 0.001% or 10 ppm

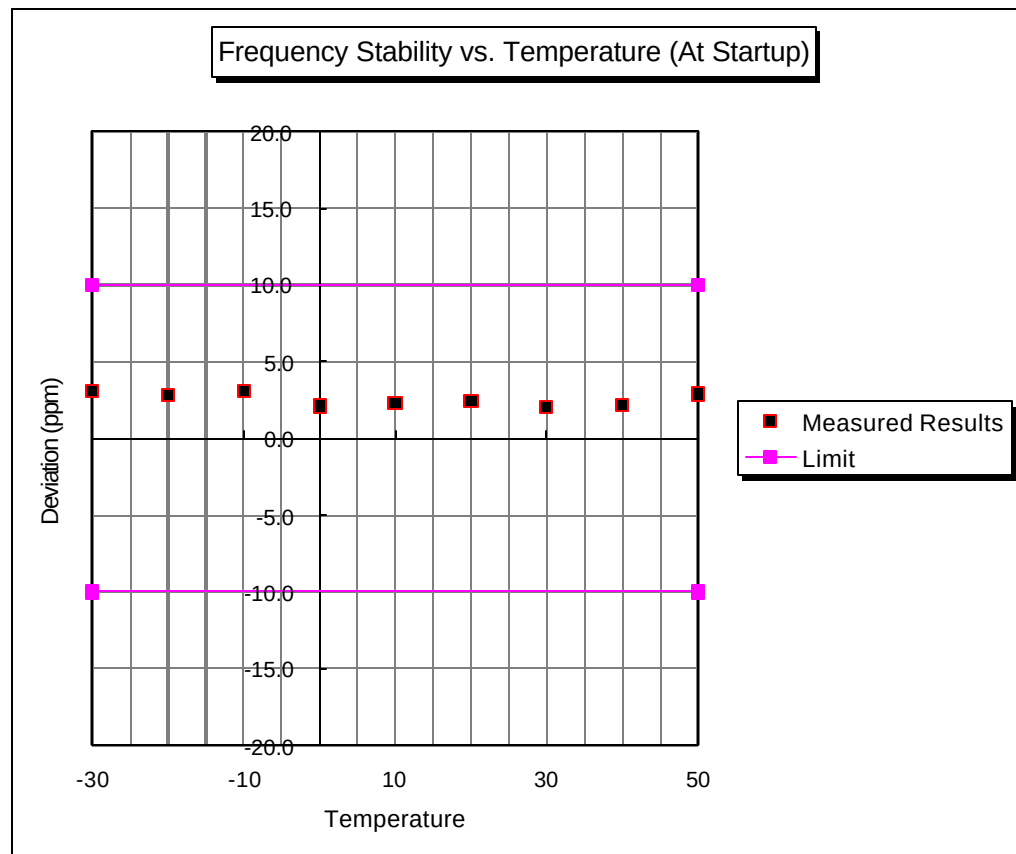


Report Number: 04-0017
Customer: Axonn, L.L.C.
Model: STU

FCC Part 25, Certification

FCC Verification
Axonn Model G-SENS STU
Frequency Stability vs. Voltage

Test Results Reviewed By:




Timothy R. Johnson
NARTE Certified Engineer

Voltage (V DC)	Measured Frequency (MHz)	Deviation (ppm)
4.25	1611.253554	2.2
5	1611.252602	1.6
5.75	1611.253689	2.3

Actual TX Frequency was: 1611.250 MHz

Maximum Deviation = N/A

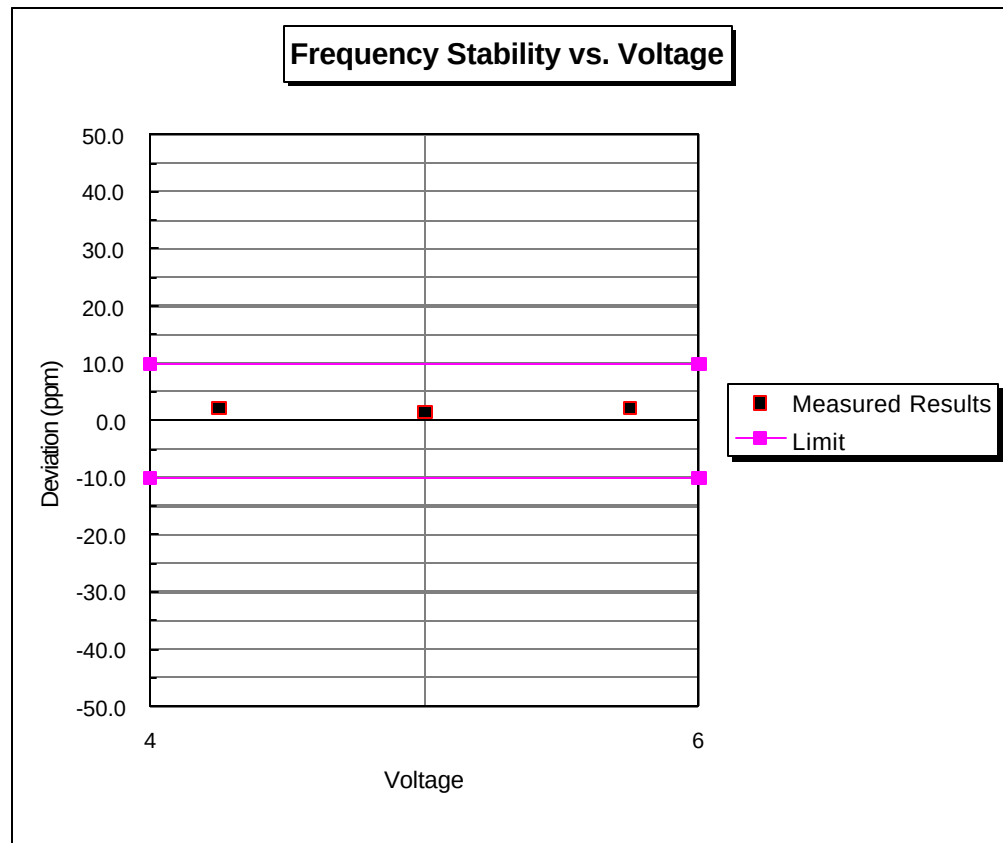

Report Number: 04-0017
Customer: Axonn, L.L.C.
Model: STU

FCC Part 25, Certification

2.12 Emissions from Mobile Earth Stations for Protection of Aeronautical Radio Navigation-Satellite Service. (FCC Section 25.216)

Emissions from the EUT were evaluated from 1559 MHz – 1605 MHz and did not exceed the limit at -70dBW/MHz, averaged over 20 milliseconds.

Emissions from the EUT were evaluated from 1605 MHz – 1610 MHz and did not exceed the limits ranging from -70 dBW/MHz at 1605 MHz to -10dBW/MHz at 1610 MHz, averaged over 20 milliseconds.


Emissions were measured with a spectrum analyzer by connecting the spectrum analyzer directly via a short cable to the antenna output terminal with the Resolution Bandwidth set to 1 MHz. Results are shown on figures 7a -7c.

Report Number: 04-0017
Customer: Axonn, L.L.C.
Model: STU

FCC Part 25, Certification

Figure 7a.
Emissions from Mobile Earth Stations for Protection
of Aeronautical Radio-navigation-Satellite Service

Limit = - 70 dBW/ MHz to -10 dBW/MHz + 4 dBi (-44 dBm to +16 dBm)

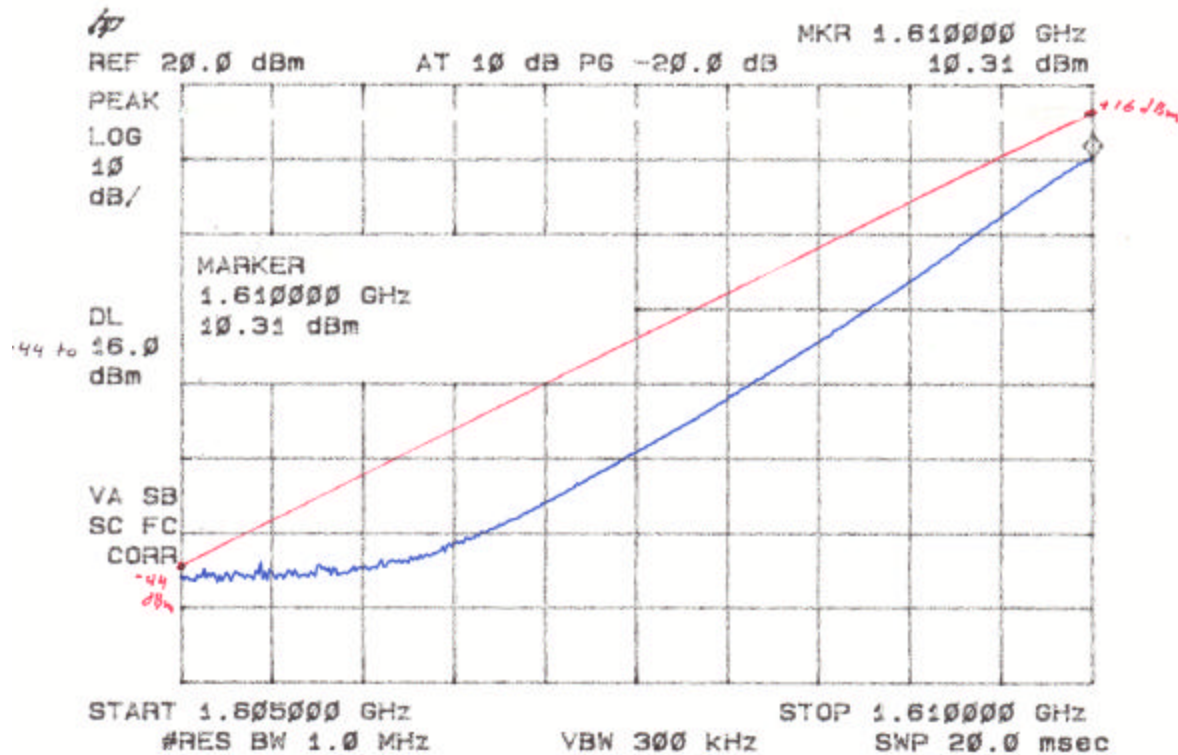


Report Number: 04-0017
Customer: Axonn, L.L.C.
Model: STU

FCC Part 25, Certification

Figure 7b.
Emissions from Mobile Earth Stations for Protection
of Aeronautical Radio-navigation-Satellite Service

Limit = - 70 dBW/MHz + 4 dBi (-44 dBm)

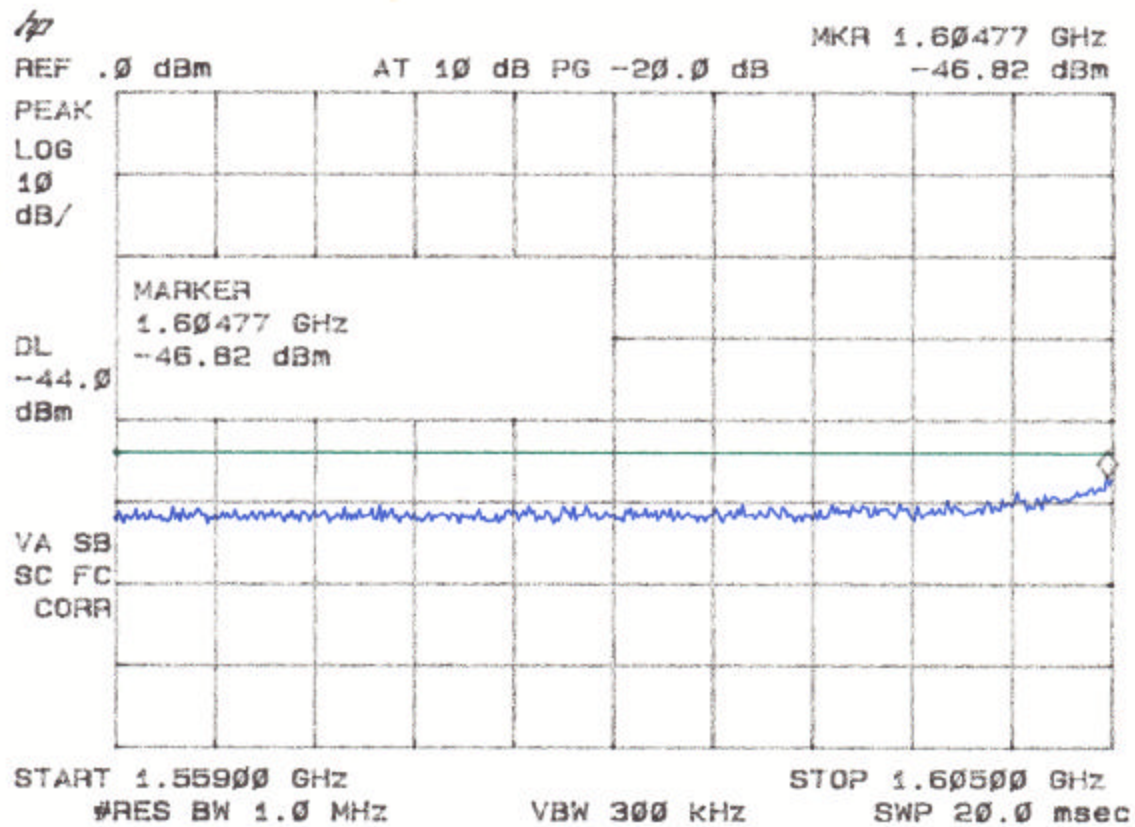


Report Number: 04-0017
 Customer: Axonn, L.L.C.
 Model: STU

FCC Part 25, Certification

Figure 7c.
Emissions from Mobile Earth Stations for Protection
of Aeronautical Radio-navigation-Satellite Service

Limit = -70 dBW/MHz to -10 dBW/MHz + 4 dBi (-44 dBm to +16dBm)

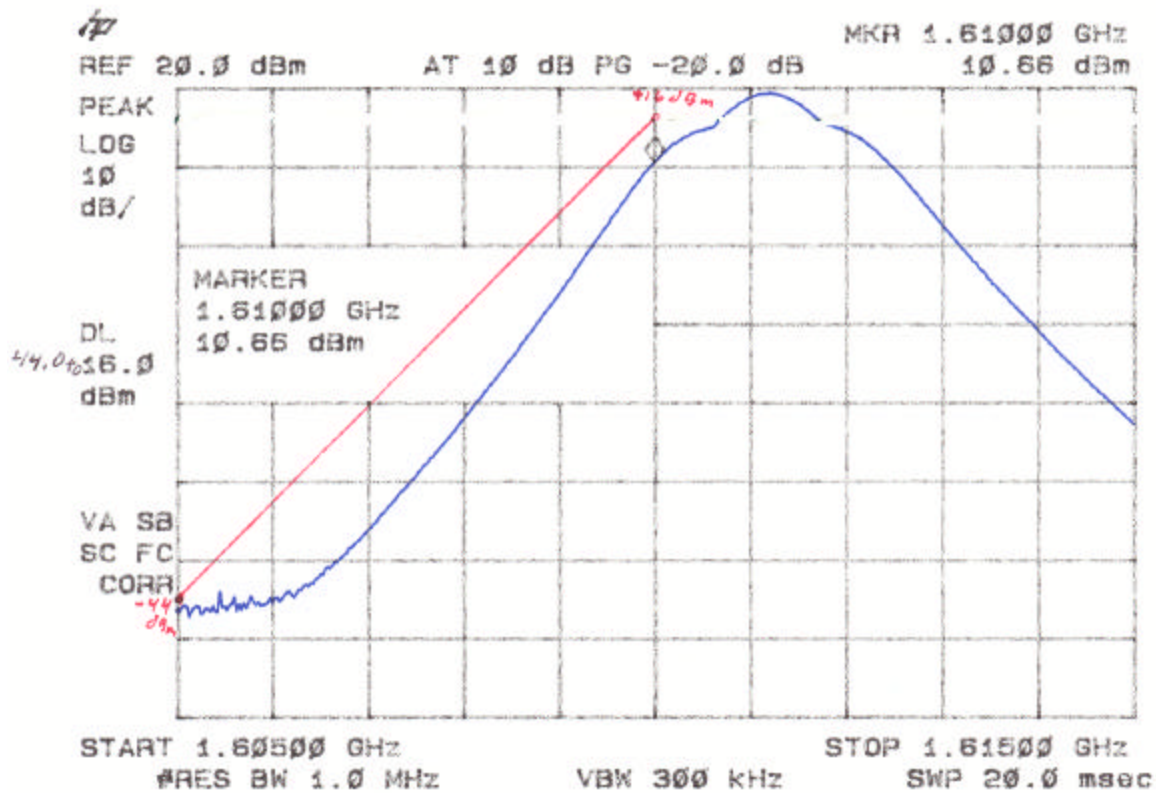

Report Number: 04-0017
Customer: Axonn, L.L.C.
Model: STU

FCC Part 25, Certification

SECTION 3

PHOTOGRAPHS

Report Number: 04-0017
Customer: Axonn, L.L.C.
Model: STU

FCC Part 25, Certification

PHOTOS OF THE TESTED EUT

The following photos are attached:

- Photo 1. Front View – Test Unit
- Photo 2. Back View - Test Unit
- Photo 3. Top View Motherboard and Transmitter
- Photo 4. Motherboard, Bottom – Test Unit
- Photo 5. Transmitter, Bottom
- Photo 6. Transmitter, Top

Report Number: 04-0017
Customer: Axonn, L.L.C.
Model: STU

FCC Part 25, Certification

Photo 1. Front View – Test Unit



Report Number: 04-0017
Customer: Axonn, L.L.C.
Model: STU

FCC Part 25, Certification


Photo 2. Back View – Test Unit



Report Number: 04-0017
Customer: Axonn, L.L.C.
Model: STU

FCC Part 25, Certification


Photo 3. Top View Motherboard and Transmitter

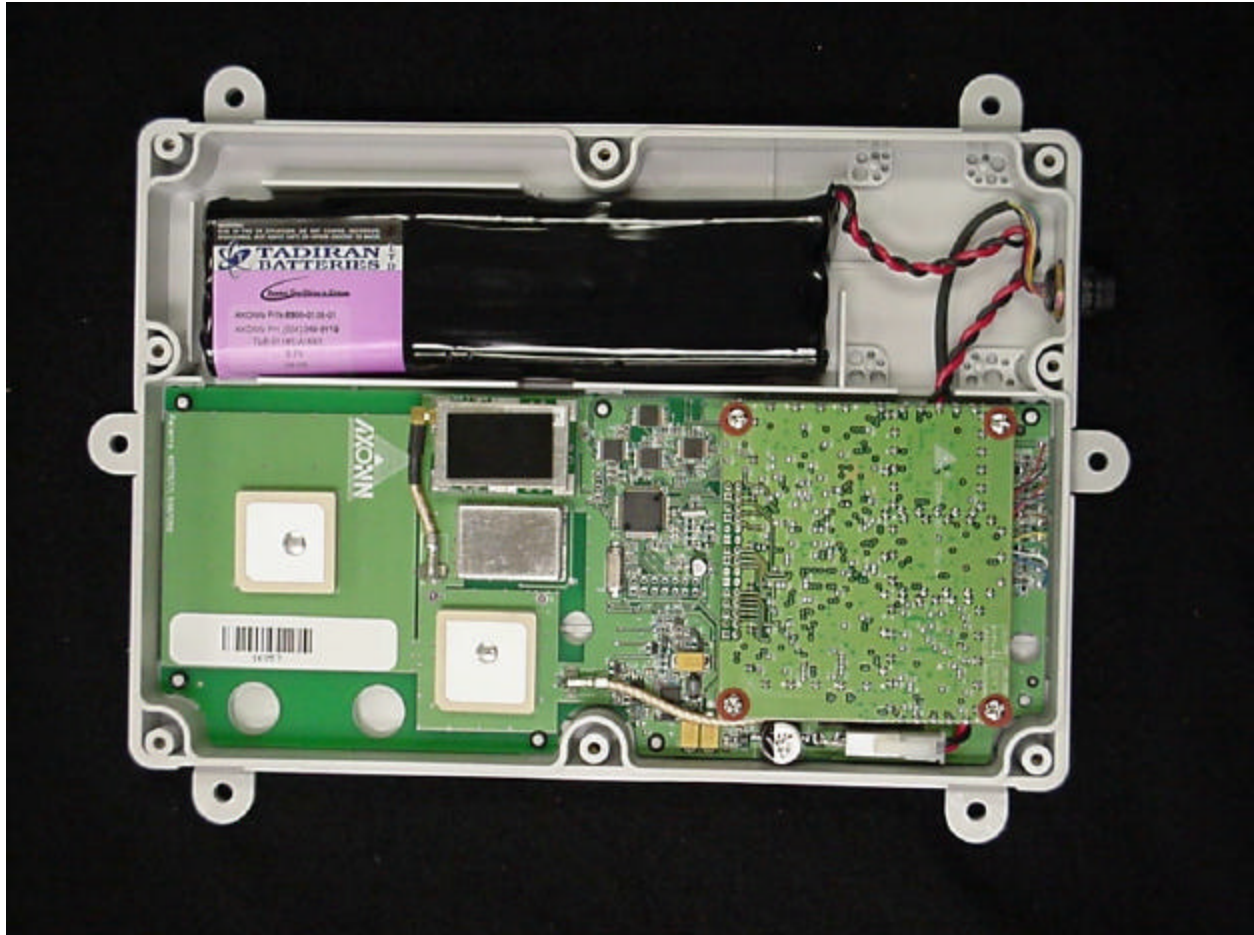

Report Number: 04-0017
Customer: Axonn, L.L.C.
Model: STU

FCC Part 25, Certification


Photo 4. Motherboard, Bottom – Test Unit

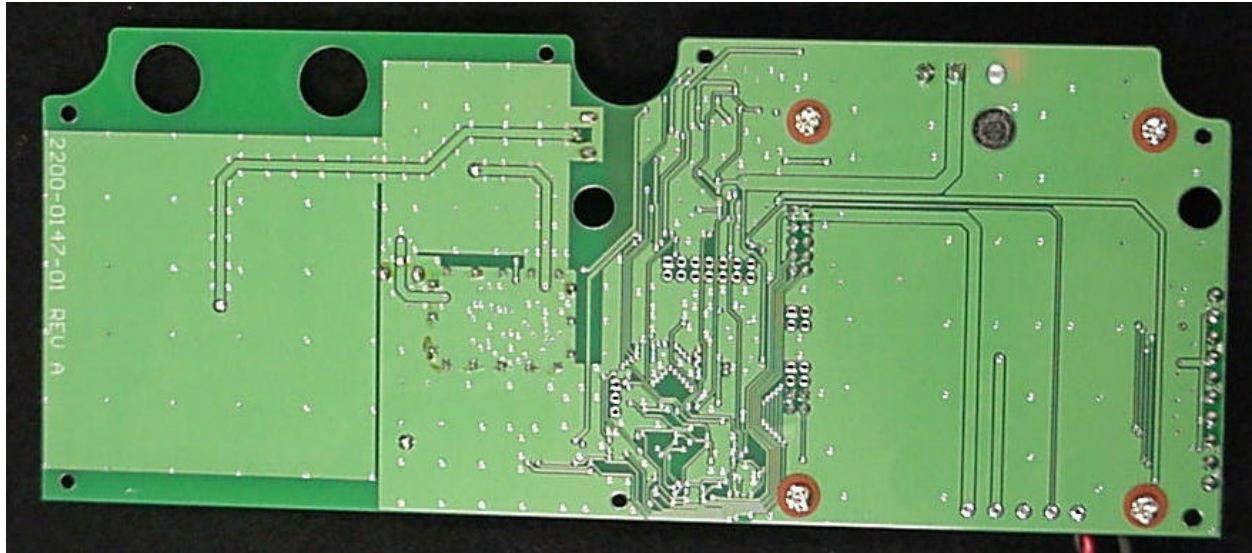

Report Number: 04-0017
Customer: Axonn, L.L.C.
Model: STU

FCC Part 25, Certification


Photo 5. Transmitter, Bottom

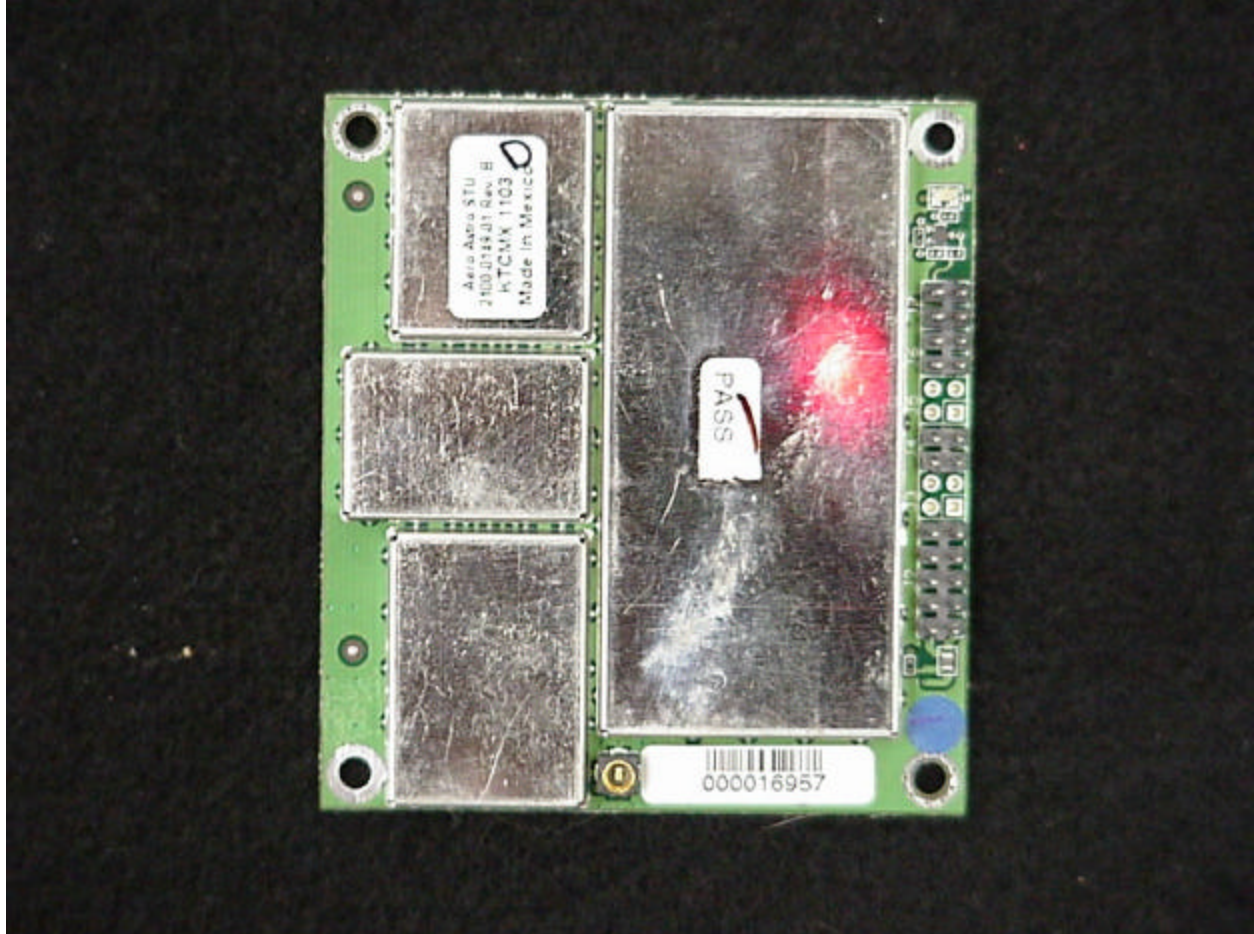

Report Number: 04-0017
Customer: Axonn, L.L.C.
Model: STU

FCC Part 25, Certification

Photo 6. Transmitter, Top

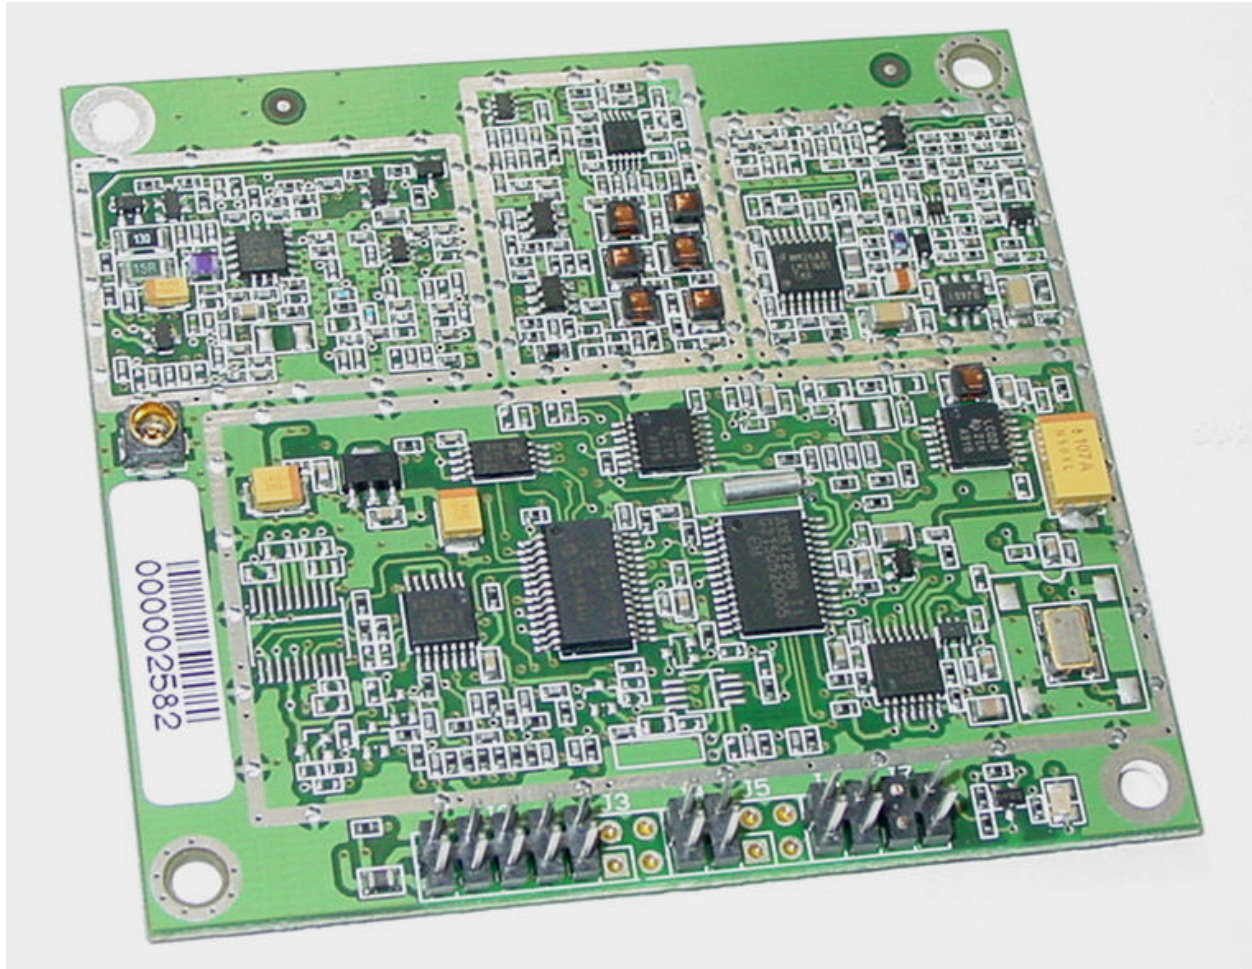

Report Number: 04-0017
Customer: Axonn, L.L.C.
Model: STU

FCC Part 25, Certification

SECTION 4

RF EXPOSURE INFORMATION

Report Number: 04-0017
 Customer: Axonn, L.L.C.
 Model: STU

FCC Part 25, Certification

4.1 RF Safety Requirements to 2.1091 for Mobile Transmitters

Power Output

The EUT's maximum expected output power as shown in section 2.6 is

Frequency of Fundamental (MHz)	Measurement (dBm)	Measurement (Watt)
1618.60	22.01	0.159

Calculating +5.5 dBi gain antenna (worst case – vs – 4 dBi gain antenna)

$$0.159 * 5.5 = 0.875 \text{ W}$$

Source Based Time Averaging

This information has not been included and the MPE calculations specified below do not take into consideration any duty cycle correction.

MPE Calculations

The limits for this unit (uncontrolled exposure) is 1.0 mW/cm^2 . Taking the RF Density Field Equation:

$$S = (\text{EIRP in mW}) / (4\pi R^2) \text{ and solving for Field Density } S$$

Solving the above equation yields

$$S = (875(\text{mW}) / (4\pi (20 \text{ cm})^2) = 0.174 \text{ mW/cm}^2$$

The device should be installed to maintain 20 cm from humans during use. Information regarding installation and use should be contained in the users manual.