


USER'S MANUAL

MODEL: FAN-15T

BATTERY EMPTY(UNDER 5V)

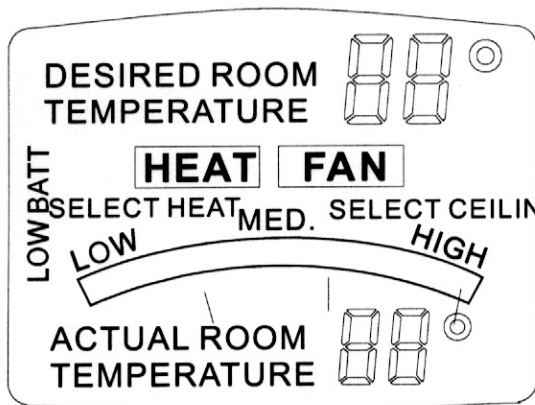

SET TEMP. 60~99°F

CEILING FAN SPEED: HIGH, MED, LOW, OFF
FOUR LEVEL

HEAT FAN SPEED: HIGH, MED1, MED2, LOW
FOUR LEVEL

ROOM TEMP. 35~99°F



ONE TOUCH TURN ON/OFF ALL UNIT.



ONE TOUCH TURN ON/OFF LIGHT



INCREASE DESIRED ROOM TEMPERATURE



ONE TOUCH TURN ON/OFF HEAT



DECREASE DESIRED ROOM TEMPERATURE



INCREASE CEILING FAN SPEED



ONE TOUCH TURN ON/OFF CEILING FAN



DECREASE CEILING FAN SPEED

BOTTOM TACT SWITCH: FOR LEARN CODE.

LEARN TRANSMITTER CODE: SET DIP SWITCH NUMBER AS YOU LIKE, TURN ON RECEIVER, PRESS LEARN SWITCH IN 30 SECONDS, LCD DISPLAY WILL SHOW 5,4,3,2,1, THEN LIGHT FLASH TWICE, NOW YOU GET NEW CODE FOR COMMUNICATION WITH RECEIVER.

AT HEAT MODE: CEILING FAN ALWAYS KEEP AT MEDIUM SPEED, UPWARD DIRECTION.
HEAT IS AUTO MODE, DEPEND ON DESIRED AND ROOM TEMPERATURE DIFFERENCE, ANYWAY IT WILL KEEP LOW LEVEL AT LEAST.

AT FAN MODE: CEILING FAN CAN BE SET HIGH, MEDIUM, LOW, DOWNWARD DIRECTION AND OFF.
HEAT WILL KEEP OFF

POWER SWITCH: TURN ON/OFF ALL UNIT. TURN ON/OFF LCDDISPLAY. WHEN TURN ON POWER, IT WILL RESUME LAST FUNCTION.

DESIRED TEMP.	ROOM TEMP	PTC	CEILING FAN
1°F HIGHER	71°F ↑	LOW(1PTC)	MED,REV
SAME	70°F	MED2(2PTC)	MED,REV
1°F LOWER	69°F	MED1(3PTC)	MED,REV
2°F LOWER	68°F ↓	HI(4PTC)	MED,REV
AT LEAST KEEP 1 PTC,MAX. 4 PTC.			

Caution:

The change or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.