



ITC2500

PS 200W

- Power o.k.
- Battery Operation
- Battery Low
- Battery Charging
- Fuses Alarm

Battery Fuse  
250V / 12.5 AT

Power

BSC

PWR / IDE

COM1

COM2

COM3

USB / ETH

USB / ETH

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset

Reset


Reset


Reset

Reset

Reset

Reset

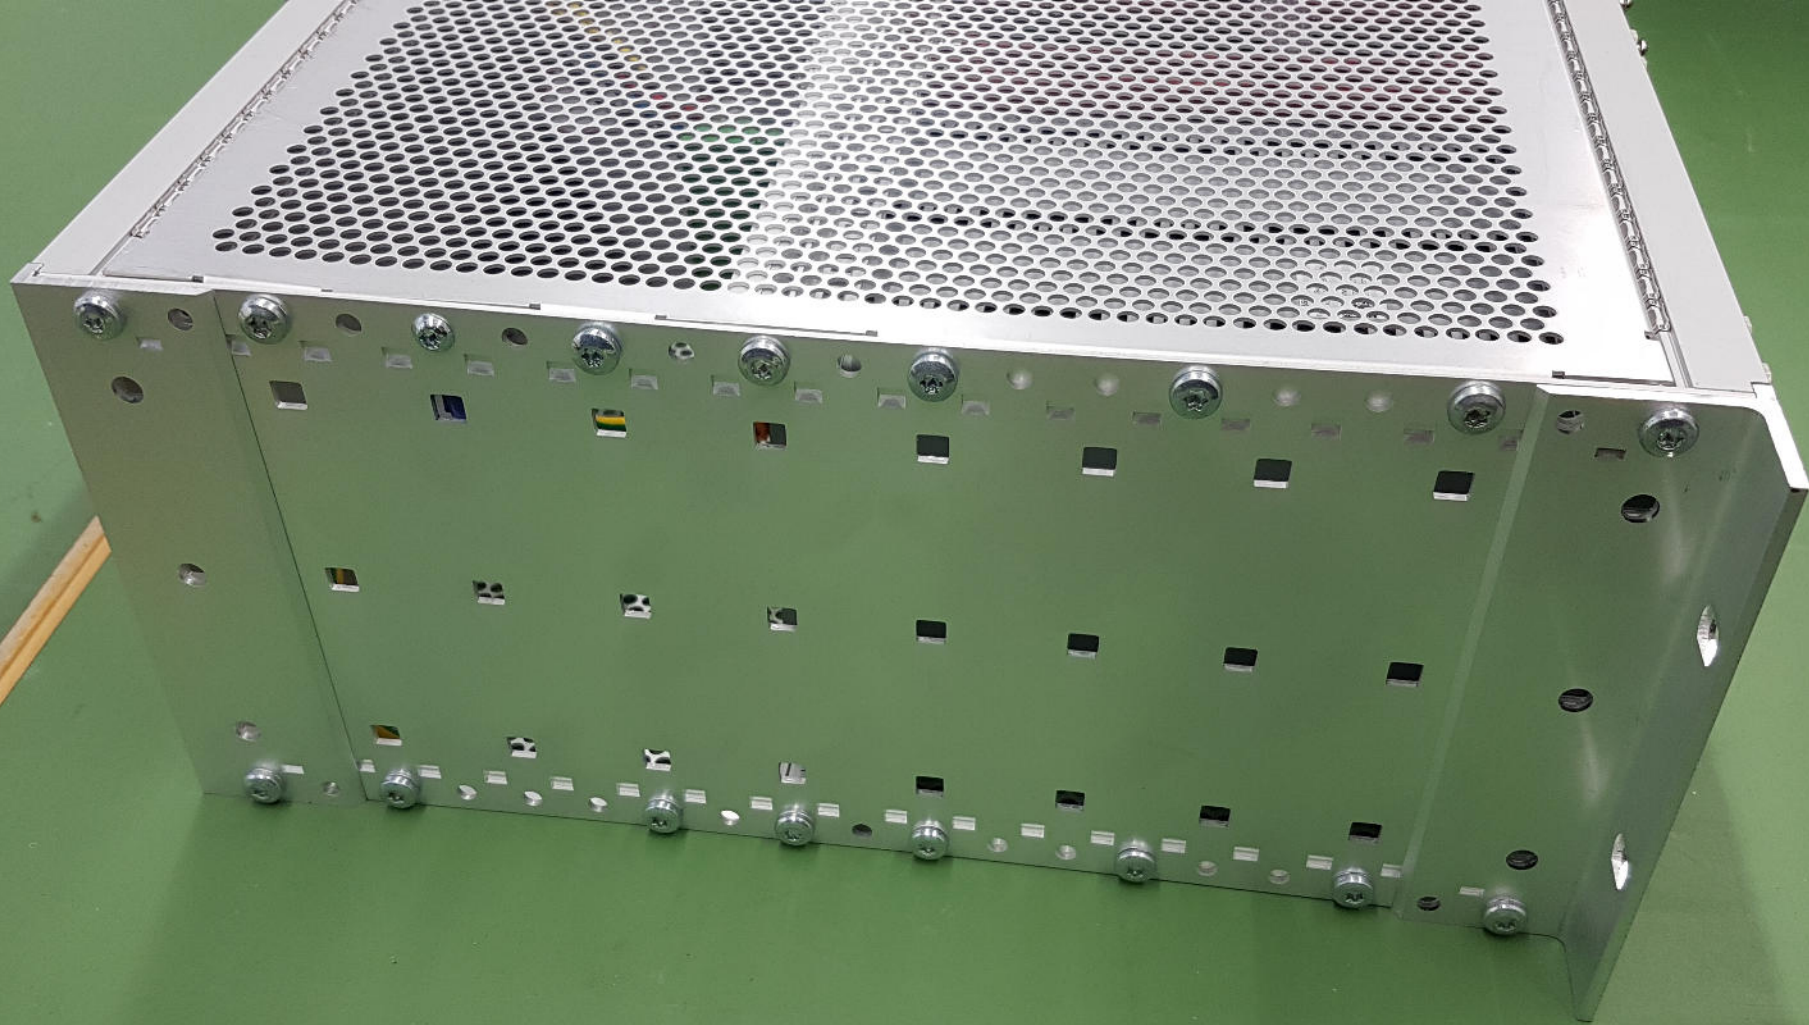

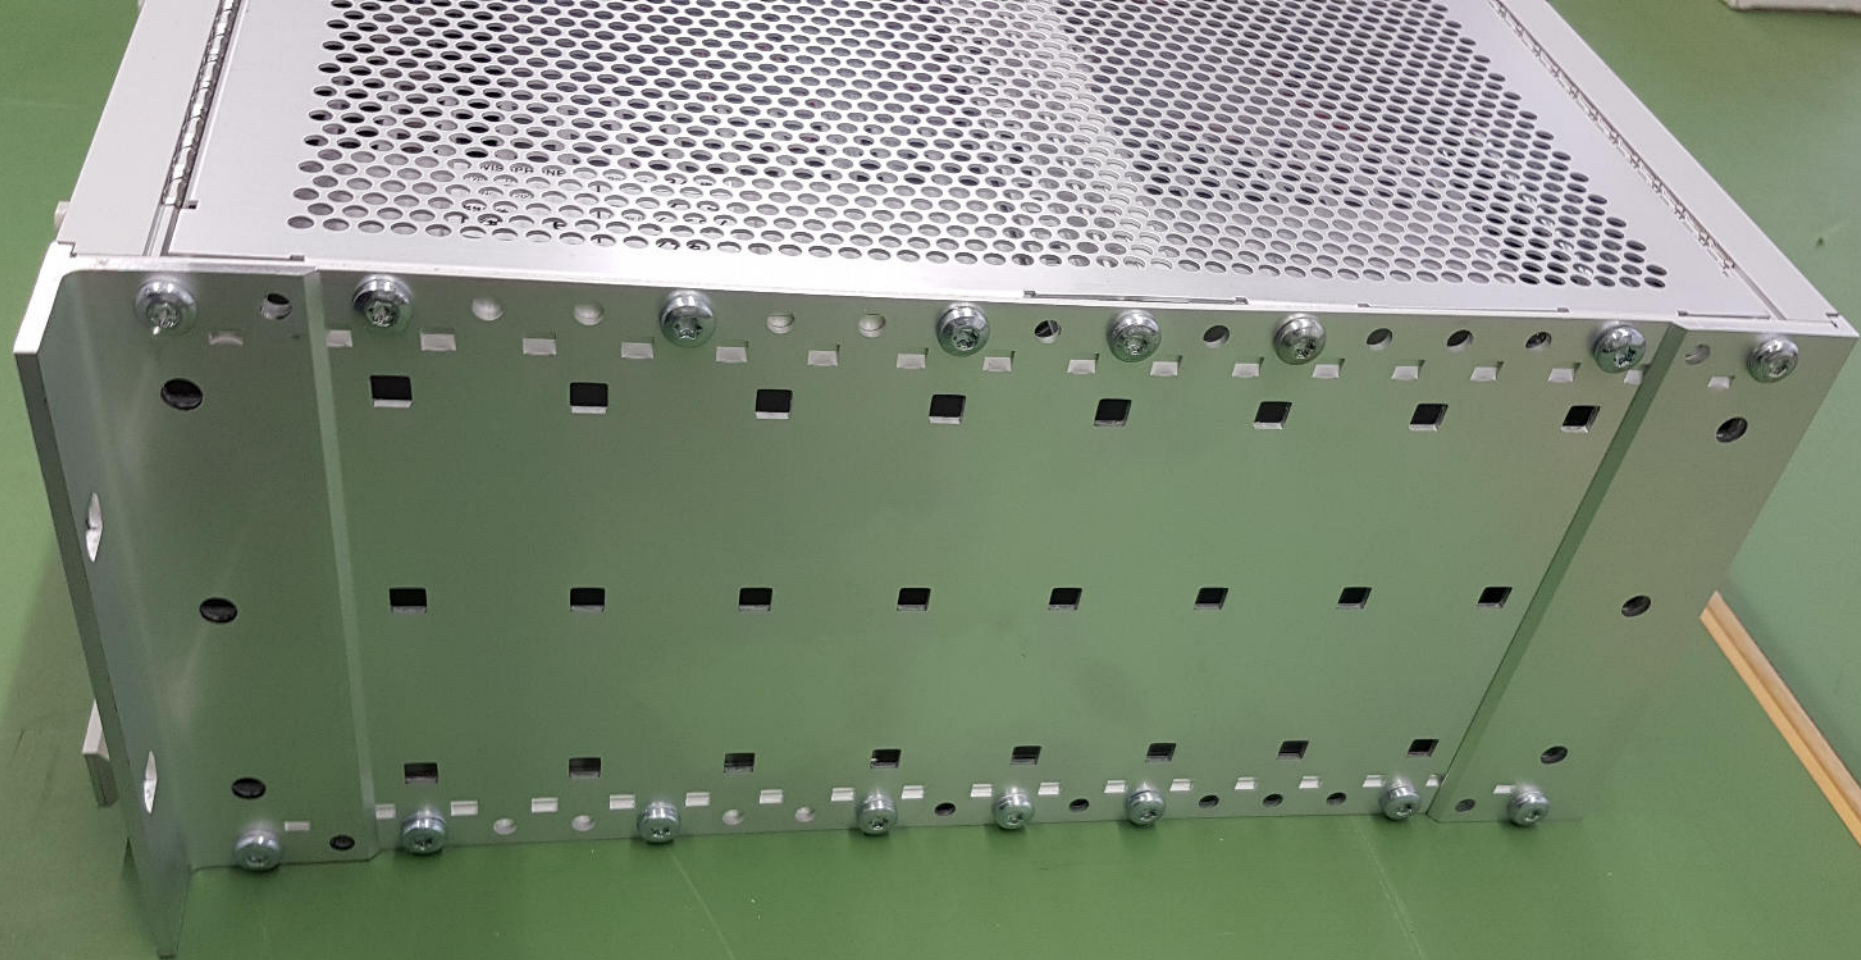

Single antenna use

Dual antenna use

Rx: For dual antenna use only

Rx / Tx: Single antenna use

Tx: Dual antenna use

13.5V/1A max  
OUT

Battery  
IN



SWISSPHONE ITC2500 NA  
Type/Model: ITC 2500-NA 481    Band: 135-174 MHz  
Power: 12.5W  
100 - 240 VAC, 50/60Hz, 2 SA, 1.1A, 250VA  
FCC ID: L3M-ITC2500-481  
A/E No.: 0721682  
S/N: 02011737 03516  
FC

Mains in

**SWISSPHONE ITC2500 NA**

Type/Model: ITC 2500-NA 4B1 Band: 136-174 MHz

Space: 12.5kHz

100 - 240 VAC; 50/60Hz; 2.5A-1.1A; 260VA

FCC ID: L3M-ITC2500-4B1

IC: 4404A-ITC25004B1



Art.Nr.: 0721682

S/Nr.: C201737.03515



Mains in

