




RADIO TEST REPORT

FCC ID : L4B-RTBNA200
Equipment : BN19000 Tri Band WiFi Router
Brand Name : ASUS
Model Name : BN12, BN19000
Applicant : Asus Computer International
48720 Kato Road, Fremont, CA 94538, United States
Standard : 47 CFR FCC Part 15.247

The product was received on Feb. 24, 2026, and testing was started from Feb. 24, 2026 and completed on Jun. 09, 2026. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2020 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

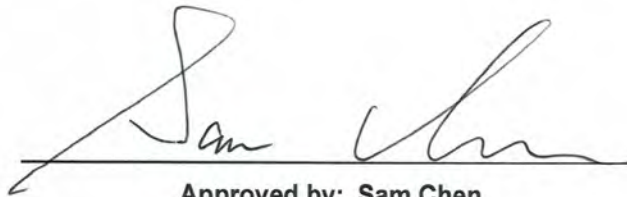

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	8
1.3 Testing Location Information	8
1.4 Measurement Uncertainty	9
2 Test Configuration of EUT	10
2.1 Test Channel Mode	10
2.2 The Worst Case Measurement Configuration	11
2.3 EUT Operation during Test	12
2.4 Accessories	13
2.5 Support Equipment.....	13
2.6 Test Setup Diagram	15
3 Transmitter Test Result	20
3.1 AC Power-line Conducted Emissions	20
3.2 DTS Bandwidth.....	22
3.3 Maximum Conducted Output Power	23
3.4 Power Spectral Density	26
3.5 Emissions in Non-restricted Frequency Bands	28
3.6 Emissions in Restricted Frequency Bands.....	29
4 Test Equipment and Calibration Data	34
Appendix A. Test Results of AC Power-line Conducted Emissions	
Appendix B. Test Results of DTS Bandwidth	
Appendix C. Test Results of Maximum Conducted Output Power	
Appendix D. Test Results of Power Spectral Density	
Appendix E. Test Results of Emissions in Non-restricted Frequency Bands	
Appendix F. Test Results of Emissions in Restricted Frequency Bands	
Appendix G. Test Results of Radiated Emission Co-location	
Appendix H. Test Photos	
Photographs of EUT v01	



TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A10_10 Ver1.3



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.247(a)	DTS Bandwidth	PASS	-
3.3	15.247(b)	Maximum Conducted Output Power	PASS	-
3.4	15.247(e)	Power Spectral Density	PASS	-
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	PASS	-
3.6	15.247(d)	Emissions in Restricted Frequency Bands	PASS	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sam Chen

Report Producer: Muse Chan



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
2400-2483.5	b, g, n (HT20), VHT20, ax (HEW20), be (EHT20), bn (UHR 20)	2412-2462	1-11 [11]
2400-2483.5	n (HT40), VHT40, ax (HEW40), be (EHT40), bn (UHR 40)	2422-2452	3-9 [7]

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	802.11 b, 802.11 g, 802.11 n HT20, VHT20, 802.11 ax HEW20, 802.11 be EHT20, 802.11 bn UHR 20	20	4TX
	802.11 n HT20-BF, VHT20-BF, 802.11 ax HEW20-BF, 802.11 be EHT20-BF, 802.11 bn UHR 20-BF	20	4TX
	802.11 n HT40, VHT40, 802.11 ax HEW40, 802.11 be EHT40, 802.11 bn UHR 40	40	4TX
	802.11 n HT40-BF, VHT40-BF, 802.11 ax HEW40-BF, 802.11 be EHT40-BF, 802.11 bn UHR 40-BF	40	4TX

Note:

- ♦ 11b mode uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.
- ♦ 11g, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ♦ VHT20, VHT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ HEW20, HEW40 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ EHT20, EHT40 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- ♦ UHR20, UHR40 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- ♦ BWch is the nominal channel bandwidth.



1.1.2 Antenna Information

Ant.	Port			Brand	Model Name	Antenna Type	Connector	Gain (dBi)
	2.4GHz	5GHz	6GHz					
1	1	4	-	Whayu	C660-510683-A	Dipole	I-PEX	Note 1
2	2	3	-	Whayu	C660-510683-A	Dipole	I-PEX	
3	3	2	-	Whayu	C660-510683-A	Dipole	I-PEX	
4	4	1	-	Whayu	C660-510683-A	Dipole	I-PEX	
5	-	-	3	Whayu	C660-510683-A	Dipole	I-PEX	
6	-	-	4	Whayu	C660-510683-A	Dipole	I-PEX	
7	-	-	2	Whayu	C660-510683-A	Dipole	I-PEX	
8	-	-	1	Whayu	C660-510683-A	Dipole	I-PEX	

Note 1:

Ant.	WLAN 2.4GHz (dBi)	WLAN 5GHz (dBi)				WLAN 6GHz (dBi)			
		UNII 1	UNII 2A	UNII 2C	UNII 3	UNII 5	UNII 6	UNII 7	UNII 8
1	3.52	2.95	3.28	3.9	3.78	-	-	-	-
2	3.69	3.47	2.87	3.76	3.81	-	-	-	-
3	3.59	3.98	3.76	3.77	3.93	-	-	-	-
4	3.47	3.46	3.93	3.64	3.55	-	-	-	-
5	-	-	-	-	-	4.41	4.27	3.16	3.9
6	-	-	-	-	-	4.42	4.11	4.03	4.1
7	-	-	-	-	-	4.48	4.32	3.95	4.4
8	-	-	-	-	-	4.38	4.47	4.25	4.24

Directional Gain (dBi)														
WLAN 2.4GHz			WLAN 5GHz UNII 1			WLAN 5GHz UNII 2A			WLAN 5GHz UNII 2C			WLAN 5GHz UNII 3		
4T1S	4T2S	4T4S	4T1S	4T2S	4T4S	4T1S	4T2S	4T4S	4T1S	4T2S	4T4S	4T1S	4T2S	4T4S
7.41	4.41	3.69	7.61	4.61	3.98	7.47	4.47	3.93	7.98	4.98	3.9	7.33	4.33	3.93

Directional Gain (dBi)											
WLAN 6GHz UNII 5			WLAN 6GHz UNII 6			WLAN 6GHz UNII 7			WLAN 6GHz UNII 8		
4T1S	4T2S	4T4S	4T1S	4T2S	4T4S	4T1S	4T2S	4T4S	4T1S	4T2S	4T4S
6.71	4.48	4.48	6.73	4.47	4.47	6.03	4.25	4.25	6.82	4.4	4.4

Note 2: The antenna gain and directional gain are measured which follow the procedure of KDB 662911 D03.

<For 2.4GHz function>

For IEEE 802.11b/g/n/VHT/ax/be/bn (4TX/4RX):

Port 1~Port 4 can be used as transmitting/receiving antenna.

Port 1~Port 4 could transmit/receive simultaneously.

<For 5GHz function>

For IEEE 802.11a/n/ac/ax/be/bn (4TX/4RX):

Port 1~Port 4 can be used as transmitting/receiving antenna.

Port 1~Port 4 could transmit/receive simultaneously.



<For 6GHz function>

For IEEE 802.11a/ax/be/bn (4TX/4RX):

Port 1~Port 4 can be used as transmitting/receiving antenna.

Port 1~Port 4 could transmit/receive simultaneously.

1.1.3 Mode Test Duty Cycle

Mode	DC	DCF (dB)	T (s)	VBW (Hz) 1/T
802.11b_Nss 1,(1D)	0.992	0.03	3.113m	10Hz (DC>=0.98)
802.11g_Nss 1,(6D)	0.951	0.22	4.067m	300
802.11 bn UHR20-BF_Nss 1,(M0)	0.96	0.18	4.681m	300
802.11 bn UHR40-BF_Nss 1,(M0)	0.989	0.05	2.409m	10Hz (DC>=0.98)
802.11 bn UHR20-BF_Nss 2,(M0)	0.981	0.08	1.486m	10Hz (DC>=0.98)
802.11 bn UHR40-BF_Nss 2,(M0)	0.977	0.1	1.246m	1k

Note:

- ◆ DC is Duty Cycle.
- ◆ DCF is Duty Cycle Factor.

1.1.4 EUT Operational Condition

EUT Power Type	From Power Adapter			
Beamforming Function	☒	With beamforming	☐	Without beamforming
	The product has beamforming function for n/VHT/ax/be/bn in 2.4GHz, n/ac/ax/be/bn in 5GHz UNII 1~UNII 3, and ax/be/bn in 6GHz UNII 5~UNII 8.			
Function	☒	Point-to-multipoint	☐	Point-to-point
Support RU	☒	Full RU	☐	Partial RU
Test Software Version	Non-beamforming mode: MTool_3.4.7.0 Beamforming mode: DOS [ver 6.1.7601]			

Note: The above information was declared by manufacturer.

1.1.5 Table for Multiple Listing

Model Name	Description
BN12	All the models are identical, the difference model served as marketing strategy.
BN19000	

Note 1: From the above models, model: BN12 was selected as representative model for the test and its data was recorded in this report.

Note 2: The above information was declared by manufacturer.

1.1.6 Table for EUT Supports Function

Function
AP Router
Mesh

Note 1: After evaluating, AP Router mode was selected to test and recorded in the report.

Note 2: The USB port on this device supports both storage and WWAN functionality.

Note 3: The above information was declared by manufacturer.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15.247
- ♦ ANSI C63.10-2020

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 558074 D01 v05r02
- ♦ FCC KDB 662911 D03 v01
- ♦ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu (TAF: 3787)	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.) TEL: 886-3-656-9065 FAX: 886-3-656-9085 Test site Designation No. TW3787 with FCC. Conformity Assessment Body Identifier (CABID) TW3787 with ISED.

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted	TH01-CB	Gino Huang	21.6~22.4 / 59~63	Apr. 17, 2026~ Jun. 09, 2026
Radiated below 1GHz	10CH01-CB	Richard Pai	20~21 / 60~61	Apr. 24, 2026
Radiated above 1GHz	03CH02-CB 03CH03-CB 03CH04-CB 03CH06-CB	Paul Hu	23.6~24.0 / 55~57 23.7~24.4 / 66~68 24.2~24.9 / 58~59 23.7~24.3 / 65~68	Feb. 24, 2026~ Jun. 05, 2026
Radiated Co-location	03CH06-CB	Paul Hu	23.8~24.6 / 58~67	Feb. 24, 2026~ Jun. 05, 2026
AC Conduction	CO02-CB	Elvin Yeh	22~23 / 54~55	Apr. 21, 2026



1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Date: Before May 28, 2026

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.4 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	4.1 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	5.9 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.2 dB	Confidence levels of 95%
Conducted Emission	2.5 dB	Confidence levels of 95%
Output Power Measurement	1.3 dB	Confidence levels of 95%
Power Density Measurement	2.0 dB	Confidence levels of 95%
Bandwidth Measurement	1.0 %	Confidence levels of 95%

Test Date: After May 27, 2026

Test Items	Uncertainty	Remark
Radiated Emission (1GHz ~ 18GHz)	4.5 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.3 dB	Confidence levels of 95%
Conducted Emission	3.8 dB	Confidence levels of 95%
Output Power Measurement	1.5 dB	Confidence levels of 95%
Power Density Measurement	3.5 dB	Confidence levels of 95%
Bandwidth Measurement	1.6 %	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Mode
802.11b_Nss1,(1Mbps)_4TX
2412MHz
2437MHz
2462MHz
802.11g_Nss1,(6Mbps)_4TX
2412MHz
2417MHz
2437MHz
2457MHz
2462MHz
802.11 bn UHR20-BF_Nss1,(MCS0)_4TX
2412MHz
2437MHz
2462MHz
802.11 bn UHR40-BF_Nss1,(MCS0)_4TX
2422MHz
2437MHz
2452MHz
802.11 bn UHR20-BF_Nss2,(MCS0)_4TX
2412MHz
2437MHz
2457MHz
2462MHz
802.11 bn UHR40-BF_Nss2,(MCS0)_4TX
2422MHz
2437MHz
2452MHz

Note:

- ♦ Evaluated UHR20/UHR40 mode only. Due to similar modulation, The power setting of HT20/HT40/ VHT20/VHT40 /HEW20/HEW40/EHT20/EHT40 mode are the same or lower than UHR20/UHR40.
- ♦ The EUT supports non-beamforming and beamforming modes, after evaluating, the beamforming mode has been selected to test.
- ♦ The EUT supports a maximum data rate up to MCS 23. After evaluation, MCS 0 was found to be the worst case and was selected for all test items.



2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Normal Link
1	AP Router / WAN mode_WAN/LAN1 10G (WAN) + WAN/LAN2 2.5G (LAN) + USB(R/W) + Adapter
2	AP Router / WAN mode_WAN/LAN2 2.5G (WAN) + WAN/LAN1 10G (LAN) + USB(R/W) + Adapter
3	AP Router / WWAN mode_WAN/LAN1 10G (LAN) + WAN/LAN2 2.5G (LAN) + USB(WWAN) + Adapter
For operating mode 1 is the worst case and it was record in this test report.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emissions in Restricted Frequency Bands
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	Normal Link
After evaluating, EUT in Y axis was the worst case, so the measurement will follow this same test configuration.	
1	EUT in Y axis_AP Router / WAN mode_WAN/LAN1 10G (WAN) + WAN/LAN2 2.5G (LAN) + USB(R/W) + Adapter
2	EUT in Y axis_AP Router / WAN mode_WAN/LAN2 2.5G (WAN) + WAN/LAN1 10G (LAN) + USB(R/W) + Adapter
3	EUT in Y axis_AP Router / WWAN mode_WAN/LAN1 10G (LAN) + WAN/LAN2 2.5G (LAN) + USB(WWAN) + Adapter
For operating mode 1 is the worst case and it was record in this test report.	
Operating Mode > 1GHz	CTX
After evaluating, EUT in Y axis was the worst case, so the measurement will follow this same test configuration.	
1	EUT in Y axis



The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Radiated Emission Co-location
Test Condition	Radiated measurement
Operating Mode	Normal Link
After evaluating, EUT in Y axis was the worst case, so the measurement will follow this same test configuration.	
1	EUT in Y axis_WLAN 2.4GHz + WLAN 5GHz
Refer to Appendix G for Radiated Emission Co-location.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	WLAN 2.4GHz + WLAN 5GHz + WLAN 6GHz
2	WLAN 2.4GHz + WLAN 5GHz + WLAN 6GHz + WWAN
Refer to Sporton Test Report No.: FA640714 for Co-location RF Exposure Evaluation.	

2.3 EUT Operation during Test

For CTX Mode:

non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

beamforming mode:

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:

During the test, the following programs under WIN 10 were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS [ver 6.1.7601]
3. Executed "Lantest.exe" to link with the remote workstation to transmit and receive packet by Client and transmit duty cycle no less than 98%.

For Normal Link Mode:

During the test, the EUT operation to normal function.



2.4 Accessories

Accessories			
Equipment Name	Brand Name	Model Name	Rating
Adapter	Leader	MU60B3120500-A1	Input: 100-240V~50/60Hz, 1.5A Output: 12.0V, 5.0A
Other			
RJ-45 cable*1: Shielded, 1.5m			

2.5 Support Equipment

For AC Conduction and Radiated (below 1GHz):

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	10G WAN/LAN1 (WAN function) PC	ASUS	S300TA	TX2-RTL8821CE
B	2.5G WAN/LAN2 (LAN function) PC	ASUS	S300TA	TX2-RTL8821CE
C	10G LAN3 PC	ASUS	S300TA	TX2-RTL8821CE
D	2.5G LAN4 PC	ASUS	S300TA	TX2-RTL8821CE
E	2.5G LAN5 PC	ASUS	S300TA	TX2-RTL8821CE
F	6G NB	DELL	E6230	N/A
G	5G NB	Lenovo	X260	N/A
H	2.4G NB	Lenovo	X260	N/A
I	Flash disk3.0	Transcend	JetFlash-703	N/A
J	6G module	INTEL	BE200	PD9BE200NG

For Radiated (above 1GHz other tests):

For Non-beamforming mode:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E4300	N/A

For Beamforming mode:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E4300	N/A
B	Client	ASUS	Mesh BN12	N/A
C	NB	DELL	E4300	N/A


**For Radiated (above 1GHz co-location):**


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E4300	N/A
B	2.4G NB	DELL	E4300	N/A
C	5G NB	DELL	E4300	N/A
D	Flash disk	Silicon Power	Touch 835	N/A

For RF Conducted:


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E4300	N/A

2.6 Test Setup Diagram

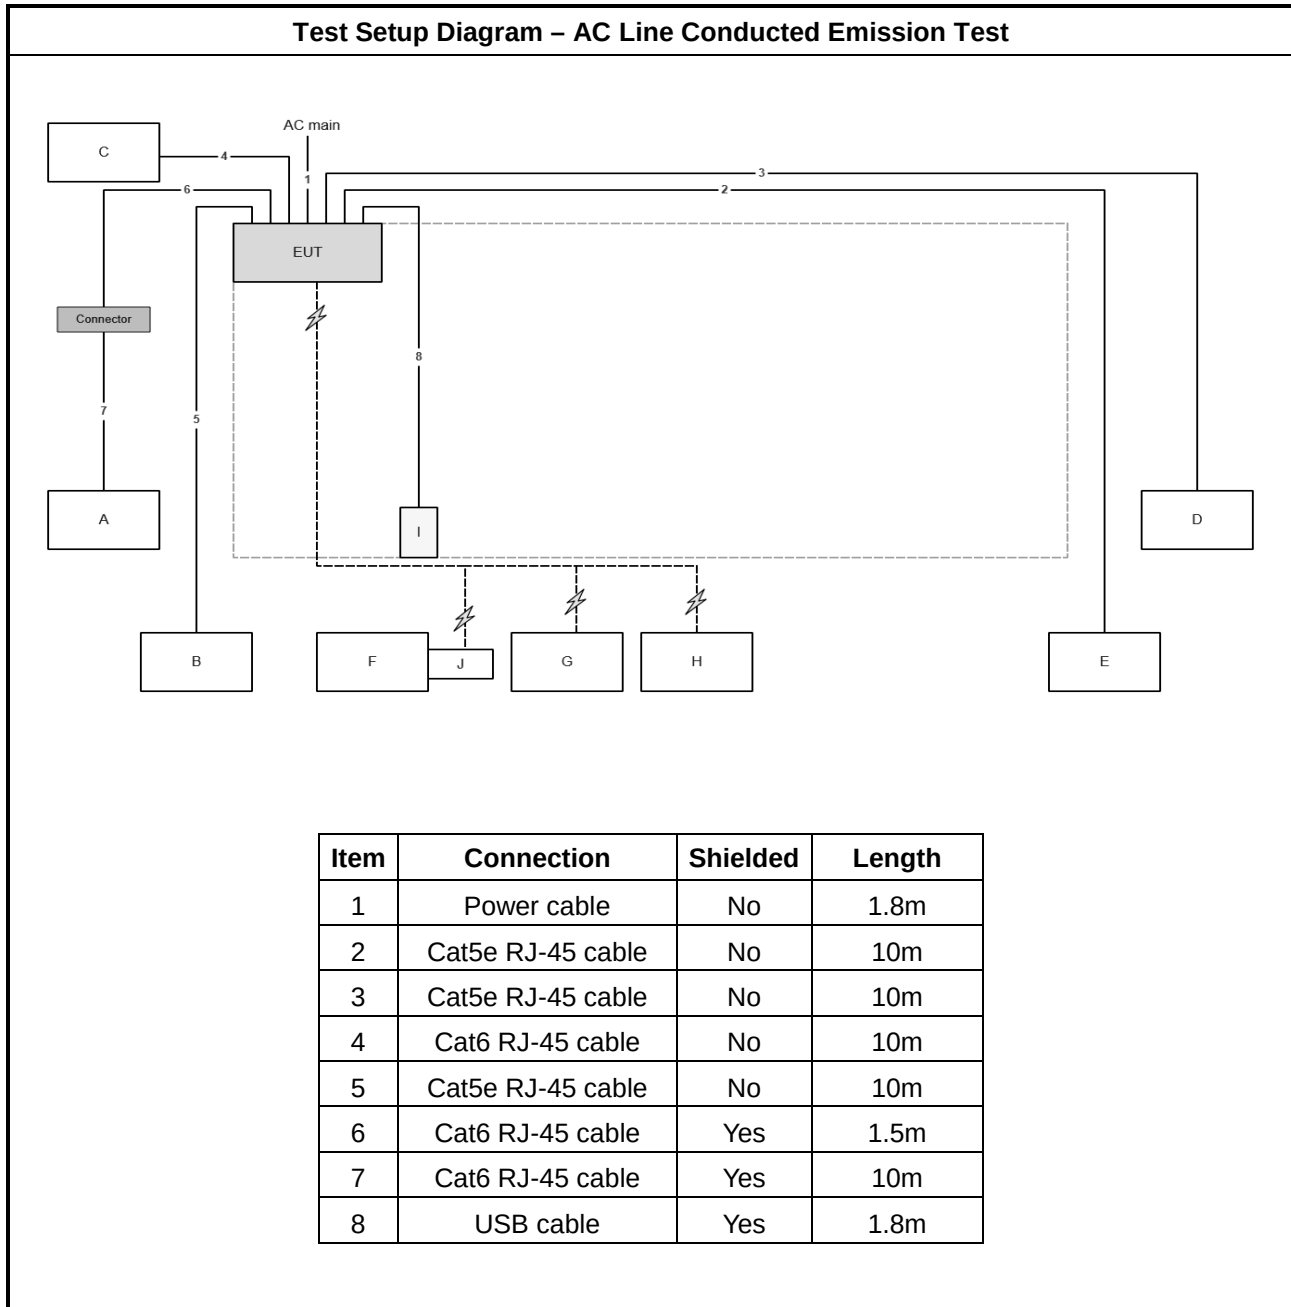


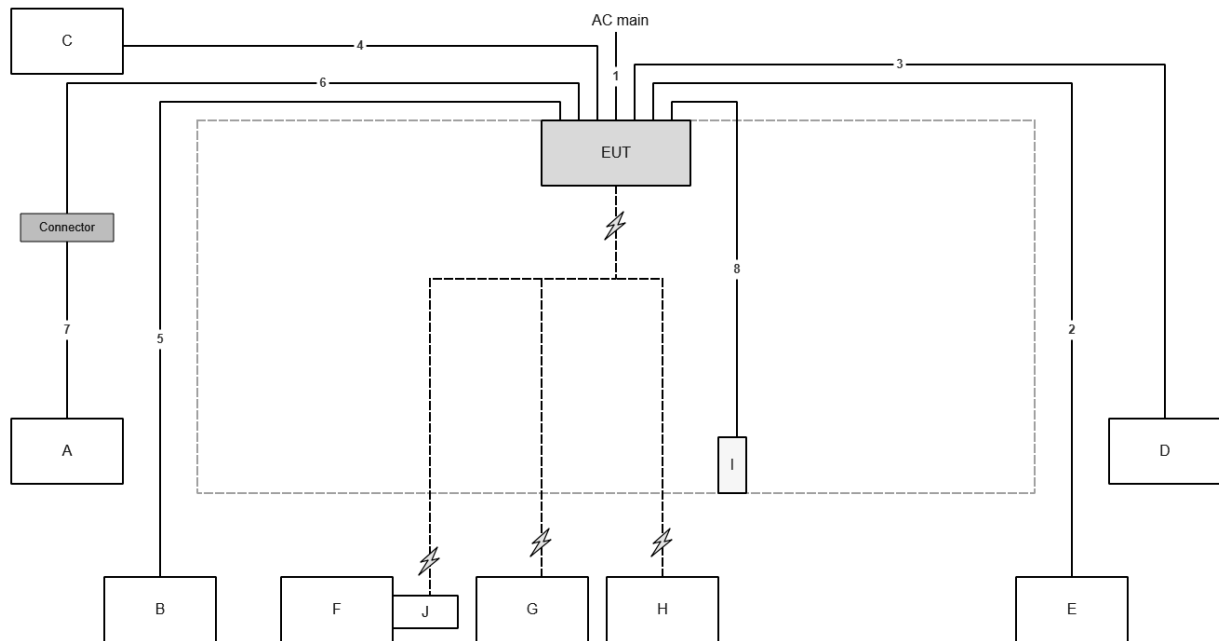Test Setup Diagram - Radiated Test < 1GHz


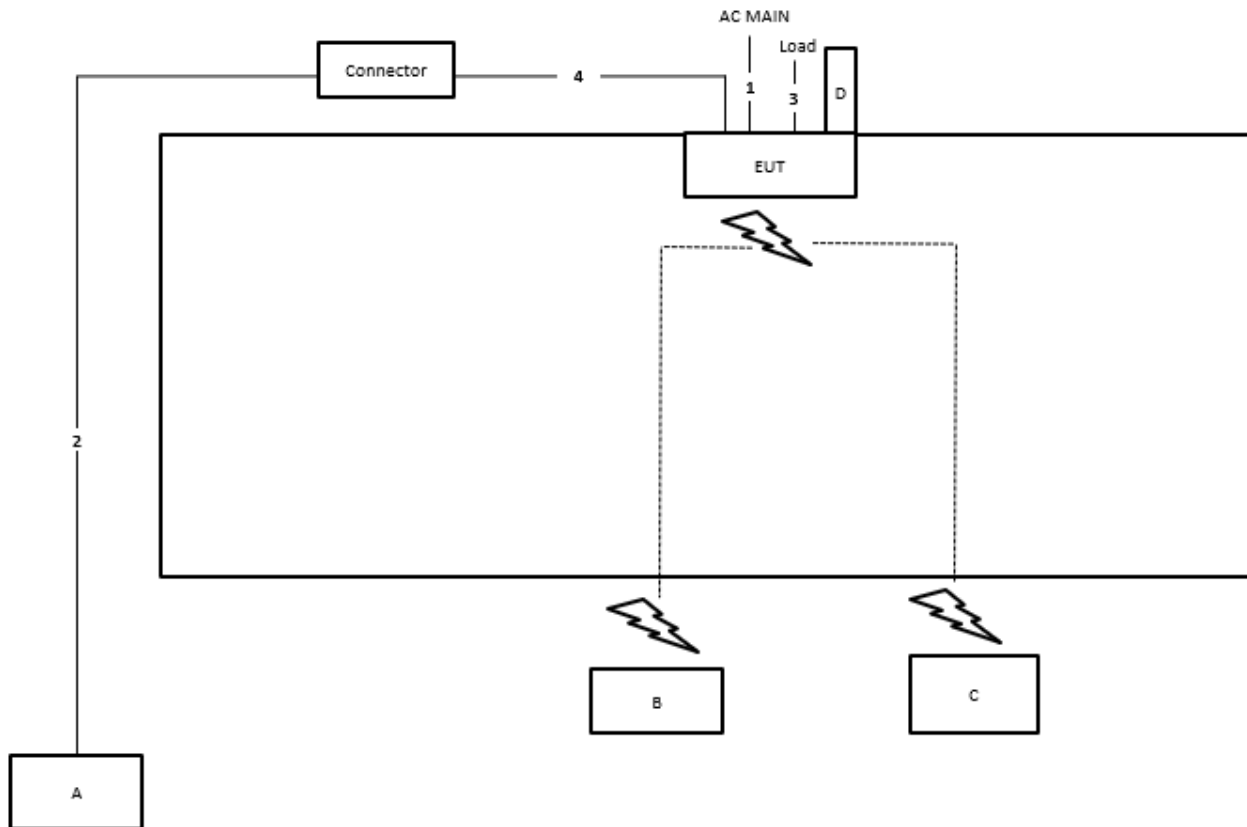
Item	Connection	Shielded	Length
1	Power cable	No	1.8m
2	Cat5e RJ-45 cable	No	10m
3	Cat5e RJ-45 cable	No	10m
4	Cat6 RJ-45 cable	No	10m
5	Cat5e RJ-45 cable	No	10m
6	Cat6 RJ-45 cable	Yes	1.5m
7	Cat6 RJ-45 cable	Yes	10m
8	USB cable	Yes	1.8m

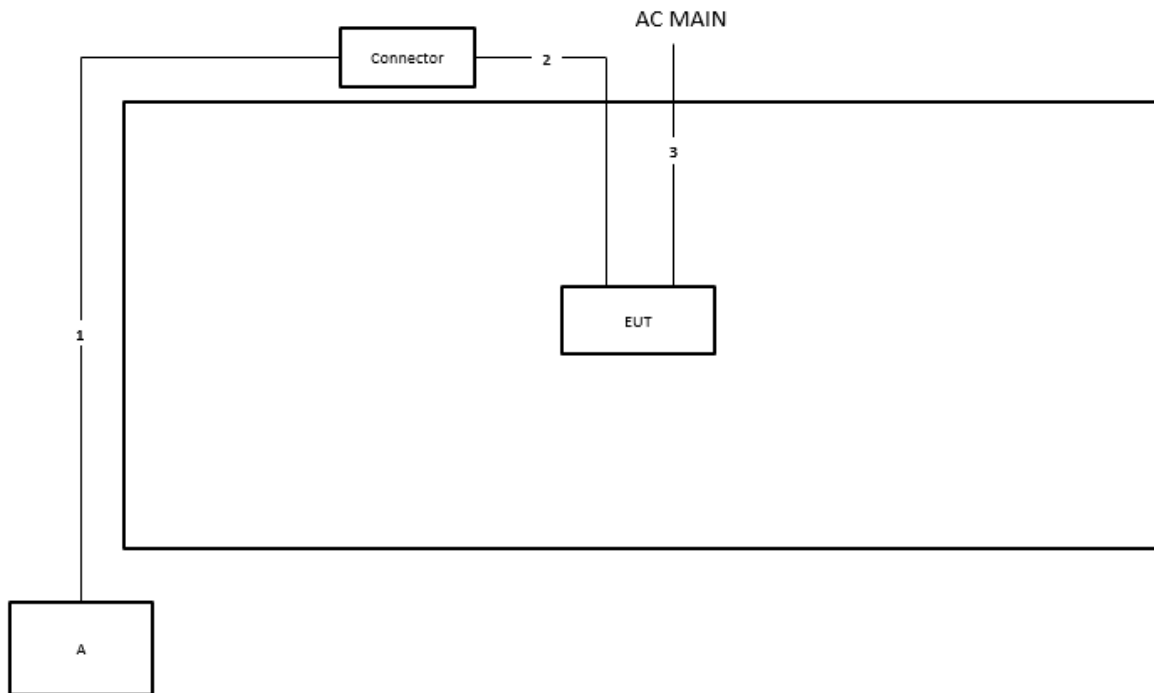Test Setup Diagram - Radiated Test > 1GHz / Non-beamforming mode


Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	RJ-45 cable	Yes	1.5m
3	Power cable	No	1.8m

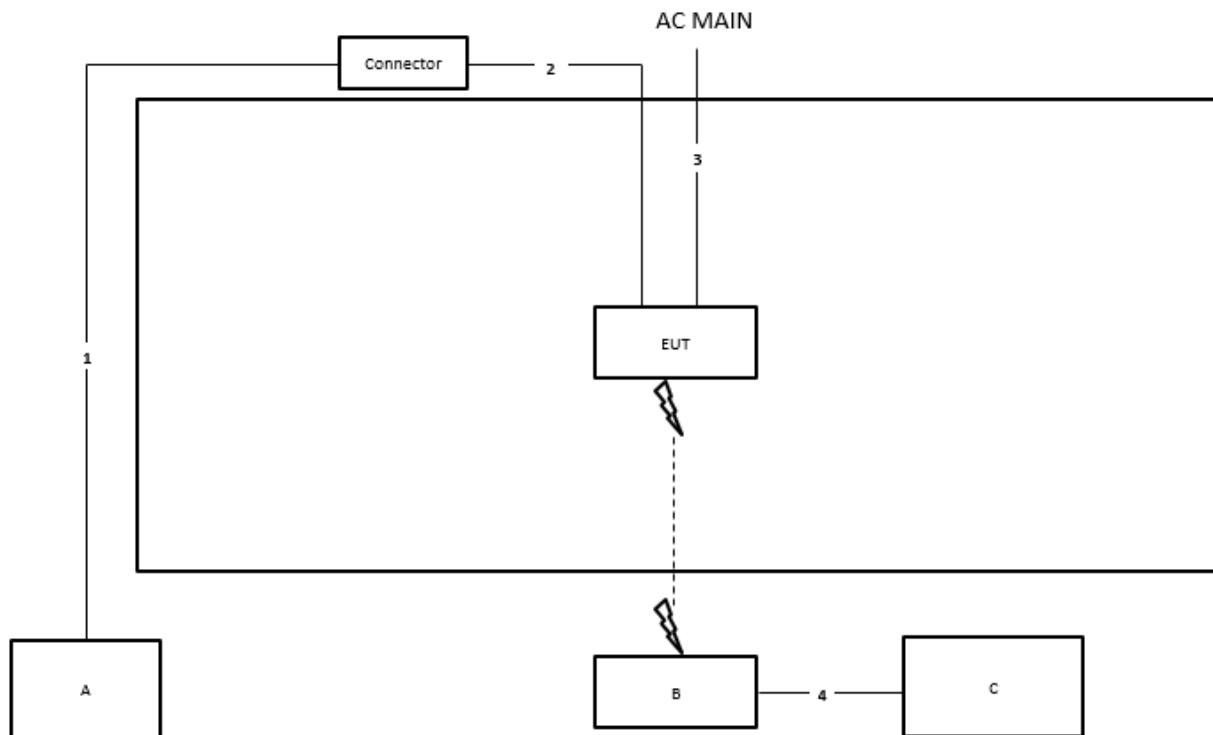Test Setup Diagram - Radiated Test > 1GHz / Beamforming mode


Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	RJ-45 cable	Yes	1.5m
3	Power cable	No	1.8m
4	RJ-45 cable	No	1.5m

Test Setup Diagram - Radiated Test / Co-location


Item	Connection	Shielded	Length
1	Power cable	No	1.8m
2	RJ-45 cable	No	10m
3	RJ-45 cable*4	No	1.5m
4	RJ-45 cable	Yes	1.5m



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50
Note 1: * Decreases with the logarithm of the frequency.		


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2020, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

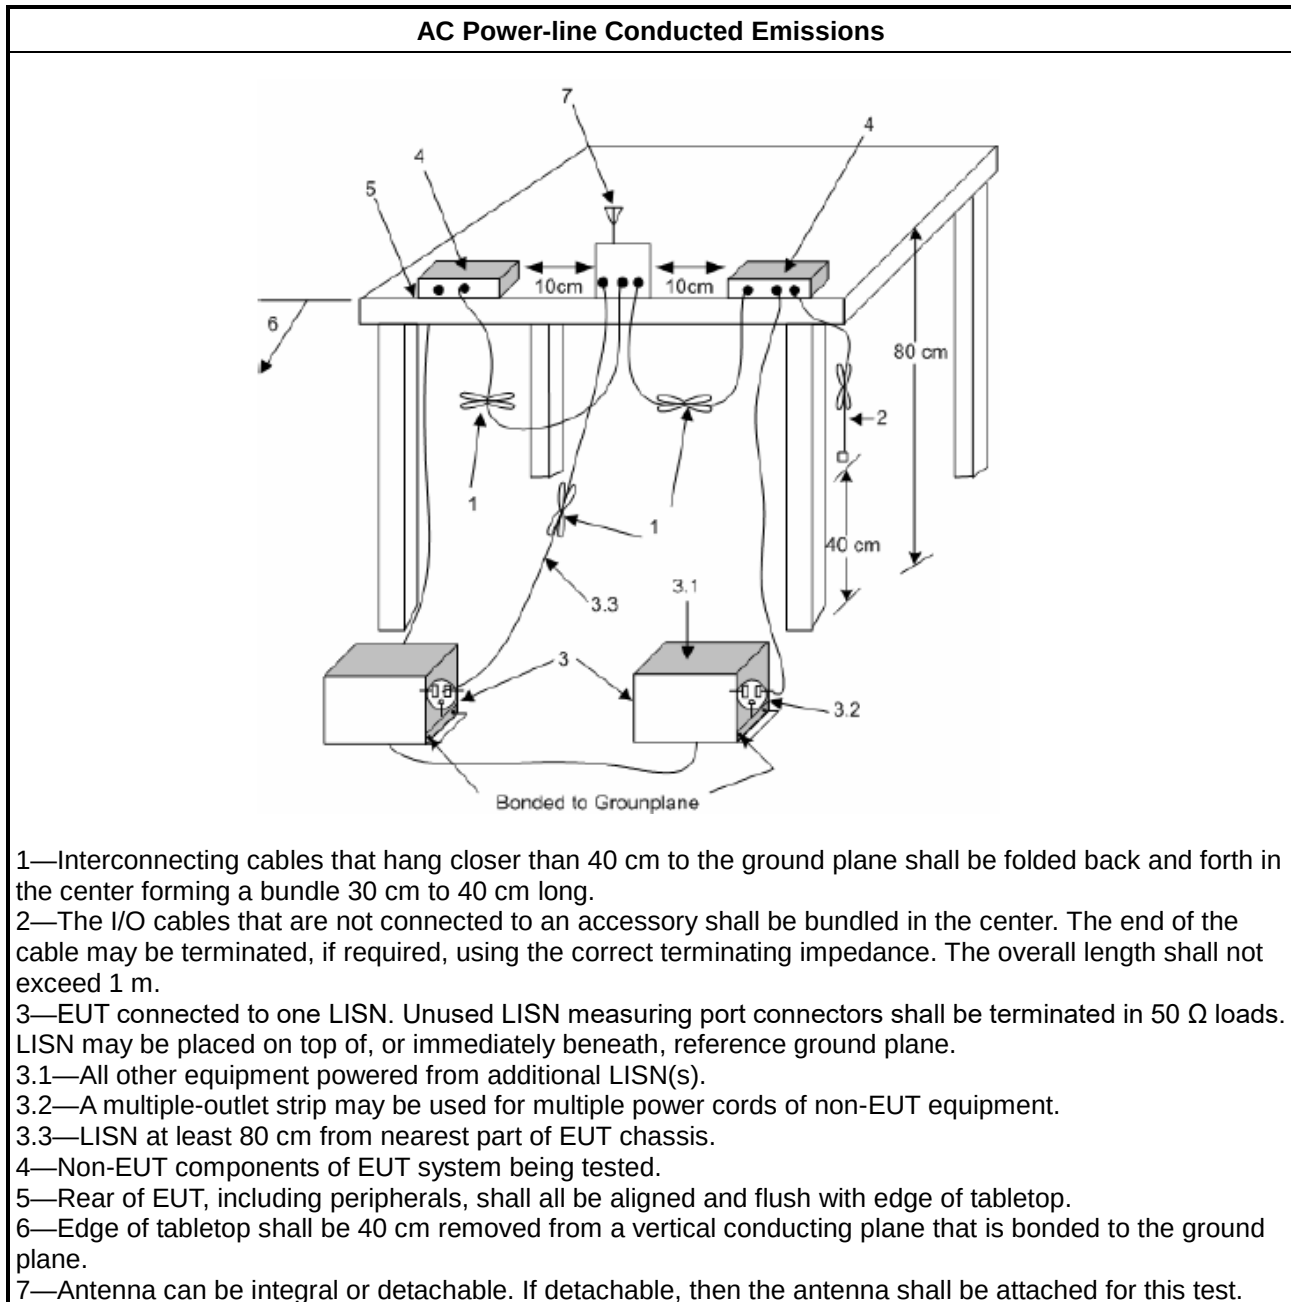

3.1.5 Measurement Results Calculation

The measured Level is calculated using:

- Corrected Reading: LISN Factor (LISN) + Attenuator (AT/AUX) + Cable Loss (CL) + Read Level (Raw) = Level
- Margin = -Limit + Level

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 DTS Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit
Systems using digital modulation techniques:
6 dB bandwidth $\geq$ 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method
For the emission bandwidth shall be measured using one of the options below:
☒ Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.1 Option 1 for 6 dB bandwidth measurement.
☐ Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.2 Option 2 for 6 dB bandwidth measurement.
☐ Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.

3.2.4 Test Setup

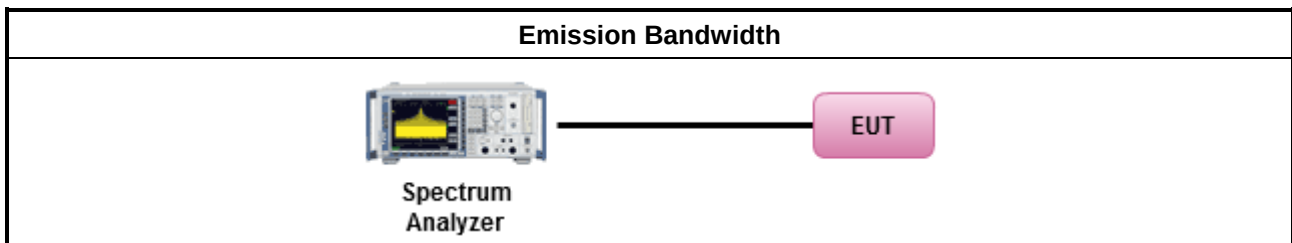

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
	▪ If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	▪ Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
	▪ Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	▪ Smart antenna system (SAS):
	- Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	

3.3.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.



3.3.3 Test Procedures

Test Method	
Maximum Peak Conducted Output Power	
☐	Refer as FCC KDB 558074, clause 8.3.1.1 & C63.10 clause 11.9.1.1 (RBW ≥ EBW method).
☐	Refer as FCC KDB 558074, clause 8.3.1.3 & C63.10 clause 11.9.1.3 (peak power meter).
Maximum Conducted Output Power	
[duty cycle ≥ 98% or external video / power trigger]	
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.2 Method AVGSA-1.
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.3 Method AVGSA-1A. (alternative)
duty cycle < 98% and average over on/off periods with duty factor	
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.4 Method AVGSA-2.
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.5 Method AVGSA-2A (alternative)
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.6 Method AVGSA-3
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.7 Method AVGSA-3A (alternative)
Measurement using a power meter (PM)	
☐	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.1 Method AVGPM (using an RF average power meter).
☒	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.2 Method AVGPM-G (using an gate RF average power meter).
For conducted measurement.	
If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.	
If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$	

3.3.4 Test Setup

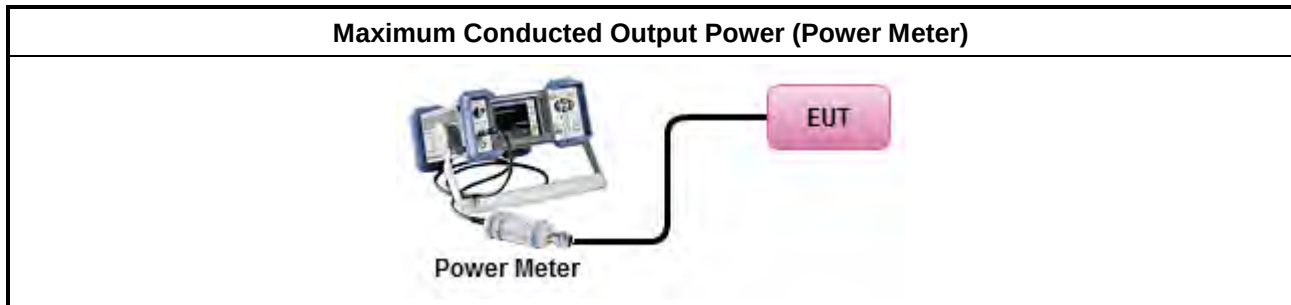

3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C



3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
▪ Power Spectral Density (PSD) ≤ 8 dBm/3kHz


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
▪ Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).	
☒	Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10 Method Max. PSD.
▪ For conducted measurement.	
▪ If The EUT supports multiple transmit chains using options given below:	
☒	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
☐	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.

3.4.4 Test Setup

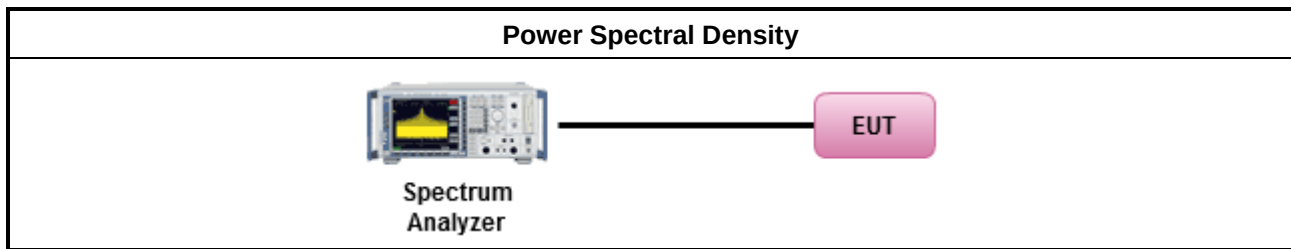

3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

3.5 Emissions in Non-restricted Frequency Bands

3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dBc)
Peak output power procedure	20
Average output power procedure	30
Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level. Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.	


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method
Refer as FCC KDB 558074, clause 8.5 for unwanted emissions into non-restricted bands.

3.5.4 Test Setup

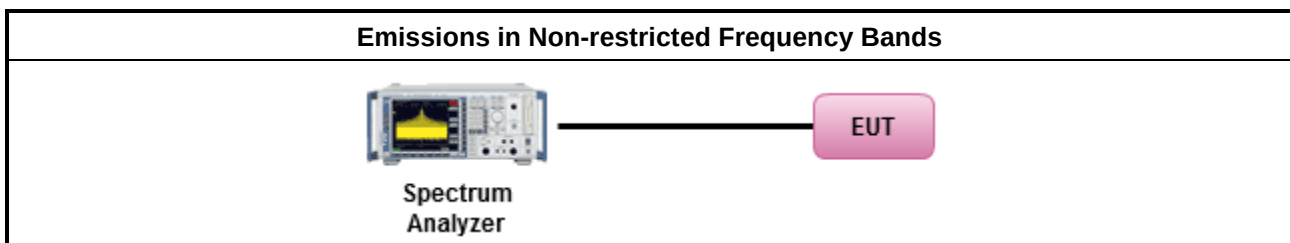

3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E



3.6 Emissions in Restricted Frequency Bands

3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.


3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.


**3.6.3 Test Procedures**

Test Method	
▪ The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].	
▪ Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.	
▪ For the transmitter unwanted emissions shall be measured using following options below:	
	▪ Refer as FCC KDB 558074, clause 8.6 for unwanted emissions into restricted bands.
	☐ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.1(trace averaging for duty cycle $\geq 98\%$).
	☐ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.2(trace averaging + duty factor).
	☒ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.3(Reduced VBW $\geq 1/T$).
	☐ Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq 1/T$, where T is pulse time.
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.4 measurement procedure peak limit.
▪ For the transmitter band-edge emissions shall be measured using following options below:	
	▪ Refer as FCC KDB 558074 clause 8.7 & C63.10 clause 11.13.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.
	▪ Refer as FCC KDB 558074, clause 8.7 (ANSI C63.10, clause 6.10.6) for marker-delta method for band-edge measurements.
	▪ Refer as FCC KDB 558074, clause 8.7 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
	▪ For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB
	▪ For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.

3.6.4 Test Setup

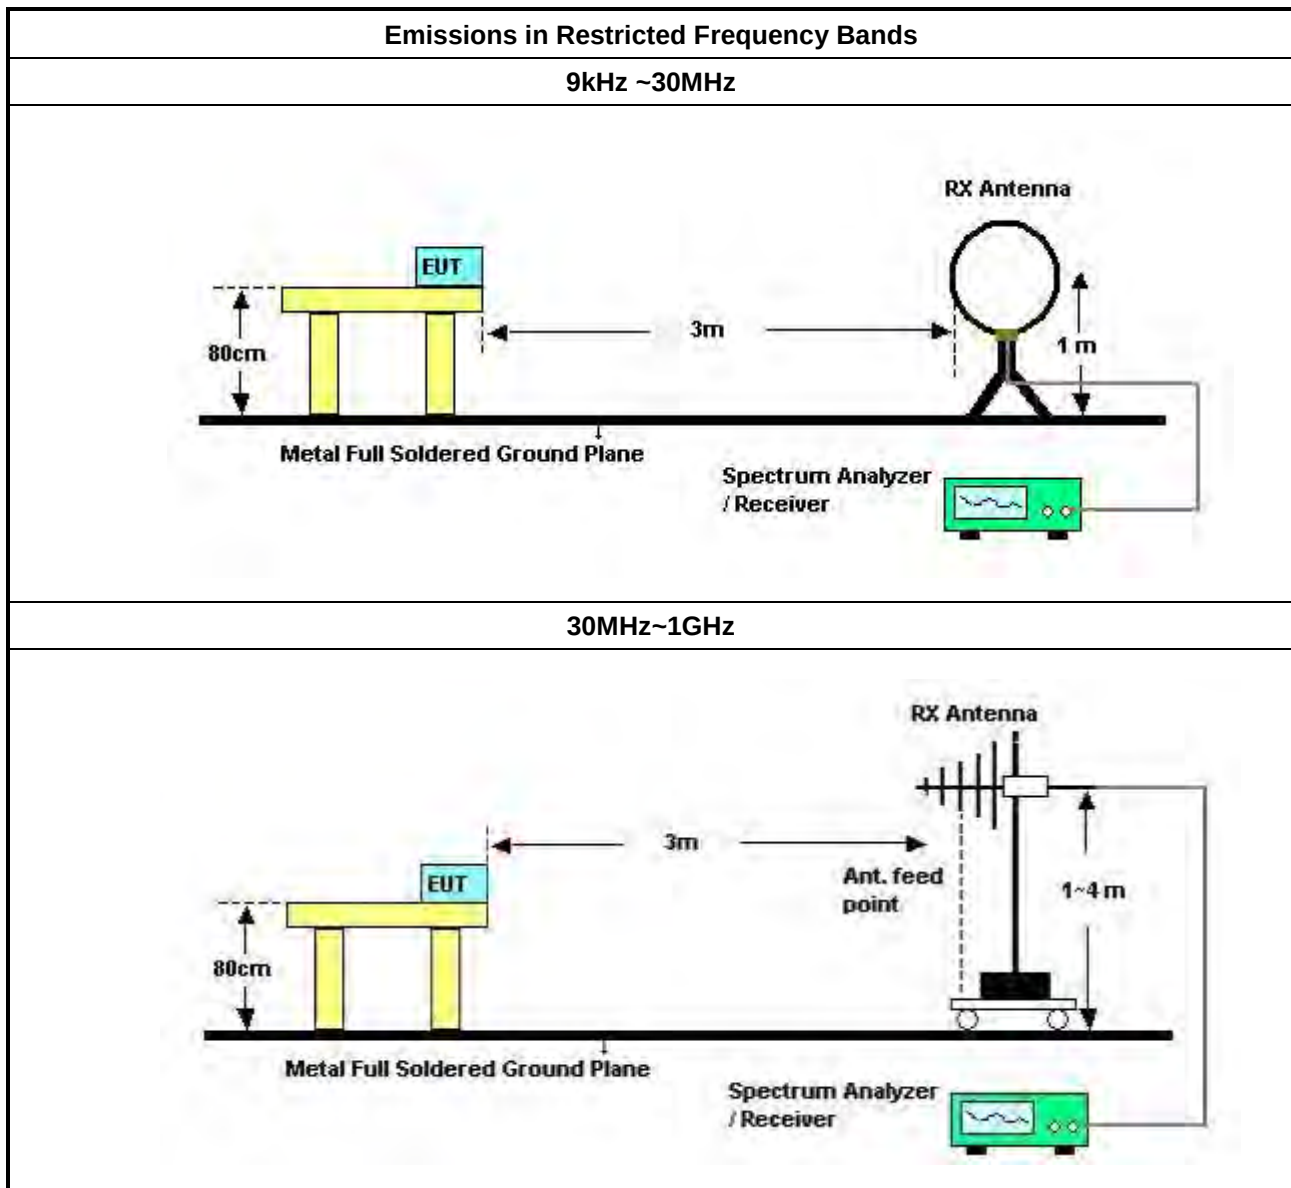

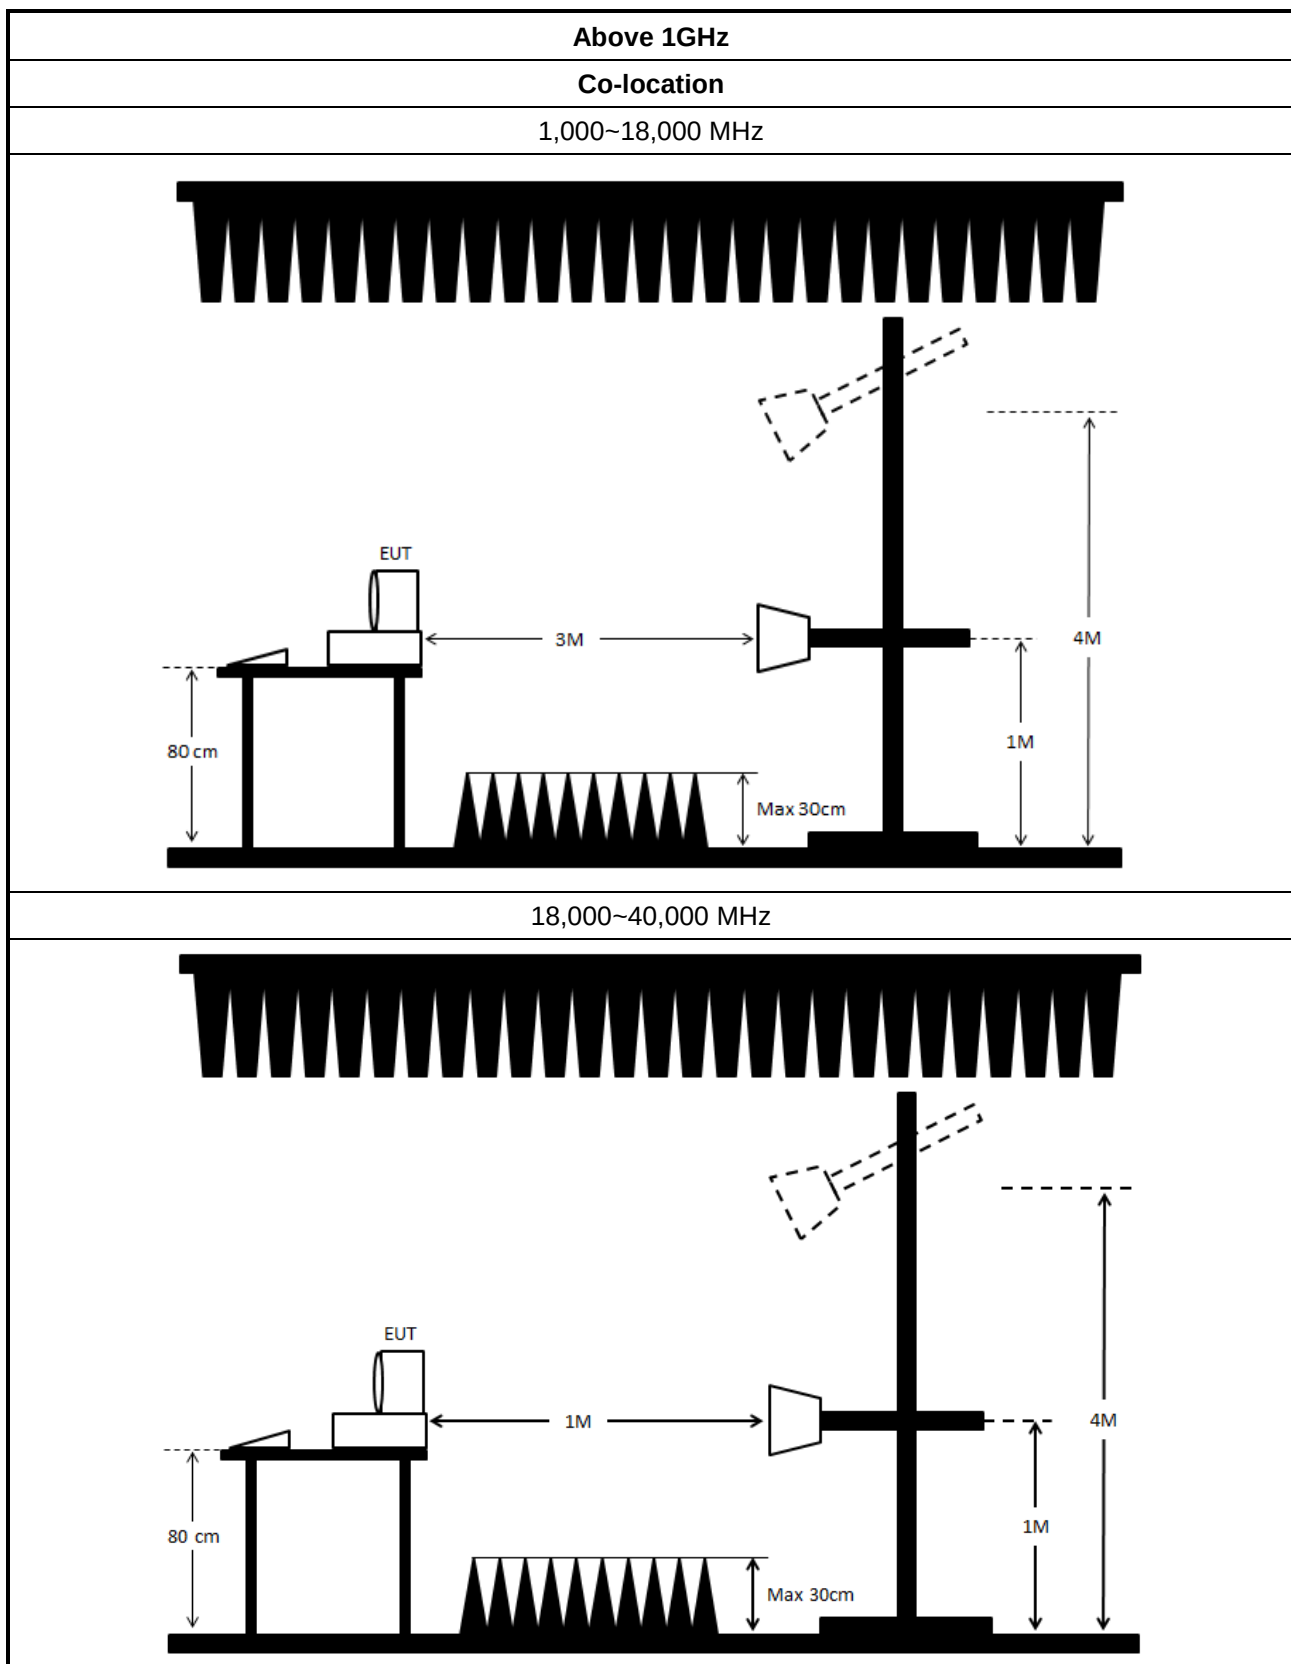

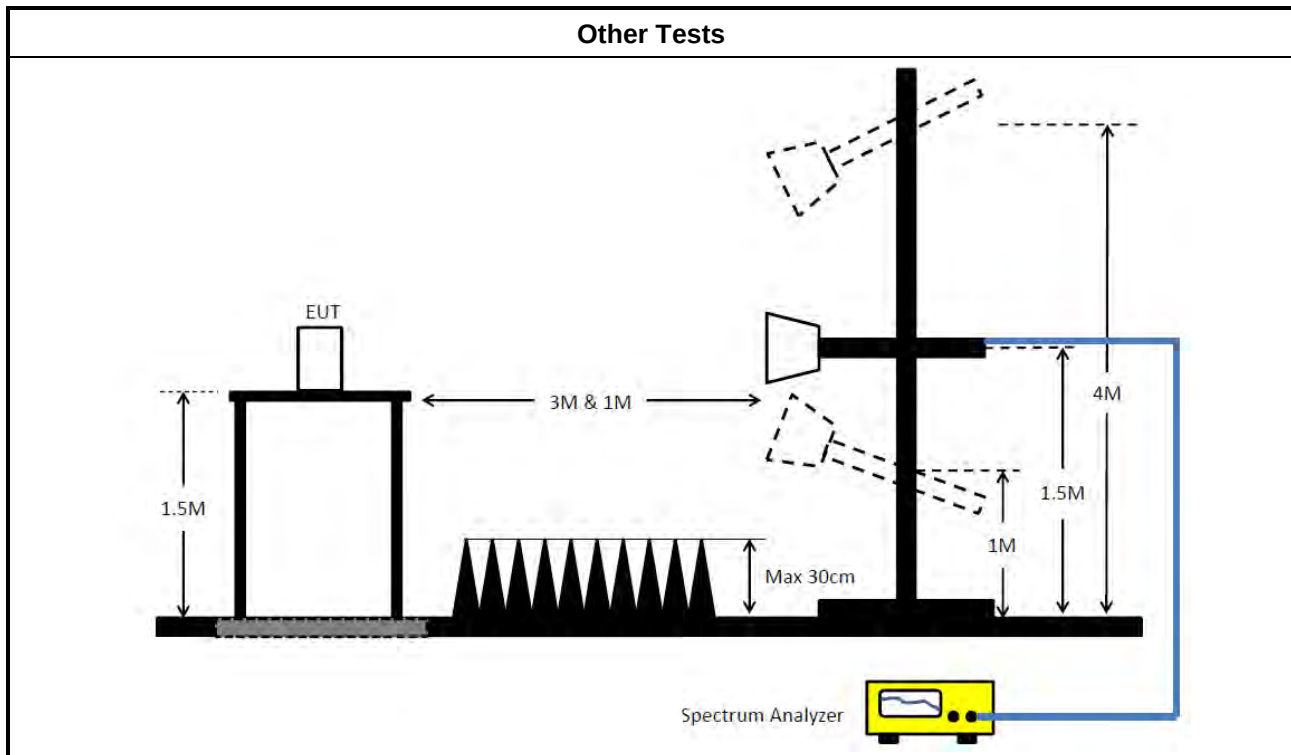

3.6.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable) = Level.

3.6.6 Emissions in Restricted Frequency Bands (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.6.7 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix F



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
LISN	Schwarzbeck	NSLK 8127	8127650	9kHz ~ 30MHz	Feb. 25, 2026	Feb. 24, 2027	Conduction (CO02-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Jan. 29, 2026	Jan. 28, 2027	Conduction (CO02-CB)
EMI Receiver	Agilent	N9038A	MY52260140	9kHz ~ 8.4GHz	May 14, 2025	May 13, 2026	Conduction (CO02-CB)
COND Cable	Woken	Cable	CO02	0.15MHz ~ 30MHz	Sep.14, 2025	Sep.13, 2026	Conduction (CO02-CB)
Pulse Limiter	Schwarzbeck	VTSD9561F-N	00378	9kHz ~ 30MHz	Sep.14, 2025	Sep.13, 2026	Conduction (CO02-CB)
Test Software	SPORTON	SENSE-EMI	V5.11	150kHz-30MHz	N.C.R.	N.C.R.	Conduction (CO02-CB)
Loop Antenna	Teseq	HLA 6121	65417	9kHz - 30MHz	Oct. 20, 2025	Oct. 19, 2026	Radiation (10CH01-CB)
10m Semi Anechoic Chamber NSA	TDK	SAC-10M	10CH01-CB	30MHz~1GHz 10m,3m	Jan. 14, 2026	Jan. 13, 2027	Radiation (10CH01-CB)
Amplifier	Agilent	8447D	2944A10783	9kHz ~ 1.3GHz	Mar. 07, 2026	Mar. 06, 2027	Radiation (10CH01-CB)
Amplifier	Agilent	8447D	2944A10784	9kHz ~ 1.3GHz	Mar. 07, 2026	Mar. 06, 2027	Radiation (10CH01-CB)
Low Cable	Woken	SUCOFLEX 104	low cable-01	25MHz ~ 1GHz	Oct. 14, 2025	Oct. 13, 2026	Radiation (10CH01-CB)
Low Cable	Woken	SUCOFLEX 104	low cable-02	25MHz ~ 1GHz	Oct. 14, 2025	Oct. 13, 2026	Radiation (10CH01-CB)
EMI Test Receiver	Rohde&Schwarz	ESR7	103076	9kHz ~ 7GHz	Aug. 27, 2025	Aug. 26, 2026	Radiation (10CH01-CB)
Spectrum analyzer	R&S	FSV40	101027	9kHz~40GHz	Sep. 03, 2025	Sep. 02, 2026	Radiation (10CH01-CB)
High Cable	TITAN	T318E	High cable01	30MHz ~ 18GHz	Nov. 14, 2025	Nov. 13, 2026	Radiation (10CH01-CB)
Bilog Ant & 6dB Attenuator	SCHWARZBECK & EMCI	VULB 9168 & N-6-06	1469 & AT-N06021	30MHz ~ 1GHz	Jan. 08, 2026	Jan. 07, 2027	Radiation (10CH01-CB)
Amplifier	EM	EM101	060703	10MHz ~ 1GHz	Oct. 15, 2025	Oct. 14, 2026	Radiation (10CH01-CB)
Test Software	SPORTON	SENSE-EMI	V5.11	30MHz-40GHz	N.C.R.	N.C.R.	Radiation (10CH01-CB)
3m Semi Anechoic Chamber VSWR	RIKEN	SAC-3M	03CH02-CB	1GHz ~18GHz	Mar. 23, 2025	Mar. 22, 2026	Radiation (03CH02-CB)
3m Semi Anechoic Chamber VSWR	RIKEN	SAC-3M	03CH02-CB	1GHz ~18GHz	Mar. 21, 2026	Mar. 20, 2027	Radiation (03CH02-CB)
Horn Antenna	EMCO	3115	9610-4976	1GHz ~ 18GHz	Apr. 15, 2025	Apr. 14, 2026	Radiation (03CH02-CB)
Horn Antenna	EMCO	3115	9610-4976	1GHz ~ 18GHz	Apr. 24, 2026	Apr. 23, 2027	Radiation (03CH02-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Horn Antenna	ETS-Lindgren	3115	00143147	750MHz~18GHz	Nov. 05, 2025	Nov. 04, 2026	Radiation (03CH02-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH02-CB)
Pre-Amplifier	Agilent	83017A	MY39501305	1GHz ~ 26.5GHz	Jun. 28, 2025	Jun. 27, 2026	Radiation (03CH02-CB)
Pre-Amplifier	EMCI	EMC12630SE	980383	1GHz ~ 18GHz	Jul. 30, 2025	Jul. 29, 2026	Radiation (03CH02-CB)
Signal Analyzer	R&S	FSV3044	101536	10kHz ~ 44GHz	Aug. 20, 2025	Aug. 19, 2026	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18	1GHz ~ 18GHz	Jun. 19, 2025	Jun. 18, 2026	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18+19	1GHz ~ 18GHz	Jun. 19, 2025	Jun. 18, 2026	Radiation (03CH02-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Nov. 13, 2025	Nov. 12, 2026	Radiation (03CH02-CB)
Test Software	SPORTON	SENSE-15247_DTS	V5.11.27	2.4GHz-2.4835GHz	N.C.R.	N.C.R.	Radiation (03CH02-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH03-CB	1GHz ~18GHz 3m	May 02, 2025	May 01, 2026	Radiation (03CH03-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH03-CB	1GHz ~18GHz 3m	May 01, 2026	Apr. 30, 2027	Radiation (03CH03-CB)
Horn Antenna	ETS-Lindgren	3115	6821	750MHz~18GHz	Feb. 06, 2026	Feb. 05, 2027	Radiation (03CH03-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH03-CB)
Pre-Amplifier	Agilent	8449B	3008A02097	1GHz ~ 26.5GHz	Jun. 28, 2025	Jun. 27, 2026	Radiation (03CH03-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 21, 2025	Nov. 20, 2026	Radiation (03CH03-CB)
Spectrum Analyzer	R&S	FSP40	100019	9kHz ~ 40GHz	Jul. 17, 2025	Jul. 16, 2026	Radiation (03CH03-CB)
RF Cable-high	Woken	RG402	High Cable-20+29	1GHz ~ 18GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH03-CB)
RF Cable-high	Woken	RG402	High Cable-29	1GHz ~ 18GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH03-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Nov. 13, 2025	Nov. 12, 2026	Radiation (03CH03-CB)
Test Software	SPORTON	SENSE-15247_DTS	V5.11.27	2.4GHz-2.4835GHz	N.C.R.	N.C.R.	Radiation (03CH03-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH04-CB	1GHz ~18GHz 3m	Feb. 13, 2026	Feb. 12, 2027	Radiation (03CH04-CB)
Horn Antenna	ETS-Lindgren	3115	00143147	750MHz~18 GHz	Nov. 05, 2025	Nov. 04, 2026	Radiation (03CH04-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH04-CB)
Pre-Amplifier	SGH	SGH5265	20211115-1	1~ 26.5GHz	Jan. 13, 2026	Jan. 12, 2027	Radiation (03CH04-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 21, 2025	Nov. 20, 2026	Radiation (03CH04-CB)
Spectrum Analyzer	R&S	FSP40	100142	9kHz~40GHz	Mar. 30, 2026	Mar. 29, 2027	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-21	1GHz - 18GHz	Apr. 25, 2025	Apr. 24, 2026	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-21	1GHz - 18GHz	Apr. 24, 2026	Apr. 23, 2027	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-21+67	1GHz - 18GHz	Apr. 25, 2025	Apr. 24, 2026	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-21+67	1GHz - 18GHz	Apr. 24, 2026	Apr. 23, 2027	Radiation (03CH04-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Nov. 13, 2025	Nov. 12, 2026	Radiation (03CH04-CB)
Test Software	SPORTON	SENSE-EMI	V5.11	30MHz-40GHz	N.C.R.	N.C.R.	Radiation (03CH04-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH04-CB	1GHz ~18GHz 3m	Feb. 13, 2026	Feb. 12, 2027	Radiation (03CH06-CB)
Horn Antenna	SCHWARZBECK	BBHA9120D	BBHA 9120D-1292	1GHz~18GHz	Aug. 22, 2025	Aug. 21, 2026	Radiation (03CH06-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH06-CB)
Pre-Amplifier	EMCI	EMC12630SE	980383	1GHz ~ 18GHz	Jul. 30, 2025	Jul. 29, 2026	Radiation (03CH06-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 21, 2025	Nov. 20, 2026	Radiation (03CH06-CB)
RF Cable-high	Woken	RG402	High Cable-05+68	1GHz~18GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH06-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Nov. 13, 2025	Nov. 12, 2026	Radiation (03CH06-CB)
Test Software	SPORTON	SENSE-15247_DTS	V5.11.27	2.4GHz-2.4835GHz	N.C.R.	N.C.R.	Radiation (03CH06-CB)
Signal Analyzer	R&S	FSV3044	101320	9kHz ~ 44GHz	Aug. 07, 2025	Aug. 06, 2026	Conducted (TH01-CB)
Switch	SPTCB	SP-SWI	SWI-01	1~18 GHz	Sep. 20, 2025	Sep. 19, 2026	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-06	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-07	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-08	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-09	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH01-CB)
Power Sensor	Agilent	E9327A	US40442088	50MHz~18GHz	Jul. 04, 2025	Jul. 03, 2026	Conducted (TH01-CB)



RADIO TEST REPORT

Report No. : FR640714AA

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Power Meter	Agilent	E4416A	MY45100745	50MHz~18GHz	Jul. 04, 2025	Jul. 03, 2026	Conducted (TH01-CB)
Test Software	SPORTON	SENSE-15247_DTS	V5.11.27	2.4GHz-2.4835GHz	N.C.R.	N.C.R.	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

NCR means Non-Calibration required.




Conducted Emissions at Powerline

Appendix A

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	QP	150k	54.96	66.00	-11.04	Neutral

Mode 1

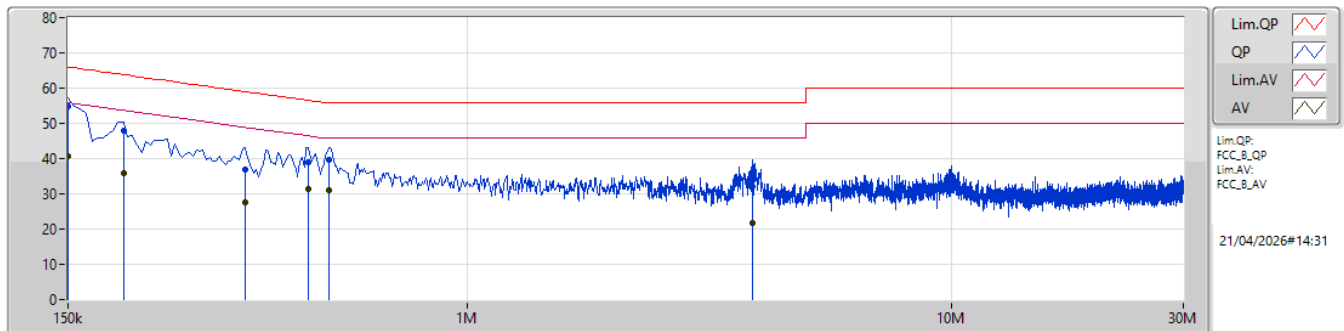

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	150k	54.88	66.00	-11.12	10.48	Line	"Worst"	44.40	0.12	0.27	10.09						
AV	150k	40.59	56.00	-15.41	10.48	Line	-	30.11	0.12	0.27	10.09						
QP	195k	48.07	63.82	-15.75	10.32	Line	-	37.75	0.12	0.22	9.98						
AV	195k	35.77	53.82	-18.05	10.32	Line	-	25.45	0.12	0.22	9.98						
QP	348k	36.84	59.00	-22.16	10.46	Line	-	26.38	0.12	0.27	10.07						
AV	348k	27.52	49.00	-21.48	10.46	Line	-	17.06	0.12	0.27	10.07						
QP	469.5k	38.86	56.52	-17.66	10.50	Line	-	28.36	0.13	0.27	10.10						
AV	469.5k	31.40	46.52	-15.12	10.50	Line	-	20.90	0.13	0.27	10.10						
QP	519k	39.69	56.00	-16.31	10.50	Line	-	29.19	0.13	0.27	10.10						
AV	519k	30.96	46.00	-15.04	10.50	Line	-	20.46	0.13	0.27	10.10						
QP	3.881M	32.23	56.00	-23.77	10.60	Line	-	21.63	0.34	0.28	9.98						
AV	3.881M	21.58	46.00	-24.42	10.60	Line	-	10.98	0.34	0.28	9.98						

Mode 1

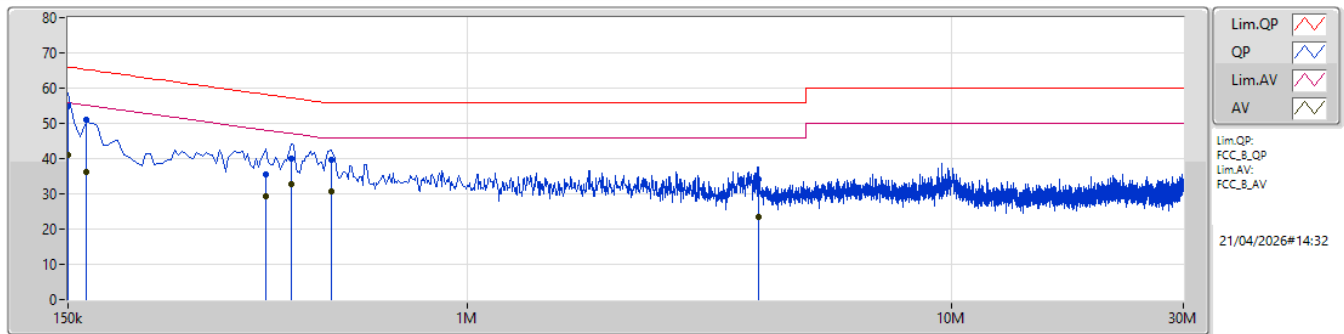

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	150k	54.96	66.00	-11.04	10.48	Neutral	"Worst"	44.48	0.12	0.27	10.09						
AV	150k	40.94	56.00	-15.06	10.48	Neutral	-	30.46	0.12	0.27	10.09						
QP	163.5k	50.89	65.27	-14.38	10.43	Neutral	-	40.46	0.12	0.25	10.06						
AV	163.5k	36.13	55.27	-19.14	10.43	Neutral	-	25.70	0.12	0.25	10.06						
QP	384k	35.35	58.20	-22.85	10.49	Neutral	-	24.86	0.13	0.28	10.08						
AV	384k	29.48	48.20	-18.72	10.49	Neutral	-	18.99	0.13	0.28	10.08						
QP	433.5k	39.83	57.19	-17.36	10.50	Neutral	-	29.33	0.13	0.28	10.09						
AV	433.5k	32.77	47.19	-14.42	10.50	Neutral	-	22.27	0.13	0.28	10.09						
QP	523.5k	39.50	56.00	-16.50	10.51	Neutral	-	28.99	0.14	0.27	10.10						
AV	523.5k	30.70	46.00	-15.30	10.51	Neutral	-	20.19	0.14	0.27	10.10						
QP	3.993M	34.31	56.00	-21.69	10.56	Neutral	-	23.75	0.30	0.28	9.98						
AV	3.993M	23.41	46.00	-22.59	10.56	Neutral	-	12.85	0.30	0.28	9.98						

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
802.11b_Nss1,(1Mbps)_4TX	7.575M	10.716M	10M7G1D	5.7M	10.078M
802.11g_Nss1,(6Mbps)_4TX	16.475M	17.947M	17M9D1D	13.575M	16.648M
802.11 bn UHR20-BF_Nss1,(MCS0)_4TX	18.5M	18.995M	19M0D1D	12.7M	18.831M
802.11 bn UHR20-BF_Nss2,(MCS0)_4TX	18.75M	19.12M	19M1D1D	12.425M	18.848M
802.11 bn UHR40-BF_Nss1,(MCS0)_4TX	35.65M	37.791M	37M8D1D	27.4M	37.428M
802.11 bn UHR40-BF_Nss2,(MCS0)_4TX	37.85M	37.786M	37M8D1D	27.25M	37.539M

Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth



Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11b_Nss1,(1Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	500k	7.575M	10.085M	7.075M	10.223M	6.575M	10.18M	6.625M	10.134M
2417MHz										
2437MHz	Pass	500k	7.1M	10.079M	5.7M	10.078M	7.075M	10.225M	7.075M	10.226M
2457MHz										
2462MHz	Pass	500k	6.55M	10.313M	6.275M	10.34M	7.575M	10.716M	6.125M	10.276M
802.11g_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	500k	16M	16.743M	16.35M	16.83M	16.225M	16.791M	16.35M	16.727M
2417MHz										
2437MHz	Pass	500k	16.475M	17.947M	16.375M	17.078M	16.15M	16.78M	16.35M	16.648M
2457MHz										
2462MHz	Pass	500k	16.4M	16.916M	13.575M	16.817M	16.375M	16.889M	16.375M	16.798M
802.11 bn UHR20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	500k	12.7M	18.831M	14.05M	18.928M	16.95M	18.903M	14.125M	18.834M
2417MHz										
2437MHz	Pass	500k	17.85M	18.863M	17.9M	18.893M	17.55M	18.845M	18.5M	18.869M
2457MHz										
2462MHz	Pass	500k	18.375M	18.995M	15.075M	18.894M	14.75M	18.882M	15.2M	18.936M
802.11 bn UHR40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
2422MHz	Pass	500k	28.65M	37.569M	31.7M	37.677M	30.4M	37.428M	30.85M	37.57M
2437MHz	Pass	500k	32.6M	37.726M	33.85M	37.632M	31.5M	37.569M	27.4M	37.441M
2447MHz										
2452MHz	Pass	500k	34.8M	37.634M	33.85M	37.55M	31.3M	37.654M	35.65M	37.791M
802.11 bn UHR20-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	500k	16.7M	18.885M	15.725M	18.876M	13.9M	18.848M	12.425M	18.874M
2417MHz										
2437MHz	Pass	500k	17.15M	19.12M	14.225M	19.09M	18.575M	19.11M	16.325M	18.857M
2457MHz										
2462MHz	Pass	500k	18.75M	18.871M	15.9M	18.939M	13.275M	18.904M	15.075M	18.96M
802.11 bn UHR40-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
2422MHz	Pass	500k	33.85M	37.635M	27.25M	37.582M	30.55M	37.539M	36.5M	37.57M
2437MHz	Pass	500k	30.55M	37.786M	30.9M	37.669M	27.45M	37.661M	32.55M	37.544M
2447MHz										
2452MHz	Pass	500k	29.6M	37.649M	37.85M	37.633M	29.45M	37.603M	34.05M	37.641M



Port X-N dB = Port X 6dB down bandwidth;
Port X-OBW = Port X 99% occupied bandwidth

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX
EBW
2412MHz

15/05/2026

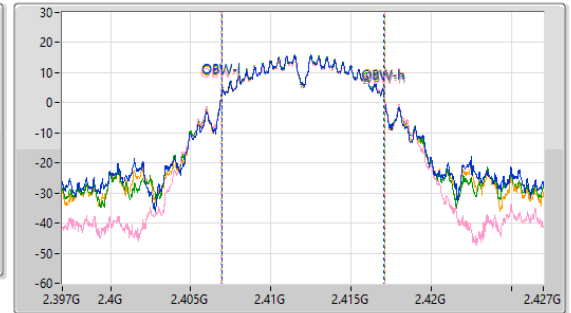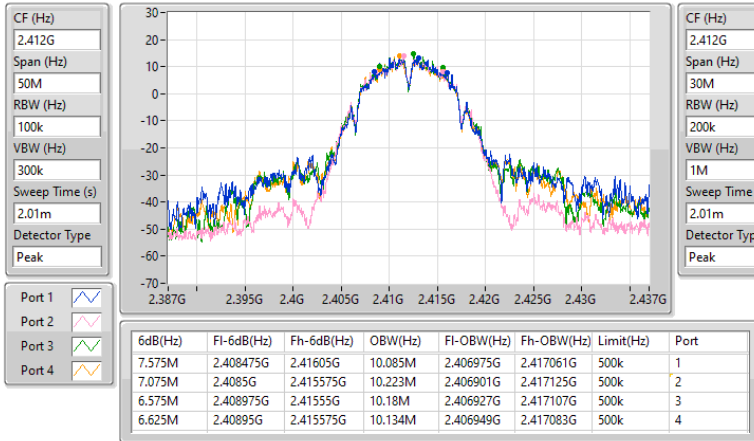

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX
EBW
2437MHz

15/05/2026

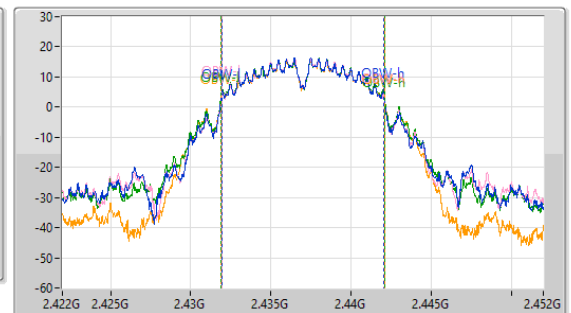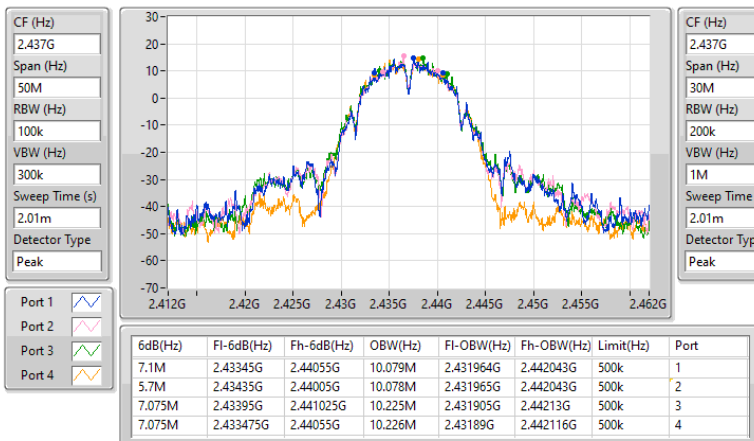


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX
EBW
2462MHz

15/05/2026

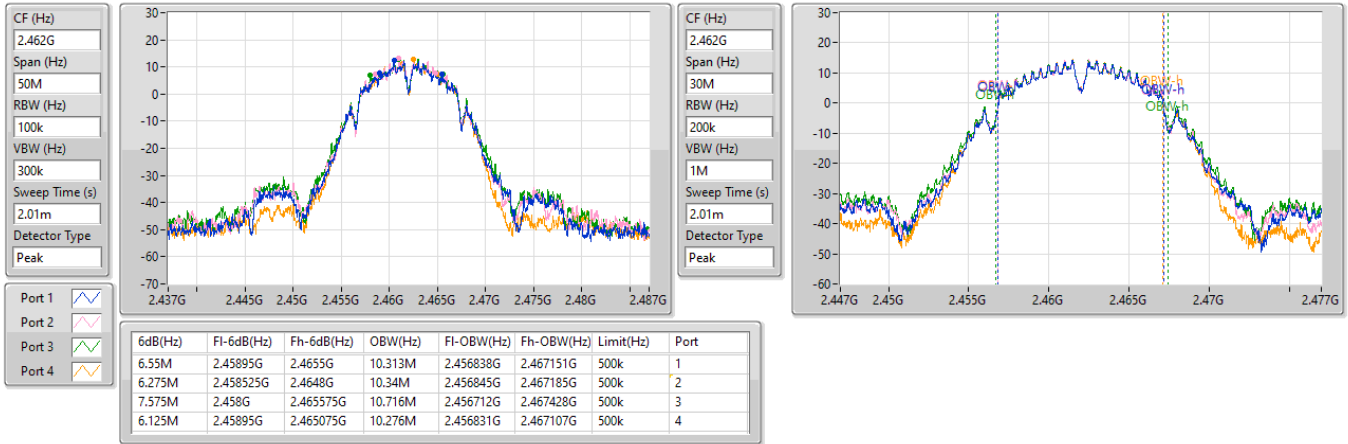

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX
EBW
2412MHz

15/05/2026

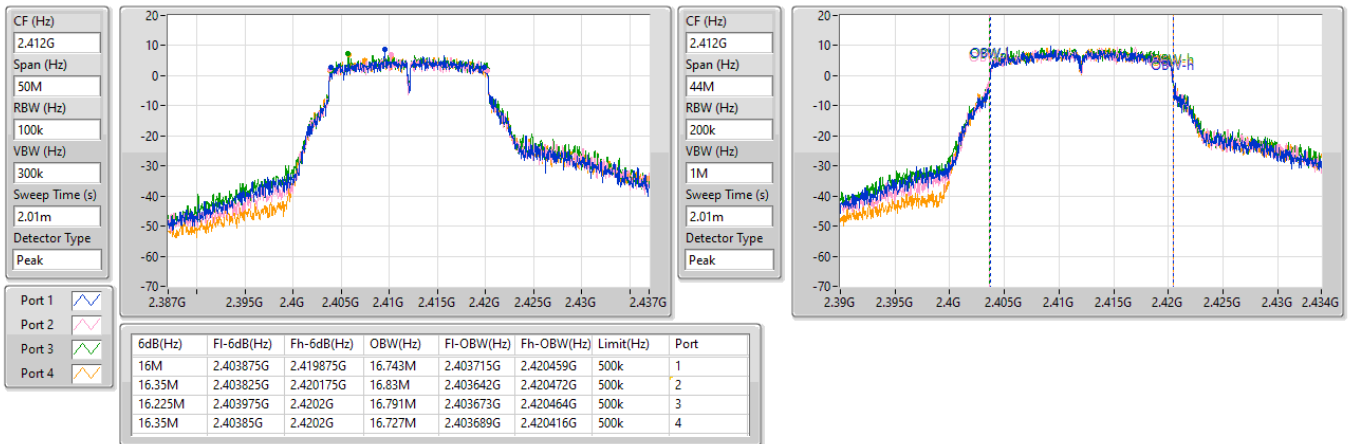


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX
EBW
2437MHz

15/05/2026

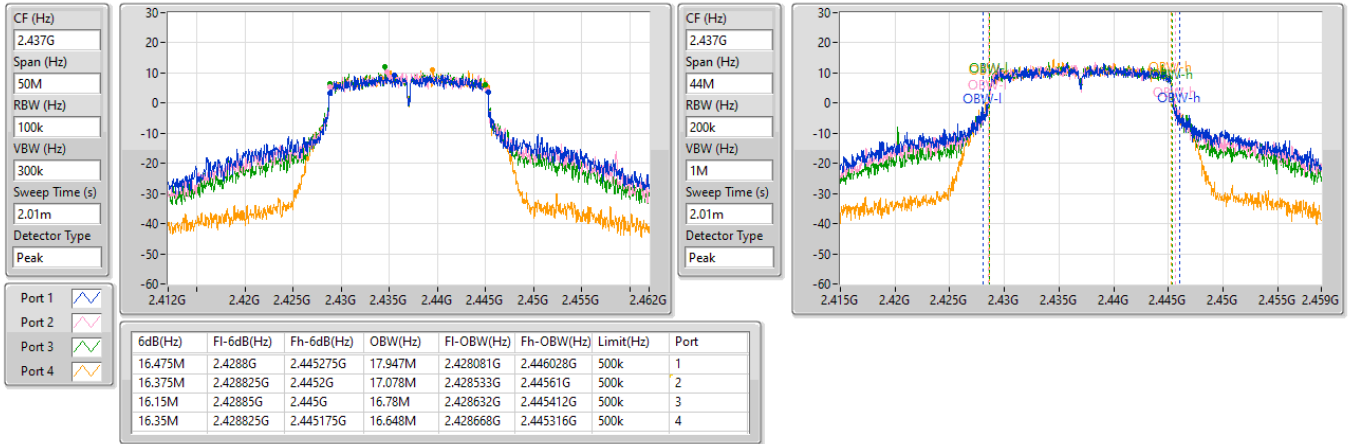
2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX
EBW
2462MHz

15/05/2026

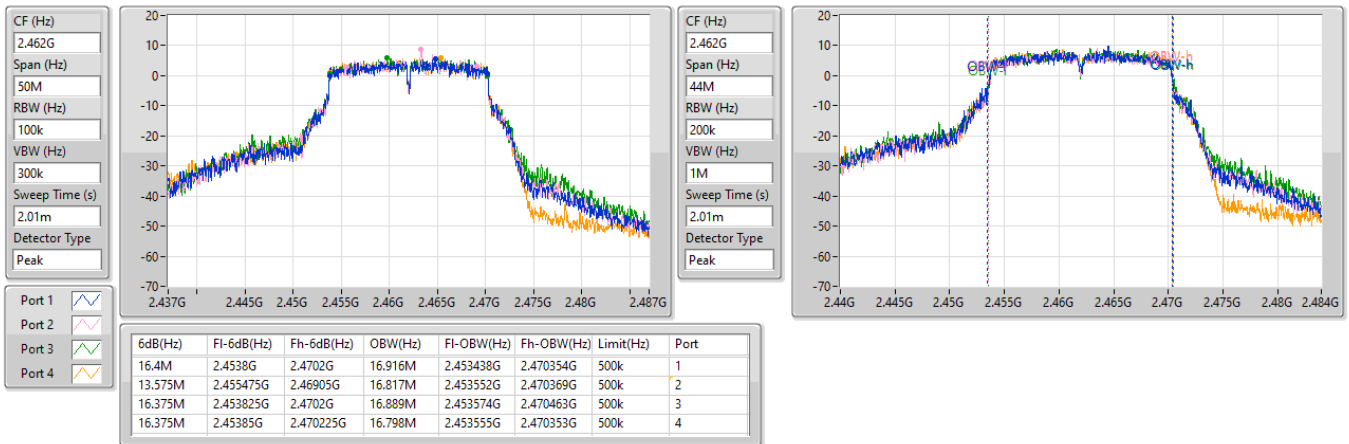


2.4-2.4835GHz_802.11 bn UHR20-BF_Nss1,(MCS0)_4TX

EBW

2412MHz

15/05/2026

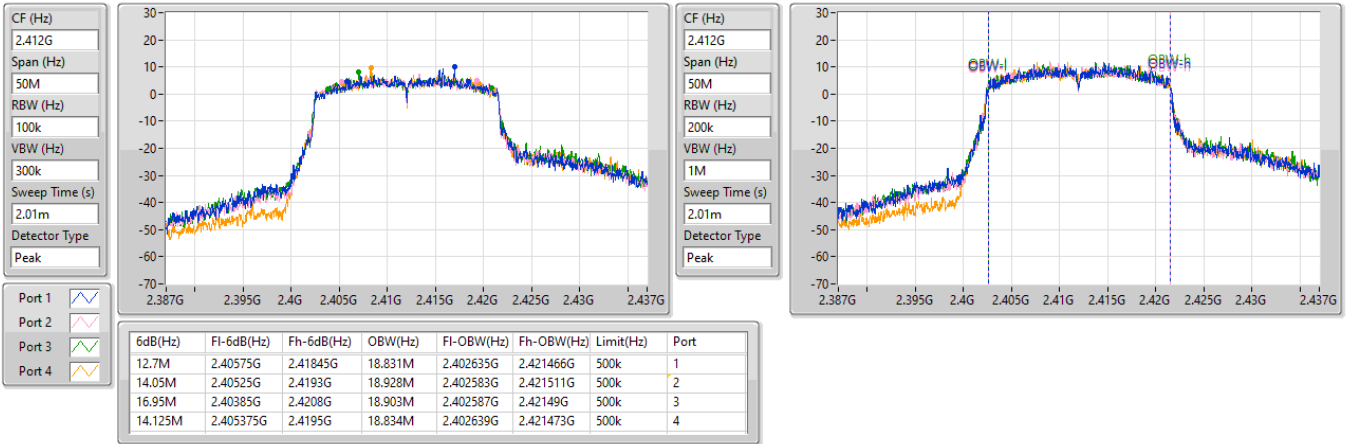


2.4-2.4835GHz_802.11 bn UHR20-BF_Nss1,(MCS0)_4TX

EBW


2437MHz

15/05/2026

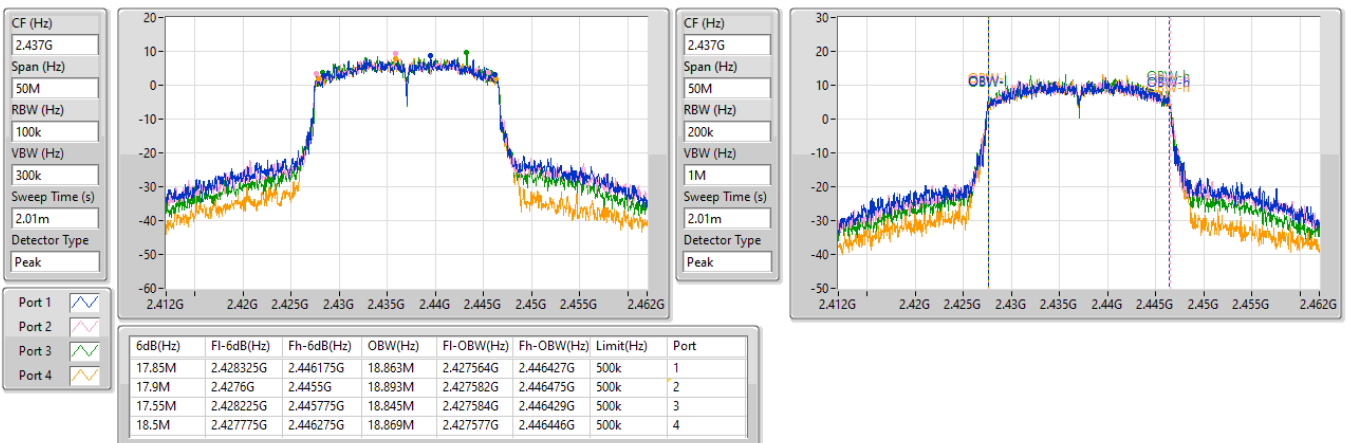


2.4-2.4835GHz_802.11 bn UHR20-BF_Nss1,(MCS0)_4TX
EBW
2462MHz

15/05/2026

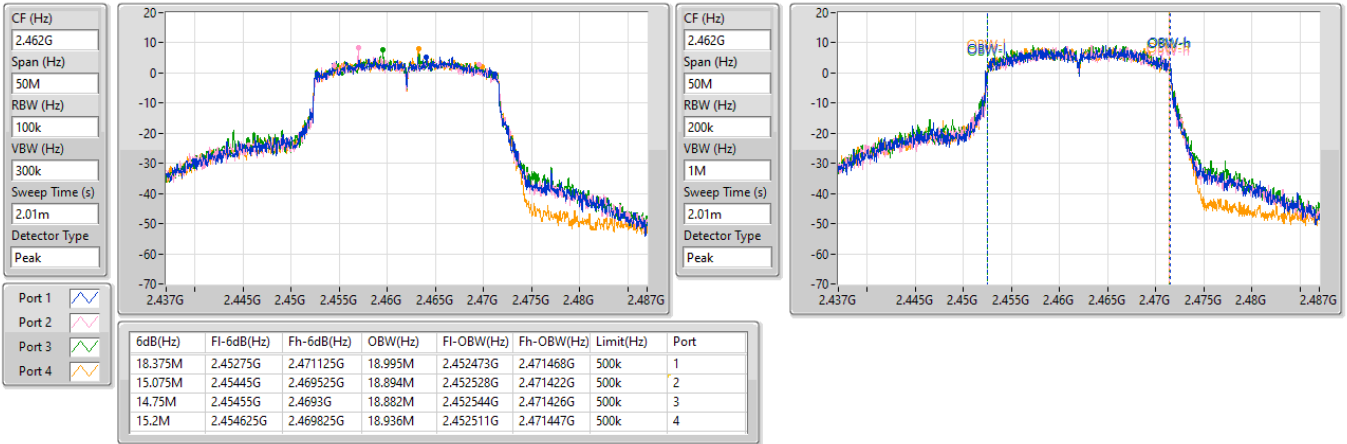
2.4-2.4835GHz_802.11 bn UHR40-BF_Nss1,(MCS0)_4TX
EBW
2422MHz

15/05/2026

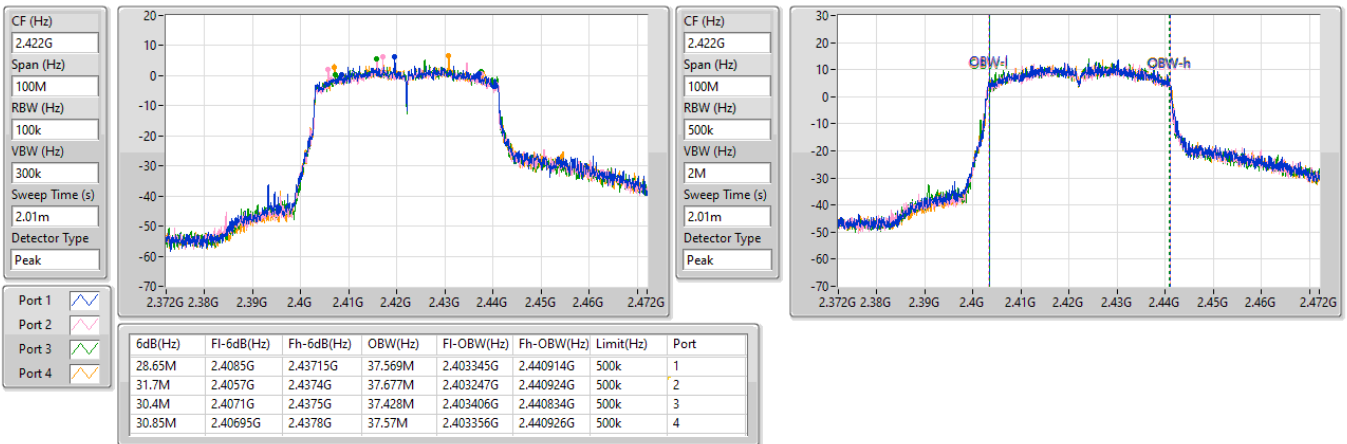


2.4-2.4835GHz_802.11 bn UHR40-BF_Nss1,(MCS0)_4TX

EBW

2437MHz

15/05/2026

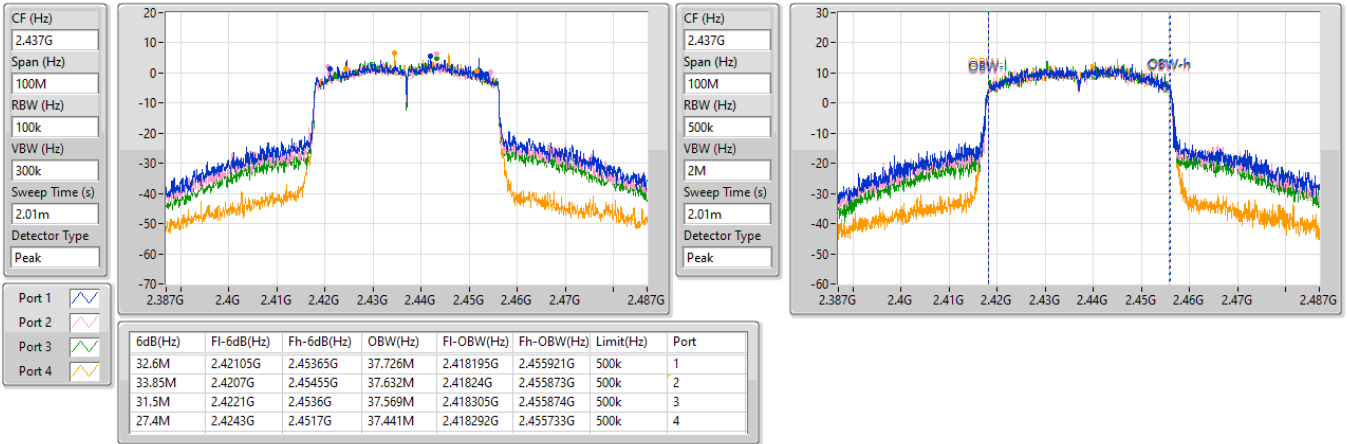


2.4-2.4835GHz_802.11 bn UHR40-BF_Nss1,(MCS0)_4TX

EBW

2452MHz

15/05/2026

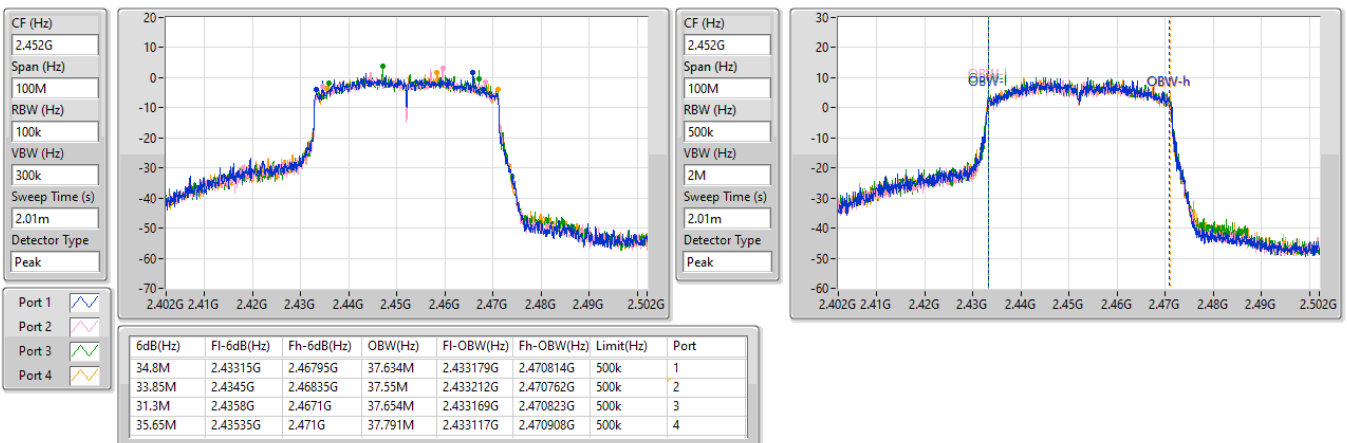


2.4-2.4835GHz_802.11 bn UHR20-BF_Nss2,(MCS0)_4TX

EBW

2412MHz

15/05/2026

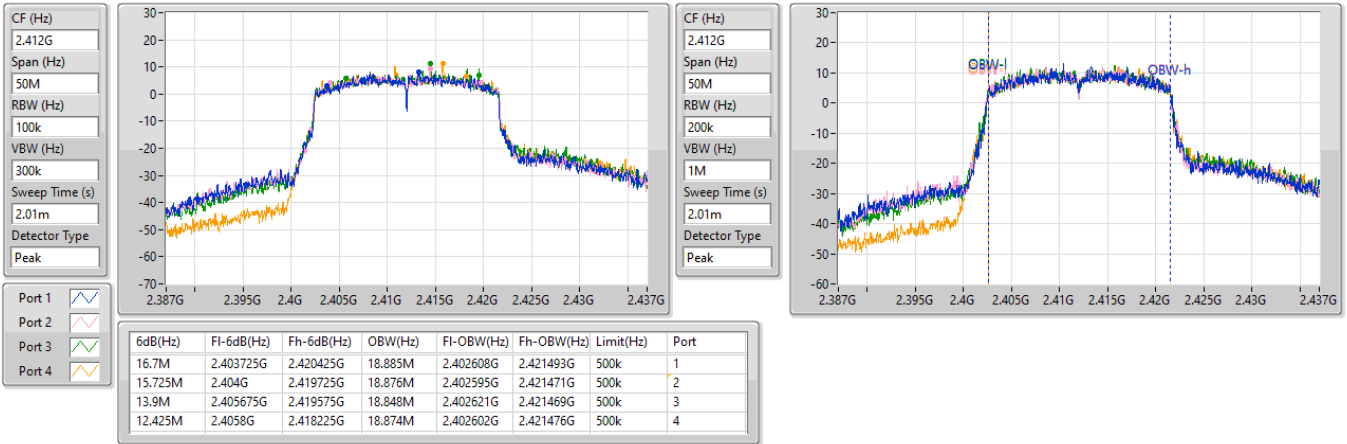


2.4-2.4835GHz_802.11 bn UHR20-BF_Nss2,(MCS0)_4TX

EBW


2437MHz

15/05/2026

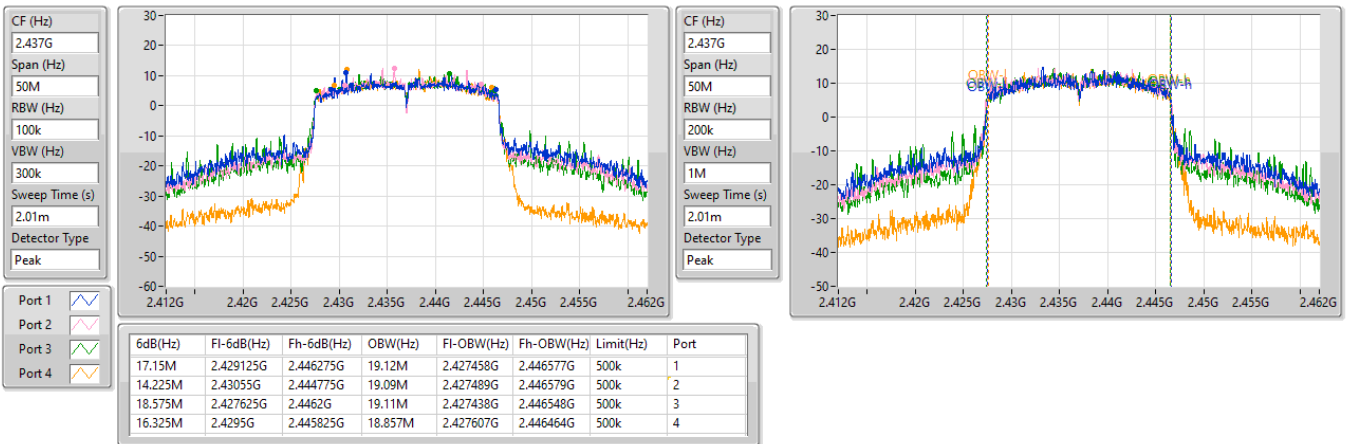


2.4-2.4835GHz_802.11 bn UHR20-BF_Nss2,(MCS0)_4TX
EBW
2462MHz

15/05/2026

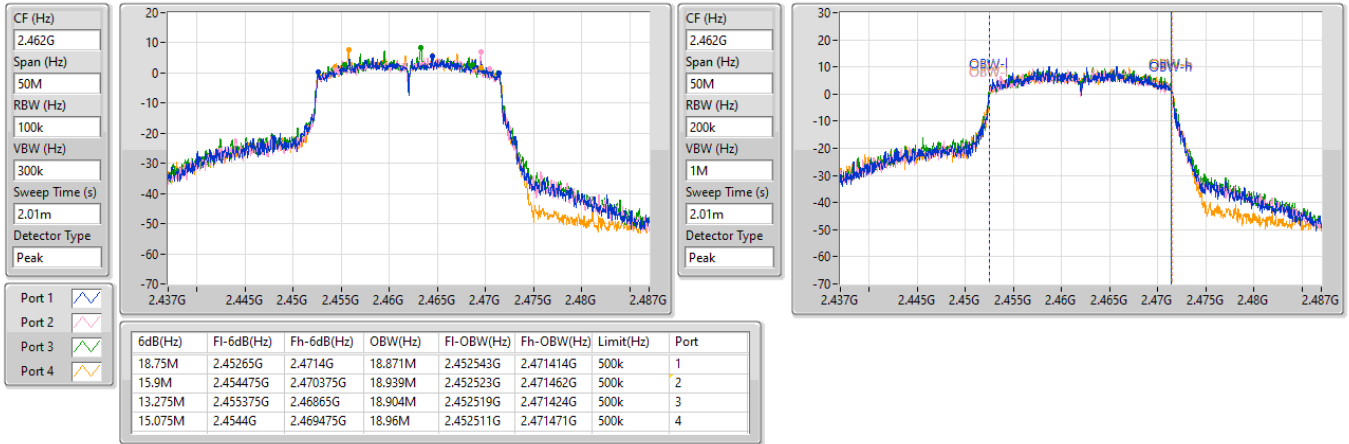
2.4-2.4835GHz_802.11 bn UHR40-BF_Nss2,(MCS0)_4TX
EBW
2422MHz

15/05/2026

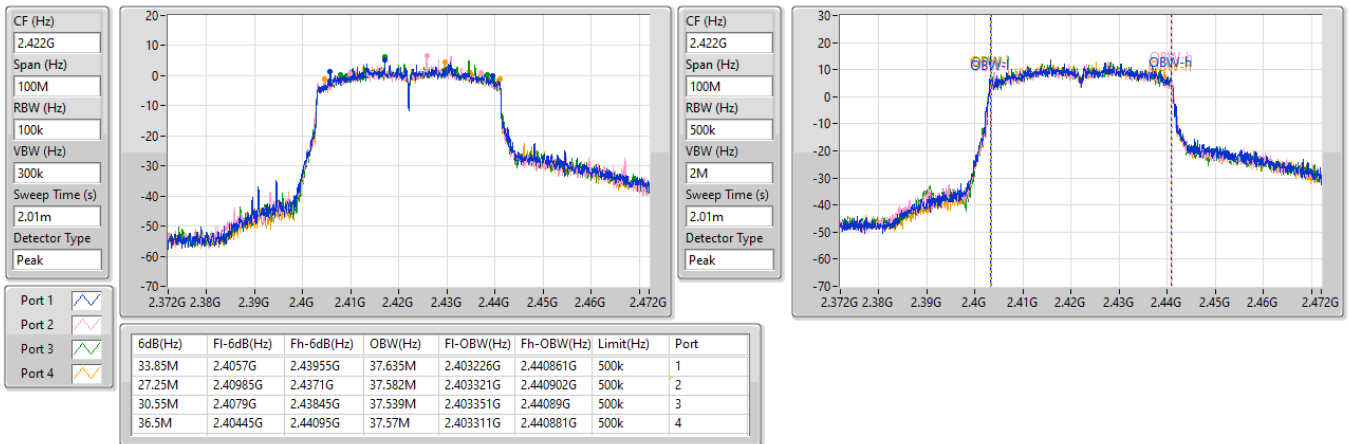


2.4-2.4835GHz_802.11 bn UHR40-BF_Nss2,(MCS0)_4TX

EBW

2437MHz

15/05/2026

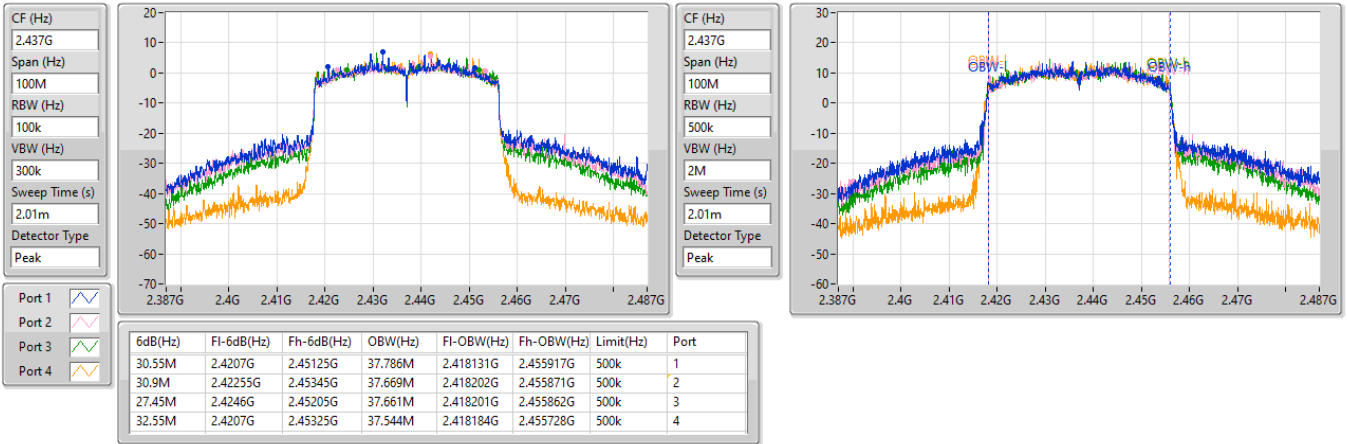


2.4-2.4835GHz_802.11 bn UHR40-BF_Nss2,(MCS0)_4TX

EBW

2452MHz

15/05/2026

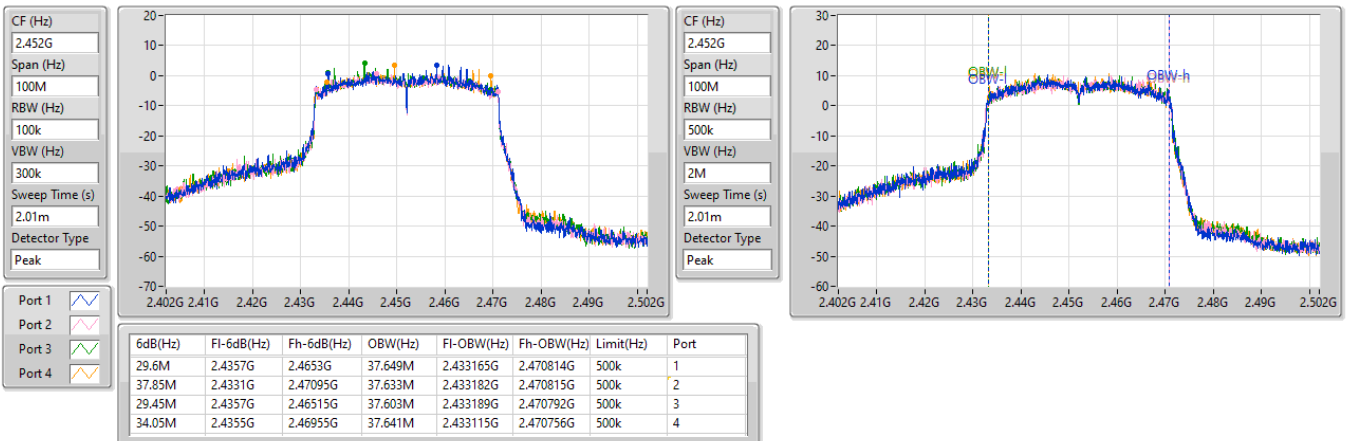



Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11b_Nss1,(1Mbps)_4TX	29.90	0.97724
802.11g_Nss1,(6Mbps)_4TX	29.92	0.98175
802.11 bn UHR20-BF_Nss1,(MCS0)_4TX	28.45	0.69984
802.11 bn UHR20-BF_Nss2,(MCS0)_4TX	29.88	0.97275
802.11 bn UHR40-BF_Nss1,(MCS0)_4TX	26.71	0.46881
802.11 bn UHR40-BF_Nss2,(MCS0)_4TX	26.85	0.48417

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11b_Nss1,(1Mbps)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	3.69	23.27	23.42	23.45	23.01	29.31	30.00
2437MHz	Pass	3.69	23.81	24.18	23.94	23.58	29.90	30.00
2462MHz	Pass	3.69	21.89	22.08	21.97	21.61	27.91	30.00
802.11g_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	3.69	20.58	20.62	20.28	20.07	26.41	30.00
2417MHz	Pass	3.69	23.50	23.90	23.83	23.74	29.77	30.00
2437MHz	Pass	3.69	24.26	23.93	23.97	23.39	29.92	30.00
2457MHz	Pass	3.69	22.28	22.33	22.74	22.61	28.51	30.00
2462MHz	Pass	3.69	19.74	19.99	19.47	19.57	25.72	30.00
802.11 bn UHR20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	7.41	20.85	20.96	21.31	20.97	27.05	28.59
2437MHz	Pass	7.41	22.17	22.57	22.52	22.44	28.45	28.59
2462MHz	Pass	7.41	19.41	19.31	19.62	19.61	25.51	28.59
802.11 bn UHR40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
2422MHz	Pass	7.41	20.20	19.94	20.22	20.19	26.16	28.59
2437MHz	Pass	7.41	20.96	20.58	20.66	20.53	26.71	28.59
2452MHz	Pass	7.41	17.92	17.49	17.86	17.93	23.82	28.59
802.11 bn UHR20-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	4.41	21.50	21.63	21.90	21.77	27.72	30.00
2437MHz	Pass	4.41	23.65	23.96	24.05	23.76	29.88	30.00
2457MHz	Pass	4.41	21.37	21.47	21.77	21.95	27.67	30.00
2462MHz	Pass	4.41	19.20	19.17	19.58	19.52	25.39	30.00
802.11 bn UHR40-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-
2422MHz	Pass	4.41	20.24	19.85	20.04	20.05	26.07	30.00
2437MHz	Pass	4.41	20.98	20.76	20.73	20.84	26.85	30.00
2452MHz	Pass	4.41	17.96	17.67	17.94	17.97	23.91	30.00

DG = Directional Gain; Port X = Port X output power;
Inf = There's no restriction for the limit.

Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_4TX	6.27
802.11g_Nss1,(6Mbps)_4TX	2.02
802.11 bn UHR20-BF_Nss1,(MCS0)_4TX	-0.06
802.11 bn UHR20-BF_Nss2,(MCS0)_4TX	0.89
802.11 bn UHR40-BF_Nss1,(MCS0)_4TX	-4.34
802.11 bn UHR40-BF_Nss2,(MCS0)_4TX	-4.38

RBW = 3kHz;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11b_Nss1,(1Mbps)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	7.41	-0.13	1.08	0.87	0.05	5.89	6.59
2437MHz	Pass	7.41	0.19	1.65	0.93	0.94	6.27	6.59
2462MHz	Pass	7.41	-0.78	-0.73	-0.91	-1.20	4.29	6.59
802.11g_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	7.41	-5.22	-5.15	-4.31	-5.50	-0.76	6.59
2437MHz	Pass	7.41	-1.44	-1.51	-2.27	-2.89	2.02	6.59
2462MHz	Pass	7.41	-6.47	-6.43	-5.44	-5.90	-2.05	6.59
802.11 bn UHR20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	7.41	-6.28	-4.68	-5.27	-5.58	-1.76	6.59
2437MHz	Pass	7.41	-4.77	-4.55	-2.64	-3.75	-0.06	6.59
2462MHz	Pass	7.41	-7.53	-7.16	-8.04	-6.60	-3.08	6.59
802.11 bn UHR40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
2422MHz	Pass	7.41	-7.60	-9.08	-8.32	-8.32	-4.71	6.59
2437MHz	Pass	7.41	-7.74	-8.78	-8.39	-8.81	-4.34	6.59
2452MHz	Pass	7.41	-10.22	-10.24	-11.35	-10.80	-6.94	6.59
802.11 bn UHR20-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-
2412MHz	Pass	4.41	-3.71	-3.55	-5.07	-5.23	-0.95	8.00
2437MHz	Pass	4.41	-2.83	-2.20	-2.94	-2.43	0.89	8.00
2462MHz	Pass	4.41	-7.59	-7.45	-6.28	-6.06	-3.04	8.00
802.11 bn UHR40-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-
2422MHz	Pass	4.41	-8.67	-8.84	-9.23	-8.93	-5.22	8.00
2437MHz	Pass	4.41	-8.03	-6.23	-8.35	-7.88	-4.38	8.00
2452MHz	Pass	4.41	-11.09	-11.73	-11.42	-11.37	-7.98	8.00


DG = Directional Gain; RBW = 3kHz;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
 Inf = There's no restriction for the limit.

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

PSD

2412MHz

27/04/2026

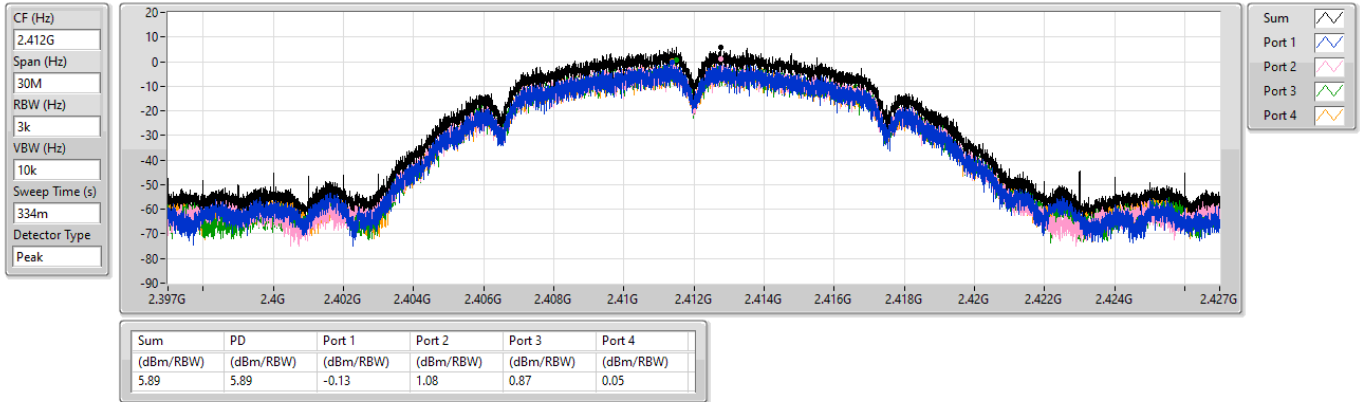


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

PSD

2437MHz

27/04/2026

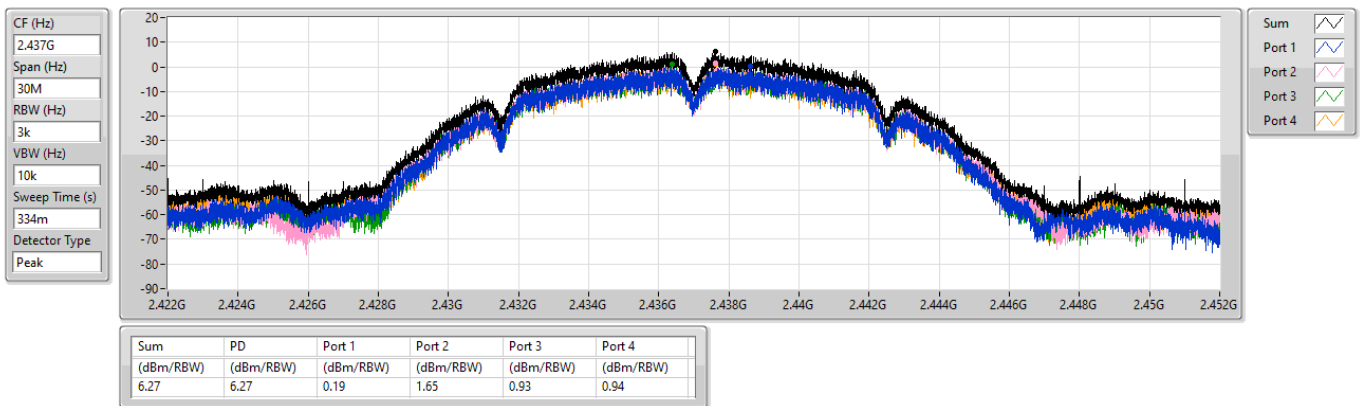


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

PSD

2462MHz

27/04/2026

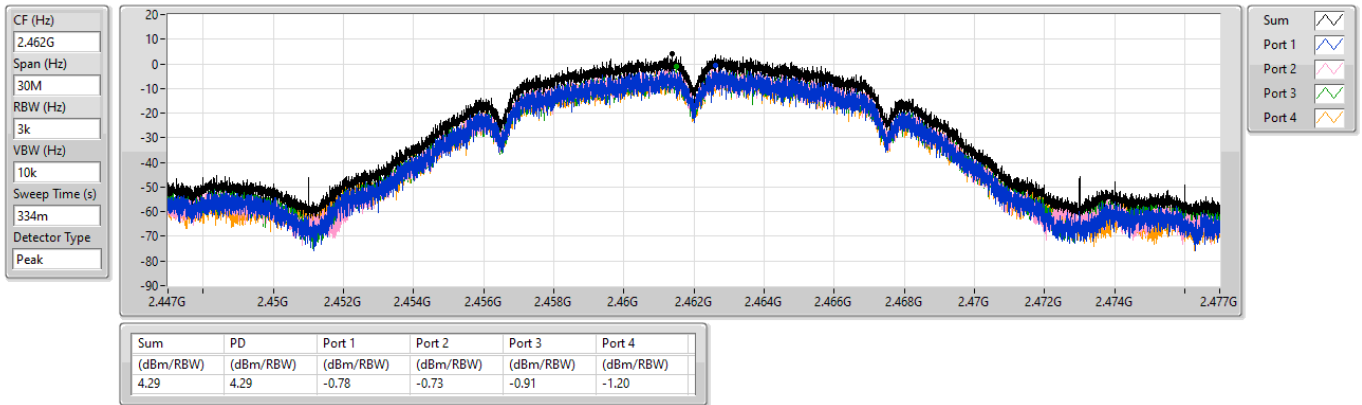


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

PSD

2412MHz

27/04/2026

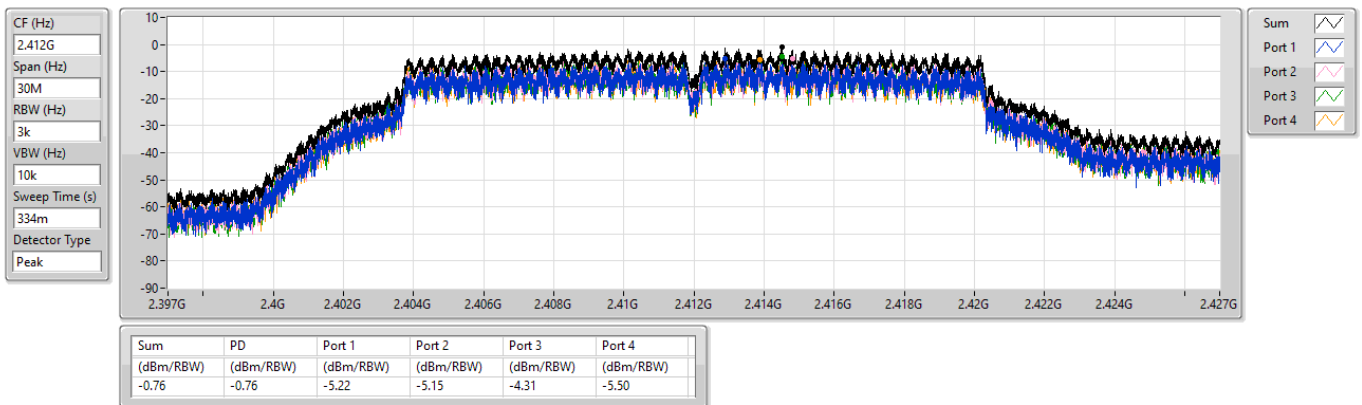


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

PSD

2437MHz

27/04/2026

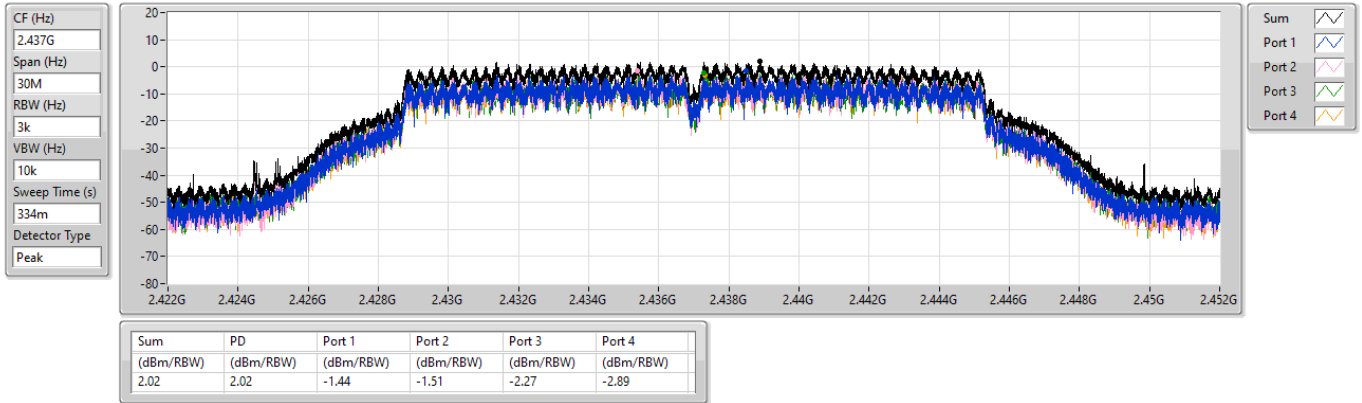


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

PSD

2462MHz

27/04/2026

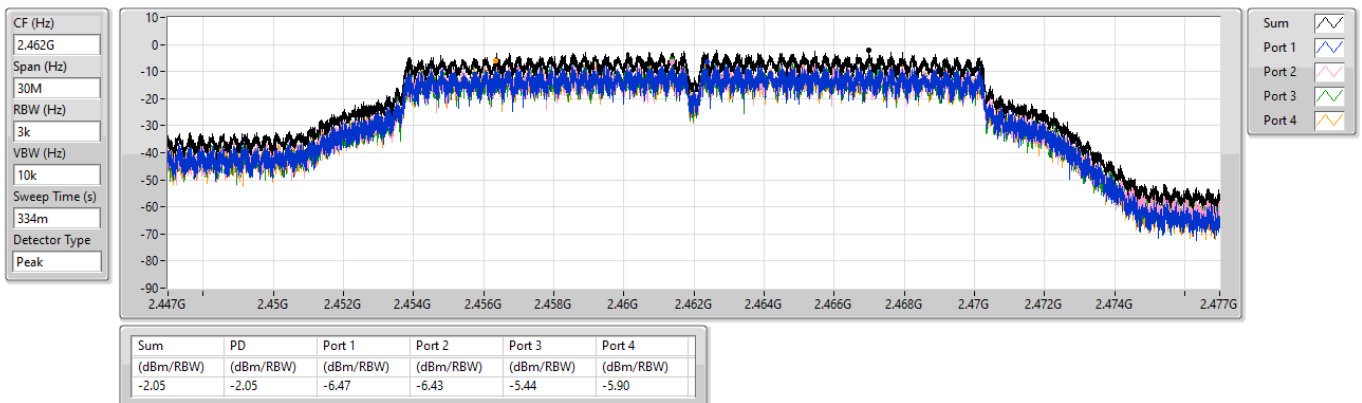


2.4-2.4835GHz_802.11 bn UHR20-BF_Nss1,(MCS0)_4TX

PSD

2412MHz

15/05/2026

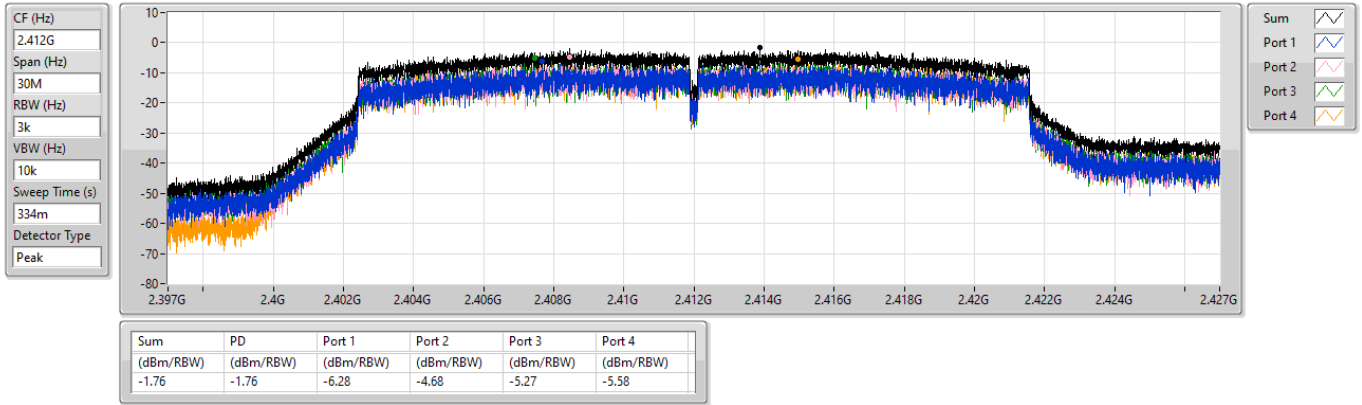


2.4-2.4835GHz_802.11 bn UHR20-BF_Nss1,(MCS0)_4TX

PSD

2437MHz

15/05/2026

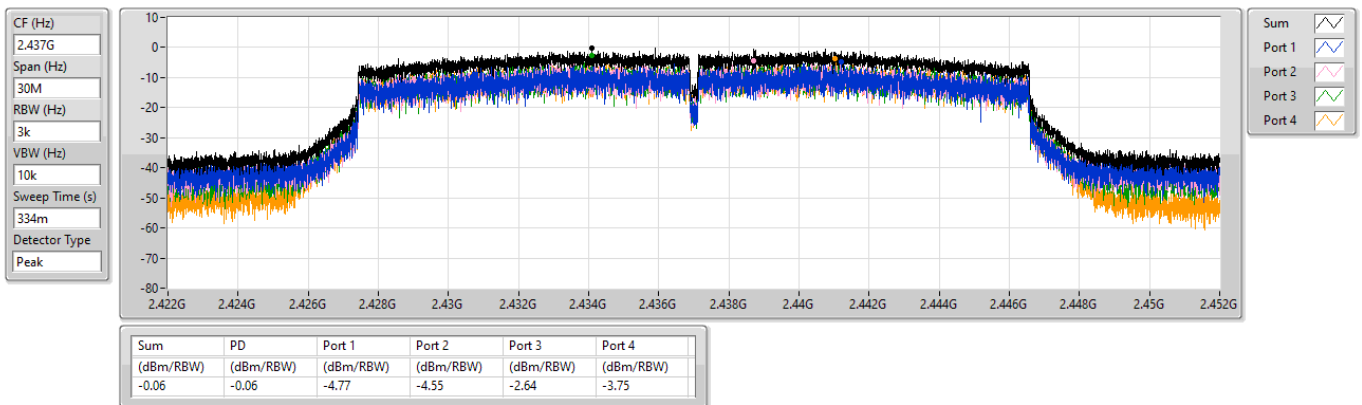


2.4-2.4835GHz_802.11 bn UHR20-BF_Nss1,(MCS0)_4TX

PSD

2462MHz

15/05/2026

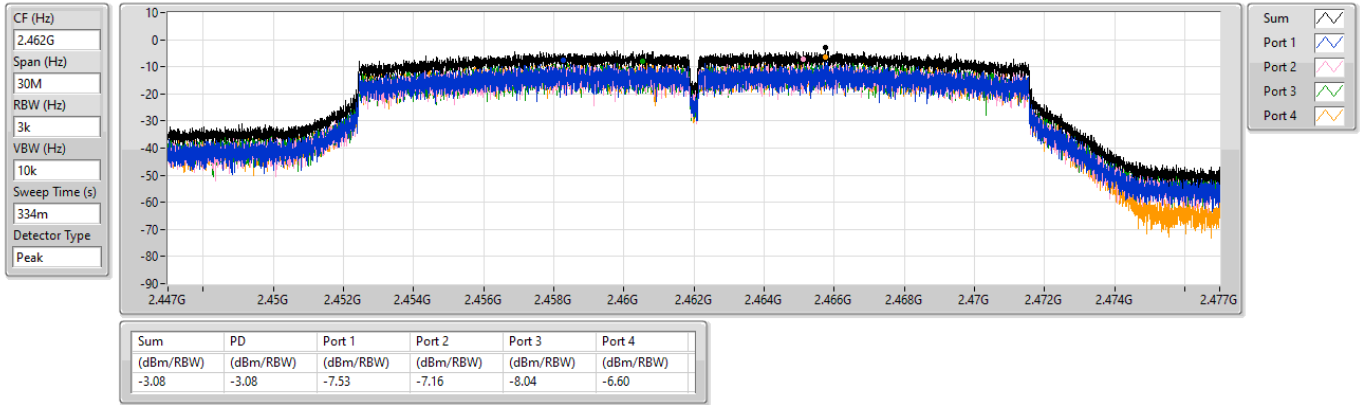


2.4-2.4835GHz_802.11 bn UHR40-BF_Nss1,(MCS0)_4TX

PSD

2422MHz

15/05/2026

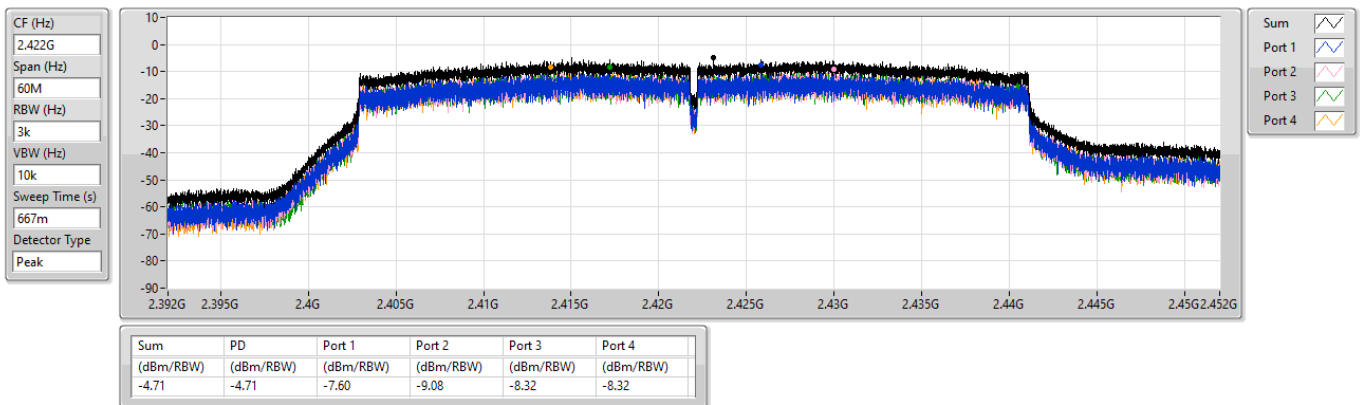


2.4-2.4835GHz_802.11 bn UHR40-BF_Nss1,(MCS0)_4TX

PSD

2437MHz

15/05/2026

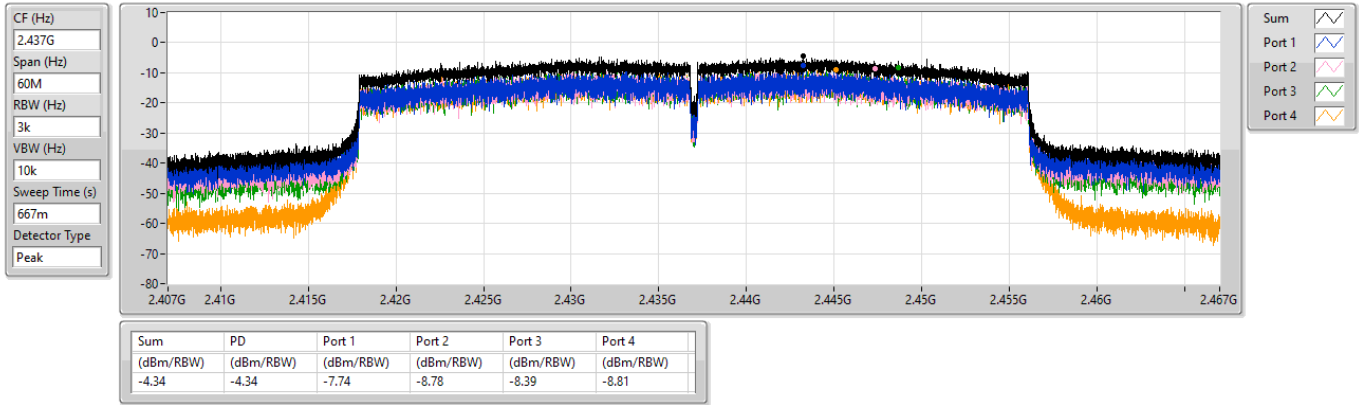


2.4-2.4835GHz_802.11 bn UHR40-BF_Nss1,(MCS0)_4TX

PSD

2452MHz

15/05/2026

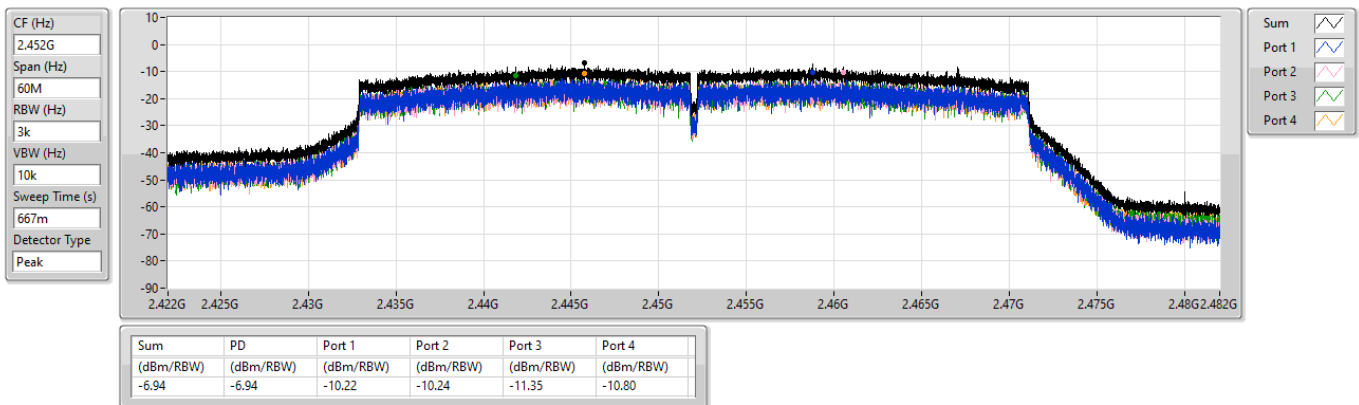


2.4-2.4835GHz_802.11 bn UHR20-BF_Nss2,(MCS0)_4TX

PSD

2412MHz

15/05/2026

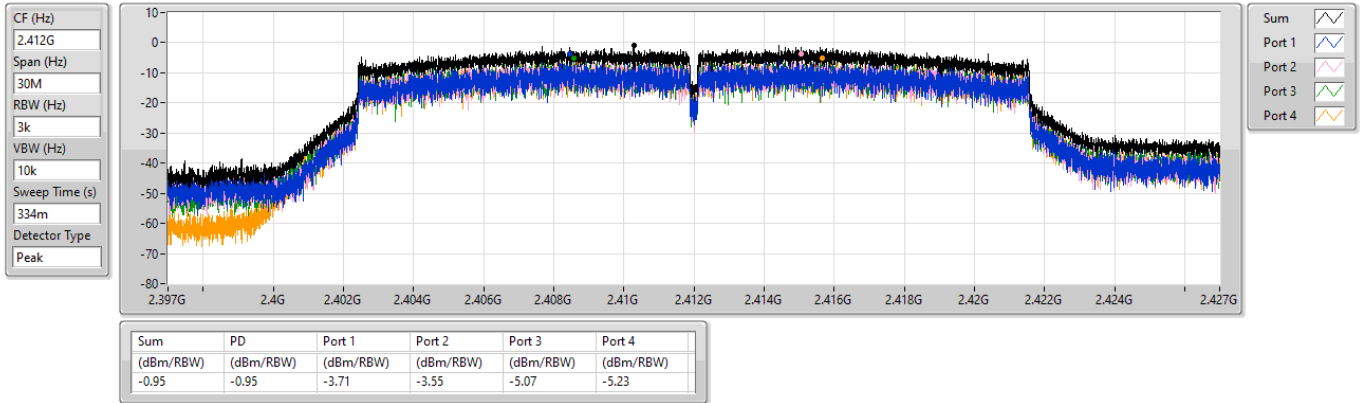


2.4-2.4835GHz_802.11 bn UHR20-BF_Nss2,(MCS0)_4TX

PSD

2437MHz

15/05/2026

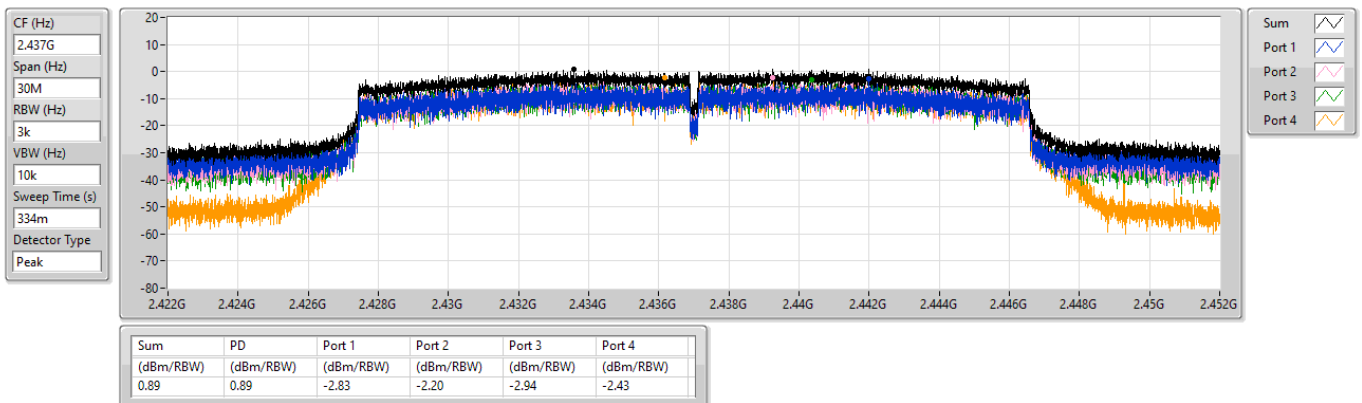


2.4-2.4835GHz_802.11 bn UHR20-BF_Nss2,(MCS0)_4TX

PSD

2462MHz

15/05/2026

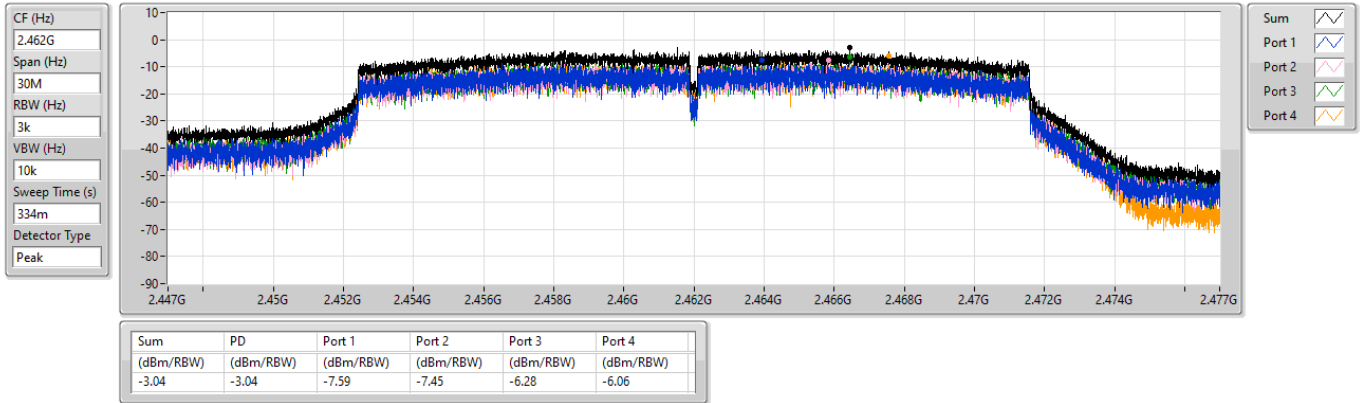


2.4-2.4835GHz_802.11 bn UHR40-BF_Nss2,(MCS0)_4TX

PSD

2422MHz

15/05/2026

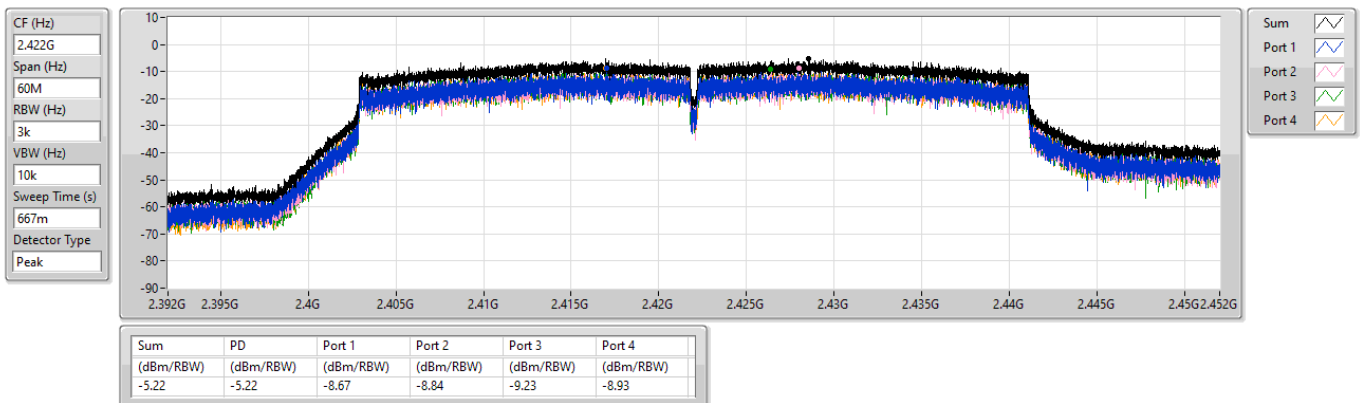


2.4-2.4835GHz_802.11 bn UHR40-BF_Nss2,(MCS0)_4TX

PSD

2437MHz

15/05/2026

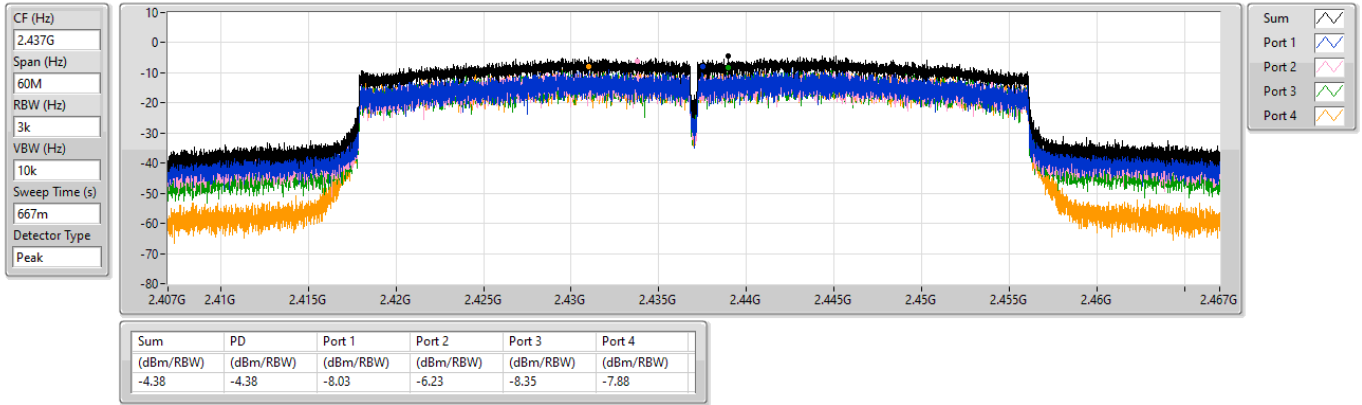


2.4-2.4835GHz_802.11 bn UHR40-BF_Nss2,(MCS0)_4TX

PSD

2452MHz

15/05/2026

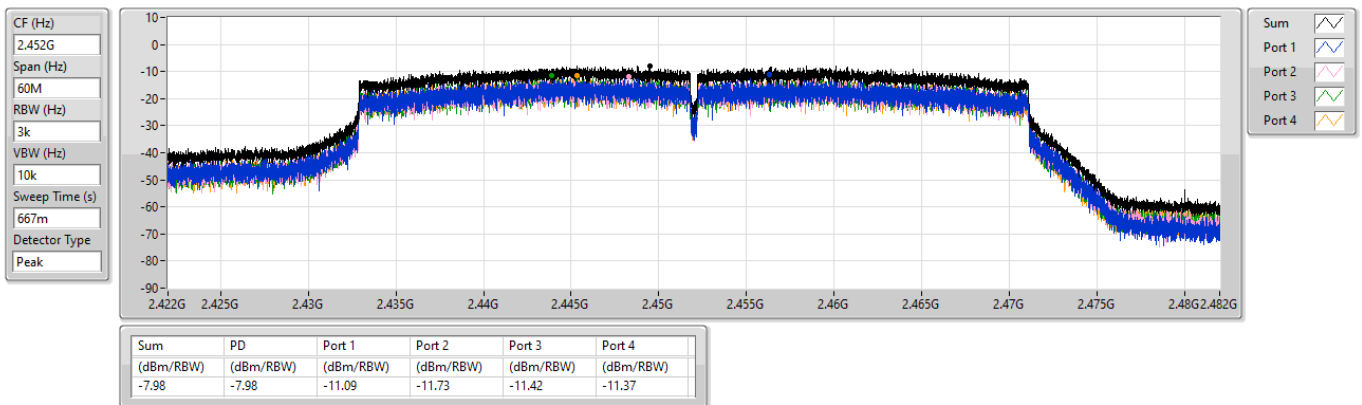



Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
802.11b_Nss1,(1Mbps)_4TX	Pass	2.43741G	16.34	-13.66	2.16428G	-53.47	2.4G	-24.72	2.4G	-24.19	2.51166G	-53.73	21.59762G	-46.76	1
802.11g_Nss1,(6Mbps)_4TX	Pass	2.43941G	13.57	-16.43	2.02798G	-54.20	2.39896G	-28.94	2.4G	-27.00	2.52086G	-53.60	21.58357G	-47.81	1
802.11 bn UHR20-BF_Nss1,(MCS0)_4TX	Pass	2.44075G	12.07	-17.93	1.89983G	-54.41	2.4G	-26.77	2.4G	-28.84	2.5215G	-53.79	21.63976G	-46.54	3
802.11 bn UHR20-BF_Nss2,(MCS0)_4TX	Pass	2.44208G	13.60	-16.40	2.18409G	-53.92	2.39984G	-27.13	2.4G	-26.13	2.5107G	-53.58	21.56952G	-46.89	3
802.11 bn UHR40-BF_Nss1,(MCS0)_4TX	Pass	2.44208G	6.96	-23.04	1.7475G	-53.96	2.3992G	-26.36	2.4G	-27.54	2.5299G	-54.72	21.97949G	-46.78	1
802.11 bn UHR40-BF_Nss2,(MCS0)_4TX	Pass	2.44192G	7.60	-22.40	2.17001G	-53.53	2.39856G	-24.40	2.4G	-25.05	2.51646G	-54.67	21.52515G	-46.71	1

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
802.11b_Nss1(1Mbps)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43741G	16.34	-13.66	2.16428G	-53.47	2.4G	-24.72	2.4G	-24.19	2.51166G	-53.73	21.59762G	-46.76	1
2412MHz	Pass	2.43741G	16.34	-13.66	97.57M	-54.10	2.39952G	-25.82	2.4G	-25.97	2.5127G	-53.96	21.69595G	-45.82	2
2412MHz	Pass	2.43741G	16.34	-13.66	2.18409G	-54.21	2.39856G	-25.84	2.4G	-25.89	2.50366G	-54.35	21.93196G	-46.90	3
2412MHz	Pass	2.43741G	16.34	-13.66	1.95575G	-54.42	2.4G	-36.36	2.4G	-38.42	2.51406G	-53.54	21.58919G	-47.91	4
2417MHz															
2437MHz	Pass	2.43741G	16.34	-13.66	2.1072G	-54.41	2.39704G	-39.96	2.4G	-43.44	2.51934G	-52.98	21.69876G	-47.45	1
2437MHz	Pass	2.43741G	16.34	-13.66	1.62722G	-53.87	2.3996G	-41.11	2.4G	-44.70	2.50702G	-53.74	21.56391G	-45.98	2
2437MHz	Pass	2.43741G	16.34	-13.66	1.91614G	-54.98	2.39952G	-46.35	2.4G	-47.48	2.50662G	-53.59	21.58076G	-46.13	3
2437MHz	Pass	2.43741G	16.34	-13.66	46.31M	-54.40	2.4G	-47.78	2.4G	-49.35	2.50006G	-53.67	21.62291G	-47.80	4
2457MHz															
2462MHz	Pass	2.43741G	16.34	-13.66	88.25M	-54.58	2.39856G	-50.94	2.4G	-52.74	2.50054G	-53.01	21.80272G	-46.92	1
2462MHz	Pass	2.43741G	16.34	-13.66	1.79032G	-54.11	2.39976G	-50.64	2.4G	-51.37	2.50966G	-52.76	21.6201G	-46.75	2
2462MHz	Pass	2.43741G	16.34	-13.66	2.13399G	-53.16	2.4G	-50.62	2.4G	-52.24	2.51574G	-53.76	21.58638G	-46.84	3
2462MHz	Pass	2.43741G	16.34	-13.66	1.97672G	-53.24	2.39968G	-51.08	2.4G	-51.05	2.52198G	-53.20	21.49086G	-47.08	4
802.11g_Nss1(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43941G	13.57	-16.43	2.13399G	-53.66	2.39768G	-30.54	2.4G	-30.62	2.52022G	-52.91	21.92072G	-46.19	1
2412MHz	Pass	2.43941G	13.57	-16.43	2.18176G	-53.60	2.39928G	-31.96	2.4G	-31.30	2.50454G	-53.70	21.651G	-47.43	2
2412MHz	Pass	2.43941G	13.57	-16.43	2.13865G	-53.71	2.39984G	-29.23	2.4G	-27.74	2.5171G	-53.38	21.63695G	-47.48	3
2412MHz	Pass	2.43941G	13.57	-16.43	1.98371G	-53.58	2.39992G	-34.36	2.4G	-30.60	2.50374G	-53.17	21.651G	-47.22	4
2417MHz															
2437MHz	Pass	2.43941G	13.57	-16.43	2.02798G	-54.20	2.39896G	-28.94	2.4G	-27.00	2.52086G	-53.60	21.58357G	-47.81	1
2437MHz	Pass	2.43941G	13.57	-16.43	1.86022G	-54.92	2.39992G	-29.38	2.4G	-30.58	2.52334G	-53.72	22.00782G	-46.96	2
2437MHz	Pass	2.43941G	13.57	-16.43	1.84973G	-54.08	2.39896G	-32.63	2.4G	-33.70	2.50646G	-53.54	21.87296G	-46.50	3
2437MHz	Pass	2.43941G	13.57	-16.43	31.17M	-54.31	2.4G	-42.58	2.4G	-42.83	2.52062G	-53.36	21.63133G	-47.38	4
2457MHz															
2462MHz	Pass	2.43941G	13.57	-16.43	183.78M	-54.53	2.39368G	-51.50	2.4G	-52.72	2.51606G	-53.75	21.66786G	-47.40	1
2462MHz	Pass	2.43941G	13.57	-16.43	1.99303G	-54.35	2.3968G	-50.96	2.4G	-52.56	2.51582G	-53.34	21.90948G	-46.40	2
2462MHz	Pass	2.43941G	13.57	-16.43	59.13M	-53.94	2.39784G	-50.65	2.4G	-51.88	2.50398G	-53.32	21.69314G	-46.43	3
2462MHz	Pass	2.43941G	13.57	-16.43	2.19807G	-54.68	2.39432G	-51.47	2.4G	-52.94	2.50334G	-54.04	21.60605G	-46.31	4
802.11 bn UHR20-BF_Nss1(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.44075G	12.07	-17.93	30M	-54.09	2.39992G	-30.19	2.4G	-29.35	2.50854G	-53.84	21.97691G	-47.24	1
2412MHz	Pass	2.44075G	12.07	-17.93	2.14331G	-54.26	2.39976G	-30.75	2.4G	-31.39	2.5235G	-53.16	21.97972G	-47.45	2
2412MHz	Pass	2.44075G	12.07	-17.93	1.89983G	-54.41	2.4G	-26.77	2.4G	-28.84	2.5215G	-53.79	21.63976G	-46.54	3
2412MHz	Pass	2.44075G	12.07	-17.93	2.19807G	-54.91	2.4G	-33.06	2.4G	-30.21	2.52062G	-53.40	21.95724G	-47.38	4
2417MHz															
2437MHz	Pass	2.44075G	12.07	-17.93	2.18991G	-53.57	2.39888G	-38.51	2.4G	-39.00	2.51622G	-53.62	21.56952G	-47.23	1
2437MHz	Pass	2.44075G	12.07	-17.93	1.91381G	-53.57	2.39968G	-38.85	2.4G	-39.08	2.5099G	-53.73	21.85048G	-47.44	2
2437MHz	Pass	2.44075G	12.07	-17.93	2.06526G	-53.62	2.3996G	-39.78	2.4G	-42.05	2.51382G	-53.63	21.66224G	-46.99	3
2437MHz	Pass	2.44075G	12.07	-17.93	2.03264G	-54.35	2.39992G	-43.87	2.4G	-44.73	2.52286G	-53.77	21.63414G	-46.78	4
2457MHz															
2462MHz	Pass	2.44075G	12.07	-17.93	2.08739G	-54.18	2.39504G	-51.88	2.4G	-53.85	2.50798G	-53.96	21.6791G	-47.00	1
2462MHz	Pass	2.44075G	12.07	-17.93	2.02565G	-53.87	2.39784G	-51.41	2.4G	-53.90	2.50846G	-53.88	21.60324G	-47.48	2
2462MHz	Pass	2.44075G	12.07	-17.93	2.30175G	-54.16	2.39696G	-50.78	2.4G	-52.38	2.50486G	-53.70	21.97972G	-47.12	3
2462MHz	Pass	2.44075G	12.07	-17.93	104.56M	-53.76	2.39608G	-52.08	2.4G	-52.47	2.52262G	-53.97	21.69876G	-47.62	4
802.11 bn UHR40-BF_Nss1(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2422MHz	Pass	2.44208G	6.96	-23.04	1.78071G	-53.48	2.4G	-29.44	2.4G	-28.38	2.56142G	-53.74	21.41016G	-47.47	1
2422MHz	Pass	2.44208G	6.96	-23.04	2.06467G	-54.05	2.4G	-31.94	2.4G	-29.71	2.5347G	-53.72	21.67379G	-47.34	2
2422MHz	Pass	2.44208G	6.96	-23.04	2.1952G	-53.62	2.4G	-31.21	2.4G	-30.58	2.50734G	-54.43	21.6177G	-46.61	3
2422MHz	Pass	2.44208G	6.96	-23.04	1.64331G	-54.39	2.4G	-30.33	2.4G	-28.52	2.5515G	-54.19	21.55319G	-46.92	4
2437MHz	Pass	2.44208G	6.96	-23.04	1.7475G	-53.96	2.3992G	-26.36	2.4G	-27.54	2.5299G	-54.72	21.97949G	-46.78	1
2437MHz	Pass	2.44208G	6.96	-23.04	2.1597G	-53.58	2.39984G	-27.81	2.4G	-28.55	2.51758G	-53.94	21.44101G	-47.15	2
2437MHz	Pass	2.44208G	6.96	-23.04	1.91124G	-53.34	2.39984G	-30.64	2.4G	-31.25	2.53182G	-54.52	21.45784G	-47.15	3
2437MHz	Pass	2.44208G	6.96	-23.04	1.93528G	-53.80	2.39712G	-40.21	2.4G	-42.11	2.55534G	-54.23	21.53076G	-46.64	4
2447MHz															
2452MHz	Pass	2.44208G	6.96	-23.04	33.44M	-53.94	2.39952G	-34.39	2.4G	-39.13	2.53918G	-54.32	21.51393G	-47.30	1
2452MHz	Pass	2.44208G	6.96	-23.04	1.75208G	-54.43	2.39824G	-37.55	2.4G	-40.12	2.53422G	-54.36	21.94022G	-47.89	2
2452MHz	Pass	2.44208G	6.96	-23.04	2.01772G	-54.09	2.39952G	-34.05	2.4G	-38.79	2.51886G	-54.57	21.91498G	-48.16	3
2452MHz	Pass	2.44208G	6.96	-23.04	33.44M	-54.06	2.39968G	-37.64	2.4G	-39.86	2.51374G	-53.26	21.48588G	-47.08	4
802.11 bn UHR20-BF_Nss2(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.44208G	13.60	-16.40	1.7577G	-54.05	2.3988G	-26.81	2.4G	-28.48	2.51014G	-53.68	21.95162G	-46.12	1


Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2412MHz	Pass	2.44208G	13.60	-16.40	2.1305G	-53.99	2.39976G	-26.77	2.4G	-28.86	2.52214G	-53.34	21.60324G	-47.44	2
2412MHz	Pass	2.44208G	13.60	-16.40	2.18409G	-53.92	2.39984G	-27.13	2.4G	-26.13	2.5107G	-53.58	21.56952G	-46.89	3
2412MHz	Pass	2.44208G	13.60	-16.40	1.75537G	-53.55	2.4G	-32.93	2.4G	-30.39	2.5027G	-53.49	21.96005G	-46.59	4
2417MHz															
2437MHz	Pass	2.44208G	13.60	-16.40	34.66M	-53.53	2.39992G	-26.59	2.4G	-29.68	2.51646G	-53.56	21.81115G	-47.33	1
2437MHz	Pass	2.44208G	13.60	-16.40	2.1305G	-53.50	2.39936G	-29.94	2.4G	-31.10	2.50358G	-53.83	21.66224G	-46.85	2
2437MHz	Pass	2.44208G	13.60	-16.40	34.66M	-54.20	2.3992G	-32.99	2.4G	-32.76	2.51126G	-53.58	21.89262G	-47.12	3
2437MHz	Pass	2.44208G	13.60	-16.40	2.14331G	-53.71	2.39872G	-41.63	2.4G	-41.93	2.51438G	-53.70	21.56952G	-46.54	4
2457MHz															
2462MHz	Pass	2.44208G	13.60	-16.40	1.72741G	-54.67	2.39776G	-50.84	2.4G	-52.65	2.50734G	-53.87	21.57514G	-45.72	1
2462MHz	Pass	2.44208G	13.60	-16.40	1.81478G	-54.59	2.39744G	-51.12	2.4G	-52.21	2.51542G	-53.45	21.54986G	-47.67	2
2462MHz	Pass	2.44208G	13.60	-16.40	88.25M	-54.51	2.39232G	-51.91	2.4G	-53.96	2.50398G	-53.18	22.00782G	-47.14	3
2462MHz	Pass	2.44208G	13.60	-16.40	1.86837G	-53.57	2.4G	-50.05	2.4G	-53.53	2.51982G	-53.94	21.65381G	-46.32	4
802.11 bn UHR40-BF_Nss2.(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2422MHz	Pass	2.44192G	7.60	-22.40	1.64903G	-54.39	2.4G	-29.77	2.4G	-28.58	2.5603G	-54.59	21.63172G	-46.36	1
2422MHz	Pass	2.44192G	7.60	-22.40	1.7933G	-54.01	2.39968G	-31.35	2.4G	-30.10	2.53422G	-53.95	21.9879G	-46.15	2
2422MHz	Pass	2.44192G	7.60	-22.40	1.74521G	-53.86	2.4G	-32.43	2.4G	-30.48	2.56254G	-54.40	21.65135G	-47.15	3
2422MHz	Pass	2.44192G	7.60	-22.40	34.58M	-53.96	2.4G	-32.45	2.4G	-29.32	2.5483G	-54.67	21.51954G	-46.56	4
2437MHz	Pass	2.44192G	7.60	-22.40	2.17001G	-53.53	2.39856G	-24.40	2.4G	-25.05	2.51646G	-54.67	21.52515G	-46.71	1
2437MHz	Pass	2.44192G	7.60	-22.40	2.17115G	-54.22	2.39904G	-25.57	2.4G	-25.77	2.55918G	-54.44	21.59526G	-47.49	2
2437MHz	Pass	2.44192G	7.60	-22.40	2.17459G	-54.31	2.39888G	-26.50	2.4G	-30.39	2.55262G	-53.80	21.63733G	-47.40	3
2437MHz	Pass	2.44192G	7.60	-22.40	57.48M	-53.53	2.39984G	-38.16	2.4G	-39.65	2.54062G	-54.12	21.9879G	-47.25	4
2447MHz															
2452MHz	Pass	2.44192G	7.60	-22.40	2.1952G	-54.62	2.39952G	-33.55	2.4G	-38.88	2.51182G	-53.85	21.8028G	-47.03	1
2452MHz	Pass	2.44192G	7.60	-22.40	1.88032G	-54.09	2.39952G	-33.51	2.4G	-39.10	2.56158G	-54.08	21.95985G	-46.89	2
2452MHz	Pass	2.44192G	7.60	-22.40	2.09215G	-53.47	2.39952G	-35.92	2.4G	-38.35	2.52398G	-54.02	21.60928G	-47.66	3
2452MHz	Pass	2.44192G	7.60	-22.40	1.77269G	-53.59	2.39968G	-33.50	2.4G	-39.61	2.5563G	-53.79	21.52234G	-46.67	4

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

CSEndB

2412MHz

15/05/2026

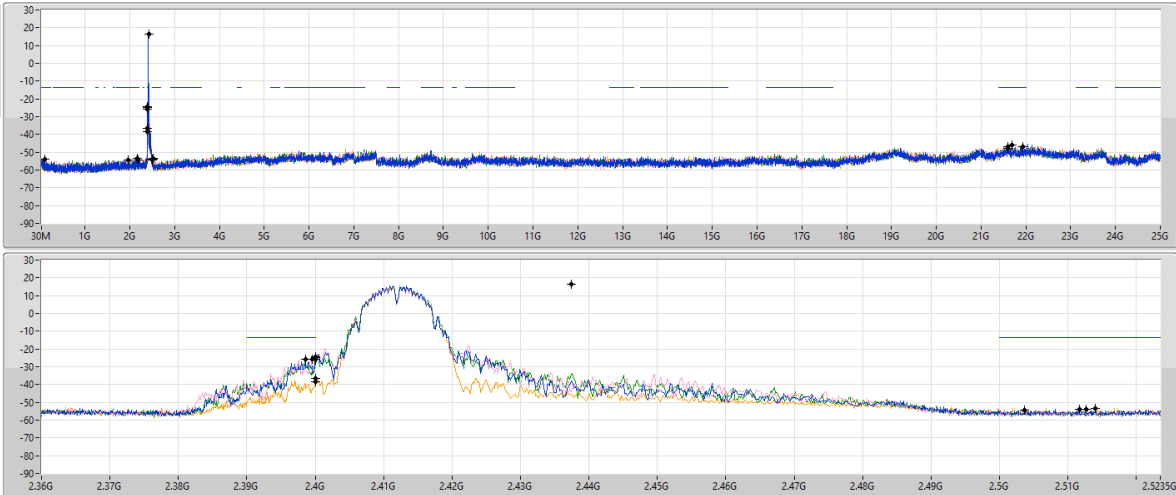RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43741G	16.34	-13.66	2.16428G	-53.47	2.4G	-24.72	2.4G	-24.19	2.51166G	-53.73	2.159762G	-46.76	1
2.43741G	16.34	-13.66	97.57M	-54.10	2.39952G	-25.82	2.4G	-25.97	2.5127G	-53.96	2.169595G	-45.82	2
2.43741G	16.34	-13.66	2.18409G	-54.21	2.39856G	-25.84	2.4G	-25.89	2.50366G	-54.35	2.193196G	-46.90	3
2.43741G	16.34	-13.66	1.95575G	-54.42	2.4G	-36.36	2.4G	-38.42	2.51406G	-53.54	2.158919G	-47.91	4

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

CSEndB

2437MHz

15/05/2026

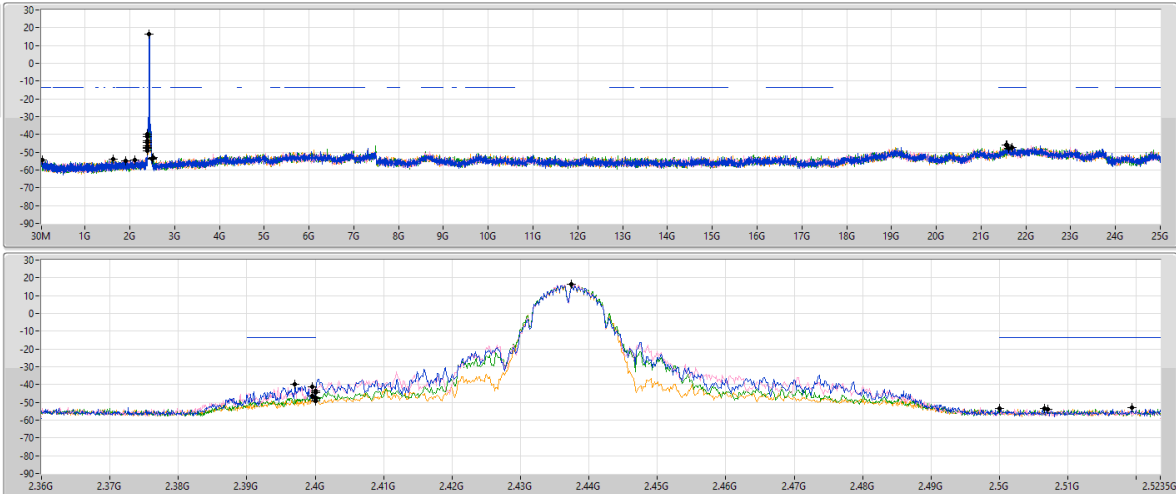RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43741G	16.34	-13.66	2.1072G	-54.41	2.39704G	-39.96	2.4G	-43.44	2.51934G	-52.98	2.169876G	-47.45	1
2.43741G	16.34	-13.66	1.62722G	-53.87	2.3996G	-41.11	2.4G	-44.70	2.50702G	-53.74	2.156391G	-45.98	2
2.43741G	16.34	-13.66	1.91614G	-54.98	2.39952G	-46.35	2.4G	-47.48	2.50662G	-53.59	2.158076G	-46.13	3
2.43741G	16.34	-13.66	46.31M	-54.40	2.4G	-47.78	2.4G	-49.35	2.50006G	-53.67	2.162291G	-47.80	4

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

CSEndB

2462MHz

15/05/2026

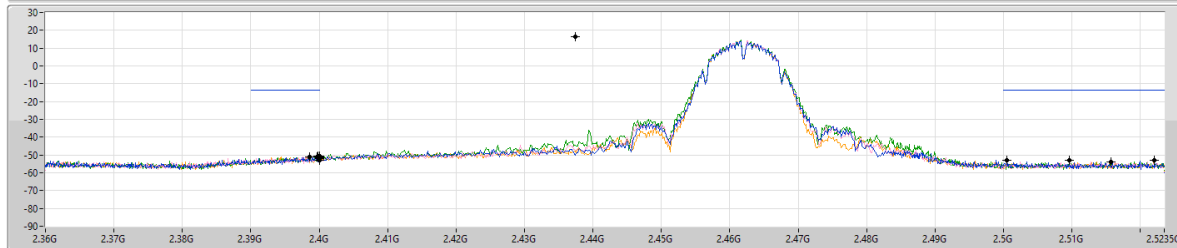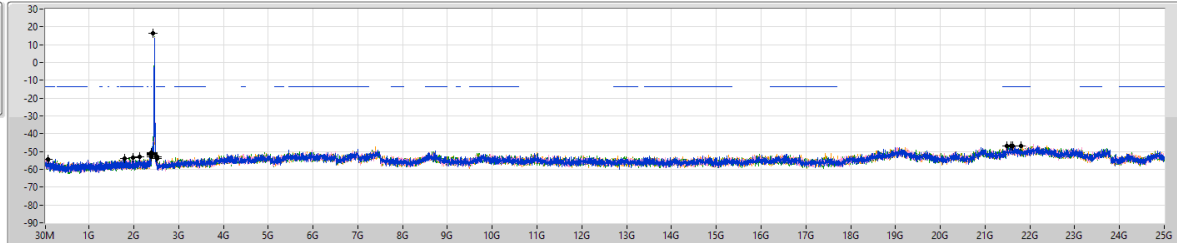RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43741G	16.34	-13.66	88.25M	-54.58	2.39856G	-50.94	2.4G	-52.74	2.50054G	-53.01	21.80272G	-46.92	1
2.43741G	16.34	-13.66	1.79032G	-54.11	2.39976G	-50.64	2.4G	-51.37	2.50966G	-52.76	21.6201G	-46.75	2
2.43741G	16.34	-13.66	2.13399G	-53.16	2.4G	-50.62	2.4G	-52.24	2.51574G	-53.76	21.58638G	-46.84	3
2.43741G	16.34	-13.66	1.97672G	-53.24	2.39968G	-51.08	2.4G	-51.05	2.52198G	-53.20	21.49086G	-47.08	4

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

CSEndB

2412MHz

15/05/2026

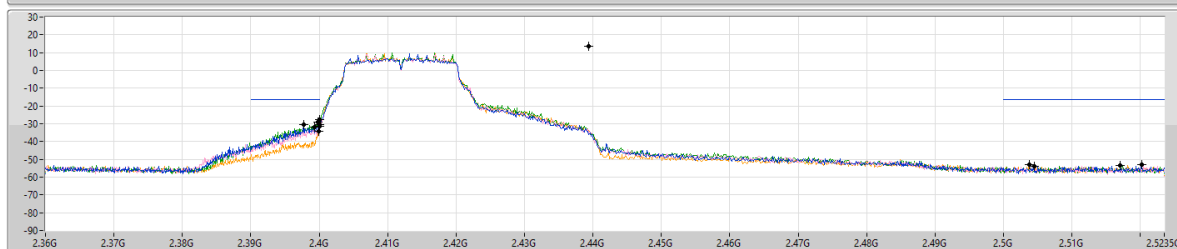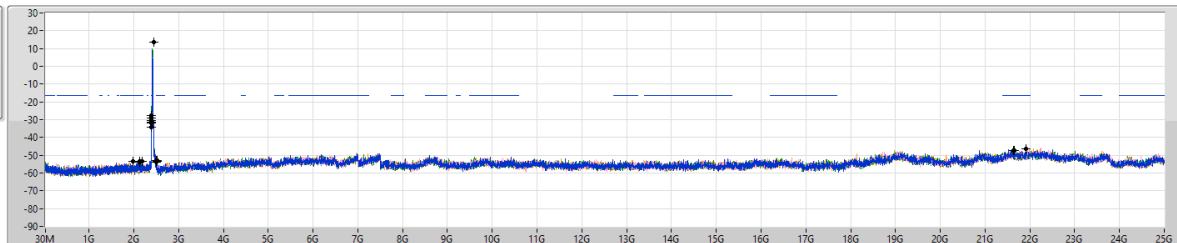RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43941G	13.57	-16.43	2.13399G	-53.66	2.39768G	-30.54	2.4G	-30.62	2.52022G	-52.91	21.92072G	-46.19	1
2.43941G	13.57	-16.43	2.18176G	-53.60	2.39928G	-31.96	2.4G	-31.30	2.50454G	-53.70	21.651G	-47.43	2
2.43941G	13.57	-16.43	2.13855G	-53.71	2.39964G	-29.23	2.4G	-27.74	2.5171G	-53.38	21.63695G	-47.48	3
2.43941G	13.57	-16.43	1.98371G	-53.58	2.39992G	-34.36	2.4G	-30.60	2.50374G	-53.17	21.651G	-47.22	4

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

CSNdB

2437MHz

15/05/2026

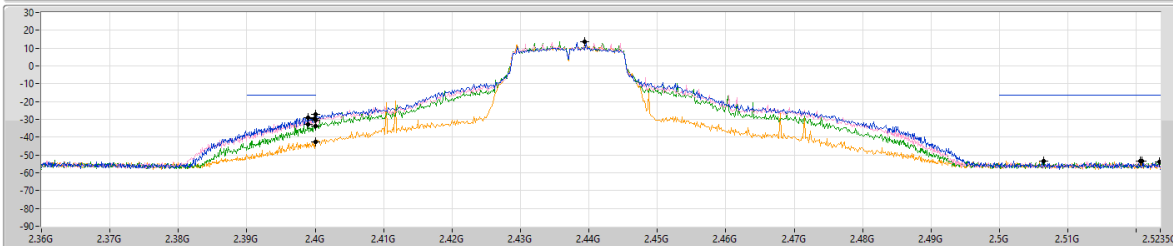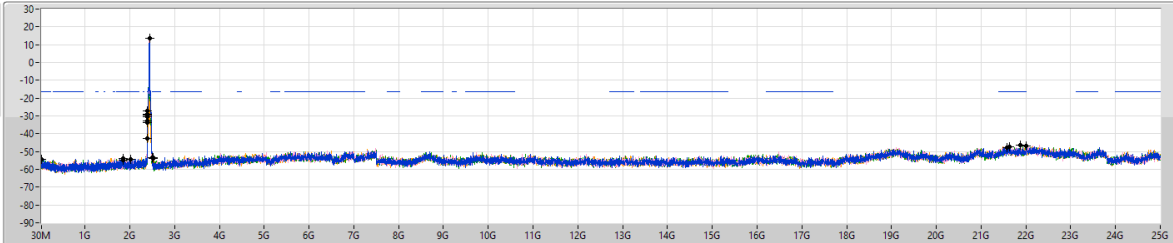RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43941G	13.57	-16.43	2.02798G	-54.20	2.39896G	-28.94	2.4G	-27.00	2.52086G	-53.60	21.58357G	-47.81	1
2.43941G	13.57	-16.43	1.86022G	-54.92	2.39992G	-29.38	2.4G	-30.58	2.52334G	-53.72	22.00782G	-46.96	2
2.43941G	13.57	-16.43	1.84973G	-54.08	2.39896G	-32.63	2.4G	-33.70	2.50646G	-53.54	21.87296G	-46.50	3
2.43941G	13.57	-16.43	31.17M	-54.31	2.4G	-42.58	2.4G	-42.83	2.52062G	-53.36	21.63133G	-47.38	4

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

CSNdB

2462MHz

15/05/2026

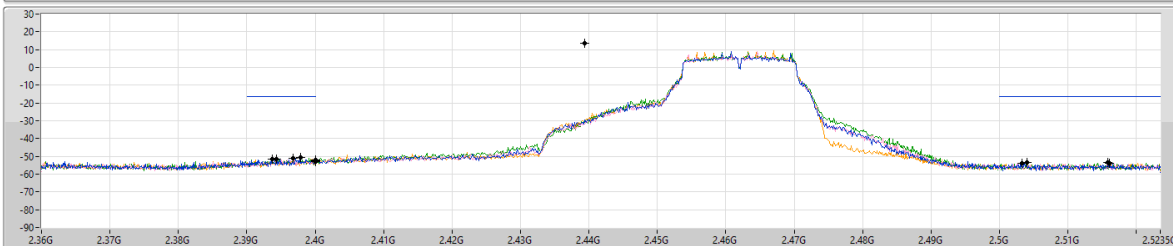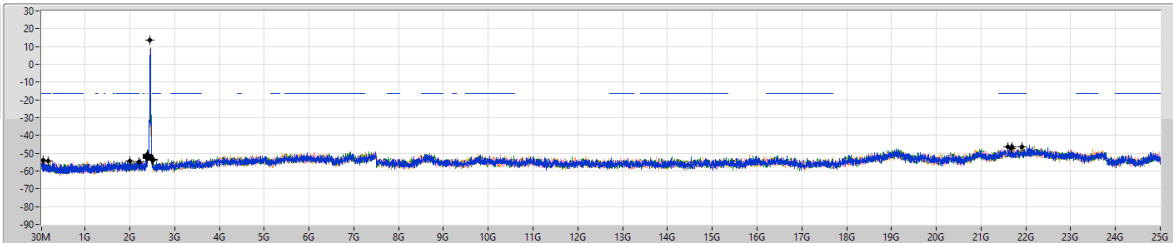RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43941G	13.57	-16.43	183.78M	-54.53	2.39368G	-51.50	2.4G	-52.72	2.51606G	-53.75	21.66786G	-47.40	1
2.43941G	13.57	-16.43	1.99303G	-54.35	2.3968G	-50.96	2.4G	-52.56	2.51582G	-53.34	21.90948G	-46.40	2
2.43941G	13.57	-16.43	59.13M	-53.94	2.39784G	-50.65	2.4G	-51.88	2.50398G	-53.32	21.69314G	-46.43	3
2.43941G	13.57	-16.43	2.19807G	-54.68	2.39432G	-51.47	2.4G	-52.94	2.50334G	-54.04	21.60805G	-46.31	4

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss1,(MCS0)_4TX

CSEndB

2412MHz

15/05/2026

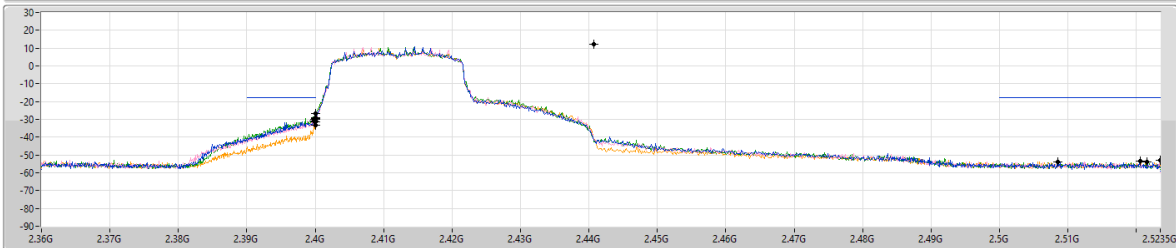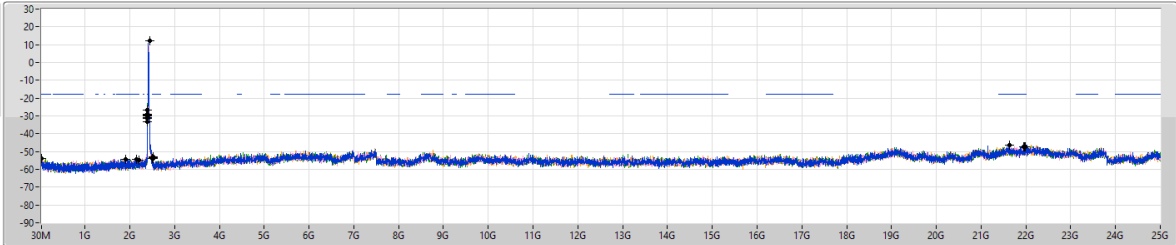RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44075G	12.07	-17.93	30M	-54.09	2.39992G	-30.19	2.4G	-29.35	2.50854G	-53.84	21.97691G	-47.24	1
2.44075G	12.07	-17.93	2.14331G	-54.26	2.39976G	-30.75	2.4G	-31.39	2.5235G	-53.16	21.97972G	-47.45	2
2.44075G	12.07	-17.93	1.89983G	-54.41	2.4G	-26.77	2.4G	-28.84	2.5215G	-53.79	21.63976G	-46.54	3
2.44075G	12.07	-17.93	2.19807G	-54.91	2.4G	-33.06	2.4G	-30.21	2.52062G	-53.40	21.95724G	-47.38	4

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss1,(MCS0)_4TX

CSEndB

2437MHz

15/05/2026

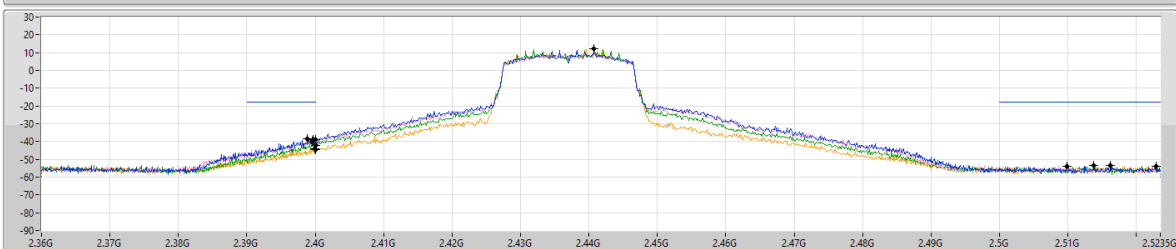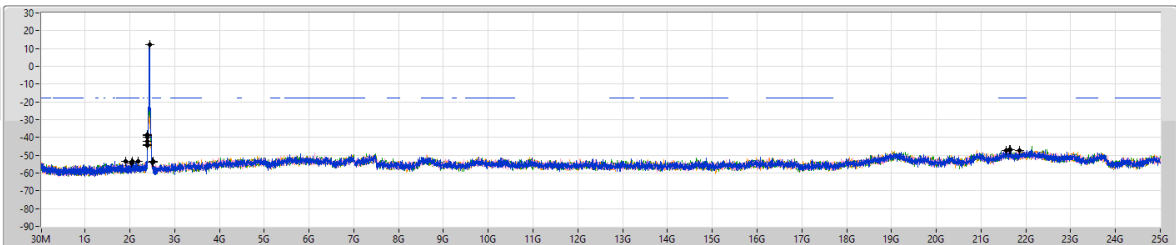RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44075G	12.07	-17.93	2.18991G	-53.57	2.39888G	-38.51	2.4G	-39.00	2.51622G	-53.62	21.56952G	-47.23	1
2.44075G	12.07	-17.93	1.91381G	-53.57	2.39968G	-38.85	2.4G	-39.08	2.5099G	-53.73	21.85048G	-47.44	2
2.44075G	12.07	-17.93	2.06526G	-53.62	2.3996G	-39.78	2.4G	-42.05	2.51382G	-53.63	21.66224G	-46.99	3
2.44075G	12.07	-17.93	2.03264G	-54.35	2.39992G	-43.87	2.4G	-44.73	2.52286G	-53.77	21.63414G	-46.78	4

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss1,(MCS0)_4TX

CSEndB

2462MHz

15/05/2026

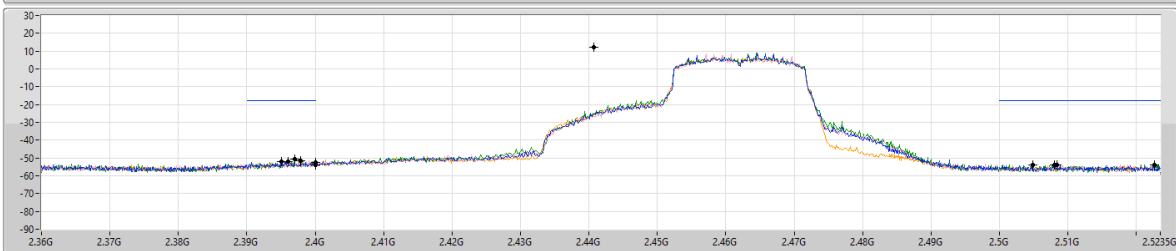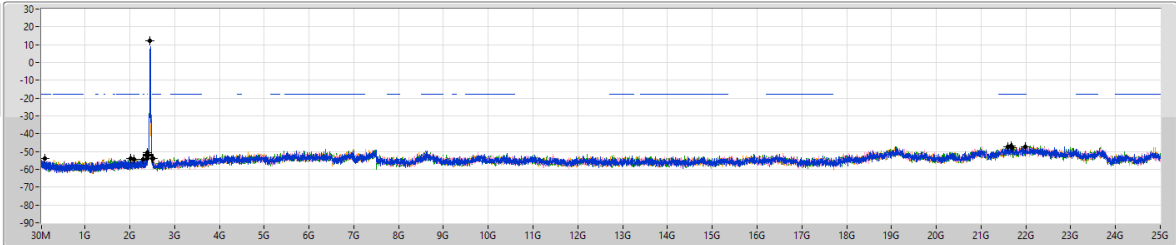RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44075G	12.07	-17.93	2.08739G	-54.18	2.39504G	-51.88	2.4G	-53.85	2.50798G	-53.96	21.6791G	-47.00	1
2.44075G	12.07	-17.93	2.02565G	-53.87	2.39784G	-51.41	2.4G	-53.90	2.50846G	-53.88	21.60324G	-47.48	2
2.44075G	12.07	-17.93	2.30175G	-54.16	2.39696G	-50.78	2.4G	-52.38	2.50486G	-53.70	21.97972G	-47.12	3
2.44075G	12.07	-17.93	104.56M	-53.76	2.39608G	-52.08	2.4G	-52.47	2.52262G	-53.97	21.69876G	-47.62	4

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss1,(MCS0)_4TX

CSEndB

2422MHz

15/05/2026

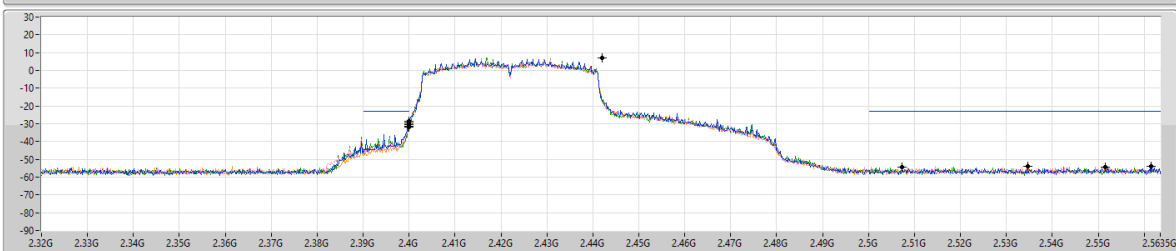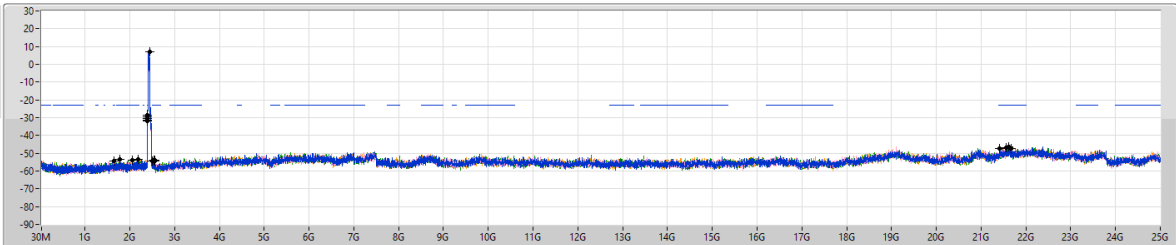RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44208G	6.96	-23.04	1.78071G	-53.48	2.4G	-29.44	2.4G	-28.38	2.56142G	-53.74	21.41016G	-47.47	1
2.44208G	6.96	-23.04	2.06467G	-54.05	2.4G	-31.94	2.4G	-29.71	2.5347G	-53.72	21.67379G	-47.34	2
2.44208G	6.96	-23.04	2.1952G	-53.62	2.4G	-31.21	2.4G	-30.58	2.50734G	-54.43	21.6177G	-46.61	3
2.44208G	6.96	-23.04	1.64331G	-54.39	2.4G	-30.33	2.4G	-28.52	2.5515G	-54.19	21.53319G	-46.92	4

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss1,(MCS0)_4TX

CSEndB

2437MHz

15/05/2026

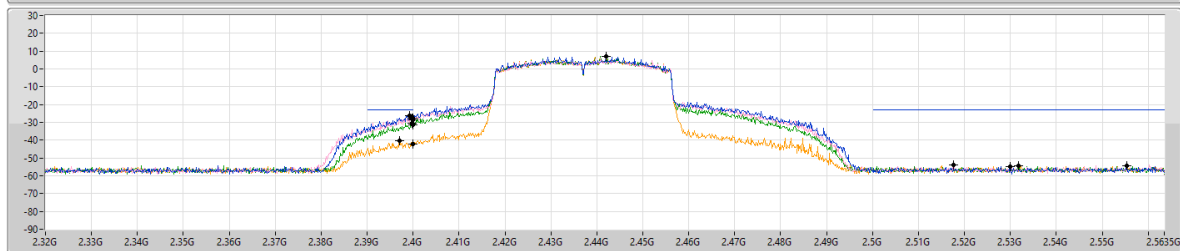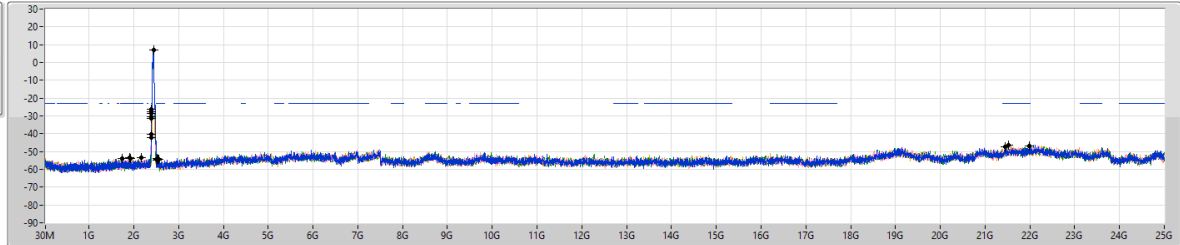RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44208G	6.96	-23.04	1.7475G	-53.96	2.3992G	-26.36	2.4G	-27.54	2.5299G	-54.72	21.97949G	-46.78	1
2.44208G	6.96	-23.04	2.1597G	-53.58	2.39984G	-27.81	2.4G	-28.55	2.51758G	-53.94	21.44101G	-47.15	2
2.44208G	6.96	-23.04	1.91124G	-53.34	2.39984G	-30.64	2.4G	-31.25	2.53182G	-54.52	21.45784G	-47.15	3
2.44208G	6.96	-23.04	1.93528G	-53.80	2.39712G	-40.21	2.4G	-42.11	2.55534G	-54.23	21.53076G	-46.64	4

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss1,(MCS0)_4TX

CSEndB

2452MHz

15/05/2026

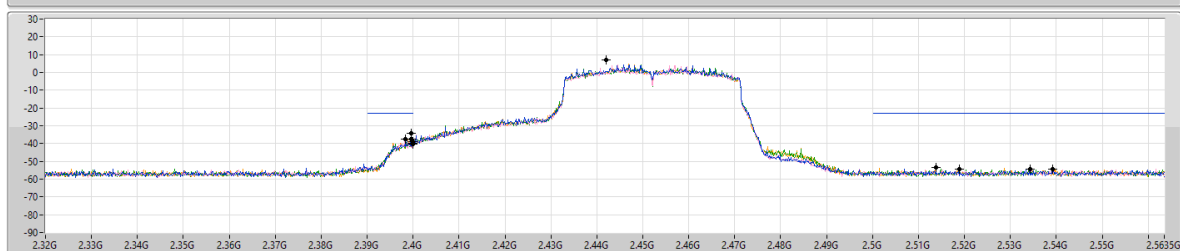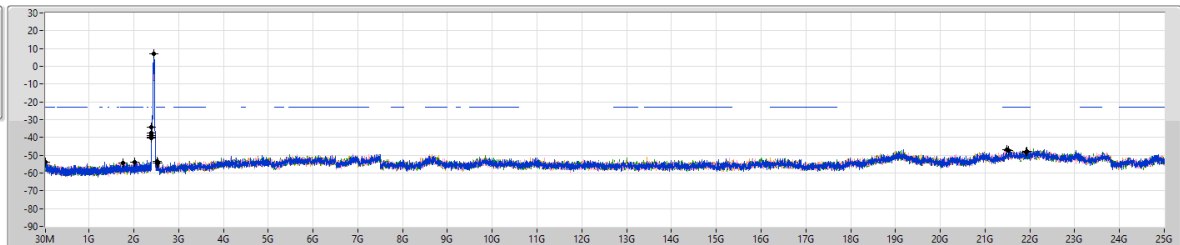RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44208G	6.96	-23.04	33.44M	-53.94	2.39952G	-34.39	2.4G	-39.13	2.53918G	-54.32	21.51393G	-47.30	1
2.44208G	6.96	-23.04	1.75208G	-54.43	2.39824G	-37.55	2.4G	-40.12	2.53422G	-54.36	21.94022G	-47.89	2
2.44208G	6.96	-23.04	2.01772G	-54.09	2.39952G	-34.05	2.4G	-38.79	2.51886G	-54.57	21.91498G	-48.16	3
2.44208G	6.96	-23.04	33.44M	-54.06	2.39968G	-37.64	2.4G	-39.86	2.51374G	-53.26	21.48588G	-47.08	4

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss2,(MCS0)_4TX

CSEndB

2412MHz

15/05/2026

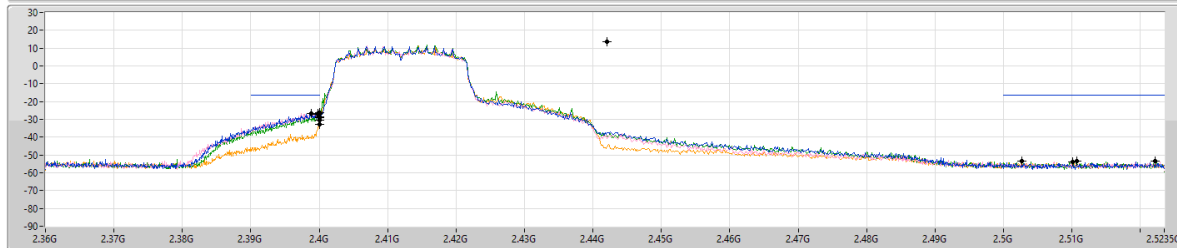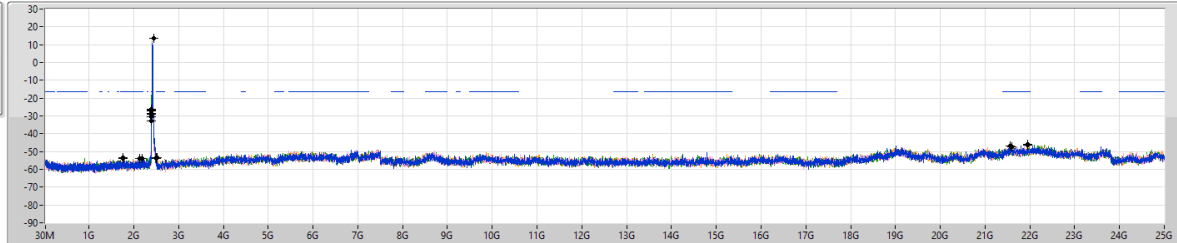RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44208G	13.60	-16.40	1.7577G	-54.05	2.3988G	-26.81	2.4G	-28.48	2.51014G	-53.68	21.95162G	-46.12	1
2.44208G	13.60	-16.40	2.1305G	-53.99	2.39976G	-26.77	2.4G	-28.86	2.52214G	-53.34	21.60324G	-47.44	2
2.44208G	13.60	-16.40	2.18409G	-53.92	2.39984G	-27.13	2.4G	-26.13	2.5107G	-53.58	21.56952G	-46.89	3
2.44208G	13.60	-16.40	1.75537G	-53.55	2.4G	-32.93	2.4G	-30.39	2.5027G	-53.49	21.96005G	-46.59	4

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss2,(MCS0)_4TX

CSEndB

2437MHz

15/05/2026

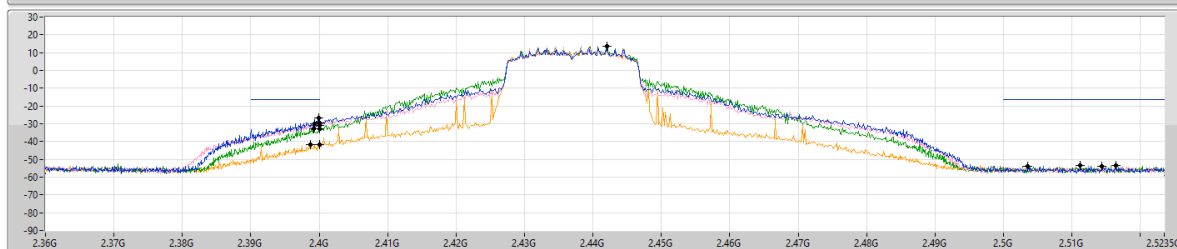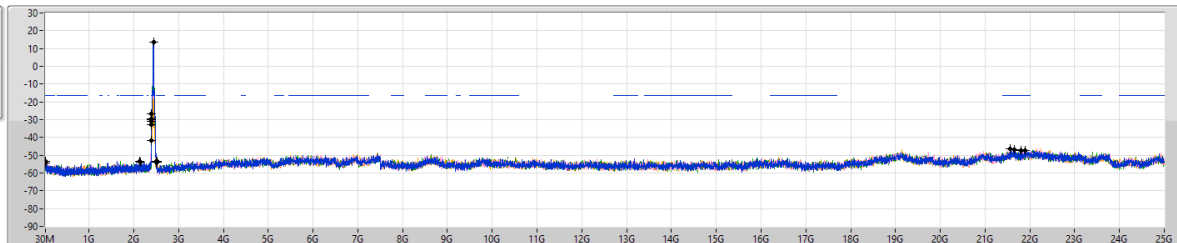RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44208G	13.60	-16.40	34.66M	-53.53	2.39992G	-26.59	2.4G	-29.68	2.51646G	-53.56	21.81115G	-47.33	1
2.44208G	13.60	-16.40	2.1305G	-53.50	2.39936G	-29.94	2.4G	-31.10	2.50358G	-53.83	21.66224G	-46.85	2
2.44208G	13.60	-16.40	34.66M	-54.20	2.3992G	-32.99	2.4G	-32.76	2.51126G	-53.58	21.89262G	-47.12	3
2.44208G	13.60	-16.40	2.14331G	-53.71	2.39872G	-41.63	2.4G	-41.93	2.51438G	-53.70	21.56952G	-46.54	4

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss2,(MCS0)_4TX

CSEndB

2462MHz

15/05/2026

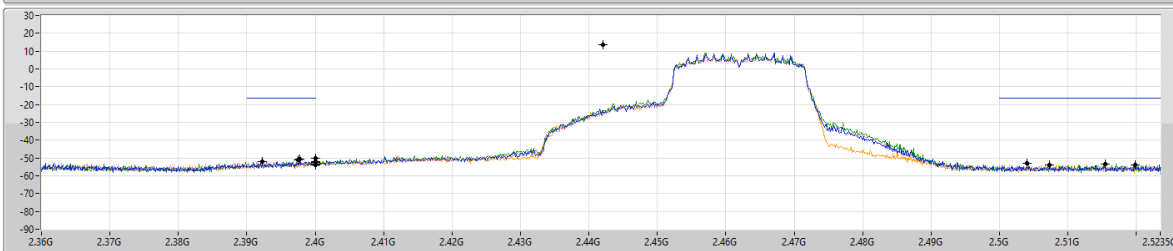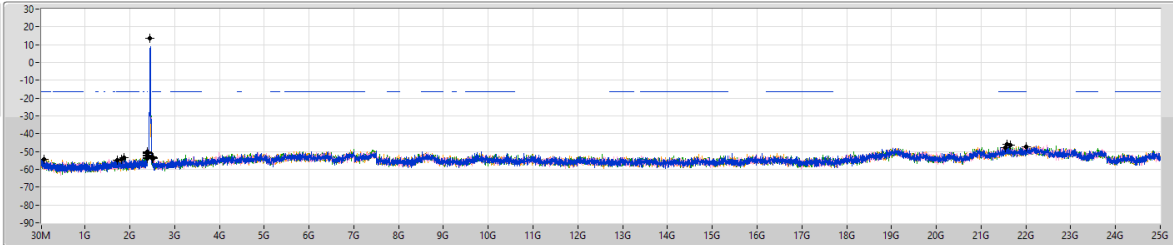RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44208G	13.60	-16.40	1.72741G	-54.67	2.39776G	-50.84	2.4G	-52.65	2.50734G	-53.87	21.57514G	-45.72	1
2.44208G	13.60	-16.40	1.81478G	-54.59	2.39744G	-51.12	2.4G	-52.21	2.51542G	-53.45	21.54986G	-47.67	2
2.44208G	13.60	-16.40	88.25M	-54.51	2.39232G	-51.91	2.4G	-53.96	2.50398G	-53.18	22.00782G	-47.14	3
2.44208G	13.60	-16.40	1.86837G	-53.57	2.4G	-50.05	2.4G	-53.53	2.51982G	-53.94	21.63381G	-46.32	4

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss2,(MCS0)_4TX

CSEndB

2422MHz

15/05/2026

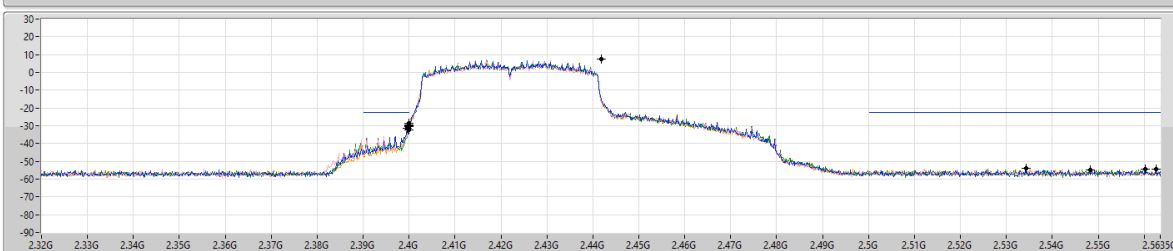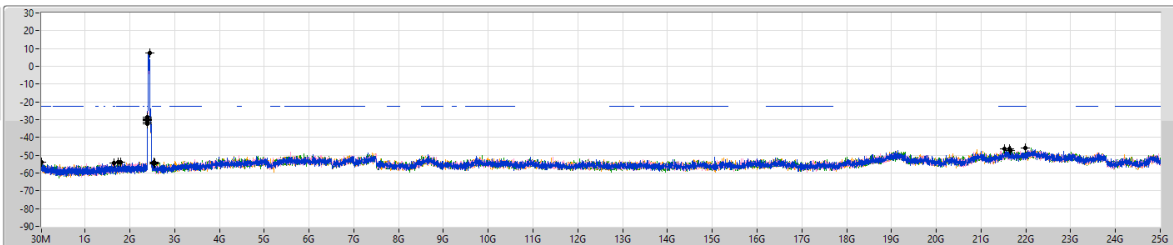RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44192G	7.60	-22.40	1.64903G	-54.39	2.4G	-29.77	2.4G	-28.58	2.5603G	-54.59	21.63172G	-46.36	1
2.44192G	7.60	-22.40	1.7933G	-54.01	2.39968G	-31.35	2.4G	-30.10	2.53422G	-53.95	21.9879G	-46.15	2
2.44192G	7.60	-22.40	1.74521G	-53.86	2.4G	-32.43	2.4G	-30.48	2.56254G	-54.40	21.65135G	-47.15	3
2.44192G	7.60	-22.40	34.58M	-53.96	2.4G	-32.45	2.4G	-29.32	2.5483G	-54.67	21.51954G	-46.56	4

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss2,(MCS0)_4TX

CSNdB

2437MHz

15/05/2026

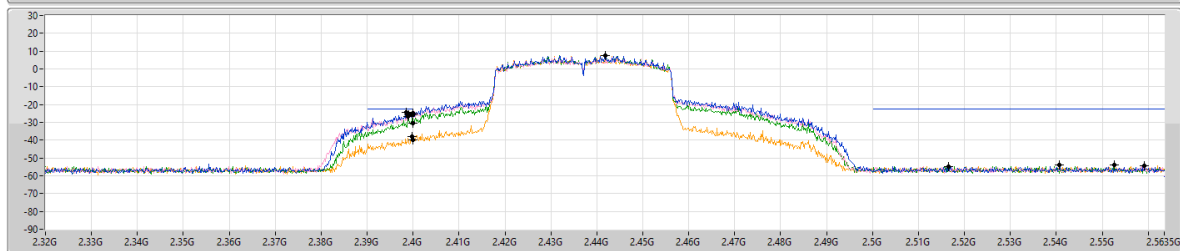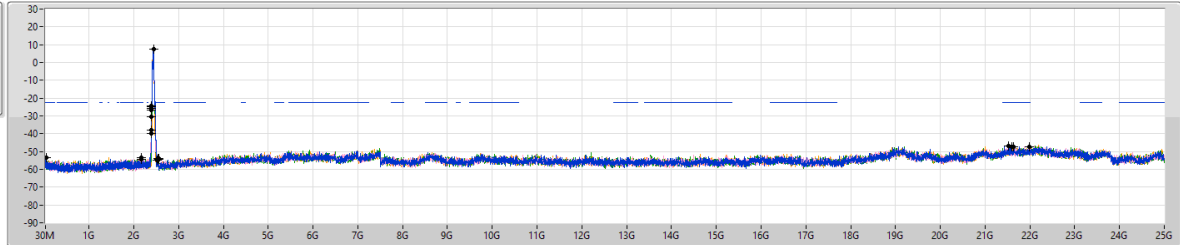RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44192G	7.60	-22.40	2.17001G	-53.53	2.39856G	-24.40	2.4G	-25.05	2.51646G	-54.67	21.52515G	-46.71	1
2.44192G	7.60	-22.40	2.17115G	-54.22	2.39904G	-25.57	2.4G	-25.77	2.55918G	-54.44	21.59526G	-47.49	2
2.44192G	7.60	-22.40	2.17459G	-54.31	2.39888G	-26.30	2.4G	-30.39	2.55262G	-53.80	21.63733G	-47.40	3
2.44192G	7.60	-22.40	57.48M	-53.53	2.39984G	-38.16	2.4G	-39.65	2.54062G	-54.12	21.9879G	-47.25	4

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss2,(MCS0)_4TX

CSNdB

2452MHz

15/05/2026

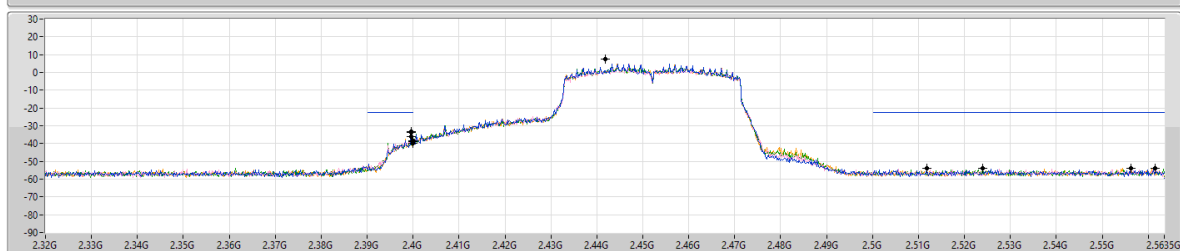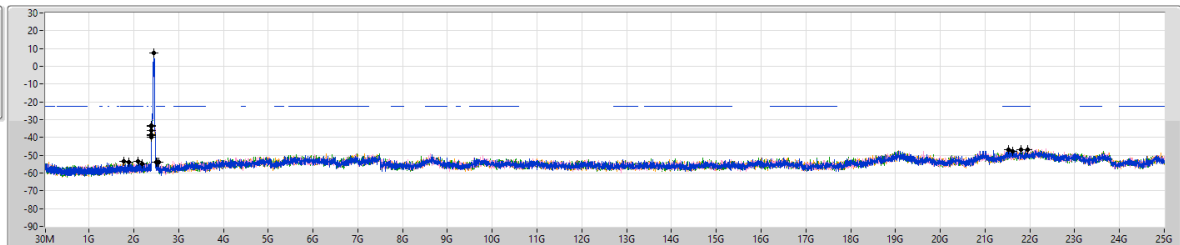RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2
Port 3
Port 4

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44192G	7.60	-22.40	2.1952G	-54.62	2.39952G	-33.55	2.4G	-38.88	2.51182G	-53.85	21.8028G	-47.03	1
2.44192G	7.60	-22.40	1.88032G	-54.09	2.39952G	-33.51	2.4G	-39.10	2.56158G	-54.08	21.99965G	-46.89	2
2.44192G	7.60	-22.40	2.09215G	-53.47	2.39952G	-35.92	2.4G	-38.35	2.52398G	-54.02	21.60928G	-47.66	3
2.44192G	7.60	-22.40	1.77269G	-53.59	2.39968G	-33.30	2.4G	-39.61	2.5563G	-53.79	21.52234G	-46.67	4




Radiated Emissions below 1GHz

Appendix F.1

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	PK	428.67M	41.89	46.00	-4.11	Horizontal

Mode 1

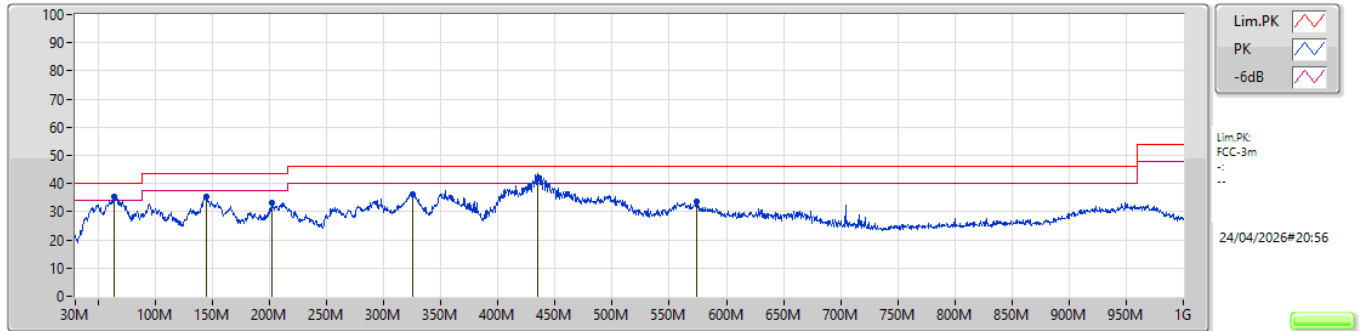

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)		
PK	63.95M	35.55	40.00	-4.45	-34.77	3	Vertical	123	1.00	-	70.32	18.50	0.72	53.99		
PK	144.95M	35.46	43.50	-8.04	-33.47	3	Vertical	87	2.00	-	68.93	18.99	1.46	53.92		
PK	201.69M	33.30	43.50	-10.20	-36.46	3	Vertical	116	1.00	-	69.76	15.77	1.69	53.92		
PK	324.88M	36.33	46.00	-9.67	-31.57	3	Vertical	246	1.00	-	67.90	19.99	2.24	53.80		
QP	434.98M	41.78	46.00	-4.22	-28.52	3	Vertical	138	1.00	"Worst"	70.30	22.64	2.48	53.64		
PK	574.17M	33.65	46.00	-12.35	-24.95	3	Vertical	99	2.00	-	58.60	24.85	3.23	53.03		

Mode 1

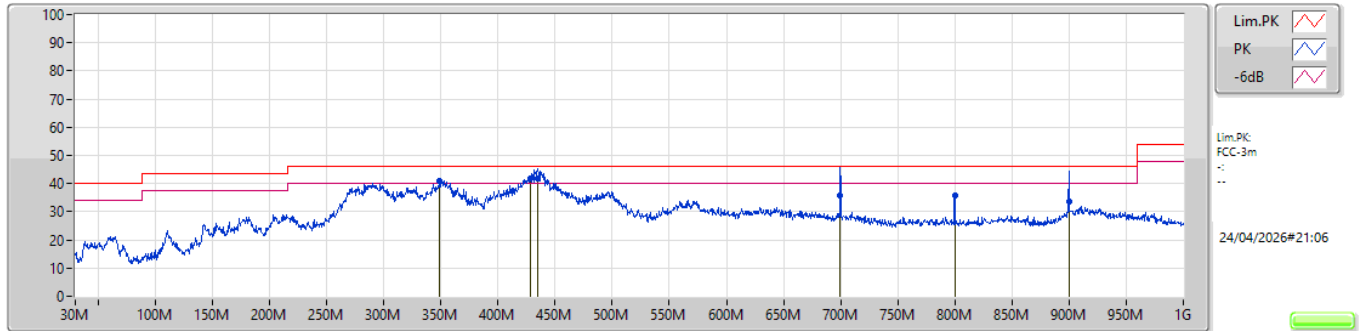

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)		
PK	349.13M	41.13	46.00	-4.87	-31.42	3	Horizontal	88	3.00	-	72.55	20.20	2.32	53.94		
PK	428.67M	41.89	46.00	-4.11	-28.75	3	Horizontal	257	2.00	"Worst"	70.64	22.44	2.48	53.67		
QP	434.49M	41.87	46.00	-4.13	-28.53	3	Horizontal	112	1.00	-	70.40	22.63	2.48	53.64		
QP	699.79M	35.61	46.00	-10.39	-22.19	3	Horizontal	354	1.00	-	57.80	26.75	3.66	52.60		
PK	800.18M	35.73	46.00	-10.27	-19.74	3	Horizontal	163	2.00	-	55.47	28.09	4.04	51.87		
QP	899.61M	33.70	46.00	-12.30	-18.20	3	Horizontal	103	1.00	-	51.90	28.96	4.59	51.75		




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-
802.11g_Nss1,(6Mbps)_4TX	Pass	AV	2.39G	52.96	54.00	-1.04	3	Vertical	184	1.79	-

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2412MHz_TX

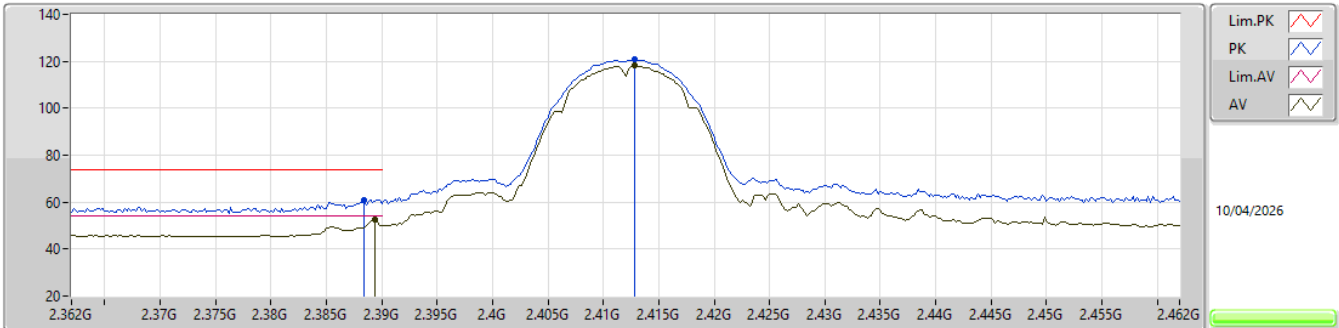


EUT_Y_4TX
Setting 92
06-U-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.3884G	61.09	74.00	-12.91	28.96	3	Vertical	296	1.86	-	27.60	4.53	-				
AV	2.3894G	52.51	54.00	-1.49	20.38	3	Vertical	296	1.86	-	27.60	4.53	-				
PK	2.4128G	120.69	Inf	-Inf	88.63	3	Vertical	296	1.86	-	27.50	4.56	-				
AV	2.4128G	118.14	Inf	-Inf	86.08	3	Vertical	296	1.86	-	27.50	4.56	-				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2412MHz_TX

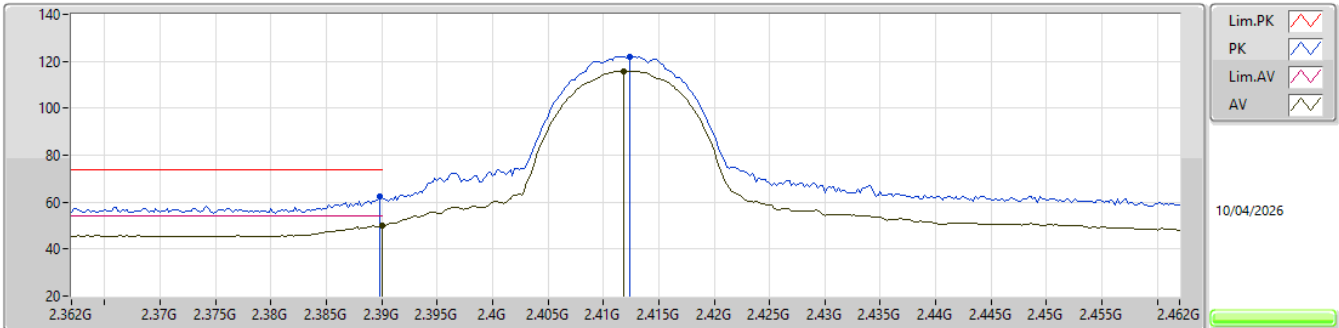


EUT_Y_4TX
Setting 92
06-U-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3898G	62.28	74.00	-11.72	30.15	3	Horizontal	136	2.07	-	27.60	4.53	-			
AV	2.39G	49.84	54.00	-4.16	17.71	3	Horizontal	136	2.07	-	27.60	4.53	-			
PK	2.4124G	122.12	Inf	-Inf	90.06	3	Horizontal	136	2.07	-	27.50	4.56	-			
AV	2.4118G	115.91	Inf	-Inf	83.85	3	Horizontal	136	2.07	-	27.50	4.56	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2412MHz_TX

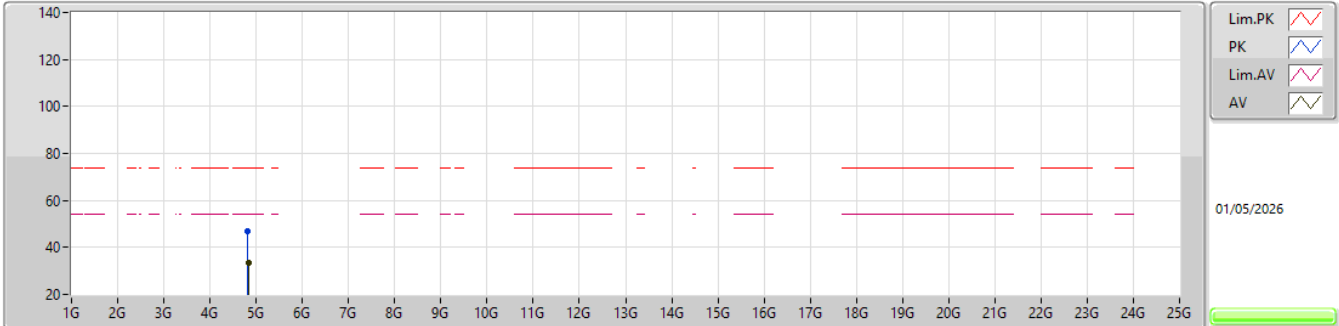


EUT_Y_4TX
Setting 92
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.8164G	46.65	74.00	-27.35	41.36	3	Vertical	11	1.06	-	33.40	6.80	34.91			
AV	4.82748G	33.24	54.00	-20.76	27.95	3	Vertical	11	1.06	-	33.40	6.80	34.91			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2412MHz_TX

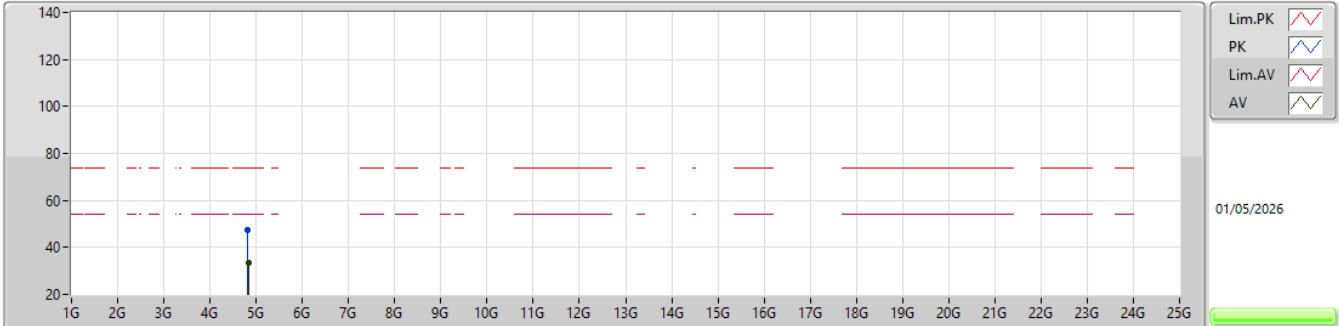


EUT_Y_4TX
Setting 92
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.82428G	47.56	74.00	-26.44	42.27	3	Horizontal	55	1.59	-	33.40	6.80	34.91			
AV	4.83264G	33.25	54.00	-20.75	27.96	3	Horizontal	55	1.59	-	33.40	6.80	34.91			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2417MHz_TX

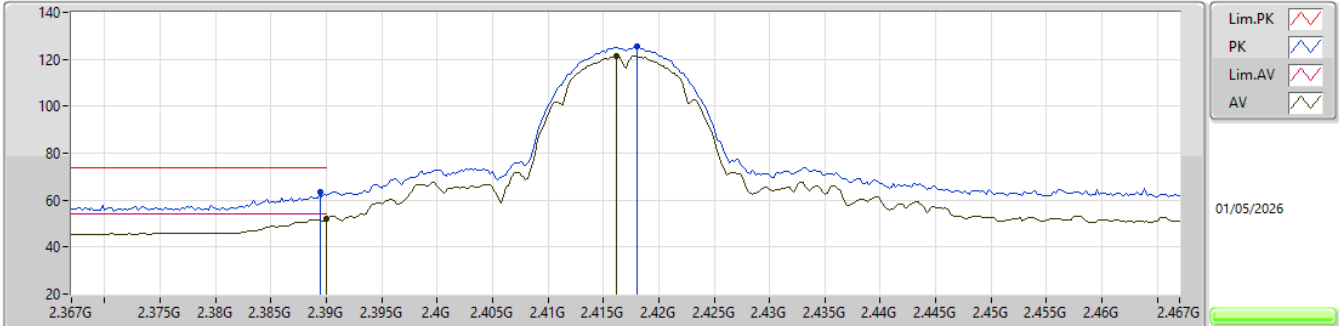


EUT_Y_4TX
Setting 104
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.3894G	63.55	74.00	-10.45	30.94	3	Vertical	311	1.80	-	28.40	4.21	-				
AV	2.39G	52.16	54.00	-1.84	19.55	3	Vertical	311	1.80	-	28.40	4.21	-				
PK	2.418G	125.43	Inf	-Inf	92.82	3	Vertical	311	1.80	-	28.38	4.23	-				
AV	2.4162G	121.45	Inf	-Inf	88.86	3	Vertical	311	1.80	-	28.36	4.23	-				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2417MHz_TX

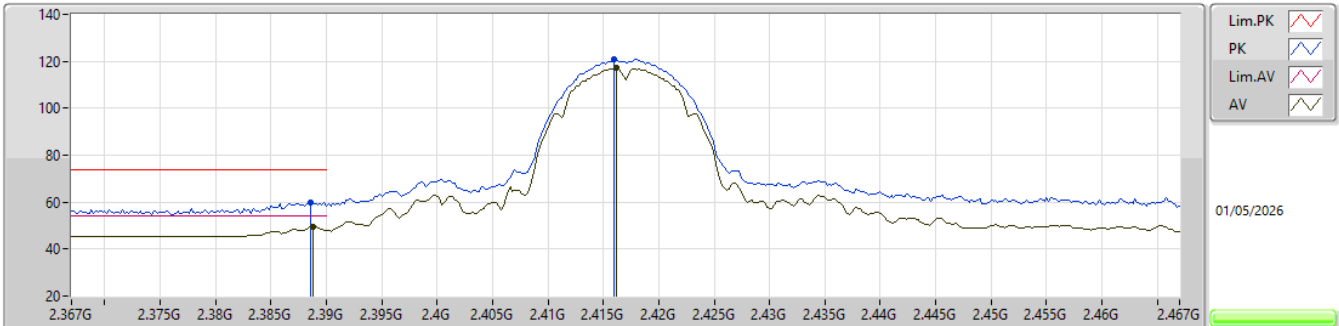


EUT_Y_4TX
Setting 104
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3886G	59.72	74.00	-14.28	27.11	3	Horizontal	178	1.98	-	28.40	4.21	-			
AV	2.3888G	49.63	54.00	-4.37	17.02	3	Horizontal	178	1.98	-	28.40	4.21	-			
PK	2.416G	120.85	Inf	-Inf	88.26	3	Horizontal	178	1.98	-	28.36	4.23	-			
AV	2.4162G	117.18	Inf	-Inf	84.59	3	Horizontal	178	1.98	-	28.36	4.23	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2437MHz_TX

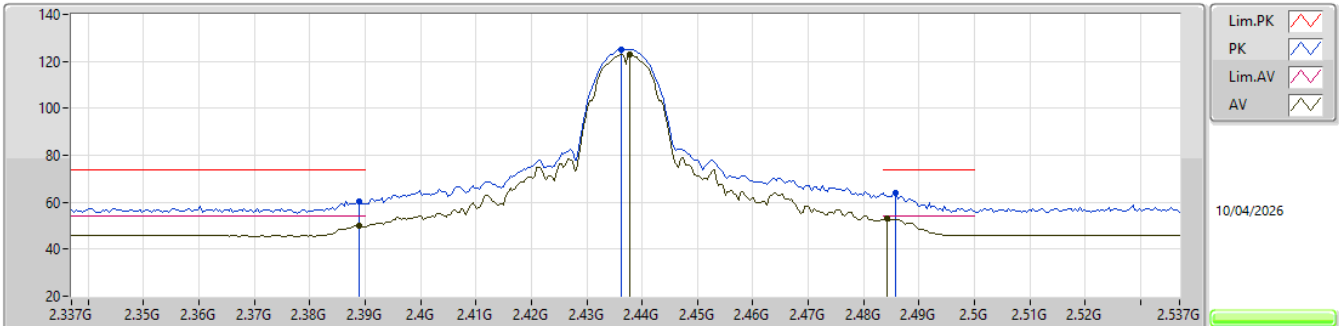


EUT_Y_4TX
Setting 107
06-U-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.389G	60.52	74.00	-13.48	28.39	3	Vertical	298	1.72	-	27.60	4.53	-				
AV	2.389G	50.15	54.00	-3.85	18.02	3	Vertical	298	1.72	-	27.60	4.53	-				
PK	2.4362G	125.22	Inf	-Inf	93.19	3	Vertical	298	1.72	-	27.44	4.59	-				
AV	2.4378G	122.72	Inf	-Inf	90.70	3	Vertical	298	1.72	-	27.42	4.60	-				
PK	2.4858G	63.91	74.00	-10.09	31.78	3	Vertical	298	1.72	-	27.46	4.67	-				
AV	2.4842G	52.85	54.00	-1.15	20.74	3	Vertical	298	1.72	-	27.44	4.67	-				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2437MHz_TX

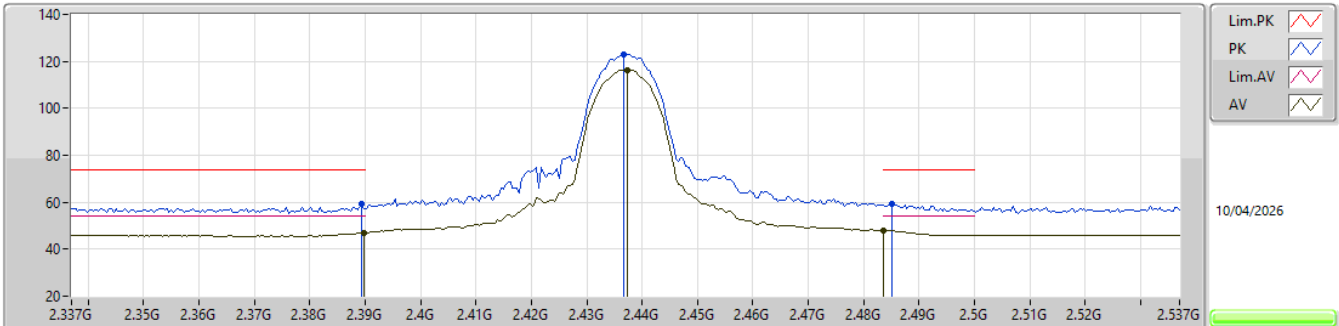


EUT_Y_4TX
Setting 107
06-U-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.3894G	59.10	74.00	-14.90	26.97	3	Horizontal	146	2.01	-	27.60	4.53	-				
AV	2.3898G	46.92	54.00	-7.08	14.79	3	Horizontal	146	2.01	-	27.60	4.53	-				
PK	2.4366G	122.89	Inf	-Inf	90.87	3	Horizontal	146	2.01	-	27.43	4.59	-				
AV	2.4374G	116.32	Inf	-Inf	84.29	3	Horizontal	146	2.01	-	27.43	4.60	-				
PK	2.485G	59.44	74.00	-14.56	27.32	3	Horizontal	146	2.01	-	27.45	4.67	-				
AV	2.4835G	47.93	54.00	-6.07	15.82	3	Horizontal	146	2.01	-	27.44	4.67	-				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2437MHz_TX

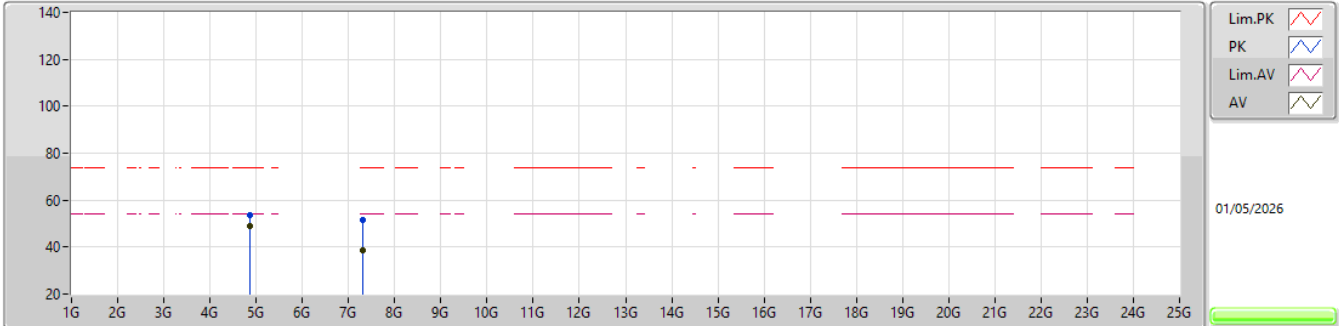


EUT_Y_4TX
Setting 107
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.87404G	53.65	74.00	-20.35	48.30	3	Vertical	57	1.80	-	33.45	6.82	34.92				
AV	4.874G	49.15	54.00	-4.85	43.80	3	Vertical	57	1.80	-	33.45	6.82	34.92				
PK	7.31896G	51.78	74.00	-22.22	41.22	3	Vertical	38	1.58	-	36.98	8.56	34.98				
AV	7.32096G	38.61	54.00	-15.39	28.04	3	Vertical	38	1.58	-	36.98	8.57	34.98				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2437MHz_TX

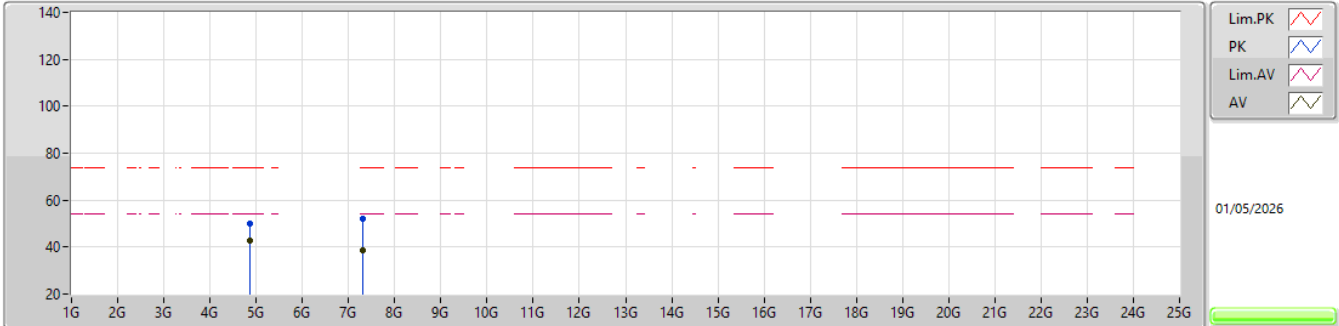


EUT_Y_4TX
Setting 107
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.874G	49.98	74.00	-24.02	44.63	3	Horizontal	198	1.87	-	33.45	6.82	34.92				
AV	4.87404G	42.77	54.00	-11.23	37.42	3	Horizontal	198	1.87	-	33.45	6.82	34.92				
PK	7.30456G	51.95	74.00	-22.05	41.47	3	Horizontal	336	1.67	-	36.92	8.55	34.99				
AV	7.32012G	38.61	54.00	-15.39	28.04	3	Horizontal	336	1.67	-	36.98	8.57	34.98				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2457MHz_TX

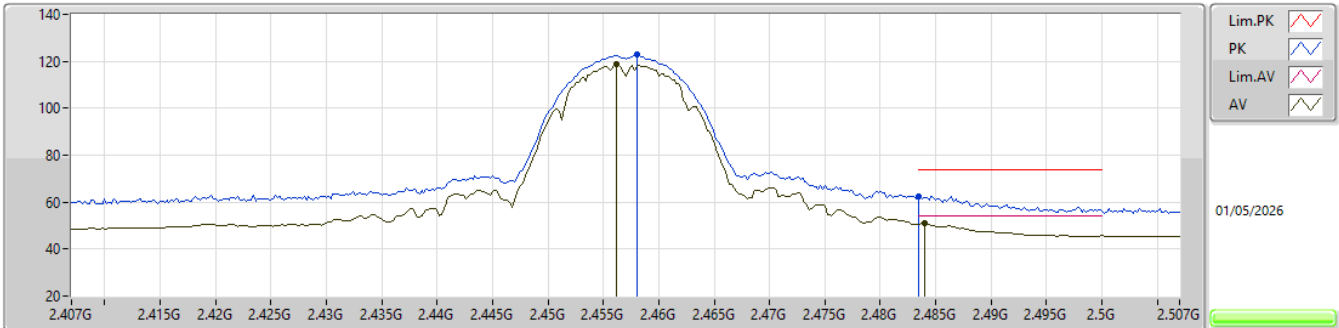


EUT_Y_4TX
Setting 94
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.458G	122.72	Inf	-Inf	89.98	3	Vertical	308	1.89	-	28.48	4.26	-			
AV	2.4562G	118.65	Inf	-Inf	85.93	3	Vertical	308	1.89	-	28.46	4.26	-			
PK	2.4835G	62.55	74.00	-11.45	29.73	3	Vertical	308	1.89	-	28.54	4.28	-			
AV	2.484G	50.95	54.00	-3.05	18.13	3	Vertical	308	1.89	-	28.54	4.28	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2457MHz_TX

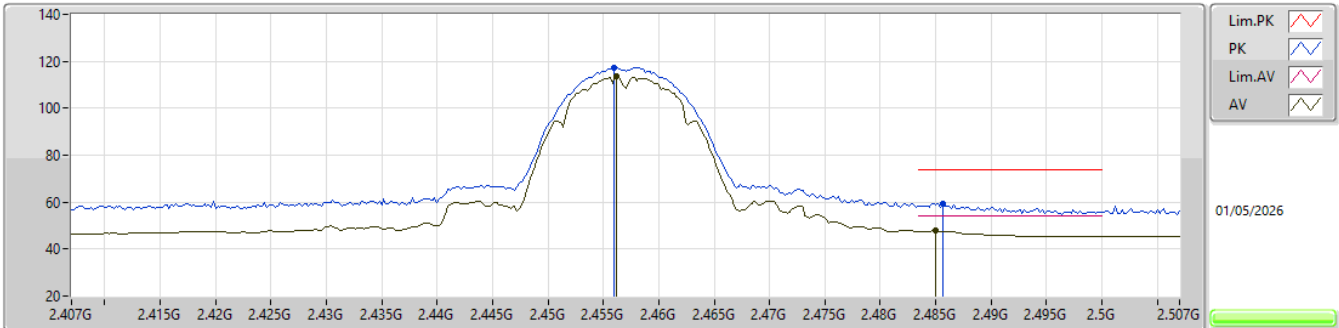


EUT_Y_4TX
Setting 94
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.456G	117.35	Inf	-Inf	84.63	3	Horizontal	174	1.68	-	28.46	4.26	-				
AV	2.4562G	113.39	Inf	-Inf	80.67	3	Horizontal	174	1.68	-	28.46	4.26	-				
PK	2.4856G	59.50	74.00	-14.50	26.66	3	Horizontal	174	1.68	-	28.56	4.28	-				
AV	2.485G	47.72	54.00	-6.28	14.89	3	Horizontal	174	1.68	-	28.55	4.28	-				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2462MHz_TX

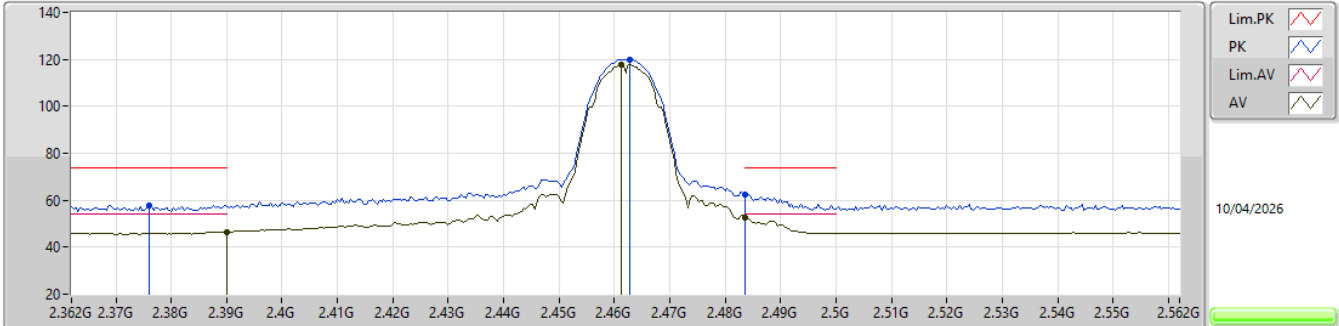


EUT_Y_4TX
Setting 87
06-U-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.376G	57.82	74.00	-16.18	25.69	3	Vertical	309.1	1.89	-	27.60	4.53	-			
AV	2.39G	46.46	54.00	-7.54	14.33	3	Vertical	309.1	1.89	-	27.60	4.53	-			
PK	2.4628G	120.06	Inf	-Inf	88.03	3	Vertical	309.1	1.89	-	27.40	4.63	-			
AV	2.4612G	117.64	Inf	-Inf	85.61	3	Vertical	309.1	1.89	-	27.40	4.63	-			
PK	2.4835G	62.64	74.00	-11.36	30.53	3	Vertical	309.1	1.89	-	27.44	4.67	-			
AV	2.4835G	52.56	54.00	-1.44	20.45	3	Vertical	309.1	1.89	-	27.44	4.67	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2462MHz_TX

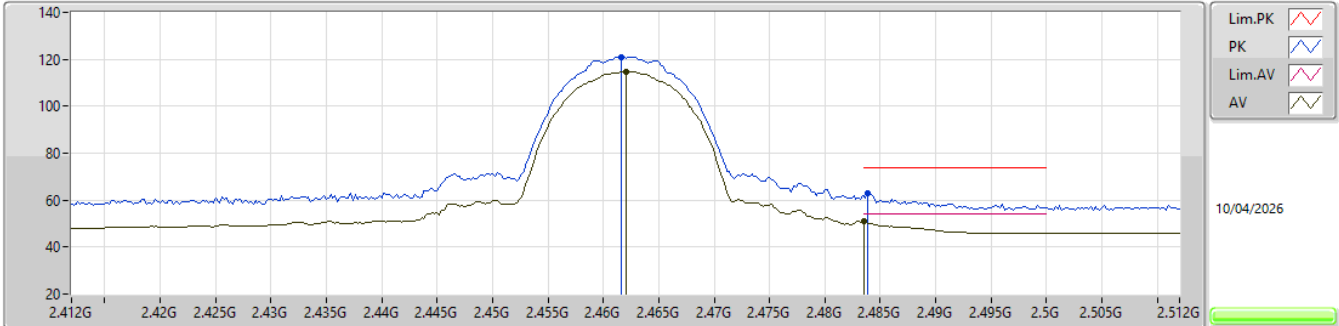


EUT_Y_4TX
Setting 87
06-U-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA					
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)					
PK	2.4616G	120.84	Inf	-Inf	88.81	3	Horizontal	139	2.23	-	27.40	4.63	-					
AV	2.462G	114.53	Inf	-Inf	82.50	3	Horizontal	139	2.23	-	27.40	4.63	-					
PK	2.4838G	62.92	74.00	-11.08	30.81	3	Horizontal	139	2.23	-	27.44	4.67	-					
AV	2.4835G	51.00	54.00	-3.00	18.89	3	Horizontal	139	2.23	-	27.44	4.67	-					

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2462MHz_TX

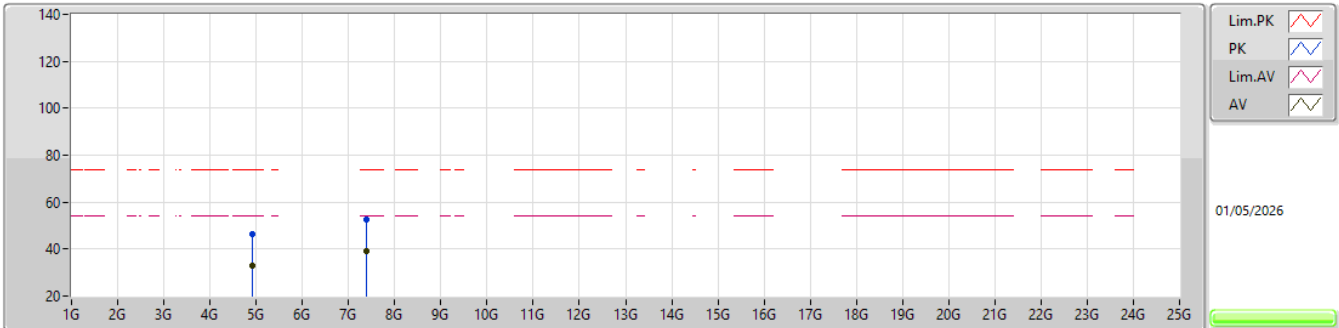


EUT_Y_4TX
Setting 87
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.91676G	46.61	74.00	-27.39	41.14	3	Vertical	130	2.61	-	33.57	6.84	34.94				
AV	4.92776G	33.09	54.00	-20.91	27.58	3	Vertical	130	2.61	-	33.61	6.84	34.94				
PK	7.38204G	52.76	74.00	-21.24	41.99	3	Vertical	266	2.52	-	37.10	8.63	34.96				
AV	7.3916G	39.17	54.00	-14.83	28.38	3	Vertical	266	2.52	-	37.10	8.64	34.95				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2462MHz_TX

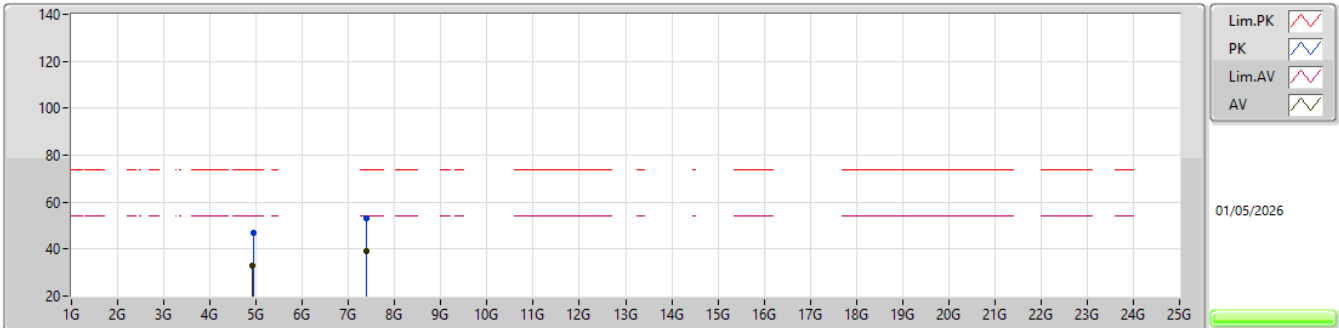


EUT_Y_4TX
Setting 87
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.93152G	46.66	74.00	-27.34	41.13	3	Horizontal	69	1.10	-	33.63	6.84	34.94				
AV	4.92984G	33.01	54.00	-20.99	27.49	3	Horizontal	69	1.10	-	33.62	6.84	34.94				
PK	7.38852G	52.90	74.00	-21.10	42.11	3	Horizontal	197	2.72	-	37.10	8.64	34.95				
AV	7.39392G	39.22	54.00	-14.78	28.43	3	Horizontal	197	2.72	-	37.10	8.64	34.95				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2412MHz_TX

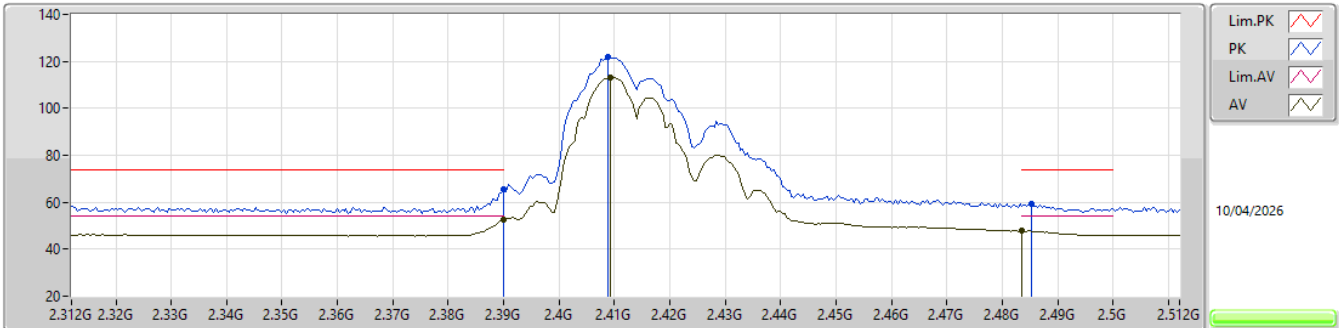


EUT_Y_4TX
Setting 83
06-U-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA					
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)					
PK	2.39G	65.51	74.00	-8.49	33.38	3	Vertical	190	1.91	-	27.60	4.53	-					
AV	2.39G	52.64	54.00	-1.36	20.51	3	Vertical	190	1.91	-	27.60	4.53	-					
PK	2.4088G	121.83	Inf	-Inf	89.77	3	Vertical	190	1.91	-	27.51	4.55	-					
AV	2.4092G	113.22	Inf	-Inf	81.16	3	Vertical	190	1.91	-	27.51	4.55	-					
PK	2.4852G	59.23	74.00	-14.77	27.11	3	Vertical	190	1.91	-	27.45	4.67	-					
AV	2.4835G	47.73	54.00	-6.27	15.62	3	Vertical	190	1.91	-	27.44	4.67	-					

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2412MHz_TX

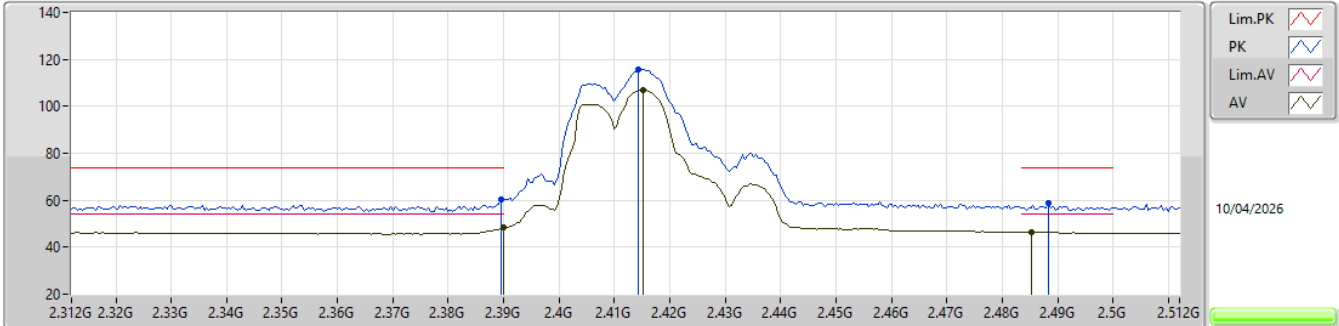


EUT_Y_4TX
Setting 83
06-U-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3896G	60.46	74.00	-13.54	28.33	3	Horizontal	341	1.24	-	27.60	4.53	-			
AV	2.39G	48.38	54.00	-5.62	16.25	3	Horizontal	341	1.24	-	27.60	4.53	-			
PK	2.4144G	115.71	Inf	-Inf	83.65	3	Horizontal	341	1.24	-	27.50	4.56	-			
AV	2.4152G	106.99	Inf	-Inf	74.93	3	Horizontal	341	1.24	-	27.50	4.56	-			
PK	2.4884G	58.76	74.00	-15.24	26.61	3	Horizontal	341	1.24	-	27.48	4.67	-			
AV	2.4852G	46.55	54.00	-7.45	14.43	3	Horizontal	341	1.24	-	27.45	4.67	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2412MHz_TX

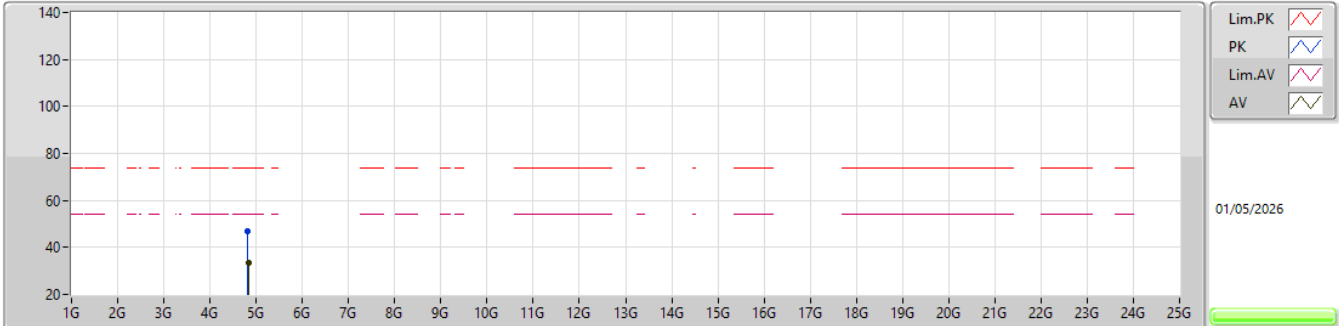


EUT_V_4TX
Setting 83
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.8182G	46.67	74.00	-27.33	41.38	3	Vertical	273	1.95	-	33.40	6.80	34.91			
AV	4.8276G	33.62	54.00	-20.38	28.33	3	Vertical	273	1.95	-	33.40	6.80	34.91			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2412MHz_TX

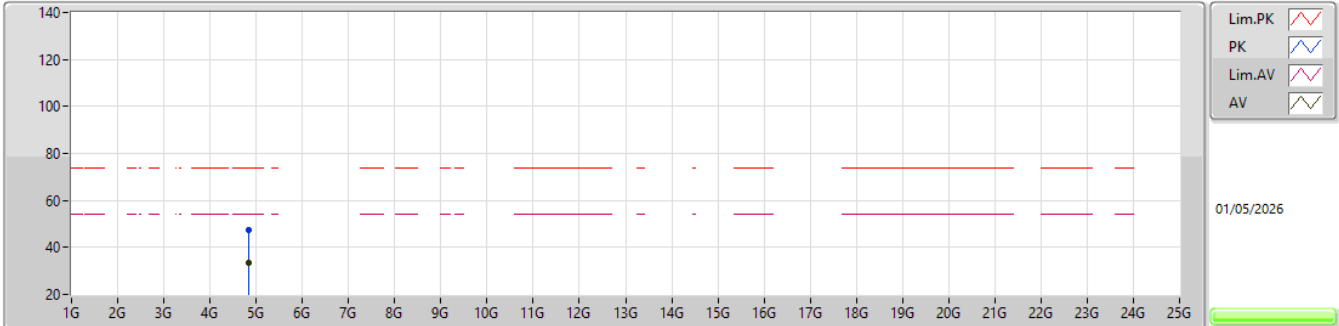


EUT_Y_4TX
Setting 83
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.83364G	47.26	74.00	-26.74	41.97	3	Horizontal	7	1.22	-	33.40	6.80	34.91			
AV	4.83364G	33.55	54.00	-20.45	28.26	3	Horizontal	7	1.22	-	33.40	6.80	34.91			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2417MHz_TX

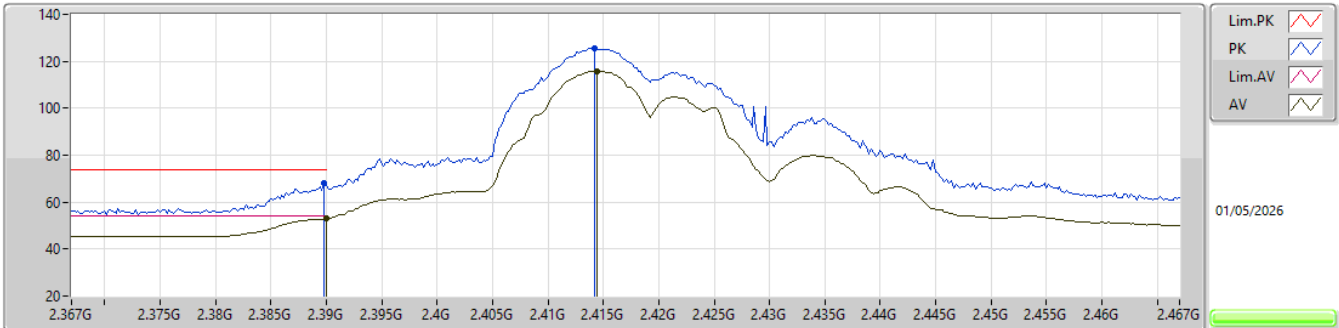


EUT_Y_4TX
Setting 98
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3898G	68.20	74.00	-5.80	35.59	3	Vertical	184	1.79	-	28.40	4.21	-			
AV	2.39G	52.96	54.00	-1.04	20.35	3	Vertical	184	1.79	-	28.40	4.21	-			
PK	2.4142G	125.46	Inf	-Inf	92.89	3	Vertical	184	1.79	-	28.34	4.23	-			
AV	2.4144G	115.79	Inf	-Inf	83.22	3	Vertical	184	1.79	-	28.34	4.23	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2417MHz_TX

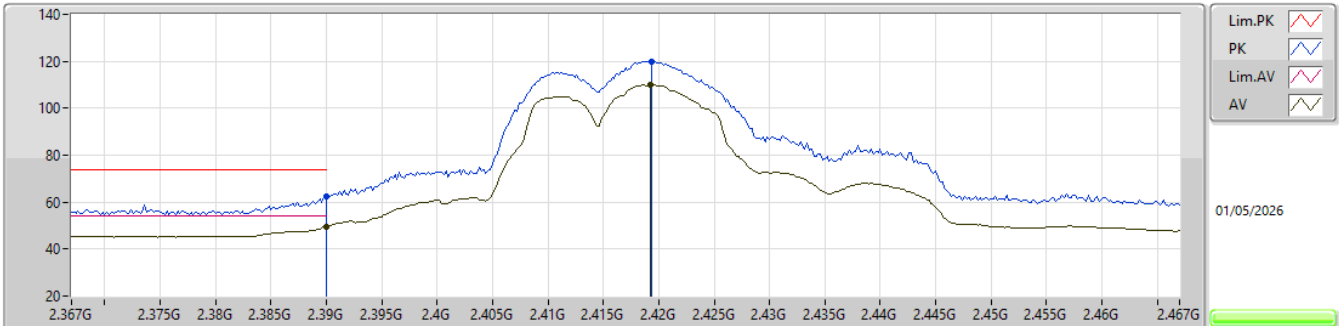


EUT_Y_4TX
Setting 98
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.39G	62.60	74.00	-11.40	29.99	3	Horizontal	348	1.73	-	28.40	4.21	-			
AV	2.39G	49.69	54.00	-4.31	17.08	3	Horizontal	348	1.73	-	28.40	4.21	-			
PK	2.4194G	120.05	Inf	-Inf	87.43	3	Horizontal	348	1.73	-	28.39	4.23	-			
AV	2.4192G	110.03	Inf	-Inf	77.41	3	Horizontal	348	1.73	-	28.39	4.23	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2437MHz_TX

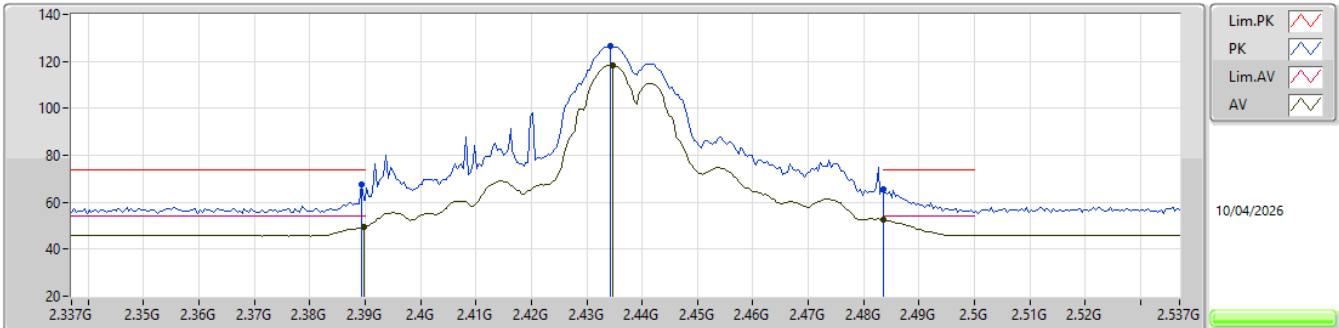


EUT_Y_4TX
Setting 101
06-U-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.3894G	67.60	74.00	-6.40	35.47	3	Vertical	188	1.71	-	27.60	4.53	-				
AV	2.3898G	49.35	54.00	-4.65	17.22	3	Vertical	188	1.71	-	27.60	4.53	-				
PK	2.4342G	126.47	Inf	-Inf	94.42	3	Vertical	188	1.71	-	27.46	4.59	-				
AV	2.4346G	118.23	Inf	-Inf	86.19	3	Vertical	188	1.71	-	27.45	4.59	-				
PK	2.4835G	65.28	74.00	-8.72	33.17	3	Vertical	188	1.71	-	27.44	4.67	-				
AV	2.4835G	52.40	54.00	-1.60	20.29	3	Vertical	188	1.71	-	27.44	4.67	-				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2437MHz_TX

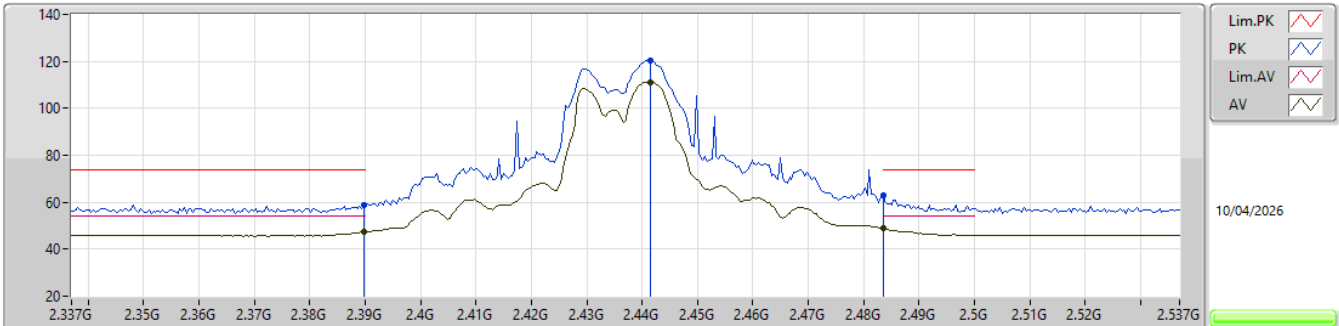


EUT_Y_4TX
Setting 101
06-U-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3898G	58.97	74.00	-15.03	26.84	3	Horizontal	50	1.00	-	27.60	4.53	-			
AV	2.3898G	47.47	54.00	-6.53	15.34	3	Horizontal	50	1.00	-	27.60	4.53	-			
PK	2.4414G	120.28	Inf	-Inf	88.28	3	Horizontal	50	1.00	-	27.40	4.60	-			
AV	2.4414G	111.24	Inf	-Inf	79.24	3	Horizontal	50	1.00	-	27.40	4.60	-			
PK	2.4835G	63.13	74.00	-10.87	31.02	3	Horizontal	50	1.00	-	27.44	4.67	-			
AV	2.4835G	49.04	54.00	-4.96	16.93	3	Horizontal	50	1.00	-	27.44	4.67	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2437MHz_TX

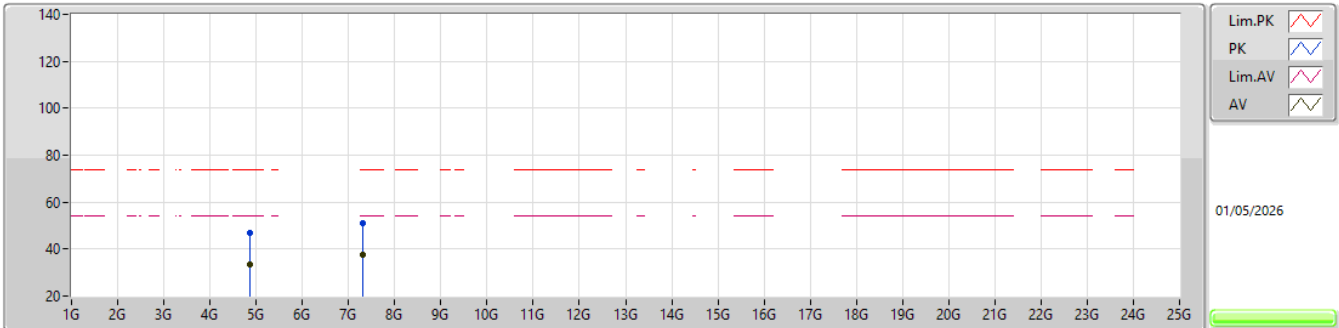


EUT_Y_4TX
Setting 101
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.86628G	46.95	74.00	-27.05	41.62	3	Vertical	257	2.93	-	33.43	6.82	34.92				
AV	4.86652G	33.61	54.00	-20.39	28.28	3	Vertical	257	2.93	-	33.43	6.82	34.92				
PK	7.31128G	50.91	74.00	-23.09	40.39	3	Vertical	307	1.47	-	36.95	8.56	34.99				
AV	7.32084G	37.70	54.00	-16.30	27.13	3	Vertical	307	1.47	-	36.98	8.57	34.98				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2437MHz_TX

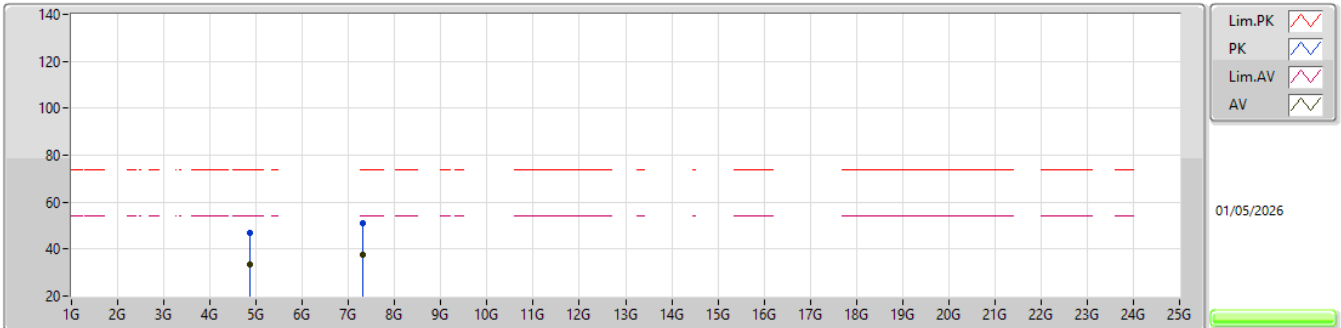


EUT_Y_4TX
Setting 101
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.87308G	46.70	74.00	-27.30	41.35	3	Horizontal	49	2.84	-	33.45	6.82	34.92				
AV	4.865G	33.59	54.00	-20.41	28.26	3	Horizontal	49	2.84	-	33.43	6.82	34.92				
PK	7.3204G	51.13	74.00	-22.87	40.56	3	Horizontal	137	2.77	-	36.98	8.57	34.98				
AV	7.31748G	37.69	54.00	-16.31	27.14	3	Horizontal	137	2.77	-	36.97	8.56	34.98				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2457MHz_TX

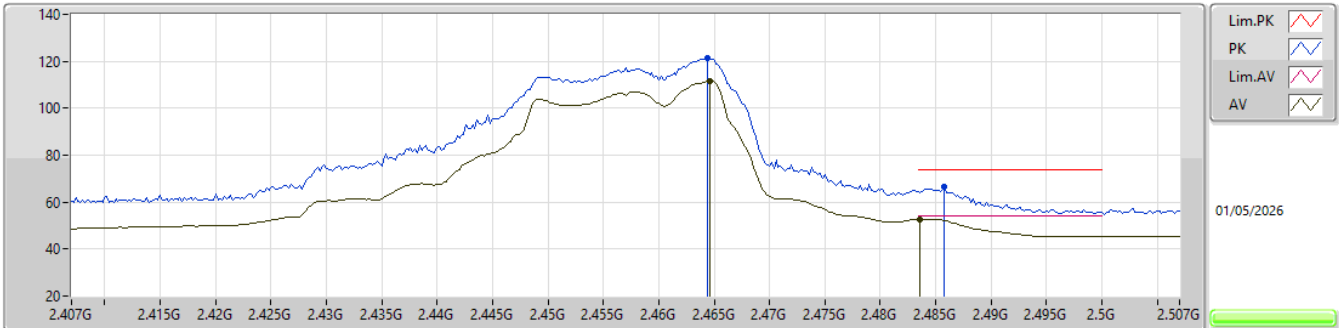


EUT_Y_4TX
Setting 92
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.4644G	121.40	Inf	-Inf	88.63	3	Vertical	360	1.73	-	28.50	4.27	-				
AV	2.4646G	111.38	Inf	-Inf	78.61	3	Vertical	360	1.73	-	28.50	4.27	-				
PK	2.4858G	66.46	74.00	-7.54	33.62	3	Vertical	360	1.73	-	28.56	4.28	-				
AV	2.4836G	52.74	54.00	-1.26	19.92	3	Vertical	360	1.73	-	28.54	4.28	-				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2457MHz_TX

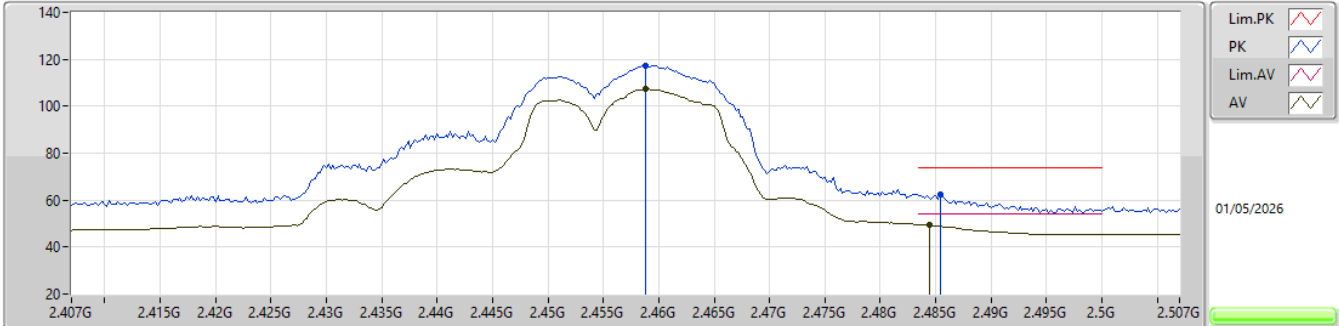


EUT_Y_4TX
Setting 92
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.4588G	117.15	Inf	-Inf	84.40	3	Horizontal	344	1.83	-	28.49	4.26	-			
AV	2.4588G	107.38	Inf	-Inf	74.63	3	Horizontal	344	1.83	-	28.49	4.26	-			
PK	2.4854G	62.29	74.00	-11.71	29.46	3	Horizontal	344	1.83	-	28.55	4.28	-			
AV	2.4844G	49.57	54.00	-4.43	16.75	3	Horizontal	344	1.83	-	28.54	4.28	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2462MHz_TX

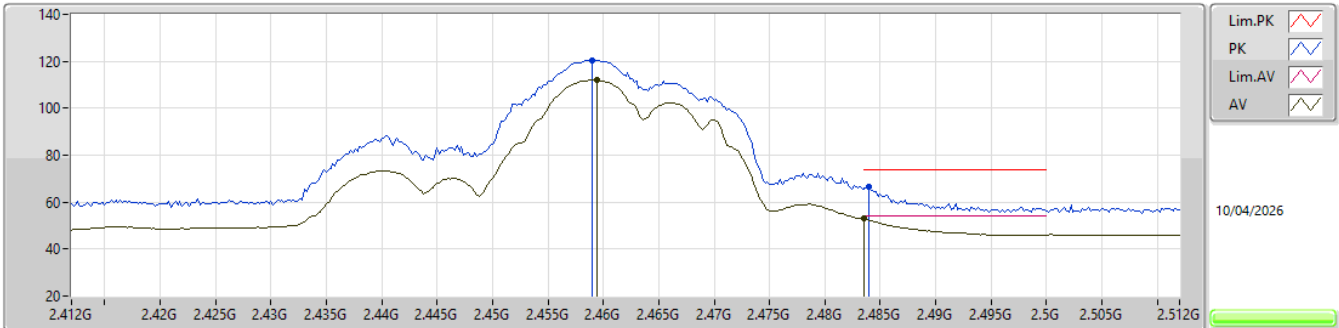


EUT_Y_4TX
Setting 81
06-U-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.459G	120.40	Inf	-Inf	88.37	3	Vertical	182	1.78	-	27.40	4.63	-			
AV	2.4594G	112.00	Inf	-Inf	79.97	3	Vertical	182	1.78	-	27.40	4.63	-			
PK	2.484G	66.37	74.00	-7.63	34.26	3	Vertical	182	1.78	-	27.44	4.67	-			
AV	2.4835G	52.85	54.00	-1.15	20.74	3	Vertical	182	1.78	-	27.44	4.67	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2462MHz_TX

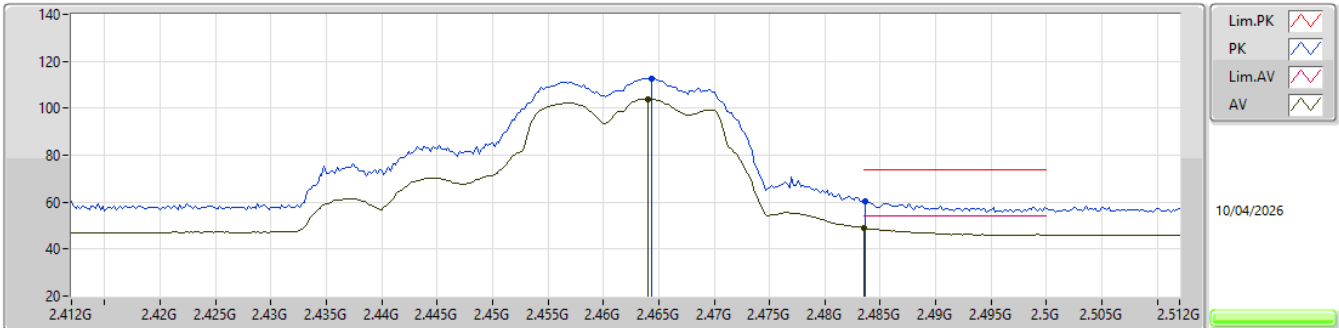


EUT_Y_4TX
Setting 81
06-U-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	2.4644G	112.75	Inf	-Inf	80.71	3	Horizontal	326	1.80	-	27.40	4.64	-			
AV	2.464G	103.96	Inf	-Inf	71.92	3	Horizontal	326	1.80	-	27.40	4.64	-			
PK	2.4836G	60.44	74.00	-13.56	28.33	3	Horizontal	326	1.80	-	27.44	4.67	-			
AV	2.4835G	48.98	54.00	-5.02	16.87	3	Horizontal	326	1.80	-	27.44	4.67	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2462MHz_TX

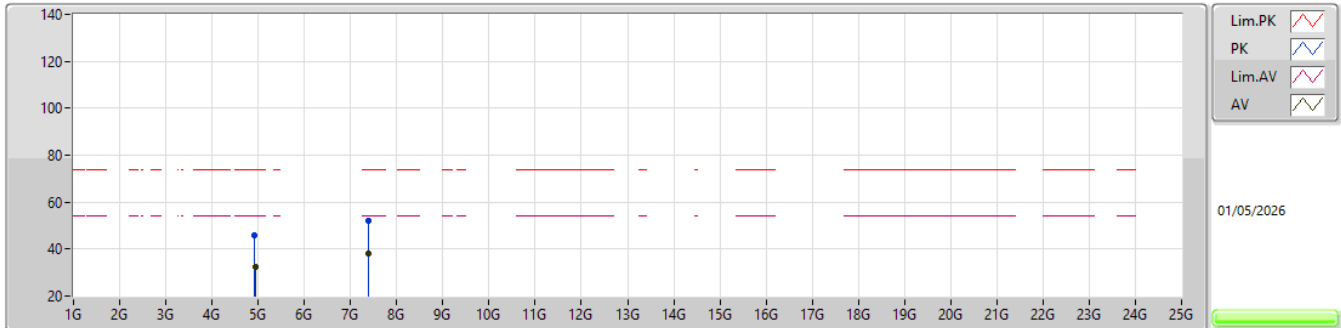


EUT_Y_4TX
Setting 81
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.9214G	45.77	74.00	-28.23	40.28	3	Vertical	85	2.82	-	33.59	6.84	34.94				
AV	4.93204G	32.59	54.00	-21.41	27.06	3	Vertical	85	2.82	-	33.63	6.84	34.94				
PK	7.38076G	51.93	74.00	-22.07	41.16	3	Vertical	66	2.79	-	37.10	8.63	34.96				
AV	7.39588G	38.13	54.00	-15.87	27.33	3	Vertical	66	2.79	-	37.10	8.65	34.95				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2462MHz_TX

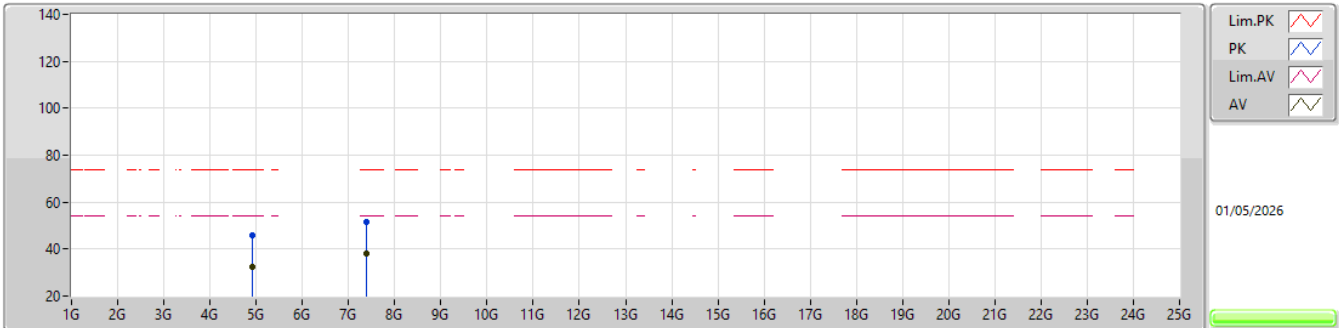


EUT_Y_4TX
Setting 81
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.91952G	45.77	74.00	-28.23	40.29	3	Horizontal	24	2.06	-	33.58	6.84	34.94				
AV	4.92976G	32.48	54.00	-21.52	26.96	3	Horizontal	24	2.06	-	33.62	6.84	34.94				
PK	7.38812G	51.56	74.00	-22.44	40.77	3	Horizontal	19	2.57	-	37.10	8.64	34.95				
AV	7.3938G	38.15	54.00	-15.85	27.36	3	Horizontal	19	2.57	-	37.10	8.64	34.95				

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss1,(MCS0)_4TX

2412MHz_TX

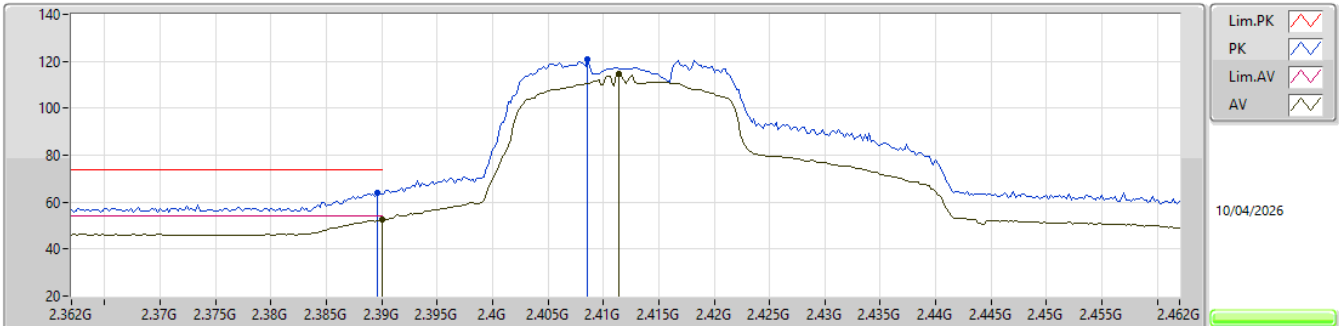


EUT_Y_4TX
Setting 86
06-U-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.3896G	63.75	74.00	-10.25	31.62	3	Vertical	170	2.79	-	27.60	4.53	-				
AV	2.39G	52.60	54.00	-1.40	20.47	3	Vertical	170	2.79	-	27.60	4.53	-				
PK	2.4086G	121.10	Inf	-Inf	89.04	3	Vertical	170	2.79	-	27.51	4.55	-				
AV	2.4114G	114.71	Inf	-Inf	82.65	3	Vertical	170	2.79	-	27.50	4.56	-				

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss1,(MCS0)_4TX

2412MHz_TX

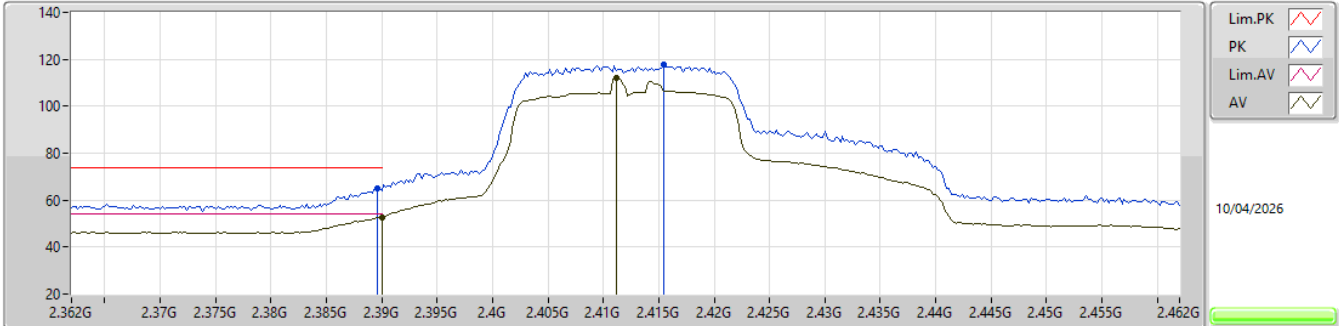


EUT_Y_4TX
Setting 86
06-U-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.3896G	65.01	74.00	-8.99	32.88	3	Horizontal	168	1.80	-	27.60	4.53	-				
AV	2.39G	52.59	54.00	-1.41	20.46	3	Horizontal	168	1.80	-	27.60	4.53	-				
PK	2.4154G	117.61	Inf	-Inf	85.55	3	Horizontal	168	1.80	-	27.50	4.56	-				
AV	2.4112G	112.23	Inf	-Inf	80.17	3	Horizontal	168	1.80	-	27.50	4.56	-				

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss1,(MCS0)_4TX

2412MHz_TX

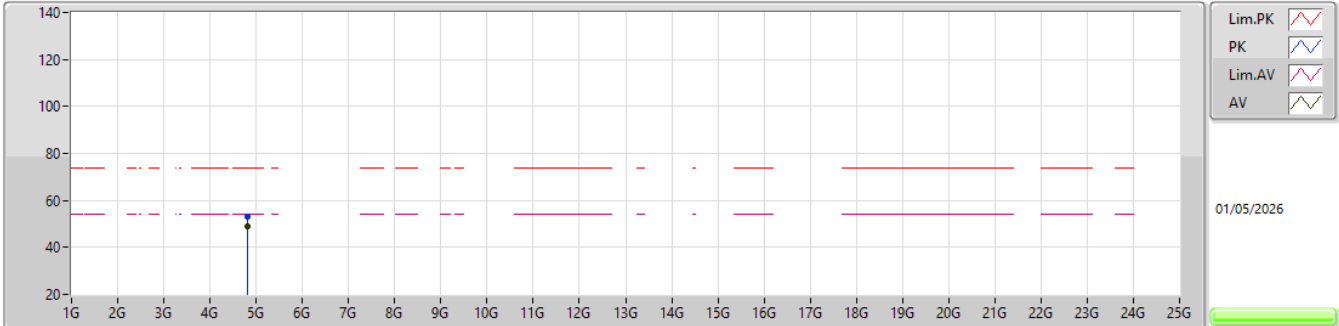


EUT_Y_4TX
Setting 86
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.824G	52.88	74.00	-21.12	47.59	3	Vertical	127	1.94	-	33.40	6.80	34.91			
AV	4.82396G	48.81	54.00	-5.19	43.52	3	Vertical	127	1.94	-	33.40	6.80	34.91			

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss1,(MCS0)_4TX

2412MHz_TX

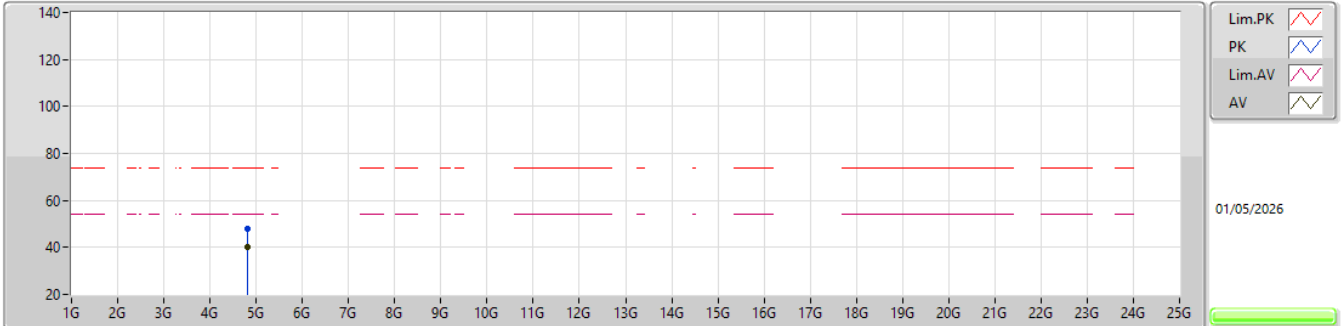


EUT_Y_4TX
Setting 86
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.82384G	47.94	74.00	-26.06	43.68	3	Horizontal	36	1.80	-	31.20	6.73	33.67			
AV	4.824G	40.24	54.00	-13.76	35.98	3	Horizontal	36	1.80	-	31.20	6.73	33.67			

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss1,(MCS0)_4TX

2417MHz_TX

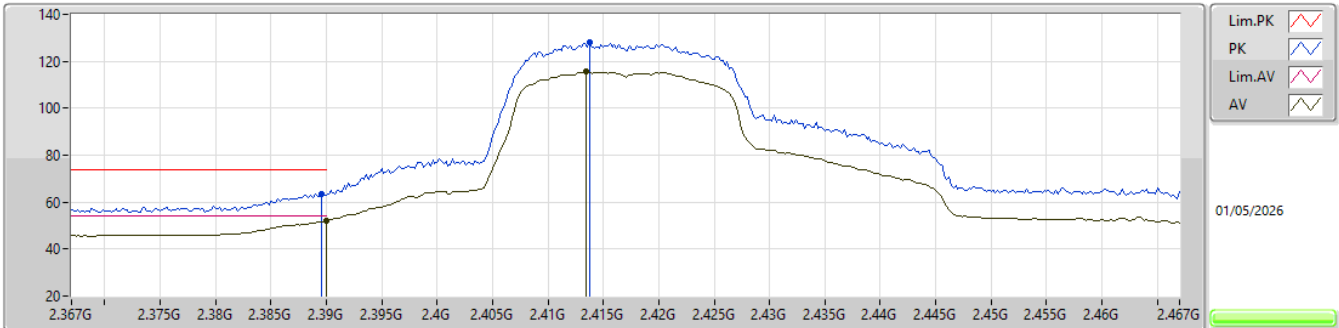


EUT_Y_4TX
Setting 94
02-D-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	2.3896G	63.53	74.00	-10.47	30.67	3	Vertical	175	1.78	-	28.50	4.36	-				
AV	2.39G	51.90	54.00	-2.10	19.04	3	Vertical	175	1.78	-	28.50	4.36	-				
PK	2.4138G	127.89	Inf	-Inf	95.10	3	Vertical	175	1.78	-	28.40	4.39	-				
AV	2.4134G	115.54	Inf	-Inf	82.75	3	Vertical	175	1.78	-	28.40	4.39	-				

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss1,(MCS0)_4TX

2417MHz_TX

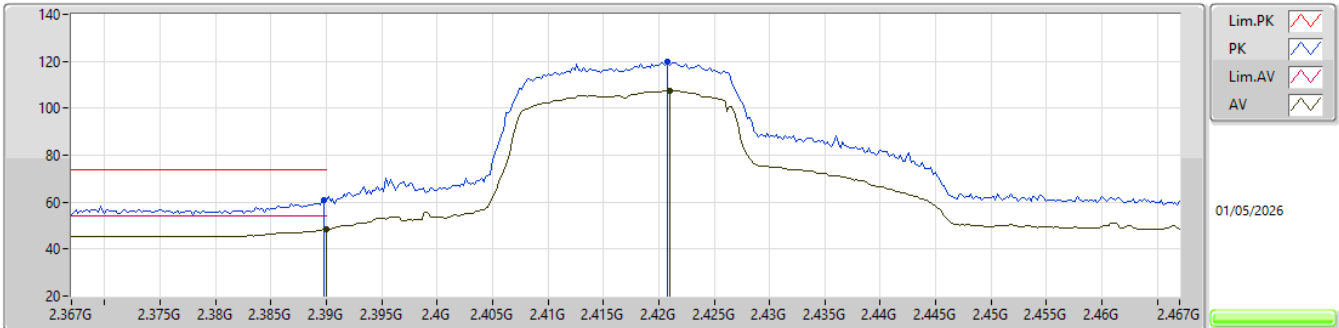


EUT_Y_4TX
Setting 94
02-D-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3898G	60.94	74.00	-13.06	28.08	3	Horizontal	347	1.35	-	28.50	4.36	-			
AV	2.39G	48.55	54.00	-5.45	15.69	3	Horizontal	347	1.35	-	28.50	4.36	-			
PK	2.4208G	120.06	Inf	-Inf	87.26	3	Horizontal	347	1.35	-	28.40	4.40	-			
AV	2.421G	107.66	Inf	-Inf	74.86	3	Horizontal	347	1.35	-	28.40	4.40	-			

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss1,(MCS0)_4TX

2437MHz_TX

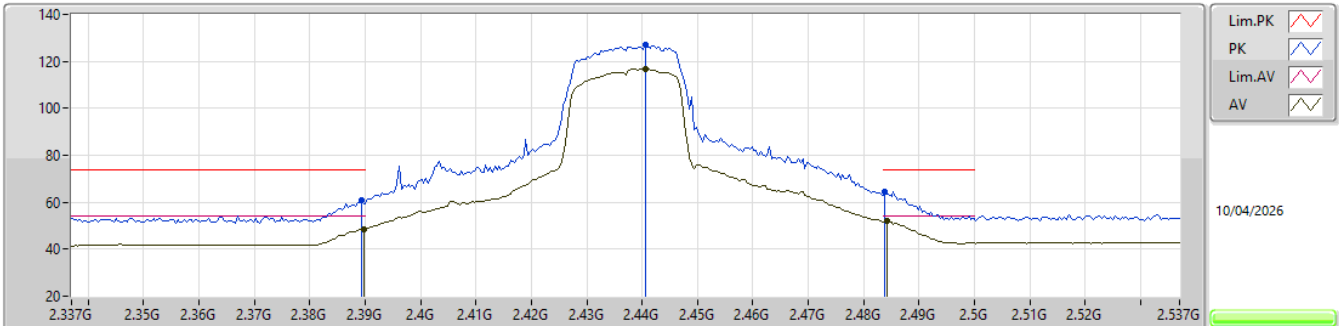


EUT_Y_4TX
Setting 102
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3894G	60.89	74.00	-13.11	59.65	3	Vertical	342	2.00	-	27.59	4.98	31.33			
AV	2.3898G	48.63	54.00	-5.37	47.38	3	Vertical	342	2.00	-	27.60	4.98	31.33			
PK	2.4406G	127.04	Inf	-Inf	125.58	3	Vertical	342	2.00	-	27.70	5.06	31.30			
AV	2.4406G	116.78	Inf	-Inf	115.32	3	Vertical	342	2.00	-	27.70	5.06	31.30			
PK	2.4838G	64.62	74.00	-9.38	62.84	3	Vertical	342	2.00	-	27.94	5.13	31.29			
AV	2.4842G	52.16	54.00	-1.84	50.38	3	Vertical	342	2.00	-	27.94	5.13	31.29			

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss1,(MCS0)_4TX

2437MHz_TX

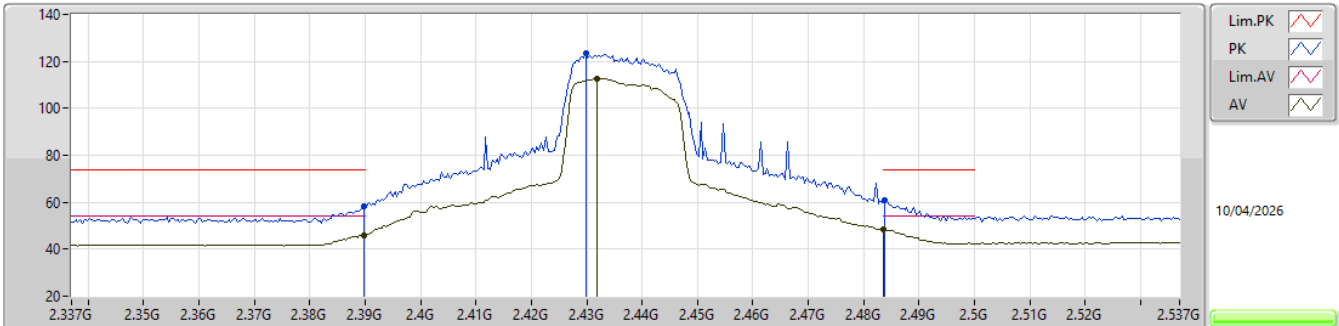


EUT Y_4TX
Setting 102
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3898G	58.14	74.00	-15.86	56.89	3	Horizontal	142	1.85	-	27.60	4.98	31.33			
AV	2.3898G	46.03	54.00	-7.97	44.78	3	Horizontal	142	1.85	-	27.60	4.98	31.33			
PK	2.4298G	123.35	Inf	-Inf	121.92	3	Horizontal	142	1.85	-	27.70	5.04	31.31			
AV	2.4318G	112.59	Inf	-Inf	111.16	3	Horizontal	142	1.85	-	27.70	5.04	31.31			
PK	2.4838G	61.01	74.00	-12.99	59.23	3	Horizontal	142	1.85	-	27.94	5.13	31.29			
AV	2.4835G	48.24	54.00	-5.76	46.46	3	Horizontal	142	1.85	-	27.94	5.13	31.29			

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss1,(MCS0)_4TX

2437MHz_TX

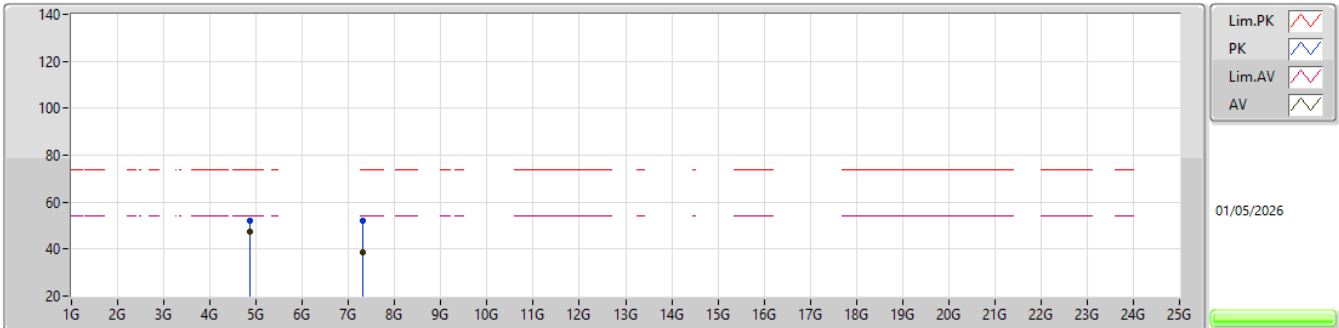


EUT_Y_4TX
Setting 102
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.87408G	52.21	74.00	-21.79	46.86	3	Vertical	310	1.48	-	33.45	6.82	34.92				
AV	4.874G	47.22	54.00	-6.78	41.87	3	Vertical	310	1.48	-	33.45	6.82	34.92				
PK	7.31908G	52.15	74.00	-21.85	41.58	3	Vertical	360	2.95	-	36.98	8.57	34.98				
AV	7.32088G	38.81	54.00	-15.19	28.24	3	Vertical	360	2.95	-	36.98	8.57	34.98				

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss1,(MCS0)_4TX

2437MHz_TX

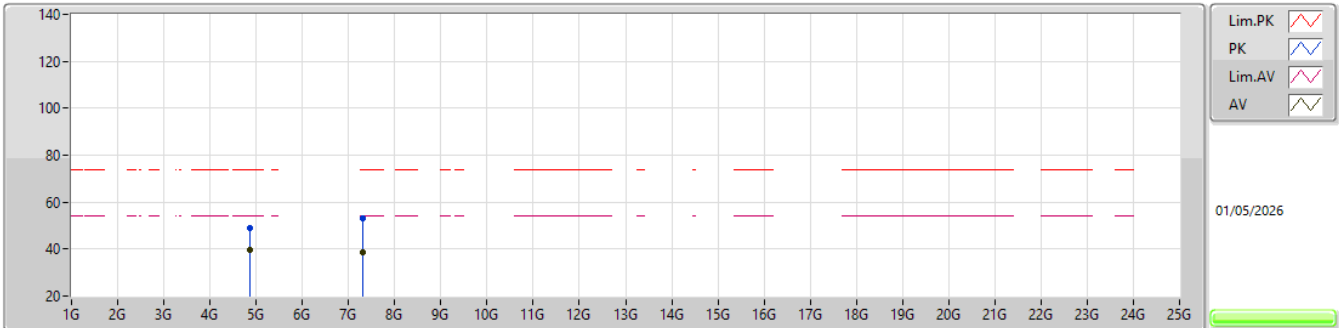


EUT_Y_4TX
Setting 102
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.87388G	49.19	74.00	-24.81	43.84	3	Horizontal	193	1.94	-	33.45	6.82	34.92			
AV	4.874G	39.44	54.00	-14.56	34.09	3	Horizontal	193	1.94	-	33.45	6.82	34.92			
PK	7.32052G	52.89	74.00	-21.11	42.32	3	Horizontal	329	2.76	-	36.98	8.57	34.98			
AV	7.32036G	38.67	54.00	-15.33	28.10	3	Horizontal	329	2.76	-	36.98	8.57	34.98			

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss1,(MCS0)_4TX

2457MHz_TX

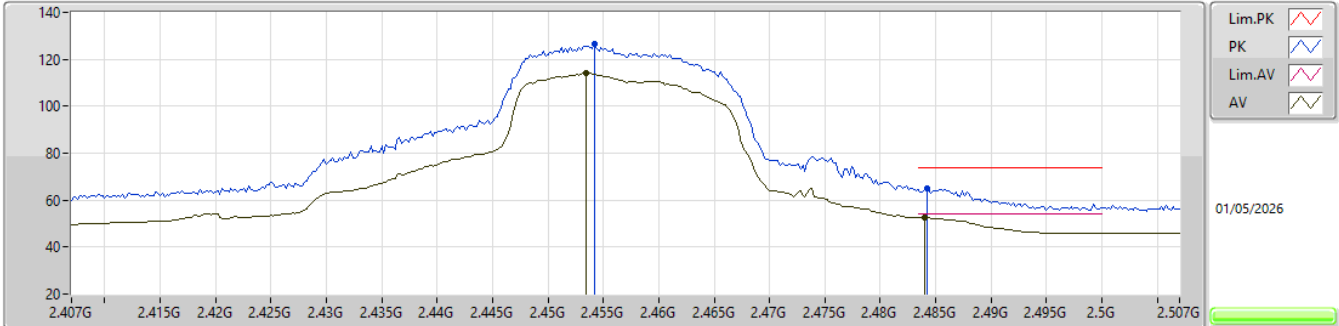


EUT_Y_4TX
Setting 94
02-D-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.4542G	126.48	Inf	-Inf	93.50	3	Vertical	176.2	2.66	-	28.54	4.44	-			
AV	2.4534G	114.03	Inf	-Inf	81.06	3	Vertical	176.2	2.66	-	28.53	4.44	-			
PK	2.4842G	65.21	74.00	-8.79	32.03	3	Vertical	176.2	2.66	-	28.70	4.48	-			
AV	2.484G	52.46	54.00	-1.54	19.28	3	Vertical	176.2	2.66	-	28.70	4.48	-			

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss1,(MCS0)_4TX

2457MHz_TX

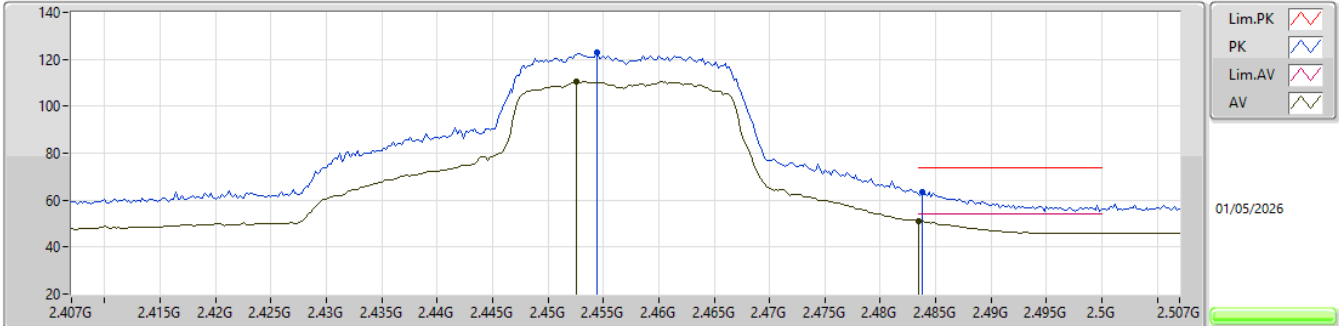


EUT_Y_4TX
Setting 94
02-D-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.4544G	123.13	Inf	-Inf	90.15	3	Horizontal	204	2.12	-	28.54	4.44	-			
AV	2.4526G	110.40	Inf	-Inf	77.43	3	Horizontal	204	2.12	-	28.53	4.44	-			
PK	2.4838G	63.54	74.00	-10.46	30.36	3	Horizontal	204	2.12	-	28.70	4.48	-			
AV	2.4835G	51.24	54.00	-2.76	18.06	3	Horizontal	204	2.12	-	28.70	4.48	-			

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss1,(MCS0)_4TX

2462MHz_TX

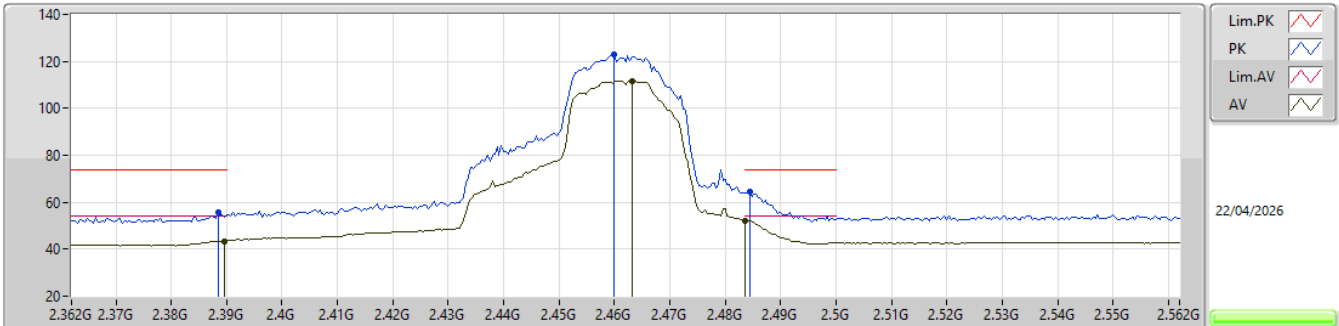


EUT_Y_4TX
Setting 80
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3884G	55.56	74.00	-18.44	54.33	3	Vertical	39	1.74	-	27.58	4.98	31.33			
AV	2.3896G	43.45	54.00	-10.55	42.20	3	Vertical	39	1.74	-	27.60	4.98	31.33			
PK	2.46G	122.90	Inf	-Inf	121.41	3	Vertical	39	1.74	-	27.70	5.09	31.30			
AV	2.4632G	111.54	Inf	-Inf	110.02	3	Vertical	39	1.74	-	27.73	5.09	31.30			
PK	2.4844G	64.34	74.00	-9.66	62.56	3	Vertical	39	1.74	-	27.94	5.13	31.29			
AV	2.4835G	52.09	54.00	-1.91	50.31	3	Vertical	39	1.74	-	27.94	5.13	31.29			

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss1,(MCS0)_4TX

2462MHz_TX

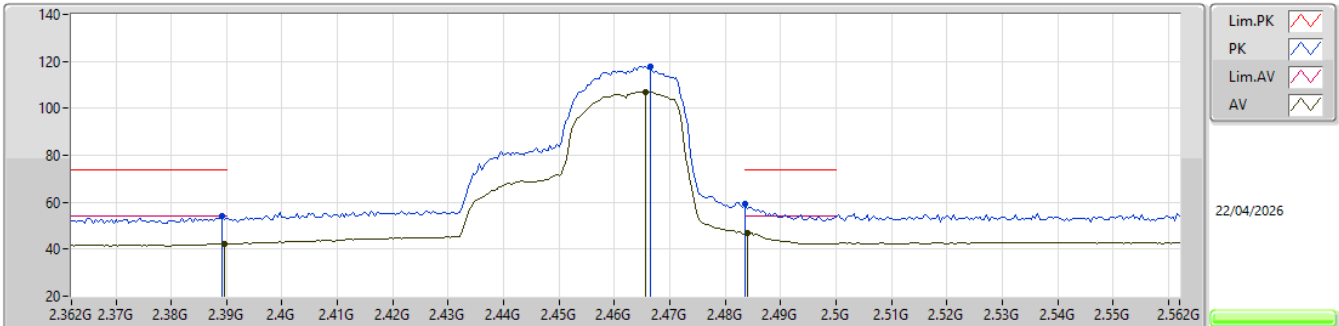


EUT_Y_4TX
Setting 80
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3892G	53.89	74.00	-20.11	52.65	3	Horizontal	217	2.20	-	27.59	4.98	31.33
AV	2.3896G	42.31	54.00	-11.69	41.06	3	Horizontal	217	2.20	-	27.60	4.98	31.33
PK	2.4664G	118.00	Inf	-Inf	116.43	3	Horizontal	217	2.20	-	27.76	5.10	31.29
AV	2.4656G	107.11	Inf	-Inf	105.54	3	Horizontal	217	2.20	-	27.76	5.10	31.29
PK	2.4835G	59.56	74.00	-14.44	57.78	3	Horizontal	217	2.20	-	27.94	5.13	31.29
AV	2.484G	47.07	54.00	-6.93	45.29	3	Horizontal	217	2.20	-	27.94	5.13	31.29

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss1,(MCS0)_4TX

2462MHz_TX

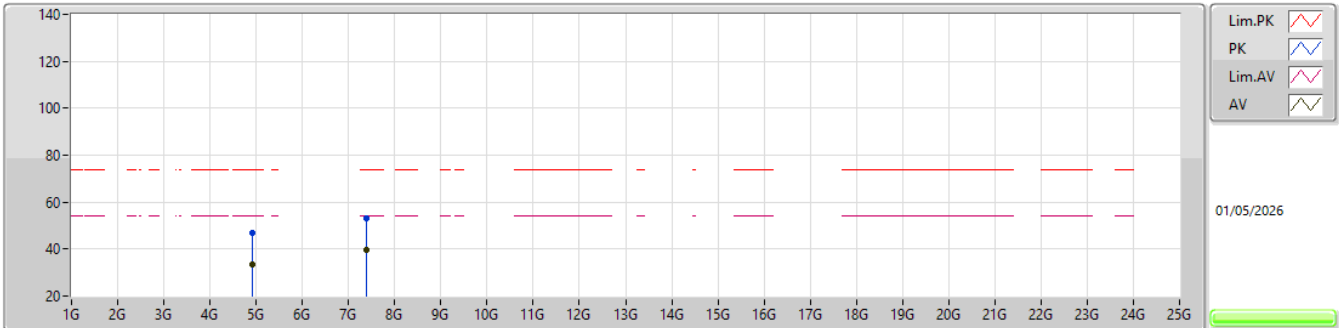


EUT_Y_4TX
Setting 80
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.92664G	46.72	74.00	-27.28	41.21	3	Vertical	30	2.18	-	33.61	6.84	34.94				
AV	4.9292G	33.31	54.00	-20.69	27.79	3	Vertical	30	2.18	-	33.62	6.84	34.94				
PK	7.3796G	53.35	74.00	-20.65	42.58	3	Vertical	283	1.23	-	37.10	8.63	34.96				
AV	7.39496G	39.41	54.00	-14.59	28.62	3	Vertical	283	1.23	-	37.10	8.64	34.95				

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss1,(MCS0)_4TX

2462MHz_TX

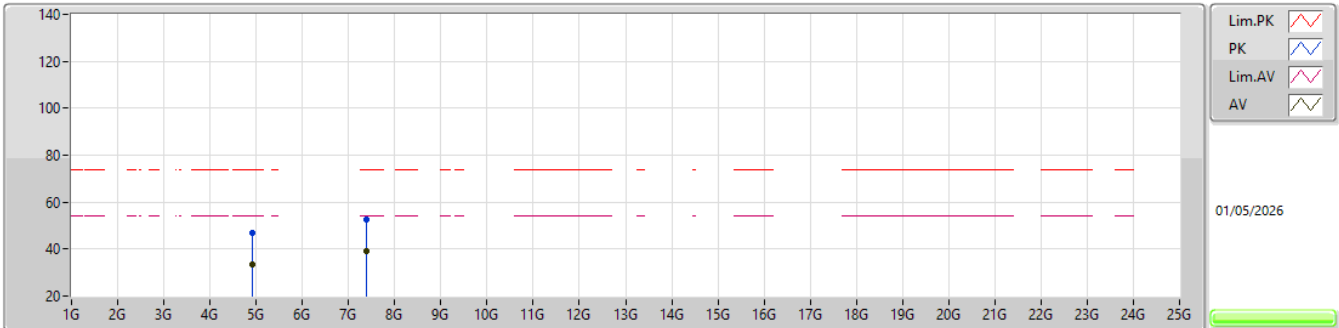


EUT_Y_4TX
Setting 80
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.91904G	46.81	74.00	-27.19	41.33	3	Horizontal	33	2.49	-	33.58	6.84	34.94				
AV	4.92856G	33.30	54.00	-20.70	27.79	3	Horizontal	33	2.49	-	33.61	6.84	34.94				
PK	7.388G	52.62	74.00	-21.38	41.83	3	Horizontal	135	2.21	-	37.10	8.64	34.95				
AV	7.3924G	39.35	54.00	-14.65	28.56	3	Horizontal	135	2.21	-	37.10	8.64	34.95				

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss1,(MCS0)_4TX

2422MHz_TX

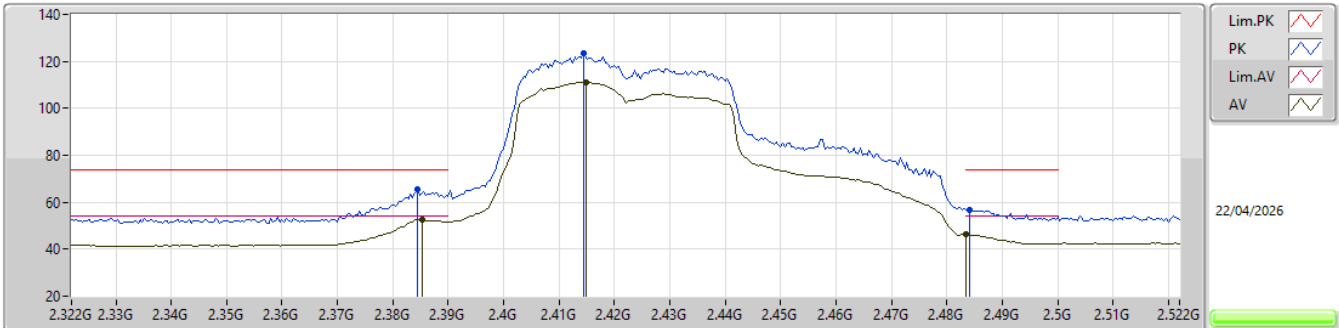


EUT_Y_4TX
Setting 80
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3844G	65.29	74.00	-8.71	64.10	3	Vertical	24	2.45	-	27.54	4.98	31.33			
AV	2.3852G	52.69	54.00	-1.31	51.49	3	Vertical	24	2.45	-	27.55	4.98	31.33			
PK	2.4144G	123.21	Inf	-Inf	121.82	3	Vertical	24	2.45	-	27.70	5.01	31.32			
AV	2.4148G	111.23	Inf	-Inf	109.84	3	Vertical	24	2.45	-	27.70	5.01	31.32			
PK	2.484G	56.94	74.00	-17.06	55.16	3	Vertical	24	2.45	-	27.94	5.13	31.29			
AV	2.4835G	46.14	54.00	-7.86	44.36	3	Vertical	24	2.45	-	27.94	5.13	31.29			

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss1,(MCS0)_4TX

2422MHz_TX

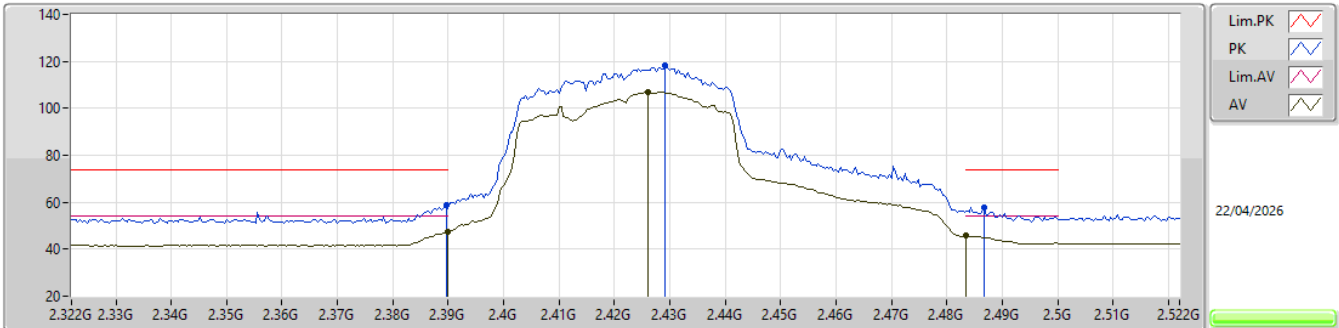


EUT_Y_4TX
Setting 80
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3896G	58.55	74.00	-15.45	57.30	3	Horizontal	140	1.80	-	27.60	4.98	31.33			
AV	2.39G	47.60	54.00	-6.40	46.35	3	Horizontal	140	1.80	-	27.60	4.98	31.33			
PK	2.4292G	118.06	Inf	-Inf	116.63	3	Horizontal	140	1.80	-	27.70	5.04	31.31			
AV	2.426G	106.72	Inf	-Inf	105.30	3	Horizontal	140	1.80	-	27.70	5.03	31.31			
PK	2.4868G	57.92	74.00	-16.08	56.11	3	Horizontal	140	1.80	-	27.97	5.13	31.29			
AV	2.4835G	45.71	54.00	-8.29	43.93	3	Horizontal	140	1.80	-	27.94	5.13	31.29			

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss1,(MCS0)_4TX

2422MHz_TX

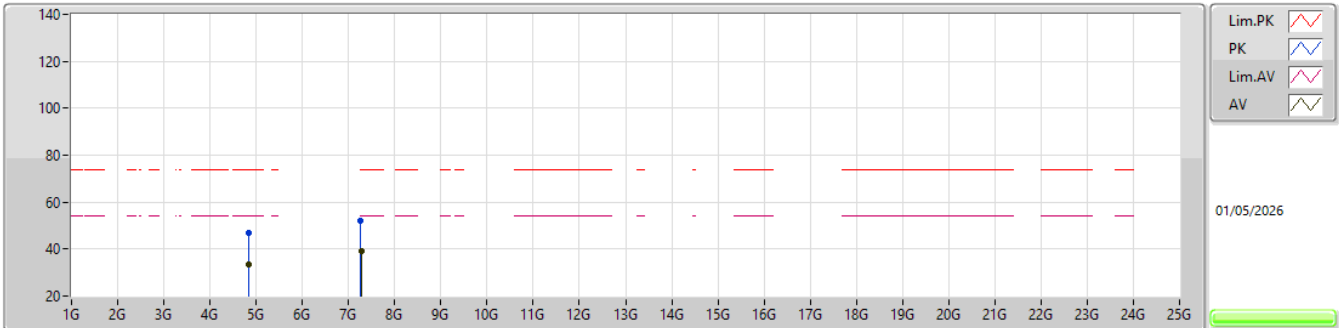


EUT_Y_4TX
Setting 80
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.84084G	47.15	74.00	-26.85	41.86	3	Vertical	219	1.23	-	33.40	6.81	34.92			
AV	4.83524G	33.61	54.00	-20.39	28.32	3	Vertical	219	1.23	-	33.40	6.80	34.91			
PK	7.26768G	52.16	74.00	-21.84	41.94	3	Vertical	2	2.39	-	36.71	8.51	35.00			
AV	7.27168G	39.18	54.00	-14.82	28.93	3	Vertical	2	2.39	-	36.73	8.52	35.00			

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss1,(MCS0)_4TX

2422MHz_TX

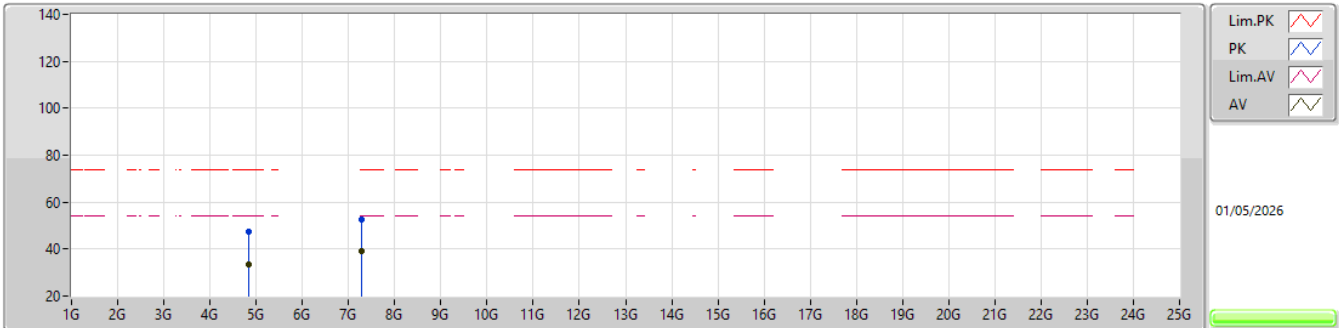


EUT_Y_4TX
Setting 80
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.84832G	47.23	74.00	-26.77	41.94	3	Horizontal	141	2.81	-	33.40	6.81	34.92				
AV	4.84396G	33.47	54.00	-20.53	28.18	3	Horizontal	141	2.81	-	33.40	6.81	34.92				
PK	7.2736G	52.40	74.00	-21.60	42.14	3	Horizontal	135	2.46	-	36.74	8.52	35.00				
AV	7.27112G	39.09	54.00	-14.91	28.85	3	Horizontal	135	2.46	-	36.73	8.51	35.00				

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss1,(MCS0)_4TX

2437MHz_TX

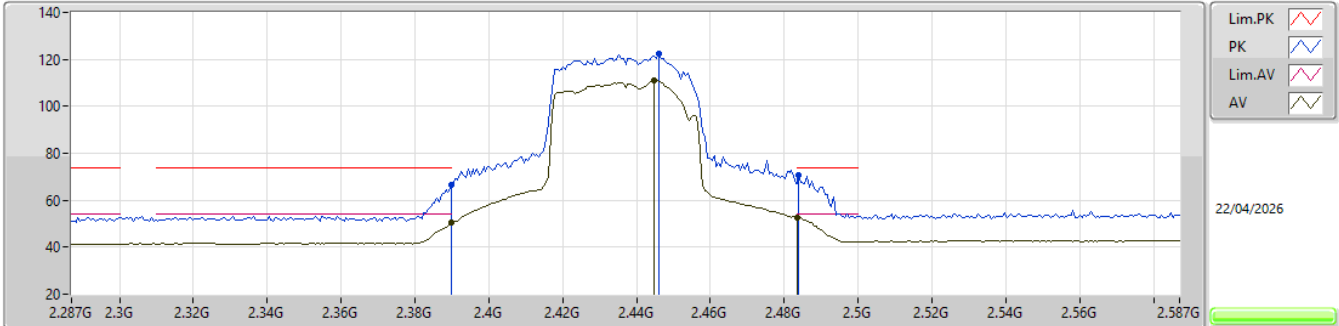


EUT Y_4TX
Setting 80
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.39G	66.37	74.00	-7.63	65.12	3	Vertical	27.5	2.17	-	27.60	4.98	31.33
AV	2.39G	50.31	54.00	-3.69	49.06	3	Vertical	27.5	2.17	-	27.60	4.98	31.33
PK	2.446G	122.38	Inf	-Inf	120.91	3	Vertical	27.5	2.17	-	27.70	5.07	31.30
AV	2.4448G	110.88	Inf	-Inf	109.42	3	Vertical	27.5	2.17	-	27.70	5.06	31.30
PK	2.4838G	70.71	74.00	-3.29	68.93	3	Vertical	27.5	2.17	-	27.94	5.13	31.29
AV	2.4835G	52.57	54.00	-1.43	50.79	3	Vertical	27.5	2.17	-	27.94	5.13	31.29

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss1,(MCS0)_4TX

2437MHz_TX

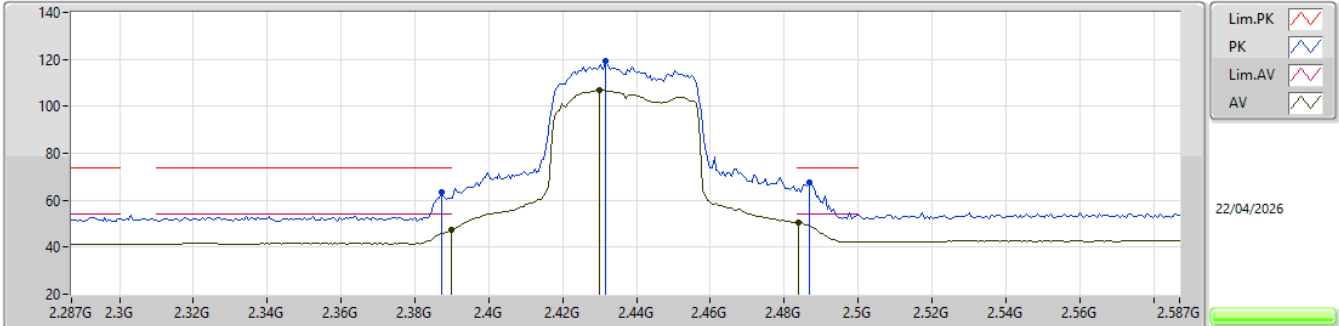


EUT_Y_4TX
Setting 80
02-R-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	2.3872G	63.46	74.00	-10.54	62.24	3	Horizontal	159	1.90	-	27.57	4.98	31.33			
AV	2.39G	47.60	54.00	-6.40	46.35	3	Horizontal	159	1.90	-	27.60	4.98	31.33			
PK	2.4316G	119.21	Inf	-Inf	117.78	3	Horizontal	159	1.90	-	27.70	5.04	31.31			
AV	2.4298G	106.72	Inf	-Inf	105.29	3	Horizontal	159	1.90	-	27.70	5.04	31.31			
PK	2.4868G	67.49	74.00	-6.51	65.68	3	Horizontal	159	1.90	-	27.97	5.13	31.29			
AV	2.4838G	50.55	54.00	-3.45	48.77	3	Horizontal	159	1.90	-	27.94	5.13	31.29			

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss1,(MCS0)_4TX

2437MHz_TX

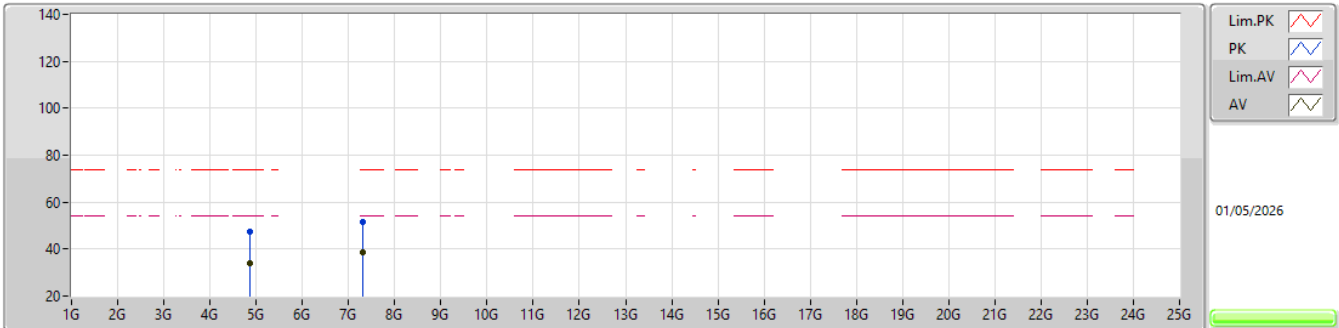


EUT_Y_4TX
Setting 80
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.87388G	47.17	74.00	-26.83	41.82	3	Vertical	293	2.48	-	33.45	6.82	34.92				
AV	4.87128G	33.81	54.00	-20.19	28.47	3	Vertical	293	2.48	-	33.44	6.82	34.92				
PK	7.31024G	51.52	74.00	-22.48	41.01	3	Vertical	291	2.87	-	36.94	8.56	34.99				
AV	7.31996G	38.61	54.00	-15.39	28.04	3	Vertical	291	2.87	-	36.98	8.57	34.98				

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss1,(MCS0)_4TX

2437MHz_TX

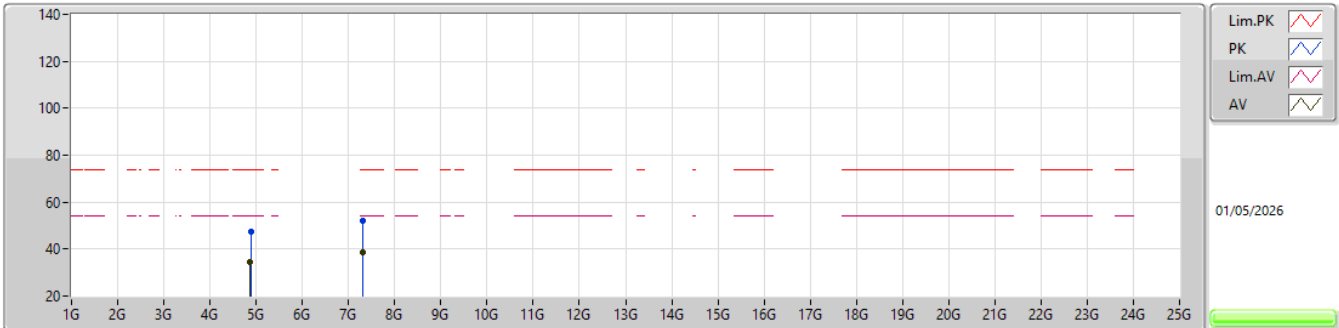


EUT_Y_4TX
Setting 80
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.87972G	47.24	74.00	-26.76	41.89	3	Horizontal	65	1.30	-	33.46	6.82	34.93				
AV	4.87096G	34.46	54.00	-19.54	29.12	3	Horizontal	65	1.30	-	33.44	6.82	34.92				
PK	7.3078G	52.08	74.00	-21.92	41.59	3	Horizontal	112	2.89	-	36.93	8.55	34.99				
AV	7.3208G	38.73	54.00	-15.27	28.16	3	Horizontal	112	2.89	-	36.98	8.57	34.98				

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss1,(MCS0)_4TX

2452MHz_TX

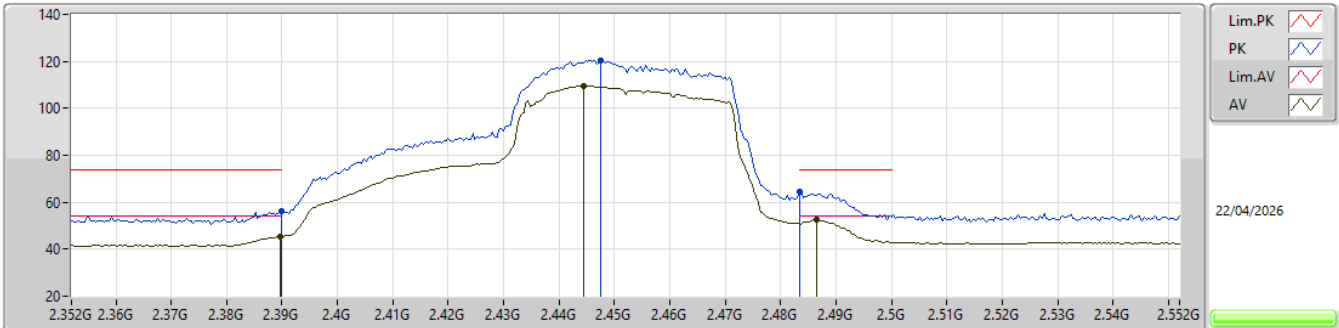


EUT_Y_4TX
Setting 70
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.39G	56.13	74.00	-17.87	54.88	3	Vertical	164	2.03	-	27.60	4.98	31.33
AV	2.3896G	45.35	54.00	-8.65	44.10	3	Vertical	164	2.03	-	27.60	4.98	31.33
PK	2.4476G	120.58	Inf	-Inf	119.11	3	Vertical	164	2.03	-	27.70	5.07	31.30
AV	2.4444G	109.59	Inf	-Inf	108.13	3	Vertical	164	2.03	-	27.70	5.06	31.30
PK	2.4835G	64.66	74.00	-9.34	62.88	3	Vertical	164	2.03	-	27.94	5.13	31.29
AV	2.4864G	52.45	54.00	-1.55	50.65	3	Vertical	164	2.03	-	27.96	5.13	31.29

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss1,(MCS0)_4TX

2452MHz_TX

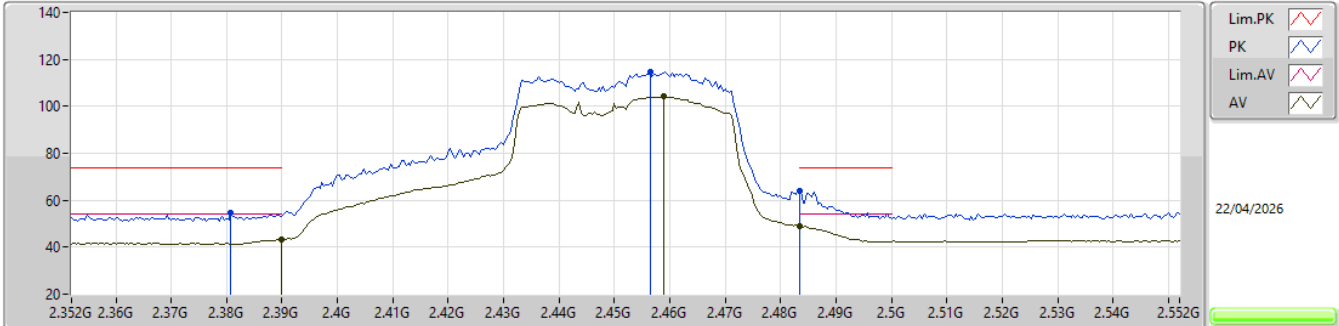


EUT_Y_4TX
Setting 70
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3808G	54.44	74.00	-19.56	53.29	3	Horizontal	158	1.89	-	27.51	4.97	31.33
AV	2.39G	43.27	54.00	-10.73	42.02	3	Horizontal	158	1.89	-	27.60	4.98	31.33
PK	2.4564G	114.55	Inf	-Inf	113.07	3	Horizontal	158	1.89	-	27.70	5.08	31.30
AV	2.4588G	104.16	Inf	-Inf	102.67	3	Horizontal	158	1.89	-	27.70	5.09	31.30
PK	2.4835G	63.71	74.00	-10.29	61.93	3	Horizontal	158	1.89	-	27.94	5.13	31.29
AV	2.4835G	48.78	54.00	-5.22	47.00	3	Horizontal	158	1.89	-	27.94	5.13	31.29

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss1,(MCS0)_4TX

2452MHz_TX

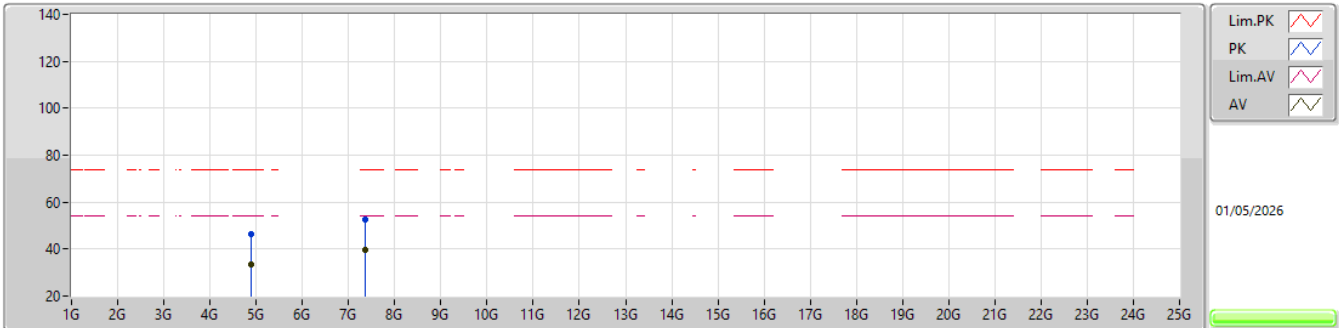


EUT_Y_4TX
Setting 70
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.89796G	46.52	74.00	-27.48	41.12	3	Vertical	143	2.63	-	33.50	6.83	34.93			
AV	4.89928G	33.40	54.00	-20.60	28.00	3	Vertical	143	2.63	-	33.50	6.83	34.93			
PK	7.35732G	52.63	74.00	-21.37	41.89	3	Vertical	24	2.12	-	37.10	8.61	34.97			
AV	7.35212G	39.87	54.00	-14.13	29.14	3	Vertical	24	2.12	-	37.10	8.60	34.97			

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss1,(MCS0)_4TX

2452MHz_TX

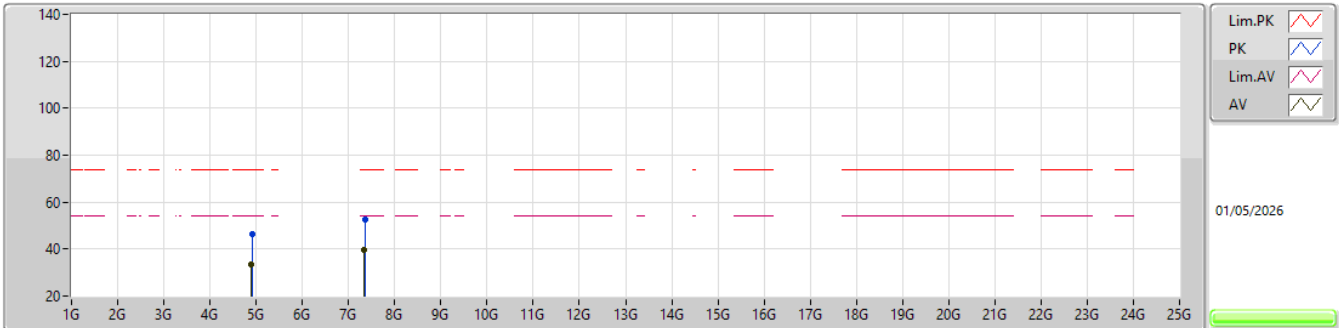


EUT_Y_4TX
Setting 70
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.91284G	46.38	74.00	-27.62	40.93	3	Horizontal	239	1.97	-	33.55	6.84	34.94			
AV	4.89944G	33.27	54.00	-20.73	27.87	3	Horizontal	239	1.97	-	33.50	6.83	34.93			
PK	7.35016G	52.83	74.00	-21.17	42.10	3	Horizontal	106	2.97	-	37.10	8.60	34.97			
AV	7.34664G	39.73	54.00	-14.27	29.02	3	Horizontal	106	2.97	-	37.09	8.59	34.97			

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss2,(MCS0)_4TX

2412MHz_TX

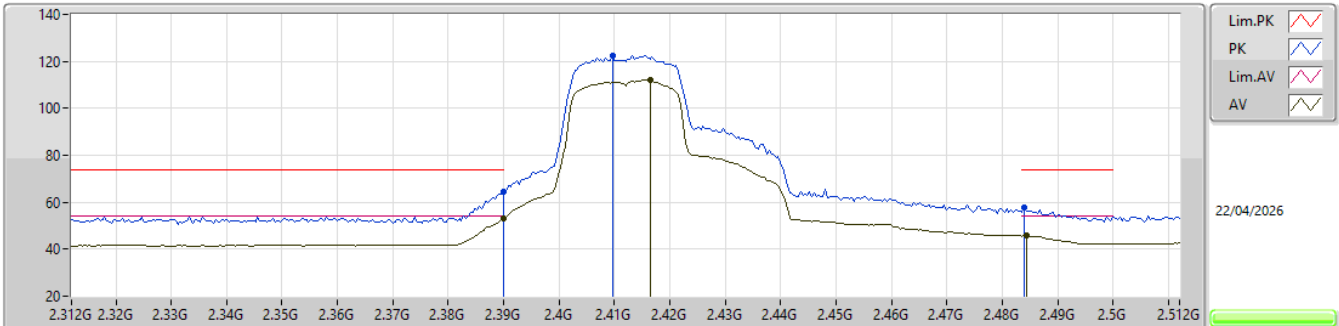


EUT_Y_4TX
Setting 89
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.39G	64.40	74.00	-9.60	63.15	3	Vertical	216	2.50	-	27.60	4.98	31.33
AV	2.39G	52.93	54.00	-1.07	51.68	3	Vertical	216	2.50	-	27.60	4.98	31.33
PK	2.4096G	122.66	Inf	-Inf	121.27	3	Vertical	216	2.50	-	27.70	5.01	31.32
AV	2.4164G	111.97	Inf	-Inf	110.57	3	Vertical	216	2.50	-	27.70	5.02	31.32
PK	2.484G	57.75	74.00	-16.25	55.97	3	Vertical	216	2.50	-	27.94	5.13	31.29
AV	2.4844G	45.85	54.00	-8.15	44.07	3	Vertical	216	2.50	-	27.94	5.13	31.29

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss2,(MCS0)_4TX

2412MHz_TX

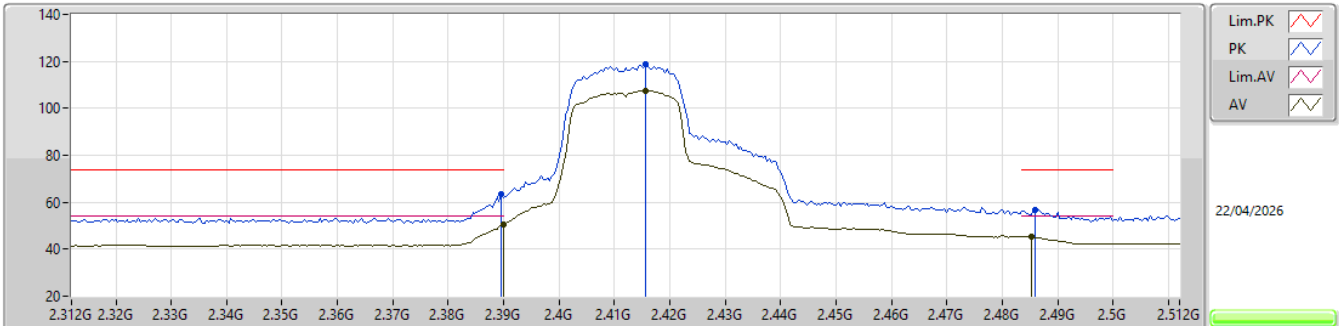


EUT_Y_4TX
Setting 89
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3896G	63.25	74.00	-10.75	62.00	3	Horizontal	155	1.70	-	27.60	4.98	31.33
AV	2.39G	50.31	54.00	-3.69	49.06	3	Horizontal	155	1.70	-	27.60	4.98	31.33
PK	2.4156G	118.92	Inf	-Inf	117.52	3	Horizontal	155	1.70	-	27.70	5.02	31.32
AV	2.4156G	107.55	Inf	-Inf	106.15	3	Horizontal	155	1.70	-	27.70	5.02	31.32
PK	2.486G	56.51	74.00	-17.49	54.71	3	Horizontal	155	1.70	-	27.96	5.13	31.29
AV	2.4852G	45.11	54.00	-8.89	43.32	3	Horizontal	155	1.70	-	27.95	5.13	31.29

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss2,(MCS0)_4TX

2412MHz_TX

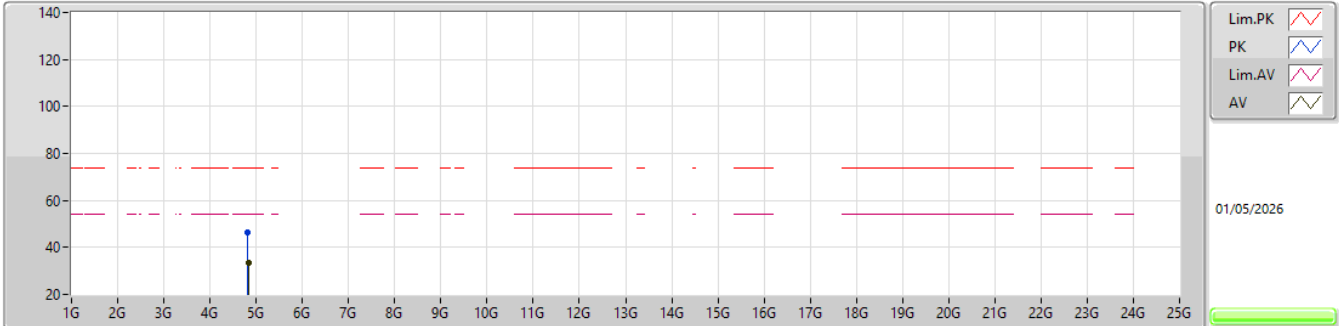


EUT_Y_4TX
Setting 89
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.81608G	46.50	74.00	-27.50	41.21	3	Vertical	254	1.02	-	33.40	6.80	34.91			
AV	4.82592G	33.40	54.00	-20.60	28.11	3	Vertical	254	1.02	-	33.40	6.80	34.91			

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss2,(MCS0)_4TX

2412MHz_TX

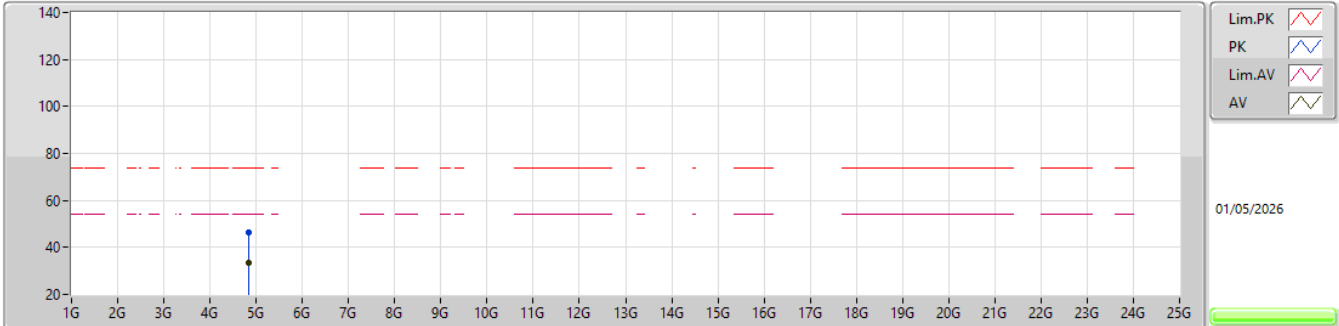


EUT_Y_4TX
Setting 89
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.82752G	46.42	74.00	-27.58	41.13	3	Horizontal	28	2.65	-	33.40	6.80	34.91			
AV	4.8334G	33.40	54.00	-20.60	28.11	3	Horizontal	28	2.65	-	33.40	6.80	34.91			

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss2,(MCS0)_4TX

2437MHz_TX

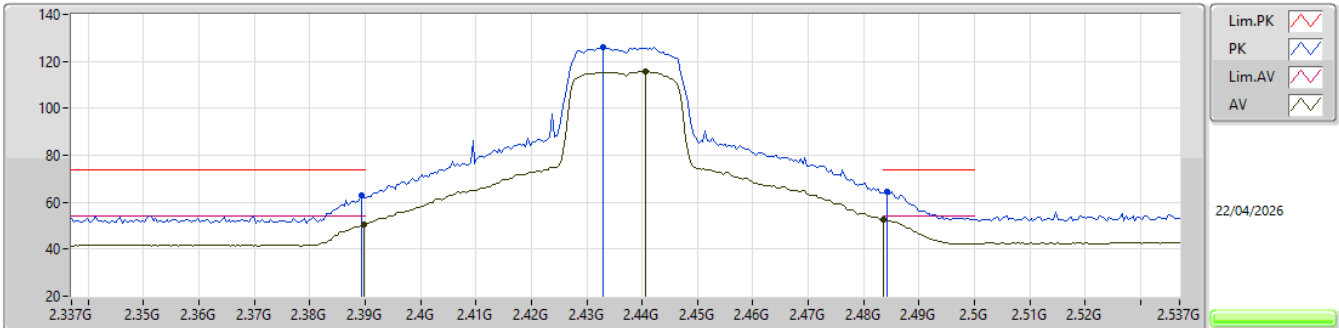


EUT_Y_4TX
Setting 102
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3894G	62.91	74.00	-11.09	61.67	3	Vertical	165	2.24	-	27.59	4.98	31.33
AV	2.3898G	50.31	54.00	-3.69	49.06	3	Vertical	165	2.24	-	27.60	4.98	31.33
PK	2.433G	125.94	Inf	-Inf	124.51	3	Vertical	165	2.24	-	27.70	5.04	31.31
AV	2.4406G	115.70	Inf	-Inf	114.24	3	Vertical	165	2.24	-	27.70	5.06	31.30
PK	2.4842G	64.52	74.00	-9.48	62.74	3	Vertical	165	2.24	-	27.94	5.13	31.29
AV	2.4835G	52.83	54.00	-1.17	51.05	3	Vertical	165	2.24	-	27.94	5.13	31.29

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss2,(MCS0)_4TX

2437MHz_TX

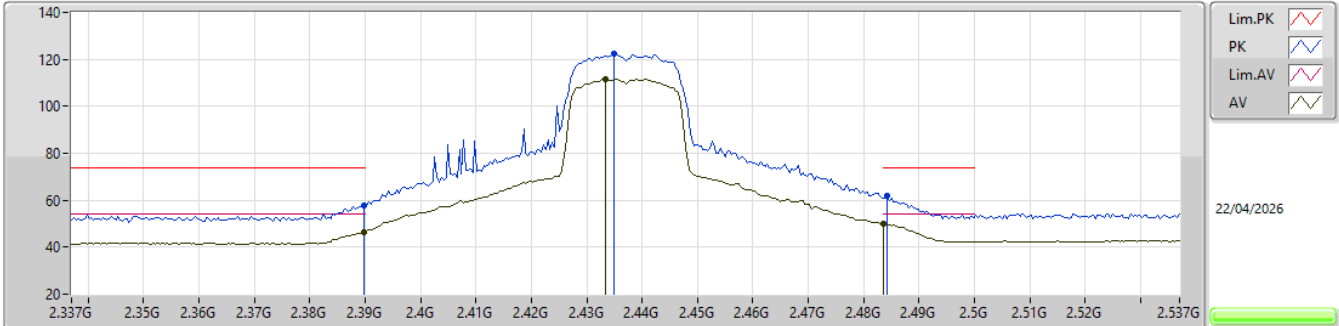


EUT_Y_4TX
Setting 102
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3898G	57.84	74.00	-16.16	56.59	3	Horizontal	158	1.76	-	27.60	4.98	31.33			
AV	2.3898G	46.55	54.00	-7.45	45.30	3	Horizontal	158	1.76	-	27.60	4.98	31.33			
PK	2.435G	122.36	Inf	-Inf	120.92	3	Horizontal	158	1.76	-	27.70	5.05	31.31			
AV	2.4334G	111.58	Inf	-Inf	110.14	3	Horizontal	158	1.76	-	27.70	5.05	31.31			
PK	2.4842G	61.87	74.00	-12.13	60.09	3	Horizontal	158	1.76	-	27.94	5.13	31.29			
AV	2.4835G	50.03	54.00	-3.97	48.25	3	Horizontal	158	1.76	-	27.94	5.13	31.29			

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss2,(MCS0)_4TX

2437MHz_TX

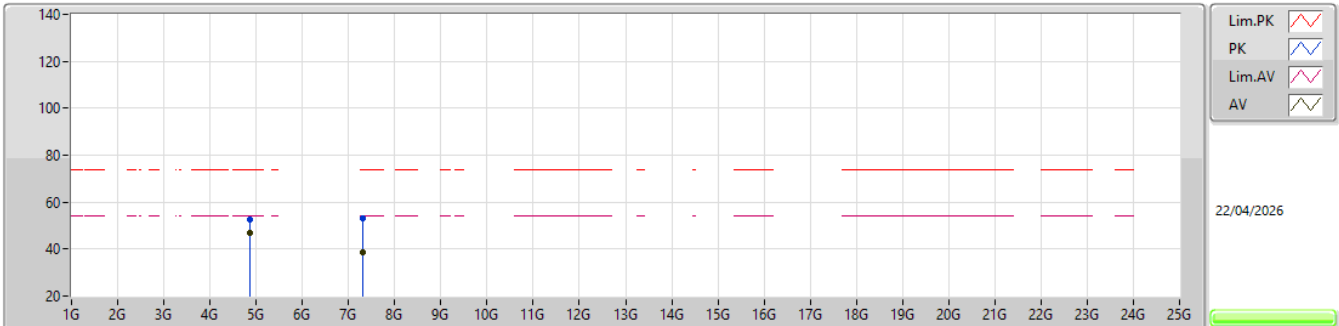


EUT_Y_4TX
Setting 102
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.87412G	52.62	74.00	-21.38	47.27	3	Vertical	57	1.68	-	33.45	6.82	34.92				
AV	4.87408G	47.14	54.00	-6.86	41.79	3	Vertical	57	1.68	-	33.45	6.82	34.92				
PK	7.30412G	53.02	74.00	-20.98	42.54	3	Vertical	192	1.80	-	36.92	8.55	34.99				
AV	7.32048G	38.59	54.00	-15.41	28.02	3	Vertical	192	1.80	-	36.98	8.57	34.98				

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss2,(MCS0)_4TX

2437MHz_TX

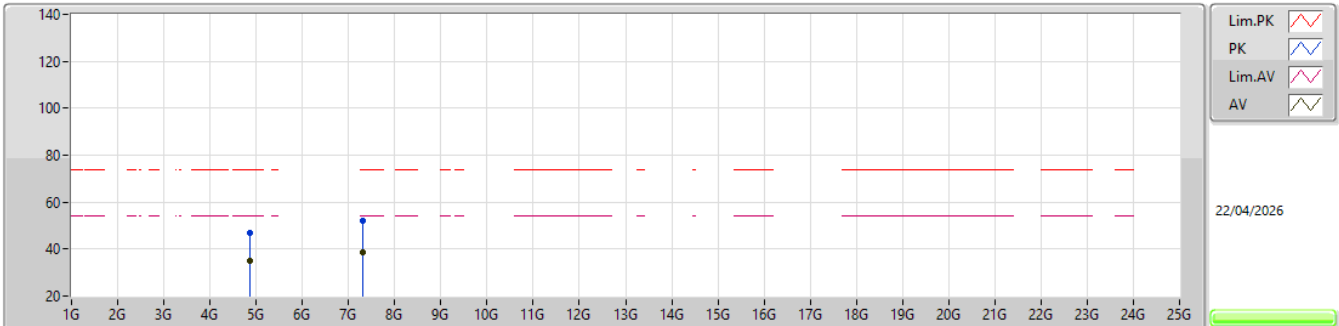


EUT_Y_4TX
Setting 102
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.87436G	47.06	74.00	-26.94	41.71	3	Horizontal	64	2.19	-	33.45	6.82	34.92				
AV	4.87452G	35.05	54.00	-18.95	29.70	3	Horizontal	64	2.19	-	33.45	6.82	34.92				
PK	7.31032G	51.88	74.00	-22.12	41.37	3	Horizontal	27	2.32	-	36.94	8.56	34.99				
AV	7.3202G	38.66	54.00	-15.34	28.09	3	Horizontal	27	2.32	-	36.98	8.57	34.98				

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss2,(MCS0)_4TX

2457MHz_TX

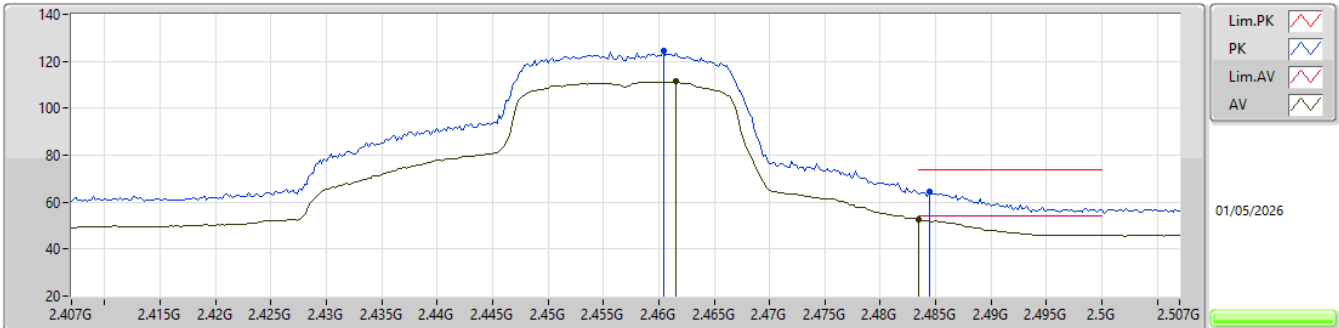


EUT_Y_4TX
Setting 89
02-D-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.4604G	124.30	Inf	-Inf	91.25	3	Vertical	196	2.41	-	28.60	4.45	-			
AV	2.4616G	111.31	Inf	-Inf	78.24	3	Vertical	196	2.41	-	28.62	4.45	-			
PK	2.4844G	64.26	74.00	-9.74	31.08	3	Vertical	196	2.41	-	28.70	4.48	-			
AV	2.4835G	52.55	54.00	-1.45	19.37	3	Vertical	196	2.41	-	28.70	4.48	-			

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss2,(MCS0)_4TX

2457MHz_TX

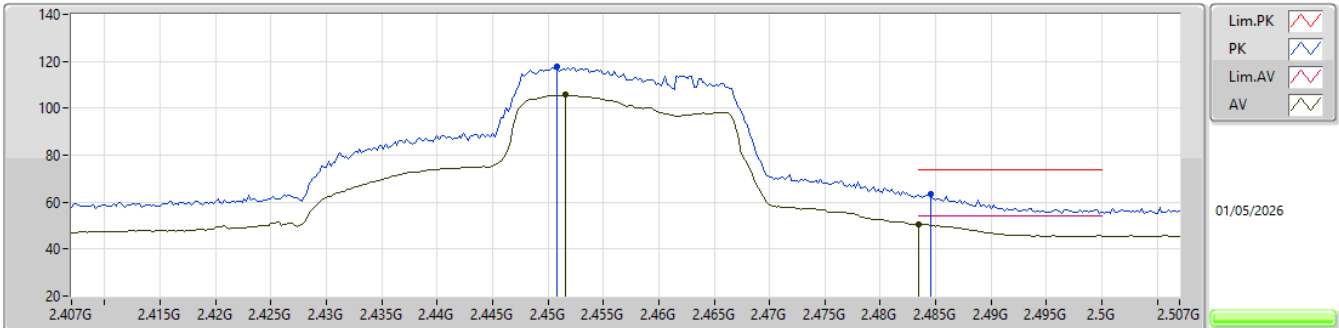


EUT_Y_4TX
Setting 89
02-D-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.4508G	117.51	Inf	-Inf	84.56	3	Horizontal	58.7	1.80	-	28.51	4.44	-			
AV	2.4516G	105.83	Inf	-Inf	72.87	3	Horizontal	58.7	1.80	-	28.52	4.44	-			
PK	2.4846G	63.19	74.00	-10.81	30.01	3	Horizontal	58.7	1.80	-	28.70	4.48	-			
AV	2.4835G	50.40	54.00	-3.60	17.22	3	Horizontal	58.7	1.80	-	28.70	4.48	-			

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss2,(MCS0)_4TX

2462MHz_TX

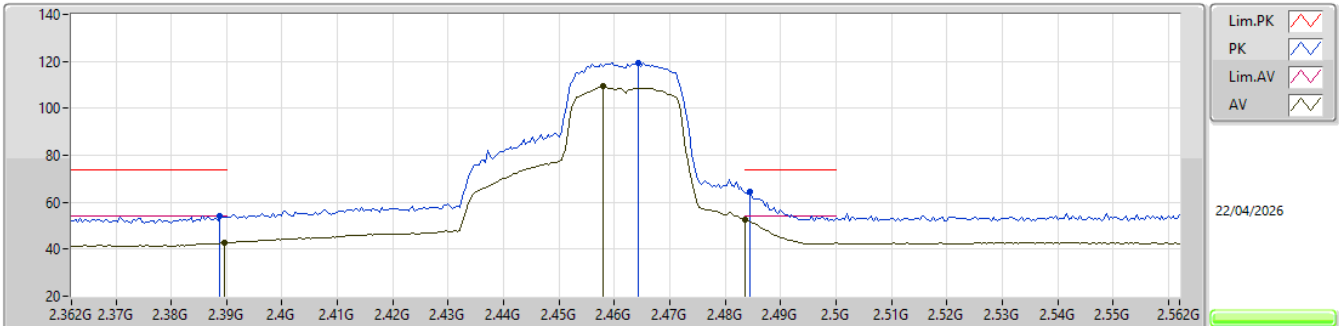


EUT_Y_4TX
Setting 80
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3888G	54.10	74.00	-19.90	52.86	3	Vertical	325	2.15	-	27.59	4.98	31.33
AV	2.3896G	42.71	54.00	-11.29	41.46	3	Vertical	325	2.15	-	27.60	4.98	31.33
PK	2.4644G	119.14	Inf	-Inf	117.59	3	Vertical	325	2.15	-	27.74	5.10	31.29
AV	2.458G	109.57	Inf	-Inf	108.08	3	Vertical	325	2.15	-	27.70	5.09	31.30
PK	2.4844G	64.35	74.00	-9.65	62.57	3	Vertical	325	2.15	-	27.94	5.13	31.29
AV	2.4835G	52.70	54.00	-1.30	50.92	3	Vertical	325	2.15	-	27.94	5.13	31.29

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss2,(MCS0)_4TX

2462MHz_TX

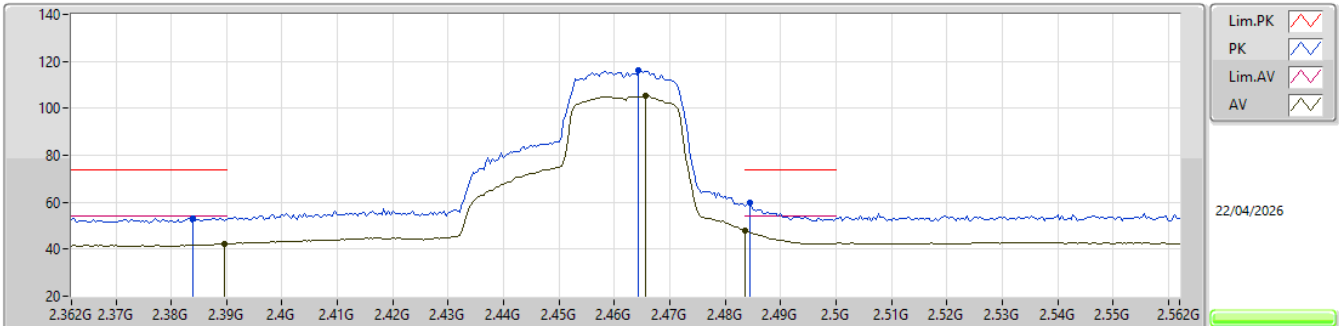


EUT_Y_4TX
Setting 80
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.384G	53.34	74.00	-20.66	52.15	3	Horizontal	160	2.13	-	27.54	4.98	31.33			
AV	2.3896G	42.31	54.00	-11.69	41.06	3	Horizontal	160	2.13	-	27.60	4.98	31.33			
PK	2.4644G	115.95	Inf	-Inf	114.40	3	Horizontal	160	2.13	-	27.74	5.10	31.29			
AV	2.4656G	105.26	Inf	-Inf	103.69	3	Horizontal	160	2.13	-	27.76	5.10	31.29			
PK	2.4844G	59.65	74.00	-14.35	57.87	3	Horizontal	160	2.13	-	27.94	5.13	31.29			
AV	2.4835G	47.68	54.00	-6.32	45.90	3	Horizontal	160	2.13	-	27.94	5.13	31.29			

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss2,(MCS0)_4TX

2462MHz_TX

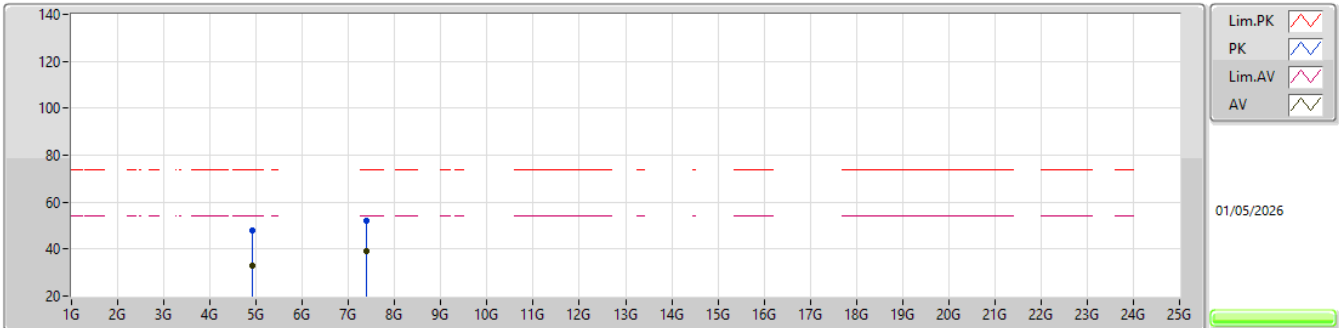


EUT_Y_4TX
Setting 80
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.92888G	47.75	74.00	-26.25	42.23	3	Vertical	328	2.84	-	33.62	6.84	34.94				
AV	4.92828G	33.14	54.00	-20.86	27.63	3	Vertical	328	2.84	-	33.61	6.84	34.94				
PK	7.37968G	52.02	74.00	-21.98	41.25	3	Vertical	79	2.22	-	37.10	8.63	34.96				
AV	7.3912G	39.25	54.00	-14.75	28.46	3	Vertical	79	2.22	-	37.10	8.64	34.95				

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss2,(MCS0)_4TX

2462MHz_TX

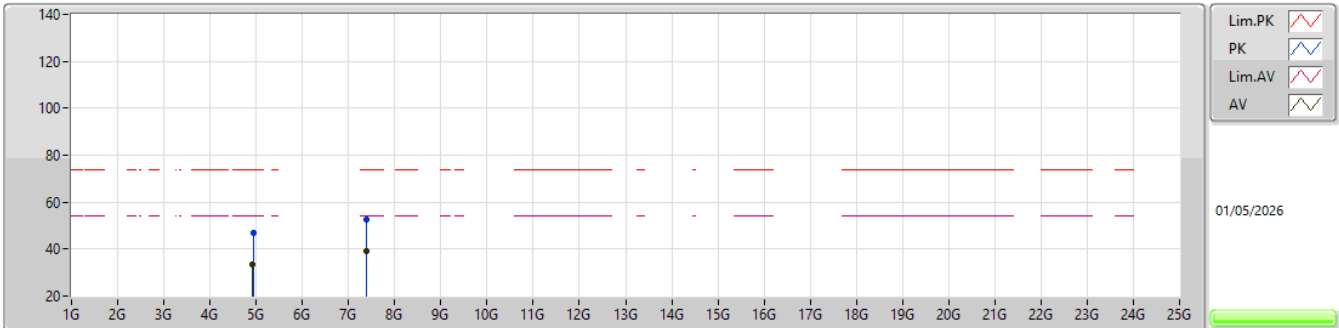


EUT_Y_4TX
Setting 80
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.93168G	46.75	74.00	-27.25	41.22	3	Horizontal	349	2.44	-	33.63	6.84	34.94				
AV	4.9284G	33.23	54.00	-20.77	27.72	3	Horizontal	349	2.44	-	33.61	6.84	34.94				
PK	7.38824G	52.75	74.00	-21.25	41.96	3	Horizontal	271	2.36	-	37.10	8.64	34.95				
AV	7.39352G	39.28	54.00	-14.72	28.49	3	Horizontal	271	2.36	-	37.10	8.64	34.95				

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss2,(MCS0)_4TX

2422MHz_TX

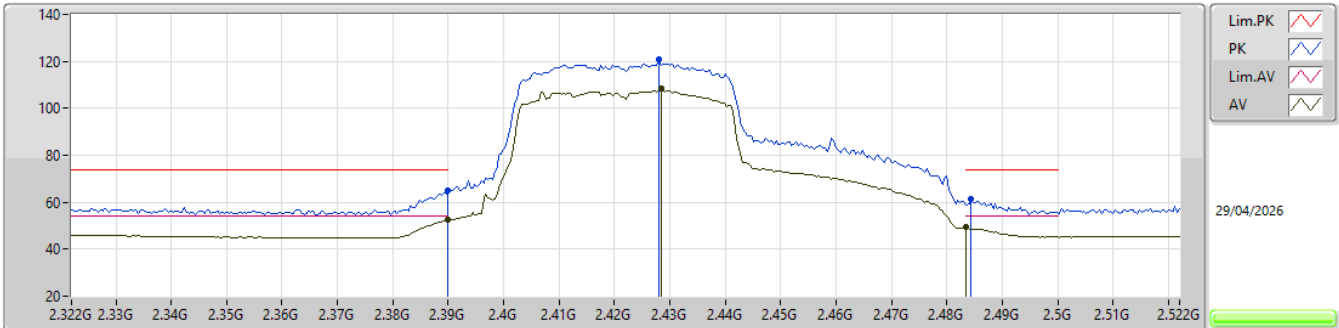


EUT_Y_4TX
Setting 80
04-C-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.39G	64.81	74.00	-9.19	31.48	3	Vertical	174.5	1.60	-	27.60	5.73	-			
AV	2.39G	52.83	54.00	-1.17	19.50	3	Vertical	174.5	1.60	-	27.60	5.73	-			
PK	2.428G	120.65	Inf	-Inf	87.29	3	Vertical	174.5	1.60	-	27.58	5.78	-			
AV	2.4284G	108.28	Inf	-Inf	74.92	3	Vertical	174.5	1.60	-	27.58	5.78	-			
PK	2.4844G	61.51	74.00	-12.49	28.06	3	Vertical	174.5	1.60	-	27.60	5.85	-			
AV	2.4835G	49.42	54.00	-4.58	15.98	3	Vertical	174.5	1.60	-	27.60	5.84	-			

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss2,(MCS0)_4TX

2422MHz_TX

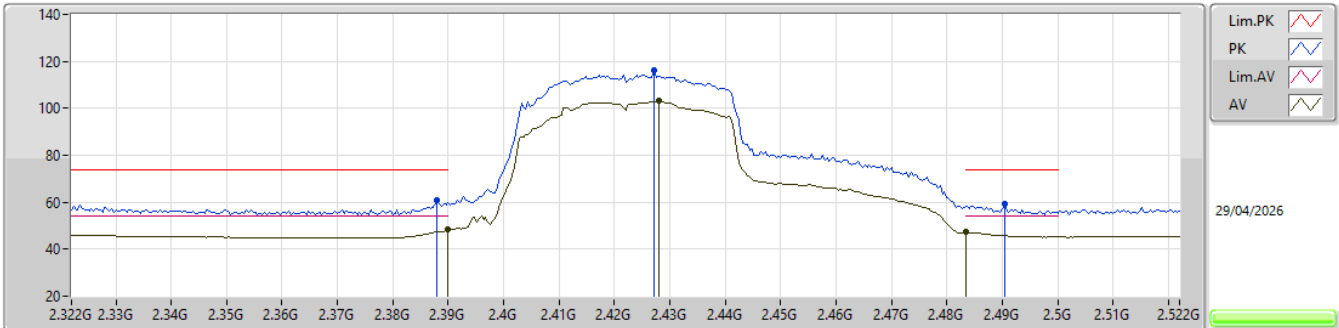


EUT_Y_4TX
Setting 80
04-C-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
AV	2.39G	48.55	54.00	-5.45	15.22	3	Horizontal	202	1.80	-	27.60	5.73	-			
PK	2.388G	60.66	74.00	-13.34	27.35	3	Horizontal	202	1.80	-	27.58	5.73	-			
AV	2.428G	103.28	Inf	-Inf	69.92	3	Horizontal	202	1.80	-	27.58	5.78	-			
PK	2.4272G	116.07	Inf	-Inf	82.73	3	Horizontal	202	1.80	-	27.57	5.77	-			
AV	2.4835G	47.51	54.00	-6.49	14.07	3	Horizontal	202	1.80	-	27.60	5.84	-			
PK	2.4904G	59.11	74.00	-14.89	25.66	3	Horizontal	202	1.80	-	27.60	5.85	-			

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss2,(MCS0)_4TX

2422MHz_TX

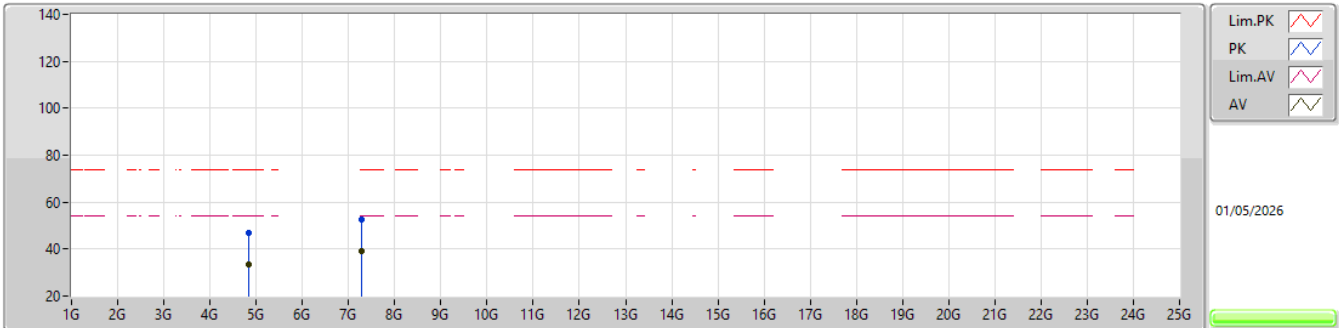


EUT_Y_4TX
Setting 80
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.84608G	46.74	74.00	-27.26	41.45	3	Vertical	131	1.50	-	33.40	6.81	34.92				
AV	4.83552G	33.36	54.00	-20.64	28.07	3	Vertical	131	1.50	-	33.40	6.80	34.91				
PK	7.27508G	52.72	74.00	-21.28	42.45	3	Vertical	184	2.45	-	36.75	8.52	35.00				
AV	7.27324G	39.14	54.00	-14.86	28.88	3	Vertical	184	2.45	-	36.74	8.52	35.00				

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss2,(MCS0)_4TX

2422MHz_TX

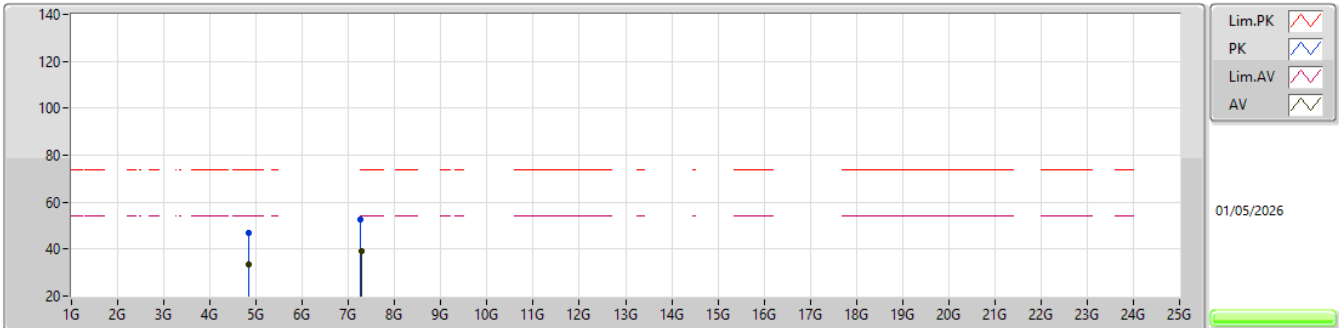


EUT_Y_4TX
Setting 80
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.84136G	47.14	74.00	-26.86	41.85	3	Horizontal	150	2.62	-	33.40	6.81	34.92				
AV	4.83532G	33.45	54.00	-20.55	28.16	3	Horizontal	150	2.62	-	33.40	6.80	34.91				
PK	7.2646G	52.40	74.00	-21.60	42.20	3	Horizontal	208	1.04	-	36.69	8.51	35.00				
AV	7.27268G	39.05	54.00	-14.95	28.79	3	Horizontal	208	1.04	-	36.74	8.52	35.00				

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss2,(MCS0)_4TX

2437MHz_TX

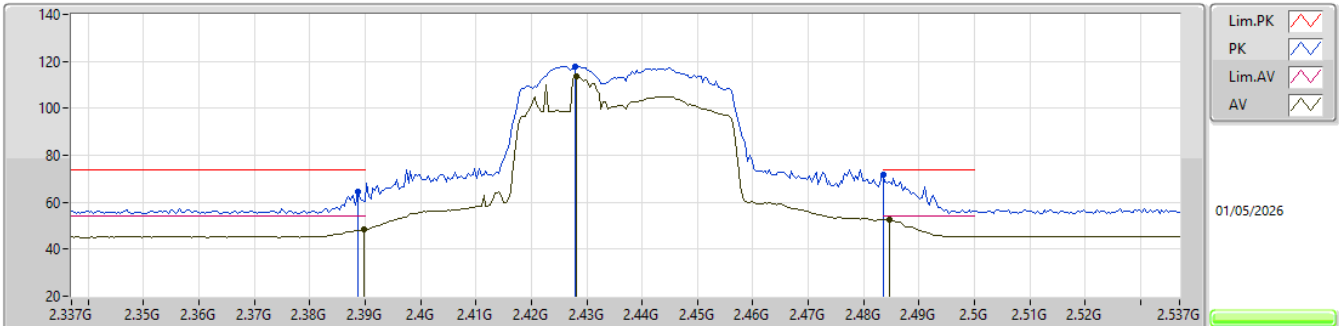


EUT_Y_4TX
Setting 81
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.3886G	64.24	74.00	-9.76	31.63	3	Vertical	98	1.48	-	28.40	4.21	-				
AV	2.3898G	48.26	54.00	-5.74	15.65	3	Vertical	98	1.48	-	28.40	4.21	-				
PK	2.4278G	117.95	Inf	-Inf	85.31	3	Vertical	98	1.48	-	28.40	4.24	-				
AV	2.4282G	113.80	Inf	-Inf	81.16	3	Vertical	98	1.48	-	28.40	4.24	-				
PK	2.4835G	71.82	74.00	-2.18	39.00	3	Vertical	98	1.48	-	28.54	4.28	-				
AV	2.4846G	52.77	54.00	-1.23	19.94	3	Vertical	98	1.48	-	28.55	4.28	-				

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss2,(MCS0)_4TX

2437MHz_TX

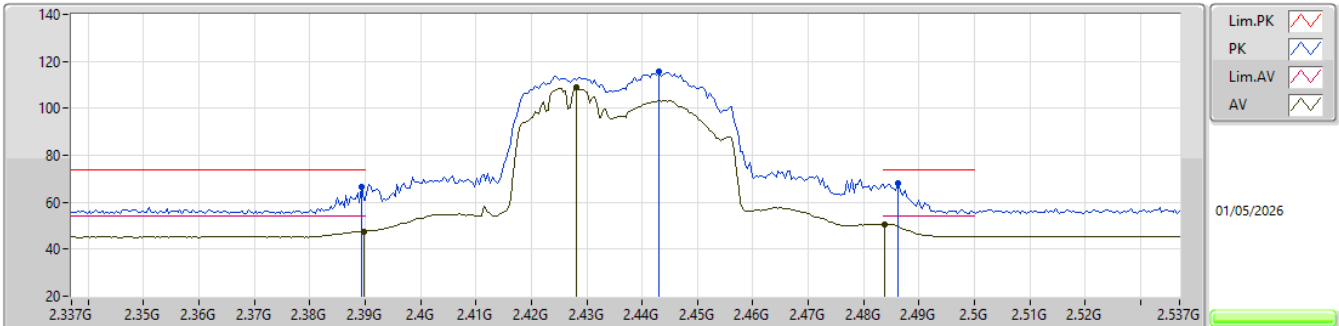


EUT_Y_4TX
Setting 81
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.3894G	66.41	74.00	-7.59	33.80	3	Horizontal	236	2.26	-	28.40	4.21	-				
AV	2.3898G	47.62	54.00	-6.38	15.01	3	Horizontal	236	2.26	-	28.40	4.21	-				
PK	2.443G	115.90	Inf	-Inf	83.25	3	Horizontal	236	2.26	-	28.40	4.25	-				
AV	2.4282G	108.97	Inf	-Inf	76.33	3	Horizontal	236	2.26	-	28.40	4.24	-				
PK	2.4862G	68.02	74.00	-5.98	35.18	3	Horizontal	236	2.26	-	28.56	4.28	-				
AV	2.4838G	50.69	54.00	-3.31	17.87	3	Horizontal	236	2.26	-	28.54	4.28	-				

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss2,(MCS0)_4TX

2437MHz_TX

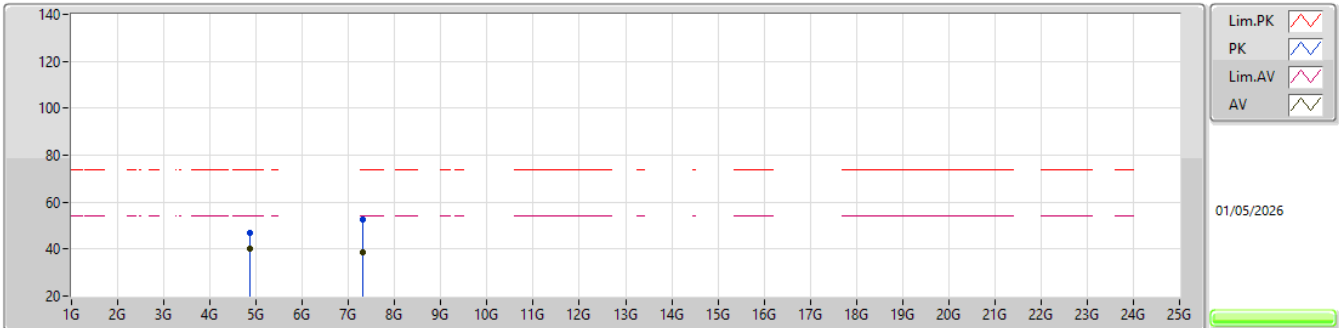


EUT_Y_4TX
Setting 81
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.87672G	47.03	74.00	-26.97	41.69	3	Vertical	71	1.64	-	33.45	6.82	34.93				
AV	4.874G	40.06	54.00	-13.94	34.71	3	Vertical	71	1.64	-	33.45	6.82	34.92				
PK	7.305G	52.75	74.00	-21.25	42.27	3	Vertical	357	1.26	-	36.92	8.55	34.99				
AV	7.32092G	38.64	54.00	-15.36	28.07	3	Vertical	357	1.26	-	36.98	8.57	34.98				

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss2,(MCS0)_4TX

2437MHz_TX

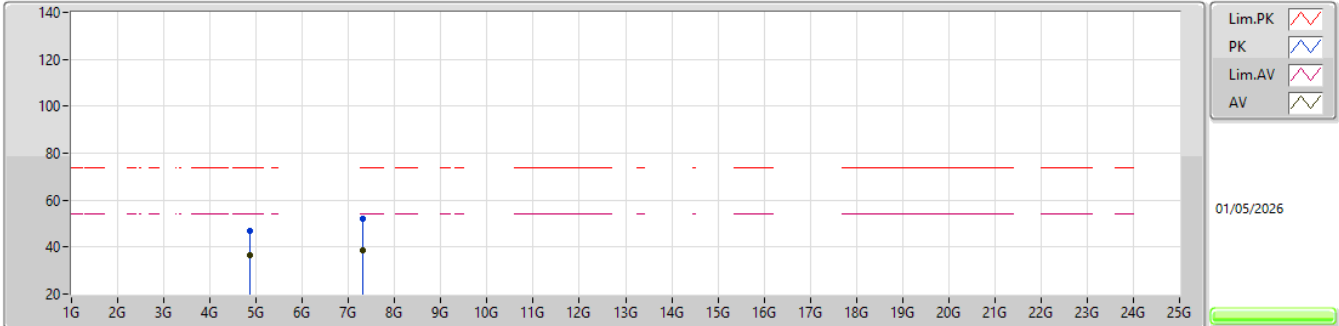


EUT_Y_4TX
Setting 81
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.86864G	46.67	74.00	-27.33	41.33	3	Horizontal	127	1.99	-	33.44	6.82	34.92				
AV	4.87432G	36.60	54.00	-17.40	31.25	3	Horizontal	127	1.99	-	33.45	6.82	34.92				
PK	7.30604G	52.04	74.00	-21.96	41.56	3	Horizontal	116	1.96	-	36.92	8.55	34.99				
AV	7.32064G	38.60	54.00	-15.40	28.03	3	Horizontal	116	1.96	-	36.98	8.57	34.98				

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss2,(MCS0)_4TX

2452MHz_TX

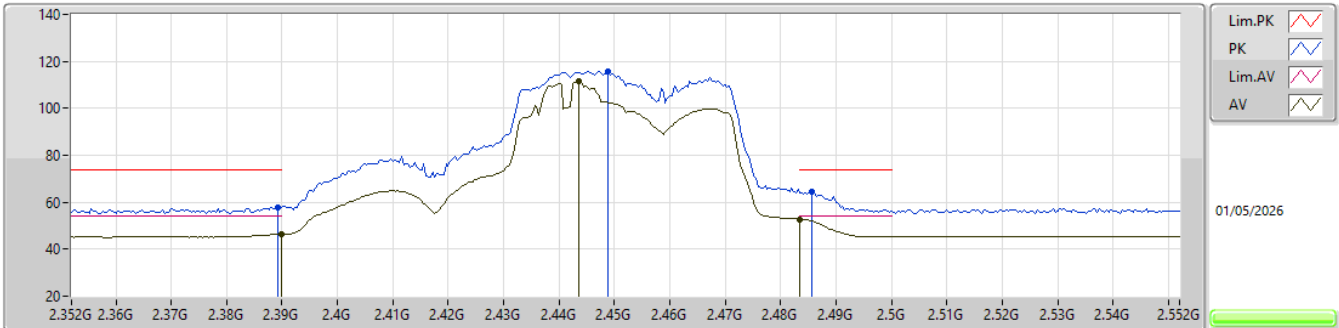


EUT_Y_4TX
Setting 71
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3892G	57.68	74.00	-16.32	25.07	3	Vertical	43	1.80	-	28.40	4.21	-			
AV	2.39G	46.35	54.00	-7.65	13.74	3	Vertical	43	1.80	-	28.40	4.21	-			
PK	2.4488G	115.88	Inf	-Inf	83.22	3	Vertical	43	1.80	-	28.40	4.26	-			
AV	2.4436G	111.49	Inf	-Inf	78.84	3	Vertical	43	1.80	-	28.40	4.25	-			
PK	2.4856G	64.59	74.00	-9.41	31.75	3	Vertical	43	1.80	-	28.56	4.28	-			
AV	2.4835G	52.50	54.00	-1.50	19.68	3	Vertical	43	1.80	-	28.54	4.28	-			

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss2,(MCS0)_4TX

2452MHz_TX

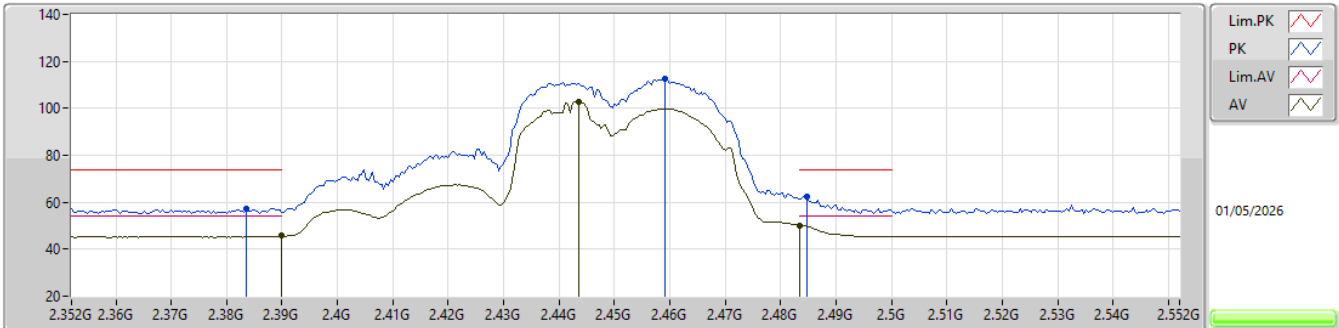


EUT_Y_4TX
Setting 71
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3836G	57.43	74.00	-16.57	24.83	3	Horizontal	233	2.15	-	28.40	4.20	-			
AV	2.39G	45.65	54.00	-8.35	13.04	3	Horizontal	233	2.15	-	28.40	4.21	-			
PK	2.4592G	112.70	Inf	-Inf	79.95	3	Horizontal	233	2.15	-	28.49	4.26	-			
AV	2.4436G	102.63	Inf	-Inf	69.98	3	Horizontal	233	2.15	-	28.40	4.25	-			
PK	2.4848G	62.35	74.00	-11.65	29.52	3	Horizontal	233	2.15	-	28.55	4.28	-			
AV	2.4835G	50.01	54.00	-3.99	17.19	3	Horizontal	233	2.15	-	28.54	4.28	-			

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss2,(MCS0)_4TX

2452MHz_TX

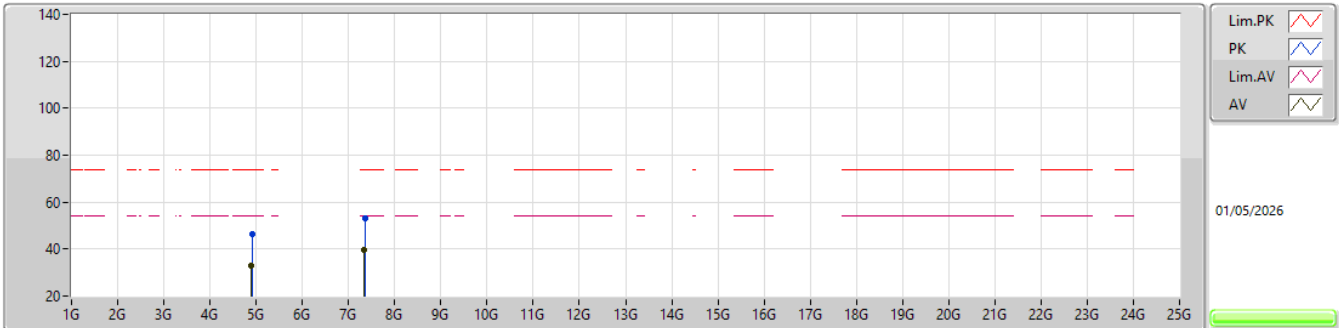


EUT_Y_4TX
Setting 71
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.91112G	46.31	74.00	-27.69	40.88	3	Vertical	155	1.90	-	33.54	6.83	34.94				
AV	4.89688G	33.17	54.00	-20.83	27.78	3	Vertical	155	1.90	-	33.49	6.83	34.93				
PK	7.3588G	53.14	74.00	-20.86	42.40	3	Vertical	146	1.89	-	37.10	8.61	34.97				
AV	7.34668G	39.59	54.00	-14.41	28.88	3	Vertical	146	1.89	-	37.09	8.59	34.97				

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss2,(MCS0)_4TX

2452MHz_TX

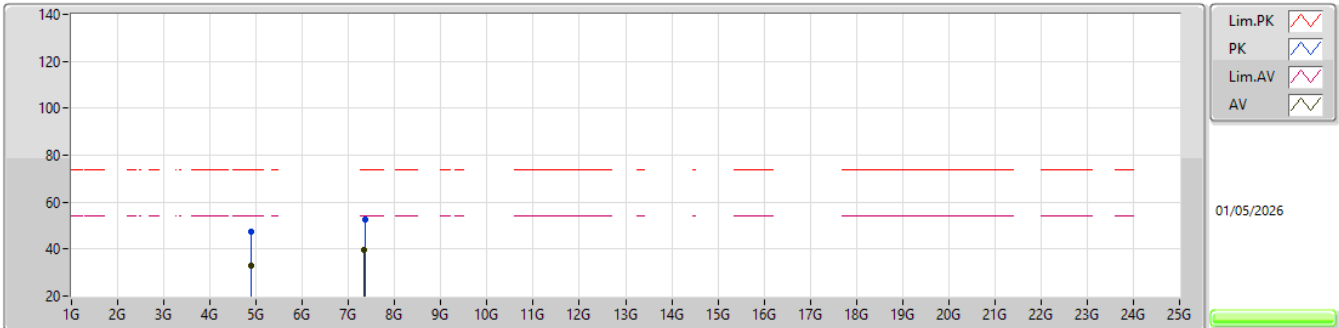

EUT_Y_4TX
Setting 71
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.89772G	47.50	74.00	-26.50	42.10	3	Horizontal	31	2.67	-	33.50	6.83	34.93				
AV	4.89588G	33.11	54.00	-20.89	27.72	3	Horizontal	31	2.67	-	33.49	6.83	34.93				
PK	7.35168G	52.68	74.00	-21.32	41.95	3	Horizontal	290	1.11	-	37.10	8.60	34.97				
AV	7.3462G	39.60	54.00	-14.40	28.90	3	Horizontal	290	1.11	-	37.08	8.59	34.97				




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-
802.11 bn UHR20-BF_Nss2,(MCS0)_4TX	Pass	AV	2.39G	52.93	54.00	-1.07	3	Vertical	216	2.50	-

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2412MHz_TX

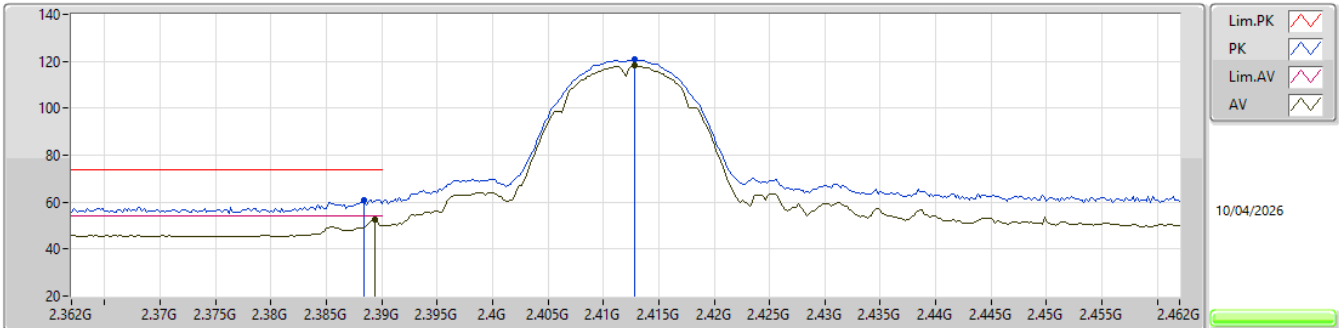


EUT_Y_4TX
Setting 92
06-U-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.3884G	61.09	74.00	-12.91	28.96	3	Vertical	296	1.86	-	27.60	4.53	-				
AV	2.3894G	52.51	54.00	-1.49	20.38	3	Vertical	296	1.86	-	27.60	4.53	-				
PK	2.4128G	120.69	Inf	-Inf	88.63	3	Vertical	296	1.86	-	27.50	4.56	-				
AV	2.4128G	118.14	Inf	-Inf	86.08	3	Vertical	296	1.86	-	27.50	4.56	-				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2412MHz_TX

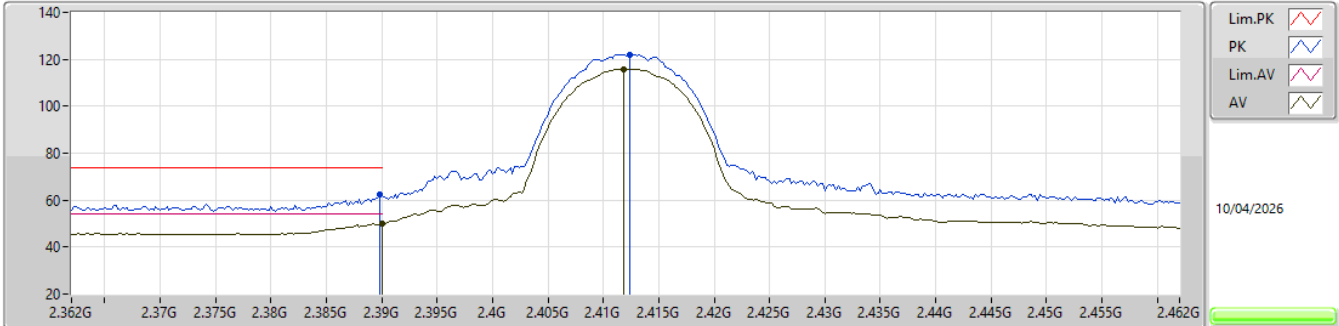


EUT_Y_4TX
Setting 92
06-U-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3898G	62.28	74.00	-11.72	30.15	3	Horizontal	136	2.07	-	27.60	4.53	-			
AV	2.39G	49.84	54.00	-4.16	17.71	3	Horizontal	136	2.07	-	27.60	4.53	-			
PK	2.4124G	122.12	Inf	-Inf	90.06	3	Horizontal	136	2.07	-	27.50	4.56	-			
AV	2.4118G	115.91	Inf	-Inf	83.85	3	Horizontal	136	2.07	-	27.50	4.56	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2412MHz_TX

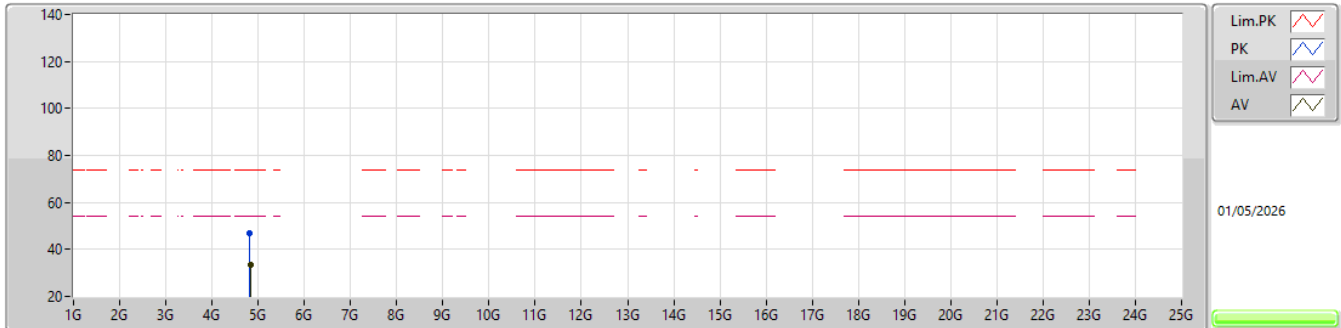


EUT_Y_4TX
Setting 92
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.8164G	46.65	74.00	-27.35	41.36	3	Vertical	11	1.06	-	33.40	6.80	34.91			
AV	4.82748G	33.24	54.00	-20.76	27.95	3	Vertical	11	1.06	-	33.40	6.80	34.91			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2412MHz_TX

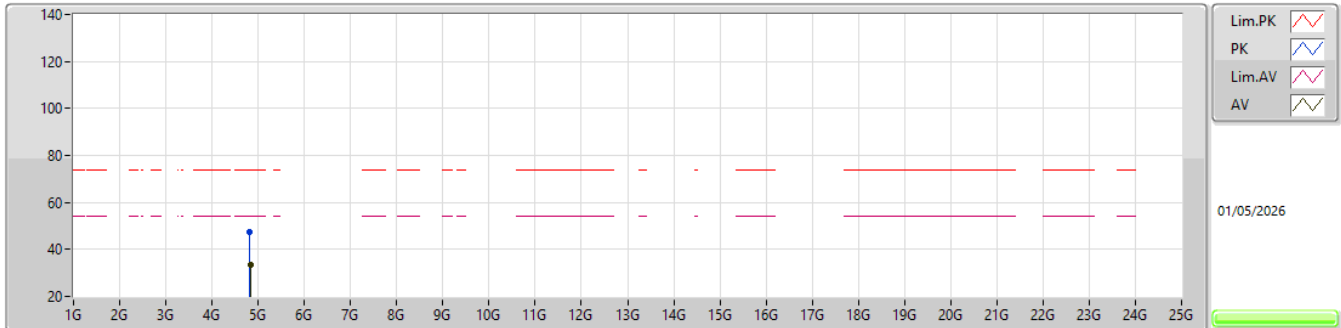


EUT_Y_4TX
Setting 92
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.82428G	47.56	74.00	-26.44	42.27	3	Horizontal	55	1.59	-	33.40	6.80	34.91			
AV	4.83264G	33.25	54.00	-20.75	27.96	3	Horizontal	55	1.59	-	33.40	6.80	34.91			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2437MHz_TX

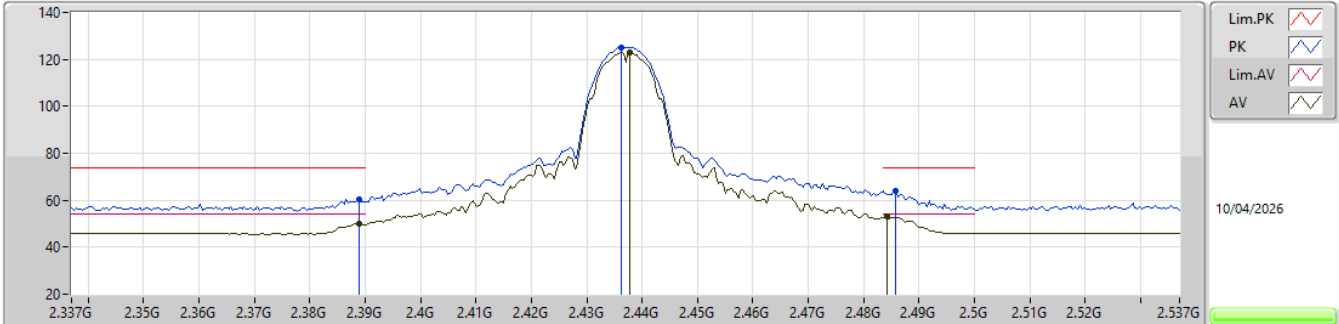


EUT_Y_4TX
Setting 107
06-U-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.389G	60.52	74.00	-13.48	28.39	3	Vertical	298	1.72	-	27.60	4.53	-				
AV	2.389G	50.15	54.00	-3.85	18.02	3	Vertical	298	1.72	-	27.60	4.53	-				
PK	2.4362G	125.22	Inf	-Inf	93.19	3	Vertical	298	1.72	-	27.44	4.59	-				
AV	2.4378G	122.72	Inf	-Inf	90.70	3	Vertical	298	1.72	-	27.42	4.60	-				
PK	2.4858G	63.91	74.00	-10.09	31.78	3	Vertical	298	1.72	-	27.46	4.67	-				
AV	2.4842G	52.85	54.00	-1.15	20.74	3	Vertical	298	1.72	-	27.44	4.67	-				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2437MHz_TX

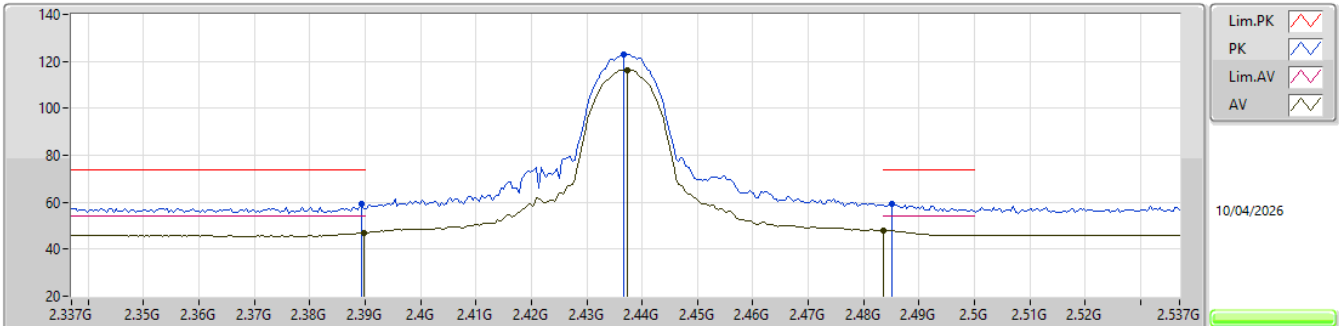


EUT_Y_4TX
Setting 107
06-U-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	2.3894G	59.10	74.00	-14.90	26.97	3	Horizontal	146	2.01	-	27.60	4.53	-				
AV	2.3898G	46.92	54.00	-7.08	14.79	3	Horizontal	146	2.01	-	27.60	4.53	-				
PK	2.4366G	122.89	Inf	-Inf	90.87	3	Horizontal	146	2.01	-	27.43	4.59	-				
AV	2.4374G	116.32	Inf	-Inf	84.29	3	Horizontal	146	2.01	-	27.43	4.60	-				
PK	2.485G	59.44	74.00	-14.56	27.32	3	Horizontal	146	2.01	-	27.45	4.67	-				
AV	2.4835G	47.93	54.00	-6.07	15.82	3	Horizontal	146	2.01	-	27.44	4.67	-				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2437MHz_TX

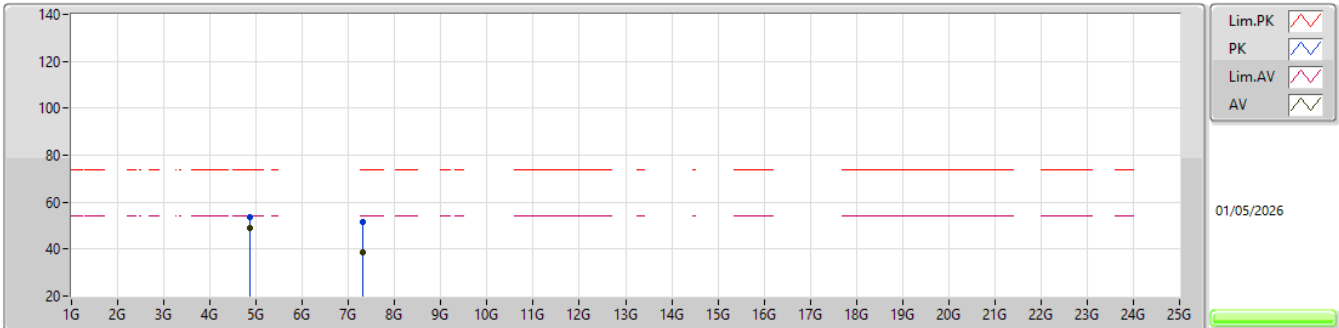


EUT_Y_4TX
Setting 107
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.87404G	53.65	74.00	-20.35	48.30	3	Vertical	57	1.80	-	33.45	6.82	34.92				
AV	4.874G	49.15	54.00	-4.85	43.80	3	Vertical	57	1.80	-	33.45	6.82	34.92				
PK	7.31896G	51.78	74.00	-22.22	41.22	3	Vertical	38	1.58	-	36.98	8.56	34.98				
AV	7.32096G	38.61	54.00	-15.39	28.04	3	Vertical	38	1.58	-	36.98	8.57	34.98				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2437MHz_TX

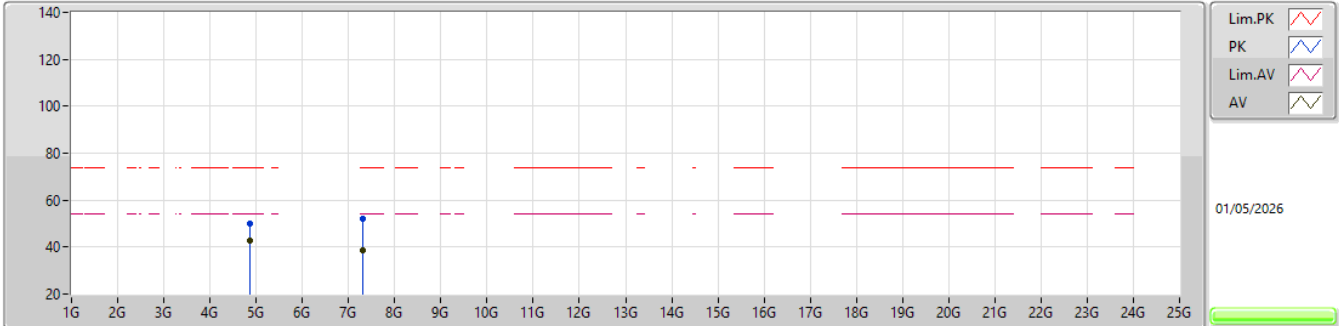


EUT_Y_4TX
Setting 107
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	4.874G	49.98	74.00	-24.02	44.63	3	Horizontal	198	1.87	-	33.45	6.82	34.92				
AV	4.87404G	42.77	54.00	-11.23	37.42	3	Horizontal	198	1.87	-	33.45	6.82	34.92				
PK	7.30456G	51.95	74.00	-22.05	41.47	3	Horizontal	336	1.67	-	36.92	8.55	34.99				
AV	7.32012G	38.61	54.00	-15.39	28.04	3	Horizontal	336	1.67	-	36.98	8.57	34.98				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2462MHz_TX

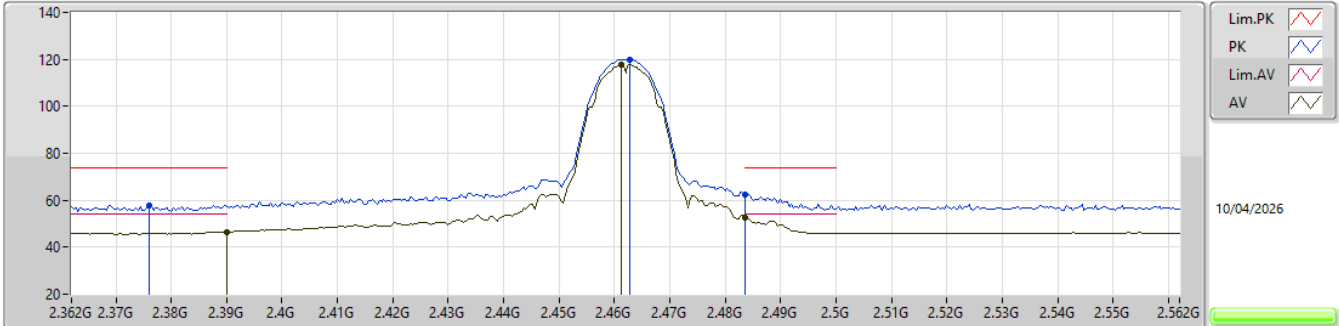


EUT_Y_4TX
Setting 87
06-U-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.376G	57.82	74.00	-16.18	25.69	3	Vertical	309.1	1.89	-	27.60	4.53	-			
AV	2.39G	46.46	54.00	-7.54	14.33	3	Vertical	309.1	1.89	-	27.60	4.53	-			
PK	2.4628G	120.06	Inf	-Inf	88.03	3	Vertical	309.1	1.89	-	27.40	4.63	-			
AV	2.4612G	117.64	Inf	-Inf	85.61	3	Vertical	309.1	1.89	-	27.40	4.63	-			
PK	2.4835G	62.64	74.00	-11.36	30.53	3	Vertical	309.1	1.89	-	27.44	4.67	-			
AV	2.4835G	52.56	54.00	-1.44	20.45	3	Vertical	309.1	1.89	-	27.44	4.67	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2462MHz_TX

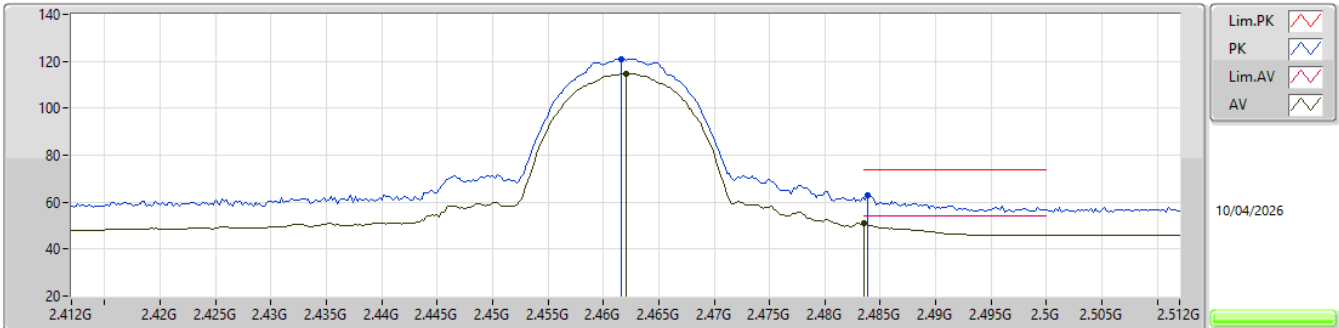


EUT_Y_4TX
Setting 87
06-U-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.4616G	120.84	Inf	-Inf	88.81	3	Horizontal	139	2.23	-	27.40	4.63	-			
AV	2.462G	114.53	Inf	-Inf	82.50	3	Horizontal	139	2.23	-	27.40	4.63	-			
PK	2.4838G	62.92	74.00	-11.08	30.81	3	Horizontal	139	2.23	-	27.44	4.67	-			
AV	2.4835G	51.00	54.00	-3.00	18.89	3	Horizontal	139	2.23	-	27.44	4.67	-			

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2462MHz_TX

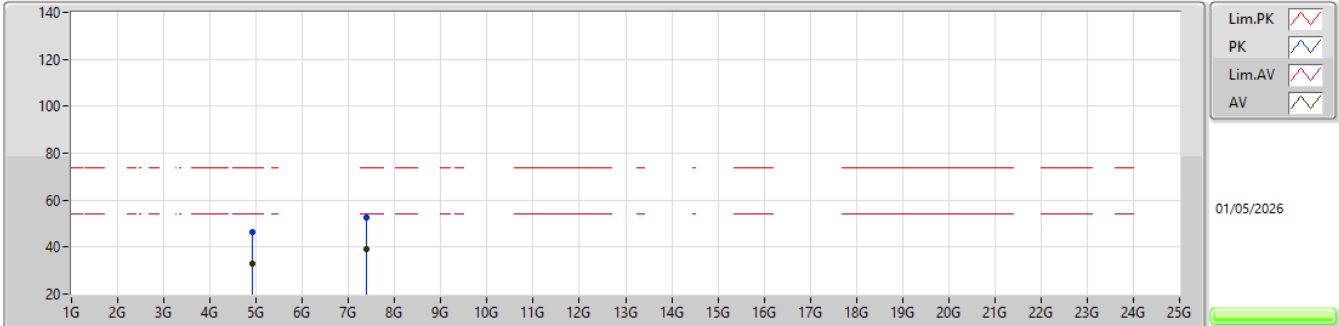


EUT_Y_4TX
Setting 87
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.91676G	46.61	74.00	-27.39	41.14	3	Vertical	130	2.61	-	33.57	6.84	34.94				
AV	4.92776G	33.09	54.00	-20.91	27.58	3	Vertical	130	2.61	-	33.61	6.84	34.94				
PK	7.38204G	52.76	74.00	-21.24	41.99	3	Vertical	266	2.52	-	37.10	8.63	34.96				
AV	7.3916G	39.17	54.00	-14.83	28.38	3	Vertical	266	2.52	-	37.10	8.64	34.95				

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_4TX

2462MHz_TX

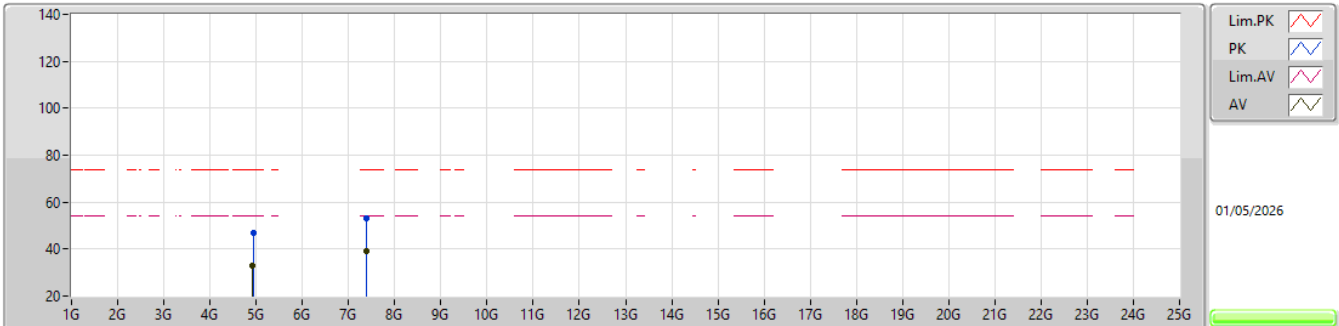


EUT_Y_4TX
Setting 87
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.93152G	46.66	74.00	-27.34	41.13	3	Horizontal	69	1.10	-	33.63	6.84	34.94			
AV	4.92984G	33.01	54.00	-20.99	27.49	3	Horizontal	69	1.10	-	33.62	6.84	34.94			
PK	7.38852G	52.90	74.00	-21.10	42.11	3	Horizontal	197	2.72	-	37.10	8.64	34.95			
AV	7.39392G	39.22	54.00	-14.78	28.43	3	Horizontal	197	2.72	-	37.10	8.64	34.95			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2412MHz_TX

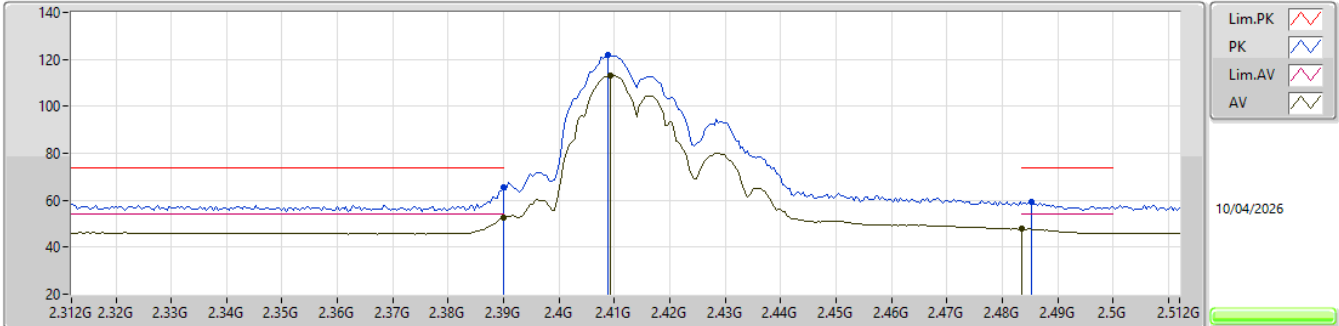


EUT_Y_4TX
Setting 83
06-U-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.39G	65.51	74.00	-8.49	33.38	3	Vertical	190	1.91	-	27.60	4.53	-			
AV	2.39G	52.64	54.00	-1.36	20.51	3	Vertical	190	1.91	-	27.60	4.53	-			
PK	2.4088G	121.83	Inf	-Inf	89.77	3	Vertical	190	1.91	-	27.51	4.55	-			
AV	2.4092G	113.22	Inf	-Inf	81.16	3	Vertical	190	1.91	-	27.51	4.55	-			
PK	2.4852G	59.23	74.00	-14.77	27.11	3	Vertical	190	1.91	-	27.45	4.67	-			
AV	2.4835G	47.73	54.00	-6.27	15.62	3	Vertical	190	1.91	-	27.44	4.67	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2412MHz_TX

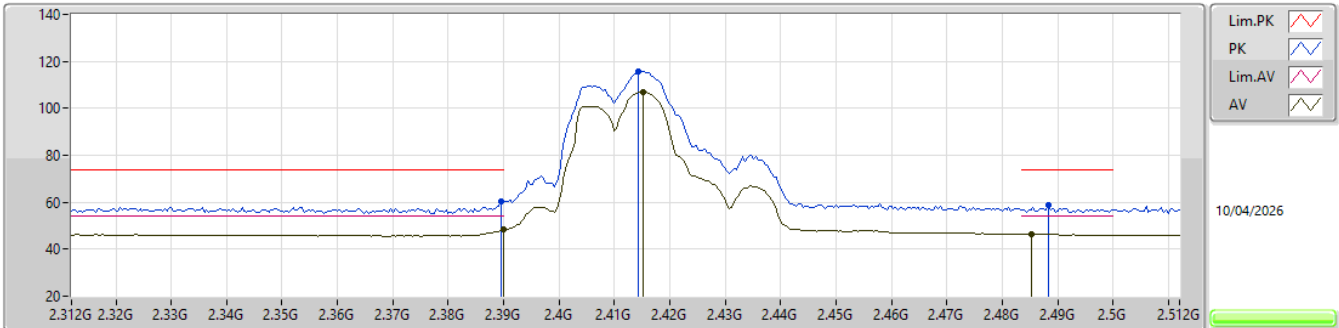


EUT_Y_4TX
Setting 83
06-U-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3896G	60.46	74.00	-13.54	28.33	3	Horizontal	341	1.24	-	27.60	4.53	-			
AV	2.39G	48.38	54.00	-5.62	16.25	3	Horizontal	341	1.24	-	27.60	4.53	-			
PK	2.4144G	115.71	Inf	-Inf	83.65	3	Horizontal	341	1.24	-	27.50	4.56	-			
AV	2.4152G	106.99	Inf	-Inf	74.93	3	Horizontal	341	1.24	-	27.50	4.56	-			
PK	2.4884G	58.76	74.00	-15.24	26.61	3	Horizontal	341	1.24	-	27.48	4.67	-			
AV	2.4852G	46.55	54.00	-7.45	14.43	3	Horizontal	341	1.24	-	27.45	4.67	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2412MHz_TX

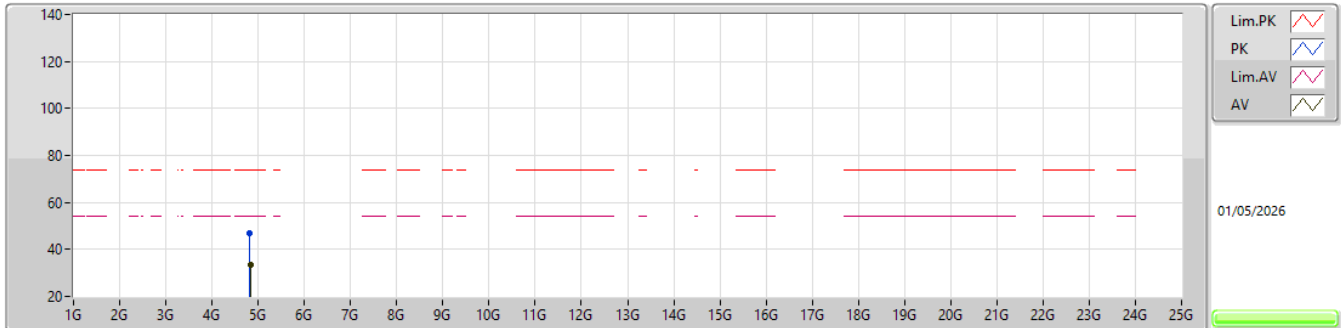


EUT_Y_4TX
Setting 83
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.8182G	46.67	74.00	-27.33	41.38	3	Vertical	273	1.95	-	33.40	6.80	34.91			
AV	4.8276G	33.62	54.00	-20.38	28.33	3	Vertical	273	1.95	-	33.40	6.80	34.91			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2412MHz_TX

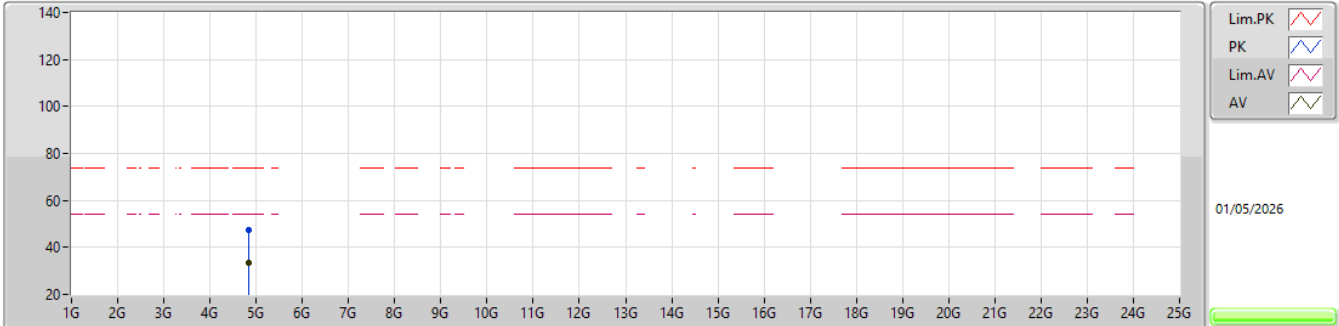


EUT_Y_4TX
Setting 83
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.83364G	47.26	74.00	-26.74	41.97	3	Horizontal	7	1.22	-	33.40	6.80	34.91			
AV	4.83364G	33.55	54.00	-20.45	28.26	3	Horizontal	7	1.22	-	33.40	6.80	34.91			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2437MHz_TX

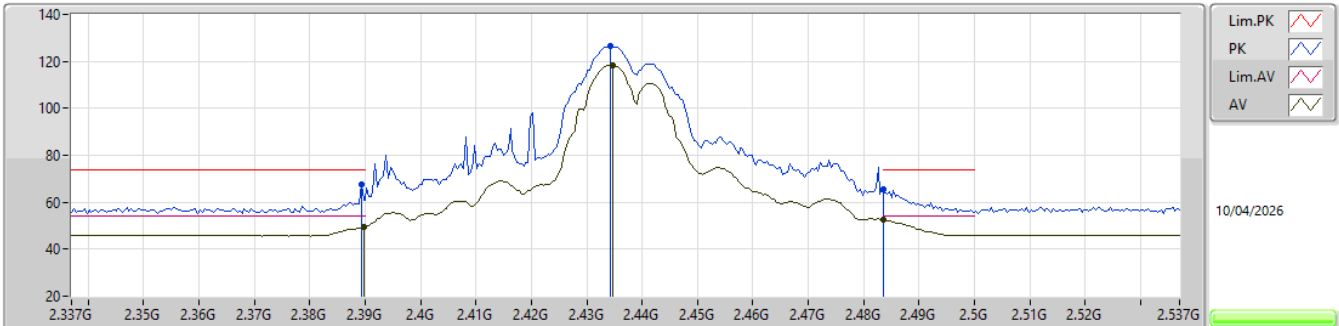


EUT_Y_4TX
Setting 101
06-U-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3894G	67.60	74.00	-6.40	35.47	3	Vertical	188	1.71	-	27.60	4.53	-			
AV	2.3898G	49.35	54.00	-4.65	17.22	3	Vertical	188	1.71	-	27.60	4.53	-			
PK	2.4342G	126.47	Inf	-Inf	94.42	3	Vertical	188	1.71	-	27.46	4.59	-			
AV	2.4346G	118.23	Inf	-Inf	86.19	3	Vertical	188	1.71	-	27.45	4.59	-			
PK	2.4835G	65.28	74.00	-8.72	33.17	3	Vertical	188	1.71	-	27.44	4.67	-			
AV	2.4835G	52.40	54.00	-1.60	20.29	3	Vertical	188	1.71	-	27.44	4.67	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2437MHz_TX

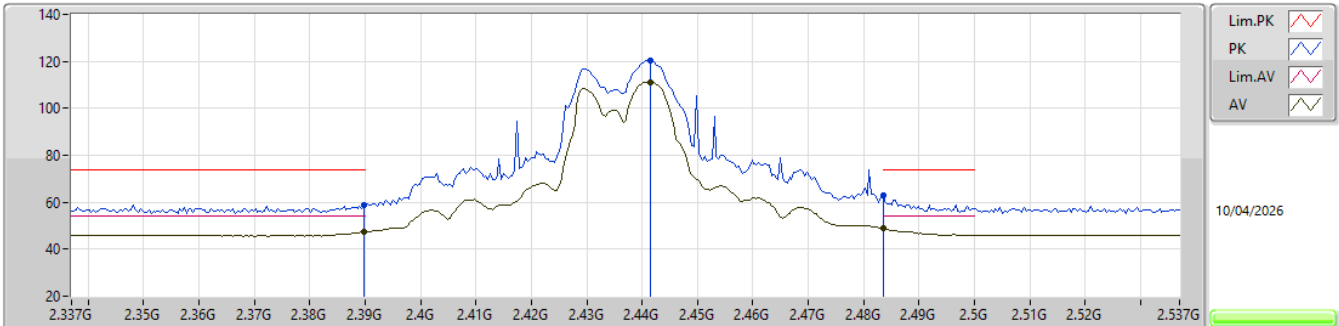


EUT_Y_4TX
Setting 101
06-U-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3898G	58.97	74.00	-15.03	26.84	3	Horizontal	50	1.00	-	27.60	4.53	-			
AV	2.3898G	47.47	54.00	-6.53	15.34	3	Horizontal	50	1.00	-	27.60	4.53	-			
PK	2.4414G	120.28	Inf	-Inf	88.28	3	Horizontal	50	1.00	-	27.40	4.60	-			
AV	2.4414G	111.24	Inf	-Inf	79.24	3	Horizontal	50	1.00	-	27.40	4.60	-			
PK	2.4835G	63.13	74.00	-10.87	31.02	3	Horizontal	50	1.00	-	27.44	4.67	-			
AV	2.4835G	49.04	54.00	-4.96	16.93	3	Horizontal	50	1.00	-	27.44	4.67	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2437MHz_TX

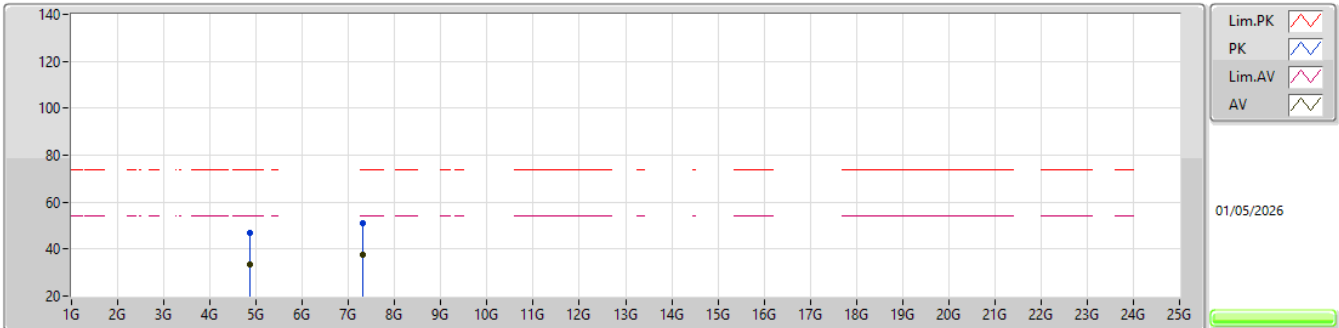


EUT_Y_4TX
Setting 101
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.86628G	46.95	74.00	-27.05	41.62	3	Vertical	257	2.93	-	33.43	6.82	34.92				
AV	4.86652G	33.61	54.00	-20.39	28.28	3	Vertical	257	2.93	-	33.43	6.82	34.92				
PK	7.31128G	50.91	74.00	-23.09	40.39	3	Vertical	307	1.47	-	36.95	8.56	34.99				
AV	7.32084G	37.70	54.00	-16.30	27.13	3	Vertical	307	1.47	-	36.98	8.57	34.98				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2437MHz_TX

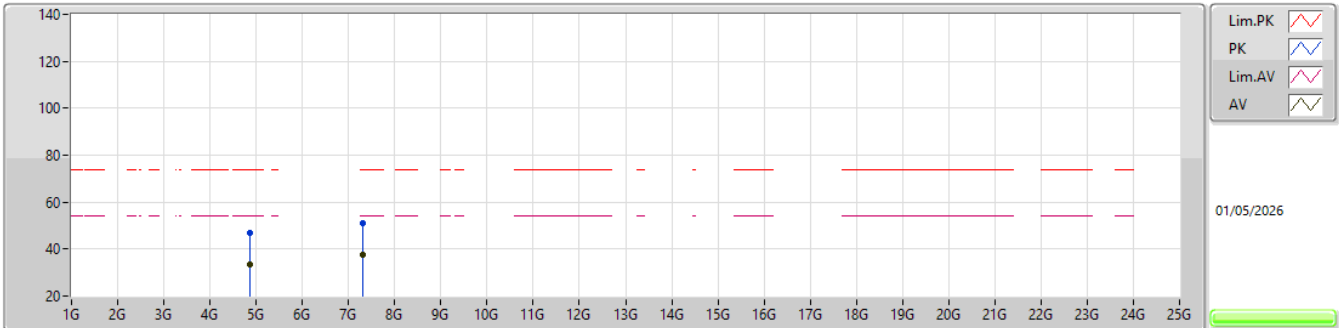


EUT_Y_4TX
Setting 101
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.87308G	46.70	74.00	-27.30	41.35	3	Horizontal	49	2.84	-	33.45	6.82	34.92			
AV	4.865G	33.59	54.00	-20.41	28.26	3	Horizontal	49	2.84	-	33.43	6.82	34.92			
PK	7.3204G	51.13	74.00	-22.87	40.56	3	Horizontal	137	2.77	-	36.98	8.57	34.98			
AV	7.31748G	37.69	54.00	-16.31	27.14	3	Horizontal	137	2.77	-	36.97	8.56	34.98			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2462MHz_TX

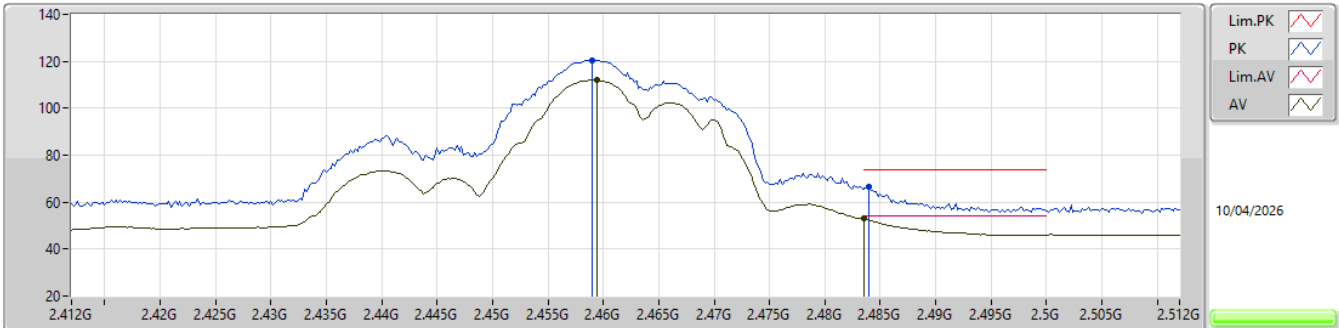


EUT_Y_4TX
Setting 81
06-U-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.459G	120.40	Inf	-Inf	88.37	3	Vertical	182	1.78	-	27.40	4.63	-			
AV	2.4594G	112.00	Inf	-Inf	79.97	3	Vertical	182	1.78	-	27.40	4.63	-			
PK	2.484G	66.37	74.00	-7.63	34.26	3	Vertical	182	1.78	-	27.44	4.67	-			
AV	2.4835G	52.85	54.00	-1.15	20.74	3	Vertical	182	1.78	-	27.44	4.67	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2462MHz_TX

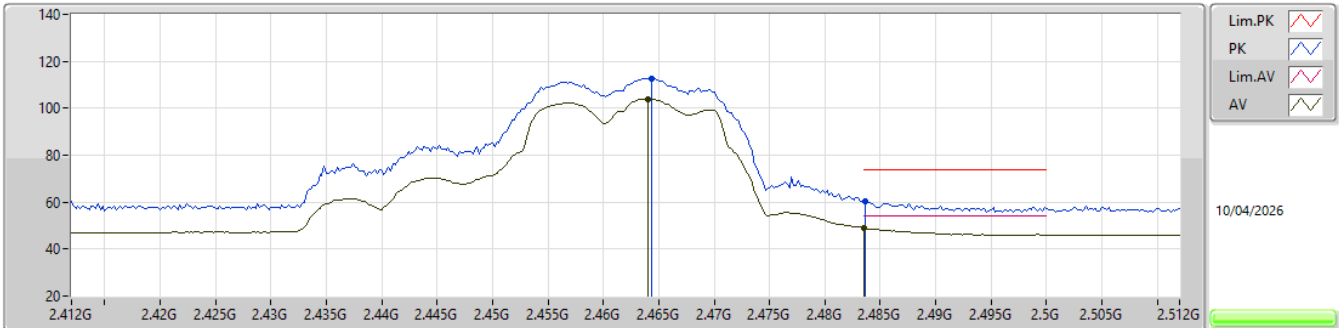


EUT_Y_4TX
Setting 81
06-U-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.4644G	112.75	Inf	-Inf	80.71	3	Horizontal	326	1.80	-	27.40	4.64	-			
AV	2.464G	103.96	Inf	-Inf	71.92	3	Horizontal	326	1.80	-	27.40	4.64	-			
PK	2.4836G	60.44	74.00	-13.56	28.33	3	Horizontal	326	1.80	-	27.44	4.67	-			
AV	2.4835G	48.98	54.00	-5.02	16.87	3	Horizontal	326	1.80	-	27.44	4.67	-			

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2462MHz_TX

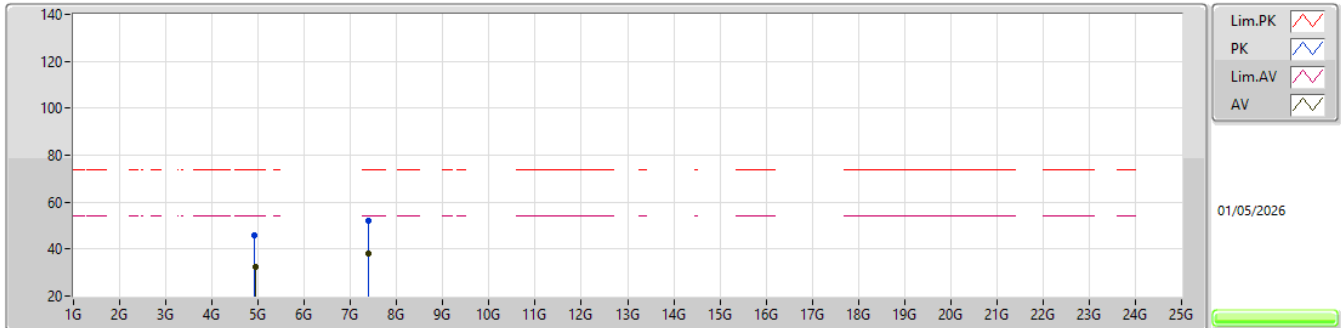


EUT_Y_4TX
Setting 81
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.9214G	45.77	74.00	-28.23	40.28	3	Vertical	85	2.82	-	33.59	6.84	34.94				
AV	4.93204G	32.59	54.00	-21.41	27.06	3	Vertical	85	2.82	-	33.63	6.84	34.94				
PK	7.38076G	51.93	74.00	-22.07	41.16	3	Vertical	66	2.79	-	37.10	8.63	34.96				
AV	7.39588G	38.13	54.00	-15.87	27.33	3	Vertical	66	2.79	-	37.10	8.65	34.95				

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_4TX

2462MHz_TX

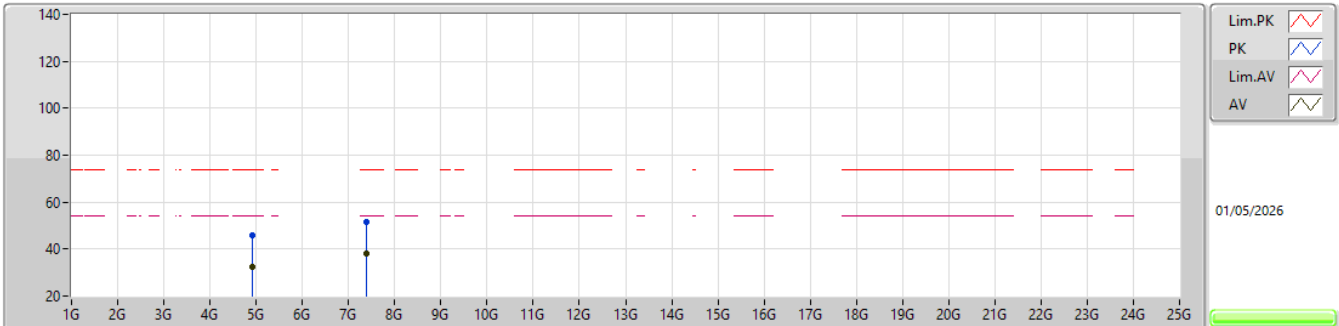


EUT_Y_4TX
Setting 81
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.91952G	45.77	74.00	-28.23	40.29	3	Horizontal	24	2.06	-	33.58	6.84	34.94				
AV	4.92976G	32.48	54.00	-21.52	26.96	3	Horizontal	24	2.06	-	33.62	6.84	34.94				
PK	7.38812G	51.56	74.00	-22.44	40.77	3	Horizontal	19	2.57	-	37.10	8.64	34.95				
AV	7.3938G	38.15	54.00	-15.85	27.36	3	Horizontal	19	2.57	-	37.10	8.64	34.95				

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss1,(MCS0)_4TX

2412MHz_TX

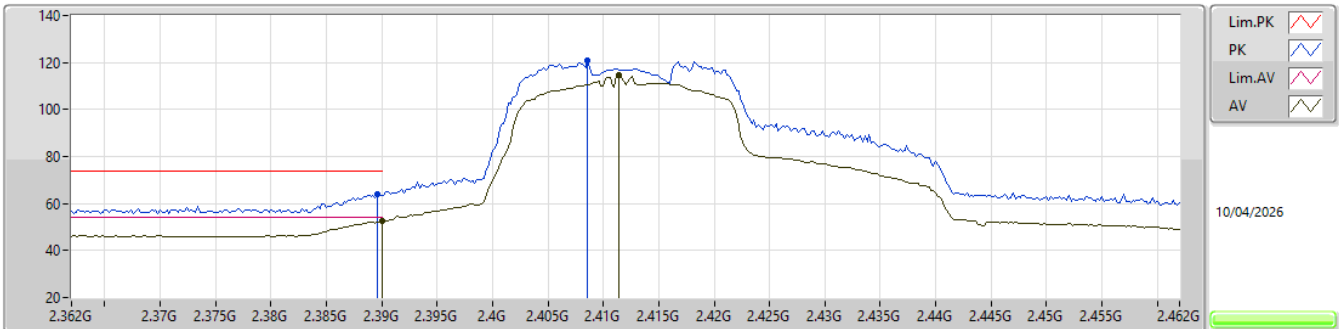


EUT_Y_4TX
Setting 86
06-U-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	2.3896G	63.75	74.00	-10.25	31.62	3	Vertical	170	2.79	-	27.60	4.53	-				
AV	2.39G	52.60	54.00	-1.40	20.47	3	Vertical	170	2.79	-	27.60	4.53	-				
PK	2.4086G	121.10	Inf	-Inf	89.04	3	Vertical	170	2.79	-	27.51	4.55	-				
AV	2.4114G	114.71	Inf	-Inf	82.65	3	Vertical	170	2.79	-	27.50	4.56	-				

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss1,(MCS0)_4TX

2412MHz_TX

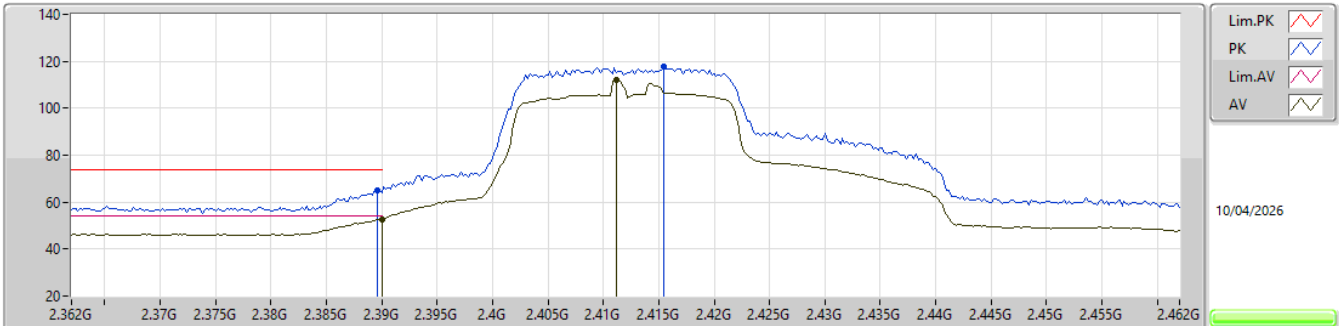


EUT_Y_4TX
Setting 86
06-U-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3896G	65.01	74.00	-8.99	32.88	3	Horizontal	168	1.80	-	27.60	4.53	-			
AV	2.39G	52.59	54.00	-1.41	20.46	3	Horizontal	168	1.80	-	27.60	4.53	-			
PK	2.4154G	117.61	Inf	-Inf	85.55	3	Horizontal	168	1.80	-	27.50	4.56	-			
AV	2.4112G	112.23	Inf	-Inf	80.17	3	Horizontal	168	1.80	-	27.50	4.56	-			

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss1,(MCS0)_4TX

2412MHz_TX

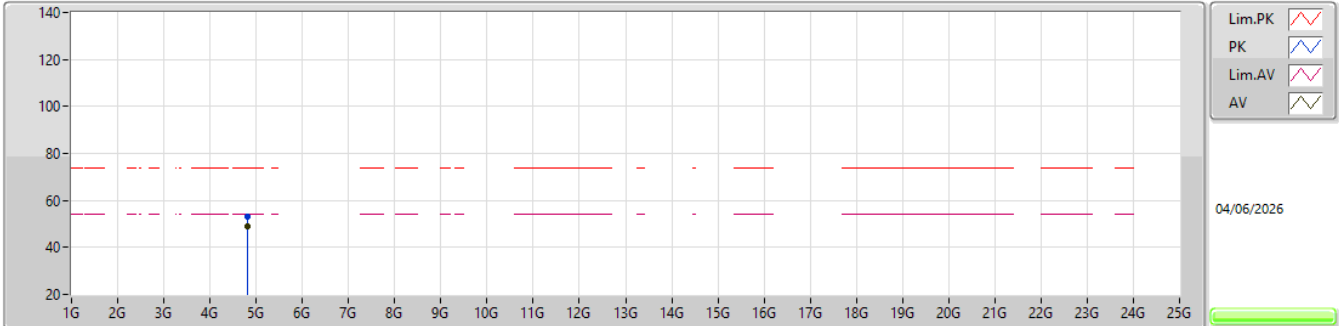


EUT_Y_4TX
Setting 86
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	4.82397G	52.88	74.00	-21.12	47.59	3	Vertical	127	1.94	-	33.40	6.80	34.91			
AV	4.82396G	48.81	54.00	-5.19	43.52	3	Vertical	127	1.94	-	33.40	6.80	34.91			

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss1,(MCS0)_4TX

2412MHz_TX

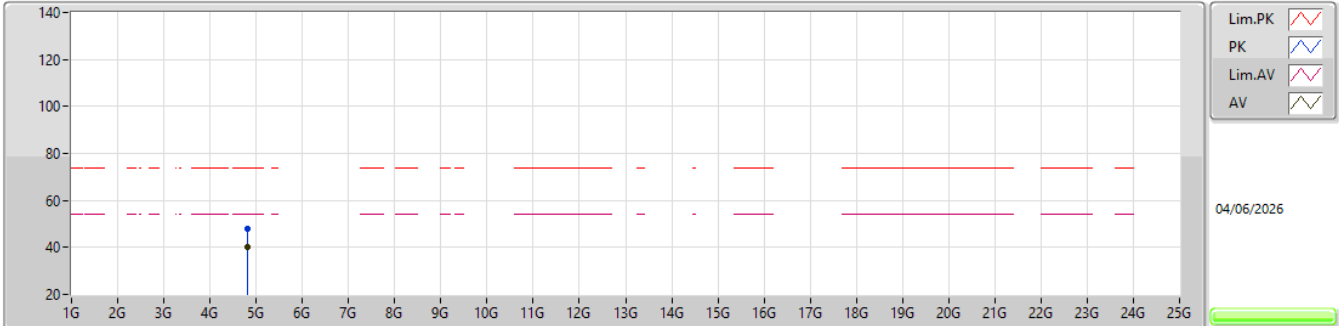


EUT_Y_4TX
Setting 86
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.82384G	47.94	74.00	-26.06	43.68	3	Horizontal	36	1.80	-	31.20	6.73	33.67			
AV	4.82383G	40.24	54.00	-13.76	35.98	3	Horizontal	36	1.80	-	31.20	6.73	33.67			

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss1,(MCS0)_4TX

2437MHz_TX

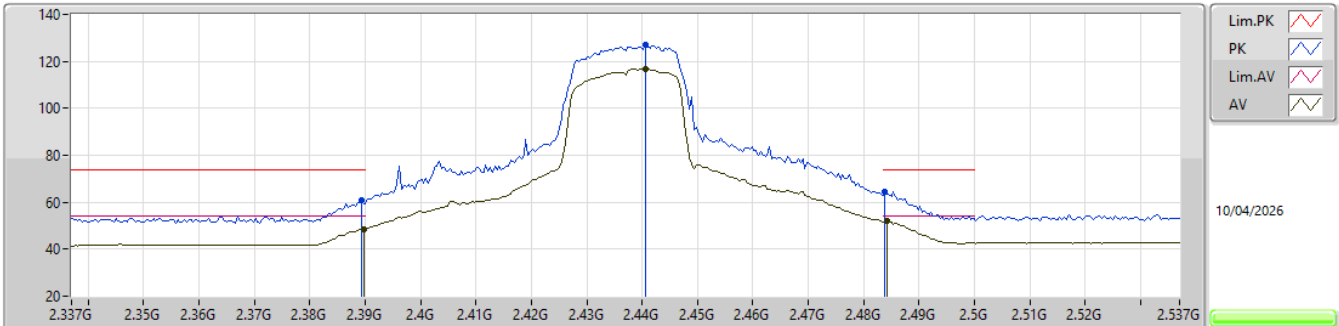


EUT_Y_4TX
Setting 102
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3894G	60.89	74.00	-13.11	59.65	3	Vertical	342	2.00	-	27.59	4.98	31.33			
AV	2.3898G	48.63	54.00	-5.37	47.38	3	Vertical	342	2.00	-	27.60	4.98	31.33			
PK	2.4406G	127.04	Inf	-Inf	125.58	3	Vertical	342	2.00	-	27.70	5.06	31.30			
AV	2.4406G	116.78	Inf	-Inf	115.32	3	Vertical	342	2.00	-	27.70	5.06	31.30			
PK	2.4838G	64.62	74.00	-9.38	62.84	3	Vertical	342	2.00	-	27.94	5.13	31.29			
AV	2.4842G	52.16	54.00	-1.84	50.38	3	Vertical	342	2.00	-	27.94	5.13	31.29			

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss1,(MCS0)_4TX

2437MHz_TX

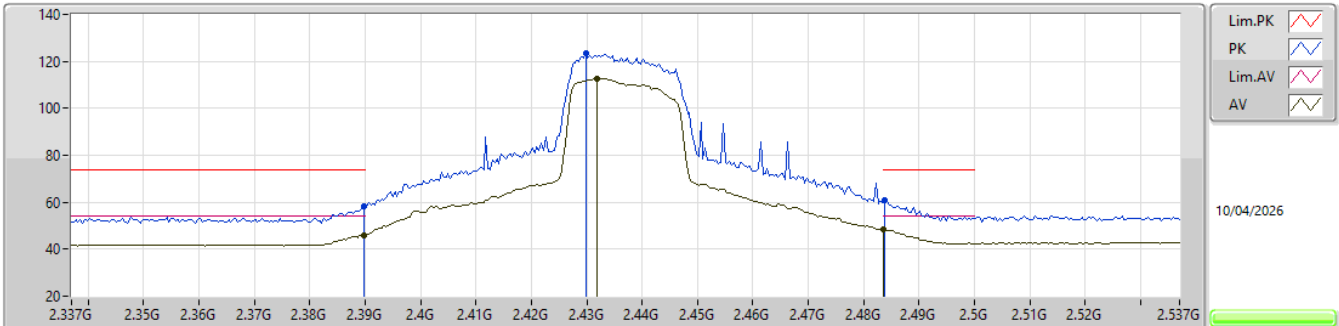


EUT_Y_4TX
Setting 102
02-R-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	2.3898G	58.14	74.00	-15.86	56.89	3	Horizontal	142	1.85	-	27.60	4.98	31.33			
AV	2.3898G	46.03	54.00	-7.97	44.78	3	Horizontal	142	1.85	-	27.60	4.98	31.33			
PK	2.4298G	123.35	Inf	-Inf	121.92	3	Horizontal	142	1.85	-	27.70	5.04	31.31			
AV	2.4318G	112.59	Inf	-Inf	111.16	3	Horizontal	142	1.85	-	27.70	5.04	31.31			
PK	2.4838G	61.01	74.00	-12.99	59.23	3	Horizontal	142	1.85	-	27.94	5.13	31.29			
AV	2.4835G	48.24	54.00	-5.76	46.46	3	Horizontal	142	1.85	-	27.94	5.13	31.29			

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss1,(MCS0)_4TX

2437MHz_TX

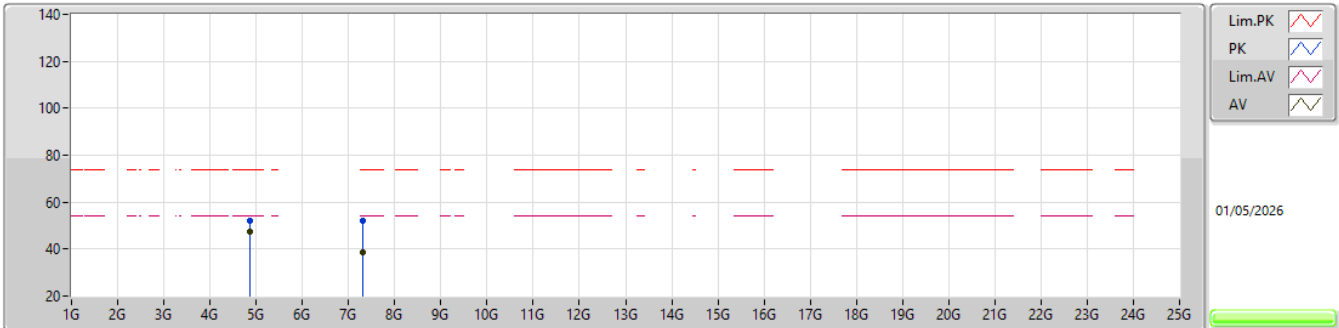


EUT_Y_4TX
Setting 102
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.87408G	52.21	74.00	-21.79	46.86	3	Vertical	310	1.48	-	33.45	6.82	34.92				
AV	4.874G	47.22	54.00	-6.78	41.87	3	Vertical	310	1.48	-	33.45	6.82	34.92				
PK	7.31908G	52.15	74.00	-21.85	41.58	3	Vertical	360	2.95	-	36.98	8.57	34.98				
AV	7.32088G	38.81	54.00	-15.19	28.24	3	Vertical	360	2.95	-	36.98	8.57	34.98				

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss1,(MCS0)_4TX

2437MHz_TX

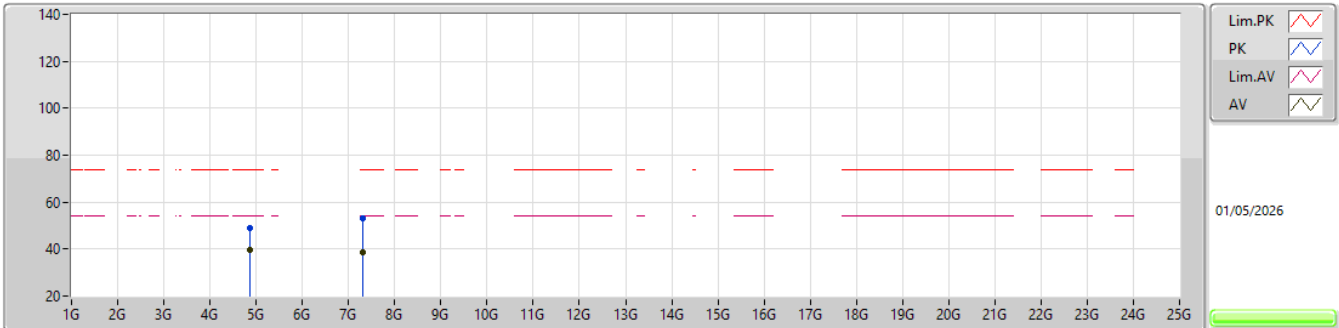


EUT_Y_4TX
Setting 102
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.87388G	49.19	74.00	-24.81	43.84	3	Horizontal	193	1.94	-	33.45	6.82	34.92			
AV	4.874G	39.44	54.00	-14.56	34.09	3	Horizontal	193	1.94	-	33.45	6.82	34.92			
PK	7.32052G	52.89	74.00	-21.11	42.32	3	Horizontal	329	2.76	-	36.98	8.57	34.98			
AV	7.32036G	38.67	54.00	-15.33	28.10	3	Horizontal	329	2.76	-	36.98	8.57	34.98			

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss1,(MCS0)_4TX

2462MHz_TX

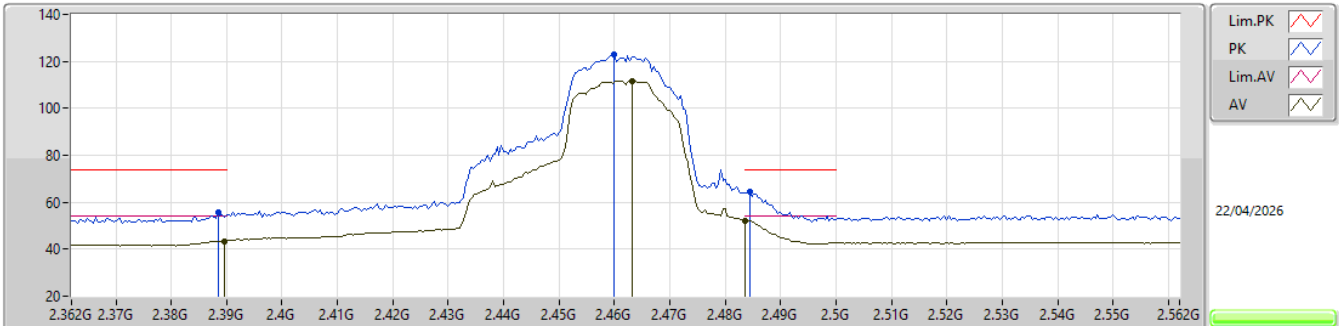


EUT_Y_4TX
Setting 80
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3884G	55.56	74.00	-18.44	54.33	3	Vertical	39	1.74	-	27.58	4.98	31.33			
AV	2.3896G	43.45	54.00	-10.55	42.20	3	Vertical	39	1.74	-	27.60	4.98	31.33			
PK	2.46G	122.90	Inf	-Inf	121.41	3	Vertical	39	1.74	-	27.70	5.09	31.30			
AV	2.4632G	111.54	Inf	-Inf	110.02	3	Vertical	39	1.74	-	27.73	5.09	31.30			
PK	2.4844G	64.34	74.00	-9.66	62.56	3	Vertical	39	1.74	-	27.94	5.13	31.29			
AV	2.4835G	52.09	54.00	-1.91	50.31	3	Vertical	39	1.74	-	27.94	5.13	31.29			

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss1,(MCS0)_4TX

2462MHz_TX

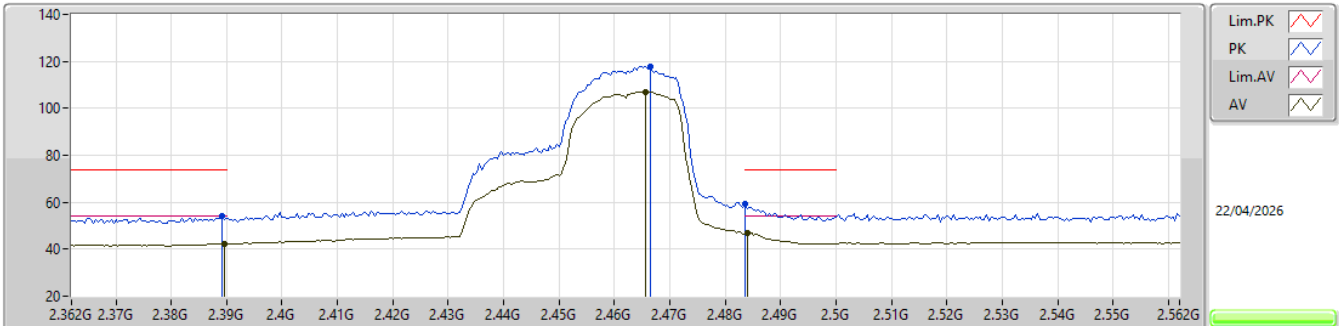


EUT_Y_4TX
Setting 80
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3892G	53.89	74.00	-20.11	52.65	3	Horizontal	217	2.20	-	27.59	4.98	31.33
AV	2.3896G	42.31	54.00	-11.69	41.06	3	Horizontal	217	2.20	-	27.60	4.98	31.33
PK	2.4664G	118.00	Inf	-Inf	116.43	3	Horizontal	217	2.20	-	27.76	5.10	31.29
AV	2.4656G	107.11	Inf	-Inf	105.54	3	Horizontal	217	2.20	-	27.76	5.10	31.29
PK	2.4835G	59.56	74.00	-14.44	57.78	3	Horizontal	217	2.20	-	27.94	5.13	31.29
AV	2.484G	47.07	54.00	-6.93	45.29	3	Horizontal	217	2.20	-	27.94	5.13	31.29

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss1,(MCS0)_4TX

2462MHz_TX

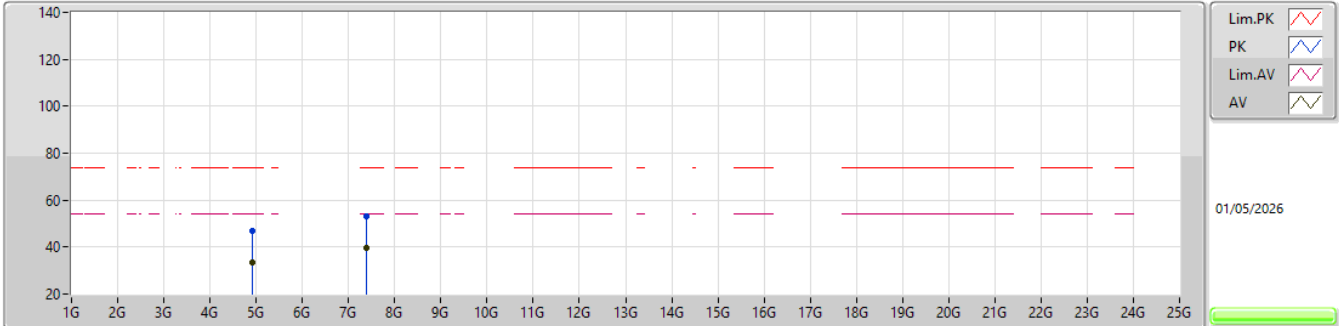


EUT_Y_4TX
Setting 80
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.92664G	46.72	74.00	-27.28	41.21	3	Vertical	30	2.18	-	33.61	6.84	34.94				
AV	4.9292G	33.31	54.00	-20.69	27.79	3	Vertical	30	2.18	-	33.62	6.84	34.94				
PK	7.3796G	53.35	74.00	-20.65	42.58	3	Vertical	283	1.23	-	37.10	8.63	34.96				
AV	7.39496G	39.41	54.00	-14.59	28.62	3	Vertical	283	1.23	-	37.10	8.64	34.95				

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss1,(MCS0)_4TX

2462MHz_TX

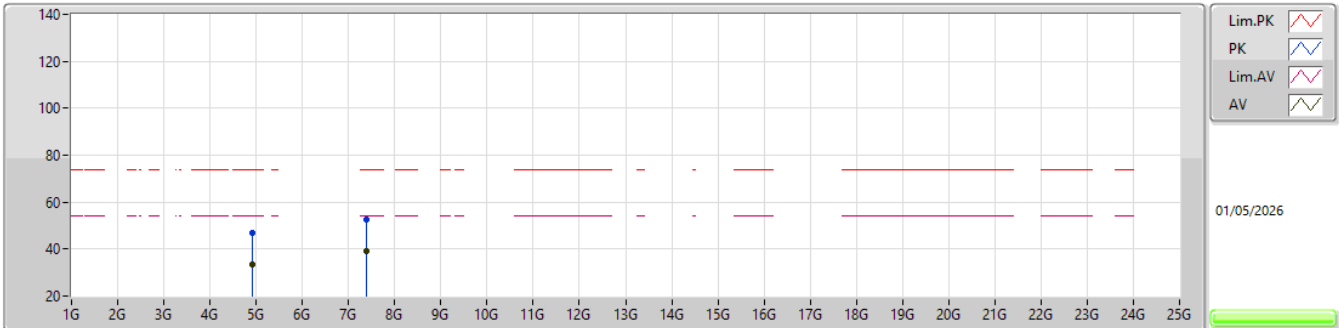


EUT_Y_4TX
Setting 80
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.91904G	46.81	74.00	-27.19	41.33	3	Horizontal	33	2.49	-	33.58	6.84	34.94			
AV	4.92856G	33.30	54.00	-20.70	27.79	3	Horizontal	33	2.49	-	33.61	6.84	34.94			
PK	7.388G	52.62	74.00	-21.38	41.83	3	Horizontal	135	2.21	-	37.10	8.64	34.95			
AV	7.3924G	39.35	54.00	-14.65	28.56	3	Horizontal	135	2.21	-	37.10	8.64	34.95			

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss1,(MCS0)_4TX

2422MHz_TX

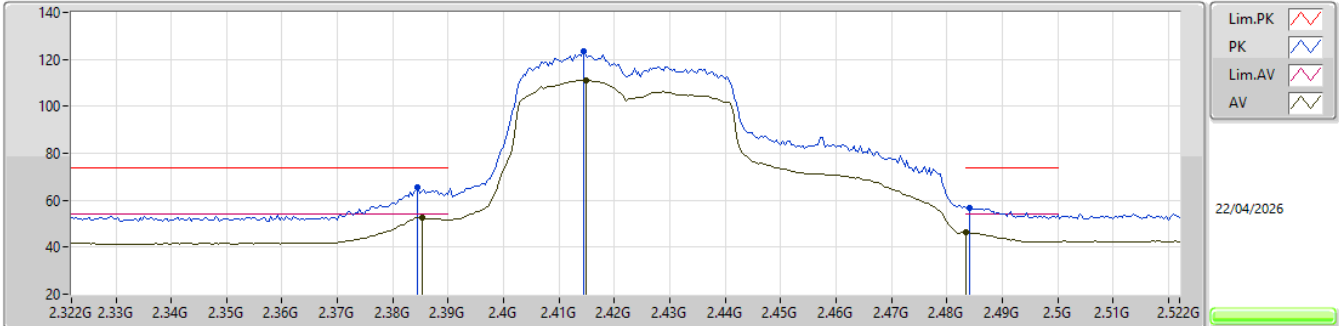


EUT_Y_4TX
Setting 80
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3844G	65.29	74.00	-8.71	64.10	3	Vertical	24	2.45	-	27.54	4.98	31.33			
AV	2.3852G	52.69	54.00	-1.31	51.49	3	Vertical	24	2.45	-	27.55	4.98	31.33			
PK	2.4144G	123.21	Inf	-Inf	121.82	3	Vertical	24	2.45	-	27.70	5.01	31.32			
AV	2.4148G	111.23	Inf	-Inf	109.84	3	Vertical	24	2.45	-	27.70	5.01	31.32			
PK	2.484G	56.94	74.00	-17.06	55.16	3	Vertical	24	2.45	-	27.94	5.13	31.29			
AV	2.4835G	46.14	54.00	-7.86	44.36	3	Vertical	24	2.45	-	27.94	5.13	31.29			

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss1,(MCS0)_4TX

2422MHz_TX

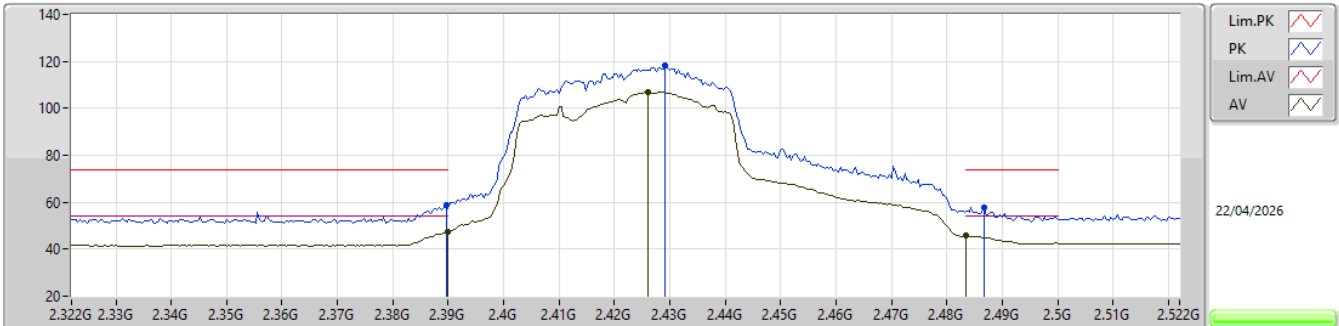


EUT_Y_4TX
Setting 80
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3896G	58.55	74.00	-15.45	57.30	3	Horizontal	140	1.80	-	27.60	4.98	31.33
AV	2.39G	47.60	54.00	-6.40	46.35	3	Horizontal	140	1.80	-	27.60	4.98	31.33
PK	2.4292G	118.06	Inf	-Inf	116.63	3	Horizontal	140	1.80	-	27.70	5.04	31.31
AV	2.426G	106.72	Inf	-Inf	105.30	3	Horizontal	140	1.80	-	27.70	5.03	31.31
PK	2.4868G	57.92	74.00	-16.08	56.11	3	Horizontal	140	1.80	-	27.97	5.13	31.29
AV	2.4835G	45.71	54.00	-8.29	43.93	3	Horizontal	140	1.80	-	27.94	5.13	31.29

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss1,(MCS0)_4TX

2422MHz_TX

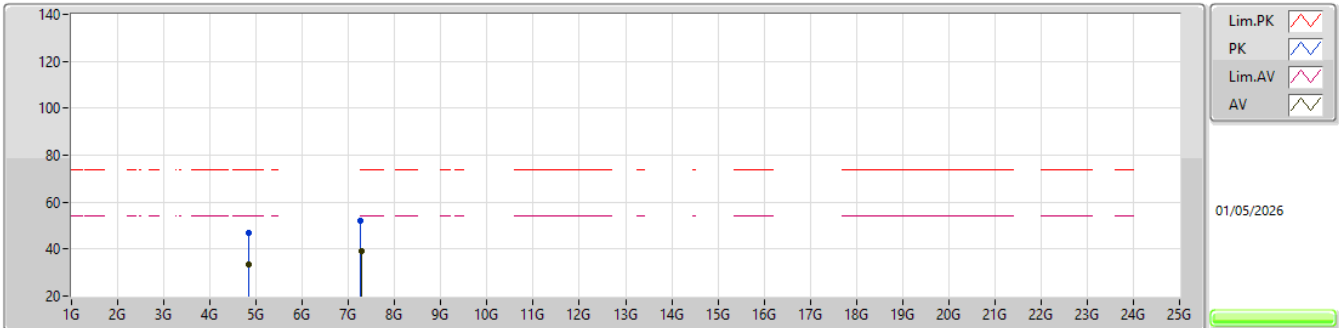


EUT_Y_4TX
 Setting 80
 03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.84084G	47.15	74.00	-26.85	41.86	3	Vertical	219	1.23	-	33.40	6.81	34.92				
AV	4.83524G	33.61	54.00	-20.39	28.32	3	Vertical	219	1.23	-	33.40	6.80	34.91				
PK	7.26768G	52.16	74.00	-21.84	41.94	3	Vertical	2	2.39	-	36.71	8.51	35.00				
AV	7.27168G	39.18	54.00	-14.82	28.93	3	Vertical	2	2.39	-	36.73	8.52	35.00				

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss1,(MCS0)_4TX

2422MHz_TX

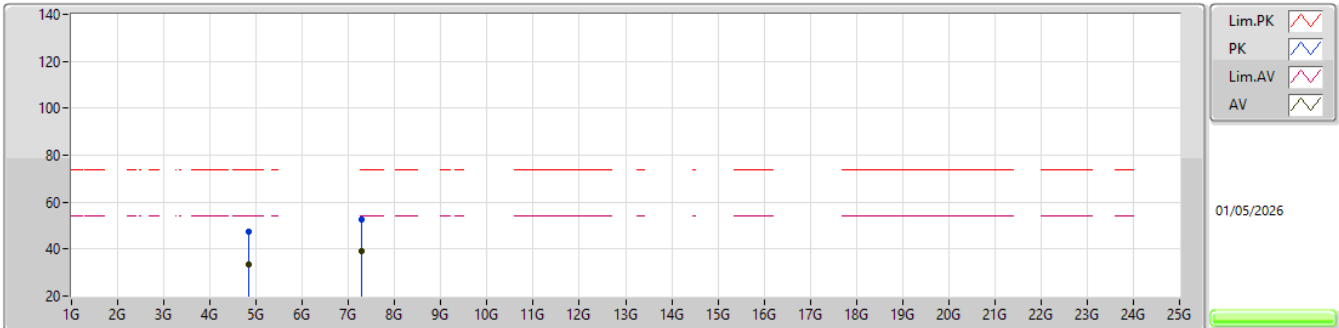


EUT_Y_4TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	4.84832G	47.23	74.00	-26.77	41.94	3	Horizontal	141	2.81	-	33.40	6.81	34.92				
AV	4.84396G	33.47	54.00	-20.53	28.18	3	Horizontal	141	2.81	-	33.40	6.81	34.92				
PK	7.2736G	52.40	74.00	-21.60	42.14	3	Horizontal	135	2.46	-	36.74	8.52	35.00				
AV	7.27112G	39.09	54.00	-14.91	28.85	3	Horizontal	135	2.46	-	36.73	8.51	35.00				

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss1,(MCS0)_4TX

2437MHz_TX

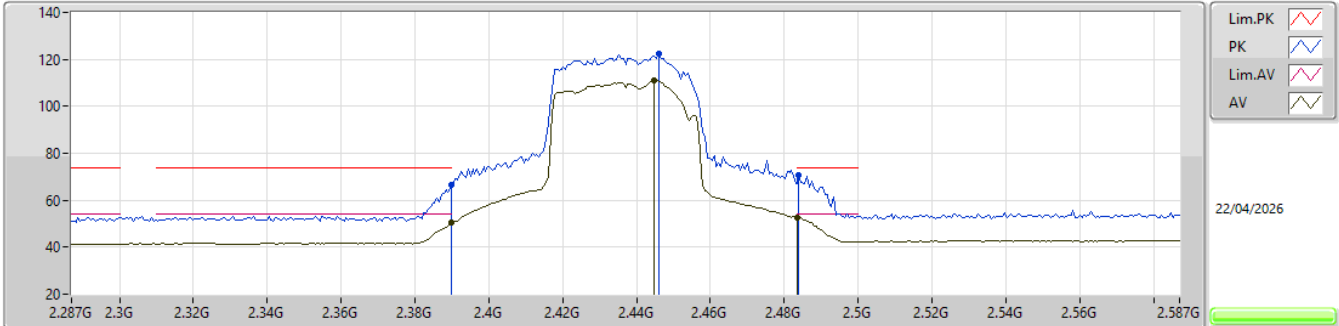


EUT_Y_4TX
Setting 80
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.39G	66.37	74.00	-7.63	65.12	3	Vertical	27.5	2.17	-	27.60	4.98	31.33			
AV	2.39G	50.31	54.00	-3.69	49.06	3	Vertical	27.5	2.17	-	27.60	4.98	31.33			
PK	2.446G	122.38	Inf	-Inf	120.91	3	Vertical	27.5	2.17	-	27.70	5.07	31.30			
AV	2.4448G	110.88	Inf	-Inf	109.42	3	Vertical	27.5	2.17	-	27.70	5.06	31.30			
PK	2.4838G	70.71	74.00	-3.29	68.93	3	Vertical	27.5	2.17	-	27.94	5.13	31.29			
AV	2.4835G	52.57	54.00	-1.43	50.79	3	Vertical	27.5	2.17	-	27.94	5.13	31.29			

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss1,(MCS0)_4TX

2437MHz_TX

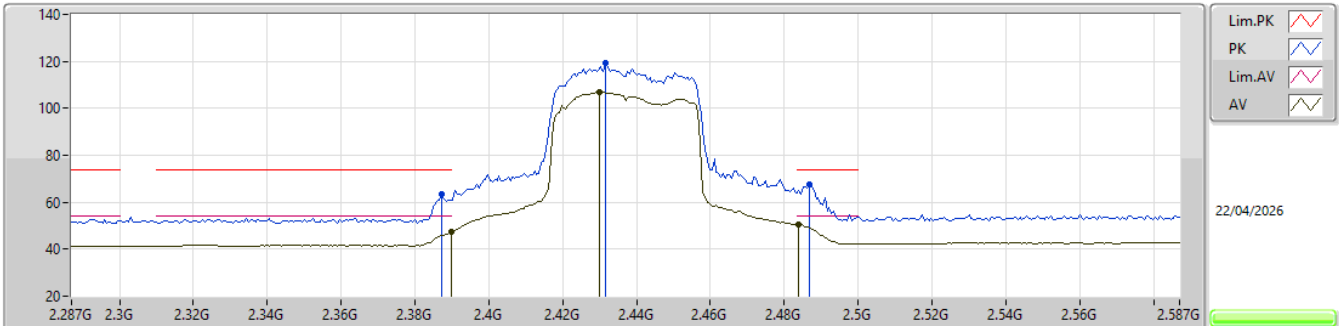


EUT Y_4TX
Setting 80
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3872G	63.46	74.00	-10.54	62.24	3	Horizontal	159	1.90	-	27.57	4.98	31.33			
AV	2.39G	47.60	54.00	-6.40	46.35	3	Horizontal	159	1.90	-	27.60	4.98	31.33			
PK	2.4316G	119.21	Inf	-Inf	117.78	3	Horizontal	159	1.90	-	27.70	5.04	31.31			
AV	2.4298G	106.72	Inf	-Inf	105.29	3	Horizontal	159	1.90	-	27.70	5.04	31.31			
PK	2.4868G	67.49	74.00	-6.51	65.68	3	Horizontal	159	1.90	-	27.97	5.13	31.29			
AV	2.4838G	50.55	54.00	-3.45	48.77	3	Horizontal	159	1.90	-	27.94	5.13	31.29			

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss1,(MCS0)_4TX

2437MHz_TX

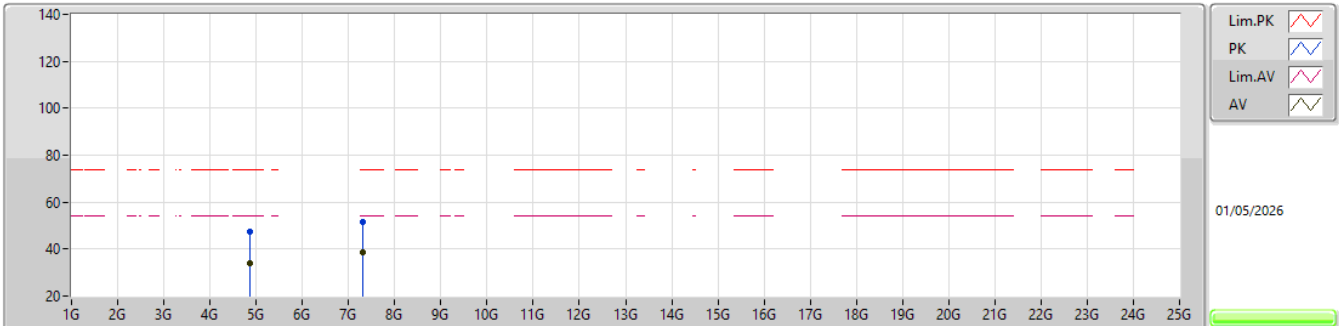


EUT_Y_4TX
Setting 80
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.87388G	47.17	74.00	-26.83	41.82	3	Vertical	293	2.48	-	33.45	6.82	34.92				
AV	4.87128G	33.81	54.00	-20.19	28.47	3	Vertical	293	2.48	-	33.44	6.82	34.92				
PK	7.31024G	51.52	74.00	-22.48	41.01	3	Vertical	291	2.87	-	36.94	8.56	34.99				
AV	7.31996G	38.61	54.00	-15.39	28.04	3	Vertical	291	2.87	-	36.98	8.57	34.98				

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss1,(MCS0)_4TX

2437MHz_TX

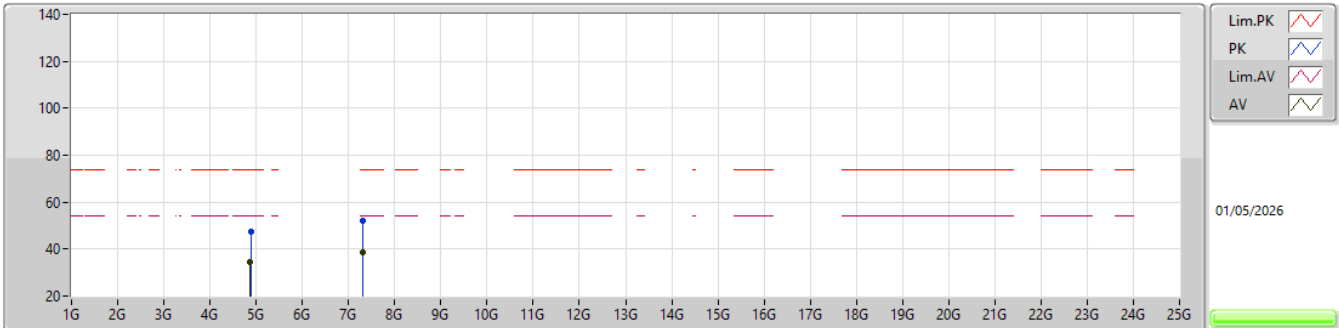


EUT_Y_4TX
Setting 80
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.87972G	47.24	74.00	-26.76	41.89	3	Horizontal	65	1.30	-	33.46	6.82	34.93				
AV	4.87096G	34.46	54.00	-19.54	29.12	3	Horizontal	65	1.30	-	33.44	6.82	34.92				
PK	7.3078G	52.08	74.00	-21.92	41.59	3	Horizontal	112	2.89	-	36.93	8.55	34.99				
AV	7.3208G	38.73	54.00	-15.27	28.16	3	Horizontal	112	2.89	-	36.98	8.57	34.98				

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss1,(MCS0)_4TX

2452MHz_TX

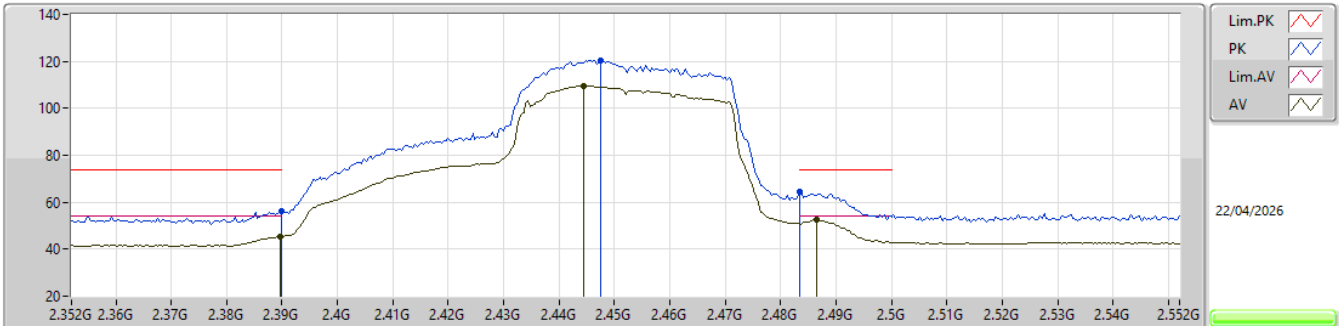


EUT_Y_4TX
Setting 70
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.39G	56.13	74.00	-17.87	54.88	3	Vertical	164	2.03	-	27.60	4.98	31.33
AV	2.3896G	45.35	54.00	-8.65	44.10	3	Vertical	164	2.03	-	27.60	4.98	31.33
PK	2.4476G	120.58	Inf	-Inf	119.11	3	Vertical	164	2.03	-	27.70	5.07	31.30
AV	2.4444G	109.59	Inf	-Inf	108.13	3	Vertical	164	2.03	-	27.70	5.06	31.30
PK	2.4835G	64.66	74.00	-9.34	62.88	3	Vertical	164	2.03	-	27.94	5.13	31.29
AV	2.4864G	52.45	54.00	-1.55	50.65	3	Vertical	164	2.03	-	27.96	5.13	31.29

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss1,(MCS0)_4TX

2452MHz_TX

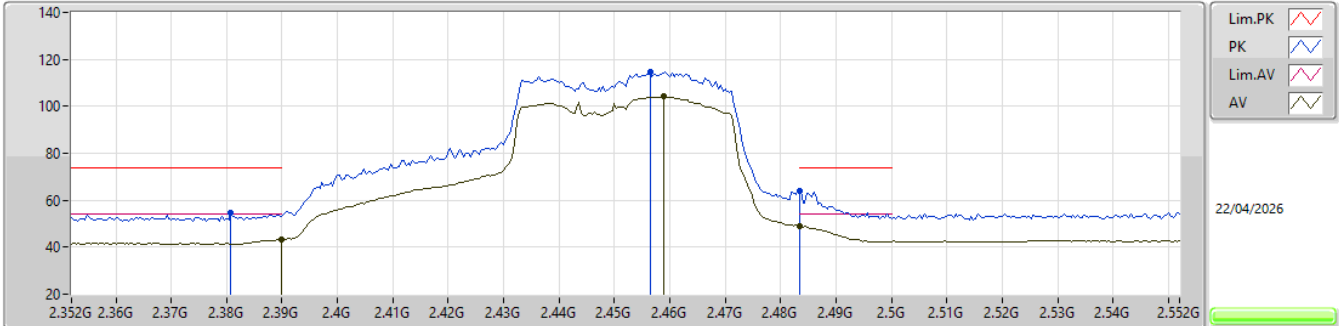


EUT_Y_4TX
Setting 70
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3808G	54.44	74.00	-19.56	53.29	3	Horizontal	158	1.89	-	27.51	4.97	31.33
AV	2.39G	43.27	54.00	-10.73	42.02	3	Horizontal	158	1.89	-	27.60	4.98	31.33
PK	2.4564G	114.55	Inf	-Inf	113.07	3	Horizontal	158	1.89	-	27.70	5.08	31.30
AV	2.4588G	104.16	Inf	-Inf	102.67	3	Horizontal	158	1.89	-	27.70	5.09	31.30
PK	2.4835G	63.71	74.00	-10.29	61.93	3	Horizontal	158	1.89	-	27.94	5.13	31.29
AV	2.4835G	48.78	54.00	-5.22	47.00	3	Horizontal	158	1.89	-	27.94	5.13	31.29

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss1,(MCS0)_4TX

2452MHz_TX

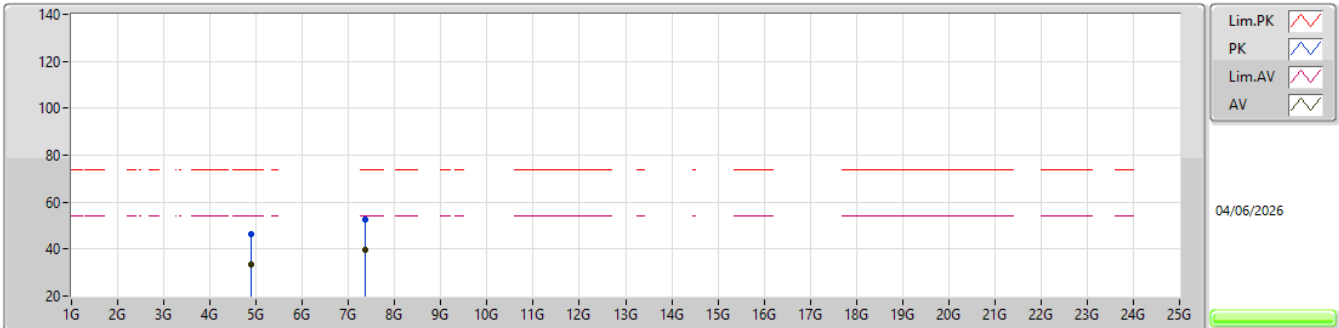


EUT_Y_4TX
Setting 70
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.89796G	46.52	74.00	-27.48	41.12	3	Vertical	143	2.63	-	33.50	6.83	34.93				
AV	4.89928G	33.40	54.00	-20.60	28.00	3	Vertical	143	2.63	-	33.50	6.83	34.93				
PK	7.35732G	52.63	74.00	-21.37	41.89	3	Vertical	24	2.12	-	37.10	8.61	34.97				
AV	7.35733G	39.87	54.00	-14.13	29.13	3	Vertical	24	2.12	-	37.10	8.61	34.97				

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss1,(MCS0)_4TX

2452MHz_TX

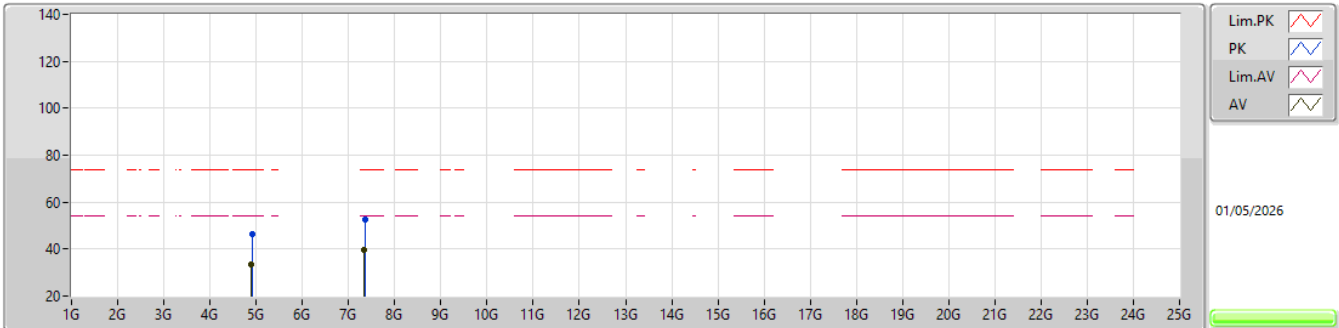


EUT_Y_4TX
Setting 70
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.91284G	46.38	74.00	-27.62	40.93	3	Horizontal	239	1.97	-	33.55	6.84	34.94				
AV	4.89944G	33.27	54.00	-20.73	27.87	3	Horizontal	239	1.97	-	33.50	6.83	34.93				
PK	7.35016G	52.83	74.00	-21.17	42.10	3	Horizontal	106	2.97	-	37.10	8.60	34.97				
AV	7.34664G	39.73	54.00	-14.27	29.02	3	Horizontal	106	2.97	-	37.09	8.59	34.97				

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss2,(MCS0)_4TX

2412MHz_TX

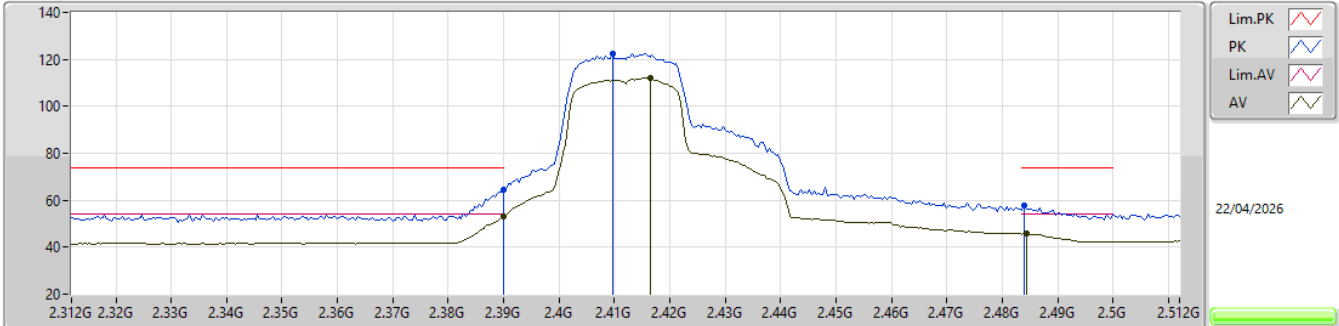


EUT_Y_4TX
Setting 89
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.39G	64.40	74.00	-9.60	63.15	3	Vertical	216	2.50	-	27.60	4.98	31.33
AV	2.39G	52.93	54.00	-1.07	51.68	3	Vertical	216	2.50	-	27.60	4.98	31.33
PK	2.4096G	122.66	Inf	-Inf	121.27	3	Vertical	216	2.50	-	27.70	5.01	31.32
AV	2.4164G	111.97	Inf	-Inf	110.57	3	Vertical	216	2.50	-	27.70	5.02	31.32
PK	2.484G	57.75	74.00	-16.25	55.97	3	Vertical	216	2.50	-	27.94	5.13	31.29
AV	2.4844G	45.85	54.00	-8.15	44.07	3	Vertical	216	2.50	-	27.94	5.13	31.29

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss2,(MCS0)_4TX

2412MHz_TX

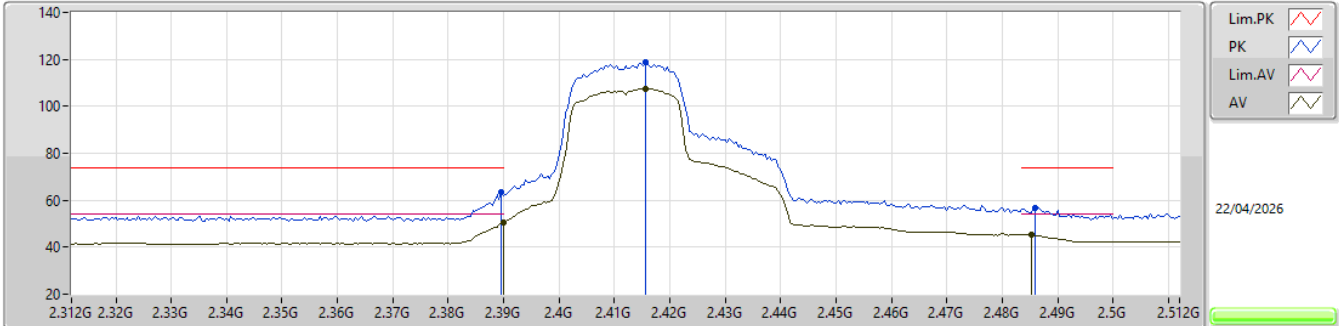


EUT_Y_4TX
Setting 89
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3896G	63.25	74.00	-10.75	62.00	3	Horizontal	155	1.70	-	27.60	4.98	31.33
AV	2.39G	50.31	54.00	-3.69	49.06	3	Horizontal	155	1.70	-	27.60	4.98	31.33
PK	2.4156G	118.92	Inf	-Inf	117.52	3	Horizontal	155	1.70	-	27.70	5.02	31.32
AV	2.4156G	107.55	Inf	-Inf	106.15	3	Horizontal	155	1.70	-	27.70	5.02	31.32
PK	2.486G	56.51	74.00	-17.49	54.71	3	Horizontal	155	1.70	-	27.96	5.13	31.29
AV	2.4852G	45.11	54.00	-8.89	43.32	3	Horizontal	155	1.70	-	27.95	5.13	31.29

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss2,(MCS0)_4TX

2412MHz_TX

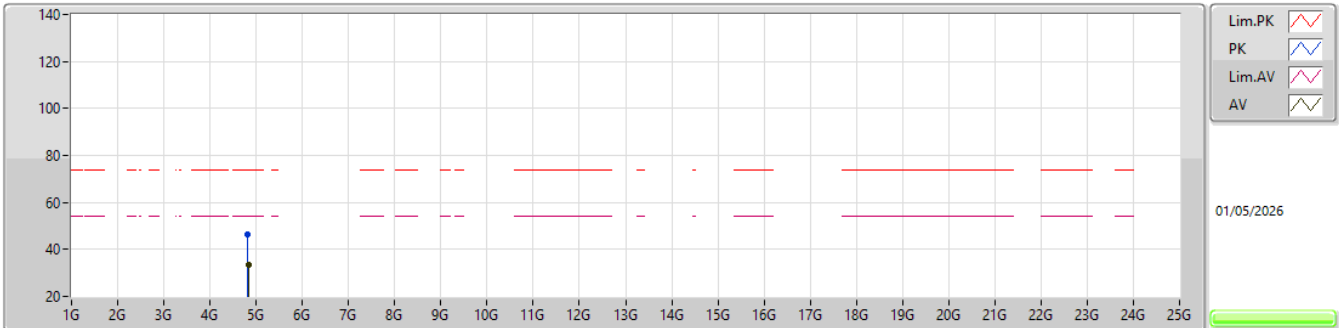


EUT_Y_4TX
Setting 89
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.81608G	46.50	74.00	-27.50	41.21	3	Vertical	254	1.02	-	33.40	6.80	34.91			
AV	4.82592G	33.40	54.00	-20.60	28.11	3	Vertical	254	1.02	-	33.40	6.80	34.91			

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss2,(MCS0)_4TX

2412MHz_TX

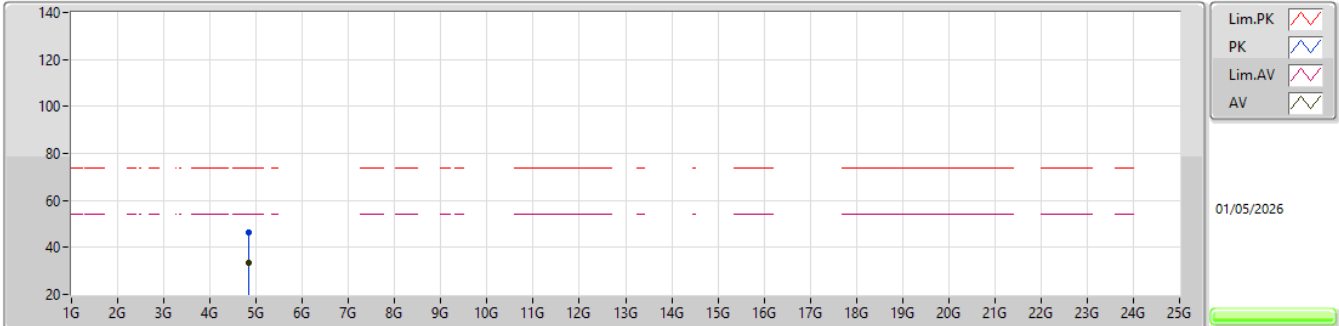


EUT_Y_4TX
Setting 89
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.82752G	46.42	74.00	-27.58	41.13	3	Horizontal	28	2.65	-	33.40	6.80	34.91			
AV	4.8334G	33.40	54.00	-20.60	28.11	3	Horizontal	28	2.65	-	33.40	6.80	34.91			

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss2,(MCS0)_4TX

2437MHz_TX

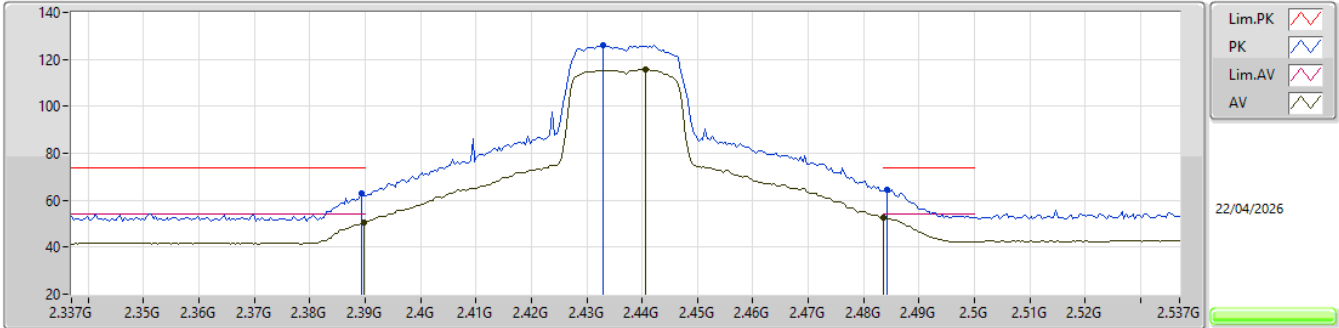


EUT_Y_4TX
Setting 102
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3894G	62.91	74.00	-11.09	61.67	3	Vertical	165	2.24	-	27.59	4.98	31.33			
AV	2.3898G	50.31	54.00	-3.69	49.06	3	Vertical	165	2.24	-	27.60	4.98	31.33			
PK	2.433G	125.94	Inf	-Inf	124.51	3	Vertical	165	2.24	-	27.70	5.04	31.31			
AV	2.4406G	115.70	Inf	-Inf	114.24	3	Vertical	165	2.24	-	27.70	5.06	31.30			
PK	2.4842G	64.52	74.00	-9.48	62.74	3	Vertical	165	2.24	-	27.94	5.13	31.29			
AV	2.4835G	52.83	54.00	-1.17	51.05	3	Vertical	165	2.24	-	27.94	5.13	31.29			

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss2,(MCS0)_4TX

2437MHz_TX

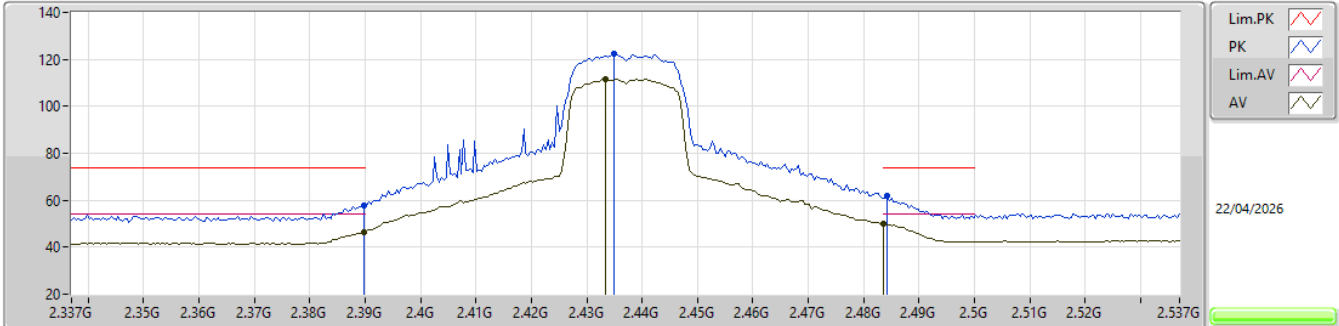


EUT_Y_4TX
Setting 102
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3898G	57.84	74.00	-16.16	56.59	3	Horizontal	158	1.76	-	27.60	4.98	31.33			
AV	2.3898G	46.55	54.00	-7.45	45.30	3	Horizontal	158	1.76	-	27.60	4.98	31.33			
PK	2.435G	122.36	Inf	-Inf	120.92	3	Horizontal	158	1.76	-	27.70	5.05	31.31			
AV	2.4334G	111.58	Inf	-Inf	110.14	3	Horizontal	158	1.76	-	27.70	5.05	31.31			
PK	2.4842G	61.87	74.00	-12.13	60.09	3	Horizontal	158	1.76	-	27.94	5.13	31.29			
AV	2.4835G	50.03	54.00	-3.97	48.25	3	Horizontal	158	1.76	-	27.94	5.13	31.29			

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss2,(MCS0)_4TX

2437MHz_TX

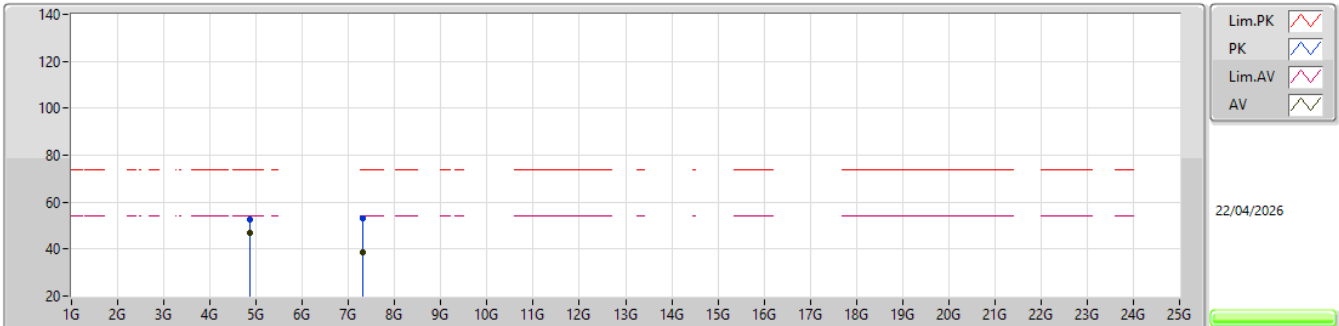


EUT_Y_4TX
Setting 102
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.87412G	52.62	74.00	-21.38	47.27	3	Vertical	57	1.68	-	33.45	6.82	34.92				
AV	4.87408G	47.14	54.00	-6.86	41.79	3	Vertical	57	1.68	-	33.45	6.82	34.92				
PK	7.30412G	53.02	74.00	-20.98	42.54	3	Vertical	192	1.80	-	36.92	8.55	34.99				
AV	7.32048G	38.59	54.00	-15.41	28.02	3	Vertical	192	1.80	-	36.98	8.57	34.98				

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss2,(MCS0)_4TX

2437MHz_TX

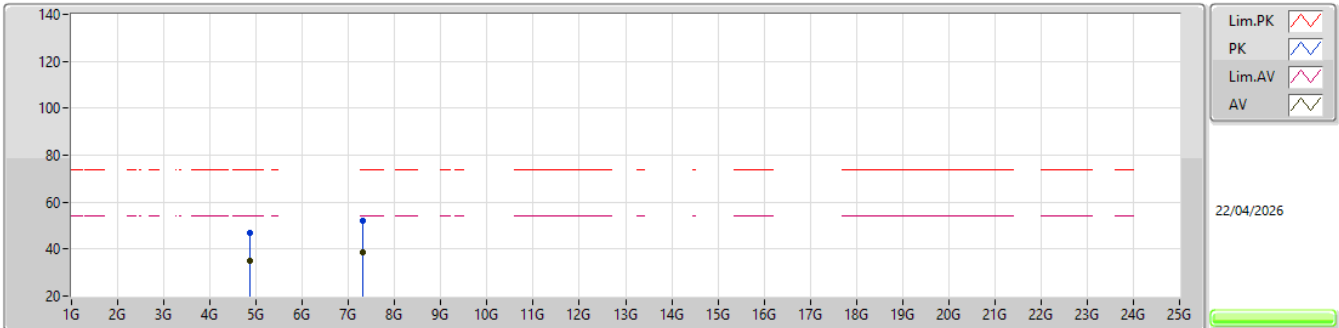


EUT_Y_4TX
Setting 102
02-R-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.87436G	47.06	74.00	-26.94	41.71	3	Horizontal	64	2.19	-	33.45	6.82	34.92				
AV	4.87452G	35.05	54.00	-18.95	29.70	3	Horizontal	64	2.19	-	33.45	6.82	34.92				
PK	7.31032G	51.88	74.00	-22.12	41.37	3	Horizontal	27	2.32	-	36.94	8.56	34.99				
AV	7.3202G	38.66	54.00	-15.34	28.09	3	Horizontal	27	2.32	-	36.98	8.57	34.98				

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss2,(MCS0)_4TX

2462MHz_TX

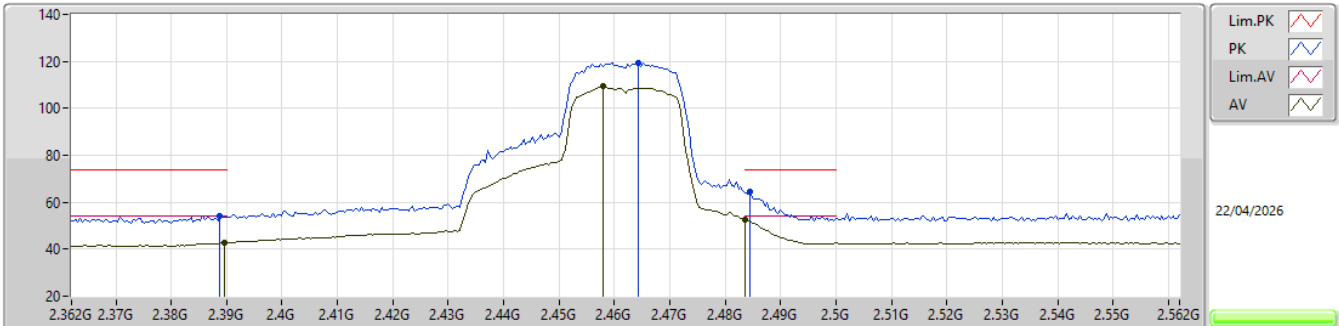


EUT_Y_4TX
Setting 80
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3888G	54.10	74.00	-19.90	52.86	3	Vertical	325	2.15	-	27.59	4.98	31.33			
AV	2.3896G	42.71	54.00	-11.29	41.46	3	Vertical	325	2.15	-	27.60	4.98	31.33			
PK	2.4644G	119.14	Inf	-Inf	117.59	3	Vertical	325	2.15	-	27.74	5.10	31.29			
AV	2.458G	109.57	Inf	-Inf	108.08	3	Vertical	325	2.15	-	27.70	5.09	31.30			
PK	2.4844G	64.35	74.00	-9.65	62.57	3	Vertical	325	2.15	-	27.94	5.13	31.29			
AV	2.4835G	52.70	54.00	-1.30	50.92	3	Vertical	325	2.15	-	27.94	5.13	31.29			

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss2,(MCS0)_4TX

2462MHz_TX

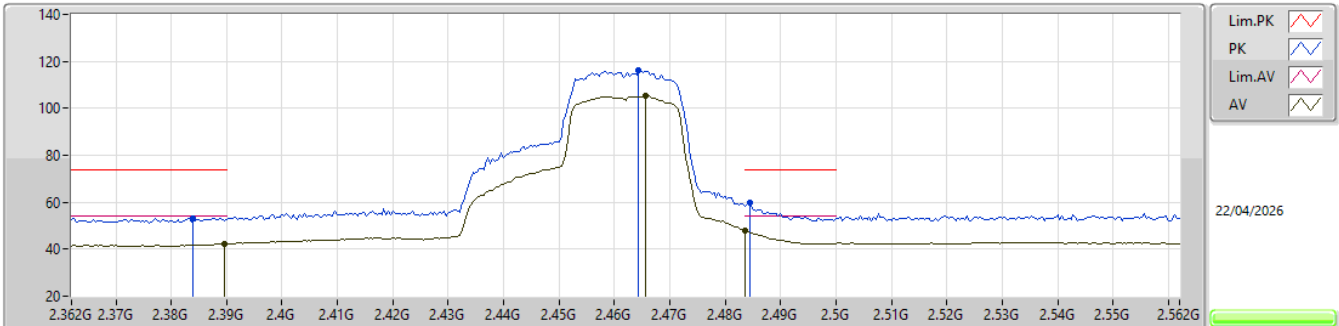


EUT_Y_4TX
Setting 80
02-R-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.384G	53.34	74.00	-20.66	52.15	3	Horizontal	160	2.13	-	27.54	4.98	31.33
AV	2.3896G	42.31	54.00	-11.69	41.06	3	Horizontal	160	2.13	-	27.60	4.98	31.33
PK	2.4644G	115.95	Inf	-Inf	114.40	3	Horizontal	160	2.13	-	27.74	5.10	31.29
AV	2.4656G	105.26	Inf	-Inf	103.69	3	Horizontal	160	2.13	-	27.76	5.10	31.29
PK	2.4844G	59.65	74.00	-14.35	57.87	3	Horizontal	160	2.13	-	27.94	5.13	31.29
AV	2.4835G	47.68	54.00	-6.32	45.90	3	Horizontal	160	2.13	-	27.94	5.13	31.29

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss2,(MCS0)_4TX

2462MHz_TX

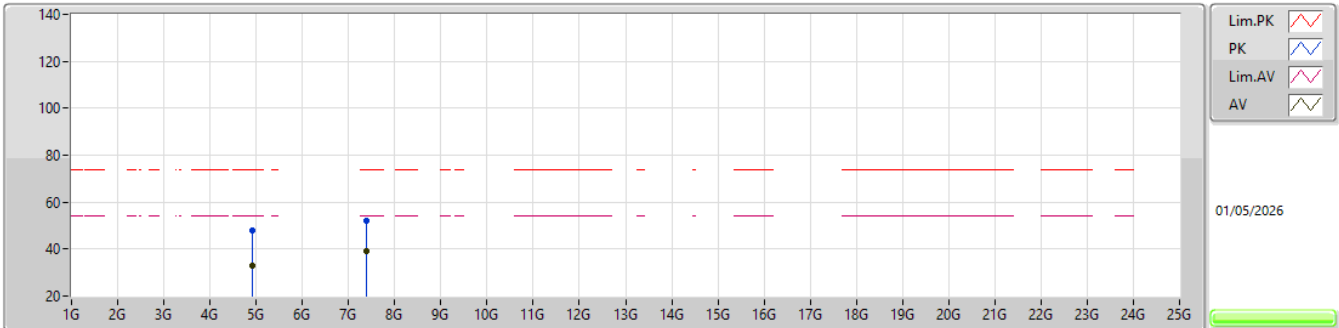


EUT_Y_4TX
Setting 80
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.92888G	47.75	74.00	-26.25	42.23	3	Vertical	328	2.84	-	33.62	6.84	34.94				
AV	4.92828G	33.14	54.00	-20.86	27.63	3	Vertical	328	2.84	-	33.61	6.84	34.94				
PK	7.37968G	52.02	74.00	-21.98	41.25	3	Vertical	79	2.22	-	37.10	8.63	34.96				
AV	7.3912G	39.25	54.00	-14.75	28.46	3	Vertical	79	2.22	-	37.10	8.64	34.95				

2.4-2.4835GHz_802.11 bn UHR20-BF_Nss2,(MCS0)_4TX

2462MHz_TX

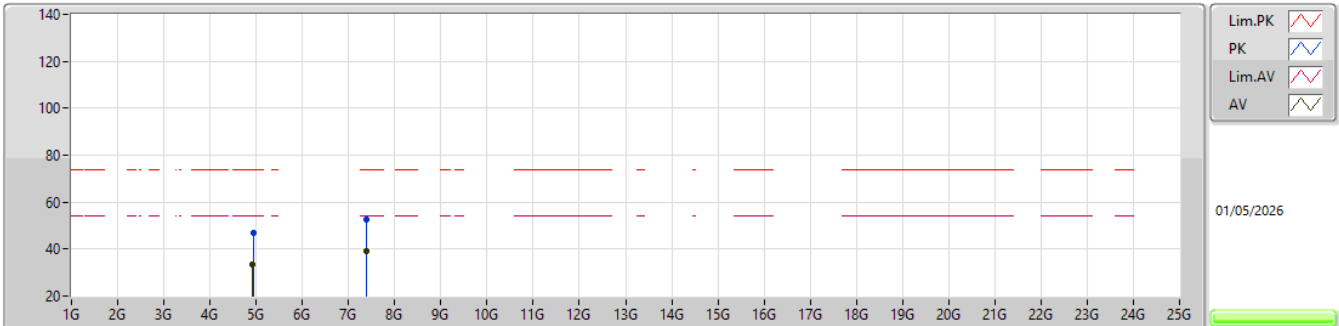


EUT_Y_4TX
Setting 80
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.93168G	46.75	74.00	-27.25	41.22	3	Horizontal	349	2.44	-	33.63	6.84	34.94			
AV	4.9284G	33.23	54.00	-20.77	27.72	3	Horizontal	349	2.44	-	33.61	6.84	34.94			
PK	7.38824G	52.75	74.00	-21.25	41.96	3	Horizontal	271	2.36	-	37.10	8.64	34.95			
AV	7.39352G	39.28	54.00	-14.72	28.49	3	Horizontal	271	2.36	-	37.10	8.64	34.95			

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss2,(MCS0)_4TX

2422MHz_TX

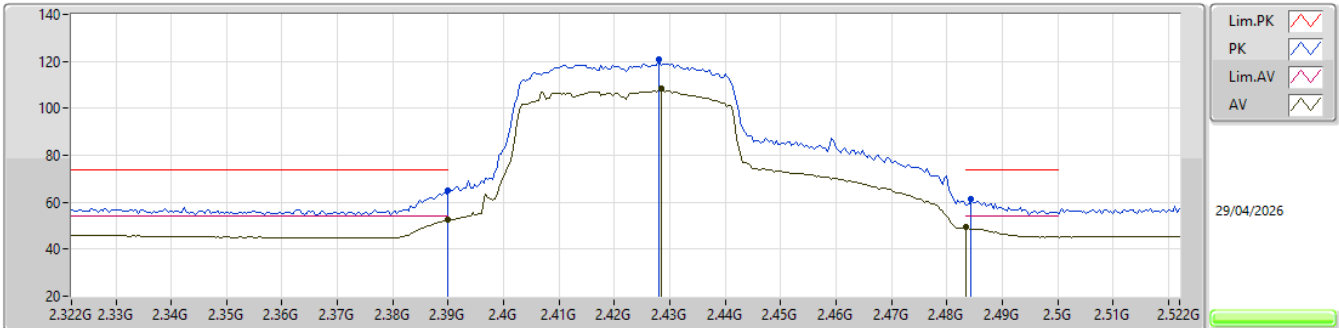


EUT_Y_4TX
Setting 80
04-C-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.39G	64.81	74.00	-9.19	31.48	3	Vertical	174.5	1.60	-	27.60	5.73	-
AV	2.39G	52.83	54.00	-1.17	19.50	3	Vertical	174.5	1.60	-	27.60	5.73	-
PK	2.428G	120.65	Inf	-Inf	87.29	3	Vertical	174.5	1.60	-	27.58	5.78	-
AV	2.4284G	108.28	Inf	-Inf	74.92	3	Vertical	174.5	1.60	-	27.58	5.78	-
PK	2.4844G	61.51	74.00	-12.49	28.06	3	Vertical	174.5	1.60	-	27.60	5.85	-
AV	2.4835G	49.42	54.00	-4.58	15.98	3	Vertical	174.5	1.60	-	27.60	5.84	-

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss2,(MCS0)_4TX

2422MHz_TX

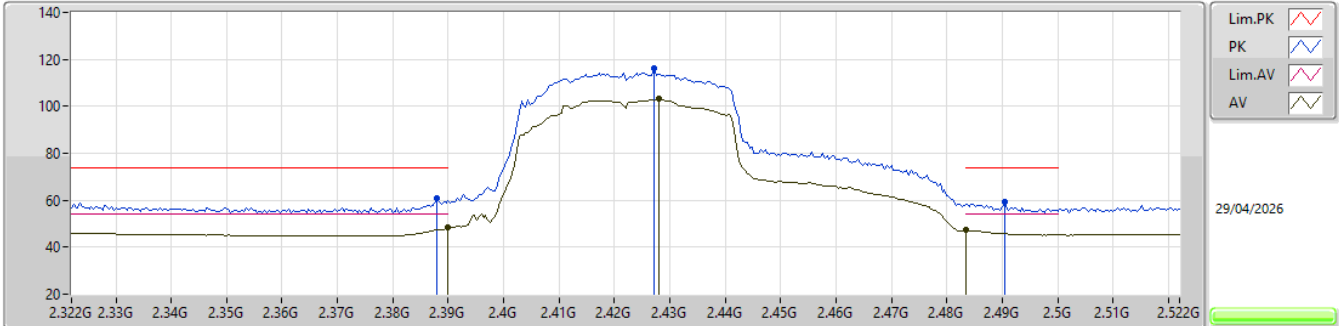


EUT_Y_4TX
Setting 80
04-C-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
AV	2.39G	48.55	54.00	-5.45	15.22	3	Horizontal	202	1.80	-	27.60	5.73	-			
PK	2.388G	60.66	74.00	-13.34	27.35	3	Horizontal	202	1.80	-	27.58	5.73	-			
AV	2.428G	103.28	Inf	-Inf	69.92	3	Horizontal	202	1.80	-	27.58	5.78	-			
PK	2.4272G	116.07	Inf	-Inf	82.73	3	Horizontal	202	1.80	-	27.57	5.77	-			
AV	2.4835G	47.51	54.00	-6.49	14.07	3	Horizontal	202	1.80	-	27.60	5.84	-			
PK	2.4904G	59.11	74.00	-14.89	25.66	3	Horizontal	202	1.80	-	27.60	5.85	-			

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss2,(MCS0)_4TX

2422MHz_TX

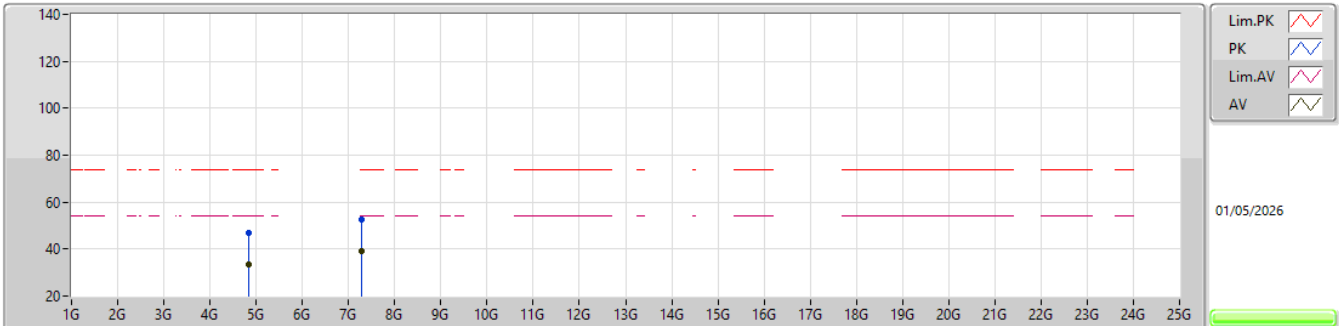


EUT_Y_4TX
Setting 80
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.84608G	46.74	74.00	-27.26	41.45	3	Vertical	131	1.50	-	33.40	6.81	34.92				
AV	4.83552G	33.36	54.00	-20.64	28.07	3	Vertical	131	1.50	-	33.40	6.80	34.91				
PK	7.27508G	52.72	74.00	-21.28	42.45	3	Vertical	184	2.45	-	36.75	8.52	35.00				
AV	7.27324G	39.14	54.00	-14.86	28.88	3	Vertical	184	2.45	-	36.74	8.52	35.00				

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss2,(MCS0)_4TX

2422MHz_TX

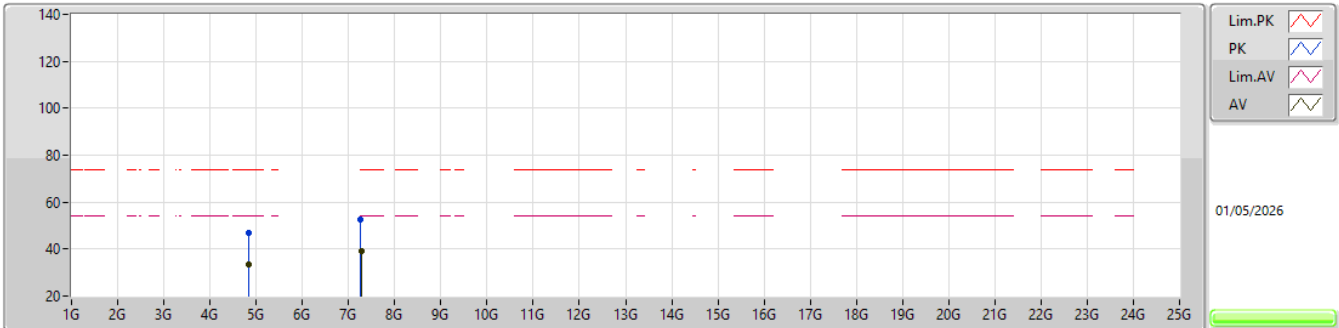


EUT_Y_4TX
Setting 80
03-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	4.84136G	47.14	74.00	-26.86	41.85	3	Horizontal	150	2.62	-	33.40	6.81	34.92				
AV	4.83532G	33.45	54.00	-20.55	28.16	3	Horizontal	150	2.62	-	33.40	6.80	34.91				
PK	7.2646G	52.40	74.00	-21.60	42.20	3	Horizontal	208	1.04	-	36.69	8.51	35.00				
AV	7.27268G	39.05	54.00	-14.95	28.79	3	Horizontal	208	1.04	-	36.74	8.52	35.00				

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss2,(MCS0)_4TX

2437MHz_TX

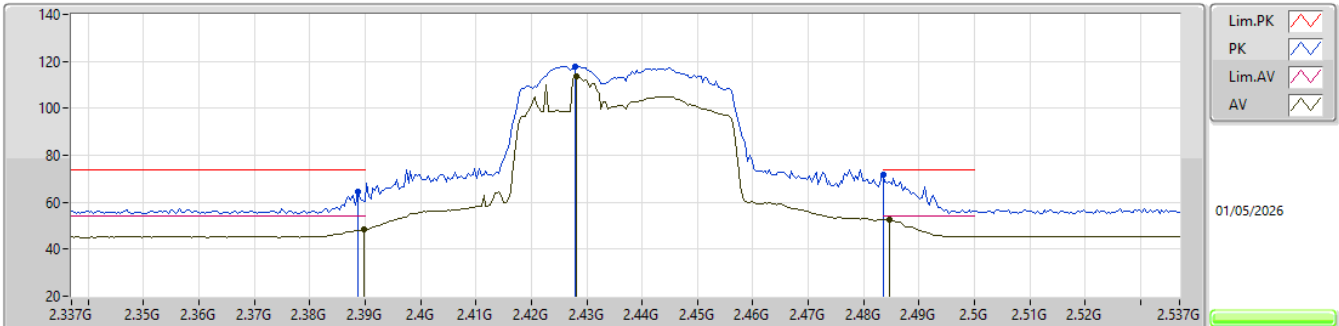


EUT_Y_4TX
Setting 81
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3886G	64.24	74.00	-9.76	31.63	3	Vertical	98	1.48	-	28.40	4.21	-			
AV	2.3898G	48.26	54.00	-5.74	15.65	3	Vertical	98	1.48	-	28.40	4.21	-			
PK	2.4278G	117.95	Inf	-Inf	85.31	3	Vertical	98	1.48	-	28.40	4.24	-			
AV	2.4282G	113.80	Inf	-Inf	81.16	3	Vertical	98	1.48	-	28.40	4.24	-			
PK	2.4835G	71.82	74.00	-2.18	39.00	3	Vertical	98	1.48	-	28.54	4.28	-			
AV	2.4846G	52.77	54.00	-1.23	19.94	3	Vertical	98	1.48	-	28.55	4.28	-			

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss2,(MCS0)_4TX

2437MHz_TX

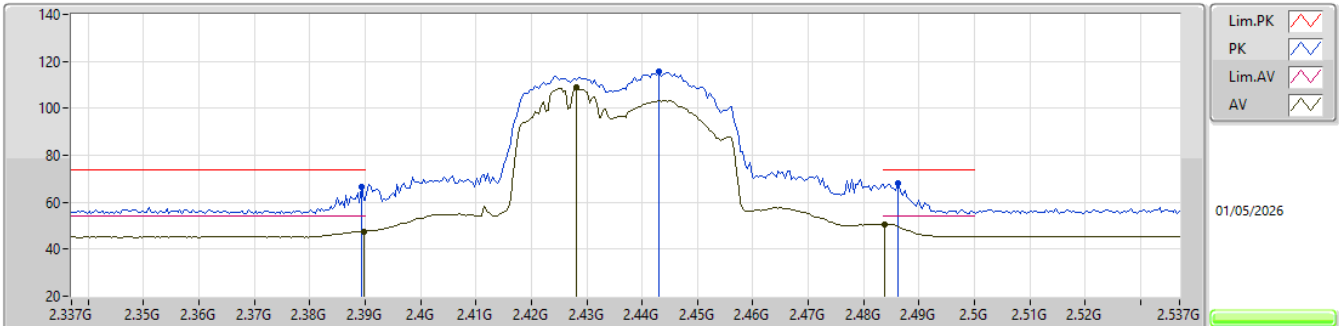


EUT_Y_4TX
Setting 81
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3894G	66.41	74.00	-7.59	33.80	3	Horizontal	236	2.26	-	28.40	4.21	-			
AV	2.3898G	47.62	54.00	-6.38	15.01	3	Horizontal	236	2.26	-	28.40	4.21	-			
PK	2.443G	115.90	Inf	-Inf	83.25	3	Horizontal	236	2.26	-	28.40	4.25	-			
AV	2.4282G	108.97	Inf	-Inf	76.33	3	Horizontal	236	2.26	-	28.40	4.24	-			
PK	2.4862G	68.02	74.00	-5.98	35.18	3	Horizontal	236	2.26	-	28.56	4.28	-			
AV	2.4838G	50.69	54.00	-3.31	17.87	3	Horizontal	236	2.26	-	28.54	4.28	-			

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss2,(MCS0)_4TX

2437MHz_TX

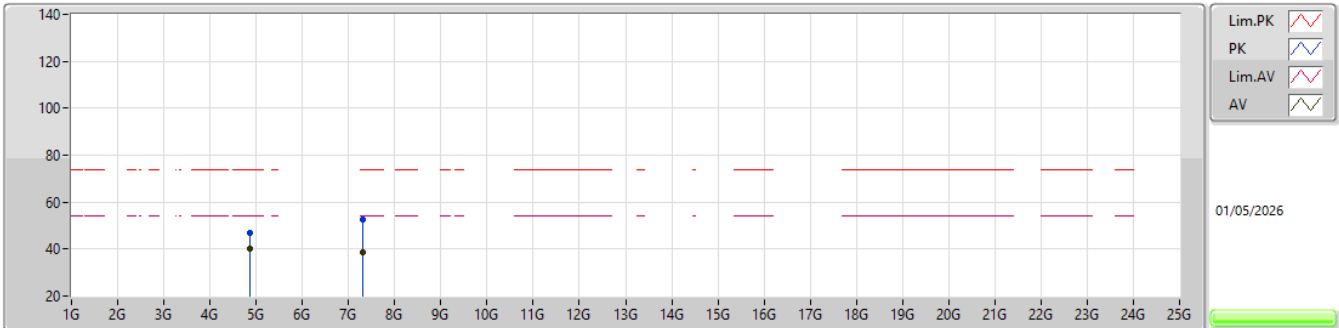


EUT_Y_4TX
Setting 81
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	4.87672G	47.03	74.00	-26.97	41.69	3	Vertical	71	1.64	-	33.45	6.82	34.93			
AV	4.874G	40.06	54.00	-13.94	34.71	3	Vertical	71	1.64	-	33.45	6.82	34.92			
PK	7.305G	52.75	74.00	-21.25	42.27	3	Vertical	357	1.26	-	36.92	8.55	34.99			
AV	7.32092G	38.64	54.00	-15.36	28.07	3	Vertical	357	1.26	-	36.98	8.57	34.98			

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss2,(MCS0)_4TX

2437MHz_TX

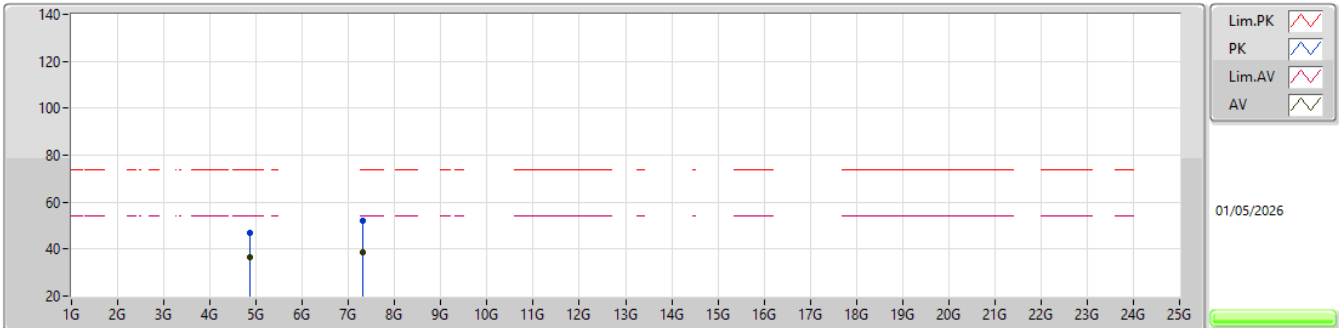


EUT_Y_4TX
Setting 81
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.86864G	46.67	74.00	-27.33	41.33	3	Horizontal	127	1.99	-	33.44	6.82	34.92				
AV	4.87432G	36.60	54.00	-17.40	31.25	3	Horizontal	127	1.99	-	33.45	6.82	34.92				
PK	7.30604G	52.04	74.00	-21.96	41.56	3	Horizontal	116	1.96	-	36.92	8.55	34.99				
AV	7.32064G	38.60	54.00	-15.40	28.03	3	Horizontal	116	1.96	-	36.98	8.57	34.98				

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss2,(MCS0)_4TX

2452MHz_TX

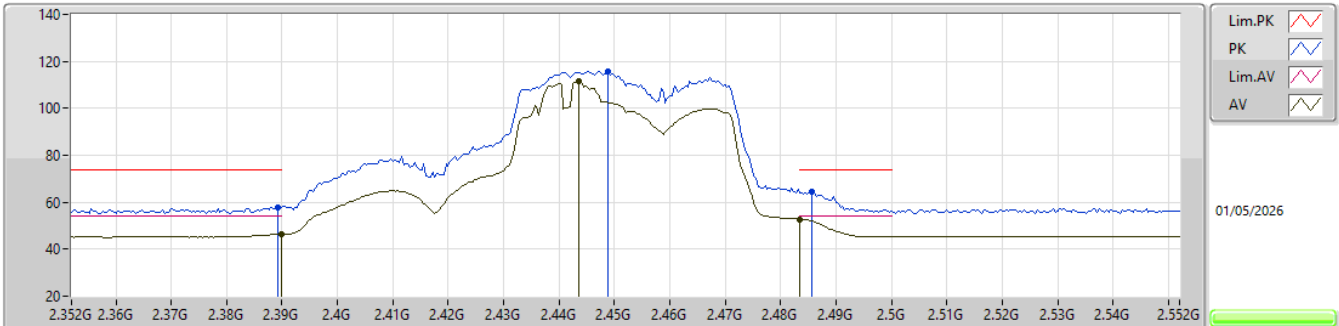


EUT_Y_4TX
Setting 71
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3892G	57.68	74.00	-16.32	25.07	3	Vertical	43	1.80	-	28.40	4.21	-
AV	2.39G	46.35	54.00	-7.65	13.74	3	Vertical	43	1.80	-	28.40	4.21	-
PK	2.4488G	115.88	Inf	-Inf	83.22	3	Vertical	43	1.80	-	28.40	4.26	-
AV	2.4436G	111.49	Inf	-Inf	78.84	3	Vertical	43	1.80	-	28.40	4.25	-
PK	2.4856G	64.59	74.00	-9.41	31.75	3	Vertical	43	1.80	-	28.56	4.28	-
AV	2.4835G	52.50	54.00	-1.50	19.68	3	Vertical	43	1.80	-	28.54	4.28	-

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss2,(MCS0)_4TX

2452MHz_TX

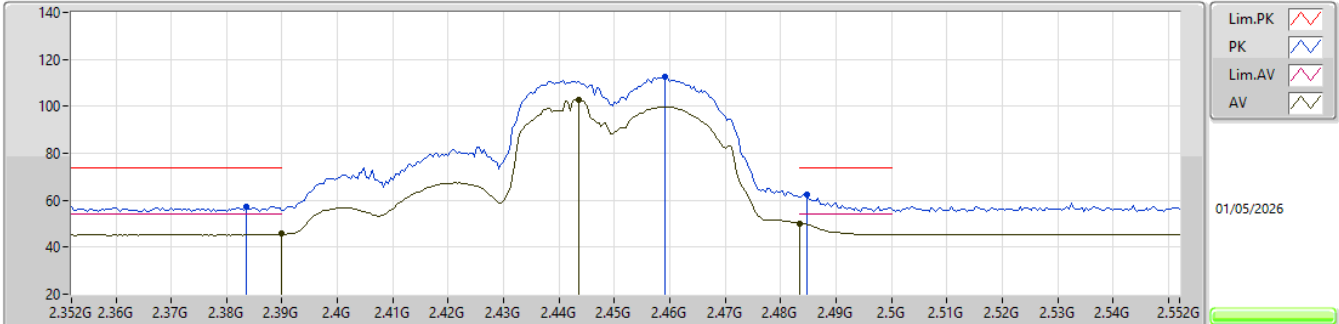


EUT_Y_4TX
Setting 71
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	2.3836G	57.43	74.00	-16.57	24.83	3	Horizontal	233	2.15	-	28.40	4.20	-			
AV	2.39G	45.65	54.00	-8.35	13.04	3	Horizontal	233	2.15	-	28.40	4.21	-			
PK	2.4592G	112.70	Inf	-Inf	79.95	3	Horizontal	233	2.15	-	28.49	4.26	-			
AV	2.4436G	102.63	Inf	-Inf	69.98	3	Horizontal	233	2.15	-	28.40	4.25	-			
PK	2.4848G	62.35	74.00	-11.65	29.52	3	Horizontal	233	2.15	-	28.55	4.28	-			
AV	2.4835G	50.01	54.00	-3.99	17.19	3	Horizontal	233	2.15	-	28.54	4.28	-			

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss2,(MCS0)_4TX

2452MHz_TX

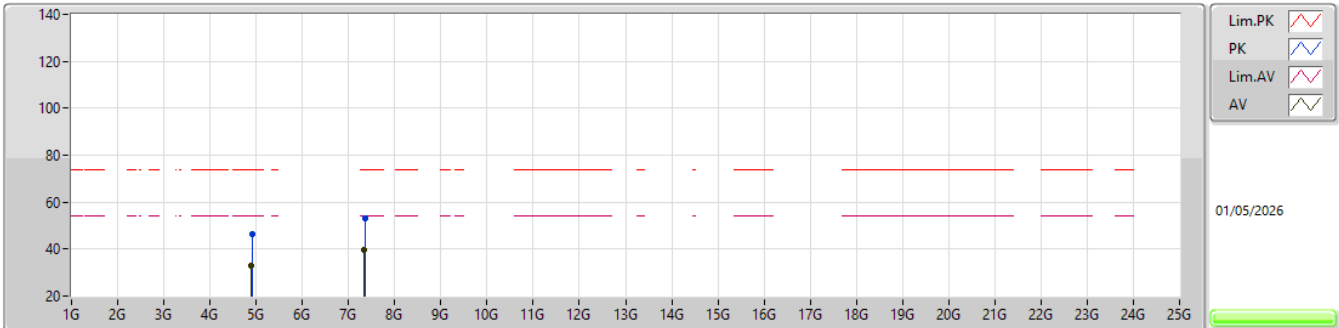


EUT_Y_4TX
Setting 71
03-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.91112G	46.31	74.00	-27.69	40.88	3	Vertical	155	1.90	-	33.54	6.83	34.94				
AV	4.89688G	33.17	54.00	-20.83	27.78	3	Vertical	155	1.90	-	33.49	6.83	34.93				
PK	7.3588G	53.14	74.00	-20.86	42.40	3	Vertical	146	1.89	-	37.10	8.61	34.97				
AV	7.34668G	39.59	54.00	-14.41	28.88	3	Vertical	146	1.89	-	37.09	8.59	34.97				

2.4-2.4835GHz_802.11 bn UHR40-BF_Nss2,(MCS0)_4TX

2452MHz_TX

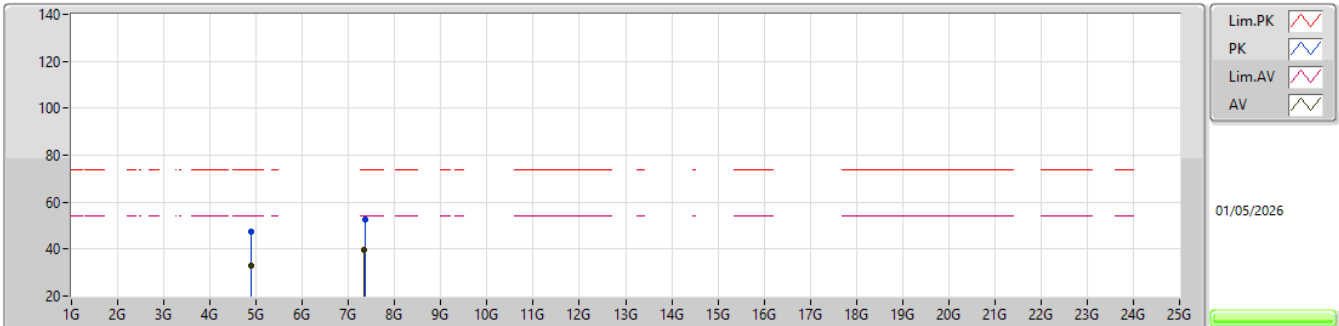

EUT_Y_4TX
Setting 71
03-D-G-5


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	4.89772G	47.50	74.00	-26.50	42.10	3	Horizontal	31	2.67	-	33.50	6.83	34.93				
AV	4.89588G	33.11	54.00	-20.89	27.72	3	Horizontal	31	2.67	-	33.49	6.83	34.93				
PK	7.35168G	52.68	74.00	-21.32	41.95	3	Horizontal	290	1.11	-	37.10	8.60	34.97				
AV	7.3462G	39.60	54.00	-14.40	28.90	3	Horizontal	290	1.11	-	37.08	8.59	34.97				



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	AV	8.07339G	49.79	54.00	-4.21	Vertical


Radiated Emissions above 1GHz_Mode 1

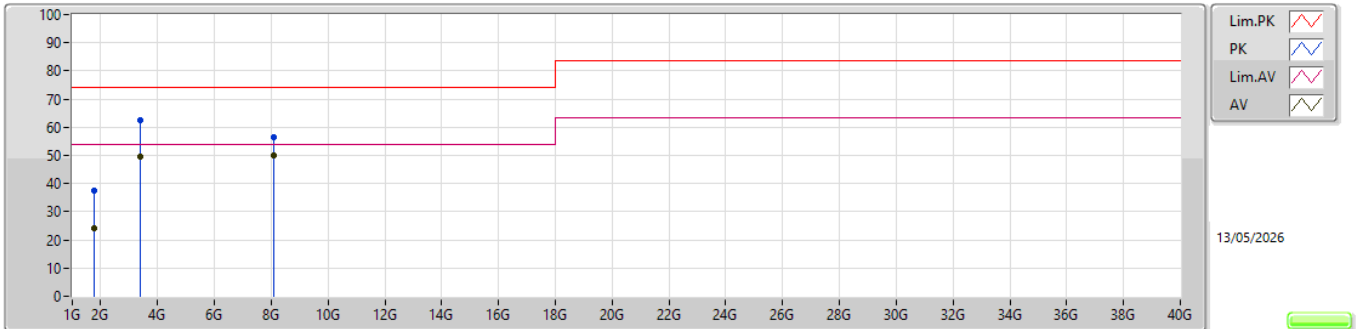

EUT Y
Power AC120V/60Hz
06-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
PK	1.75942G	37.36	74.00	-36.64	-3.81	3	Vertical	240	1.84	-	41.17	25.20	3.96	32.97		
AV	1.76109G	24.09	54.00	-29.91	-3.82	3	Vertical	240	1.84	-	27.91	25.19	3.96	32.97		
PK	3.37519G	62.71	74.00	-11.29	0.55	3	Vertical	172	1.96	-	62.16	28.25	5.76	33.46		
AV	3.37664G	49.49	54.00	-4.51	0.56	3	Vertical	172	1.96	-	48.93	28.25	5.77	33.46		
PK	8.07342G	56.66	74.00	-17.34	12.66	3	Vertical	163	1.36	-	44.00	37.30	9.02	33.66		
AV	8.07339G	49.79	54.00	-4.21	12.66	3	Vertical	163	1.36	"Worst"	37.13	37.30	9.02	33.66		

Radiated Emissions above 1GHz_Mode 1

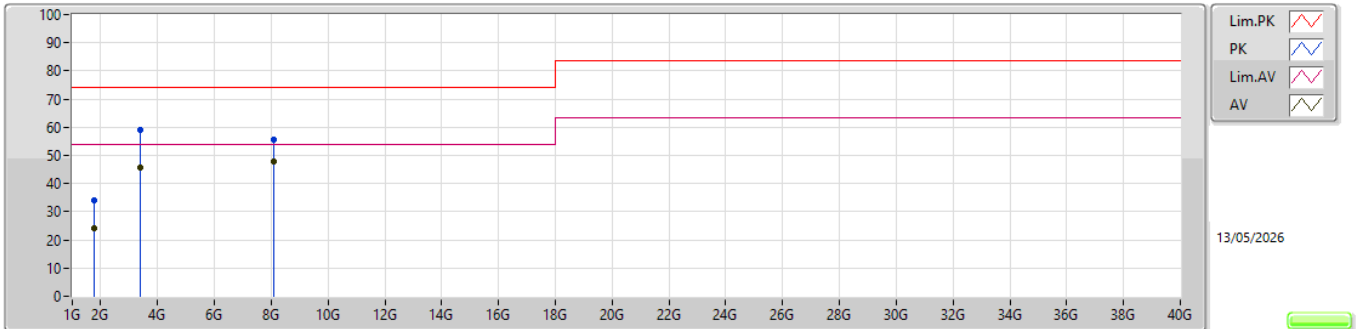

EUT Y
Power AC120V/60Hz
06-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
PK	1.75927G	34.25	74.00	-39.75	-3.81	3	Horizontal	285	1.89	-	38.06	25.20	3.96	32.97		
AV	1.76145G	23.96	54.00	-30.04	-3.82	3	Horizontal	285	1.89	-	27.78	25.19	3.96	32.97		
PK	3.37754G	58.91	74.00	-15.09	0.55	3	Horizontal	201	1.75	-	58.36	28.24	5.77	33.46		
AV	3.37578G	45.52	54.00	-8.48	0.56	3	Horizontal	201	1.75	-	44.96	28.25	5.77	33.46		
PK	8.07342G	55.77	74.00	-18.23	12.66	3	Horizontal	304	1.12	-	43.11	37.30	9.02	33.66		
AV	8.07338G	47.87	54.00	-6.13	12.66	3	Horizontal	304	1.12	"Worst"	35.21	37.30	9.02	33.66		