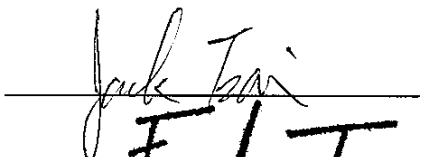



EXHIBIT B

Test Report

Report No.	C0915217
Specifications	FCC Part 15, Class B
Test Method	ANSI C63.4 1992
Applicant address	16F, No. 75 Hsin Tai Wu RD., Sec. 1 Bldg #A Hsi-Chih, Taipei Hsien, Taiwan
Applicant	CIS TECHNOLOGY INC.
Items tested	Centillium Optimizer USB ADSL Modem
Model No.	WS-AD15USE (Sample # C09217)
Results	Compliance (As detailed within this report)
Sample received date	01/18/2000 (month / day / year)
Prepared by	 project engineer
Authorized by	 General Manager (Frank Tsai)
Issue date	Feb. 19, 2000 (month / day / year)
Modifications	Appendix C
Tested by	Training Research Co., Ltd.
Office at	2, Lane 194, Huan-Ho Street, Hsichih, Taipei Hsien 221, Taiwan
Open site at	No. 15, Lane 530, Pa-Lian RD., Sec. 1, Hsichih City, Taipei Hsien, Taiwan, R.O.C.

Conditions of issue:

- (1) **This test report shall not be reproduced except in full, without written approval of TRC. And the test result contained within this report only relate to the sample submitted for testing.**
- (2) **This report must not be used by the client to claim product endorsement by NVLAP or any agency of U.S. Government.**

★ **FCC ID: L4OWSAD15USE**

Report No.: C0915217, Optimizer USB ADSL Modem, FCC Part 15, Class B

Test date: 02/16/2000, Training Research Co., Ltd., TEL: 886-2-26935155, Fax: 886-2-26934440

Contents

Chapter 1 Introduction

Description of EUT	3
Configuration of Test Setup	4
List of Support Equipment	5

Chapter 2 Conducted Emission Test

Test Condition and Setup	7
Conducted Test Placement	8

Chapter 3 Radiated Emission Test

Test Condition and Setup	9
Radiated Test Placement	10

Appendix A:

Conducted test result	11
-----------------------------	----

Appendix B:

Radiated test result	12
----------------------------	----

Appendix C:

List of Modifications	14
-----------------------------	----

Chapter 1 Introduction

Description of EUT:

This ADSL modem is a data communication device. It is designed to connect with the USB port of personal computer and makes your data equipment available to transmit and receive data via the public telephone network.

Connections of EUT:

- (1) The USB port of EUT is connected with the USB A port of PC.
- (2) The line jack of EUT is connected with a line cable to the ADSL simulator located remotely.
- (3) The phone jack of EUT is connected with a telephone set.

Test method:

Pretest was found that the emission of operating mode is worse than standby mode. So, The final test is made at the operating mode.

During testing, the EUT was operated at “transmitting” and “receiving” mode simultaneously.

While testing, the transmitting rate was set to “AUTO” which means it transmitted the test file depending on the telephone line condition, normally the operating rate is the highest speed. The test placement as the photographs showed is the worst case emission placed. (If the emission is close to the ambient, the resolution BW and view resolution will be reduced and the data will be recorded by detection of maximum hold peak mode.)

The testing configuration of test setup is showing in the next page.

List of support equipment

Conducted (Radiated) test:

PC : **HP Brio 85xx 6/350**
Model No. : VE6/350 SERIES 8
Serial No. : SG91801432 (SG91002329)
FCC ID : N/A (DOC Approved)
檢磁 : 3872H013
Power type : 100 ~ 230VAC / 50 ~ 60Hz, 5A, Switching
Power cord : Non-shielded, 2.33m long, Plastic, No ferrite core

Monitor : **HP 15' Color Monitor**
Model No. : D2827A
Serial No.: KR91161719 (KR91161717)
FCC ID : C5F7NFCMC1518X
檢磁 : 3872B039
Power type : 110 ~ 240 VAC / 50 ~ 60 Hz, Switching
Power cord : Shielded, 1.83m long, No ferrite core
Data cable : Shielded, 1.46m long, with two ferrite cores

Keyboard : **HP**
Model No. : SK-2501K
Serial No. : MR80700789 (M990308909)
FCC ID : GYUR38SK
檢磁 : 3862A621
Power type : By PC
Data cable : Shielded, 1.73m long, with ferrite core

Mouse : **HP**
Model No. : M-S34
Serial No.: LZB90714106 (LZB90714122)
FCC ID : DZL211029
檢磁 : 4862A011
Power type : By PC
Power cord : Non-shielded, 1.88m long, No ferrite core

Printer : HP

Model No. : C2642A
Serial No.: SG69A196GV
FCC ID : B94C2642X
Power type : 230 VAC, 50Hz
Power cord : Non-shielded, 2m long, no ferrite core
Data cable : Shielded, 1.84m long, no ferrite core

Modem : ACEEX

Model No. : XDM-56V14
FCC ID : IFAXDM-56V14
Power type : 230VAC, 50Hz/ 9VAC, 1A
Power cord : Non-shielded, 1.9m long, no ferrite cord
Data cable : RS232, Shielded, 1.2m long, no ferrite core
RJ11C x 2, 7' long non-shielded, no ferrite core

USB Joystick : Padix

Model No. : QF-606U
Serial No.: N/A
FCC ID : DOC Approval
Power Type : By PC
Power Cable : Shielded, 1.8m long, Plastic hoods, No ferrite bead

Telephone : HUSTON

Model No. : 4782
Serial No.: N/A
Power type : Powered by PSTN
Data Cable : non-shielded, 1.8m long, no ferrite bead

ADSL Simulator : CENTILLIUM COPPER LIFT CO.

Model No. : CT-L21SC08
Serial No. : N/A
Power Type : 110 VAC 50Hz
Power Cable : non-shielded, 1.8m long, no ferrite bead

Chapter 2 Conducted emission test

Test condition and setup:

All the equipment is placed and setup according to the ANSI C63.4 - 1992. The EUT is assembled on a wooden table, which is 80 cm high, is placed 40 cm from the back-wall that is a vertical conducting plane. One LISN is for EUT, the other LISN is for support equipment. They are all placed on the conductive ground. The EUT's LISN connect a line switch box for selecting L1 or L2, then connect to a preamplifier and spectrum.

The spectrum scans from 450KHz to 30 MHz. Conducted emission levels are detected at max. peak mode. But if the max. peak mode failed ,it will be measured by CISPR's quasi-peak detection mode .

While testing, there is the worst-emission plot printed at peak detection mode, and there are more than 6 highest emissions relative to limit recorded. The plot is kept as the original data, not included in test report.

List of test Instrument:

Instrument Name	Model No.	Brand	Serial No.	<u>Calibration Date</u>	
				Last time	Next time
Spectrum analyzer	8594EM	H P	3710A00198	01/12/00	01/12/01
LISN (EUT)	3825/2	EMCO	9411-2284	05/15/99	05/15/00
LISN (Support E.)	AC3-001	TRC	- - - - -	05/15/99	05/15/00
Preamplifier	AC3-002	TRC	- - - - -	05/15/99	05/15/00
Line switch box	AC3-003	TRC	- - - - -	05/15/99	05/15/00

The level of confidence of 95%, the uncertainty of measurement of conducted emission is ± 2.4 dB.

Test Result: Pass (Appendix A)

Conducted Test Placement: (Photographs)



Chapter 3 Radiated emission test

Test condition and setup:

Pretest : Prior to the final test (OATS test) ,the EUT is placed in a shielded enclosure, and scan from 30MHz to 1GHz. This is done to ensure the radiation exactly emits form the EUT.

Final test: Final radiation measurements is made on a **3 - meter, open-field** test site. The EUT is placed on a nonconductive table, which is 0.8m height, the top surface is 1.0 x 1.5 meter. All the placement is according to ANSI C63.4 - 1992.

The spectrum is examined from 30 MHz to 1000 MHz measured by HP spectrum.

The EMCO whole range Antenna is used to measure frequency from 30 MHz to 1GHz. The final test is used the spectrum analyzer.

Measure more than six top marked frequencies generated form pretest by computer step by step at each frequency. The EUT is rotated 360 degrees, and antenna is raised and lowered from 1 to 4 meters to find the maximum emission levels. The antenna is used with both horizontal and vertical polarization.

Appropriated preamplifier that is made by TRC is used for improving sensitivity and precaution is taken to avoid overloading. The spectrum analyzer's 6dB bandwidth is set to 120 KHz, and the EUT is measured at quasi-peak mode.

If the emission is close to the frequency band of ambient, the tester will recheck the data and the corrected data will be written in the test data sheet. If the emission is just within the ambient, the data from shield room will be taken as the final data.

List of test Instrument:

<u>Instrument Name</u>	<u>Model No.</u>	<u>Brand</u>	<u>Serial No.</u>	<u>Calibration Date</u>	
				<u>Last time</u>	<u>Next time</u>
Spectrum analyzer	8594EM	H P	3710A00279	06/22/99	06/22/00
Spectrum analyzer	8594EM	H P	3710A00198	01/12/00	01/12/01
Antenna (30M-1.5G Hz)	VULB 9160	M.E.	3063	01/18/00	01/18/01
Antenna (30M-2G Hz)	3141	EMCO	9711-1076	05/15/99	05/15/00
RF Pre-selector	AC4-001	TRC	- - - - -	05/15/99	05/15/00
Open test side (Antenna, Amplify, cable calibrated together)				05/15/90	05/15/00

The level of confidence of 95%, the uncertainty of measurement of radiated emission is ± 4.96 dB.

Test Result: Pass (Appendix B)

Radiated Test Placement: (Photographs)



Appendix A

Conducted Emission Test Result:

Testing room: Temperature : 21 ° C Humidity : 62 % RH

Line 1

Frequency (KHz)	READING AMPLITUDE			LIMIT		Margin (dB)
	Peak (dBmV/m)	Quasi- Peak (dBmV/m)	Average (dBmV/m)	Quasi- Peak (dBmV/m)	Average (dBmV/m)	
496.00	38.11	***.**	***.**	48.00	***.**	-9.89
1127.00	35.86	***.**	***.**	48.00	***.**	-12.14
15380.00	37.10	***.**	***.**	48.00	***.**	-10.90
15820.00	38.60	***.**	***.**	48.00	***.**	-9.40
16690.00	40.44	***.**	***.**	48.00	***.**	-7.56
17350.00	40.89	***.**	***.**	48.00	***.**	-7.11
17950.00	41.90	***.**	***.**	48.00	***.**	-6.10
19620.00	37.58	***.**	***.**	48.00	***.**	-10.42
20510.00	35.92	***.**	***.**	48.00	***.**	-12.08
21410.00	36.72	***.**	***.**	48.00	***.**	-11.28

Line 2

Frequency (KHz)	READING AMPLITUDE			LIMIT		Margin (dB)
	Peak (dBmV/m)	Quasi- Peak (dBmV/m)	Average (dBmV/m)	Quasi- Peak (dBmV/m)	Average (dBmV/m)	
496.00	40.48	***.**	***.**	48.00	***.**	-7.52
1257.00	36.11	***.**	***.**	48.00	***.**	-11.89
16040.00	37.59	***.**	***.**	48.00	***.**	-10.41
16590.00	38.33	***.**	***.**	48.00	***.**	-9.67
17240.00	39.94	***.**	***.**	48.00	***.**	-8.06
17820.00	37.91	***.**	***.**	48.00	***.**	-10.09
20000.00	36.29	***.**	***.**	48.00	***.**	-11.71
21410.00	36.74	***.**	***.**	48.00	***.**	-11.26
23050.00	36.31	***.**	***.**	48.00	***.**	-11.69
27260.00	38.19	***.**	***.**	48.00	***.**	-9.81

* The reading amplitudes are all under average limit.

Appendix B

Radiated Emission Test Result: (Horizontal)

Test Conditions:

Testing room : Temperature : 21 ° C Humidity : 55 % RH

Testing site : Temperature : 19 ° C Humidity : 56 % RH

Frequency	Reading Amplitude	Ant. Height	Table	Correction Factors	Corrected Amplitude	Class B Limit	Margin
MHz	dBμV	m	degree	dB/m	dBμV/m	dBμV/m	dB

216.063	55.80	2.51	286	-24.37	31.43	46.00	-14.57
258.341	55.77	0.99	132	-22.32	33.45	46.00	-12.55
287.051	56.94	0.99	260	-20.96	35.98	46.00	-10.02
315.760	59.19	0.99	98	-20.42	38.77	46.00	-7.23
373.167	57.01	0.99	233	-18.80	38.21	46.00	-7.79
459.276	50.07	0.99	92	-15.88	34.19	46.00	-11.81
861.133	56.14	0.99	341	-21.14	35.00	46.00	-11.00
918.537	52.33	0.99	6	-20.06	32.27	46.00	-13.73

Note:

1. Margin = Amplitude - limit, *if margin is minus means under limit.*
2. Corrected Amplitude = Reading Amplitude + Correction Factors
3. Correction factor = Antenna factor + (Cable Loss - Amplitude gain)
(For example : 30MHz correction factor = 15.5 + (-15.26) = 0.24 dB/m)

Radiated Emission Test Result: (Vertical)

Frequency	Reading Amplitude	Ant. Height	Table	Correction Factors	Corrected Amplitude	Class B Limit	Margin
MHz	dBμV	m	degree	dB/m	dBμV/m	dBμV/m	dB

143.525	48.53	0.99	318	-20.79	27.74	43.50	-15.76
251.221	51.47	0.99	137	-22.63	28.84	46.00	-17.16
273.438	48.98	0.99	328	-21.76	27.22	46.00	-18.78

Final statement:

This test report, measurements made by TRC are traceable to the NIST.

Appendix C**List of Modifications:**

1. Connect bypass capacitors 27 PF to pin2, pin3 of P5 jack.
2. Connect FB520 (ACM321611B520) behind to fuse.
3. A6 / A7 must connect ground completely around the margin.

Please refer to the photograph of EUT

Statement of Applicant:

I acknowledge that the modifications made to the EUT for compliance during testing will be incorporated into mass production units.

Mfg.: CIS TECHNOLOGY INC.

By: Alan Yeh Mr.

Date: Feb. 18, 2000

Signature

Printed

Title: Manager

Report No.: C0915217, Centillium Optimizer USB ADSL Modem, FCC Part 15, Class B

Test date: 02/16/2000, Training Research Co., Ltd., TEL: 886-2-26935155, Fax: 886-2-26934440