

Test Report

Report Number:

F251358E2

Equipment under Test (EUT):

Mobile communication device

CT-DECT MULTI M7 G2

Applicant:

CEOTRONICS AG

Manufacturer:

CEOTRONICS AG



Deutsche
Akkreditierungsstelle
D-PL-17186-01-00

References

[1] **ANSI C63.10: 2020 + Cor. 1-2023 + C63.10a-2024 + Errata to C63.10a-2024*** American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

*Remark: This standard is not in accreditation scope of the laboratory yet.

[2] **FCC CFR 47 Part 15**, Radio Frequency Devices

[3] **558074 D01 15.247 Meas Guidance v05r02 (April 2019)**, GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES

Test Result

The requirements of the tests performed as shown in the overview (clause 4) were fulfilled by the equipment under test. The complete test results are presented in the following.

“Passed” indicates that the equipment under test conforms with the relevant limits of the testing standard without taking any measurement uncertainty into account as stated in [1]. However, the measurement uncertainty is calculated and shown in this test report.

Tested by



Paul NEUFELD
05.03.2026

Signature

Reviewed and
approved by:



Bernward ROHDE
05.03.2026

Signature

This test report is only valid in its original form.

Any reproduction of its contents in extracts without written permission of the accredited test laboratory PHOENIX TESTLAB GmbH is prohibited.

The test results herein refer only to the tested sample. PHOENIX TESTLAB GmbH is not responsible for any generalisations or conclusions drawn from these test results concerning further samples. Any modification of the tested samples is prohibited and leads to the invalidity of this test report. Each page necessarily contains the PHOENIX TESTLAB Logo and the TEST REPORT NUMBER.

Contents:	Page
1 Identification	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Test Laboratory	5
1.4 EUT (Equipment under Test)	6
1.5 Technical Data of Equipment	6
1.6 Dates	8
2 Operational States	9
2.1 Description of function of the EUT	9
3 Additional Information	10
4 Overview.....	10
5 Results.....	11
5.1 Test setups.....	11
5.2 Radiated emissions	15
6 Measurement Uncertainties	21
7 Test Equipment used for Tests	22
8 Test site Verification.....	22
9 Report History.....	23
10 List of Annexes	23

1 Identification

1.1 Applicant

Name:	CEOTRONICS AG
Address:	Adam-Opel-Str. 6, 63322 Rödermark
Country:	Germany
Name for contact purposes:	Mr. Thorsten NEUHAUS
Phone:	+49 6074 8751 631
eMail address:	thorsten.neuhaus@ceotronics.com
Applicant represented during the test by the following person:	--

1.2 Manufacturer

Name:	CEOTRONICS AG
Address:	Adam-Opel-Str. 6, 63322 Rödermark
Country:	Germany
Name for contact purposes:	Mr. Thorsten NEUHAUS
Phone:	+49 6074 8751 631
eMail address:	thorsten.neuhaus@ceotronics.com
Manufacturer represented during the test by the following person:	--

1.3 Test Laboratory

The tests were carried out by: **PHOENIX TESTLAB GmbH**
Königswinkel 10
32825 Blomberg
Germany

accredited by Deutsche Akkreditierungsstelle GmbH (DAkKS) according to DIN EN ISO/IEC 17025:2018. The accreditation is only valid for the scope of accreditation listed in the annex of the certificate D-PL-17186-01-00. FCC Test Firm Designation Number DE0004, FCC Test Firm Registration Number 469623, CAB Identifier DE0003 and ISED# 3469A.

1.4 EUT (Equipment under Test)

Test object: *	Mobile communication device
Model name: *	CT-DECT MULTI M7 G2
Model number: *	No info provided
Order number: *	2400106-R1
Contains FCC ID's: *	L52CT-BT747 & L52CT-M7CEO1

* Declared by the applicant

	EUT number
	1
Serial number: *	CTX11111111
PCB identifier: *	4DTT08-1920-011-01-03, 4BT08-1920-011-04-02
Hardware version: *	Rev 3 and Rev 2
Software version: *	Multi-G2_0_12_3_xx

* Declared by the applicant

One EUT was used for the tests.

Note: PHOENIX TESTLAB GmbH does not take samples. The samples used for tests are provided exclusively by the applicant.

1.5 Technical Data of Equipment

General EUT data			
Power supply EUT: *	DC by Li-Polymer battery		
Supply voltage EUT: *	$U_{nom} = 3.7 \text{ V}_{DC}$	$U_{min} = 3.0 \text{ V}_{DC}$	$U_{max} = 4.2 \text{ V}_{DC}$
Temperature range: *	-32°C to +69°C		
Lowest / highest internal clock frequency: *	32.768 MHz / 2480 MHz		

* Declared by the applicant

Ports / Connectors of the Host				
Identification	Connector		Length during test	Shielding (Yes / No)
	EUT	Ancillary		
Headset	ODU HD Serie	Headphones HDSG-SSM-CLR	~1m	Yes

* Declared by the applicant

Bluetooth Low Energy channels			
Channel 0	2402 MHz	Channel 1	2404 MHz
...	...	...	...
Channel 19	2440 MHz	Channel 20	2442 MHz
...	...	...	...
Channel 38	2478 MHz	Channel 39	2480 MHz

Bluetooth classic + EDR channels			
Channel 0	2402 MHz	Channel 1	2403 MHz
...	...	...	...
Channel 38	2440 MHz	Channel 39	2441 MHz
...	...	...	...
Channel 77	2479 MHz	Channel 78	2480 MHz

Bluetooth radio mode	
Fulfills radio specification: *	Bluetooth Low Energy 5.2 Bluetooth classic + EDR 5.2
Radio module: *	IDC747
Antenna type: *	Chip antenna
Antenna name: *	No information provided
Antenna gain: *	0 dBi
Antenna connector: *	None
Supply voltage radio module: *	$U_{nom} = 3.7 V_{DC}$ $U_{min} = 3.3 V_{DC}$ $U_{max} = 4.7 V_{DC}$
Type of modulation: *	Bluetooth LE 1 Mbps (GFSK) 2 Mbps (GFSK)
	Bluetooth classic + EDR 1 Mbps (GFSK) 2 Mbps ($\pi/4$ -DQPSK) 3 Mbps (8DPSK)
Operating frequency range: *	2402 MHz – 2480 MHz
Number of channels: *	Bluetooth LE 40
	Bluetooth classic+EDR 79

* Declared by the applicant

1.5.1 Ancillary Equipment / Equipment used for testing

Equipment used for testing	
Laptop computer* ¹	ThinkPad TP00104A
-	-

*¹ Provided by the applicant

Ancillary equipment	
Rechargeable Lithium-Polymer Battery *	VARTA EasyPack – Rechargeable
Wired headset 1*	HDHSG-SSM-CLR (SN: CTX00466202)
Wired headset 2*	HDHSG-SSM-CLR (SN: CTX00466203)
Bluetooth headset*	GREEN DEVIL Shield LD (NRR 27dB)
Mobile communication device 1*	CT-DECT MULTI M7 G2 (SN: PB183617)
Mobile communication device 2*	CT-DECT MULTI M7 G2 (SN: PB183616)
Mobile communication device 3*	CT-DECT MULTI M7 G2 (SN: PB188171)
Mobile communication device 4*	CT-DECT MULTI M7 G2 (SN: PB186652)
3 Bluetooth LE Push-to-Talk buttons*	CT- WPTT 1 - 3

*¹ Provided by the applicant

1.6 Dates

Date of receipt of test sample:	01.10.2025
Start of test:	07.10.2025
End of test:	07.10.2025

2 Operational States

2.1 Description of function of the EUT

The EUT (CT-DECT MULTI M7 G2) is a mobile communication device based on DECT technology, allowing users to connect wirelessly to other participants in a DECT group. It supports full duplex communication, enabling users to communicate freely without pressing a button. The device is typically used with a headset, which can be either wired or wireless via Bluetooth. A DECT group consists of a base device and at least one portable device. The MULTI M7 can be configured with different software profiles for various applications and roles, making it versatile for different use scenarios.

As ordered by the applicant, the EUT is connected to various ancillary devices simultaneously. A Bluetooth classic+EDR connection is established to 1 Bluetooth headset and Bluetooth LE connections are established to 3 remote Bluetooth LE Push-to-Talk buttons devices. Also, DECT connections are established to 4 remote MULTI M7 M2 mobile communication devices. 2 of the ancillary mobile communication devices were connected to wired headphones. All radio transmissions were actively transmitting simultaneously during all tests. See the photograph below for the details of the test setup.



2.1.1 Operation modes

An ethernet connection to the test notebook was established and the test modes were set in a terminal session.

Operation mode #	Radio technology	Frequency [MHz]	Channel / Band	Modulation / Mode	Data rate	Power setting
1	Bluetooth® LE	2402 - 2480	0 - 39	GFSK	1&2 Mbps	"default"
	Bluetooth classic+EDR	2402 - 2480	0 - 78	GFSK	1,2,3 Mbps	"default"
	DECT	1920 - 1930	0 – 4	GFSK	-	"default"

3 Additional Information

The EUT was not labeled as required by FCC / IC.

This test report only contains the simultaneous transmission of Bluetooth® LE / Bluetooth classic+EDR / DECT.

4 Overview

Application	Frequency range [MHz]	FCC 47 CFR Part 15 section [2]	RSS-247 [4] RSS-Gen [5]	Tested EUT	Status
Maximum unwanted emissions	0.009 – 26500 *1 2	15.247 (d) 15.205 (a) 15.209 (a)	-	1	Passed *1 2

*1: Only the worst-case data rate based on the pretests were tested

*2 As declared by the applicant the highest radio frequency is 2.480 GHz.

Therefore, the radiated emission measurement must be carried out up to 10th of the highest radio clock frequency in this case 26.5 GHz.

5 Results

5.1 Test setups

5.1.1 Radiated: 30 MHz to 1 GHz


5.1.1.1 Preliminary and final measurement 30 MHz to 1 GHz

The preliminary and final measurements are performed in a semi-anechoic chamber with a metal ground plane at a measuring distance of 3 meters. Table-top devices are set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices are placed directly on the turntable / ground plane. The setup of the equipment under test is in accordance with [1].

During the tests the EUT is rotated in the range of 0 ° to 360 °, the measuring antenna is set to horizontal and vertical polarization and raised and lowered in the range from 1 m to 4 m to find the maximum level of emissions.

The resolution bandwidth of the EMI receiver is set to the following values:

Test	Frequency range	Step-size	Resolution bandwidth	Measuring time	Detector
Preliminary measurement	30 MHz to 1 GHz	30 kHz	120 kHz	-	Peak Average
Frequency peak search	± 120 kHz	10 kHz	120 kHz	1 s	Peak
Final measurement	30 MHz to 1 GHz	-	120 kHz	1 s	QuasiPeak

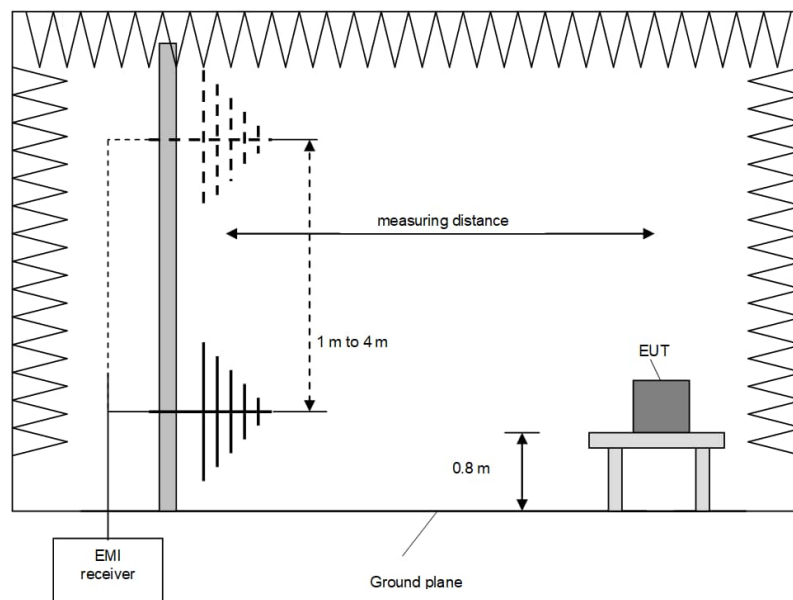

Procedure preliminary measurement:

The following procedure is used:

- 1) Set the measuring antenna to 1 m height.
- 2) Monitor the frequency range at horizontal polarization of the measuring antenna and an EUT / turntable azimuth of 0 °.
- 3) Rotate the EUT by 360° to maximize the detected signals.
- 4) Repeat steps 2 to 3 with the vertical polarization of the measuring antenna.
- 5) Increase the height of the measuring antenna for 0.5 m and repeat steps 2 to 4 until the final height of 4 m is reached.
- 6) The highest values for each frequency are saved by the software, including the measuring antenna height and polarization and the turntable azimuth for that value.

Procedure final measurement:

The following procedure is used:

- 1) Select the highest frequency peaks (lowest margin to the limit) for the final measurement.
- 2) The software determines the exact peak frequencies by doing a partial scan with reduced step size of the pre-scan of the selected peaks.
- 3) If the EUT is portable or ceiling mounted, find the worst-case EUT orientation (x, y, z) for the final test.
- 4) The worst-case measuring antenna height is found via varying the height by ± 0.5 m from the value obtained in the preliminary measurement while monitoring the emission level.
- 5) The worst-case turntable position is found via varying the turntable azimuth by $\pm 30^\circ$ from the value obtained in the preliminary measurement while monitoring the emission level.
- 6) The final measurement is performed at the worst-case measuring antenna height and the worst-case turntable azimuth.
- 7) Steps 2 to 6 are repeated for each frequency peak selected in step 1.

5.1.2 Radiated: 1 GHz to 26.5 GHz


5.1.2.1 Preliminary and final measurement 1 GHz to 26.5 GHz

The preliminary and final measurements are performed in a fully anechoic chamber at a measuring distance of 3 meters. Table-top devices are set up on a non-conducting turn device at the height of 1.5 m. The setup of the equipment under test is in accordance with [1].

During the tests the EUT is rotated in the range of 0 ° to 360 ° and the measuring antenna is set to horizontal and vertical polarization to find the maximum level of emissions. After these steps, the measurement is repeated after reorientating the EUT in 30 ° steps. Alternatively, a test setup with a height scan from 1 m to 4 m and the EUT in nominal position at a height of 1.5 m is used.

The resolution bandwidth of the EMI receiver is set to the following values:

Test	Frequency range	Step-size	Resolution bandwidth	Measuring time	Detector
Preliminary measurement	1 GHz – 26.5 GHz	250 kHz	1 MHz	-	Peak Average
Final measurement	1 GHz – 26.5 GHz	-	1 MHz	100 ms	Peak Average

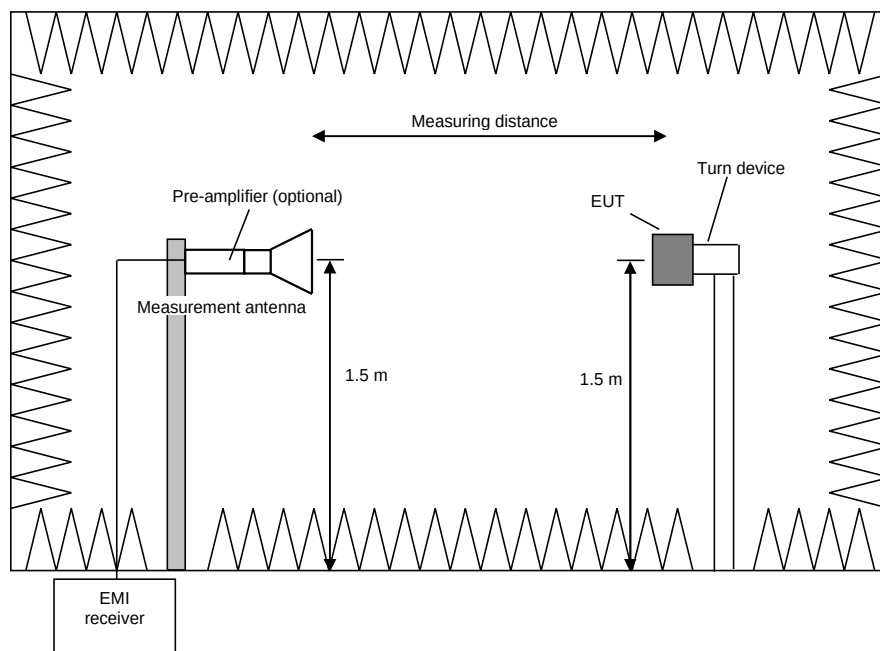

Procedure preliminary measurement:

The following procedure is used:

- 1) Monitor the frequency range at horizontal polarisation of the measuring antenna and an EUT / turntable azimuth of 0 °.
- 2) Rotate the EUT by 360° to maximize the detected signals.
- 3) Repeat steps 1 to 2 with the vertical polarisation of the measuring antenna.
- 4) Repeat steps 1 to 3 with the EUT reorientated by an angle of 30° (60°, 90°, 120° and 150°), according to 6.6.5.4 in [1].
- 5) The highest values for each frequency are saved by the software, including the measuring antenna polarization, the turntable azimuth and the turn device elevation for that value.

Procedure final measurement:

The following procedure is used:

- 1) Set the turntable and the turn device to the position which leads to the highest emission for the first frequency identified in the preliminary measurements.
- 2) Set the measurement antenna to the polarisation which leads to the highest emission for the first frequency identified in the preliminary measurements.
- 3) Set the spectrum analyser to EMI mode with Peak and Average detector activated.
- 4) The worst-case turntable position is found via varying the turntable azimuth by +/- 30° from the value obtained in the preliminary measurement while monitoring the emission level.
- 5) The final measurement is performed at the worst-case turntable azimuth.
- 6) Repeat steps 1 to 5 for each frequency detected during the preliminary measurements.

5.2 Radiated emissions

5.2.1 Test setup (Maximum unwanted emissions)

Test setup (Maximum unwanted emissions)			
Used	Setup	See sub-clause	Comment
☒	Radiated: 30 MHz to 1 GHz 1 GHz to 40 GHz	5.1.1 5.1.2	-
☐	Conducted: Antenna port	---	-

5.2.2 Test method (Maximum unwanted emissions)

☒ Test method (radiated) see sub-clause 5.1.1 to 5.1.3 as described herein

5.2.3 Test results (Maximum unwanted emissions)

5.2.3.1 Test results (30 MHz – 1 GHz)

Ambient temperature:	22 °C
Relative humidity:	53 %

Date:	07.10.2025
Tested by:	P. NEUFELD

Position of EUT: For tests for f between 30 MHz to 1 GHz, the EUT was set-up on a table with a height of 80 cm. The distance between EUT and antenna was 3 m.

Cable guide: For detail information of test set-up and the cable guide refer to the pictures in the annex A in the test report.

Test record: Plots for each frequency range are submitted below.

Remark: -

Calculations:

Result [dBμV/m] = Reading [dBμV] + Correction [dB/m]


Correction [dB/m] = AF [dB/m] + Cable attenuation [dB] + optional preamp gain [dB]

Margin [dB] = Limit [dBμV/m] - Result [dBμV/m]

The measured points and the limit line in the following diagram refer to the standard measurement of the emitted interference in compliance with the above-mentioned standard. The measured points marked with “” are the measured results of the standard subsequent measurement in a semi-anechoic chamber.

Worst case plot:

Spurious emissions from 30 MHz to 1 GHz (operation mode 1):

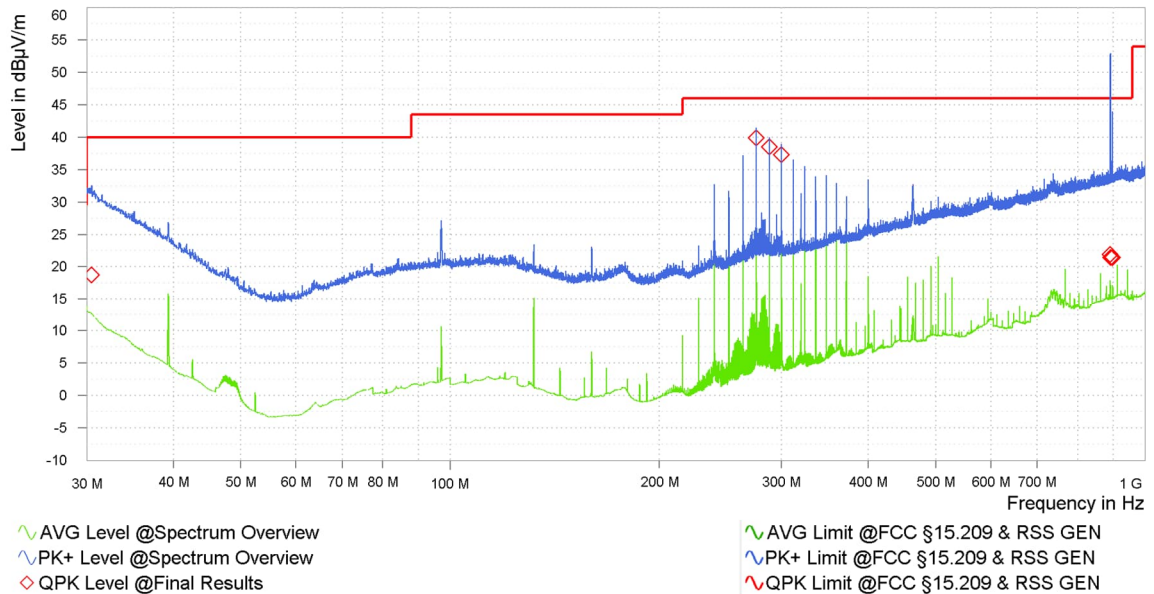

Result tables:

Operation mode 1:

Frequency [MHz]	QPK Level [dBμV/m]	QPK Limit [dBμV/m]	QPK Margin [dB]	Correction [dB/m]	Polarization	Azimuth [deg]	Antenna Height [m]
30.460	18.73	40.00	21.27	26.38	V	98	1.50
276.010	39.88	46.00	6.13	18.17	H	7	1.00
276.010	39.88	46.00	6.13	18.17	H	7	1.00
288.010	38.52	46.00	7.48	18.56	H	5	1.00
300.010	37.31	46.00	8.69	18.87	H	-2	1.00
891.280	21.92	46.00	24.08	29.49	H	255	1.15
892.270	21.40	46.00	24.60	29.50	H	314	1.23
898.810	21.45	46.00	24.55	29.66	H	156	1.45

Test result: Passed

Test equipment (please refer to chapter 7 for details)

1 - 9

5.2.3.2 Test results (radiated 1 GHz to 40 GHz)

Ambient temperature:	22 °C
Relative humidity:	53 %

Date:	07.10.2025
Tested by:	P. NEUFELD

Position of EUT: For tests for f between 1 GHz and the 10th harmonic, the EUT was set-up on a positioner device with a height of 150 cm. The distance between EUT and antenna was 3 m.

Cable guide: For detail information of test set-up and the cable guide refer to the pictures in the annex A in the test report.

Test record: Plots for each frequency range are submitted below.

Remark:

Calculation:

Max Peak [dBμV/m] = Reading [dBμV] + Correction [dB/m]

Average [dBμV/m] = Reading [dBμV] + Correction [dB/m]

Correction [dB/m] = AF [dB/m] + Cable attenuation [dB] + optional preamp gain [dB] + DCCF* [dB]
* (if applicable – only for Average values, that are fundamental related)

Margin [dB] = Limit [dBμV/m] – Max Peak | Average [dBμV/m]


The curves in the diagram only represent the maximum measured value for each frequency point of all preliminary measurements, which were carried out with various EUT and antenna positions.

The top measured curve represents the peak measurement. The measured points marked with "◇" are frequency points for the final peak detector measurement. These values are indicated in the following table. The bottom measured curve represents the average measurement. The measured points marked with "◊" are frequency points for the final average detector measurement.


The measurement results are presented on the following pages.

Worst case plots:


Spurious emissions from 1 GHz to 4 GHz (operation mode 1):

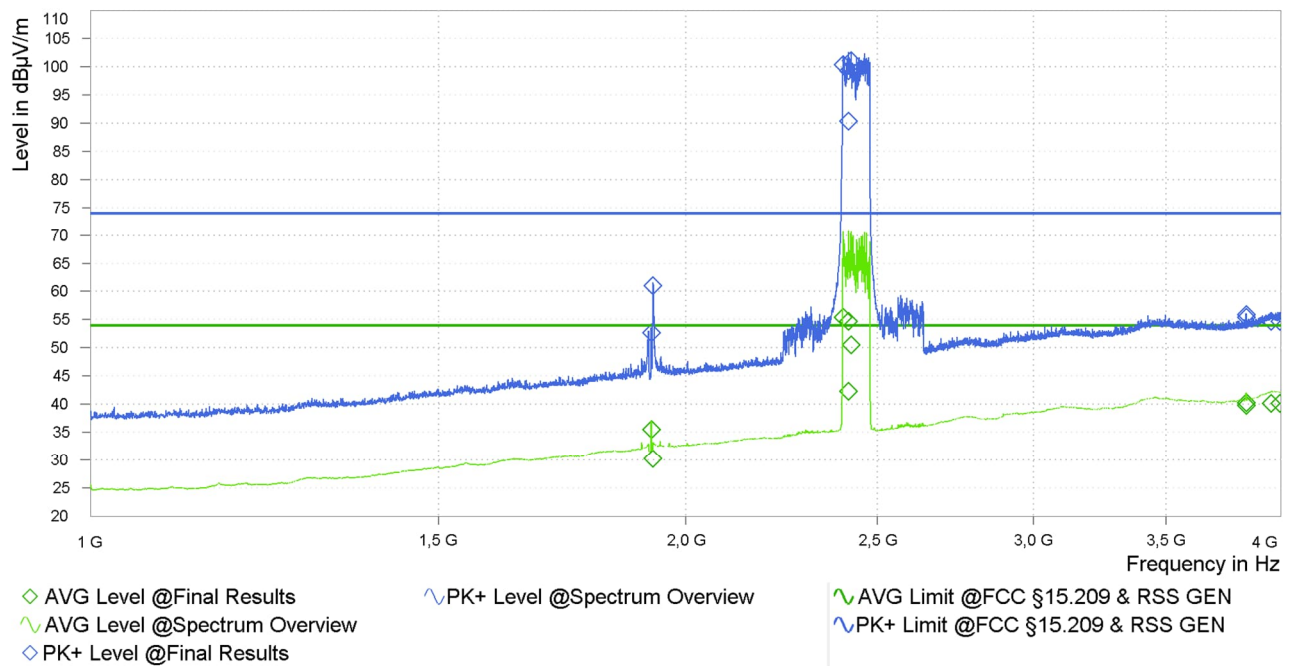

Spurious emissions from 4 GHz to 18 GHz (operation mode 1):

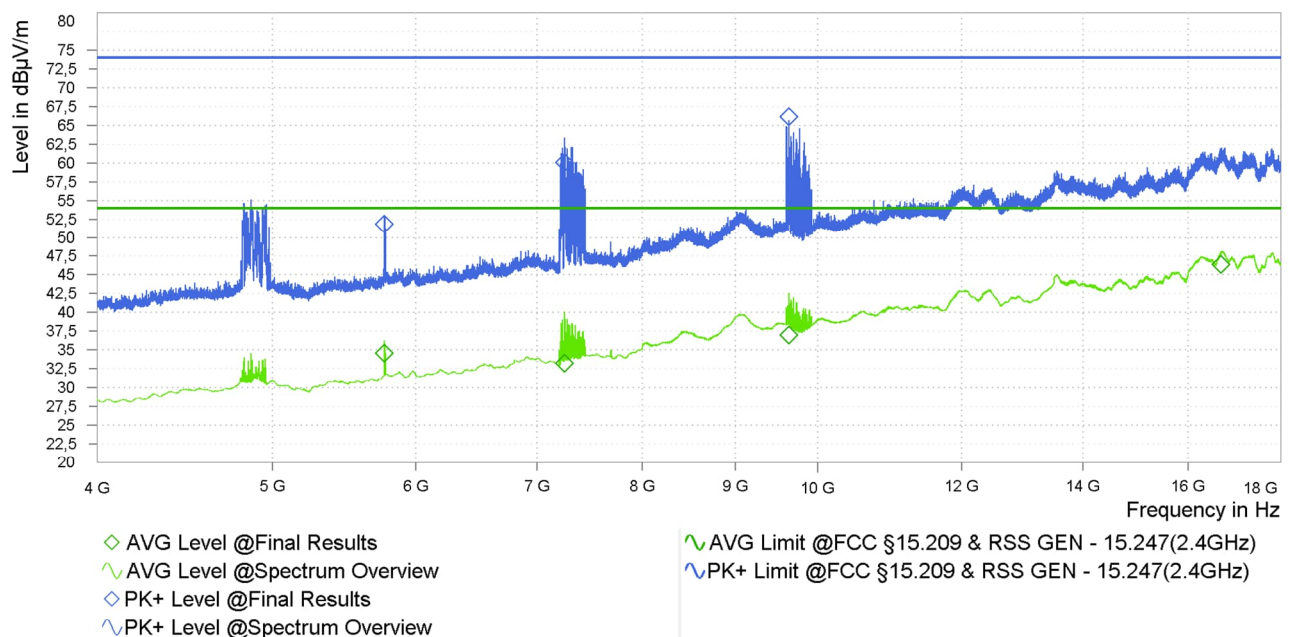

Spurious emissions from 18 GHz to 26.5 GHz (operation mode 1):

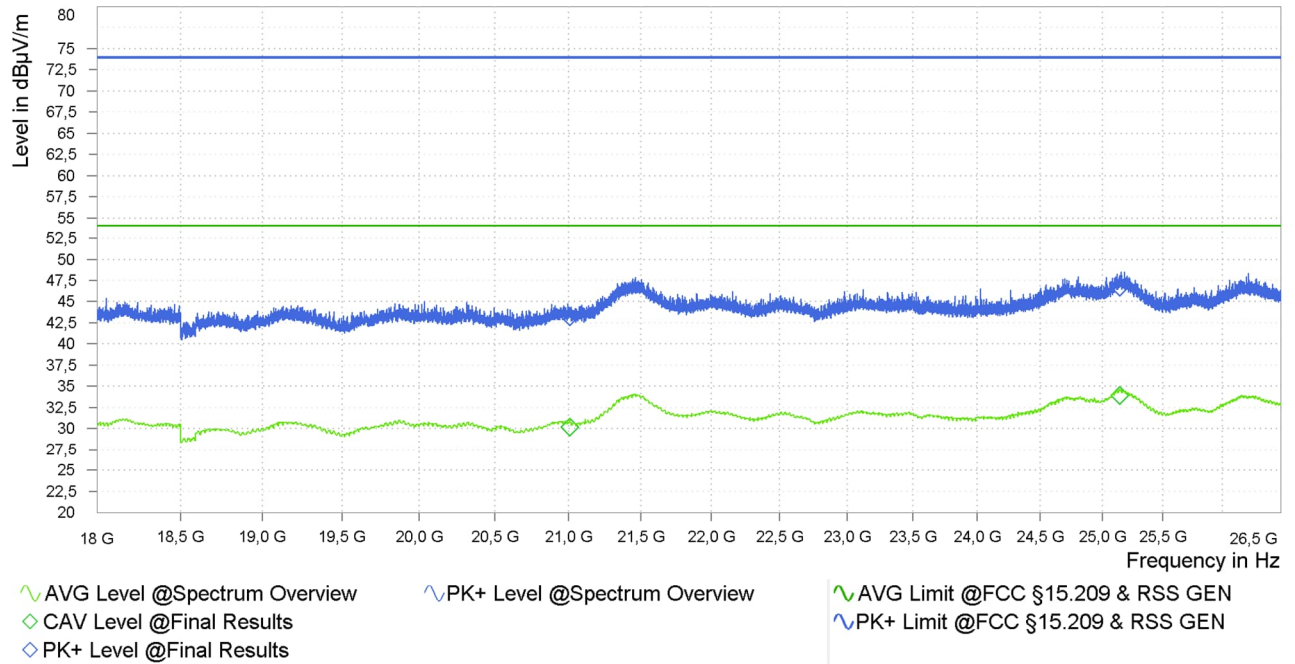

The result tables are presented on the following.

Result tables:

Operation mode 1:

Frequency [MHz]	Pk Level [dB(μV/m)]	Pk Limit [dB(μV/m)]	Pk Margin [dB]	AV Level [dB(μV/m)]	AV Limit [dB(μV/m)]	AV Margin [dB]	Corr. [dB/m]	Pol [H/V]	Azimuth [deg]	Antenna Height [m]	Restr. Band Y/N
1922.000	52.67	74.00	21.33	35.49	54.00	18.51	31.53	H	81	1.18	-*
1926.250	60.96	74.00	13.04	30.29	54.00	23.71	31.56	H	94	1.22	-*
2404.000	100.36	Fund.	-	55.40	Fund.	-	34.51	H	322	1.50	-*
2418.000	99.23	Fund.	-	54.67	Fund.	-	34.54	V	83	1.18	-*
2418.000	90.33	Fund.	-	42.24	Fund.	-	34.54	V	111	1.50	-*
2426.000	101.10	Fund.	-	50.48	Fund.	-	34.55	V	81	1.22	-*
3842.500	55.88	74.00	18.12	40.27	54.00	13.73	38.96	H	24	1.15	-*
3842.750	55.45	74.00	18.55	39.85	54.00	14.15	38.96	H	21	3.19	-*
3955.750	54.67	74.00	19.33	40.16	54.00	13.84	40.14	H	86	2.92	-*
3997.000	54.69	74.00	19.31	40.16	54.00	13.84	40.14	H	78	2.50	-*
5763.750	51.87	74.00	22.13	34.57	54.00	19.43	10.42	V	278	1.18	-*
7244.750	60.09	74.00	13.91	33.23	54.00	20.77	12.91	V	201	1.97	-*
9639.500	66.10	74.00	7.90	36.96	54.00	17.04	17.34	H	-8	2.60	-*
16690.000	-	-	-	46.33	54.00	7.67	27.27	V	26	1.25	-*
21009.000	43.21	74.00	30.79	30.19	54.00	23.81	12.10	H	183	1.45	-*
25143.250	46.68	74.00	27.32	33.94	54.00	20.06	12.68	V	38	2.22	-*

Test result: Passed

Test equipment (please refer to chapter 7 for details)

3 - 13

6 Measurement Uncertainties

Conducted measurements		
Measurement method	Standard used for calculating measurement uncertainty	Expanded measurement uncertainty (95 %) U_{lab}
Frequency error	ETSI TR 100 028	4.5×10^{-8}
Bandwidth measurements	-	9.0×10^{-8}
Conducted emissions using a spectrum analyzer		
< 3.6 GHz	ETSI TR 100 028	2.3 dB
3.6 – 8 GHz	ETSI TR 100 028	2.8 dB
8 – 22 GHz	ETSI TR 100 028	3.2 dB
22 – 40 GHz	ETSI TR 100 028	3.6 dB
Power measurements		
Power meter	ETSI TR 100 028	0.9 dB
Conducted emissions from 150 kHz to 30 MHz with LISN		
	CISPR 16-4-2	2.8 dB

Radiated measurements		
Frequency error		
(Semi-) Anechoic chamber	ETSI TR 100 028	4.5×10^{-8}
OATS	ETSI TR 100 028	4.5×10^{-8}
Test fixture	ETSI TR 100 028	4.5×10^{-8}
Bandwidth measurements		
(Semi-) Anechoic chamber	-	9.0×10^{-8}
OATS	-	9.0×10^{-8}
Test fixture	-	9.1×10^{-8}
Radiated field strength M20		
CBL6112B @ 3 m 30 MHz – 1 GHz	CISPR 16-4-2	5.3 dB
R&S HL050 @ 3 m		
1 – 6 GHz	CISPR 16-4-2	5.1 dB
6 – 18 GHz	CISPR 16-4-2	5.4 dB
Flann Standard Gain Horns 12 – 40 GHz	-	5.9 dB
Radiated field strength M276		
R&S HL562E @ 3 m 30 MHz – 1 GHz	CISPR 16-4-2	4.8 dB
R&S HL050 @ 3 m	-	
1 – 6 GHz	CISPR 16-4-2	5.1 dB
6 – 18 GHz	CISPR 16-4-2	5.4 dB
Flann Standard Gain Horns 12 – 40 GHz	-	5.9 dB
OATS		
Field strength measurements below 30 MHz on OATS without ground plane	-	4.4 dB

7 Test Equipment used for Tests

No.	Test equipment	Type	Manufacturer	Serial No.	PM. No.	Cal. Date	Cal Due
1	Attenuator 6 dB	WA2-6	Weinschel	8254	410119	Calibration not necessary	
2	Ultralog antenna 30 MHz - 6 GHz	HL562E	Rohde & Schwarz	101079	482978	24.04.2024	04.2027
3	EMC test software	Elektra V5.21	Rohde & Schwarz	---	483755	Calibration not necessary	
4	RF Switch Matrix	OSP220	Rohde & Schwarz	101391	482976	Calibration not necessary	
5	Turntable	TT3.0-3t	Maturo	825/2612/.01	483224	Calibration not necessary	
6	Antenna support tilt mast	BAM 4.5-P-10kg	Maturo	222/2612.01	483225	Calibration not necessary	
7	Controller	NCD	Maturo	474/2612.01	483226	Calibration not necessary	
8	Semi Anechoic Chamber M276	SAC5-2	Albatross Projects	C62128-A540- A138-10-0006	483227	Calibration not necessary	
9	EMI receiver / Spectrum analyser	ESW44	Rohde & Schwarz	101828	482979	21.02.2024	02.2026
10	Low Noise Amplifier 10 MHz - 18 GHz	LNA-30- 00101800-25- 10P	Narda-Miteq	2110917	482967	20.02.2024	02.2026
11	Log.-Per. antenna 850 MHz - 26.5 GHz	HL050	Rohde & Schwarz	100977	483511	25.04.2025	04.2028
12	Low Noise Amplifier 18 GHz - 26.5 GHz	LNA-30- 18002650-20- 10P	Narda-Miteq	2110911	482969	19.02.2024	02.2026
13	Standard gain horn 18 GHz - 26 GHz	20240-20	Flann	266399	483026	Calibration not necessary	

8 Test site Verification

Test equipment	PM. No.	Frequency range	Type of validation	According to	Val. Date	Val Due
Semi anechoic chamber M276	483227	30 – 1000 MHz	NSA	ANSI C63.4-2014 ANSI C63.4a-2017	01.03.2023	28.02.2026
Semi anechoic chamber M276	483227	1 -18 GHz	SVSWR	CISPR 16-1-4 + Cor1:2010 + A1:2012 +A2:2017	28.02.2023	27.02.2026

9 Report History

Report Number	Date	Comment
F251358E2	05.02.2026	Initial Test Report
-	-	-
-	-	-

10 List of Annexes

Annex A	Test Setup Photos	5 pages
Annex B	Void	
Annex C	Void	
Annex D	Void	

----- end of test report -----