

FCC TEST REPORT FCC 47 CFR Part 15D Unlicensed Personal Communication Service Devices Industry Canada RSS-213 2GHz License-exempt Personal Communications Service Devices (LE-PCS)	
Report Reference No. : G0M-1702-6254-TFC15DFP-V03	
Testing Laboratory : Eurofins Product Service GmbH Address : Storkower Str. 38c 15526 Reichenwalde Germany Accreditation :     DAkkS - Registration number : D-PL-12092-01-03 (ISED) ISED Testing Laboratory site: 3470A-2 DAkkS - Registration number : D-PL-12092-01-04 (FCC) FCC Filed Test Laboratory, Des.-No.: DE0008 FCC Filed Test Laboratory, Reg.-No.: 129507	
Applicant's name : Ceotronics AG Address : Adam-Opel-Str. 6 63322 Rödermark GERMANY	
Test specification: Standard : 47 CFR Part 15D 47 CFR Part 15C 47 CFR Part 15B RSS-213, Issue 3, 2015-03 Test scope : partial Radio compliance test	
Equipment under test (EUT): Product description DECT/UPCS - Modul Model No. CT-DECT M7 Additional Model(s) None Brand Name(s) CeoTronics Hardware version M7_0 DECT_HPB_1001421 Firmware / Software version V1.0.0 FCC-ID: L52CT-M7CEO1 IC: 9714A-CTM7CEO1	
Test result Passed	

Possible test case verdicts:

- neither assessed nor tested : N/N
- required by standard but not appl. to test object : N/A
- required by standard but not tested : N/T
- not required by standard for the test object : N/R
- test object does meet the requirement : P (Pass)
- test object does not meet the requirement : F (Fail)

Testing:


Test Lab Temperature : 20 – 23 °C

Test Lab Humidity : 32 – 38 %

Date of receipt of test item : 2017-02-16

Date (s) of performance of tests : 2017-02-17 – 2017-02-18

Compiled by : Wilfried Treffke

Tested by (+ signature) : Wilfried Treffke 

(Responsible for Test)

Approved by (+ signature) : Christian Weber 

(Head of Lab)

Date of issue : 2020-10-12

Total number of pages : 86

General remarks:

The test results presented in this report relate only to the object tested.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

Additional comments:

The EUT uses two antenna ports with antenna diversity operation. For conducted compliance testing the antenna port (including dedicated antenna) with the highest output power was selected. For radiated testing both antenna ports were tested. Therefore antenna port 1 with antenna W200 was used for conducted compliance testing.

Version History

Version	Issue Date	Remarks	Revised by
01	2017-05-23	Initial Release	
02	2020-02-11	Replaced document: G0M-1702-6254-TFC15DFP-V01 Replaced by: G0M-1702-6254-TFC15DFP-V02 Reason: Page 1 & 6: FCC ID and IC added Page 6: PMN, HVIN, and FVIN added. Page 10: Pictures EUT without shielding changed. Page 11 & 12: Test setup pictures radiated emission corrected.	W. Treffke
03	2020-10-12	Replaced document: G0M-1702-6254-TFC15DFP-V02 Replaced by: G0M-1702-6254-TFC15DFP-V03 Reason: Page 1: FCC Filed Test Laboratory updated Page 15: Day added to calibration information	C. Weber

REPORT INDEX

1	EQUIPMENT (TEST ITEM) DESCRIPTION	6
1.1	Photos - Equipment external	8
1.2	Photos - Equipment internal	9
1.3	Photos – Test setup	11
1.4	Supporting Equipment Used During Testing	13
1.5	Test Modes	14
1.6	Test Equipment Used During Testing	15
1.7	Sample emission level calculation	16
2	RESULT SUMMARY	17
3	TEST CONDITIONS AND RESULTS	19
3.1	Test Conditions and Results – Cross reference to subpart B	19
3.2	Test Conditions and Results – AC power line conducted emissions	20
3.3	Test Conditions and Results – Antenna requirement	23
3.4	Test Conditions and Results – Digital modulation	24
3.5	Test Conditions and Results – Occupied Bandwidth	25
3.6	Test Conditions and Results – Emission Bandwidth	29
3.7	Test Conditions and Results – Peak transmit power	33
3.8	Test Conditions and Results – Power spectral density	41
3.9	Test Conditions and Results – Frequency stability	44
3.10	Test Conditions and Results – Transmitter in-band unwanted emissions	50
3.11	Test Conditions and Results – Transmitter out-of-band emissions	54
3.12	Test Conditions and Results – Receiver spurious emissions	62
3.13	Test Conditions and Results – Automatic discontinuation of Transmission	64
3.14	Test Conditions and Results – Radiofrequency radiation exposure	65
3.15	Test Conditions and Results – LIC confirmation	66
3.16	Test Conditions and Results – LIC Procedure Test	67
3.17	Test Conditions and Results – LIC Selected Channel Confirmation	68
3.18	Test Conditions and Results – Monitoring antenna	69
3.19	Test Conditions and Results – Monitoring Bandwidth	70
3.20	Test Conditions and Results – Monitoring reaction time and monitoring interval	71
3.21	Test Conditions and Results – Access criteria test interval	73
3.22	Test Conditions and Results – Access criteria functional test	75
3.23	Test Conditions and Results – Acknowledgements	79

Test Report No.: G0M-1702-6254-TFC15DFP-V03

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

3.24	Test Conditions and Results – Fair access	81
3.25	Test Conditions and Results – Frame period and Jitter	82
3.26	Test Conditions and Results – Frame and TDMA repetition stability	84
3.27	Test Conditions and Results – Maximum spectral occupancy	86

1 Equipment (Test item) Description



Description	DECT/UPCS - Modul	
Model	CT-DECT M7	
Additional Model(s)	None	
Brand Name(s)	CeoTronics	
Serial number	12069 / 12070	
Hardware version	M7_0 DECT_HP_B_1001421	
Software / Firmware version	V1.0.0	
PMN	CT-DECT Module M7	
HVIN	DECT_DHW-1001450	
FVIN	FW_1001344_1001477_2_1_0_27014	
HMN	N/A	
FCC-ID	L52CT-M7CEO1	
IC	9714A-CTM7CEO1	
Equipment type	Radio Module	
Radio type	DECT Fixed Part	
Number of Radios	1 transceivers is built into the device	
Radio technology	DECT 6.0	
Operating frequency range	1921.536 - 1928.448MHz	
Assigned frequency band	1920 - 1930MHz	
Number of RF channels	5	
Supported slots	even and odd	
Number of time slots	12 x Tx + 12 x RX = 24	
Channels	F ₀	Ch:0 / 1928.448MHz
	F ₁	Ch:1 / 1926.720MHz
	F ₂	Ch:2 / 1924.992MHz
	F ₃	Ch:3 / 1923.264MHz
	F ₄	Ch:4 / 1921.536MHz
Main test frequencies	F _{LOW}	Ch:4 / 1921.536MHz
	F _{MID}	Ch:2 / 1924.992MHz
	F _{HIGH}	Ch:0 / 1928.448MHz
Modulations	GFSK	
Emission designator	F7D	
Nominal emission bandwidth	1.42 MHz	
Channel spacing	1728 kHz	
Spectrum access	Listen before transmit	
Threshold limit	-62 dBm	
Number of antennas	2 per transceiver	

Test Report No.: G0M-1702-6254-TFC15DFP-V03

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Antenna 1	Type	Integrated, printed inverted F antenna
	Model	W200
	Manufacturer	Frauenhofer IIS
	Gain	3.5
Antenna 2	Type	Integrated, printed inverted F antenna
	Model	W201
	Manufacturer	Frauenhofer IIS
	Gain	1.5
Manufacturer	Ceotronics AG Adam-Opel-Str. 6 63322 Rödermark GERMANY	
Power supply	V _{NOM}	2.4 VDC
	V _{MIN}	2.2 VDC
	V _{MAX}	3.45 VDC
Temperature	T _{NOM}	25 °C
	T _{MIN}	-30 °C
	T _{MAX}	70°C



1.1 Photos - Equipment external

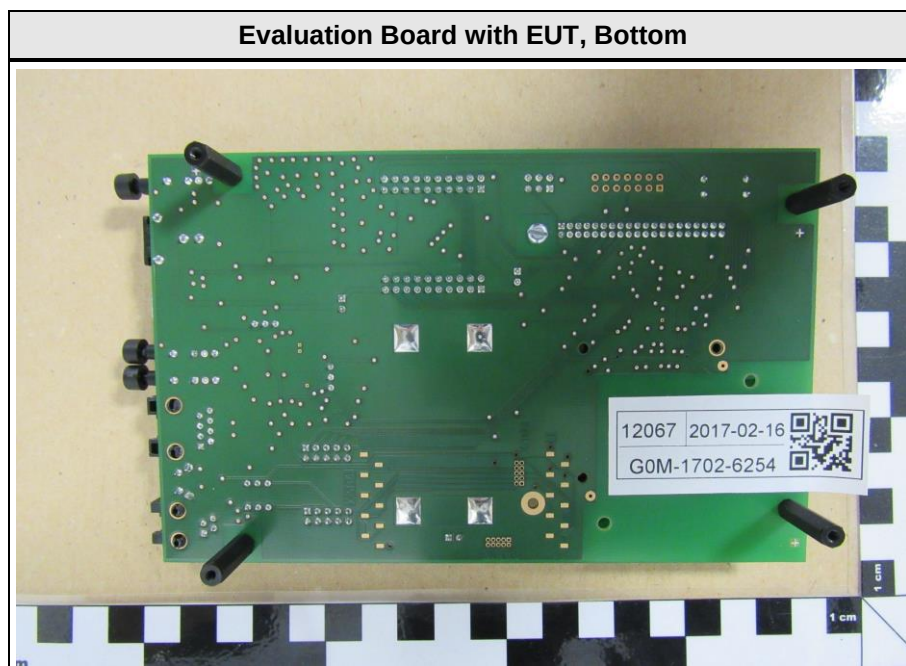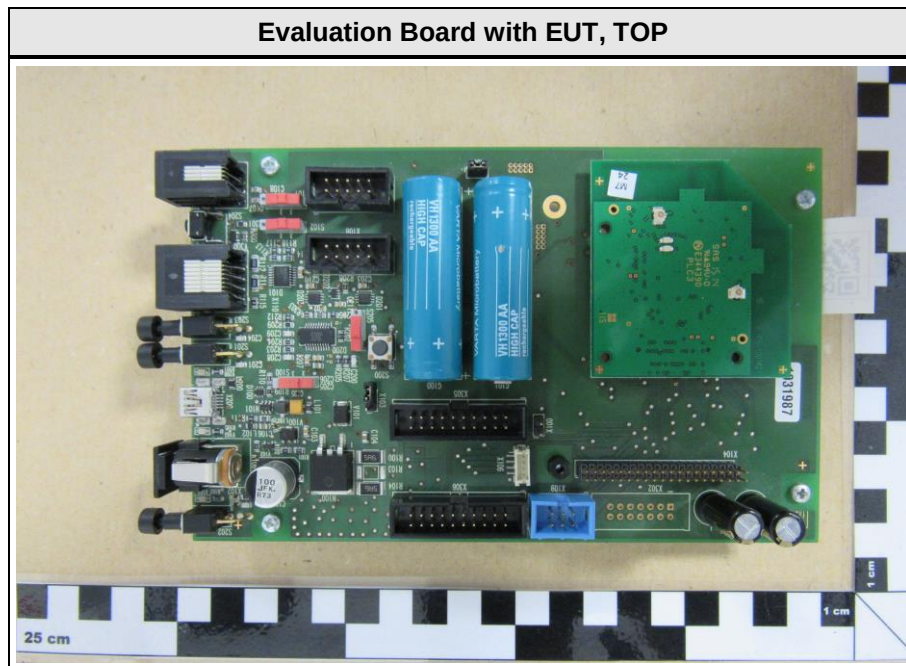


Test Report No.: G0M-1702-6254-TFC15DFP-V03

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

1.2 Photos - Equipment internal

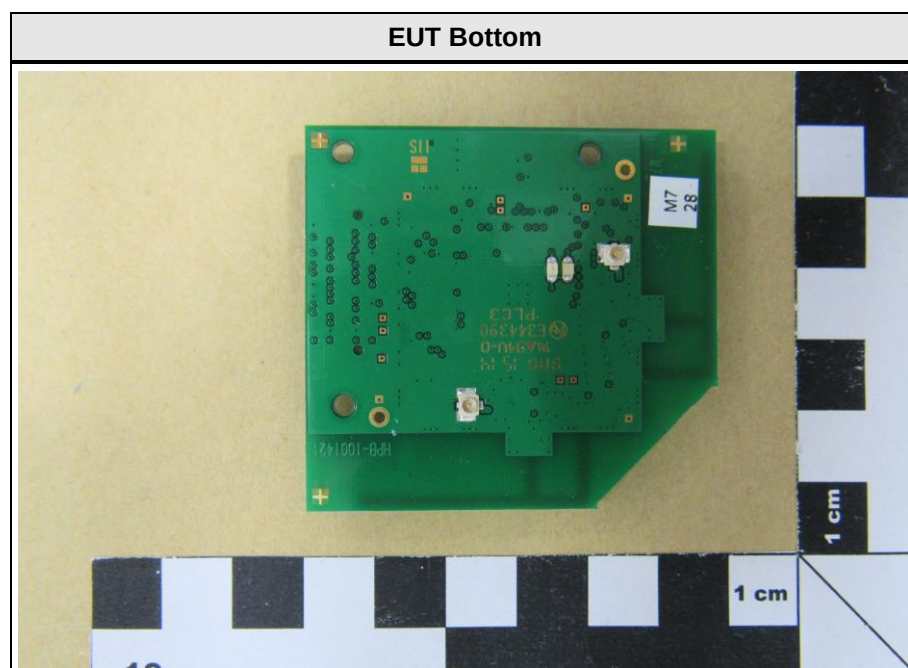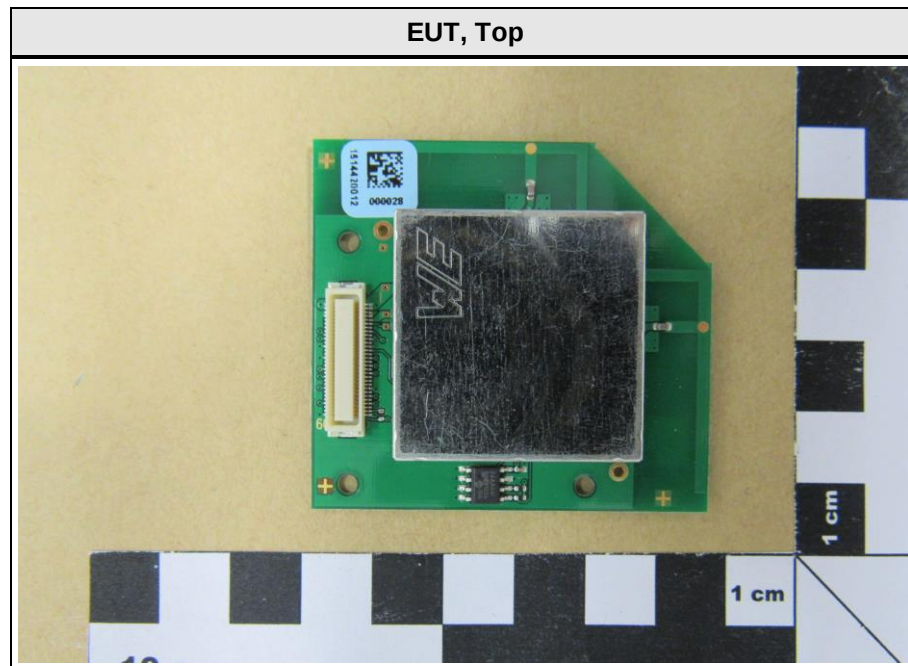

EUT without Shielding

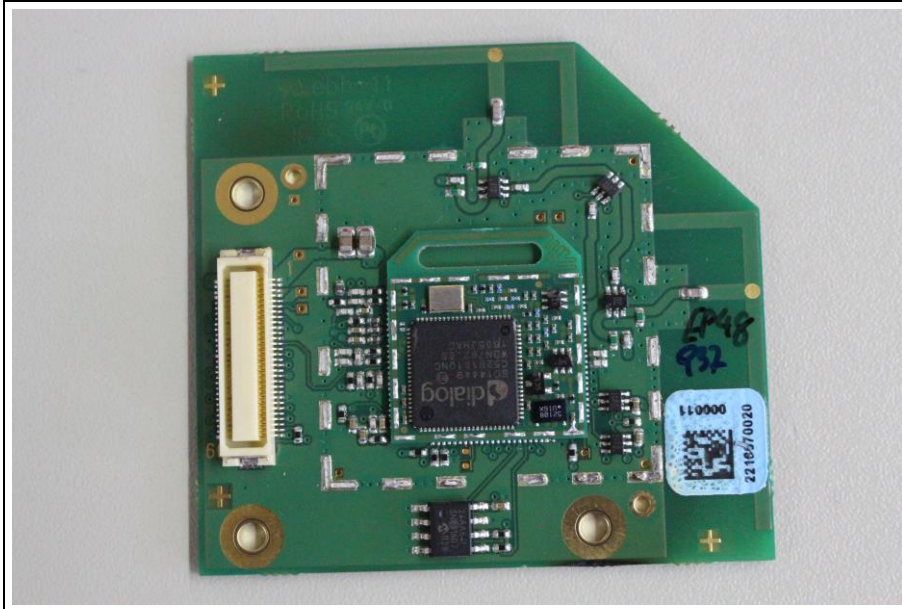

1.4 Supporting Equipment Used During Testing

Product Type	Device	Manufacturer	Model	Comment
SIM	Communication Tester	Rohde & Schwarz	CMD 65	Signaling
AE	Carrier Board / Interfacing und Power	Fraunhofer IIS	M7EVAL_1	Evaluation board
AE	AC/DC Adapter	GOOBAY	NTS600-9VEUP	Power supply
Description:				
AE	Auxillary Equipment			
SIM	Simulator			
CBL	Connecting Cable			
Comment:				

1.5 Test Modes

Mode #	Description	
TDMA PS	General conditions:	EUT powered by laboratory power supply. Active connection to companion device.
	Radio conditions:	Mode = Transmit mode Modulation = GFSK Duty cycle = 1/24 Power level = Maximum
TDMA BAT	General conditions:	EUT powered by fully charged battery. Active connection to companion device.
	Radio conditions:	Mode = Transmit mode Modulation = GFSK Duty cycle = 1/24 Power level = Maximum
Receive	General conditions:	EUT powered by fully charged battery.
	Radio conditions:	Mode = standalone receive Modulation = GFSK
AC-Powerline	General conditions:	Active data connection between EUT and companion device. EUT connected to AC main via AC/DC-Adaptor.
	Radio conditions:	Mode = Transmit mode Modulation = GFSK Duty cycle = 1/24 Power level = Maximum

1.6 Test Equipment Used During Testing

Measurement Software			
Description	Manufacturer	Name	Version
EMC Test Software	Dare Instruments	Radimation	2015.2.4

Conducted					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSP 30	EF00312	2016-02-26	2017-02-26
Signal Generator	R&S	SMP 02	EF00165	2015-05-20	2017-05-20
Signal Generator	R&S	SMIQ 03B	EF00153	2016-10-20	2018-10-20
Signal generator	R&S	SMIQ 03B	EF00152	2016-09-20	2018-09-20
Signal Generator	R&S	SMIQ 03B	EF00316	2015-06-15	2017-06-15
Signal Generator	R&S	SMT 03	EF00164	2015-04-21	2017-04-21
Step Attenuator	R&S	RSP	EF00155	2015-11-23	2017-11-23
Frequency Standard	EFRATOM Elektronik GmbH	MFS	EF00308	2013-05-23	2018-05-23
Power Meter	R&S	NRVD	EF00139	2016-10-05	2017-10-05
Diode Power Sensor	R&S	NRV-Z1	EF00314	2015-06-16	2017-06-16

Radiated spurious emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Semi-anechoic chamber	Frankonia	AC 1	EF00062	2016-01-25	2019-01-25
Spectrum Analyzer	R&S	FSIQ26	EF00242	2016-04-20	2017-04-20
Biconical Antenna	R&S	HK 116	EF00012	2016-05-18	2019-05-18
LPD Antenna	R&S	HL 223	EF00187	2016-05-18	2019-05-18
LPD Antenna	R&S	HL 025	EF00327	2015-10-15	2018-10-15

AC powerline conducted emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
AMN	R&S	ESH2-Z5	EF00182	2017-01-06	2019-01-06
EMI Test Receiver	R&S	ESR 7	EF00943	2016-10-20	2017-10-20

1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dBμV. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dBμV/m). The FCC limits are given in units of μV/m. The following formula is used to convert the units of μV/m to dBμV/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 * \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

Reading	+	AF	=	Net Reading	:	Net reading - FCC limit	=	Margin
21.5 dBμV	+	26 dB	=	47.5 dBμV/m	:	47.5 dBμV/m - 57.0 dBμV/m	=	-9.5 dB

2 Result Summary

FCC 47 CFR Part 15D, 15C, IC RSS-213, IC RSS-Gen				
Product Specific Standard Section	Requirement – Test	Reference Method	Result	Remarks
FCC 15.309(b)	Cross reference to subpart B	declaration	N/A	
FCC 15.315 FCC 15.207 IC RSS-213 5.4 IC RSS-213 3.1 IC RSS-Gen 8.8	AC power line conducted emissions	ANSI C63.4	PASS	
FCC 15.317 FCC 15.203 IC RSS-213 4.1(e)	Antenna requirements	visual inspection	PASS	
FCC 15.319(b) IC RSS-213 5.1	Digital modulation	ANSI C63.17 6.1.4	PASS	
IC RSS-213 5.5 RSS-Gen 3.1	Occupied bandwidth	RSS-Gen 6.6	PASS	
FCC 15.323(a)	Emission Bandwidth	ANSI C63.17 6.1.3	PASS	
FCC 15.319(c) FCC 15.319(e) IC RSS-213 5.6	Peak transmit power	ANSI C63.17 6.1.2	PASS	
FCC 15.319(d) IC RSS-213 5.7	Power spectral density	ANSI C63.17 6.1.5	PASS	
FCC 15.323(f) IC RSS-213 5.3	Carrier frequency stability	ANSI C63.17 6.2.1	PASS	
FCC 15.323(d) IC RSS-213 5.8.2	Transmitter in-band unwanted emissions	ANSI C63.17 6.1.6.1	PASS	
FCC 15.323(d) IC RSS-213 5.8.1	Transmitter out-of-band emissions	ANSI C63.17 6.1.6.2 ANSI C63.4	PASS	
IC RSS-213 3.1 IC RSS-Gen 7.1	Receiver spurious emissions	ANSI C63.4	PASS	
FCC 15.319(f) IC RSS-213 5.2	Automatic discontinuation of transmission	functional test	PASS	
FCC 15.323(c)(5) IC RSS-213 5.2	LIC Confirmation	ANSI C63.17 7.3.2 / 7.3.3	PASS	Reference to "LIC procedure test" and "LIC Selected Channel Confirmation" only
FCC 15.323(c)(5) IC RSS-213 5.2	LIC Procedure Test	ANSI C63.17 7.3.2	PASS	
FCC 15.323(c)(1) IC RSS-213 5.2	LIC Selected Channel Confirmation	ANSI C63.17 7.3.3	PASS	
FCC 15.323(c)(8) IC RSS-213 5.2	Monitoring antenna	ANSI C63.17 4	PASS	
FCC 15.323(c)(7) IC RSS-213 5.2	Monitoring bandwidth	ANSI C63.17 7.4	PASS	
FCC 15.323(c)(7) IC RSS-213 5.2	Monitoring reaction time and monitoring interval	ANSI C63.17 7.5	PASS	

Test Report No.: G0M-1702-6254-TFC15DFP-V03

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

FCC 15.323(c)(6) IC RSS-213 5.2	Access criteria test interval	ANSI C63.17 8.1.1	PASS	Only FP
FCC 15.323(c)(6) IC RSS-213 5.2	Access criteria functional test	ANSI C63.17 8.1.2 / 8.1.3	PASS	Only FP
FCC 15.323(c)(4) IC RSS-213 5.2	Acknowledgements	ANSI C63.17 8.2.1	PASS	
FCC 15.323(c)(3) IC RSS-213 5.2	Transmission duration	ANSI C63.17 8.2.2	N/A	
FCC 15.323(c)(10) IC RSS-213 5.2	Duplex connections	ANSI C63.17 8.3	N/A	Only PP
FCC 15.323(c)(11) IC RSS-213 5.2	Alternative monitoring interval	ANSI C63.17 8.4	N/A	
FCC 15.323(c)(12) IC RSS-213 5.2	Fair access	declaration	PASS	
FCC 15.323(e) IC RSS-213 5.2	Frame period and Jitter	ANSI C63.17 6.2.3	PASS	
FCC 15.323(e) IC RSS-213 5.2	Frame repetition stability	ANSI C63.17 6.2.2	PASS	
FCC 15.323(c)(5) IC RSS-213 5.2	Maximum spectrum occupancy	declaration	PASS	
Remarks:				

3 Test Conditions and Results

3.1 Test Conditions and Results – Cross reference to subpart B

Cross reference to subpart B acc. to FCC 47 CFR 15D		Verdict: N/A
EUT requirement rule parts and clause	Reference	
	FCC 15.309(b)	
Test according to measurement reference	Reference Method	
	Declaration	
Requirements		
The requirements of subpart D apply only to the radio transmitter contained in the PCS device. Other aspects of the operation of a PCS device may be subject to requirements contained elsewhere in this chapter. In particular, a PCS device that includes digital circuitry not directly associated with the radio transmitter also is subject to the requirements for unintentional radiators in subpart B.		
Result		
The EUT does not contain any digital circuitry not directly associated with the radio transmitter		

3.2 Test Conditions and Results – AC power line conducted emissions

Conducted emissions acc. to FCC 47 CFR 15D / IC RSS-213				Verdict: PASS	
EUT requirement rule parts and clause		Reference			
		FCC 15.315 / FCC 15.207 / IC RSS-213 5.4			
Test according referenced standards		Reference Method			
		ANSI C63.4			
Fully configured sample scanned over the following frequency range		Frequency range			
		0.15MHz to 30MHz			
Points of Application		Application Interface			
AC Mains		LISN			
EUT test mode		AC-Powerline			
Limits and results					
Frequency [MHz]		Quasi-Peak [dBμV]	Result	Average [dBμV]	Result
0.15 to 5		66 to 56*	PASS	56 to 46*	PASS
0.5 to 5		56	PASS	46	PASS
5 to 30		60	PASS	50	PASS
Comments:					
* Limit decreases linearly with the logarithm of the frequency.					


Conducted Emissions 1

EMI voltage test in the ac-mains according to FCC 15B

Project number: G0M-1702-6254

Applicant: Ceotronics AG
 EUT Name: DECT/UPCS - Modul
 Model: CT-DECT M7
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 22°C, Unom: 120 VAC AC/DC-Adaptor
 LISN: ESH2-Z5 N
 Mode: FP
 Test Date: Donnerstag, 2. März 2017
 Note:

Index 1

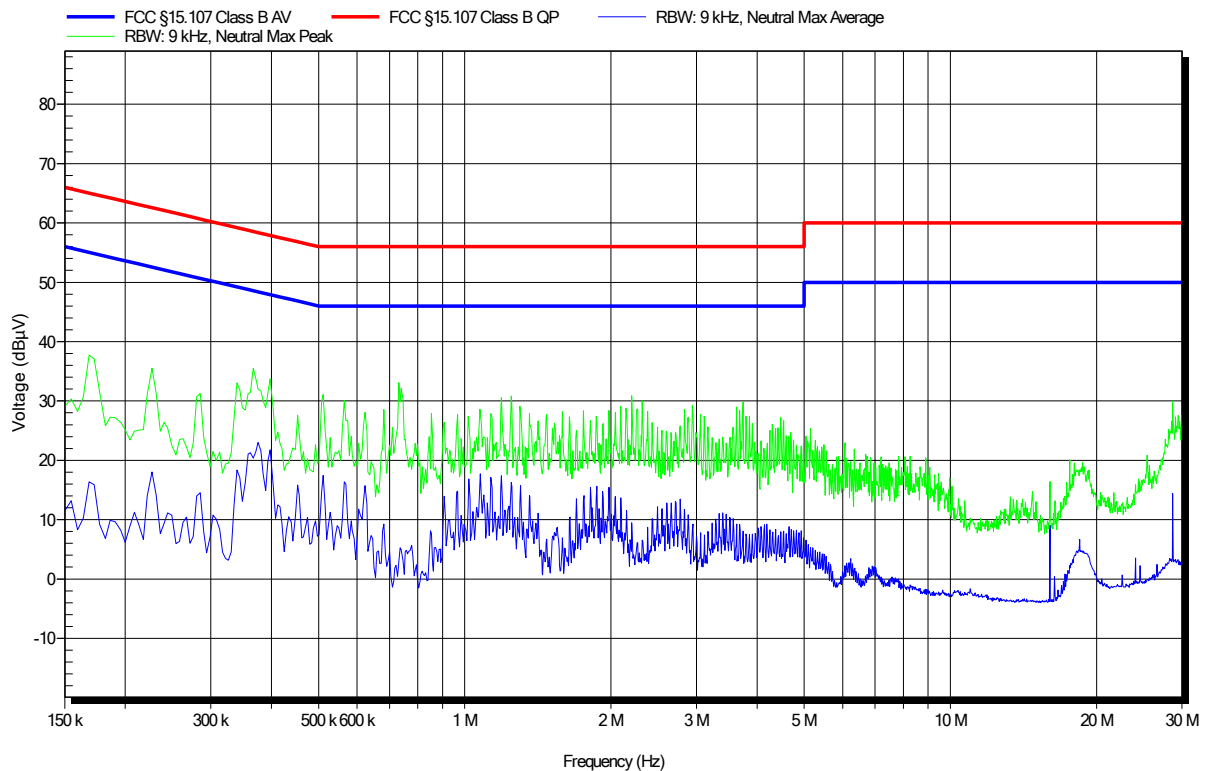

Test Report No.: G0M-1702-6254-TFC15DFP-V03

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany


Conducted Emissions 2

EMI voltage test in the ac-mains according to FCC 15B

Project number: G0M-1702-6254

Applicant: Ceotronics AG
 EUT Name: DECT/UPCS - Modul
 Model: CT-DECT M7
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Handrik
 Test Conditions: Tnom: 22°C, Unom: 120 VAC AC/DC-Adaptor
 LISN: ESH2-Z5 L
 Mode: FP
 Test Date: Donnerstag, 2. März 2017
 Note:

Index 4

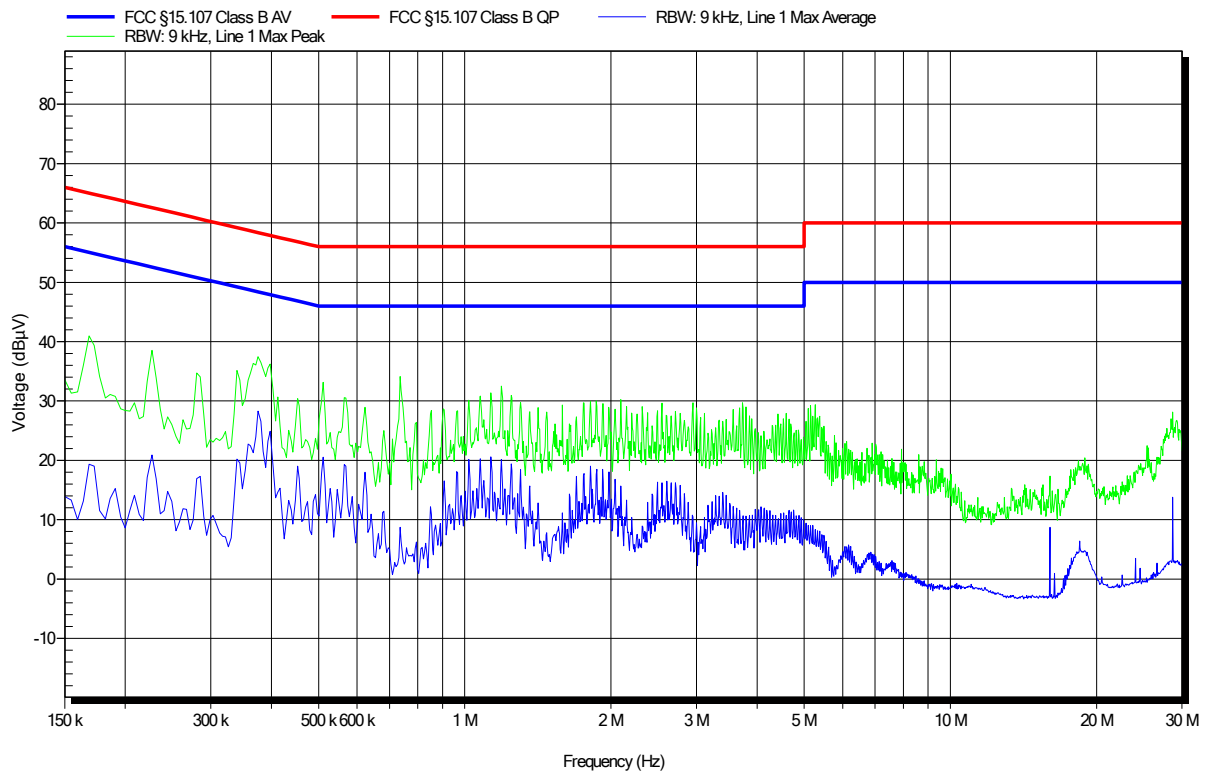

Test Report No.: G0M-1702-6254-TFC15DFP-V03

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

3.3 Test Conditions and Results – Antenna requirement

Antenna requirement acc. to FCC 47 CFR 15D				Verdict: PASS
EUT requirement rule parts and clause		Reference		
		FCC 15.317 / FCC 15.203		
Test according to measurement reference		Reference Method		
		visual inspection & declaration		
Requirements				
An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. When an antenna conducted measurement is used to determine the RF output power of the device, the effective gain of the antenna intended for the device must be stated, based on measurement or on data from the antenna manufacturer. Any antenna gain in excess of 3 dBi (3 dB above isotropic gain) shall be added to the measured RF output power before using the power limits				
Results				
Antenna No.	Type	Antenna gain [dBi]	Antenna gain in excess of 3 dBi	
1	internal	3.5	0.5	
2	internal	1.5	0.0	

3.4 Test Conditions and Results – Digital modulation

Antenna requirement acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 15.319(b) / IC RSS-213 5.1	
Test according to measurement reference	Reference Method	
	Declaration	
Requirements		
All transmissions must use only digital modulation techniques		
Results		
The test sample is an isochronous digital modulated device that operates in 1920-1930 MHz band. This device bases on DECT technology described in European Standards EN 300 175-2 and EN 300 175-3, now operating in frequency channels mentioned above. The operating modes are MC/TDMA/TDD (Multi carrier / Time Division Multiple Access / Time Division Duplex) using Digital GFSK modulation. For further details see operational description provided by manufacturer.		

3.5 Test Conditions and Results – Occupied Bandwidth


Occupied Bandwidth acc. to IC RSS-213				Verdict: PASS
Test according to measurement reference		Reference Method		
		IC RSS-213 5.5 / IC RSS-Gen 6.6		
Tested frequencies		F _{LOW} / F _{MID} / F _{HIGH}		
EUT test mode		TDMA		
Limits				
0.05MHz ≤ Occupied Bandwidth < 2.5MHz				
Test setup				
EUT Companion device Splitter Spectrum analyzer Interferer Generators				
Test procedure				
1. EUT is restricted to test channel with the interferes 2. Span set to at least twice the emission spectrum 3. Resolution bandwidth set to 1% of span 4. Occupied Bandwidth (99%) measurement with spectrum analyzer built in measurement function				
Test results				
Channel	Center frequency [MHz]	Lower edge [MHz]	Upper edge [MHz]	Occupied Bandwidth [MHz]
F _{LOW}	1921.536	1920.920	1922.144	1.224
F _{MID}	1924.992	1924.376	1925.592	1.216
F _{HIGH}	1928.448	1927.832	1929.056	1.224
Comments:				

Occupied Bandwidth - F_{LOW}

RSS Gen

Occupied Bandwidth

EUT Model	DECT / UPCS - Module CT-DECT M7
Approval Holder	Ceotronics AG
Temperature / Voltage	tnom
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	Occupied Bandwidth
Comment 1	Channel.: 4
Comment 2	A spectrum analyzer with an integrated 99% power BW function is used
Comment 3	OBW: 1.224 MHz

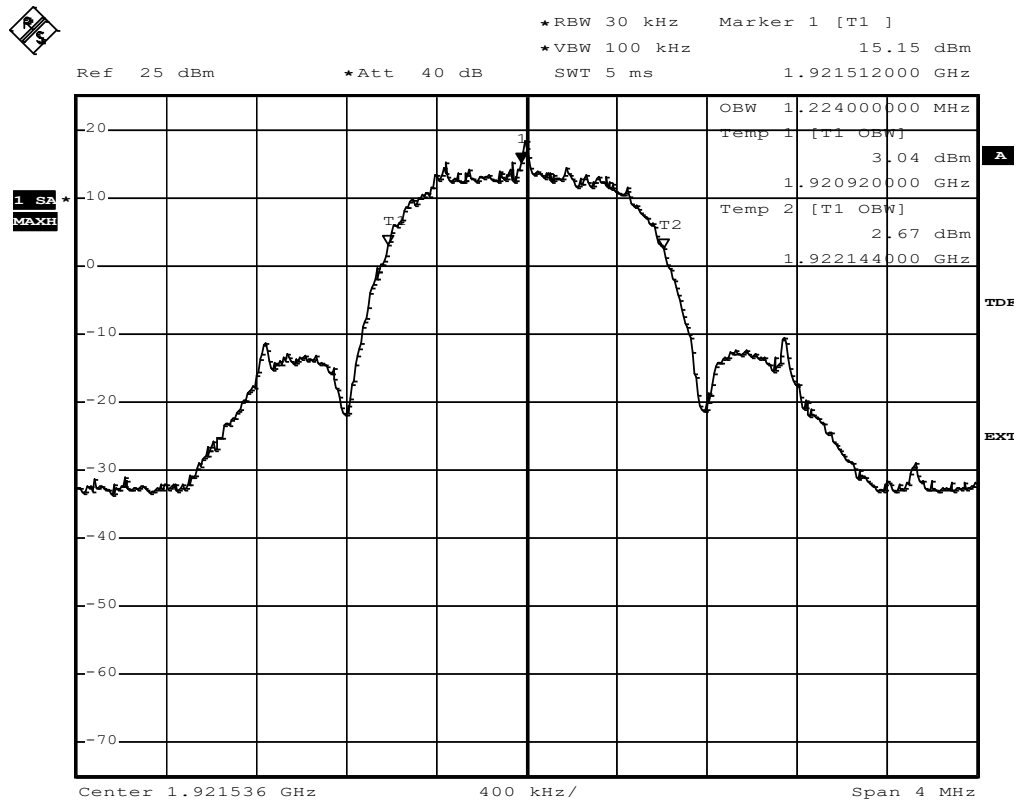

Comment: _
Date: 20.FEB.2017 10:14:42

Test Report No.: G0M-1702-6254-TFC15DFP-V03


Euofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – F_{MID}

RSS Gen

Occupied Bandwidth

EUT	DECT / UPCS - Module
Model	CT-DECT M7
Approval Holder	Ceotronics AG
Temperature / Voltage	tnom
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	Occupied Bandwidth
Comment 1	Channel.: 2
Comment 2	A spectrum analyzer with an integrated 99% power BW function is used
Comment 3	OBW: 1.216

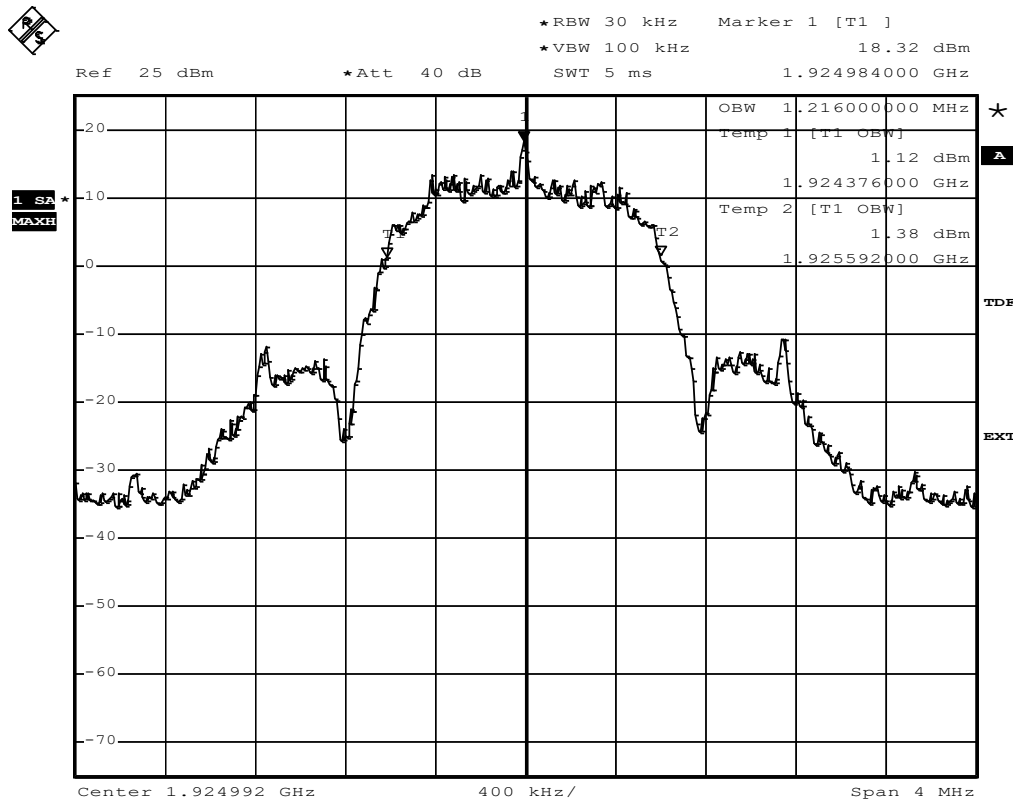

Comment: _
Date: 20.FEB.2017 10:20:17

Test Report No.: G0M-1702-6254-TFC15DFP-V03


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Occupied Bandwidth – F_{HIGH}

RSS Gen Occupied Bandwidth


EUT DECT / UPCS - Module
Model CT-DECT M7
Approval Holder Ceotronics AG
Temperature / Voltage tnom
Test Site / Operator Eurofins Product Service GmbH
Test Specification Occupied Bandwidth
Comment 1 Channel.: 0
Comment 2 A spectrum analyzer with an integrated 99% power BW function is used

Comment 3 OBW: 1.224 MHz

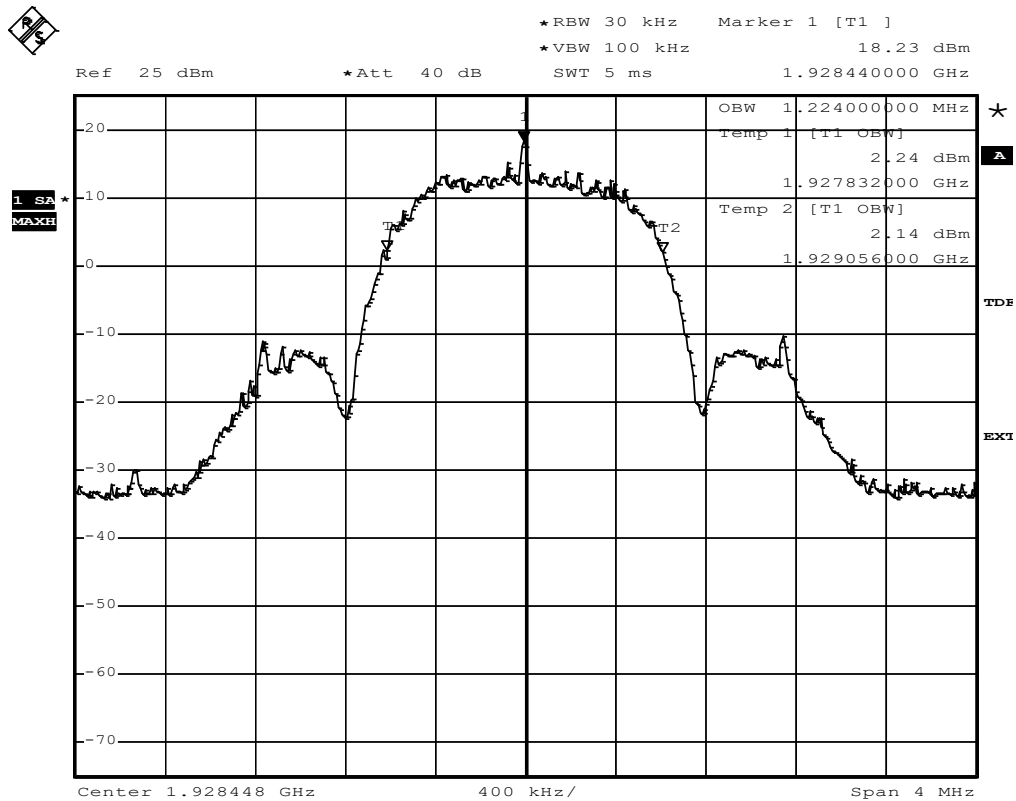

Comment: _
Date: 20.FEB.2017 10:31:20

3.6 Test Conditions and Results – Emission Bandwidth

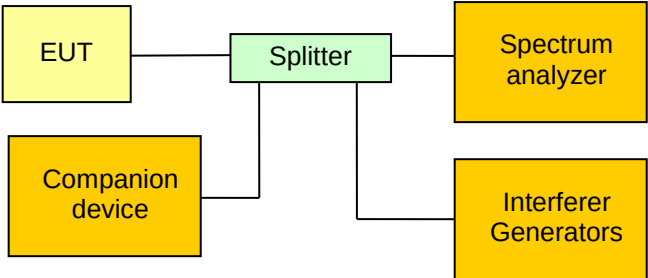Emission Bandwidth acc. to FCC 47 CFR 15D		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 15.323(a)	
Test according to measurement reference	Reference Method	
	ANSI C63.17 6.1.3	
Tested frequencies	F_{LOW} / F_{HIGH}	
EUT test mode	TDMA	
Limits		
$0.05 \text{ MHz} \leq \text{Emission Bandwidth} < 2.5 \text{ MHz}$		
Test setup		
 <pre> graph LR EUT[EUT] --- Splitter[Splitter] Splitter --- SA[Spectrum analyzer] Splitter --- IG[Interferer Generators] CD[Companion device] --- Splitter </pre>		
Test procedure		
1. EUT set to test mode 2. Span set to at least twice the emission spectrum 3. Resolution bandwidth set to 1% of emission bandwidth and detector is set to peak with max hold 4. The emission bandwidth is determined by the two -26dB points left and right of the maximum emission level 5. (The emission bandwidth is determined by the two -12dB points left and right of the maximum emission level) 6. (The emission bandwidth is determined by the two -6dB points left and right of the maximum emission level)		

Test result					
Channel	Center frequency [MHz]	Mode	Lower edge [MHz]	Upper edge [MHz]	Bandwidth [MHz]
F _{LOW}	1921.536	-26 dB	1920.840	1922.224	1.384
F _{HIGH}	1928.448	-26 dB	1927.738	1929.152	1.414
F _{LOW}	1921.536	-12 dB	1920.946	1922.108	1.162
F _{HIGH}	1928.448	-12 dB	1927.856	1929.030	1.174
F _{LOW}	1921.536	-6 dB	1921.144	1921.912	0.768
F _{HIGH}	1928.448	-6 dB	1928.036	1928.876	0.840
Comments:					

Emission Bandwidth – F_{LOW}


FCC Part 15.303 Emission bandwidth

Testprocedure ANSI 63.17 UPCS

EUT	DECT / UPCS Module
Model	CT-DECT M7
Applicant	CeoTronics AG
Temperature	23°C
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	Emission bandwidth

Measured Bandwidth Emission Bandwidth = 1.384MHz
Max. Permitted Power Limit = 2.5 MHz

Test result Verdict = PASS

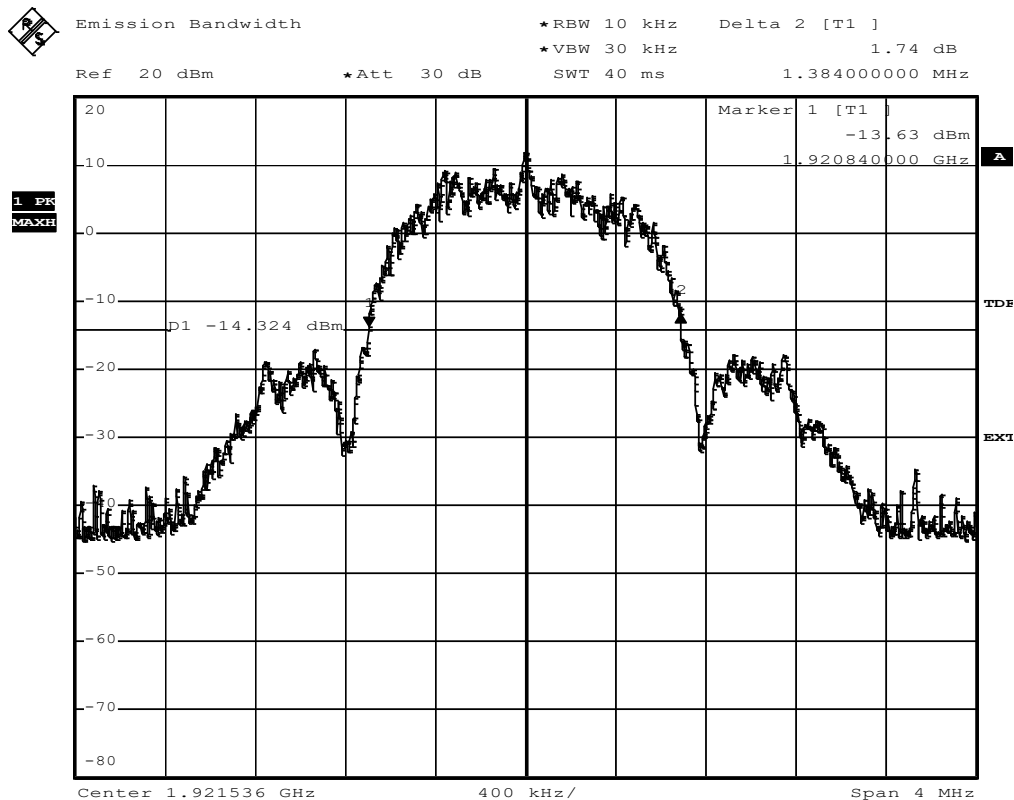

Comment: Ansi C63.17-2006 6.1.3
Date: 20.FEB.2017 08:28:39

Emission Bandwidth – F_{HIGH}


FCC Part 15.303 Emission bandwidth

Testprocedure ANSI 63.17 UPCS

EUT	DECT / UPCS Module
Model	CT-DECT M7
Applicant	CeoTronics AG
Temperature	23°C
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	Emission bandwidth

Measured Bandwidth Emission Bandwidth = 1.414MHz
Max. Permitted Power Limit = 2.5 MHz

Test result Verdict = PASS

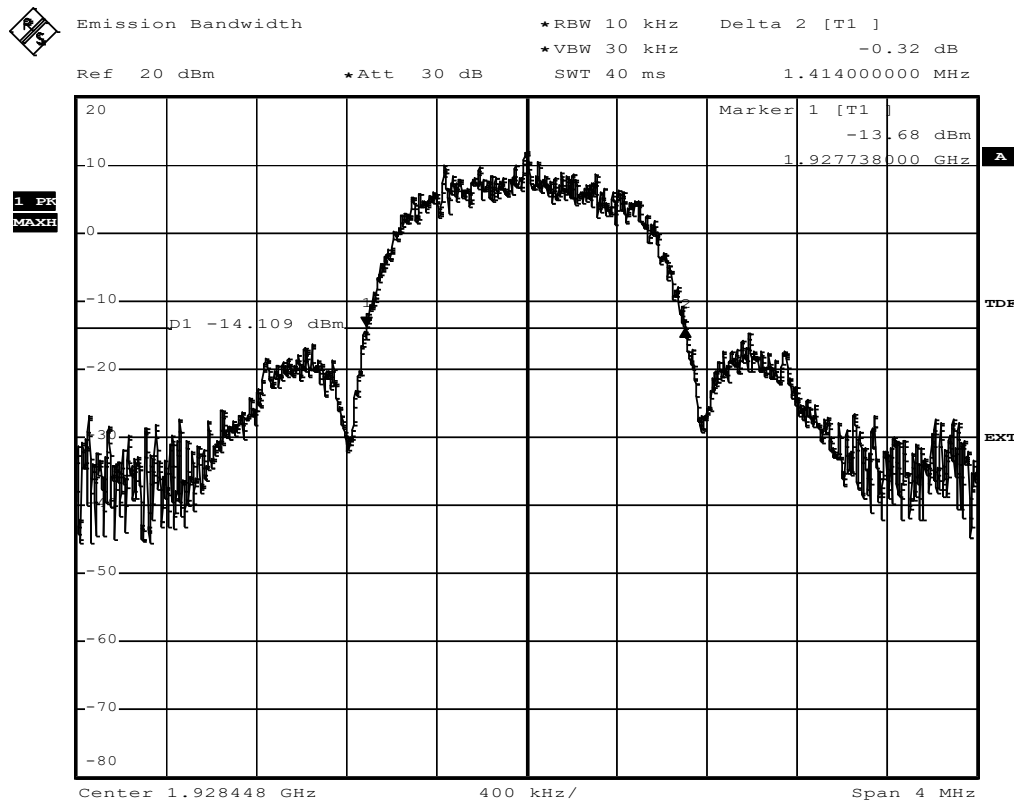

Comment: Ansi C63.17-2006 6.1.3
Date: 20.FEB.2017 09:12:51

3.7 Test Conditions and Results – Peak transmit power

Peak transmit power acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 15.319(c),(e) / IC RSS-213 5.6	
Test according to measurement reference	Reference Method	
	ANSI C63.17 6.1.2	
Tested frequencies	F _{LOW} / F _{HIGH}	
EUT test mode	TDMA	
Antenna excess gain	0.5 dB	
Limits		
Peak transmit power shall not exceed 100 microwatts multiplied by the square root of the emission bandwidth in hertz. The peak transmit power shall be reduced by the amount in decibels that the maximum directional gain of the antenna exceeds 3 dBi. $P_{EUT}[dBm] \leq P_{limit} \text{ where } P_{limit} = \begin{cases} P_{max} - (G_A - g), & \text{when } G_A > 3 \text{ dBi} \\ P_{max}, & G_A < 3 \text{ dBi} \end{cases}$ $P_{max}[dBm] = 5 \log(\text{Emission/Occupied Bandwidth [Hz]}) - 10 \text{ dBm}$		
Test setup		
EUT Splitter Spectrum analyzer Companion device		
Test procedure		
1. EUT set to test mode 2. The RBW is set to be larger than the emission bandwidth and VBW ≥ RBW 3. Transmission burst is measured in zero span and peak detector 4. The maximum level in the burst is recorded as peak transmit power		


Test results - FCC						
Channel	Frequency [MHz]	Peak Power [dbm]	Emission Bandwidth [Hz]	Excess gain [dB]	Limit [dbm]	Margin [dB]
F _{LOW} , V _{NOM}	1921.536	19.55	1384000	0.5	20.21	-00.66
F _{LOW} , V _{MIN}	1921.536	19.67	1384000	0.5	20.21	-00.54
F _{LOW} , V _{MAX}	1921.536	19.70	1384000	0.5	20.21	-00.51
F _{HIGH} , V _{NOM}	1928.448	19.43	1414000	0.5	20.25	-00.82
F _{HIGH} , V _{MIN}	1928.448	19.49	1414000	0.5	20.25	-00.76
F _{HIGH} , V _{MAX}	1928.448	19.55	1414000	0.5	20.25	-00.70
Test results - IC						
Channel	Frequency [MHz]	Peak Power [dbm]	Occupied Bandwidth [Hz]	Excess gain [dB]	Limit [dbm]	Margin [dB]
F _{LOW} , V _{NOM}	1921.536	19.55	1224000	0.5	19.94	-00.39
F _{LOW} , V _{MIN}	1921.536	19.67	1224000	0.5	19.94	-00.27
F _{LOW} , V _{MAX}	1921.536	19.70	1224000	0.5	19.94	-00.24
F _{HIGH} , V _{NOM}	1928.448	19.43	1224000	0.5	19.94	-00.51
F _{HIGH} , V _{MIN}	1928.448	19.49	1224000	0.5	19.94	-00.45
F _{HIGH} , V _{MAX}	1928.448	19.55	1224000	0.5	19.94	-00.39

Peak Power – F_{LOW}, V_{NOM}

FCC Part 15.319 Peak Transmit Power limit

Testprocedure ANSI 63.17
UPCS

EUT	DECT / UPCS Module
Model	CT-DECT M7
Applicant	CeoTronics AG
Temperature	23°C
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	Peak transmit power
Supply	Vnom
Measured Bandwidth	1.384MHz
Max. Permitted Power	20.21 dBm(FCC) / 19.94 dBm (IC)
Measured Power	19.55 dBm
Test result	Verdict = PASS

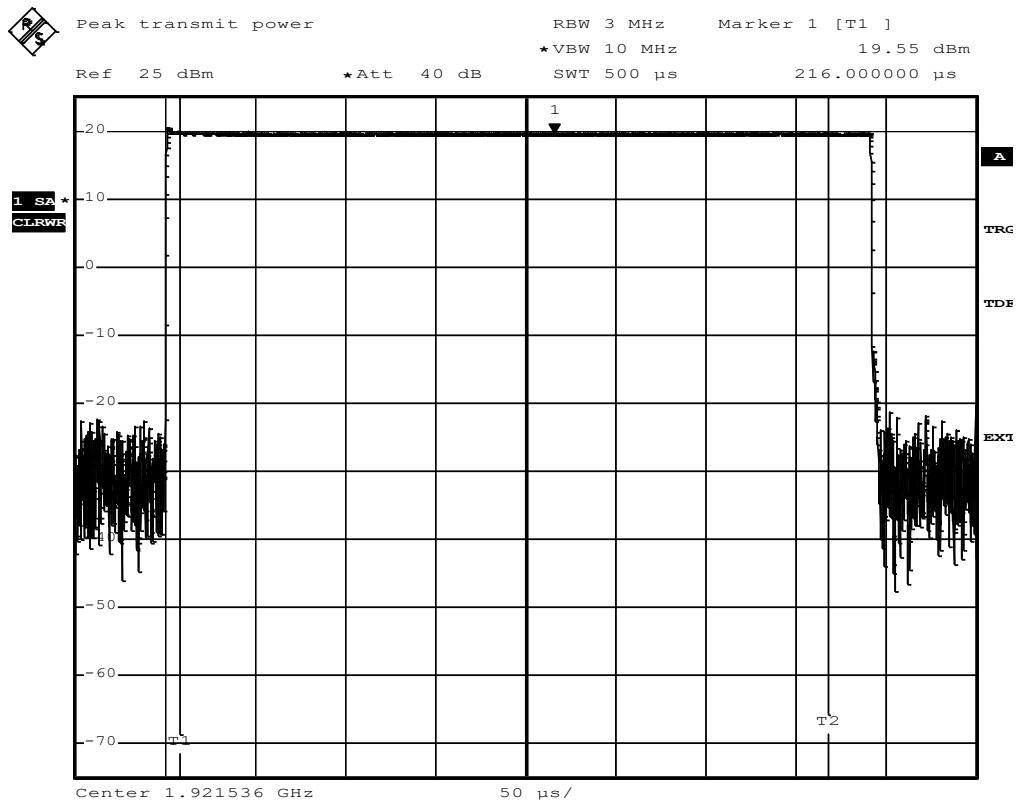


Comment: Ansi C63.17-2006 6.1.2
Date: 20.FEB.2017 10:59:36

Peak Power – F_{LOW}, V_{MIN}

FCC Part 15.319 Peak Transmit Power limit

Testprocedure ANSI 63.17
UPCS

EUT	DECT / UPCS Module
Model	CT-DECT M7
Applicant	CeoTronics AG
Temperature	23°C
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	Peak transmit power
Supply	Vmin
Measured Bandwidth	1.41MHz
Max. Permitted Power	20.21 dBm(FCC) / 19.94 dBm (IC)
Measured Power	19.67 dBm
Test result	Verdict = PASS

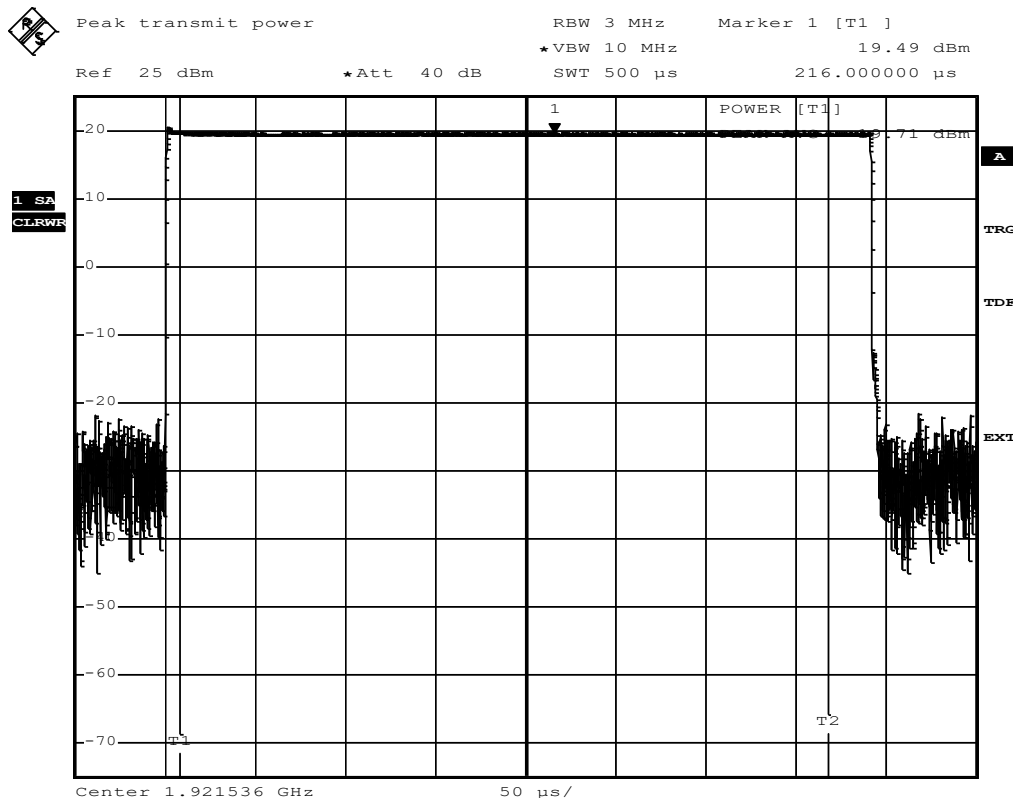


Comment: Ansi C63.17-2006 6.1.2
Date: 20.FEB.2017 11:36:23

Peak Power – F_{LOW} , V_{MAX}

FCC Part 15.319 Peak Transmit Power limit

Testprocedure ANSI 63.17
UPCS

EUT	DECT / UPCS Module
Model	CT-DECT M7
Applicant	CeoTronics AG
Temperature	23°C
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	Peak transmit power
Supply	Vmax
Measured Bandwidth	1.41MHz
Max. Permitted Power	20,21 dBm (FCC) / 19.94 dBm (IC)
Measured Power	19.7 dBm
Test result	Verdict = PASS

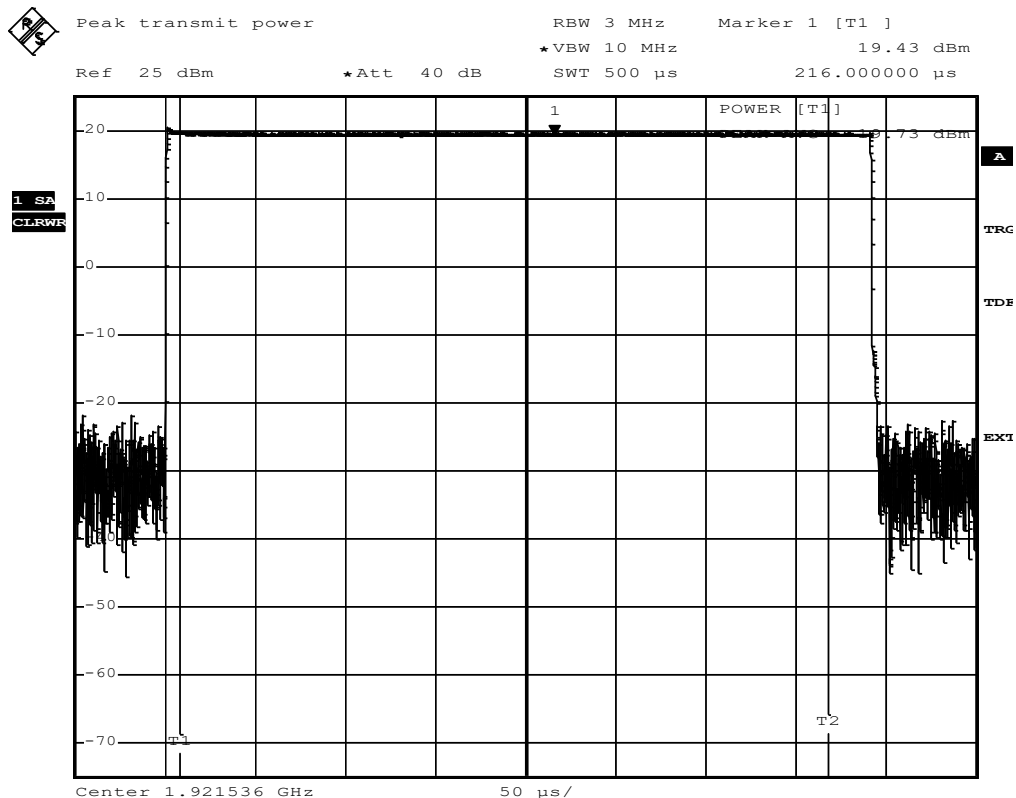


Comment: Ansi C63.17-2006 6.1.2
Date: 20.FEB.2017 11:34:29

Peak Power – F_{HIGH} , V_{NOM}

FCC Part 15.319 Peak Transmit Power limit

Testprocedure ANSI 63.17
UPCS

EUT	DECT / UPCS Module
Model	CT-DECT M7
Applicant	CeoTronics AG
Temperature	23°C
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	Peak transmit power
Supply	Vnom
Measured Bandwidth	1.41MHz
Max. Permitted Power	20,25 dBm (FCC) / 19.94 dBm (IC)
Measured Power	19.43 dBm
Test result	Verdict = PASS

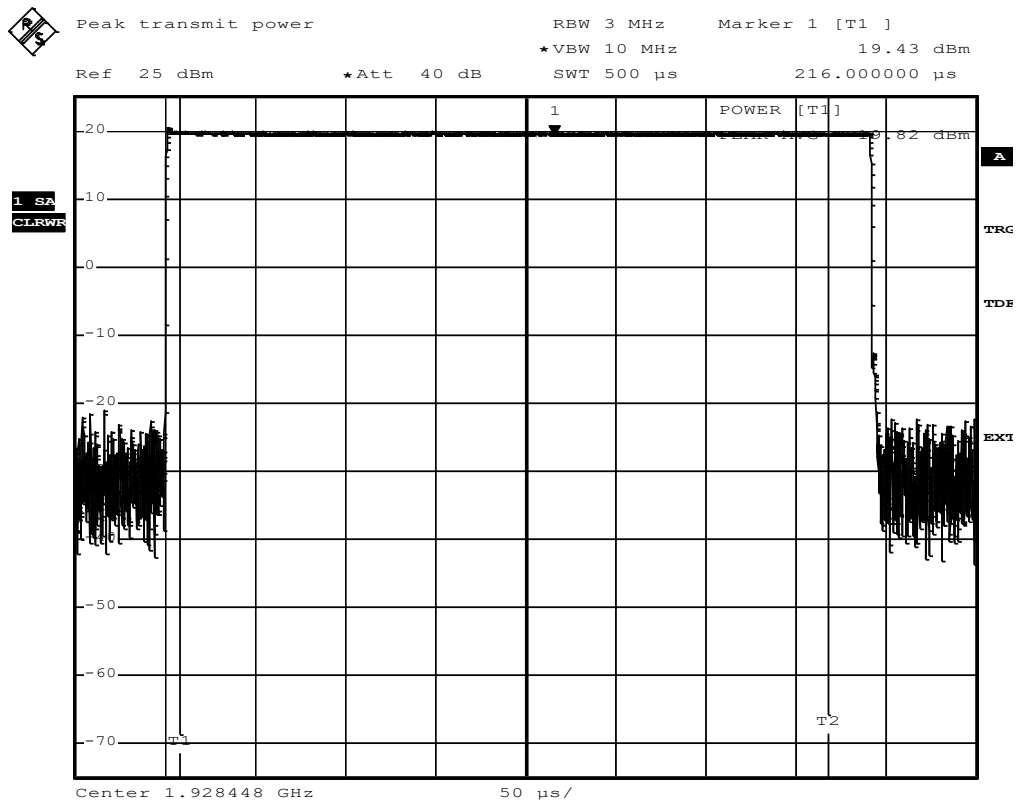


Comment: Ansi C63.17-2006 6.1.2
Date: 20.FEB.2017 11:23:47

Peak Power – F_{HIGH}, V_{MIN}

FCC Part 15.319 Peak Transmit Power limit

Testprocedure ANSI 63.17
UPCS

EUT	DECT / UPCS Module
Model	CT-DECT M7
Applicant	CeoTronics AG
Temperature	23°C
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	Peak transmit power
Supply	Vmin
Measured Bandwidth	1.41MHz
Max. Permitted Power	20,25 dBm (FCC) / 19.94 dBm (IC)
Measured Power	19.49 dBm
Test result	Verdict = PASS

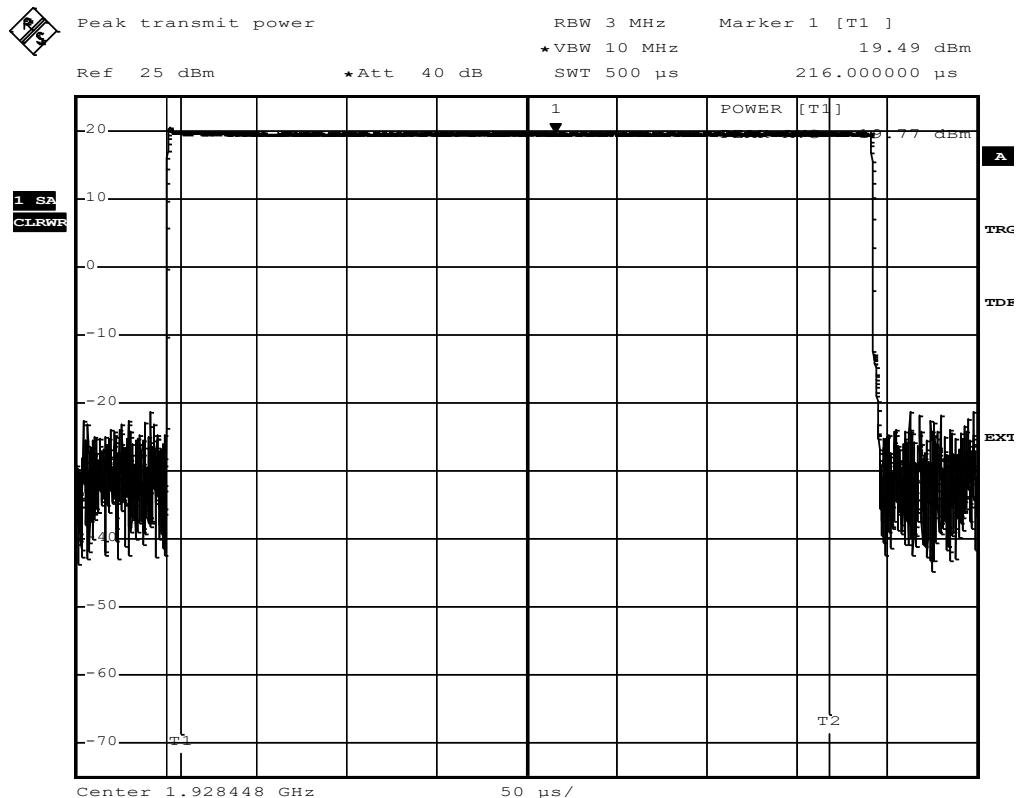

Comment: Ansi C63.17-2006 6.1.2
Date: 20.FEB.2017 11:28:54

Peak Power – F_{HIGH} , V_{MAX}

FCC Part 15.319 Peak Transmit Power limit

Testprocedure ANSI 63.17
UPCS

EUT	DECT / UPCS Module
Model	CT-DECT M7
Applicant	CeoTronics AG
Temperature	23°C
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	Peak transmit power
Supply	Vmax
Measured Bandwidth	1.41MHz
Max. Permitted Power	20,25 dBm (FCC) / 19.94 dBm (IC)
Measured Power	19.55 dBm
Test result	Verdict = PASS



Peak transmit power

RBW 3 MHz

Marker 1 [T1]

*VBW 10 MHz


19.55 dBm

Ref 25 dBm

*Att 40 dB

SWT 500 μ s

216.000000 μ s

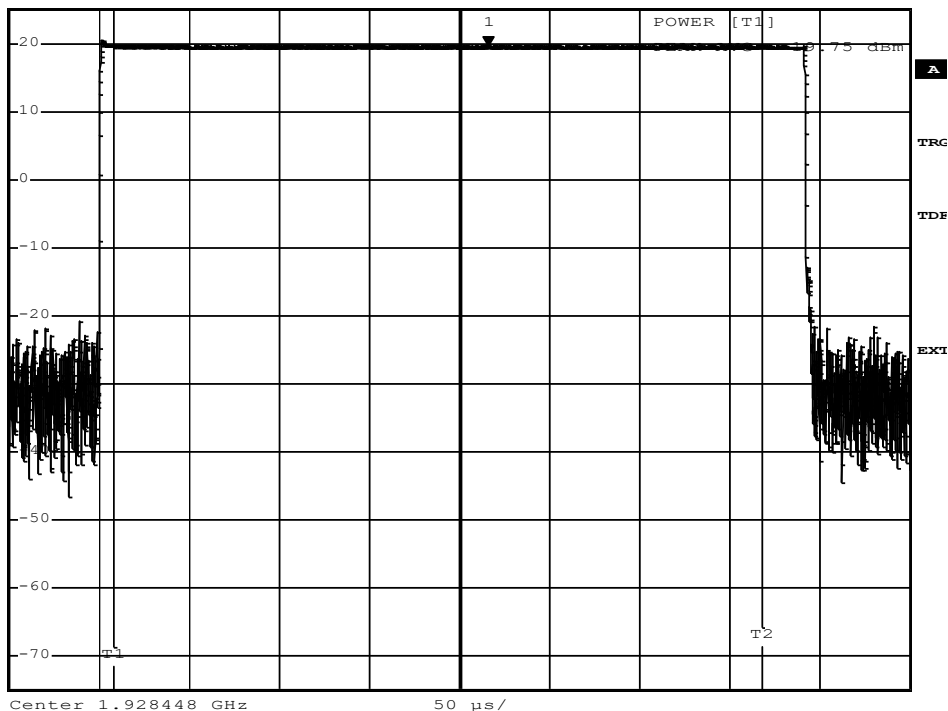1. SA
CLRWR


Comment: Ansi C63.17-2006 6.1.2

Date: 20.FEB.2017 11:31:41

Test Report No.: G0M-1702-6254-TFC15DFP-V03

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

3.8 Test Conditions and Results – Power spectral density

Power spectral density acc. to FCC 47 CFR 15D / IC RSS-213				Verdict: PASS
EUT requirement rule parts and clause	Reference			
	FCC 15.319(d) / IC RSS-213 5.7			
Test according to measurement reference	Reference Method			
	ANSI C63.17 6.1.5			
Tested frequencies	F _{LOW} / F _{HIGH}			
EUT test mode	TDMA			
Limits				
≤ 3 mW (4.77 dBm) / 3 kHz				
Test setup				
EUT Splitter Spectrum analyzer Companion device				
Test procedure				
1. EUT set to test mode 2. The RBW is set to 3 kHz and VBW ≥ 3 x RBW 3. The center frequency is set to the maximum of the emission envelope and the span is set to zero 4. With sample detector and a minimum of 100 sweeps the -20 dB points below the first peak are determined and the data points between the two -20 dB points are summed and normalized to get the average pulse power in a 3 kHz bandwidth				
Test results				
Channel	Frequency [MHz]	Peak Density [dbm/3kHz]	Limit [dBm/3kHz]	Margin [dB]
F _{LOW}	1921.536	-1.7823	4.77	-06.552
F _{HIGH}	1928.448	-0.9437	4.77	-05.714
Comments:				

Power Spectral Density – F_{Low}


FCC Part 15.319 Power spectral density

Testprocedure ANSI 63.17
UPCS

EUT	DECT / UPCS Module
Model	CT-DECT M7
Applicant	CeoTronics AG
Temperature	23°C
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	Power spectral density
Peak Frequency in MHz	1921,536000 MHz
Total pulse energy in mW	0,000260 mW
Wideband pulse duration in ms	0,391875 ms
PSD in mW	0,6634 mW
PSD in dBm	-1,7823 dBm

Pass criteria: PSD is less than 3mW

Verdict = PASS

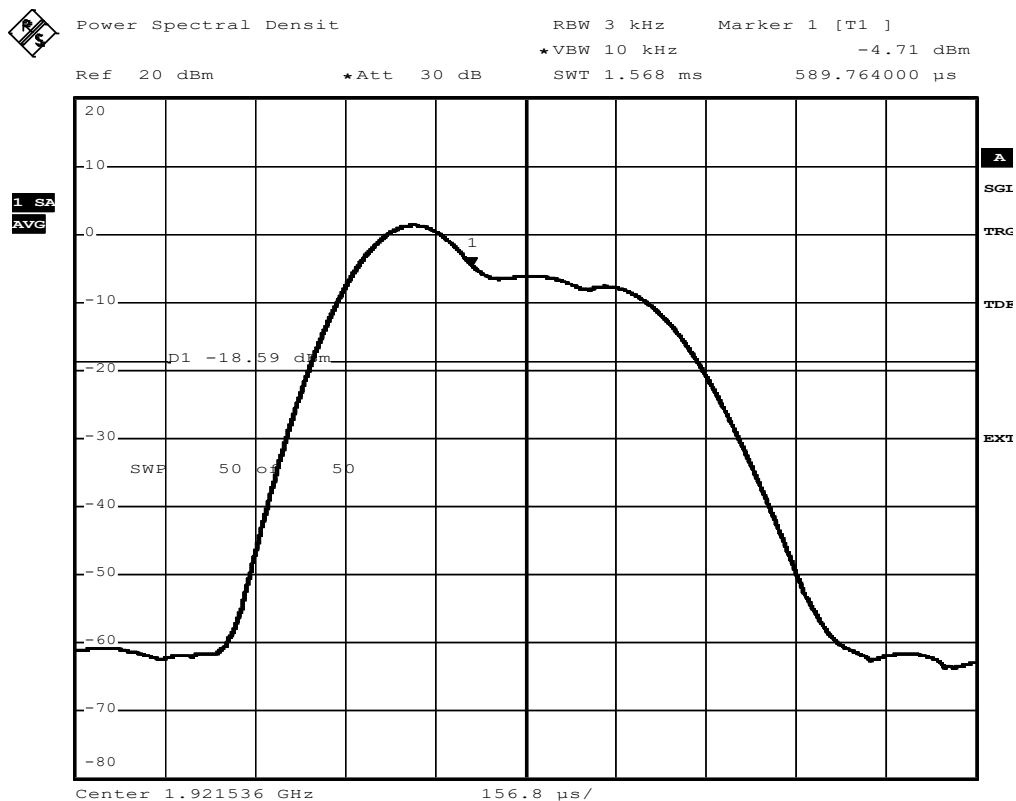

Comment: Ansi C63.17-2006 6.1.5
Date: 20.FEB.2017 09:41:48

Test Report No.: G0M-1702-6254-TFC15DFP-V03

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Power Spectral Density – F_{HIGH}


FCC Part 15.319 Power spectral density

Testprocedure ANSI 63.17
UPCS

EUT	DECT / UPCS Module
Model	CT-DECT M7
Applicant	CeoTronics AG
Temperature	23°C
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	Power spectral density
Peak Frequency in MHz	1928,448000 MHz
Total pulse energy in mW	0,000315 mW
Wideband pulse duration in ms	0,391875 ms
PSD in mW	0,8047 mW
PSD in dBm	-0,9437 dBm

Pass criteria: PSD is less than 3mW

Verdict = PASS

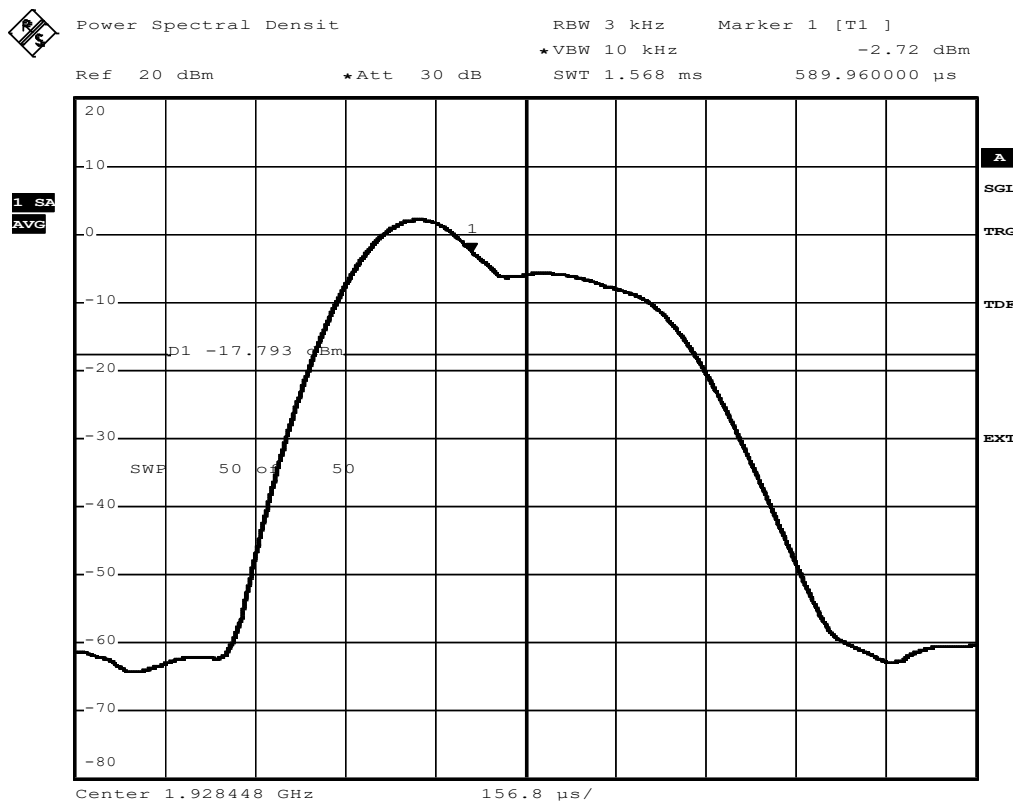

3.9 Test Conditions and Results – Frequency stability

Frequency stability acc. to FCC 47 CFR 15D / IC RSS-213				Verdict: PASS	
EUT requirement rule parts and clause		Reference			
		FCC 15.323(f) / IC RSS-213 5.3			
Test according to measurement reference		Reference Method			
		ANSI C63.17 6.2.1			
Tested frequencies		F _{MID}			
EUT test mode		TDMA			
Limits					
± 10 ppm / hour					
Test setup					
EUT Companion device Splitter Spectrum analyzer Interferer Generators					
Test procedure					
1. With interferer signals the EUT is forced to center channel and communication to companion device is established. 2. The demodulated carrier EUT signal is captured over time 3. The mean frequency is determined under all supply voltage and temperature conditions					
Test results					
Voltage	Temperature	Maximum Frequency deviation [ppm]	Limit [ppm]	Margin [ppm]	
2.4 VDC	25 °C	0.00 (reference)	±10.0	N/A	
2.2 VDC	25 °C	0.05	±10.0	-09.95	
3.45 VDC	25 °C	-0.05	±10.0	-09.95	
2.4 VDC	-30 °C	-2.65	±10.0	-07.35	
2.4 VDC	70°C	-3.58	±10.0	-06.42	
Comments:					

Carrier stability – Frequency stability – T_{NOM} V_{NOM}


FCC Part 15.323 Frequency Stability

Testprocedure ANSI 63.17

EUT	DECT / UPCS Module
Model	CT-DECT M7
Applicant	CeoTronics AG
Temperature	25 °C
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	Frequency stability

Power supply	Vnom
Frequency of carrier	1924,980645 MHz
Measured mean	1924,980645 MHz
Stability (supply temp)	0 ppm (reference)
Result	Verdict = PASS
Stability over time	fmax : 0,73 ppm fmin : 1,64 ppm
Result	Verdict = PASS

Histogram

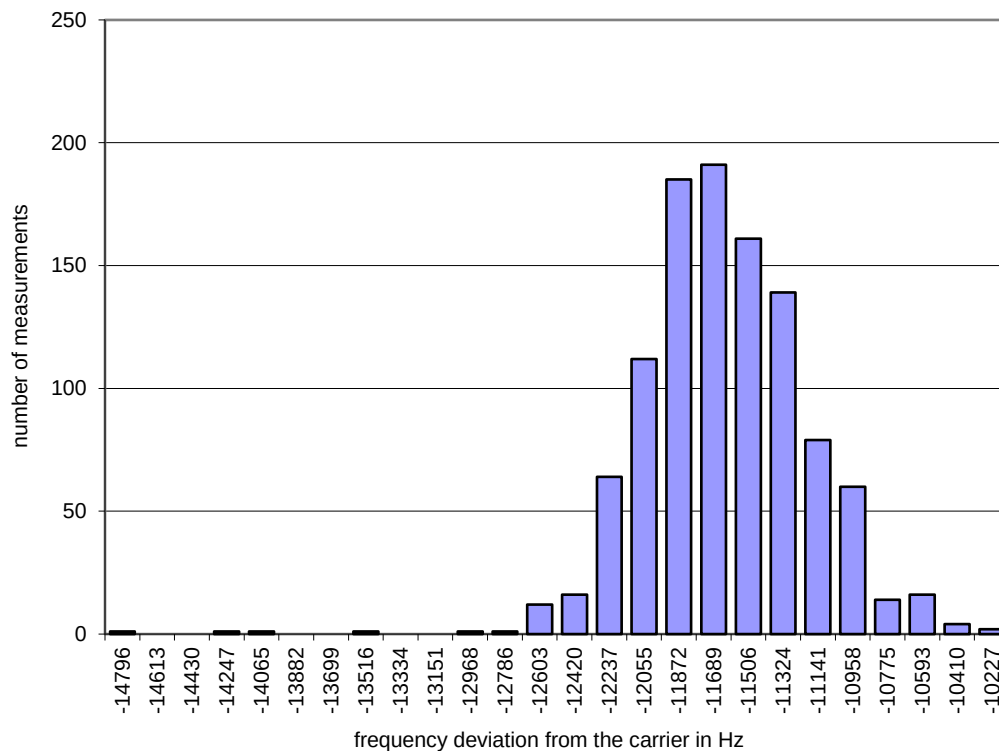


Carrier stability – Frequency stability – T_{NOM} V_{MIN}

FCC Part 15.323 Frequency Stability

Testprocedure ANSI 63.17

EUT	DECT / UPCS Module
Model	CT-DECT M7
Applicant	CeoTronics AG
Temperature	25 °C
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	Frequency stability
Power supply	Vmin
Frequency of carrier	1924,980645 MHz
Measured mean	1924,980747 MHz
Stability (supply temp)	0.05 ppm
Result	Verdict = PASS
Stability over time	fmax : 0,86 ppm fmin : 0,63 ppm
Result	Verdict = PASS

Histogram

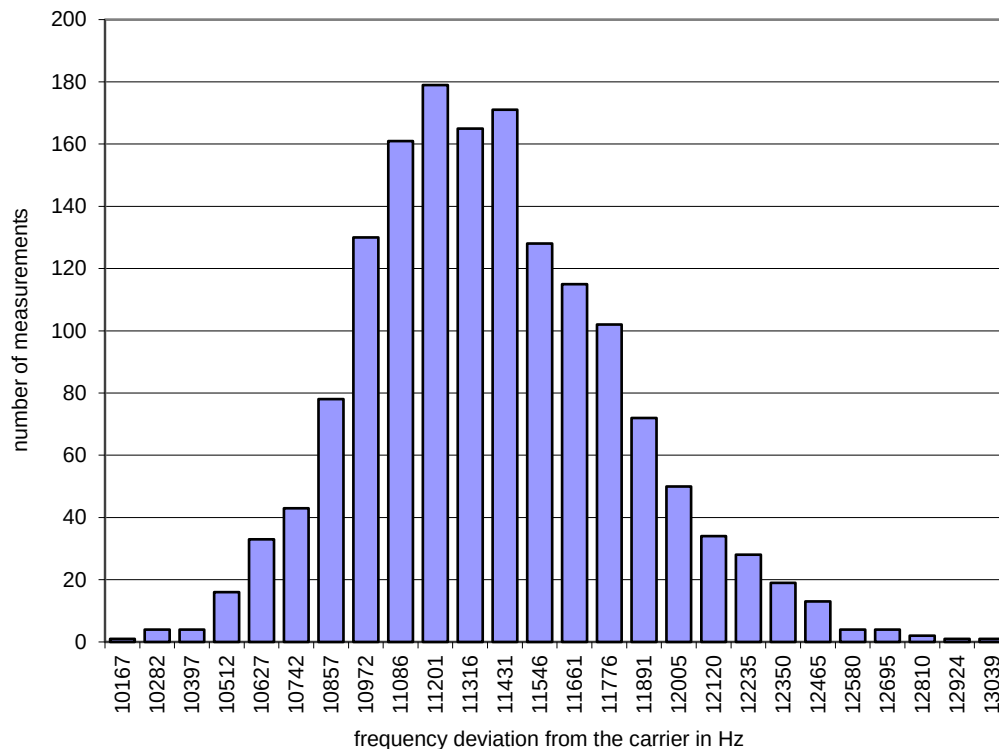


Carrier stability – Frequency stability – T_{NOM} V_{MAX}

FCC Part 15.323 Frequency Stability

Testprocedure ANSI 63.17

EUT	DECT / UPCS Module
Model	CT-DECT M7
Applicant	CeoTronics AG
Temperature	25 °C
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	Frequency stability
Power supply	Vmax
Frequency of carrier	1924,980645 MHz
Measured mean	1924,980541 MHz
Stability (supply temp)	-0,05 ppm
Result	Verdict = PASS
Stability over time	fmax : 0,68 ppm fmin : 0,63 ppm
Result	Verdict = PASS

Histogram

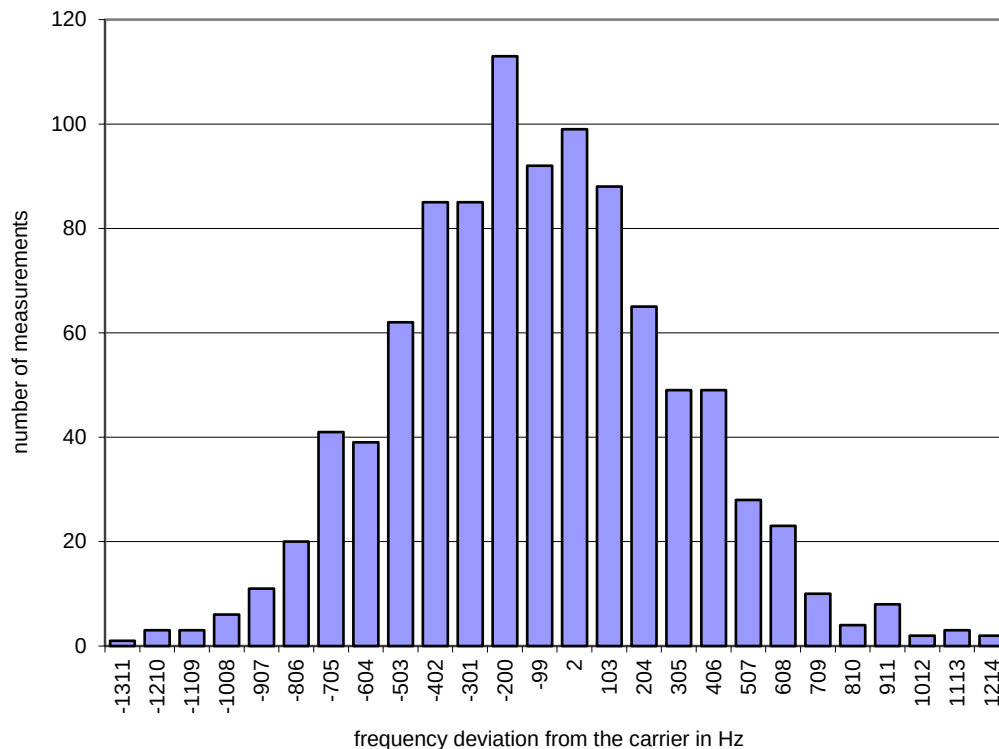

Carrier stability – Frequency stability – T_{MIN} V_{NOM}


FCC Part 15.323 Frequency Stability

Testprocedure ANSI 63.17

EUT	DECT / UPCS Module
Model	CT-DECT M7
Applicant	CeoTronics AG
Temperature	-30 °C
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	Frequency stability

Power supply	Vnom
Frequency of carrier	1924,980645 MHz
Measured mean	1924,975545 MHz
Stability (supply temp)	-2,65 ppm
Result	Verdict = PASS
Stability over time	fmax : 2,20 ppm fmin : 1,62 ppm
Result	Verdict = PASS

Histogram

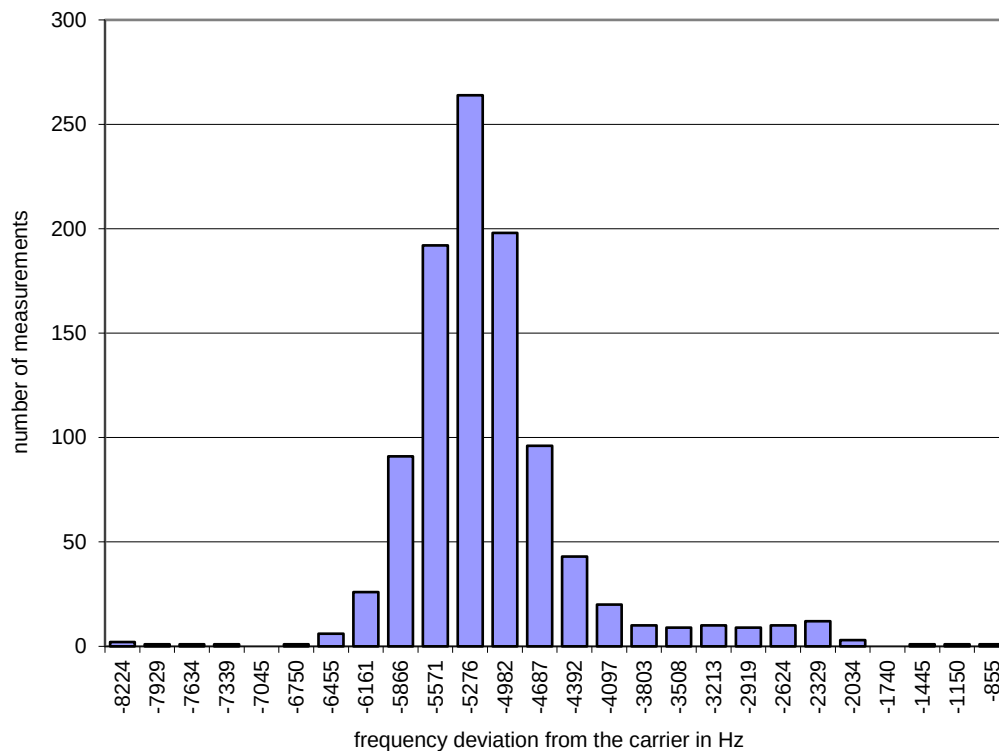


Carrier stability – Frequency stability – T_{MAX} V_{NOM}

FCC Part 15.323 Frequency Stability


Testprocedure ANSI 63.17

EUT	DECT / UPCS Module
Model	CT-DECT M7
Applicant	CeoTronics AG
Temperature	70 °C
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	Frequency stability
Power supply	Vnom
Frequency of carrier	1924,980645 MHz
Measured mean	1924,973757 MHz
Stability (supply temp)	-3,58 ppm
Result	Verdict = PASS
Stability over time	fmax : 0,69 ppm fmin : 0,80 ppm
Result	Verdict = PASS

Histogram

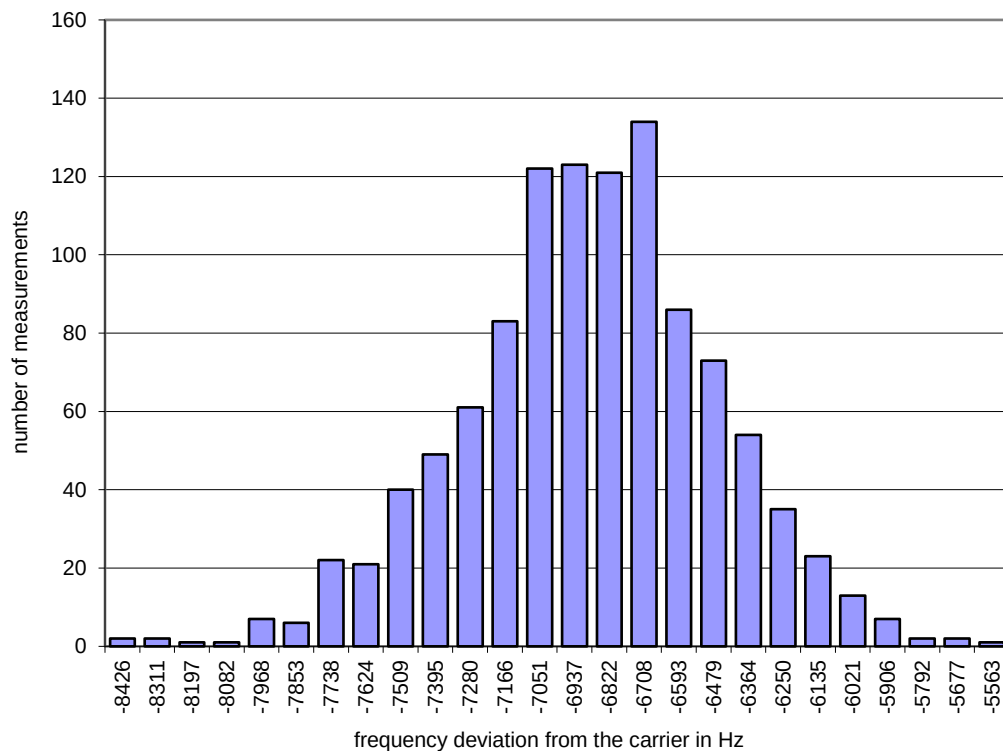

3.10 Test Conditions and Results – Transmitter in-band unwanted emissions

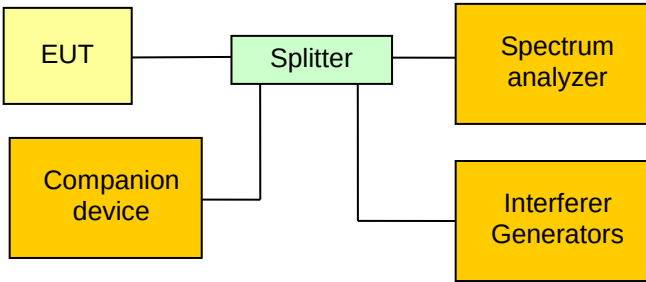Transmitter in-band unwanted emissions acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
Test according referenced standards	Reference Method	
	FCC 15.323(d) / IC RSS-213 5.8.2	
Test according to measurement reference	Reference Method	
	ANSI C63.17 6.1.6	
Tested frequencies	F _{LOW} / F _{HIGH}	
Tested frequency range	1920 – 1930 MHz	
Limits		
Frequency range [MHz]	Detector	Limit [dBc]
1920 MHz to (F _c – 3B)	Peak	-60
(F _c – 3B) to (F _c – 2B)	Peak	-50
(F _c – 2B) to (F _c – 1B)	Peak	-30
(F _c + 1B) to (F _c + 2B)	Peak	-30
(F _c + 2B) to (F _c + 3B)	Peak	-50
(F _c + 3B) to 1930 MHz	Peak	-60
B = emission / occupied bandwidth of selected channel F _c = Center frequency of selected channel		
Test setup		
		
Test procedure		
1. With interferer signal the EUT is forced to the test channel and a communication session is established between the EUT and the companion device 2. The RBW of the spectrum analyzer is set to 1% of the emission bandwidth and the VBW is set to 3 times the RBW 3. With peak detector and max hold the emission spectrum is recorded over the corresponding frequency range		

Test results		
Channel	Frequency [MHz]	Verdict
F _{LOW}	1921.536	PASS
F _{HIGH}	1928.448	PASS
Comments:		


Transmitter in-band unwanted emissions – F_{LOW}

FCC Part 15.323 In-band unwanted emission

**Testprocedure ANSI 63.17
UPCS**

EUT	DECT / UPCS Module
Model	CT-DECT M7
Applicant	CeoTronics AG
Temperature	23°C
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	In-band unwanted emission

EBW 1.384MHz

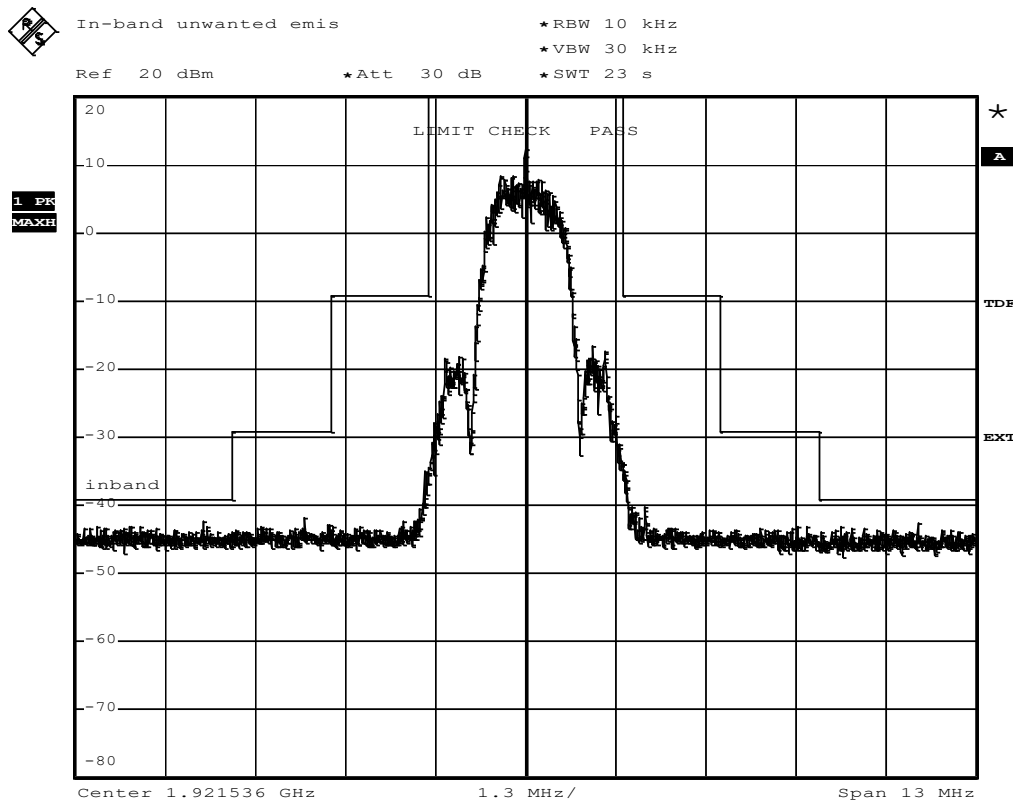

Comment: Ansi C63.17-2006 6.1.6.1
Date: 20.FEB.2017 11:48:23

Test Report No.: G0M-1702-6254-TFC15DFP-V03

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Transmitter in-band unwanted emissions – F_{HIGH}

FCC Part 15.323 In-band unwanted emission

Testprocedure ANSI 63.17 UPCS

EUT	DECT / UPCS Module
Model	CT-DECT M7
Applicant	CeoTronics AG
Temperature	23°C
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	In-band unwanted emission


BW	1.408MHz
----	----------

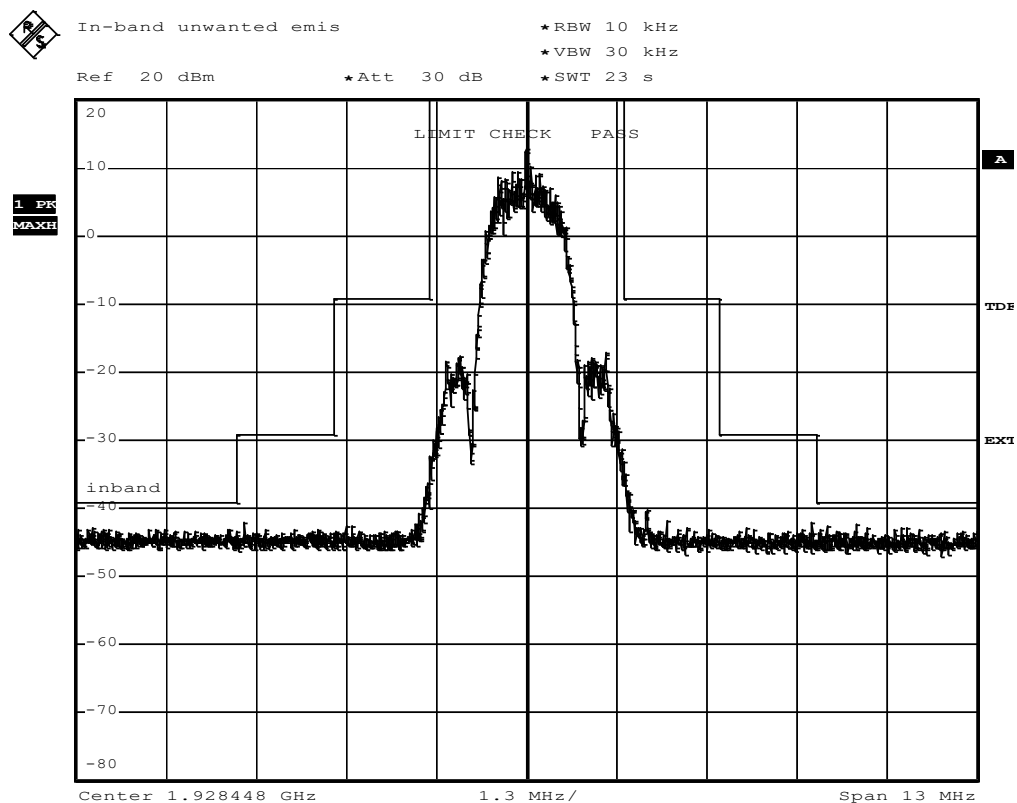

Comment: Ansi C63.17-2006 6.1.6.1
Date: 22.FEB.2017 13:26:00

3.11 Test Conditions and Results – Transmitter out-of-band emissions

Transmitter out-of-band emissions acc. to FCC 47 CFR 15D / IC RSS-213			Verdict: PASS
Test according referenced standards		Reference Method	
		FCC 15.323(d) / IC RSS-213 5.8.1	
Test according to measurement reference		Reference Method	
		ANSI C63.17 6.1.6	
Tested frequencies		F _{LOW} / F _{HIGH}	
Tested frequency range		30 MHz – 10 th Harmonic	
Test option		Tested according to option a), b) and d) in C63.17 6.1.6.2	
Limits			
Frequency range [MHz]	Detector	Limit	Limit Distance [m]
30 – 88	Quasi-Peak	100 µV/m (40 dBµV/m)	3
88 – 216	Quasi-Peak	150 µV/m (43.5 dBµV/m)	3
216 – 960	Quasi-Peak	200 µV/m (46 dBµV/m)	3
960 – 1000	Quasi-Peak	500 µV/m (54 dBµV/m)	3
1000 – 1917.5	Average	500 µV/m (54 dBµV/m)	3
1917.5 – 1918.75	Peak	-39.5 dBm *	N/A
1918.75 – 1920	Peak	-29.5 dBm *	N/A
1930 – 1931.25	Peak	-29.5 dBm *	N/A
1931.25 – 1932.5	Peak	-39.5 dBm *	N/A
1932.5 - 20000	Average	500 µV/m (54 dBµV/m)	3
Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)). When average radiated emission measurements are specified, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test. * Measurement is performed with conducted measurement setup			

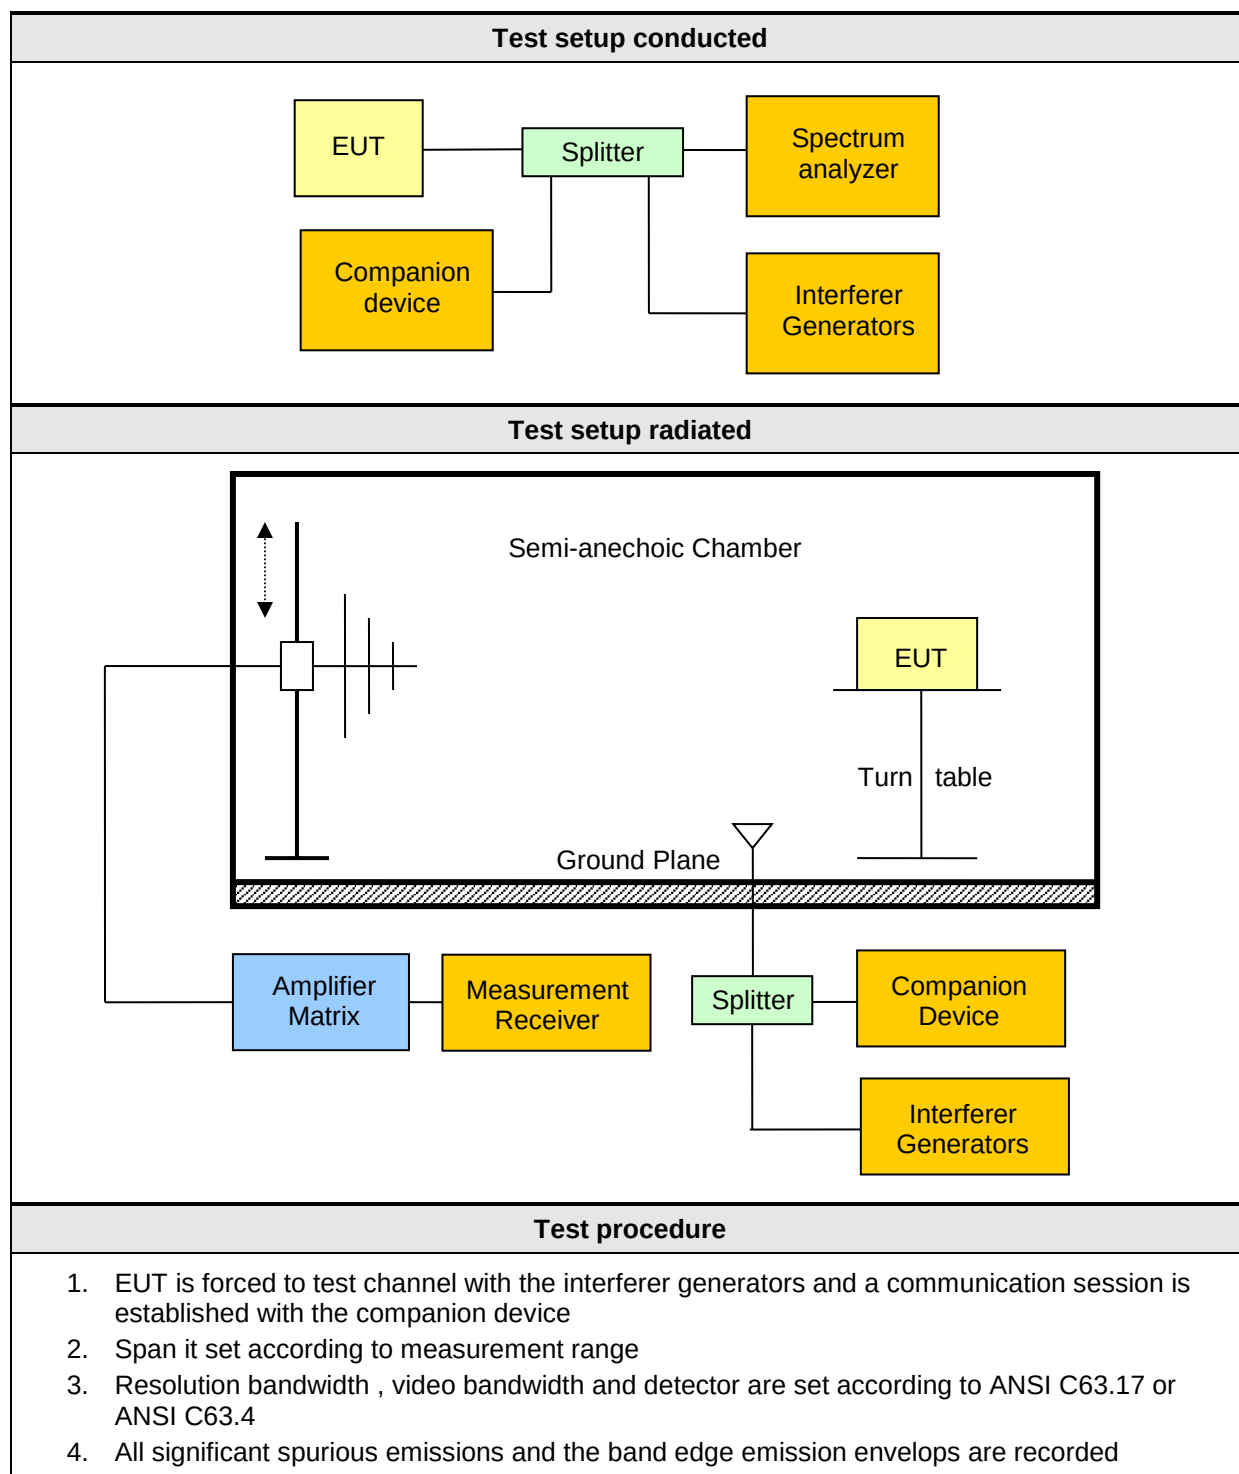

Test results antenna 1								
Channel	Frequency [MHz]	Mode	Emission [MHz]	Level [db μ V/m]	Det.	Pol.	Limit [db μ V/m]	Margin [dB]
0	1928	Testmode	40.44	35.07	pk	ver	40.0	-4.93
0	1928	Testmode	40.44	24.85	qp	ver	40.0	-15.15
0	1928	Testmode	78.12	37.81	pk	ver	40.0	-2.19
0	1928	Testmode	78.12	24.94	qp	ver	40.0	-15.06
0	1928	Testmode	90.42	38.18	pk	ver	43.5	-5.32
0	1928	Testmode	90.42	27.28	qp	ver	43.5	-16.22
0	1928	Testmode	96.42	40.35	pk	ver	43.5	-3.15
0	1928	Testmode	96.42	29.75	qp	ver	43.5	-13.45
0	1928	Testmode	99.26	39.28	pk	ver	43.5	-4.22
0	1928	Testmode	99.26	28.85	qp	ver	43.5	-14.65
4	1921	Testmode	40.38	35.31	pk	ver	40.0	-4.69
4	1921	Testmode	40.38	25.11	qp	ver	40.0	-14.89
4	1921	Testmode	51.06	33.00	pk	ver	40.0	-7.00
4	1921	Testmode	51.06	22.50	qp	ver	40.0	-17.50
4	1921	Testmode	78.66	37.33	pk	ver	40.0	-2.67
4	1921	Testmode	78.66	25.37	qp	ver	40.0	-14.63
4	1921	Testmode	90.32	38.20	pk	ver	43.5	-5.30
4	1921	Testmode	90.32	27.53	qp	ver	43.5	-15.97
4	1921	Testmode	96.30	40.23	pk	ver	43.5	-3.27
4	1921	Testmode	96.30	29.80	qp	ver	43.5	-13.7
0	1928	Testmode	1932.5	60.03	pk	hor	73.90	-13.87
0	1928	Testmode	1932.5	34.75	avg	hor	53.90	-19.15
0	1928	Testmode	1932.8	50.20	pk	ver	73.90	-23.70
0	1928	Testmode	1933.5	55.38	pk	hor	73.90	-18.52
0	1928	Testmode	1933.5	32.87	avg	hor	53.90	-21.03
0	1928	Testmode	1934.9	51.68	pk	hor	73.90	-22.22
0	1928	Testmode	1934.9	32.40	avg	hor	53.90	-21.50
0	1928	Testmode	1936.1	51.70	pk	hor	73.90	-22.20
0	1928	Testmode	1936.1	32.42	avg	hor	53.90	-21.48
0	1928	Testmode	3856.2	43.38	pk	hor	73.90	-30.52
0	1928	Testmode	3856.2	19.56	avg	hor	53.90	-34.34
0	1928	Testmode	3856.8	48.69	pk	ver	73.90	-25.21
0	1928	Testmode	3856.8	20.54	avg	ver	53.90	-33.36
0	1928	Testmode	5784	46.39	pk	ver	73.90	-27.51

0	1928	Testmode	5784	23.08	avg	ver	53.90	-30.82
0	1928	Testmode	5785	49.87	pk	hor	73.90	-24.03
0	1928	Testmode	5785	23.39	avg	hor	53.90	-30.51
4	1921	Testmode	1917.5	52.59	pk	hor	73.90	-21.31
4	1921	Testmode	1917.5	33.19	avg	hor	53.90	-20.71
4	1921	Testmode	3842.5	46.37	pk	hor	73.90	-27.53
4	1921	Testmode	3842.5	20.23	avg	hor	53.90	-33.67
4	1921	Testmode	3843.1	46.89	pk	ver	73.90	-27.01
4	1921	Testmode	3843.1	20.47	avg	ver	53.90	-33.43
4	1921	Testmode	5765	49.86	pk	ver	73.90	-24.04
4	1921	Testmode	5765	23.51	avg	ver	53.90	-30.39
4	1921	Testmode	5765	51.39	pk	hor	73.90	-22.51
4	1921	Testmode	5765	24.69	avg	hor	53.90	-29.21

Comments:

Test results antenna 2								
Channel	Frequency [MHz]	Mode	Emission [MHz]	Level [dBμV/m]	Det.	Pol.	Limit [dBμV/m]	Margin [dB]
0	1928	Testmode	40.62	35.43	pk	ver	40.0	-4.57
0	1928	Testmode	40.62	24.93	qp	ver	40.0	-15.07
0	1928	Testmode	50.94	32.06	pk	ver	40.0	-7.94
0	1928	Testmode	50.94	23.03	qp	ver	40.0	-16.97
0	1928	Testmode	78.94	37.68	pk	ver	40.0	-2.32
0	1928	Testmode	78.94	24.39	qp	ver	40.0	-15.61
0	1928	Testmode	97.62	41.35	pk	ver	43.5	-2.15
0	1928	Testmode	97.62	30.84	qp	ver	43.5	-12.66
0	1928	Testmode	100.2	41.96	pk	ver	43.5	-1.54
0	1928	Testmode	100.2	31.90	qp	ver	43.5	-11.6
4	1921	Testmode	40.38	34.01	pk	ver	40.0	-5.99
4	1921	Testmode	40.38	25.07	qp	ver	40.0	-14.93
4	1921	Testmode	51.54	32.34	pk	ver	40.0	-7.66
4	1921	Testmode	51.54	21.99	qp	ver	40.0	-18.01
4	1921	Testmode	79.38	37.02	pk	ver	40.0	-2.98
4	1921	Testmode	79.38	24.41	qp	ver	40.0	-15.59
4	1921	Testmode	96.66	42.21	pk	ver	43.5	-1.29
4	1921	Testmode	96.66	30.96	qp	ver	43.5	-12.54
4	1921	Testmode	100.2	42.37	pk	ver	43.5	-1.13
4	1921	Testmode	100.2	31.87	qp	ver	43.5	-11.63

Test Report No.: G0M-1702-6254-TFC15DFP-V03

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

0	1928	Testmode	1932.5	60.51	pk	hor	73.90	-13.39
0	1928	Testmode	1932.5	35.48	avg	hor	53.90	-18.42
0	1928	Testmode	1933.6	57.16	pk	hor	73.90	-16.74
0	1928	Testmode	1933.6	32.64	avg	hor	53.90	-21.26
0	1928	Testmode	1935.1	55.71	pk	hor	73.90	-18.19
0	1928	Testmode	1935.1	32.65	avg	hor	53.90	-21.25
0	1928	Testmode	1935.4	55.70	pk	hor	73.90	-18.20
0	1928	Testmode	1935.4	32.66	avg	hor	53.90	-21.24
0	1928	Testmode	1936	54.65	pk	hor	73.90	-19.25
0	1928	Testmode	1936	32.66	avg	hor	53.90	-21.24
0	1928	Testmode	1936.2	54.53	pk	hor	73.90	-19.37
0	1928	Testmode	1936.2	32.42	avg	hor	53.90	-21.48
0	1928	Testmode	1937	53.94	pk	hor	73.90	-19.96
0	1928	Testmode	1937	32.67	avg	hor	53.90	-21.23
0	1928	Testmode	3856.4	47.36	pk	ver	73.90	-26.54
0	1928	Testmode	3856.4	20.54	avg	ver	53.90	-33.36
0	1928	Testmode	3857.6	47.23	pk	hor	73.90	-26.67
0	1928	Testmode	3857.6	20.07	avg	hor	53.90	-33.83
0	1928	Testmode	5785	45.10	pk	ver	73.90	-28.80
0	1928	Testmode	5785	23.02	avg	ver	53.90	-30.88
0	1928	Testmode	5785	47.96	pk	hor	73.90	-25.94
0	1928	Testmode	5785	23.31	avg	hor	53.90	-30.59
4	1921	Testmode	1913.3	54.41	pk	hor	73.90	-19.49
4	1921	Testmode	1913.3	31.98	avg	hor	53.90	-21.92
4	1921	Testmode	1914	54.12	pk	hor	73.90	-19.78
4	1921	Testmode	1914	32.23	avg	hor	53.90	-21.67
4	1921	Testmode	1914.8	55.09	pk	hor	73.90	-18.81
4	1921	Testmode	1914.8	31.99	avg	hor	53.90	-21.91
4	1921	Testmode	1915.9	53.53	pk	hor	73.90	-20.37
4	1921	Testmode	1915.9	32.24	avg	hor	53.90	-21.66
4	1921	Testmode	1916.1	54.03	pk	hor	73.90	-19.87
4	1921	Testmode	1916.1	32.24	avg	hor	53.90	-21.66
4	1921	Testmode	1917.1	57.99	pk	hor	73.90	-15.91
4	1921	Testmode	1917.1	32.73	avg	hor	53.90	-21.17
4	1921	Testmode	1917.4	55.12	pk	hor	73.90	-18.78
4	1921	Testmode	1917.4	32.97	avg	hor	53.90	-20.93
4	1921	Testmode	3843	48.22	pk	hor	73.90	-25.68

Test Report No.: G0M-1702-6254-TFC15DFP-V03

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

4	1921	Testmode	3843	20.69	avg	hor	53.90	-33.21
4	1921	Testmode	3843.6	45.38	pk	ver	73.90	-28.52
4	1921	Testmode	3843.6	20.01	avg	ver	53.90	-33.89
4	1921	Testmode	5765	43.19	pk	ver	73.90	-30.71
4	1921	Testmode	5765	22.70	avg	ver	53.90	-31.20
4	1921	Testmode	5765	46.74	pk	hor	73.90	-27.16
4	1921	Testmode	5765	22.93	avg	hor	53.90	-30.97
Comments:								


Transmitter out-of-band emissions – Band edge F_{Low}

FCC Part 15.323 Out-of-band emission

Testprocedure ANSI 63.17 UPCS

EUT	DECT / UPCS Module
Model	CT-DECT M7
Applicant	CeoTronics AG
Temperature	23°C
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	Out-of-band emission

measurement on the lowest carrier
Carrier=1921.536MHz

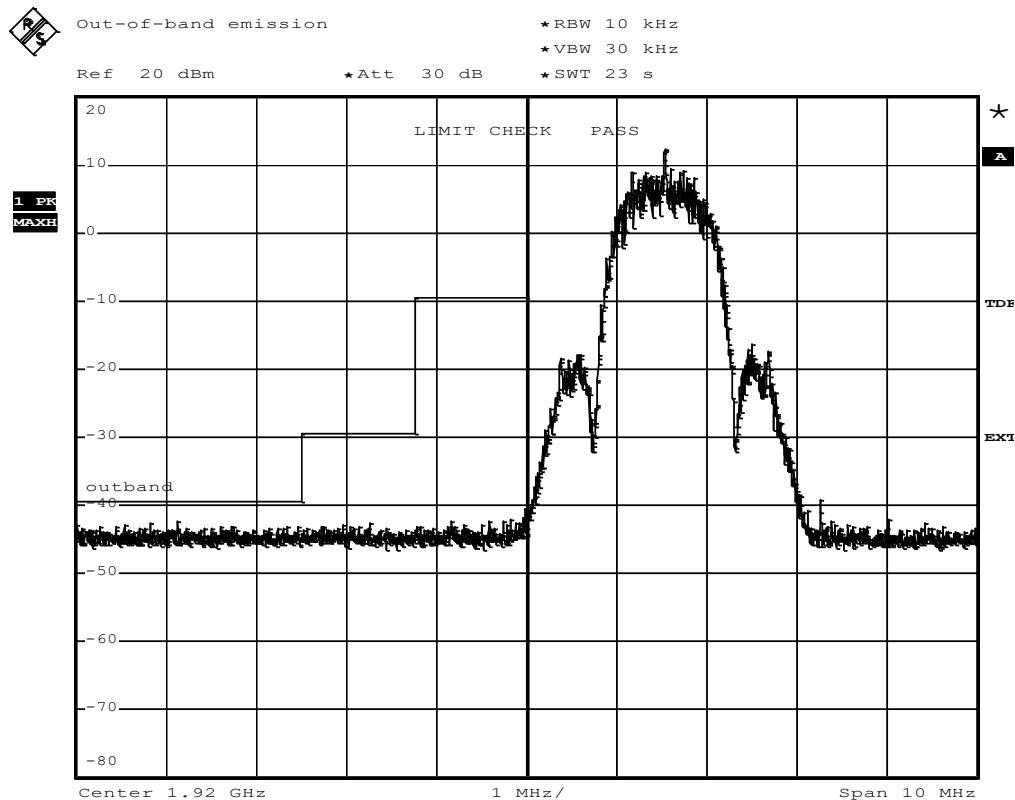

Comment: Ansi C63.17-2006 6.1.6.2
Date: 20.FEB.2017 11:51:41


Transmitter out-of-band emissions – Band edge F_{HIGH}

FCC Part 15.323 Out-of-band emission

Testprocedure ANSI 63.17 UPCS


EUT	DECT / UPCS Module
Model	CT-DECT M7
Applicant	CeoTronics AG
Temperature	23°C
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	Out-of-band emission

measurement on the highest carrier
Carrier=1928.448MHz

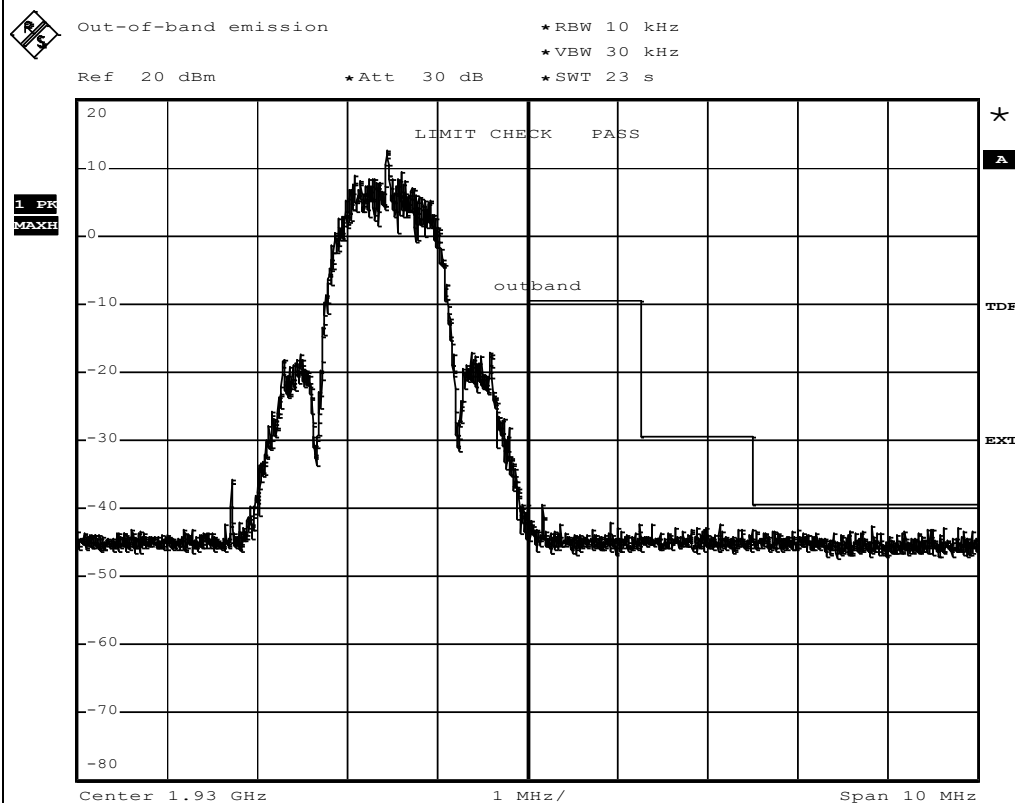

Comment: Ansi C63.17-2006 6.1.6.2
Date: 20.FEB.2017 11:54:51

3.12 Test Conditions and Results – Receiver spurious emissions

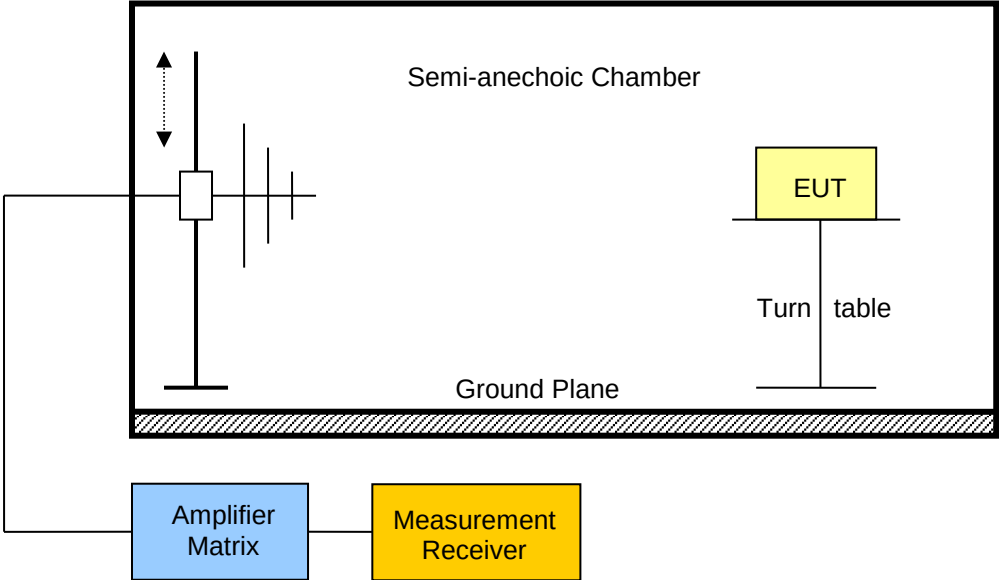Receiver spurious emissions acc. to IC RSS-213				Verdict: PASS
Test according referenced standards	Reference Method			
	IC RSS-213 3.1			
Test according to measurement reference	Reference Method			
	ANSI C63.4			
Tested frequencies	Scan (All)			
Tested frequency range	30 MHz – 5 th Harmonic			
EUT test mode	Receive			
Limits				
Frequency range [MHz]	Detector	Limit [μV/m]	Limit [dBμV/m]	Limit Distance [m]
30 – 88	Quasi-Peak	100	40	3
88 – 216	Quasi-Peak	150	43.5	3
216 – 960	Quasi-Peak	200	46	3
960 – 1000	Quasi-Peak	500	54	3
> 1000	Average	500	54	3
Test setup				
				

Test procedure							
1. EUT set to receive mode (Communication tester is used if needed) 2. Span it set according to measurement range 3. Resolution bandwidth below 1 GHz is set according to CISPR 16 with peak/quasi-peak detector and RBW of 1 MHz with peak/average detector is used above 1 GHz 4. Markers are set to peak emission levels							
Test results							
Channel	Frequency [MHz]	Emission [MHz]	Emission Level [dBμV/m]	Pol.	Det.	Limit [dBμV/m]	Margin [dB]
2	1925	600	35.61	ver	pk	46.00	-10.39
2	1925	600	39.06	hor	pk	46.00	-06.94
Comments:							

3.13 Test Conditions and Results – Automatic discontinuation of Transmission

Automatic discontinuation of transmission acc. to FCC 15D / RSS-213		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 15.319(f) / IC RSS-213 5.2	
Test according to measurement reference	Reference Method	
	Manual evaluation	
EUT equipment type	Fixed part	
Requirements		
The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. This is not intended to preclude transmission of control and signaling information or use of repetitive codes used by certain digital technologies to complete frame or burst intervals.		
Test setup		
EUT Splitter Companion device Spectrum analyzer		
Test procedure		
The following situations were simulated to test the reaction of the EUT: - EUT power removed - EUT switched –off - Companion device switched off - Hook-on by companion device - Hook-on by EUT - Power removed from companion device The reaction of the EUT is recorded by the following results: A – Connection breakdown, cease of all transmissions B – Connection breakdown, EUT transmits control and signalling information C – Connection breakdown, Companion device transmits control and signalling information N/A – Not applicable (the EUT or companion device does not have an on/off switch or cannot perform hook on		
Result		
Test	Reaction	Verdict
Power removed : EUT	A	PASS
Power removed : Companion device	B	PASS
Switch –off : EUT	A	PASS
Switch –off : Companion device	B	PASS
Hook-on : EUT	B	PASS
Hook-on : Companion device	B	PASS

Test Report No.: G0M-1702-6254-TFC15DFP-V03

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany


3.14 Test Conditions and Results – Radiofrequency radiation exposure

Radiofrequency radiation exposure acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: N/T
EUT requirement rule parts and clause	Reference	
	FCC 15.319(i) / IC RSS-102	
Requirements		
FCC : Unlicensed PCS devices are subject to the radiofrequency radiation exposure requirements specified in §§ 1.1307(b), 2.1091 and 2.1093. All equipment shall be considered to operate in a “general population/uncontrolled” environment. Applications for equipment authorization of devices operating under this section must contain a statement confirming compliance with these requirements for both fundamental emissions and unwanted emissions. Technical information showing the basis for this statement must be submitted to the Commission upon request.		
IC : Category I and Category II equipment shall comply with the applicable requirements of RSS-102.		
Result		
Reference		Verdict
N/A		N/A


3.15 Test Conditions and Results – LIC confirmation

LIC confirmation acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 15.323(c)(5) / IC RSS-213 5.2	
Test according referenced standards	Reference Method	
	ANSI C63.17 7.3.2, 7.3.3	
Requirements		
A device utilizing the provisions of FCC 47 CFR 15.323(c)(5) / IC RSS-213(b)(5) must have monitored all access channels defined for its system within the last 10 seconds and must verify, within the 20 milliseconds (40 milliseconds for devices designed to use a 20 millisecond frame period) immediately preceding actual channel access, that the detected power of the selected time and spectrum windows is no higher than the previously detected value.		
Test result		
Evaluation		Verdict
The requirement is verified using the “LIC Selected Channel Confirmation” and “LIC Procedure Test” test.		PASS
Comments:		

3.16 Test Conditions and Results – LIC Procedure Test

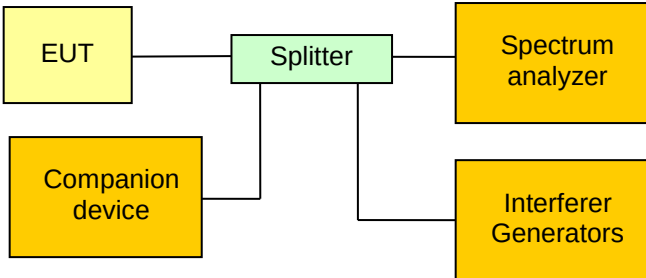LIC Procedure Test acc. to FCC 47 CFR 15D / IC RSS-213			Verdict: PASS
EUT requirement rule parts and clause	Reference		
	FCC 15.323(c)(5) / IC RSS-213 5.2		
Test according referenced standards	Reference Method		
	ANSI C63.17 7.3.2		
Requirements			
FCC: If access to spectrum is not available as determined by the above, and a minimum of 20 duplex system access channels are defined for the system, the time and spectrum windows with the lowest power level may be accessed.			
IC: If access to spectrum is not available as determined by the above, and a minimum of 40 duplex system access channels are defined for the system, the time and spectrum windows with a power level below a monitoring threshold of 50 dB above the thermal noise power determined for the occupied bandwidth may be accessed.			
Test setup			
			
Test procedure			
1. The EUT is forced to two carrier frequencies f_1 and f_2 only by the use of interferer generators with power levels higher than the threshold T_L plus the measurement uncertainty U_M of 6 dB 2. Additional interferer signals are applied to the channels f_1 and f_2 according to the result table below 3. A communication session with the companion device is initiated 4. Transmission on the least interfered channel is verified 5. The communication session is terminated 6. The communications session is established another 4 times			
Test results			
Interferer Level f_1	Interferer Level f_2	Communication channel	Verdict
$T_L + U_M + 7\text{ dB}$	$T_L + U_M$	f_2	PASS
$T_L + U_M$	$T_L + U_M + 7\text{ dB}$	f_1	PASS
$T_L + U_M + 1\text{ dB}$	$T_L + U_M - 6\text{ dB}$	f_2	PASS
$T_L + U_M - 6\text{ dB}$	$T_L + U_M + 1\text{ dB}$	f_1	PASS
Comments:			

3.17 Test Conditions and Results – LIC Selected Channel Confirmation

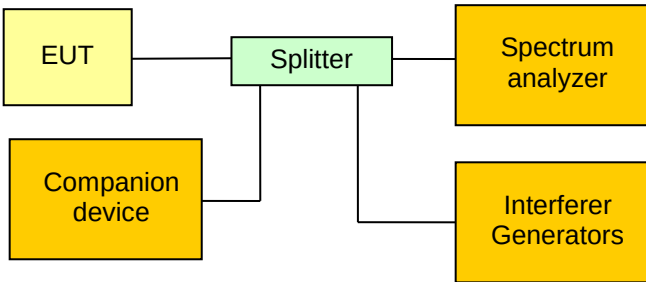LIC Selected Channel Confirmation acc. to FCC 47 CFR 15D / IC RSS-213			Verdict: PASS
EUT requirement rule parts and clause	Reference		
	FCC 15.323(c)(1) / IC RSS-213 5.2		
Test according referenced standards	Reference Method		
	ANSI C63.17 7.3.3		
Requirements			
Immediately prior to initiating transmission, devices must monitor the combined time and spectrum windows in which they intend to transmit for a period of at least 10 milliseconds for systems designed to use a 10 milliseconds or shorter frame period or at least 20 milliseconds for systems designed to use a 20 milliseconds frame period.			
Test setup			
			
Test procedure			
1. The EUT is forced to two carrier frequencies f_1 and f_2 only by the use of interferer generators with power levels 20 dB higher than the threshold T_L plus the measurement uncertainty U_M of 6 dB 2. The interferer level on channel frequency f_1 is also set to $T_L + U_M + 20\text{dB}$ and channel f_2 has no interferer 3. A communication session is initiated on f_2 and transmission on f_2 is verified 4. An interferer level of $T_L + U_M + 20\text{ dB}$ is applied to f_2 and the interferer on channel f_1 is removed 20ms after the interferer on f_2 is applied 5. Transmission on f_1 and f_2 is monitored with the spectrum analyzer and it is verified that the EUT does not transmit on f_2.			
Test results			
Initial transmit channel	Interferer level	Final transmit channel	Verdict
f_2	0	f_2	PASS
f_2	$T_L + U_M + 20\text{ dB}$	f_1	PASS
Comments:			


3.18 Test Conditions and Results – Monitoring antenna

Monitoring antenna acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 15.323(c)(8) / IC RSS-213 5.2	
Test according to measurement reference	Reference Method	
	ANSI C63.17 4	
Monitoring antenna	The same as transmitting antenna	
Requirements		
The monitoring system shall use the same antenna used for transmission, or an antenna that yields equivalent reception at that location.		
Results		
Connection status		Verdict
N/A (monitoring antenna identical to transmitting antenna)		PASS

3.19 Test Conditions and Results – Monitoring Bandwidth


Monitoring Bandwidth acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 15.323(c)(7) / IC RSS-213 5.2	
Test according to measurement reference	Reference Method	
	ANSI C63.17 7.4	
Requirements		
The monitoring system bandwidth must be equal to or greater than the emission bandwidth of the intended transmission		
Results		
Monitoring receiver		Verdict
The same as used for communication		PASS

3.20 Test Conditions and Results – Monitoring reaction time and monitoring interval

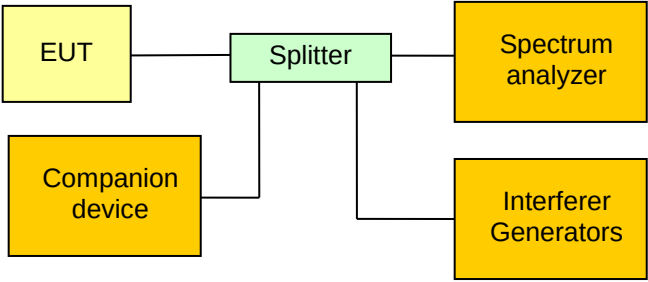Monitoring reaction time and monitoring interval acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 15.323(c)(7) / IC RSS-213 5.2	
Test according referenced standards	Reference Method	
	ANSI C63.17 7.5	
Requirements		
The monitor shall have a maximum reaction time less than $50 \times \text{SQRT}(1.25/\text{emission(occupied bandwidth in MHz)})$ microseconds for signals at the applicable threshold level but shall not be required to be less than 50 microseconds. If a signal is detected that is 6 dB or more above the applicable threshold level, the maximum reaction time shall be $35 \times \text{SQRT}(1.25/\text{emission(occupied bandwidth in MHz)})$ microseconds but shall not be required to be less than 35 microseconds.		
Test setup		
 <pre> graph LR EUT[EUT] --- Splitter[Splitter] Splitter --- SA[Spectrum analyzer] Splitter --- IG[Interferer Generators] CD[Companion device] --- Splitter </pre>		
Test procedure		
- Using interferer signals operation is restricted to channel f_1 - A time-synchronized, pulsed interference is applied to f_1 with a power level of $T_L + U_M$ - For systems with a 10 ms frame time and N timeslots per frame, a channel interferer with N pulses in a 10 ms repetition period is applied - On f_2 a CW interferer with level equal to T_L is activated - The pulse width of the interferer pulses on f_1 is set to the largest of 50 μs and $50 \cdot \sqrt{1.25/\text{Bandwidth}[\text{MHz}]}$ μs - It is verified that the connection to the companion device is established on f_2 only - The level of the interferer pulses on f_1 is set to 6 dB above $T_L + U_M$ - The pulse width on f_1 is set to the largest of 35 μs and $35 \cdot \sqrt{1.25/\text{Bandwidth}[\text{MHz}]}$ μs - It is verified that the connection to the companion device is established on f_2 only		

Test results - FCC					
Channel	Emission bandwidth [MHz]	Pulse width from Bandwidth [μ s]	Pulse width for test [μ s]	Connection on channel f_2	Verdict
F _{LOW}	1.384	$50 \cdot \sqrt{1.25/B[\text{MHz}]} = 47.5$	50	Yes	PASS
F _{LOW}	1.384	$35 \cdot \sqrt{1.25/B[\text{MHz}]} = 33.3$	35	Yes	PASS
F _{HIGH}	1.414	$50 \cdot \sqrt{1.25/B[\text{MHz}]} = 47.0$	50	Yes	PASS
F _{HIGH}	1.414	$35 \cdot \sqrt{1.25/B[\text{MHz}]} = 32.9$	35	Yes	PASS
Test results - IC					
Channel	Emission bandwidth [MHz]	Pulse width from Bandwidth [μ s]	Pulse width for test [μ s]	Connection possible	Verdict
F _{LOW}	1.224	$50 \cdot \sqrt{1.25/B[\text{MHz}]} = 50.5$	50	Yes	PASS
F _{LOW}	1.224	$35 \cdot \sqrt{1.25/B[\text{MHz}]} = 35.4$	35	Yes	PASS
F _{HIGH}	1.224	$50 \cdot \sqrt{1.25/B[\text{MHz}]} = 50.5$	50	Yes	PASS
F _{HIGH}	1.224	$35 \cdot \sqrt{1.25/B[\text{MHz}]} = 35.4$	35	Yes	PASS
Comments:					


3.21 Test Conditions and Results – Access criteria test interval

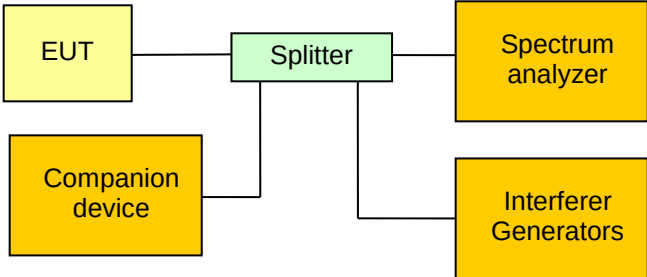Access criteria test interval acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 15.323(c)(4) / IC RSS-213 5.2	
Test according referenced standards	Reference Method	
	ANSI C63.17 8.1.1	
Requirements		
Channels used exclusively for control and signaling information may transmit continuously for 30 seconds without receiving an acknowledgement, at which time the access criteria must be repeated.		
Test setup		
 <pre>graph LR; EUT[EUT] --- Splitter[Splitter]; Splitter --- SA[Spectrum analyzer]; Splitter --- IG[Interferer Generators]; CD[Companion device] --- Splitter</pre>		
Test procedure		
1. Using interferer signals operation is restricted to one channel f_1 and timeslot 2. The EUT is active and transmission on channel/timeslot is verified 3. The transmissions on the channel/timeslot are recorded to get the total transmission time on the channel and timeslot until the transmission stops and the access criteria procedure begins 4. The transmission time measurement is repeated five times 5. It is verified that each transmission does not last longer than 30 s		
Test results		
Maximum transmission time [s]	Transmission time limit [s]	Verdict
28	30	PASS
Comments:		

Access criteria test interval


ANSI C63.17 - Access criteria test interval
UPCS1900

EUT	DECT / UPCS Module
Model	CT-DECT M7
Approval Holder	CeoTronics AG
Temperature / Voltage	tnom
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	ANSI C63.17 - Access criteria test interval
Comment 1	The interval between access criteria tests
Comment 2	Measurement result: 28 s
Comment 3	Verdict: PASS

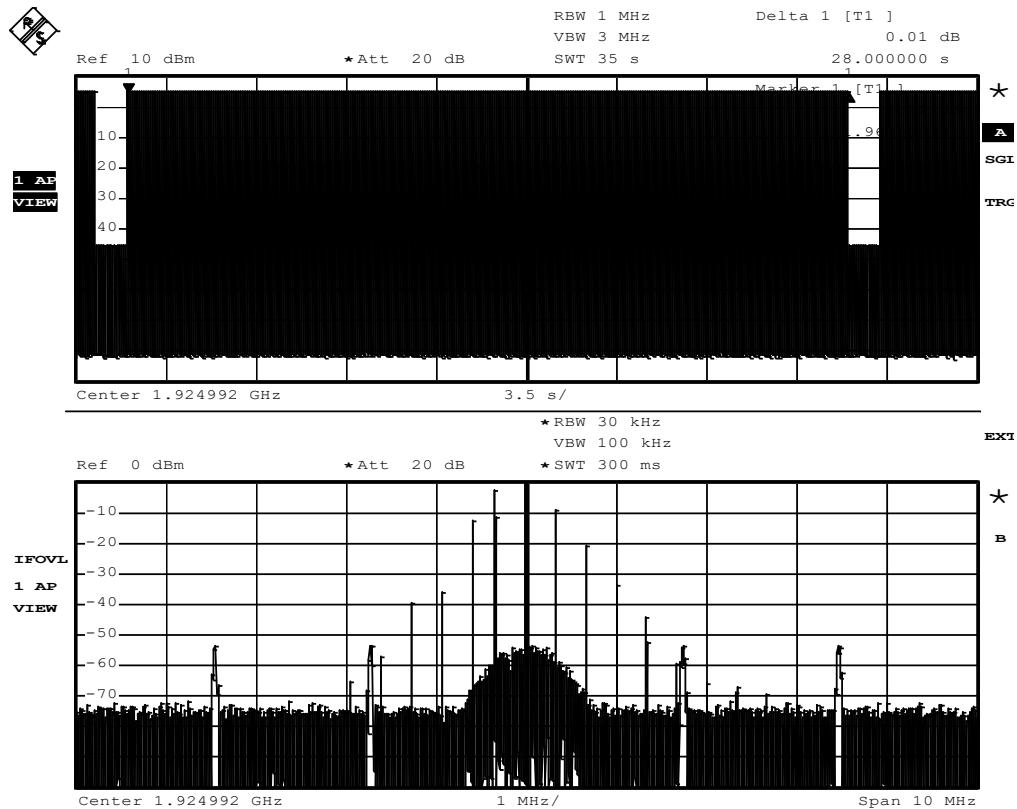

Comment: Ansi C63.17-1998 6.1.6.2
Date: 20.FEB.2017 13:47:18

3.22 Test Conditions and Results – Access criteria functional test

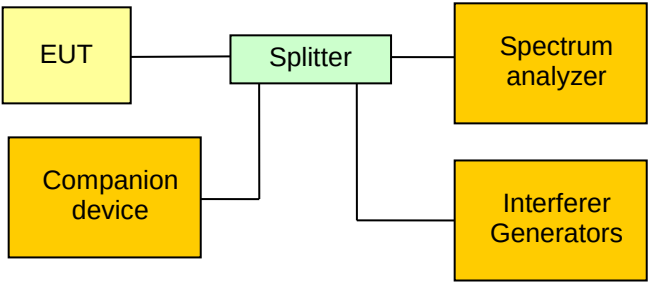
Access criteria functional test acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 15.323(c)(6) / IC RSS-213 5.2	
Test according referenced standards	Reference Method	
	ANSI C63.17 8.1.2 / 8.1.3	
Option implemented	No	
Requirements		
If the selected combined time and spectrum windows are unavailable, the device may either monitor and select different windows or seek to use the same windows after waiting an amount of time, randomly chosen from a uniform random distribution between 10 and 150 milliseconds, commencing from the time when the channel becomes available.		
Test setup		
 <pre> graph LR EUT[EUT] --- Splitter[Splitter] Splitter --- SA[Spectrum analyzer] Splitter --- IG[Interferer Generators] CD[Companion device] --- Splitter </pre>		
Test procedure – Access criteria functional test option not implemented		
- Using interferer signals operation is restricted to channels f_1 and f_2 in a single timeslot only - The EUT is active and transmission on one of the two channels and timeslots is verified - An interferer is introduced on the channel and timeslot used by the EUT with a level of $T_L + U_M$. - It is verified that the EUT next transmits on the other open channel/timeslot.		
Test procedure – Access criteria functional test option implemented		
- Using interferer signals operation is restricted to one channel f_1 and timeslot - The EUT is active and transmission on channel/timeslot is verified - An interferer with level $T_U + U_M$ or $T_L + U_M$ as appropriate is applied to channel f_1 - It is verified that the EUT stops transmitting within the next 30s - The interferer is switched off and the time between the end of the interference and the beginning of the next transmission is measured - The procedure is repeated 100 times - For each of the time intervals it is verified that it is greater than 10ms and lower than 150ms		

Test results – Access criteria functional test option not implemented				
Initial channel / timeslot	Interferer Level	Final channel / timeslot		Verdict
F2 / Slot 2	0	F2 / Slot 2		PASS
F4 / Slot 4	T _U + U _M	F4 / Slot 4		PASS
Test results – Access criteria functional test option implemented				
Minimum waiting time [ms]	Lower limit [ms]	Maximum waiting time [ms]	Upper limit [ms]	Verdict
N/A	10	N/A	150	N/A
Comments:				

Access criteria functional test option not implemented – Initial condition

ANSI C63.17 - Access criteria functional test
UPCS1900

EUT	DECT / UPCS Module
Model	CT-DECT M7
Approval Holder	CeoTronics AG
Temperature / Voltage	tnom
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	ANSI C63.17 - Access criteria functional test
Comment 1	initial condition
Comment 2	Connection at channel 2 (1924,992 MHz), in time slot 2 (840 μ s)
Comment 3	

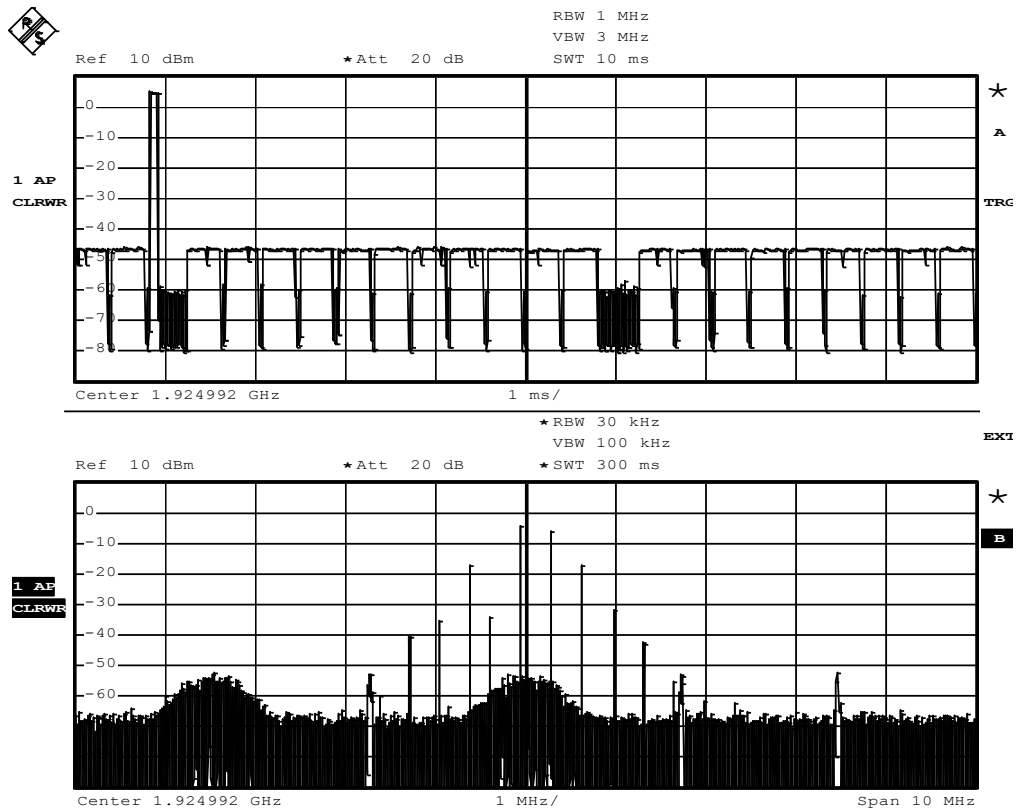


Comment: Ansi C63.17-1998 6.1.6.2
Date: 20.FEB.2017 13:58:18

Access criteria functional test option not implemented – Final condition

ANSI C63.17 - Access criteria functional test
UPCS1900


EUT	DECT / UPCS Module
Model	CT-DECT M7
Approval Holder	CeoTronics AG
Temperature / Voltage	tnom
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	ANSI C63.17 - Access criteria functional test
Comment 1	CW interference on ch 2 (initial traffic channel)
Comment 2	after the next pause
Comment 3	New connection at channel 4 (1921,536 MHz), in time slot 4 (1.666

ms)

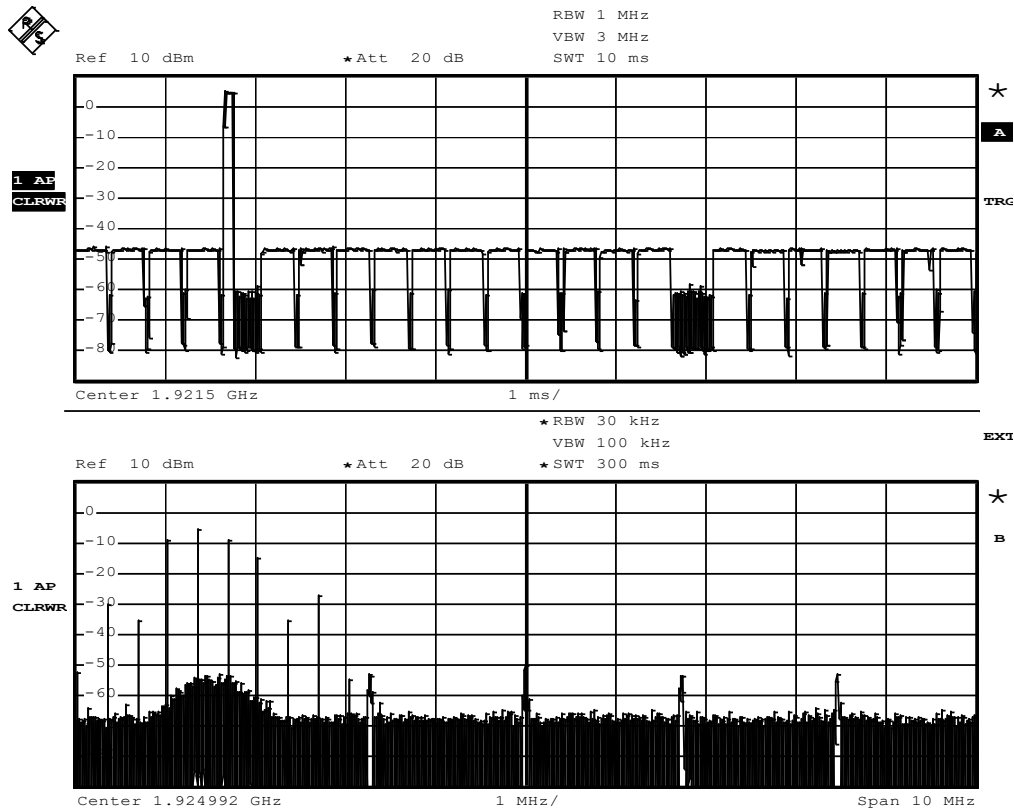

Comment: Ansi C63.17-1998 6.1.6.2
Date: 20.FEB.2017 14:02:25

3.23 Test Conditions and Results – Acknowledgements

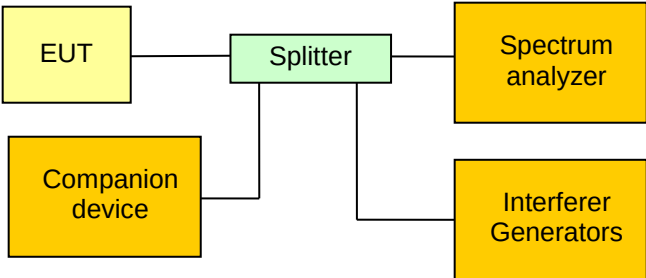
Acknowledgements acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 15.323(c)(4) / IC RSS-213 5.2	
Test according referenced standards	Reference Method	
	ANSI C63.17 8.2.1	
EUT can initiate a communication session	No	
Requirements		
Once access to specific combined time and spectrum windows is obtained, an acknowledgement from a system participant must be received by the initiating transmitter within one second or transmission must cease. Periodic acknowledgements must be received at least every 30 seconds or transmission must cease.		
Test setup – System acknowledgement		
 <pre> graph LR EUT[EUT] --- Splitter[Splitter] Splitter --- SA[Spectrum analyzer] Splitter --- IG[Interferer Generators] CD[Companion device] --- Splitter </pre>		
Test procedure		
1. (Applies to EUTs that can initiate a communication session (e.g. portable parts)) The acknowledgement timeslots are blocked by interferer signals 2. An attempt to establish communication session is started from the EUT 3. The emissions from the EUT are monitored to verify that the EUT does not transmit for more than 1s 4. Next the acknowledgements are unblocked and another communication session is established between the EUT and the companion device 5. It is verified that the communication session is successful 6. (Applies to all EUTs) With all acknowledges unblocked, an communication session is initiated between the EUT and the companion device 7. The acknowledgements were blocked and the time the EUT continues to transmit is recorded		

Test results		
Maximum initial transmission [s]	Transmission time limit [s]	Verdict
N/A	1	N/A
Maximum transmission time [s]	Transmission time limit [s]	Verdict
1.5	30	PASS
Comments:		

3.24 Test Conditions and Results – Fair access

Fair access acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 15.323(c)(12) / IC RSS-213 5.2	
Test according to measurement reference	Reference Method	
	Customer declaration	
Requirements		
The provisions of FCC 47 CRF 15.323(c)(10), IC RSS-213(b)(10) or FCC 47 CRF 15.323(c)(11), IC RSS-213(b)(11) shall not be used to extend the range of spectrum occupied over space or time for the purpose of denying fair access to spectrum to other devices.		
Declaration		
The manufacturer declares that is device does not work in a mode which denies fair access to spectrum for other participants		

3.25 Test Conditions and Results – Frame period and Jitter

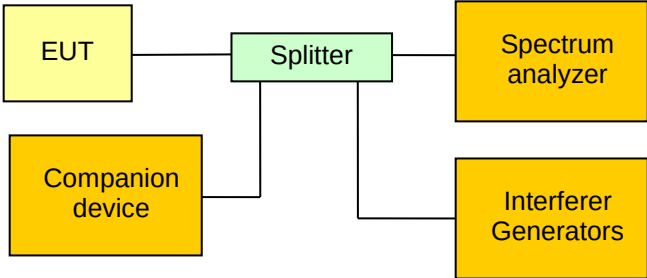Frame period and Jitter acc. to FCC 47 CFR 15D / IC RSS-213			Verdict: PASS
EUT requirement rule parts and clause	Reference		
	FCC 15.323(e) / IC RSS-213 5.2		
Test according referenced standards	Reference Method		
	ANSI C63.17 6.2.3		
Requirements			
The frame period (a set of consecutive time slots in which the position of each time slot can be identified by reference to a synchronizing source) of an intentional radiator operating in this sub-band shall be 20 milliseconds/X where X is a positive whole number.			
The jitter (time-related, abrupt, spurious variations in the duration of the frame interval) introduced at the two ends of such a communication link shall not exceed 25 microseconds for any two consecutive transmissions.			
Test setup			
			
Test procedure			
1. With a spectrum analyzer the frame periods are measured over time 2. 100 000 frames are measured 3. The the peak-to-peak, mean and standard deviation values are computed			
Test results – Frame period			
Mean value [ms]	Divider X (10ms/X)	Verdict	
9.999897 = 10.00 – 0.000103	1	PASS	
Test results – Jitter			
Maximum difference between frames [μs]	Limit [μs]	Verdict	
0.067055	25 – 0.000103 = 24.999897	PASS	
Comments:			

Frame period and Jitter

FCC Part 15.323 Frame Period and jitter


Testprocedure ANSI 63.17

UPCS


EUT	DECT / UPCS Module
Model	CT-DECT M7
Applicant	CeoTronics AG
Temperature	23°C
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	Frame Period and jitter

Width of the time class	0,002682 μ s
Mean	9,999897 ms
Deviation	0,000012
Max-Min	0,067055 μ s
Test result	Verdict = PASS

Histogram

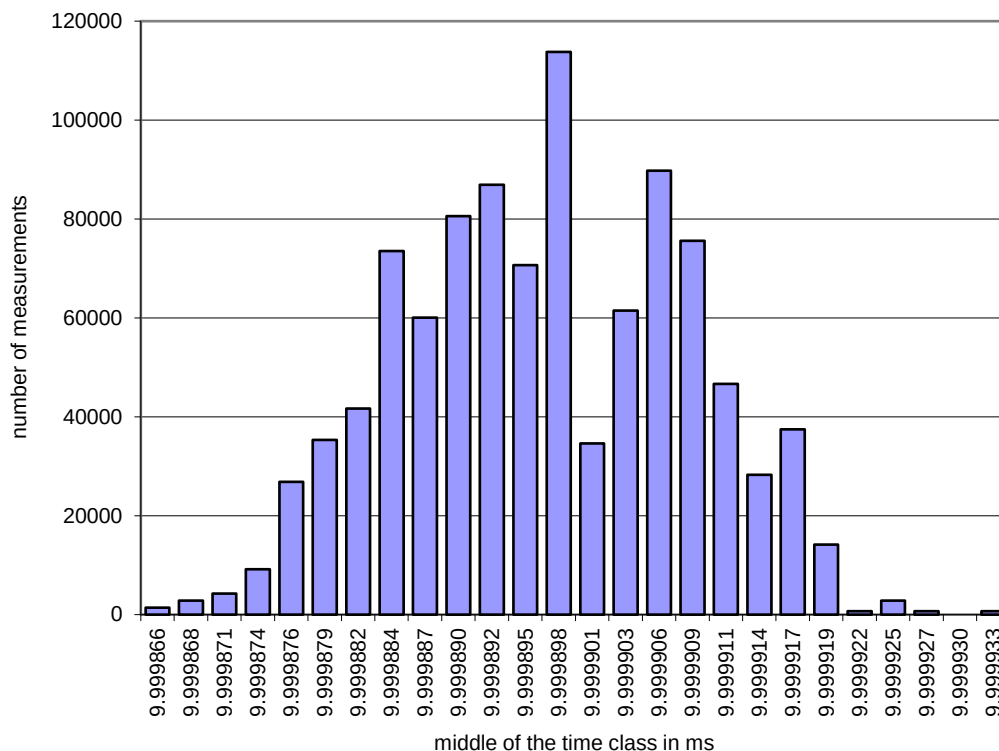

3.26 Test Conditions and Results – Frame and TDMA repetition stability

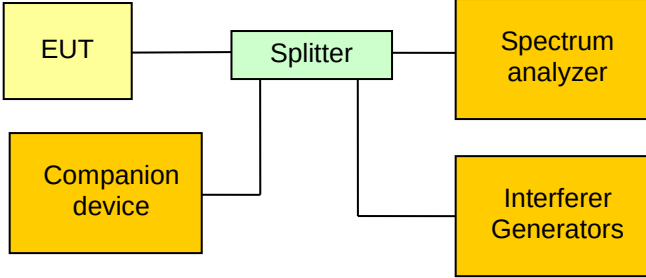Frame repetition stability acc. to FCC 47 CFR 15D / IC RSS-213			Verdict: PASS
EUT requirement rule parts and clause	Reference		
	FCC 15.323(e)(2),(3) / IC RSS-213 5.2		
Test according referenced standards	Reference Method		
	ANSI C63.17 6.2.2		
Access scheme used	Time Division Multiple Access		
Requirements			
Each device that implements time division for the purpose of maintaining a duplex connection on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 50 parts per millions (ppm). Each device which further divides access in time in order to support multiple communication links on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 10 ppm.			
Test setup			
			
Test procedure			
1. With a spectrum analyzer the frame repetition periods are measured over time 2. 1 000 frame repetitions are measured 3. The mean and standard deviation values are computed			
Test results			
Access scheme	Error [ppm]	Limit [ppm]	Verdict
Time Division Access	N/A	50	N/A
Time Division Multiple Access	0,497066	10	PASS
Comments:			

Frame and TDMA repetition stability

FCC Part 15.323 Frame repetition


Testprocedure ANSI 63.17

UPCS

EUT	DECT / UPCS Module
Model	CT-DECT M7
Applicant	CeoTronics AG
Temperature	23°C
Test Site / Operator	Eurofins Product Service GmbH
Test Specification	Frame repetition

Width of the frequency class	0,000002 Hz
Mean	99,999769 Hz
Deviation	0,000017
Stability in ppm	0,497066 ppm
Test result	Verdict = PASS

Histogram

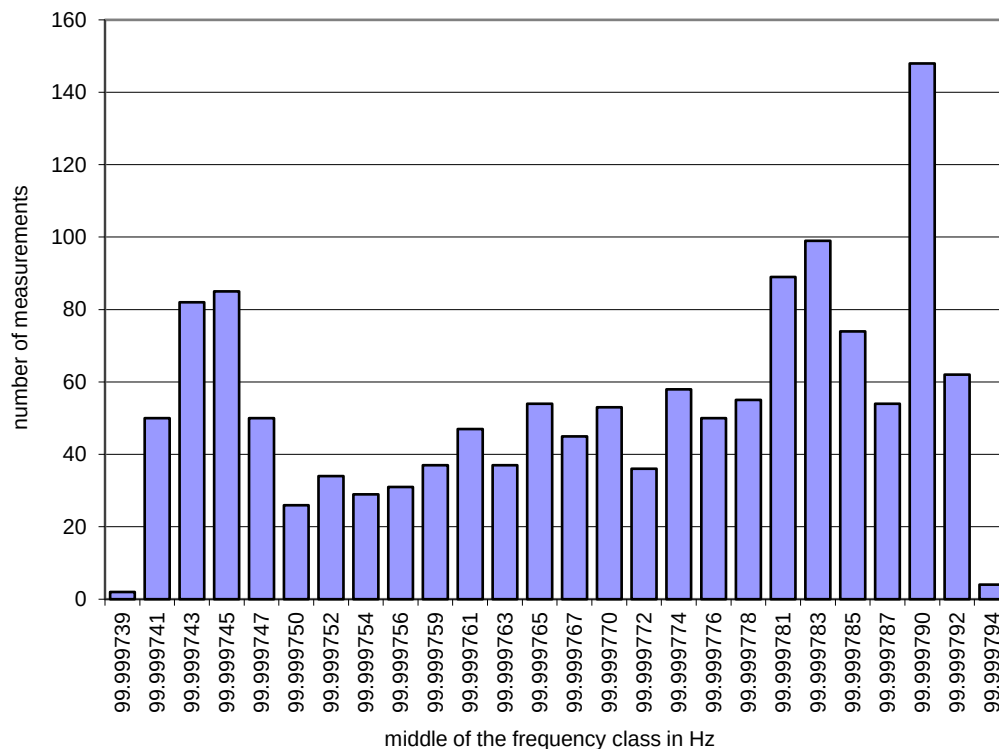

3.27 Test Conditions and Results – Maximum spectral occupancy

Maximum spectral occupancy acc. to FCC 47 CFR 15D / IC RSS-213		Verdict: PASS
EUT requirement rule parts and clause	Reference	
	FCC 15.323(c)(5) / IC RSS-213 5.2	
Test according referenced standards	Reference Method	
	Customer declaration	
Requirements		
No device or group of co-operating devices located within 1 meter of each other shall during any frame period occupy more than 6 MHz of aggregate bandwidth, or alternatively, more than one third of the time and spectrum windows defined by the system.		
Test result		
Evaluation		Verdict
According to the technical documentation the total number of time and spectrum windows is: 5 x 12 = 60 According to customer declaration the total number of concurrent time and spectrum windows is: 12 The number of concurrent allocated time and spectrum windows is less than one third of the total time and spectrum windows of the EUT		PASS
Comments:		