

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 15, Subpart C (Section 15.247)
Report No.: RFBFKV-WTW-P25110335-1
FCC ID: L6AITN100-1
Product: Radar H2
Brand: BlackBerry
Model No.: ITN100-1
Received Date: 2025/11/16
Test Date: 2025/11/20 ~ 2025/11/26
Issued Date: 2025/12/19

Applicant: BlackBerry Limited
Address: 2200 University Ave E, Waterloo, ON N2K 0A7
Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories
Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan
Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, Taiwan
FCC Registration / 788550 / TW0003
Designation Number:

Approved by: _____

Jeremy Lin

Jeremy Lin / Project Engineer

, Date: _____

2025/12/19

This test report consists of 35 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.

Prepared by : Polly Chien / Specialist



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	4
1 Certificate.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Supplementary Information	6
3 General Information	7
3.1 General Description.....	7
3.2 Antenna Description of EUT.....	8
3.3 Channel List.....	8
3.4 Test Mode Applicability and Tested Channel Detail.....	9
3.5 Duty Cycle of Test Signal.....	10
3.6 Test Program Used and Operation Descriptions.....	11
3.7 Connection Diagram of EUT and Peripheral Devices	11
4 Test Instruments	12
4.1 RF Output Power.....	12
4.2 Power Spectral Density	12
4.3 6 dB Bandwidth	12
4.4 Conducted Out of Band Emissions	12
4.5 Unwanted Emissions below 1 GHz	13
4.6 Unwanted Emissions above 1 GHz.....	14
5 Limits of Test Items.....	15
5.1 RF Output Power.....	15
5.2 Power Spectral Density	15
5.3 6 dB Bandwidth	15
5.4 Conducted Out of Band Emissions	15
5.5 Unwanted Emissions below 1 GHz	15
5.6 Unwanted Emissions above 1 GHz.....	15
6 Test Arrangements.....	16
6.1 RF Output Power.....	16
6.1.1 Test Setup	16
6.1.2 Test Procedure.....	16
6.2 Power Spectral Density	16
6.2.1 Test Setup	16
6.2.2 Test Procedure.....	16
6.3 6 dB Bandwidth	17
6.3.1 Test Setup	17
6.3.2 Test Procedure.....	17
6.4 Conducted Out of Band Emissions	18
6.4.1 Test Setup	18
6.4.2 Test Procedure.....	18
6.5 Unwanted Emissions below 1 GHz	19
6.5.1 Test Setup	19
6.5.2 Test Procedure.....	20
6.6 Unwanted Emissions above 1 GHz.....	21
6.6.1 Test Setup	21
6.6.2 Test Procedure.....	21
7 Test Results of Test Item.....	22
7.1 RF Output Power.....	22
7.2 Power Spectral Density	23
7.3 6 dB Bandwidth	24
7.4 Conducted Out of Band Emissions	25
7.5 Unwanted Emissions below 1 GHz	26
7.6 Unwanted Emissions above 1 GHz.....	28



8	Pictures of Test Arrangements	34
9	Information of the Testing Laboratories	35



Release Control Record

Issue No.	Description	Date Issued
RFBFKV-WTW-P25110335-1	Original release.	2025/12/19

1 Certificate

Product: Radar H2
Brand: BlackBerry
Test Model: ITN100-1
Sample Status: Engineering sample
Applicant: BlackBerry Limited
Test Date: 2025/11/20 ~ 2025/11/26
Standard: 47 CFR FCC Part 15, Subpart C (Section 15.247)
Measurement procedure: ANSI C63.10-2020
KDB 558074 D01 15.247 Meas Guidance v05r02

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
Standard / Clause	Test Item	Result	Remark
15.247(b)	RF Output Power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.247(a)(2)	6 dB Bandwidth	Pass	Meet the requirement of limit.
15.247(d)	Conducted Out of Band Emissions	Pass	Meet the requirement of limit.
15.207	AC Power Conducted Emissions	N/A	Power supply is from battery.
15.205 / 15.209 / 15.247(d)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -6.1 dB at 480.08 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -0.6 dB at 2483.50 MHz
15.203	Antenna Requirement	Pass	Antenna connector is Murata MM8030-2610B/RJ3/RK0 not a standard connector.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Specification	Expanded Uncertainty (k=2) (±)
RF Output Power	-	1.371 dB
Power Spectral Density	-	1.017 dB
6 dB Bandwidth	-	206.5 Hz
Conducted Out of Band Emissions	9 kHz ~ 40 GHz	2.79 dB
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	3.59 dB
	30 MHz ~ 1 GHz	3.6 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 18 GHz	2.29 dB
	18 GHz ~ 40 GHz	2.29 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description

Product	Radar H2
Brand	BlackBerry
Test Model	ITN100-1
Status of EUT	Engineering sample
Power Supply Rating	7.2Vdc from battery
Modulation Type	O-QPSK
Transfer Rate	80kbps
Operating Frequency	2.405 GHz ~ 2.48 GHz
Number of Channel	16
Output Power	33.963 mW (15.31 dBm)

Note:

1. The EUT uses following accessories.

Item	Brand	Model	Specification
Battery 1	BlackBerry	BAT-63820-002	Power Rating : 7.2Vdc, 38Ah
Battery 2	BlackBerry	BAT-63820-001	Power Rating : 7.2Vdc, 38Ah

*After the evaluation of the above batteries, the battery 1 was chose for final test.

2. Simultaneously transmission combination.

Combination	Technology	
1	2.4GHz SRD	Cat 1 bis
2	SRD	Cat 1 bis

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

3. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Model	Antenna Gain(dBi)	Frequency range	Antenna Type	Connector Type
H2 Global	4.28	2.4 GHz ~ 2.4835 GHz	Monopole	Murata MM8030-2610B/RJ3/RK0

* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

3.3 Channel List

16 channels are provided to this EUT:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
11	2405	15	2425	19	2445	23	2465
12	2410	16	2430	20	2450	24	2470
13	2415	17	2435	21	2455	25	2475
14	2420	18	2440	22	2460	26	2480

3.4 Test Mode Applicability and Tested Channel Detail


Pre-Scan:	1. EUT can be used in the following ways: X-axis/ Y-axis/ Z-axis. Pre-scan these ways and find the worst case as a representative test condition.
Worst Case:	1. X-axis/ Y-axis/ Z-axis Worst Condition:X-axis

Following channel(s) was (were) selected for the final test as listed below:

Test Item	Tested Channel	Modulation	Data Rate Parameter
RF Output Power	11, 18, 26	2GFSK	80kb/s
Power Spectral Density	11, 18, 26	2GFSK	80kb/s
6 dB Bandwidth	11, 18, 26	2GFSK	80kb/s
Conducted Out of Band Emissions	11, 18, 26	2GFSK	80kb/s
Unwanted Emissions below 1 GHz	26	2GFSK	80kb/s
Unwanted Emissions above 1 GHz	11, 18, 26	2GFSK	80kb/s

3.5 Duty Cycle of Test Signal


Zigbee: Duty cycle = 100 ms / 100 ms x 100% = 100.0%

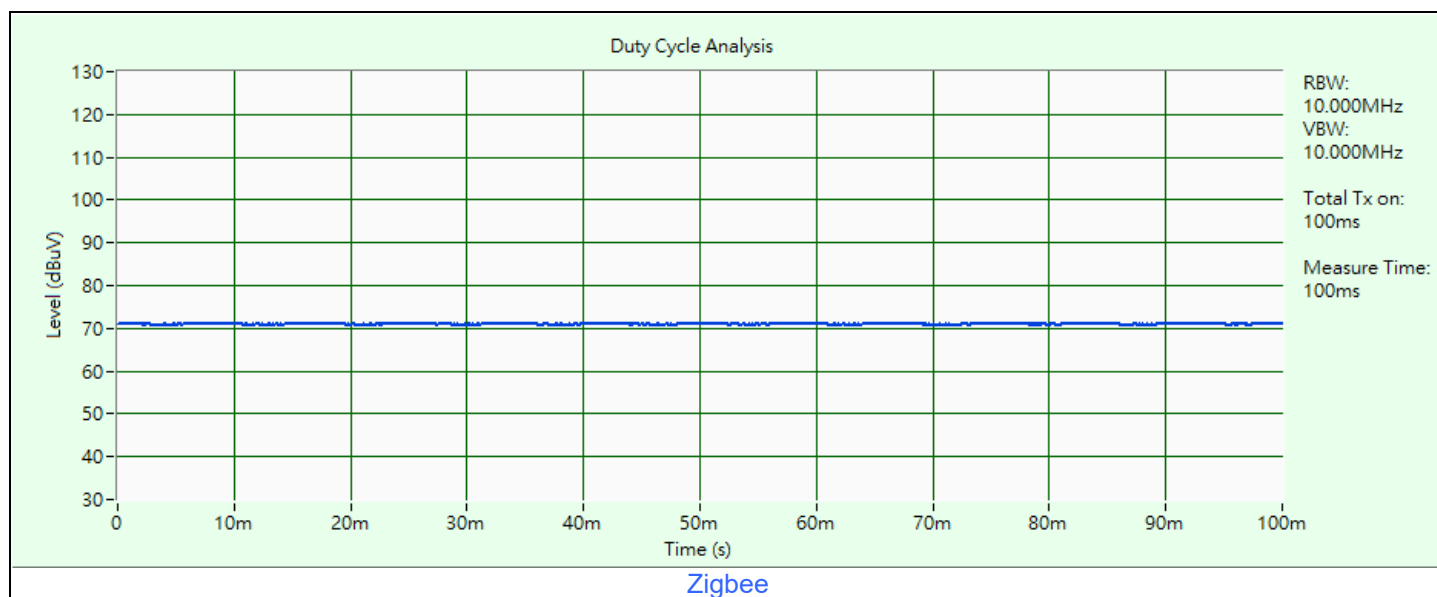

3.6 Test Program Used and Operation Descriptions

Controlling software Terminal has been activated to set the EUT under transmission condition continuously at specific channel frequency.

3.7 Connection Diagram of EUT and Peripheral Devices

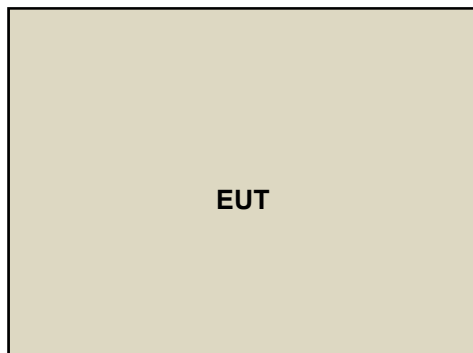

Under Table

Remote Site

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Fixed Attenuator Woken	00800A1K01A-10	00800A1K01A-10-01	2025/5/23	2026/5/22
Peak Power Analyzer Keysight	8990B	MY51000485	2025/1/20	2026/1/19
Wideband Power Sensor Keysight	N1923A	MY58020002	2025/1/21	2026/1/20
		MY58140009	2025/1/21	2026/1/20

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2025/11/26

4.2 Power Spectral Density

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Fixed Attenuator Woken	00800A1K01A-10	00800A1K01A-10-01	2025/5/23	2026/5/22
Signal & Spectrum Analyzer R&S	FSV3044	101504	2025/6/18	2026/6/17
Software BV	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2025/11/26

4.3 6 dB Bandwidth

Refer to section 4.2 to get the tested date and information of the instruments.

4.4 Conducted Out of Band Emissions

Refer to section 4.2 to get the tested date and information of the instruments.

4.5 Unwanted Emissions below 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower & Turn BV ADT	AT100	AT93021705	N/A	N/A
Bi_Log Antenna Schwarzbeck	VULB 9168	9168-160	2025/9/16	2026/9/15
Loop Antenna TESEQ	HLA 6121	45745	2025/9/1	2026/8/31
Preamplifier Agilent	8447D	2944A10638	2025/4/27	2026/4/26
Preamplifier EMCI	EMC001340	980201	2025/9/21	2026/9/20
RF Coaxial Cable Woken	8D-FB	Cable-CH9-01	2025/4/27	2026/4/26
Signal & Spectrum Analyzer R&S	FSW43	101866	2025/3/25	2026/3/24
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Turn Table BV ADT	TT100	TT93021705	N/A	N/A
Turn Table Controller BV ADT	SC100	SC93021705	N/A	N/A

Notes:

1. The test was performed in HY - 966 chamber 4.
2. Tested Date: 2025/11/21

4.6 Unwanted Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower & Turn BV ADT	AT100	AT93021705	N/A	N/A
Boresight antenna tower fixture BV	BAF-02	5	N/A	N/A
Horn Antenna Schwarzbeck	BBHA 9120D	9120D-1169	2025/11/9	2026/11/8
	BBHA 9170	9170-480	2025/11/9	2026/11/8
		BBHA9170243	2025/11/9	2026/11/8
Preamplifier Agilent	8449B	3008A02367	2025/1/5	2026/1/4
Preamplifier EMCI	EMC 184045	980116	2025/9/21	2026/9/20
RF Coaxial Cable EMCI	EMC102-KM-KM-600	150928	2025/6/30	2026/6/29
	EMC102-KM-KM-3000	150929	2025/6/30	2026/6/29
RF Coaxial Cable HUBER+SUHNER	SUCOFLEX 104	CABLE-CH9-(250795/4)	2025/1/5	2026/1/4
RF Coaxial Cable HUBER+SUHNER&EMCI	SUCOFLEX 104& EMC104-SM-SM8000	CABLE-CH9-02 (248780+171006)	2025/1/5	2026/1/4
Signal & Spectrum Analyzer R&S	FSW43	101866	2025/3/25	2026/3/24
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Turn Table BV ADT	TT100	TT93021705	N/A	N/A
Turn Table Controller BV ADT	SC100	SC93021705	N/A	N/A

Notes:

1. The test was performed in HY - 966 chamber 4.
2. Tested Date: 2025/11/20

5 Limits of Test Items

5.1 RF Output Power

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30 dBm)

5.2 Power Spectral Density

The Maximum of Power Spectral Density Measurement is 8 dBm in any 3 kHz.

5.3 6 dB Bandwidth

The minimum of 6 dB Bandwidth Measurement is 0.5 MHz.

5.4 Conducted Out of Band Emissions

Below 20 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

5.5 Unwanted Emissions below 1 GHz

Radiated emissions up to 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

5.6 Unwanted Emissions above 1 GHz

Radiated emissions above 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3


Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

6 Test Arrangements

6.1 RF Output Power

6.1.1 Test Setup



6.1.2 Test Procedure

Peak Power:

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.


The power meter video bandwidth is greater than or equal to the DTS bandwidth and use a fast responding diode detector.

Average Power:

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

6.2 Power Spectral Density

6.2.1 Test Setup




6.2.2 Test Procedure

- Set analyzer center frequency to DTS channel center frequency.
- Set the span > 1.5 times the DTS bandwidth.
- Set the RBW to: 3 kHz.
- Set the VBW $\geq 3 \times$ RBW.
- Detector = peak.
- Sweep time = No faster than coupled (auto) time.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

6.3 6 dB Bandwidth

6.3.1 Test Setup




6.3.2 Test Procedure

- a. Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz.
- b. Set the VBW $\geq [3 \times \text{RBW}]$.
- c. Detector = peak.
- d. Trace mode = max-hold.
- e. Sweep = No faster than coupled (auto) time.
- f. Allow the trace to stabilize.
- g. Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-6 dB down amplitude”. If a marker is below this “-6 dB down amplitude” value, then it shall be as close as possible to this value.

6.4 Conducted Out of Band Emissions

6.4.1 Test Setup



6.4.2 Test Procedure

MEASUREMENT PROCEDURE REF

- Set instrument center frequency to DTS channel center frequency.
- Set the span to ≥ 1.5 times the DTS bandwidth.
- Set the RBW = 100 kHz.
- Set the VBW ≥ 300 kHz.
- Detector = peak.
- Sweep time = No faster than coupled (auto) time.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum PSD level.


MEASUREMENT PROCEDURE OOBE

- Set the center frequency and span to encompass frequency range to be measured. Note that the frequency range might need to be divided into multiple frequency ranges to retain frequency resolution.
- Set RBW = 100 kHz.
- Set VBW ≥ 300 kHz.
- Detector = peak.
- Sweep = No faster than coupled (auto) time.
- Trace Mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.


6.5 Unwanted Emissions below 1 GHz

6.5.1 Test Setup

For Radiated emission below 30 MHz

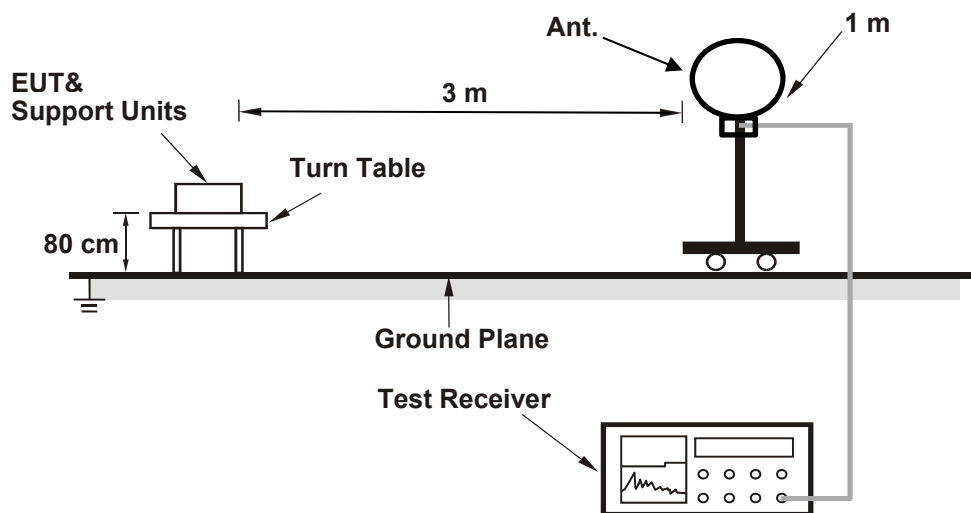

For Radiated emission above 30 MHz

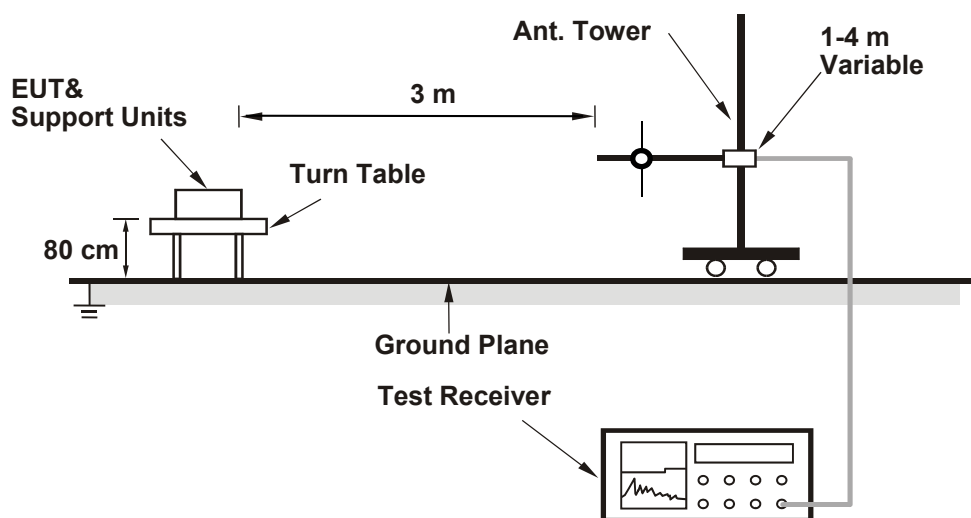

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.5.2 Test Procedure

For Radiated emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode, except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated emission above 30 MHz


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-peak(QP) detect function, Average(AV) detect function, Peak(PK) detect function and specified bandwidth with maximum hold mode when the test frequencies less than or equal to 1 GHz.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

6.6 Unwanted Emissions above 1 GHz

6.6.1 Test Setup

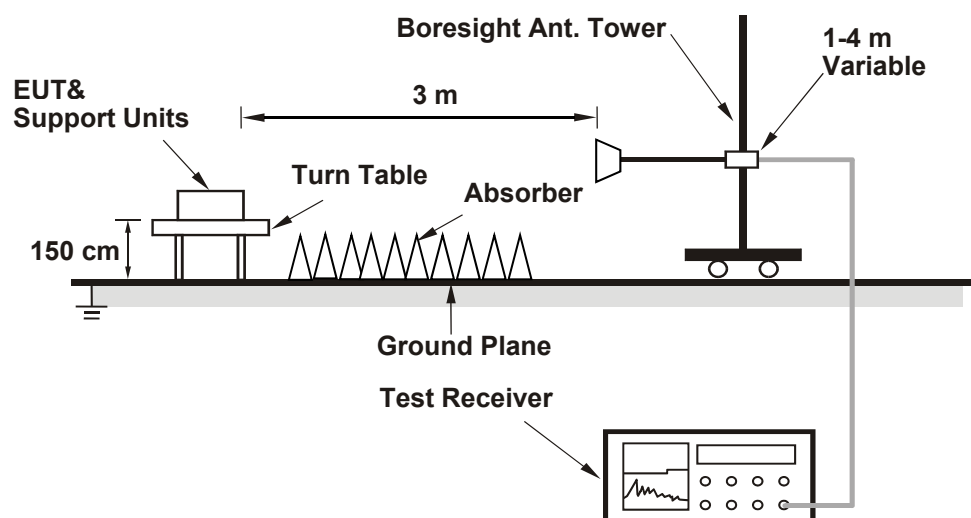

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.6.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver/spectrum analyzer was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Notes:

- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
- For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

7 Test Results of Test Item

7.1 RF Output Power

Environmental Conditions:	25°C, 60% RH	Tested By:	Match Tsui
---------------------------	--------------	------------	------------

For Peak Power

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Power Limit (dBm)	Test Result
11	2405	16.368	12.14	30	Pass
18	2440	22.08	13.44	30	Pass
26	2480	33.963	15.31	30	Pass

Note: The antenna gain is 4.28 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

For Average Power


Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
11	2405	15.453	11.89
18	2440	20.893	13.20
26	2480	32.211	15.08

7.2 Power Spectral Density

Environmental Conditions:	25°C, 60% RH	Tested By:	Match Tsui
---------------------------	--------------	------------	------------

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
11	2405	-1.05	8	Pass
18	2440	0.26	8	Pass
26	2480	1.95	8	Pass


Note: The antenna gain is 4.28 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.

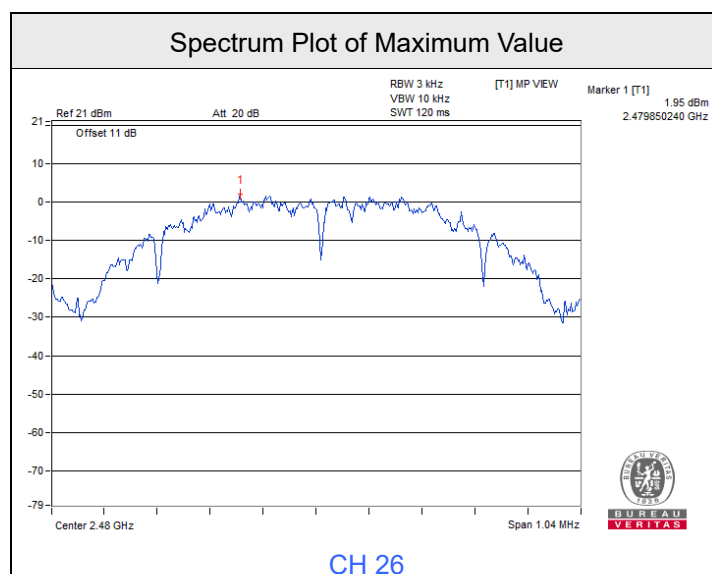

7.3 6 dB Bandwidth


Environmental Conditions:	25°C, 60% RH	Tested By:	Match Tsui
---------------------------	--------------	------------	------------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
11	2405	0.52	0.5	Pass
18	2440	0.52	0.5	Pass
26	2480	0.52	0.5	Pass

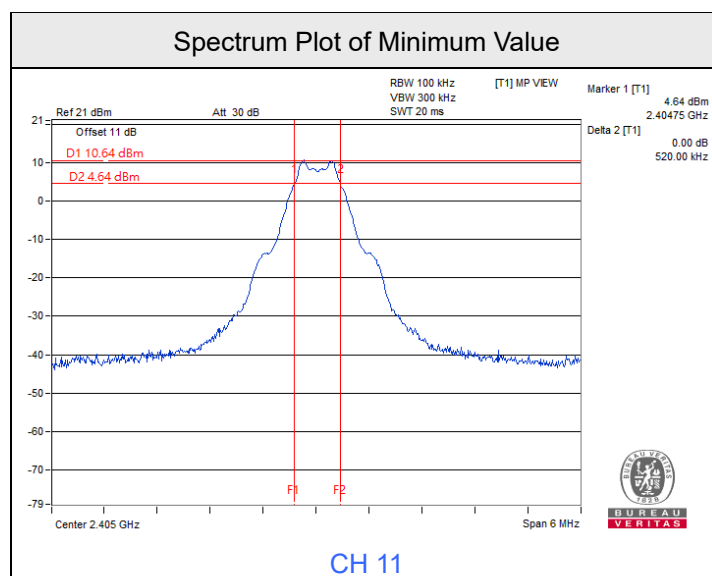

7.4 Conducted Out of Band Emissions

Environmental Conditions:	25°C, 60% RH	Tested By:	Match Tsui
---------------------------	--------------	------------	------------

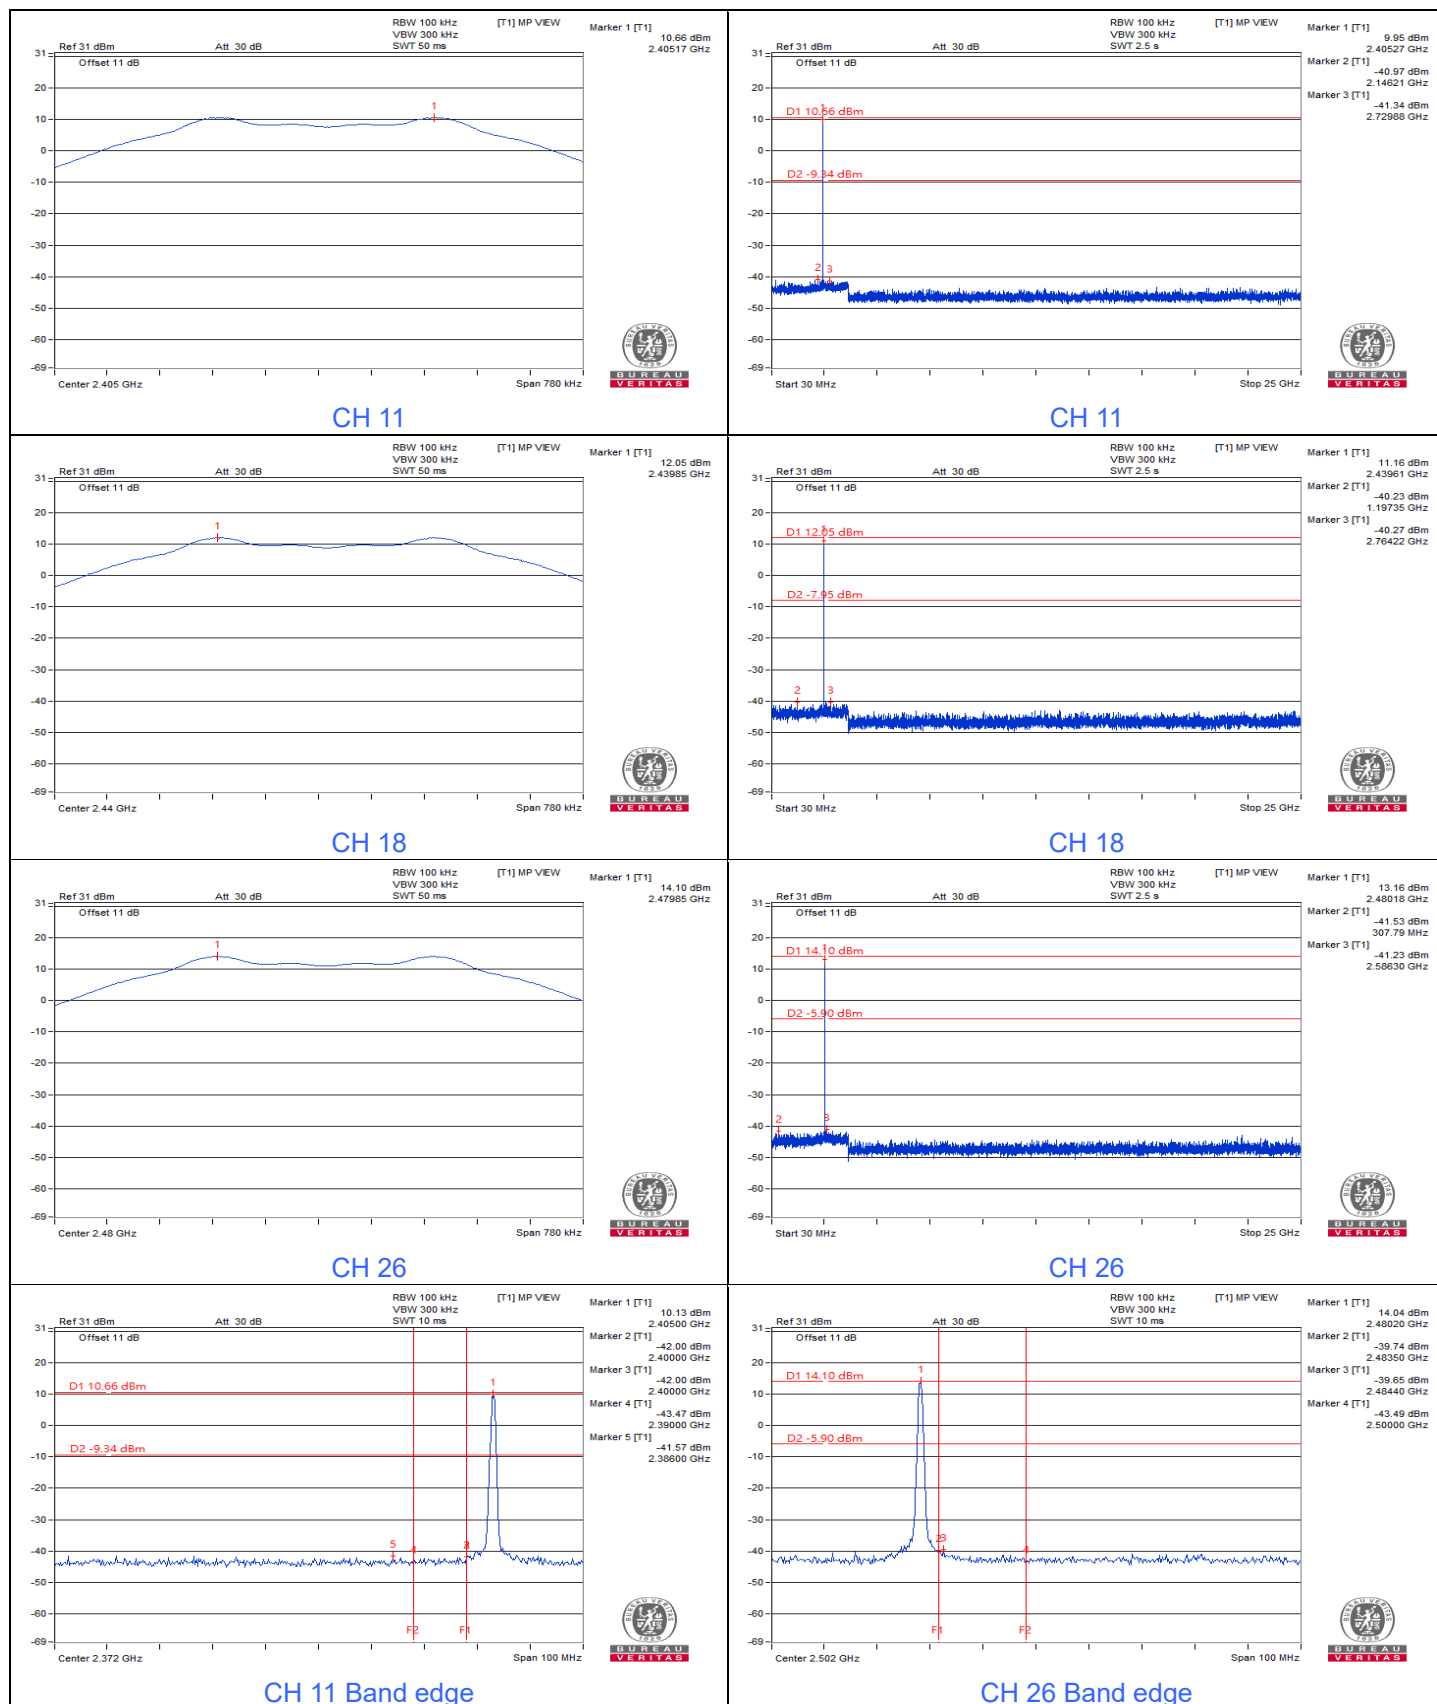


7.5 Unwanted Emissions below 1 GHz

RF Mode	Zigbee	Channel	CH 26 : 2480 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	7.2 Vdc	Environmental Conditions	23 °C, 67% RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	42.61	30.8 QP	40.0	-9.2	1.49 H	14	39.9	-9.1
2	167.74	26.2 QP	43.5	-17.3	1.00 H	141	34.5	-8.3
3	440.31	37.8 QP	46.0	-8.2	1.49 H	295	41.1	-3.3
4	480.08	39.9 QP	46.0	-6.1	1.49 H	93	42.8	-2.9
5	580.96	30.3 QP	46.0	-15.7	1.99 H	305	31.4	-1.1
6	682.81	31.2 QP	46.0	-14.8	1.49 H	154	30.3	0.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

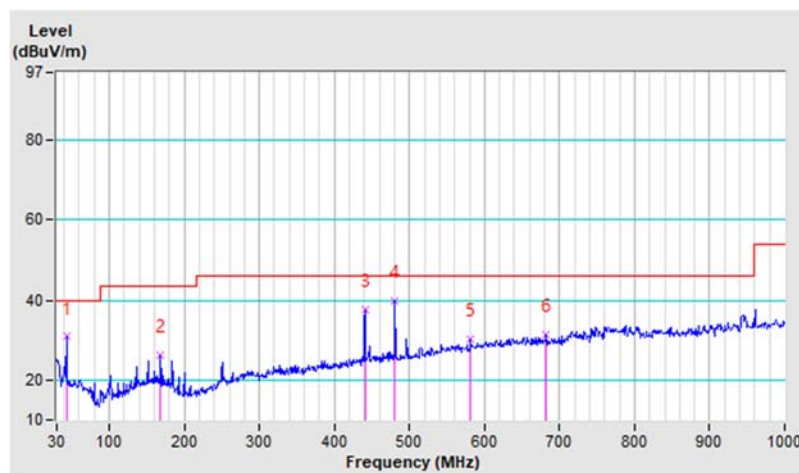


RF Mode	Zigbee	Channel	CH 26 : 2480 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	7.2 Vdc	Environmental Conditions	23 °C, 67% RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	135.73	27.4 QP	43.5	-16.1	1.00 V	15	36.5	-9.1
2	151.25	26.4 QP	43.5	-17.1	1.00 V	272	34.6	-8.2
3	434.49	27.2 QP	46.0	-18.8	1.99 V	253	30.7	-3.5
4	480.08	33.4 QP	46.0	-12.6	1.49 V	6	36.3	-2.9
5	543.13	29.3 QP	46.0	-16.7	1.99 V	215	31.2	-1.9
6	626.55	30.3 QP	46.0	-15.7	1.99 V	316	30.2	0.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

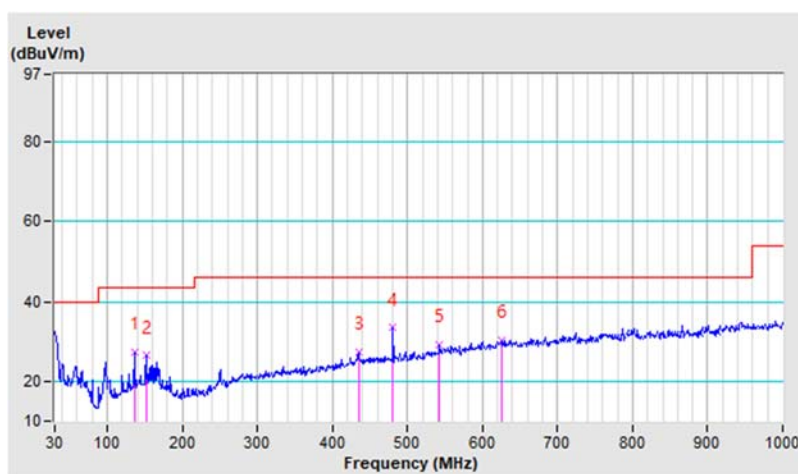

7.6 Unwanted Emissions above 1 GHz

RF Mode	Zigbee	Channel	CH 11 : 2405 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	7.2 Vdc	Environmental Conditions	23 °C, 67% RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.3 PK	74.0	-14.7	1.81 H	111	26.0	33.3
2	2390.00	45.8 AV	54.0	-8.2	1.81 H	111	12.5	33.3
3	*2405.00	111.0 PK			1.81 H	111	77.6	33.4
4	*2405.00	110.4 AV			1.81 H	111	77.0	33.4
5	4810.00	57.1 PK	74.0	-16.9	3.29 H	271	52.1	5.0
6	4810.00	52.7 AV	54.0	-1.3	3.29 H	271	47.7	5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.1 PK	74.0	-14.9	2.59 V	86	25.8	33.3
2	2390.00	45.6 AV	54.0	-8.4	2.59 V	86	12.3	33.3
3	*2405.00	108.5 PK			2.59 V	86	75.1	33.4
4	*2405.00	108.1 AV			2.59 V	86	74.7	33.4
5	4810.00	53.5 PK	74.0	-20.5	2.54 V	133	48.5	5.0
6	4810.00	47.8 AV	54.0	-6.2	2.54 V	133	42.8	5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	Zigbee	Channel	CH 18 : 2440 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	7.2 Vdc	Environmental Conditions	23 °C, 67% RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2440.00	112.1 PK			1.79 H	114	78.8	33.3
2	*2440.00	111.5 AV			1.79 H	114	78.2	33.3
3	4880.00	57.3 PK	74.0	-16.7	3.01 H	265	52.5	4.8
4	4880.00	53.1 AV	54.0	-0.9	3.01 H	265	48.3	4.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2440.00	110.4 PK			2.58 V	90	77.1	33.3
2	*2440.00	109.8 AV			2.58 V	90	76.5	33.3
3	4880.00	55.2 PK	74.0	-18.8	2.62 V	124	50.4	4.8
4	4880.00	50.2 AV	54.0	-3.8	2.62 V	124	45.4	4.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	Zigbee	Channel	CH 26 : 2480 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	7.2 Vdc	Environmental Conditions	23 °C, 67% RH
Tested By	Adair Peng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	113.0 PK			1.28 H	115	79.8	33.2
2	*2480.00	112.4 AV			1.28 H	115	79.2	33.2
3	2483.50	64.2 PK	74.0	-9.8	1.28 H	115	31.0	33.2
4	2483.50	53.4 AV	54.0	-0.6	1.28 H	115	20.2	33.2
5	4960.00	57.1 PK	74.0	-16.9	2.79 H	271	52.0	5.1
6	4960.00	53.0 AV	54.0	-1.0	2.79 H	271	47.9	5.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	110.3 PK			2.77 V	84	77.1	33.2
2	*2480.00	109.9 AV			2.77 V	84	76.7	33.2
3	2483.50	64.2 PK	74.0	-9.8	2.77 V	84	31.0	33.2
4	2483.50	52.1 AV	54.0	-1.9	2.77 V	84	18.9	33.2
5	4960.00	54.6 PK	74.0	-19.4	3.88 V	143	49.5	5.1
6	4960.00	49.6 AV	54.0	-4.4	3.88 V	143	44.5	5.1


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.


Plot of Band Edge

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


Zigbee Channel 11

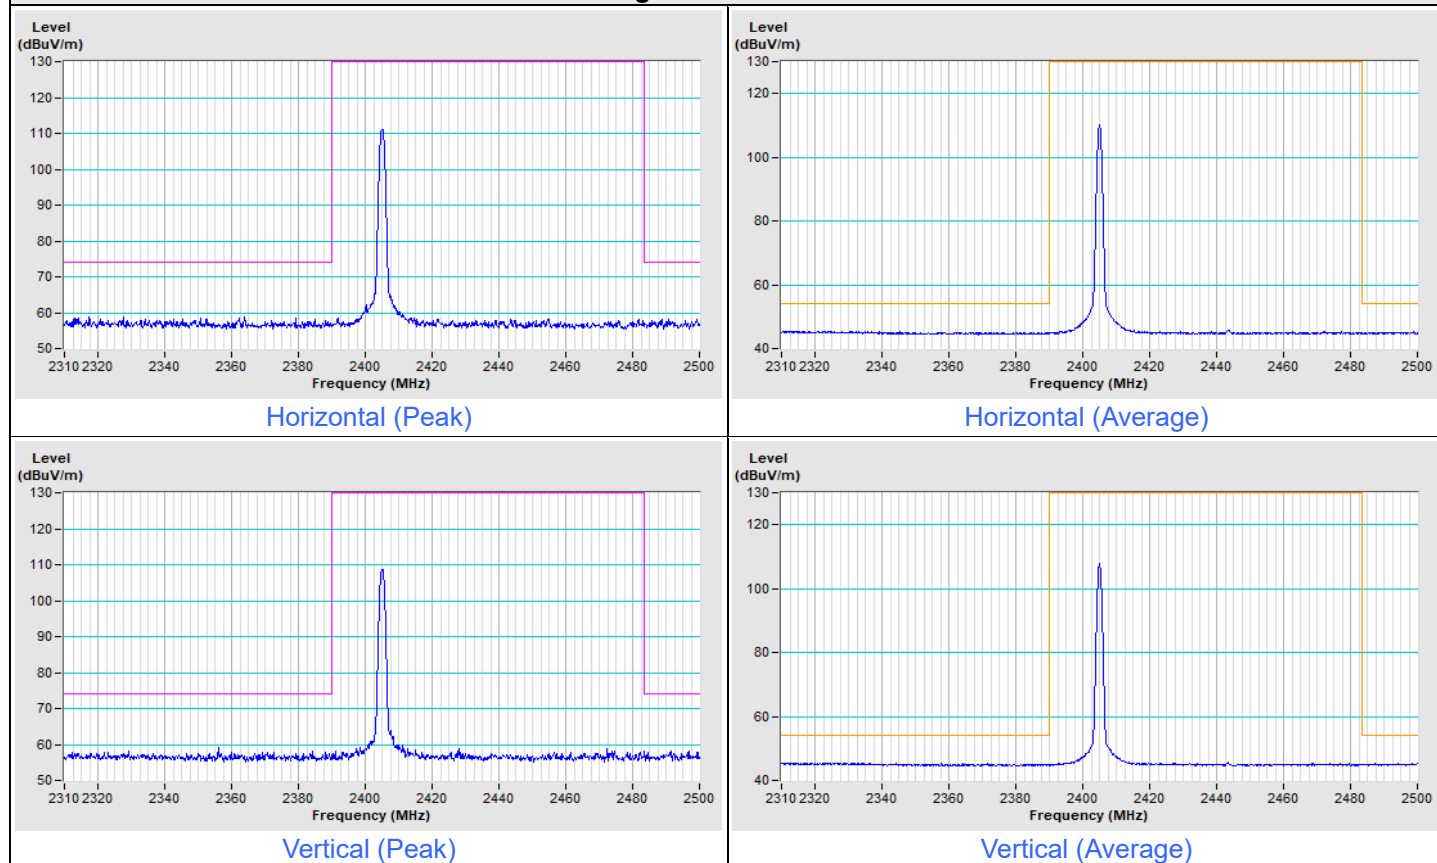


Zigbee Channel 26

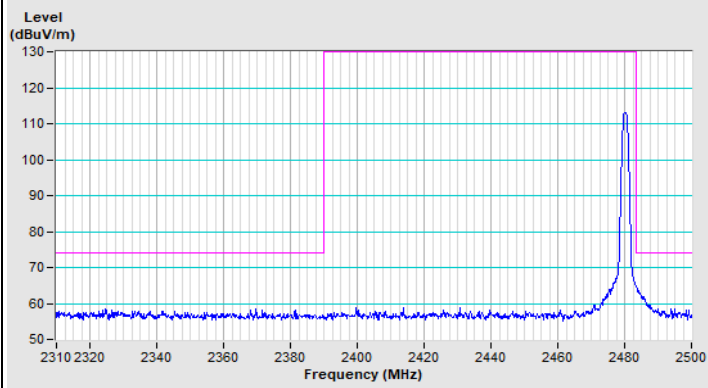


Horizontal (Peak)

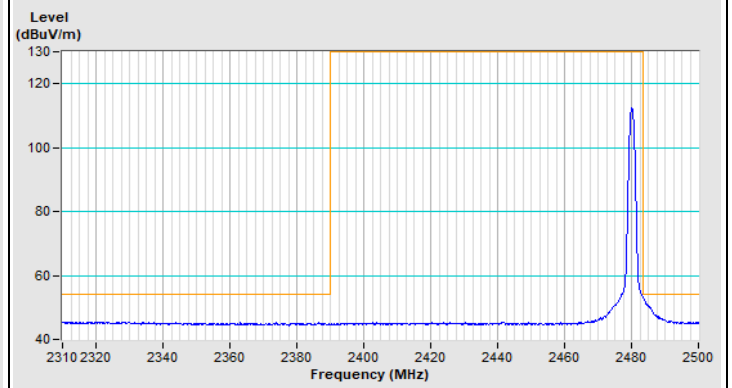

Horizontal (Average)

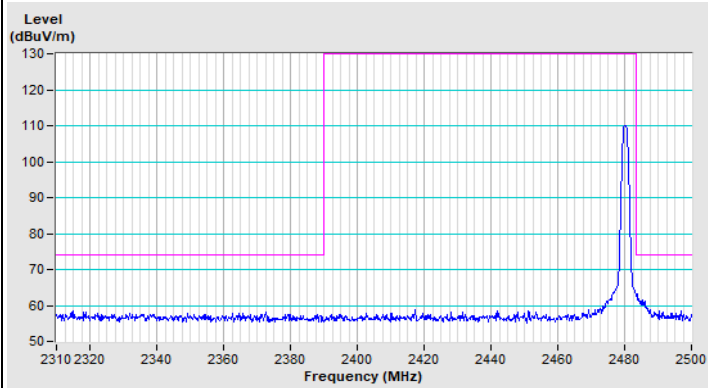


Vertical (Peak)

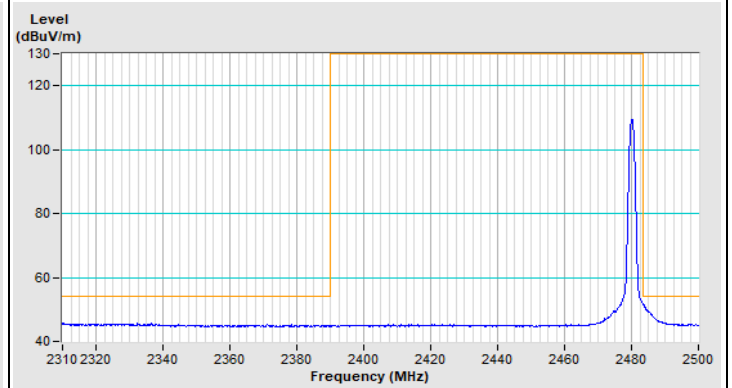

Vertical (Average)

Plot of Other Emission

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	----------------	-------------------------------	--

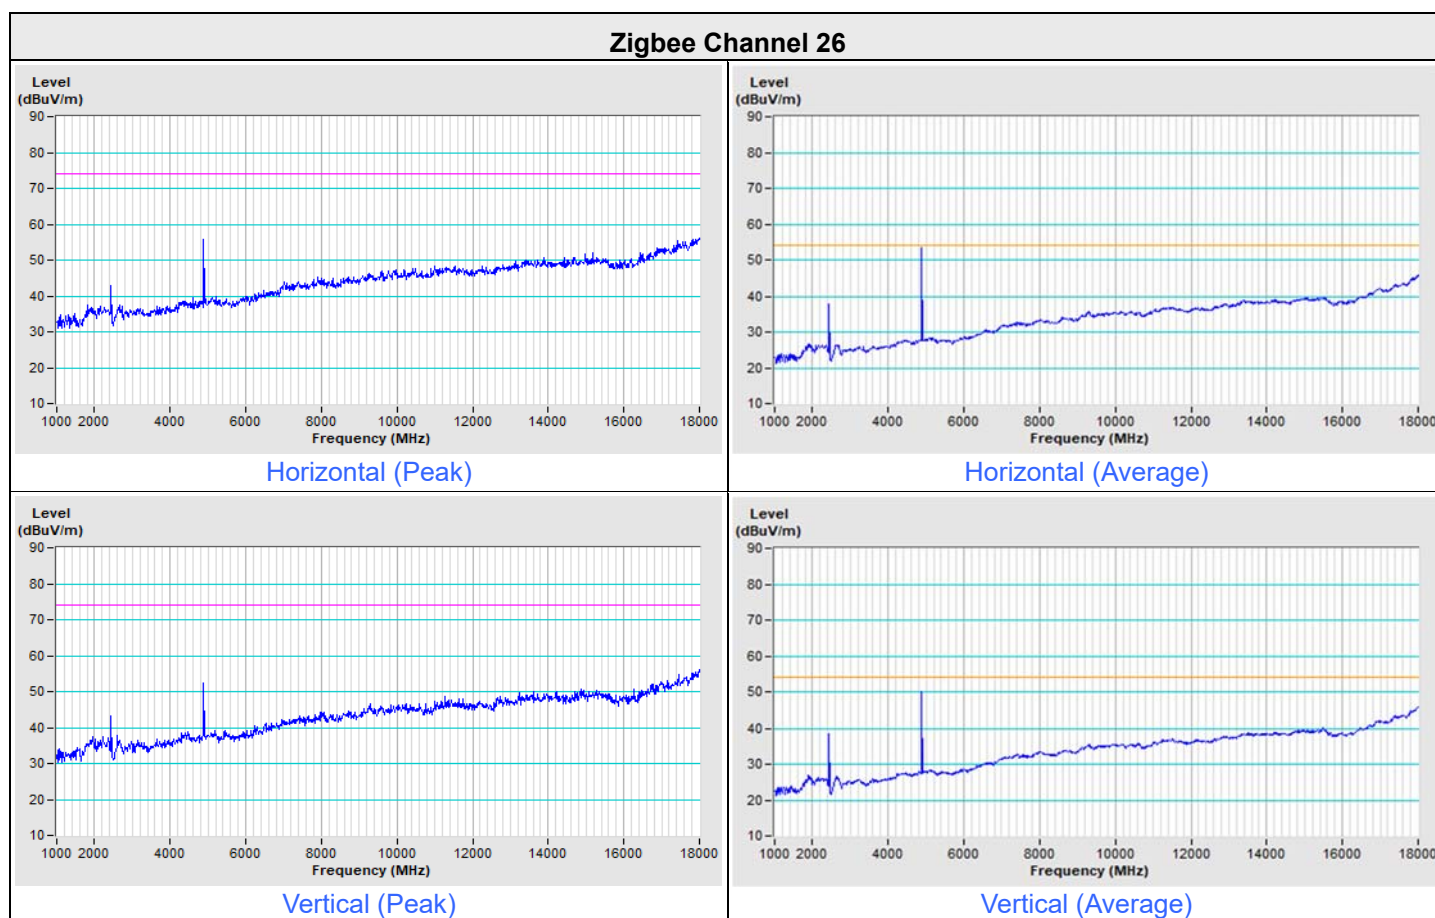

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 25 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---