

	Document Appendix C for the BlackBerry® Smartphone Model RCL22CW SAR Report			Page 1(14)
Author Data Andrew Becker	Dates of Test June 10 – June 26, 2010	Test Report No RTS-2068-1007-18	FCC ID: L6ARCL20CW	IC ID 2503A-RCL20CW

APPENDIX C: SAR DISTRIBUTION PLOTS FOR BODY-WORN CONFIGURATION

	Document Appendix C for the BlackBerry® Smartphone Model RCL22CW SAR Report			Page 2(14)
Author Data Andrew Becker	Dates of Test June 10 – June 26, 2010	Test Report No RTS-2068-1007-18	FCC ID: L6ARCL20CW	IC ID 2503A-RCL20CW

Date/Time: 6/21/2010 6:11:46 PM

Test Laboratory: RIM Testing Services

Vertical_Holster_Back_CDMA800_low_chan_amb_temp_23.3C_liq_tem p_22.4C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 322A2EE0

Communication System: CDMA 800; Frequency: 824.7 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.954 \text{ mho/m}$; $\epsilon_r = 56.3$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section



DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.97, 5.97, 5.97); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.660 mW/g

Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$,
 $dy=7.5\text{mm}$, $dz=5\text{mm}$
Reference Value = 25.8 V/m; Power Drift = -0.175 dB
Peak SAR (extrapolated) = 0.764 W/kg
SAR(1 g) = 0.607 mW/g; SAR(10 g) = 0.447 mW/g
Maximum value of SAR (measured) = 0.640 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RCL22CW SAR Report			Page 3(14)
Author Data Andrew Becker	Dates of Test June 10 – June 26, 2010	Test Report No RTS-2068-1007-18	FCC ID: L6ARCL20CW	IC ID 2503A-RCL20CW

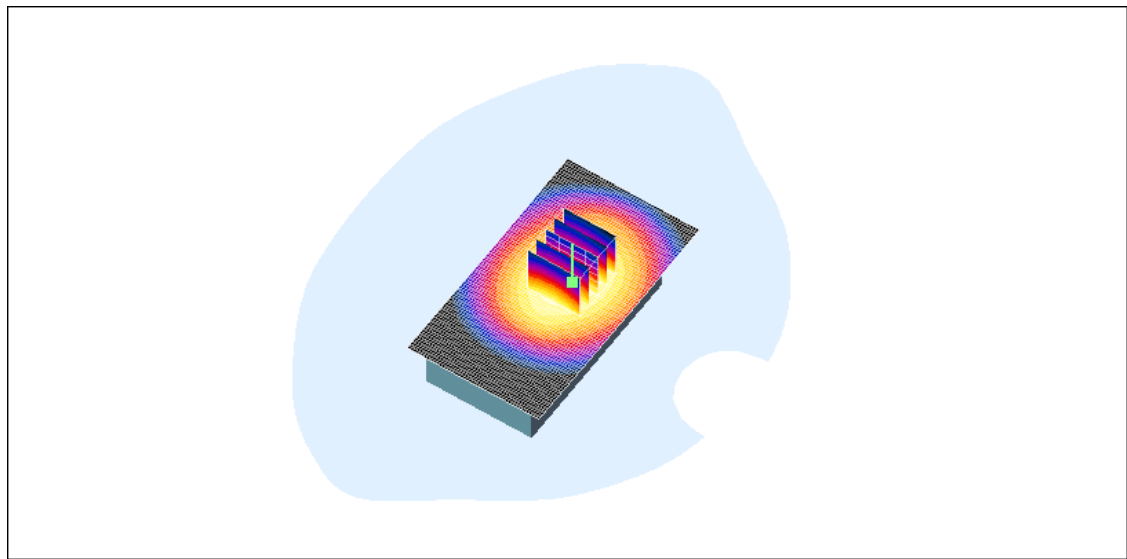

0 dB = 0.640mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RCL22CW SAR Report			Page 4(14)
Author Data Andrew Becker	Dates of Test June 10 – June 26, 2010	Test Report No RTS-2068-1007-18	FCC ID: L6ARCL20CW	IC ID 2503A-RCL20CW

Date/Time: 6/21/2010 6:27:24 PM

Test Laboratory: RIM Testing Services

Horizontal_Holster_Back_CDMA800_low_chan_amb_temp_23.0C_liq_temp_22.1C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 322A2EE0

Communication System: CDMA 800; Frequency: 824.7 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.954 \text{ mho/m}$; $\epsilon_r = 56.3$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section



DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.97, 5.97, 5.97); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.798 mW/g

Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$
Reference Value = 28.7 V/m; Power Drift = -0.019 dB
Peak SAR (extrapolated) = 0.965 W/kg
SAR(1 g) = 0.745 mW/g; SAR(10 g) = 0.547 mW/g
Maximum value of SAR (measured) = 0.789 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RCL22CW SAR Report			Page 5(14)
Author Data Andrew Becker	Dates of Test June 10 – June 26, 2010	Test Report No RTS-2068-1007-18	FCC ID: L6ARCL20CW	IC ID 2503A-RCL20CW

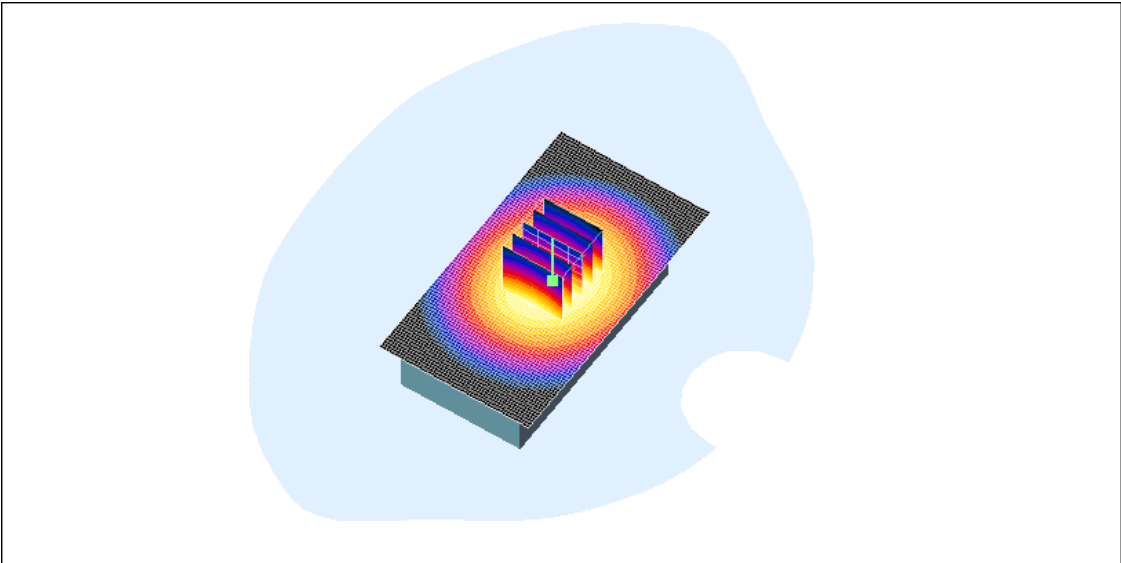

0 dB = 0.789mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RCL22CW SAR Report				Page 6(14)
Author Data Andrew Becker	Dates of Test June 10 – June 26, 2010	Test Report No RTS-2068-1007-18	FCC ID: L6ARCL20CW	IC ID 2503A-RCL20CW	

Date/Time: 6/10/2010 7:21:43 PM

Test Laboratory: RIM Testing Services

Vertical_Holster_Back_CDMA1900_mid_chan_amb_temp_22.9C_liq_temper_22.1C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 322A2EE0

Communication System: CDMA 1900; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.57 \text{ mho/m}$; $\epsilon_r = 52.7$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section



DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.9, 4.9, 4.9); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.604 mW/g

Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$
Reference Value = 4.80 V/m; Power Drift = 0.470 dB
Peak SAR (extrapolated) = 0.832 W/kg
SAR(1 g) = 0.548 mW/g; SAR(10 g) = 0.324 mW/g
Maximum value of SAR (measured) = 0.601 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RCL22CW SAR Report			Page 7(14)
Author Data Andrew Becker	Dates of Test June 10 – June 26, 2010	Test Report No RTS-2068-1007-18	FCC ID: L6ARCL20CW	IC ID 2503A-RCL20CW

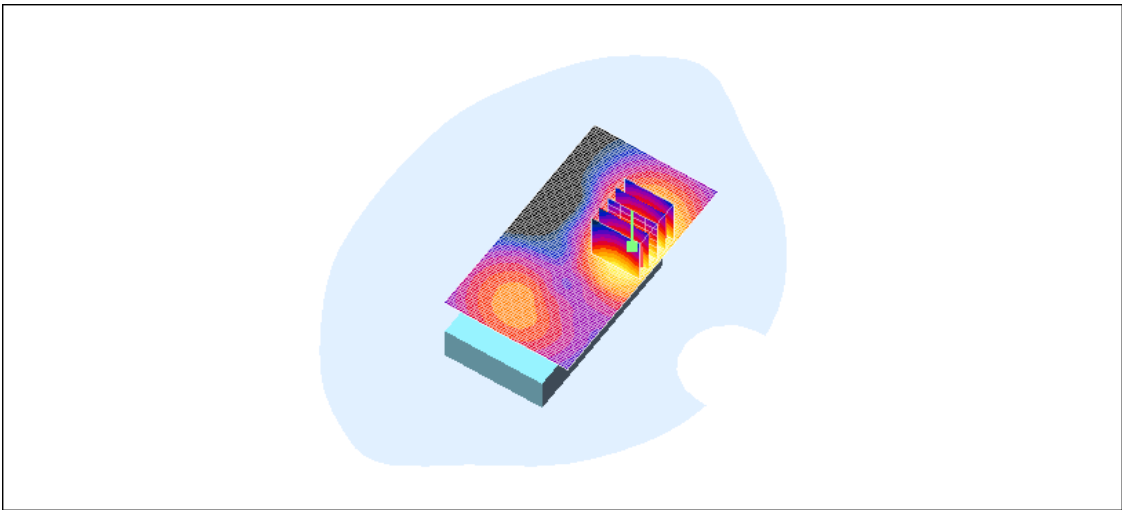

0 dB = 0.601mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RCL22CW SAR Report			Page 8(14)
Author Data Andrew Becker	Dates of Test June 10 – June 26, 2010	Test Report No RTS-2068-1007-18	FCC ID: L6ARCL20CW	IC ID 2503A-RCL20CW

Date/Time: 6/10/2010 7:52:57 PM

Test Laboratory: RIM Testing Services

**Horizontal_Holster_Back_CDMA1900_mid_chan_amb_temp_22.7C_liq_t
emp_21.9C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 322A2EE0

Communication System: CDMA 1900; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.57 \text{ mho/m}$; $\epsilon_r = 52.7$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section



DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.9, 4.9, 4.9); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.672 mW/g

Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$,
 $dy=7.5\text{mm}$, $dz=5\text{mm}$
Reference Value = 8.62 V/m; Power Drift = -0.139 dB
Peak SAR (extrapolated) = 0.911 W/kg
SAR(1 g) = 0.596 mW/g; SAR(10 g) = 0.355 mW/g
Maximum value of SAR (measured) = 0.656 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RCL22CW SAR Report			Page 9(14)
Author Data Andrew Becker	Dates of Test June 10 – June 26, 2010	Test Report No RTS-2068-1007-18	FCC ID: L6ARCL20CW	IC ID 2503A-RCL20CW

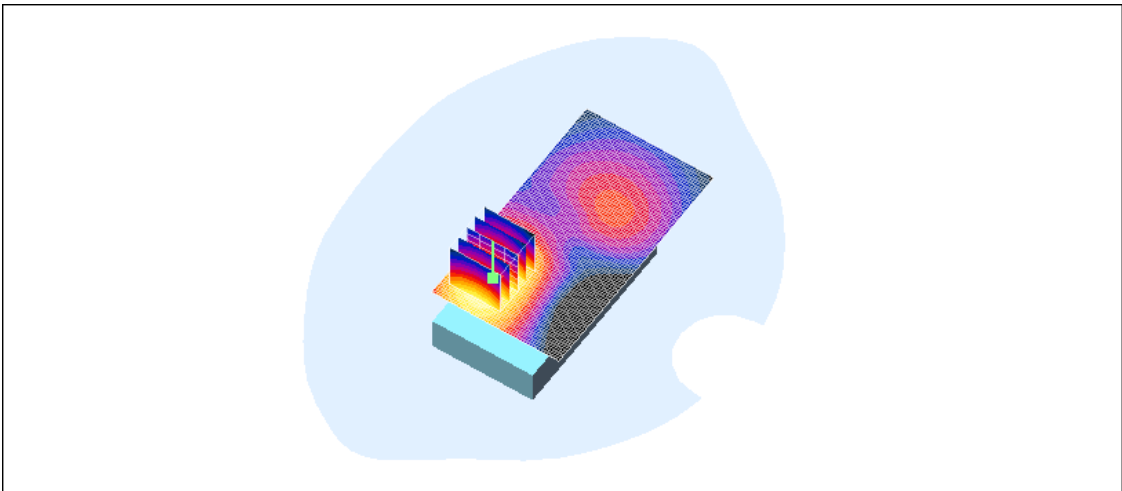

0 dB = 0.656mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RCL22CW SAR Report			Page 10(14)
Author Data Andrew Becker	Dates of Test June 10 – June 26, 2010	Test Report No RTS-2068-1007-18	FCC ID: L6ARCL20CW	IC ID 2503A-RCL20CW

Date/Time: 6/17/2010 9:45:42 PM

Test Laboratory: RIM Testing Services

File Name:

[Vertical Holster Back 802.11b mid chan amb temp 22.5C liq temp 21.8C.da4](#)

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 322A2EE0

Program Name: Compliance Testing: (Body worn)

Communication System: 802.11 b (2450); Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2437 \text{ MHz}$; $\sigma = 2.02 \text{ mho/m}$; $\epsilon_r = 50.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.32, 4.32, 4.32); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.115 mW/g

Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.49 V/m ; Power Drift = 0.021 dB


Peak SAR (extrapolated) = 0.189 W/kg

SAR(1 g) = 0.103 mW/g ; SAR(10 g) = 0.056 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.111 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RCL22CW SAR Report			Page 11(14)
Author Data Andrew Becker	Dates of Test June 10 – June 26, 2010	Test Report No RTS-2068-1007-18	FCC ID: L6ARCL20CW	IC ID 2503A-RCL20CW

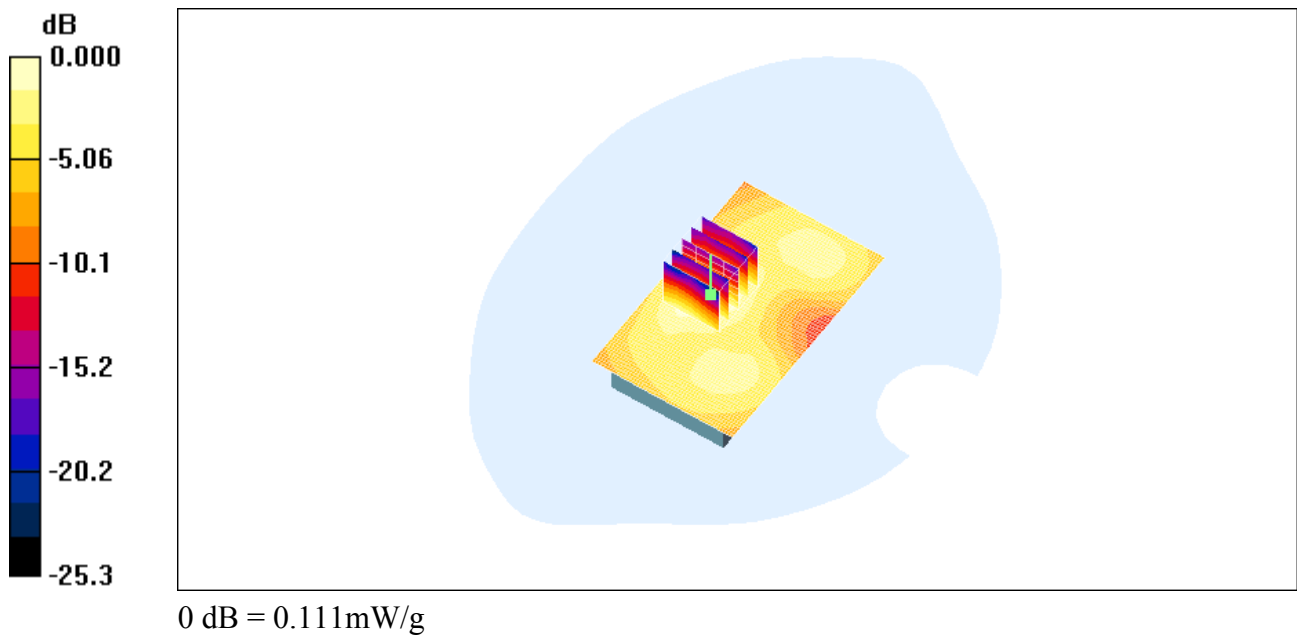

	Document Appendix C for the BlackBerry® Smartphone Model RCL22CW SAR Report			Page 12(14)
Author Data Andrew Becker	Dates of Test June 10 – June 26, 2010	Test Report No RTS-2068-1007-18	FCC ID: L6ARCL20CW	IC ID 2503A-RCL20CW

Date/Time: 6/17/2010 10:16:16 PM

Test Laboratory: RIM Testing Services

File Name:

[Horizontal_Holster_Back_802.11b_mid_chan_amb_temp_22.4C_liq_temp_21.7C.da4](#)

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 322A2EE0

Program Name: Compliance Testing: (Body worn)

Communication System: 802.11 b (2450); Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2437 \text{ MHz}$; $\sigma = 2.02 \text{ mho/m}$; $\epsilon_r = 50.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.32, 4.32, 4.32); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 2; Type: SAM 4.0; Serial: 1080
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.229 mW/g

Body/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.91 V/m ; Power Drift = 0.026 dB


Peak SAR (extrapolated) = 0.381 W/kg

SAR(1 g) = 0.209 mW/g ; SAR(10 g) = 0.112 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.228 mW/g

	Document Appendix C for the BlackBerry® Smartphone Model RCL22CW SAR Report			Page 13(14)
Author Data Andrew Becker	Dates of Test June 10 – June 26, 2010	Test Report No RTS-2068-1007-18	FCC ID: L6ARCL20CW	IC ID 2503A-RCL20CW

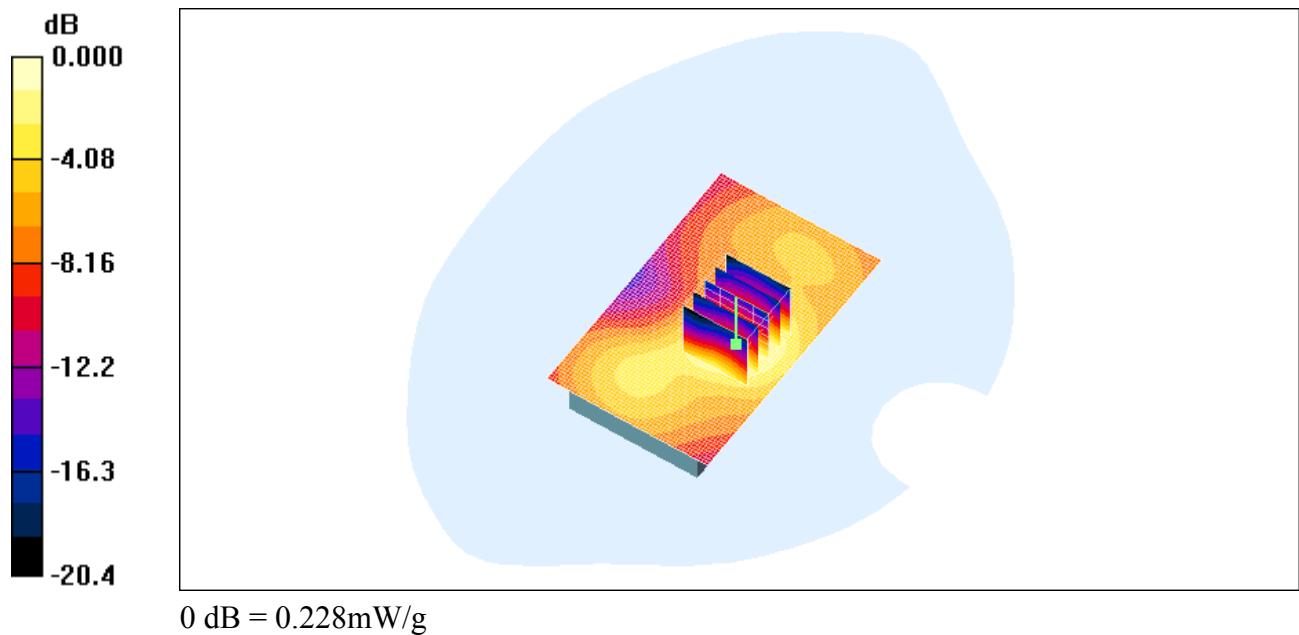

	Document Appendix C for the BlackBerry® Smartphone Model RCL22CW SAR Report			Page 14(14)
Author Data Andrew Becker	Dates of Test June 10 – June 26, 2010	Test Report No RTS-2068-1007-18	FCC ID: L6ARCL20CW	IC ID 2503A-RCL20CW

Z axis plots for the worst case body worn configuration:

