

EMI Test Report

Tested in accordance with
Federal Communications Commission (FCC)
Personal Communications Services
CFR 47, Part 15 Subpart C
&
Industry Canada (IC) RSS-210, RSS-GEN



A division of Research In Motion Limited

REPORT NO.: RTS-2474-1001-38

PRODUCT MODEL NO.: RCX71UW
TYPE NAME: BlackBerry® smartphone
FCC ID: L6ARCX70UW
IC: 2503A-RCX70UW

DATE: 22 April, 2010

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

Statement of Performance:

The BlackBerry® smartphone, model RCX71UW, part number CER-25285-001 Rev. 8, and its accessories perform within the requirements of the test standards when configured and operated under RIM's operation instructions.

Declaration:

We hereby certify that:

The test data reported herein is an accurate record of the performance of the sample(s) tested.

The test results are valid for the tested unit (s) only.

The test equipment used was suitable for the tests performed and within manufacturer's published specifications and operating parameters.


The test methods were consistent with the methods described in the relevant standards.

Documented by:



Michael Cino
Regulatory Compliance Associate
Date: April 22, 2010

Reviewed by:



Maurice Battler
Compliance Specialist
Date: April 22, 2010

Reviewed and Approved by:



Masud S. Attayi, P.Eng.
Manager, Regulatory Compliance
Date: April 23, 2010

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

Table of Contents

A.	Scope.....	4
B.	Associated Documents	4
C.	Product Identification	4
D.	Support Equipment Used for the Testing of the EUT.....	5
E.	Test Results Chart	6
F.	Summary of Results.....	7
G.	Compliance Test Equipment Used	11
	APPENDIX 1 – AC CONDUCTED EMISSIONS TEST DATA/PLOTS	12
	APPENDIX 2 – BLUETOOTH AND 802.11b/g/n RADIATED EMISSIONS TEST DATA.....	17
	APPENDIX 3 – BLUETOOTH CONDUCTED EMISSIONS TEST DATA/PLOTS	34
	APPENDIX 4 – 802.11b/g/n CONDUCTED EMISSIONS TEST DATA/PLOTS.....	58

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

A. Scope

This report details the results of compliance tests which were performed in accordance to the requirements of:

- o FCC CFR 47 Part 15, Subpart C, October, 2009
- o Industry Canada, RSS-210, Issue 7, June 2007, Low Power Licence-Exempt Radiocommunication Devices
- o Industry Canada, RSS-GEN, Issue 2, June 2007, General Requirements and Information for the Certification of Radiocommunication Equipment

B. Associated Documents

1. HW_Declaration_CER-25285-001 Rev 2
2. HW_Declaration_CER-25285-001 Rev 5
3. HW_Declaration_CER-25285-001 Rev 6
4. HW_Declaration_CER-25285-001 Rev 7
5. HW_Declaration_CER-25285-001 Rev 8

C. Product Identification

Manufactured by Research In Motion Limited whose headquarters is located at:
 295 Phillip Street
 Waterloo, Ontario
 Canada, N2L 3W8
 Phone: 519 888 7465
 Fax: 519 888 6906

The equipment under test (EUT) was tested at the following locations:

RIM Testing Services EMI test facilities
 305 Phillip Street
 Waterloo, Ontario
 Canada, N2L 3W8
 Phone: 519 888 7465
 Fax: 519 888 6906

440 Phillip Street
 Waterloo, Ontario
 Canada, N2L 5R9
 Phone: 519 888 7465
 Fax: 519 888 6906

The testing was performed from January 27 to March 23 & April 20-22, 2010.

 EMI Test Report for the BlackBerry® smartphone Model RCX71UW		
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

The sample EUT included:

SAMPLE	MODEL	CER NUMBER	PIN
1	RCX71UW	CER-25285-001 Rev. 1	21BE0489
2	RCX71UW	CER-25285-001 Rev. 1	21BE03E5
3	RCX71UW	CER-25285-001 Rev. 1	21BE0489
4	RCX71UW	CER-25285-001 Rev. 1	21BE04F2
5	RCX71UW	CER-25285-001 Rev. 2	21D067C1
6	RCX71UW	CER-25285-001 Rev. 2	21D06B49
7	RCX71UW	CER-25285-001 Rev. 5	21F25870
8	RCX71UW	CER-25285-001 Rev. 6	220CB9BA
9	RCX71UW	CER-25285-001 Rev. 6	220CB9BD
10	RCX71UW	CER-25285-001 Rev. 8	222AC1F4

Sample 1 was used for all AC Line Conducted Emissions testing.
Samples 2, 3, 5 and 6 were used for Bluetooth Radiated Emissions testing.
Samples 7, 8, 9 and 10 were used for 802.11b/g/n Radiated Emissions testing.
Sample 4 was used for Bluetooth and 802.11b/g/n Conducted Emissions testing.

To view the differences between CER-25285-001 Rev. 1 and CER-25285-001 Rev. 8, see document HW_Declaration_CER-25285-001 Rev 2, HW_Declaration_CER-25285-001 Rev 5, HW_Declaration_CER-25285-001 Rev 6, HW_Declaration_CER-25285-001 Rev 7 and HW_Declaration_CER-25285-001 Rev 8.

Only the characteristics that may have been affected by the changes from Rev 1 to Rev 8 have been re-tested.

BlackBerry® smartphone Accessories Tested

- 1) Fixed Blade Charger, part number HDW-24481-001, with an output voltage of 5.0 volts dc, 700 mA and attached USB cable with a lead length of 1.80 metres.
- 2) Folding Blade Charger, part number HDW-17955-001, with an output voltage of 5.0 volts dc.
- 3) Stereo Headset, part number HDW-14322-003 with a lead length of 1.3 metres.
- 4) USB Data Cable, part number HDW-06610-005, 1.50 metres long.

D. Support Equipment Used for the Testing of the EUT

No support equipment used. See section G. *Compliance Test Equipment Used.*

 EMI Test Report for the BlackBerry® smartphone Model RCX71UW		
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

E. Test Results Chart

SPECIFICATION		TEST TYPE	Meets Requirements	TEST DATA
FCC CFR 47	IC			APPENDIX
Part 15.207	RSS-210 RSS-GEN	Conducted AC Line Emission	Pass	1
Part 15.209 Part 15.247	RSS-210 RSS-GEN	BT Radiated Spurious Emissions and Radiated Band Edge Compliance	Pass	2
Part 15.209 Part 15.247	RSS-210 RSS-GEN	802.11 b/g/n Radiated Spurious Emissions and Radiated Band Edge Compliance	Pass	2
Part 15.247(a)	RSS-210	BT, 20 dB Bandwidth	Pass	3
Part 15.247(a)	RSS-210	BT, Carrier Frequency Separation	Pass	3
Part 15.247(a)	RSS-210	BT, Number of Hopping Frequencies	Pass	3
Part 15.247(a)	RSS-210	BT, Time of Occupancy (Dwell Time)	Pass	3
Part 15.247(b)	RSS-210	BT, Maximum Peak Conducted Output Power	Pass	3
Part 15.247(c)	RSS-210	BT, Band-Edge Compliance of RF Conducted Emissions	Pass	3
Part 15.247(c)	RSS-210	BT, Spurious RF Conducted Emissions	Pass	3
Part 15.247(b)	RSS-210	802.11b/g/n, 6 dB Bandwidth	Pass	4
Part 15.247(b)	RSS-210	802.11b/g/n, Maximum Conducted Output Power	Pass	4
Part 15.247(b)	RSS-210	802.11b/g/n, Band-Edge	Pass	4
Part 15.247(b)	RSS-210	802.11b/g/n, Peak Power Spectral Density	Pass	4
Part 15.247(b)	RSS-210	802.11b/g/n, Spurious RF Conducted Emissions	Pass	4

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

F. Summary of Results

1) AC LINE CONDUCTED EMISSIONS

The conducted emissions were measured using the test procedure outlined in CISPR Recommendation 22 through a 50 Ohm Line Impedance Stabilization Network (LISN), which was inserted in the power line to the equipment to provide the specified impedance for measurements. The EUT was placed on a nonconductive wooden table, 80 cm high that was positioned 40 cm from a vertical ground plane. The RF output of the network was connected to an EMI receiver system with characteristics that duplicate those of the receiver specified in CISPR Publication 16.

BlackBerry® smartphone was in battery charging mode. The input voltage was 120 V, 60 Hz.

The following test configurations were measured:

1. The BlackBerry® smartphone in 802.11b Tx mode and attached to the Stereo Headset, was connected to the Folding Blade Charger.
2. The BlackBerry® smartphone in Bluetooth Tx mode and connected to the Stereo Headset was connected to the Fixed Blade Charger via the 1.5 metre USB Cable.

The sample EUT's conducted emissions were compared with respect to the FCC CFR 47 Part 15, Subpart C and IC RSS-210 limits. The sample EUT had a worst case test margin of 8.21 dB below the QP limit at 0.150 MHz using the quasi-peak detector with the Fixed Blade Charger in Test Configuration 2.

See APPENDIX 1 for the test data

Measurement Uncertainty ± 3.0 dB

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

2) RADIATED EMISSIONS

a) Radiated Spurious and Harmonic Emissions

The EUT was placed on a nonconductive styrofoam table, 80 cm high that was positioned on a remotely controlled turntable. The test distance used between the EUT and the receiving antenna was three metres. The turntable was rotated to determine the azimuth of the peak emissions. Then the emissions were maximized by elevating the antenna in the range of 1 to 4 metres. The maximum emission level was recorded. The frequency range measured was from 30 MHz to 25.0 GHz. Both the horizontal and vertical polarizations of the emissions were measured.

The measurements were done in a semi-anechoic chamber (SAC) below 1 GHz and a fully-anechoic room (FAR) above 1 GHz. The SAC's FCC registration number is **778487** and the Industry Canada (IC) file number is **2503B-1**. The FAR's FCC registration number is **959115** and the IC file number is **2503C-1**.

The EUT was configured and operated to produce the maximum radiated emissions while still keeping within RIM's specifications.

The BlackBerry® smartphone was measured in standalone configuration with Bluetooth transmitting in single frequency mode at low channel (0), middle channel (39) and high channel (78) for packet type "DH5", "2-DH5" and "3-DH5". The system's radiated emission levels were compared with respect to the FCC CFR 47 Part 15, Subpart C, 15.247 and RSS-210.

The BlackBerry® smartphone was measured in standalone configuration transmitting on channels 1, 6 & 11 at 1 Mbps, MCS 0 and MCS 7, and on channel 6 at 6 Mbps for 802.11b/g/n modes. The system's radiated emission levels were compared with respect to the FCC CFR 47 Part 15 Subpart C, 15.247 and RSS-210.

The Bluetooth harmonics were investigated up to the 10th harmonic. The worst case test margin was 4.45 dB below the accepted limit at 12399.103 MHz .

The 802.11b/g/n harmonics were investigated up to the 10th harmonic. The worst case test margin was 13.41 dB below the accepted limit at 2398.377 MHz.

See APPENDIX 2 for the test data

b) Band-Edge Compliance of RF Radiated Emissions

The BlackBerry® smartphone met the requirements for band-edge compliance of RF radiated emissions for Bluetooth and 802.11b/g/n as per the requirements of 15.247, 15.209, and RSS-210/RSS-GEN.

Measurement Uncertainty ± 4.6 dB

See APPENDIX 2 for the test data

 EMI Test Report for the BlackBerry® smartphone Model RCX71UW		
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

3) BLUETOOTH RF CONDUCTED EMISSIONS

The Bluetooth conducted RF emissions from the BlackBerry® smartphone were measured using the methods outlined in FCC CFR 47 Part 15, Subpart C.

a) 20 dB Bandwidth

The BlackBerry® smartphone met the requirements of the 20 dB bandwidth as per 47 CFR 15.247(a) and RSS-210. Low channel (0), middle channel (39) and high channel (78) were measured. The result includes both normal data rate and EDR.

See APPENDIX 3 for the test data.

b) Carrier Frequency Separation

The BlackBerry® smartphone met the requirements of the carrier frequency separation as per 47 CFR 15.247(a) and RSS-210. Channel 38 to 39 was measured. The result includes both normal data rate and EDR.

See APPENDIX 3 for the test data.

c) Number of Hopping Frequencies

The BlackBerry® smartphone met the requirements of the number of hopping frequencies as per 47 CFR 15.247(a) and RSS-210. The number of hopping channels measured was 79.

See APPENDIX 3 for the test data.

d) Time of Occupancy (Dwell Time)

The EUT met the requirements of the dwell time as per 47 CFR 15.247(a) and RSS-210. Low channel (0), middle channel (39) and high channel (78) were measured in DH1, DH3 and DH5 modes. Bluetooth was operating in frequency hopping (Euro/US) mode during the measurements.

See APPENDIX 3 for the test data.

e) Maximum Peak Conducted Output Power

The BlackBerry® smartphone met the requirements of the maximum peak conducted output power as per 47 CFR 15.247(b) and RSS-210. Low channel (0), middle channel (39) and high channel (78) were measured. The result includes both normal data rate and EDR.

See APPENDIX 3 for the test data.

f) Band-Edge Compliance of RF Conducted Emissions

The BlackBerry® smartphone met the requirements of the band-edge compliance of RF conducted emissions as per 47 CFR 15.247(c) and RSS-210. Channels 0 and 78 were measured in frequency hopping (Euro/US) mode and single frequency mode.

The result includes both normal data rate and EDR.

See APPENDIX 3 for the test data.

 EMI Test Report for the BlackBerry® smartphone Model RCX71UW		
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

g) Spurious RF Conducted Emissions

The BlackBerry® smartphone met the requirements of the spurious RF conducted emissions as per 47 CFR 15.247(c) and RSS-210. The frequency range measured was 10 MHz to 26 GHz. Low channel (0), middle channel (39) and high channel (78) were measured in single frequency mode and frequency hopping (Euro/US) mode. The result includes both normal data rate and EDR. See APPENDIX 3 for the test data.

4) 802.11b/g/n RF CONDUCTED EMISSIONS

The 802.11b/g/n conducted RF emissions from the BlackBerry® smartphone were measured using the methods outlined in FCC CFR 47 Part 15, Subpart C.

a) 6dB Bandwidth

The EUT met the requirements of the 6 dB bandwidth as per 47 CFR 15.247(b) and RSS-210. Low channel (1), middle channel (6) and high channel (11) were measured. See APPENDIX 4 for the test data.

b) Maximum Conducted Output Power

The EUT met the requirements of the maximum conducted output power as per 47 CFR 15.247(b) and RSS-210. Low channel (1), middle channel (6) and high channel (11) were measured. See APPENDIX 4 for the test data.

c) Band-Edge Compliance of RF Conducted Emissions

The EUT met the requirements of band-edge compliance of RF conducted emissions as per 47 CFR 15.247(b) and RSS-210. Low channel (1) and high channel (11) were measured. See APPENDIX 4 for the test data.

d) Peak Power Spectral Density

The EUT met the requirements of peak power spectral density as per 47 CFR 15.247(b) and RSS-210. Low channel (1), middle channel (6) and high channel (11) were measured. See APPENDIX 4 for the test data.

e) Spurious RF Conducted Emissions

The EUT met the requirements of the spurious RF conducted emissions as per 47 CFR 15.247(c) and RSS-210. The frequency range measured was 30 MHz to 26 GHz. Low channel (1), middle channel (6) and high channel (11) were measured. See APPENDIX 4 for the test data.

 EMI Test Report for the BlackBerry® smartphone Model RCX71UW		
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

G. Compliance Test Equipment Used

<u>UNIT</u>	<u>MANUFACTURER</u>	<u>MODEL</u>	<u>SERIAL NUMBER</u>	<u>CAL DUE DATE (YY MM DD)</u>	<u>USE</u>
EMI Test Receiver	Rohde & Schwarz	ESIB 40	100255	10-12-01	Conducted/Radiated Emissions
EMI Test Receiver	Rohde & Schwarz	ESU 40	100162	10-04-22	Conducted/Radiated Emissions
Hybrid Log Antenna	EMC Automation	HLP-3003C	017401	10-09-26	Radiated Emissions
Horn Antenna	CMT	LHA 0180	R52734-001	12-01-21	Radiated Emissions
Horn Antenna	ETS-Lindgren	3117	47563	11-07-15	Radiated Emissions
Preamplifier	Rohde & Schwarz	TS-ANA4-SP	001	11-02-17	Radiated Emissions
Preamplifier	Sonoma	310N/11909A	185831	10-11-14	Radiated Emissions
Preamplifier	Rohde & Schwarz	TS-ANA-SP	001	11-02-19	Radiated Emissions
L.I.S.N.	Rohde & Schwarz	ENV216	100060	10-04-21	Conducted Emissions
Environment Monitor	Control Company	1870	230355190	11-01-08	Radiated Emissions
EMC Analyzer	Agilent	E7405A	US40240226	10-12-10	Radiated Emissions
Spectrum Analyzer	HP	8563E	3745A08112	11-09-30	RF Conducted Emissions
DC Power Supply	HP	6632B	US37472178	10-09-03	RF Conducted Emissions
Environment Monitor	Control Company	1870	80117164	11-01-08	RF Conducted Emissions
Temperature Probe	Control Company	15-077-21	51129471	10-05-01	Frequency Stability
Environmental Chamber	ESPEC Corp.	SH-240S1	91005607	N/R	Frequency Stability
Bluetooth Tester	Rohde & Schwarz	CBT	100034	10-11-10	RF Conducted Emissions
Bluetooth Tester	Rohde & Schwarz	CBT35	100368	10-11-25	Radiated Emissions
Bluetooth Tester	Rohde & Schwarz	CBT35	100370	10-11-26	Radiated Emissions
Power Meter	Agilent	N1911A	MY45100905	11-01-05	RF Conducted / Frequency Stability
Power Sensor	Agilent	N1921A	SG45240281	10-05-08	RF Conducted / Frequency Stability
Digital Multimeter	Hewlett Packard	34401A	US36042324	10-10-08	Conducted/Radiated Emissions
Environment Monitor	Control Company	1870	230355159	11-01-08	Radiated Emissions

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 1	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22 2010	Author Data Michael Cino

APPENDIX 1 – AC CONDUCTED EMISSIONS TEST DATA/PLOTS

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 1	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22 2010	Author Data Michael Cino

AC Conducted Emission Test Results

Test Configuration 1

The BlackBerry® smartphone was tested on February 02, 2010.

The environmental test conditions were: Temperature: 26 °C
Pressure: 1017 mb
Relative Humidity: 24 %

Frequency (MHz)	Line	Reading (QP) (dBμV)	Correction Factor (dB)	Corrected Reading (QP) (dB)	Limit (QP) (dBμV)	Limit (AV) (dBμV)	Margin (QP) Limits (dB)
0.155	L1	33.02	11.17	44.19	65.75	55.75	-21.56
0.159	N	33.74	11.17	44.91	65.52	55.52	-20.61
0.398	L1	32.13	10.01	42.14	57.91	47.91	-15.77
0.416	N	24.48	10.00	34.48	57.54	47.54	-23.06
0.474	L1	32.67	9.92	42.59	56.44	46.44	-13.85
0.677	L1	32.90	9.84	42.74	56.00	46.00	-13.26
0.681	N	29.17	9.84	39.01	56.00	46.00	-16.99
1.001	L1	32.59	9.80	42.39	56.00	46.00	-13.61
1.068	N	30.19	9.81	40.00	56.00	46.00	-16.00
1.230	N	30.16	9.80	39.96	56.00	46.00	-16.04
1.235	L1	33.27	9.80	43.07	56.00	46.00	-12.93
1.338	N	28.61	9.81	38.42	56.00	46.00	-17.58
1.428	L1	28.87	9.80	38.67	56.00	46.00	-17.33
1.856	N	32.52	9.82	42.35	56.00	46.00	-13.65
2.126	L1	36.80	9.83	46.63	56.00	46.00	-9.37
3.044	N	23.95	9.88	33.83	56.00	46.00	-22.17
3.395	L1	27.95	9.89	37.83	56.00	46.00	-18.17
3.651	N	21.23	9.90	31.12	56.00	46.00	-24.88
4.043	L1	26.58	9.90	36.48	56.00	46.00	-19.52

All other emission levels had a test margin of greater than 25 dB.

Measurements were done with the quasi-peak detector. See figure 1-1 and figure 1-2 for the measurement plot of the L1 and N lines of AC power line conducted emissions.

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 1	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22 2010	Author Data Michael Cino

AC Conducted Emissions Test Graphs

Test Configuration 1

Figure 1-1: L1 lines


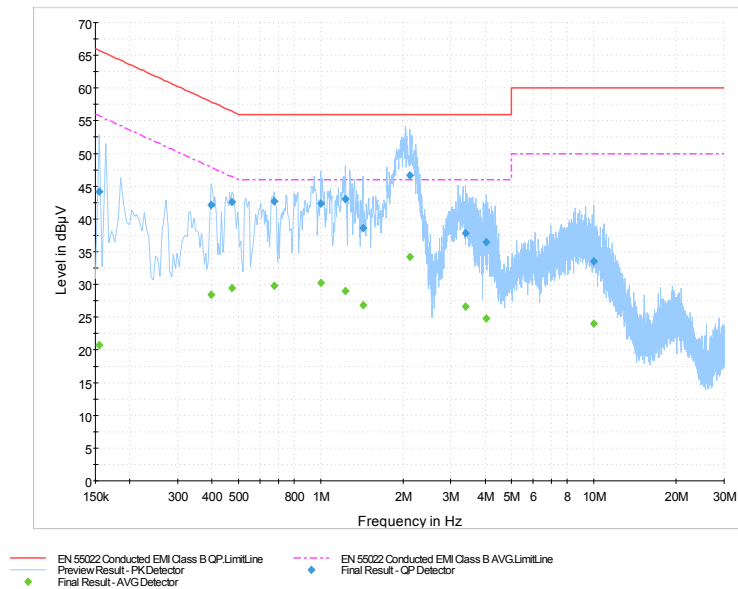


Figure 1-2: N Lines

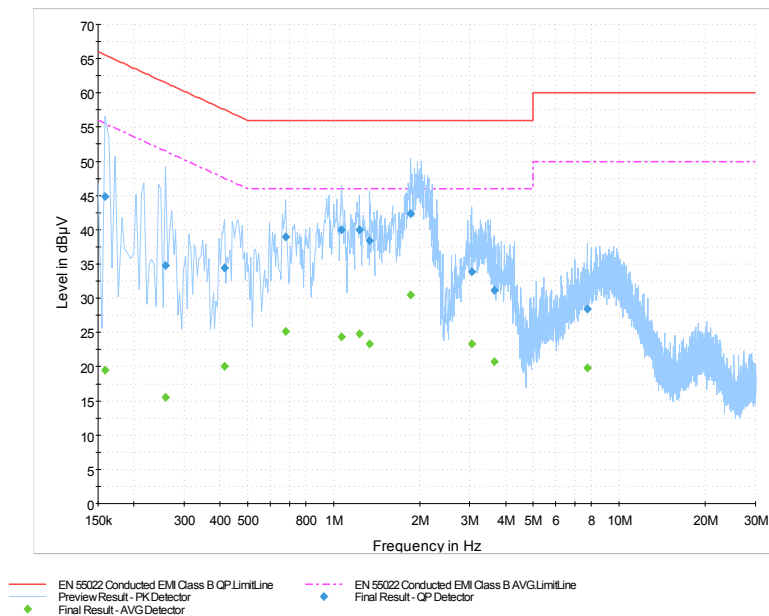

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 1	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22 2010	Author Data Michael Cino

AC Conducted Emission Test Results

Test Configuration 2

The BlackBerry® smartphone was tested on February 01, 2010.

The environmental test conditions were: Temperature: 26 °C
Pressure: 1023 mb
Relative Humidity: 24 %

Frequency (MHz)	Line	Reading (QP) (dBμV)	Correction Factor (dB)	Corrected Reading (QP) (dB)	Limit (QP) (dBμV)	Limit (AV) (dBμV)	Margin (QP) Limits (dB)
0.150	N	46.55	11.23	57.79	66.00	56.00	-8.21
0.155	L1	43.00	11.17	54.17	65.75	55.75	-11.58
0.164	N	45.22	11.14	56.36	65.28	55.28	-8.92
0.168	L1	41.79	11.08	52.87	65.06	55.06	-12.19
0.177	L1	40.73	11.02	51.75	64.63	54.63	-12.88
0.177	N	44.36	11.05	55.40	64.63	54.63	-9.22
0.186	N	43.84	10.98	54.82	64.21	54.21	-9.40
0.195	N	42.67	10.92	53.59	63.82	53.82	-10.23
0.209	L1	39.25	10.80	50.05	63.26	53.26	-13.22
0.240	L1	37.13	10.58	47.70	62.10	52.10	-14.39
0.254	L1	36.64	10.48	47.12	61.64	51.64	-14.52
0.294	L1	33.73	10.20	43.93	60.41	50.41	-16.48
0.303	N	36.66	10.17	46.83	60.16	50.16	-13.33
0.348	L1	31.20	10.09	41.29	59.01	49.01	-17.72
0.501	N	28.40	9.92	38.32	56.00	46.00	-17.68
0.515	L1	24.16	9.90	34.07	56.00	46.00	-21.93
0.609	L1	22.58	9.85	32.44	56.00	46.00	-23.56
9.771	L1	25.43	9.97	35.40	60.00	50.00	-24.60

All other emission levels had a test margin of greater than 25 dB.

Measurements were done with the quasi-peak detector.

See figure 1-3 and figure 1-4 for the measurement plot of the L1 and N lines of AC power line conducted emissions.

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 1	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22 2010	Author Data Michael Cino

AC Conducted Emissions Test Graphs

Test Configuration 2

Figure 1-3: L1 lines


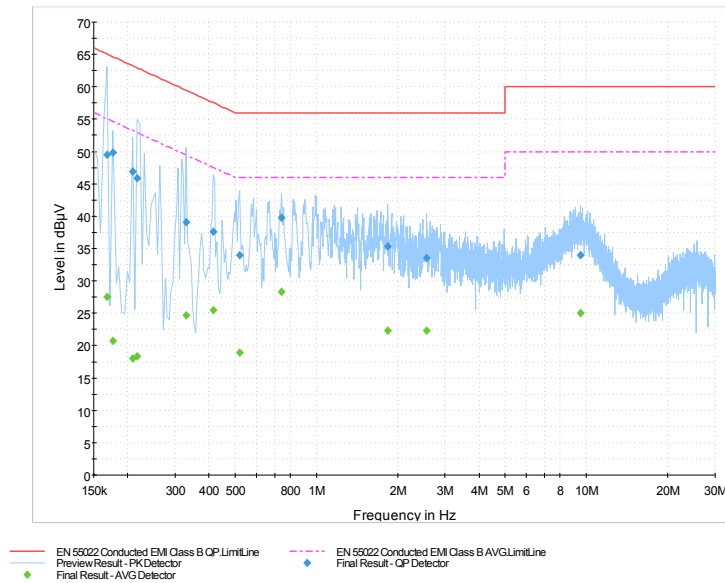


Figure 1-4: N Lines

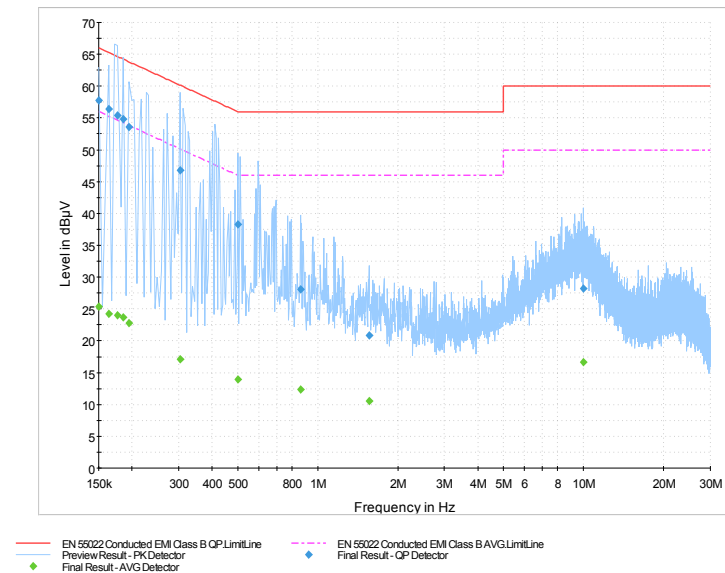

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 2	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

APPENDIX 2 – BLUETOOTH AND 802.11b/g/n RADIATED EMISSIONS TEST DATA

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 2	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

Radiated Emissions Test Results
Bluetooth Band

Date of Test: January 29, 2010
Measurements were performed by Fahd Faisal.

The environmental test conditions were: Temperature: 26 °C
Pressure: 1011 mb
Relative Humidity: 21 %

The test distance was 3.0 metres with a EUT height of 0.8 metres, sweep frequency of 30 MHz to 1 GHz.

The BlackBerry® smartphone in Bluetooth Tx mode was in vertical, upside down position.

The frequency sweep measurements were performed in single frequency mode on channels 0, 39 and 78 using packet types "DH5", "2-DH5" and "3-DH5".

All emissions had a test margin of greater than 25.0 dB.

Date of Test: January 27 to February 22, 2010
Measurements were performed by Heng Lin.

The environmental test conditions were: Temperature: 23 – 26 °C
Pressure: 1008 – 1028 mb
Relative Humidity: 23 – 32 %

The measurements were performed in single frequency Tx mode using packet types "DH5", "2-DH5" and "3-DH5" on channels 0, 39 and 78. The BlackBerry® smartphone was in standalone, USB down position.

The test distance was 3.0 metres with a height of 0.8 metres, 1GHz to 25GHz.

		EMI Test Report for the BlackBerry® smartphone Model RCX71UW	
		APPENDIX 2	
Test Report No. RTS-2474-1001-38		Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

Frequency (MHz)	Channel	Packet Type	Antenna		Test Angle (Deg.)	RBW / VBW	Measured Level (dBμV)	Correction Factor for preamp/antenna/ cables/ filter (dB)	Field Strength Level (reading+corr) (dBμV/m)	Limit @ 3.0 m (dBμV/m)	Test Margin (dB)
			Pol. (V/H)	Height (metres)							
4804.311	0	DH5	V	3.21	224.00	1 MHz / 1 MHz	41.82	18.11	59.93	74.00	-14.07
4804.006	0	DH5	H	3.00	291.00	1 MHz / 10 Hz	28.30	18.11	46.41	54.00	-7.59
3202.628	0	3DH5	V	4.00	178.00	1 MHz / 1 MHz	46.49	12.54	59.03	74.00	-14.97
4882.468	39	DH5	V	2.23	278.00	1 MHz / 1 MHz	37.61	18.53	56.14	74.00	-17.86
4882.035	39	DH5	V	2.23	278.00	1 MHz / 10 Hz	27.18	18.53	45.71	54.00	-8.29
7323.494	39	DH5	H	2.00	210.00	1MHz / 1MHz	46.78	15.50	62.28	74.00	-11.72
12205.817	39	DH5	V	1.91	177.00	1 MHz / 1 MHz	35.72	24.63	60.34	74.00	-13.66
7323.494	39	DH5	H	2.00	210.00	1 MHz / 10 Hz	25.64	15.50	41.14	54.00	-12.86
12205.817	39	DH5	V	1.91	177.00	1 MHz / 10 Hz	24.56	24.63	49.19	54.00	-4.81
2388.442	39	3DH5	V	4.00	178.00	1 MHz / 1 MHz	50.34	8.59	58.93	74.00	-15.07
2388.442	39	3DH5	V	4.00	178.00	1 MHz / 10 Hz	27.61	8.59	36.20	54.00	-17.80
4960.064	78	DH5	H	3.14	228.00	1 MHz / 1 MHz	35.68	19.51	55.19	74.00	-18.81
4960.064	78	DH5	H	3.14	228.00	1 MHz / 10 Hz	27.31	19.51	46.82	54.00	-7.18
2369.740	78	2DH5	V	3.48	56.00	1 MHz / 1 MHz	44.51	8.72	53.23	74.00	-20.77
2369.740	78	2DH5	V	3.48	56.00	1 MHz / 10 Hz	27.53	8.72	36.25	54.00	-17.75
2388.506	78	3DH5	V	4.00	158.00	1 MHz / 1 MHz	50.77	8.59	59.36	74.00	-14.64

		EMI Test Report for the BlackBerry® smartphone Model RCX71UW	
		APPENDIX 2	
Test Report No. RTS-2474-1001-38		Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

Frequency (MHz)	Channel	Packet Type	Antenna		Test Angle (Deg.)	RBW / VBW	Measured Level (dBμV)	Correction Factor for preamp/antenna/ cables/ filter (dB)	Field Strength Level (reading+corr) (dBμV/m)	Limit @ 3.0 m (dBμV/m)	Test Margin (dB)
			Pol. (V/H)	Height (metres)							
7205.753	0	DH5	H	2.00	150.00	1 MHz / 1 MHz	46.35	15.88	62.23	74.00	-11.77
7205.753	0	DH5	H	2.00	150.00	1 MHz / 10 Hz	28.58	15.88	44.46	54.00	-9.54
7205.994	0	3DH5	H	1.95	143.00	1 MHz / 1 MHz	43.51	15.88	59.40	74.00	-14.61
7205.994	0	3DH5	H	1.95	143.00	1 MHz / 10 Hz	26.91	15.88	42.79	54.00	-11.21
7322.644	39	2DH5	H	2.35	150.00	1 MHz / 1 MHz	42.55	15.51	58.06	74.00	-15.94
7322.644	39	2DH5	H	2.35	150.00	1 MHz / 10 Hz	29.63	15.51	45.14	54.00	-8.86
19526.891	39	2DH5	H	1.00	116.00	1 MHz / 1 MHz	38.00	15.70	53.69	74.00	-20.31
19526.891	39	2DH5	H	1.00	116.00	1 MHz / 10 Hz	27.35	15.70	43.05	54.00	-10.95
7323.205	39	3DH5	H	1.89	137.00	1 MHz / 1 MHz	41.87	15.50	57.38	74.00	-16.62
7323.205	39	3DH5	H	1.89	137.00	1 MHz / 10 Hz	26.22	15.50	41.72	54.00	-12.28
19528.830	39	3DH5	H	3.13	110.00	1 MHz / 1 MHz	38.83	15.69	54.53	74.00	-19.48
19528.830	39	3DH5	H	3.13	110.00	1 MHz / 10 Hz	29.73	15.69	45.42	54.00	-8.58
19841.554	78	DH5	H	1.00	124.00	1 MHz / 1 MHz	41.65	15.96	57.61	74.00	-16.39
19841.554	78	DH5	H	1.00	124.00	1 MHz / 10 Hz	25.80	15.96	41.76	54.00	-12.24
7439.503	78	2DH5	H	2.51	151.00	1 MHz / 1 MHz	44.54	15.71	60.24	74.00	-13.76
12399.103	78	2DH5	V	1.61	84.00	1 MHz / 1 MHz	35.27	23.82	59.10	74.00	-14.90
7439.503	78	2DH5	H	2.51	151.00	1 MHz / 10 Hz	30.52	15.71	46.23	54.00	-7.77
12399.103	78	2DH5	V	1.61	84.00	1 MHz / 10 Hz	25.73	23.82	49.55	54.00	-4.45
19838.622	78	2DH5	H	1.24	250.00	1 MHz / 1 MHz	40.60	15.95	56.56	74.00	-17.44
19838.622	78	2DH5	H	1.24	250.00	1 MHz / 10 Hz	27.15	15.95	43.10	54.00	-10.90
7439.984	78	3DH5	H	2.17	152.00	1 MHz / 1 MHz	45.96	15.71	61.67	74.00	-12.33

This report shall NOT be reproduced except in full without the written consent of RIM Testing Services
- A division of Research in Motion Limited.

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 2	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

7439.984	78	3DH5	H	2.17	152.00	AV	27.02	15.71	42.73	54.00	-11.27
19840.016	78	3DH5	H	1.77	177.00	1 MHz / 1 MHz	36.59	15.95	52.55	74.00	-21.45
19840.016	78	3DH5	H	1.77	177.00	1 MHz / 10 Hz	25.80	15.95	41.75	54.00	-12.25

All other emissions had a test margin of greater than 25.0 dB.

		EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 2		
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010			Author Data Michael Cino

Band-Edge Compliance of RF Radiated Emissions Test Results
Bluetooth Band

Date of test: February 18, 2010

Measurements were performed by Kevin Rose.

The environmental test conditions were: Temperature: 25 ° C
Pressure: 1013 mb
Relative Humidity: 23 %

The BlackBerry® smartphone was in standalone, vertical, Pattern type “Static PBRs” in “DH5”, “2-DH5” and “3-DH5” modulation during the measurements.

The test distance was 3.0 metres.

Channel	Freq. (MHz)	Rx Antenna		Detector	VBW	Corrected Reading	Delta Marker	Corrected Band edge	Limit	Diff. To Limit
		Type	POL.	(PK, AVE.)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
Low Channel, Packet Type DH5										
0	2402	Horn	V	PK	1 MHz	103.06	54.05	49.01	74	-24.99
0	2402	Horn	H	PK	1 MHz	97.31	47.78	49.53	74	-24.47
0	2402	Horn	V	AVE.	10 Hz	66.57	54.05	12.52	54	-41.48
0	2402	Horn	H	AVE.	10 Hz	63.73	47.78	15.95	54	-38.05
High Channel, Packet Type DH5										
78	2480	Horn	V	PK	1 MHz	104.47	55.12	49.35	74	-24.65
78	2480	Horn	H	PK	1 MHz	100.99	52.75	48.24	74	-25.76
78	2480	Horn	V	AVE.	10 Hz	70.17	55.12	15.05	54	-38.95
78	2480	Horn	H	AVE.	10 Hz	69.12	52.75	16.37	54	-37.63
Low Channel, Packet Type 2-DH5										
0	2402	Horn	V	PK	1 MHz	102.48	52.7	49.78	74	-24.22
0	2402	Horn	H	PK	1 MHz	96.69	47.16	49.53	74	-24.47
0	2402	Horn	V	AVE.	10 Hz	66.41	52.7	13.71	54	-40.29
0	2402	Horn	H	AVE.	10 Hz	63.39	47.16	16.23	54	-37.77
High Channel, Packet Type 2-DH5										
78	2480	Horn	V	PK	1 MHz	103.79	52.67	51.12	74	-22.88
78	2480	Horn	H	PK	1 MHz	100.49	49.19	51.3	74	-22.70
78	2480	Horn	V	AVE.	10 Hz	69.72	52.67	17.05	54	-36.95
78	2480	Horn	H	AVE.	10 Hz	68.9	49.19	19.71	54	-34.29

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 2	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

Band-Edge Compliance of RF Radiated Emissions Test Results cont'd
Bluetooth Band

Channel	Freq. (MHz)	Rx Antenna		Detector (PK, AVE.)	VBW (MHz)	Corrected Reading (dBuV/m)	Delta Marker (dB)	Corrected Band edge (dBuV/m)	Limit (dBuV/m)	Diff. To Limit (dB)
		Type	POL.							
Low Channel, Packet Type 3-DH5										
0	2402	Horn	V	PK	1 MHz	102.71	52.93	49.78	74	-24.22
0	2402	Horn	H	PK	1 MHz	96.96	46.26	50.7	74	-23.30
0	2402	Horn	V	AVE.	10 Hz	66.44	52.93	13.51	54	-40.49
0	2402	Horn	H	AVE.	10 Hz	63.49	46.26	17.23	54	-36.77
High Channel, Packet Type 3-DH5										
78	2480	Horn	V	PK	1 MHz	104.32	52.13	52.19	74	-21.81
78	2480	Horn	H	PK	1 MHz	100.69	48.71	51.98	74	-22.02
78	2480	Horn	V	AVE.	10 Hz	69.75	52.13	17.62	54	-36.38
78	2480	Horn	H	AVE.	10 Hz	68.85	48.71	20.14	54	-33.86

See figures 2-1 to 2-12 for the plots of the Bluetooth band-edge compliance.

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 2	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

Bluetooth Band-Edge Compliance of RF Radiated Emissions cont'd

Figure 2-1: Band-Edge Compliance of RF Rad. Emissions.
Bluetooth, Single freq., Static PBRs,
DH5, Channel 0, Pol: V, Detector: PK

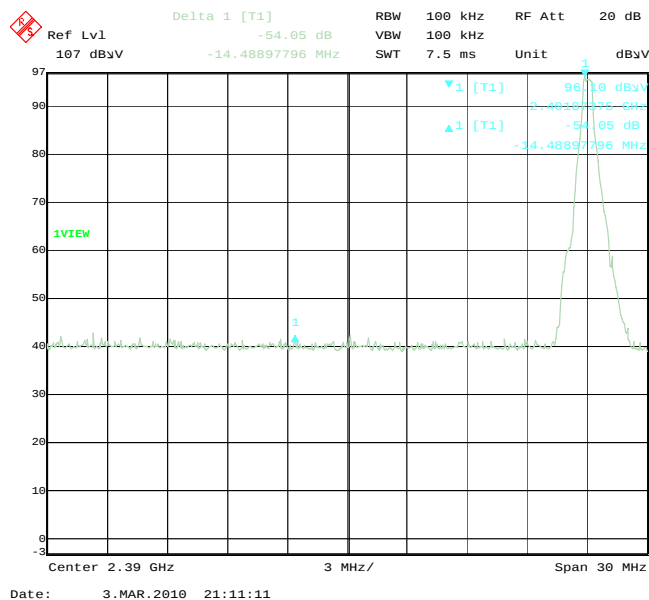


Figure 2-2: Band-Edge Compliance of RF Rad. Emissions.
Bluetooth, Single freq., Static PBRs,
DH5, Channel 0, Pol: H, Detector: PK

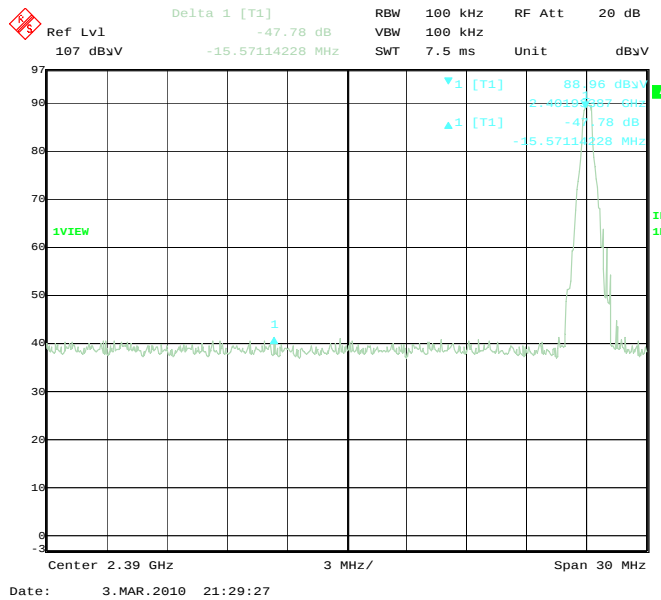


Figure 2-3: Band-Edge Compliance of RF Rad. Emissions.
Bluetooth, Single freq., Static PBRs,
DH5, Channel 78, Pol: V, Detector: PK


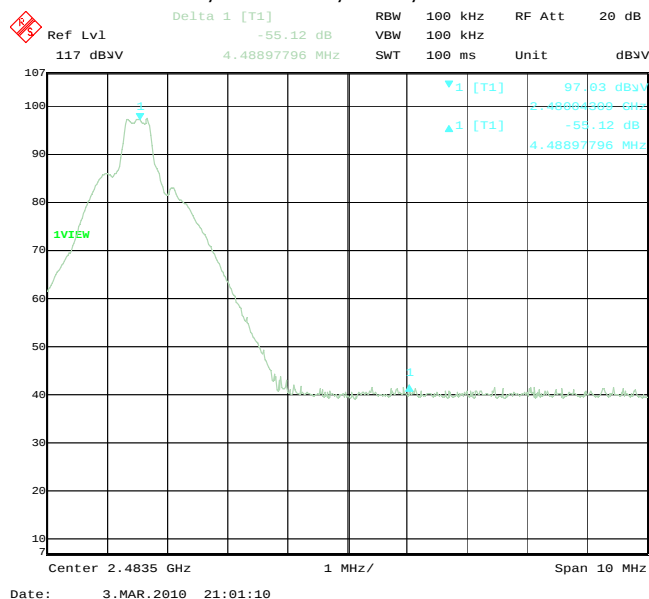



Figure 2-4: Band-Edge Compliance of RF Rad. Emissions
Bluetooth, Single freq., Static PBRs,
DH5, Channel 78, Pol: H, Detector: PK

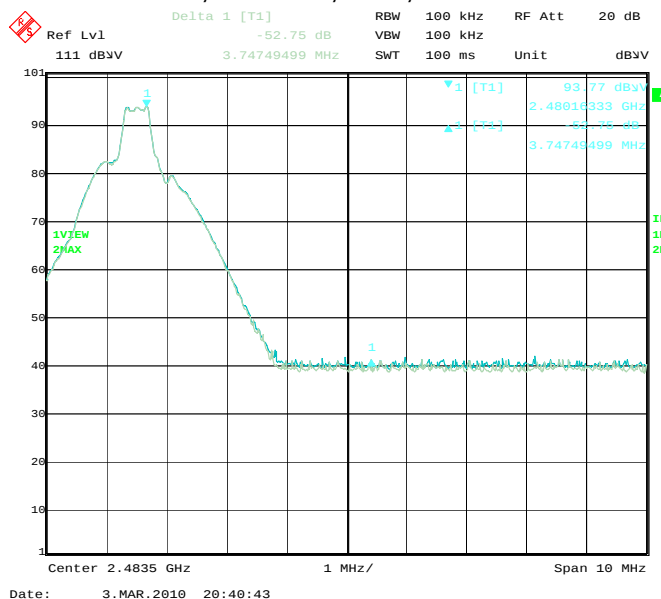

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 2	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino


Bluetooth Band-Edge Compliance of RF Radiated Emissions cont'd

Figure 2-5: Band-Edge Compliance of RF Rad. Emissions.
Bluetooth, Single freq., Static PBRS,
2-DH5, Channel 0, Pol: V, Detector: PK

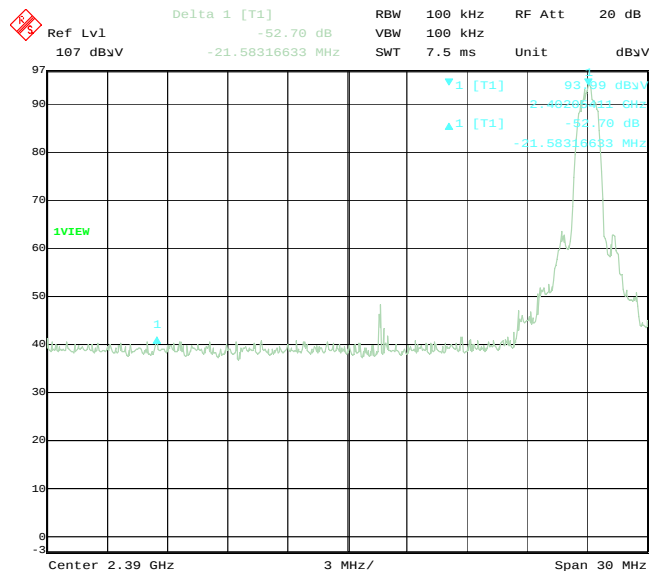


Date: 3.MAR.2010 21:12:37

Figure 2-6: Band-Edge Compliance of RF Rad. Emissions.
Bluetooth, Single freq., Static PBRS,
2-DH5, Channel 0, Pol: H, Detector: PK

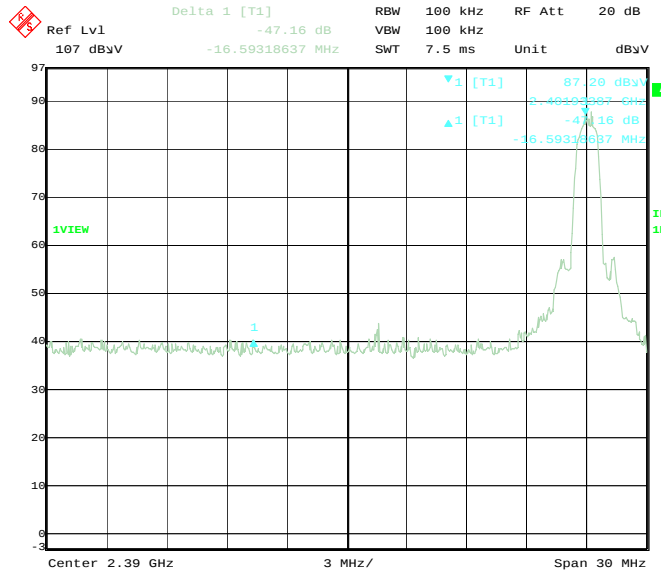


Date: 3.MAR.2010 21:28:11

Figure 2-7: Band-Edge Compliance of RF Rad. Emissions.
Bluetooth, Single freq., Static PBRS,
2-DH5, Channel 78, Pol: V, Detector: PK

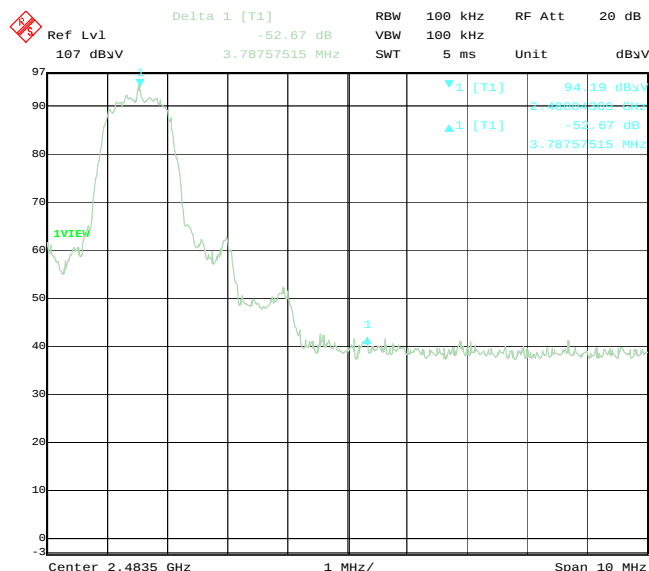

Date: 3.MAR.2010 20:58:46

Figure 2-8: Band-Edge Compliance of RF Rad. Emissions.
Bluetooth, Single freq., Static PBRS,
2-DH5, Channel 78, Pol: H, Detector: PK

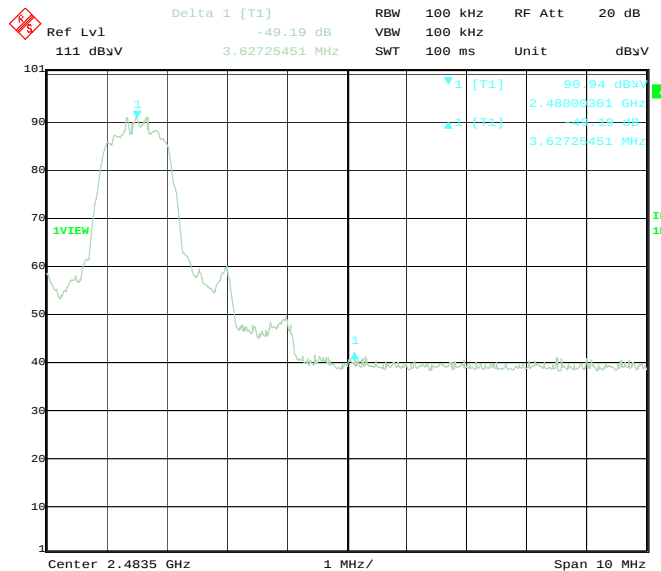

Date: 3.MAR.2010 20:44:54

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 2	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

Bluetooth Band-Edge Compliance of RF Radiated Emissions cont'd

Figure 2-9: Band-Edge Compliance of RF Rad. Emissions.
Bluetooth, Single freq., Static PBRS,
3-DH5, Channel 0, Pol: V, Detector: PK

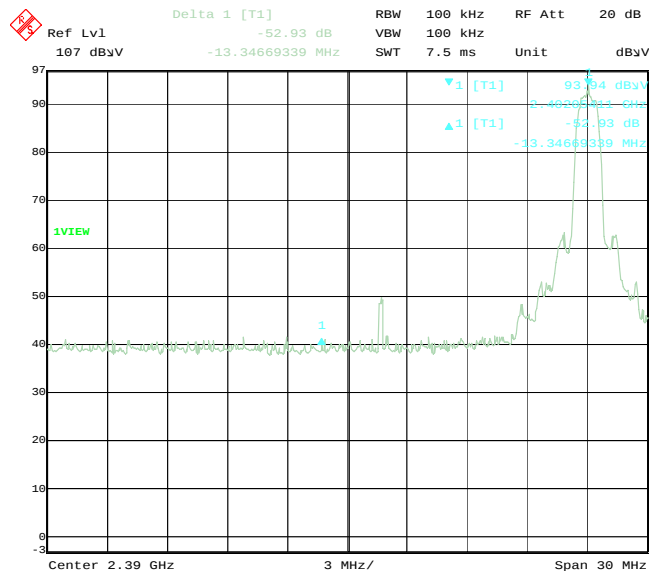


Figure 2-10: Band-Edge Compliance of RF Rad. Emissions.
Bluetooth, Single freq., Static PBRS,
3-DH5, Channel 0, Pol: H, Detector: PK

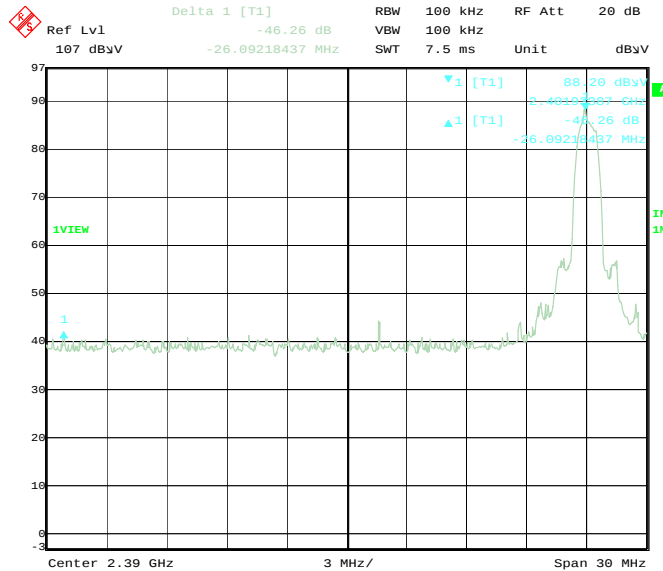


Figure 2-11: Band-Edge Compliance of RF Rad. Emissions.
Bluetooth, Single freq., Static PBRS,
3-DH5, Channel 78, Pol: V, Detector: PK


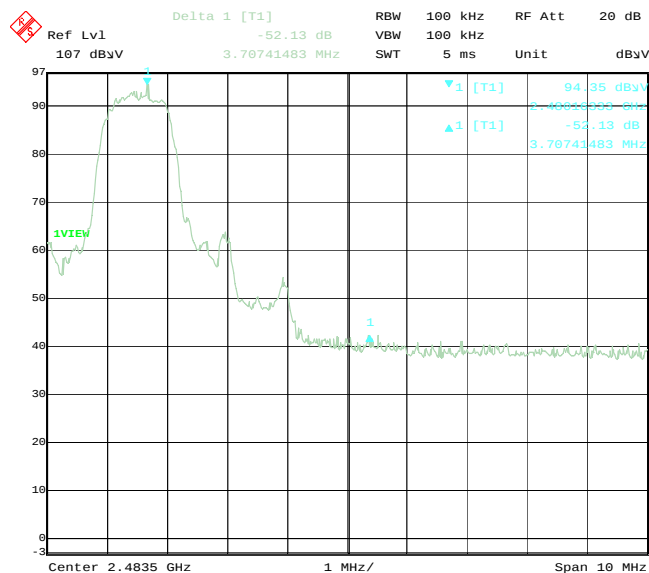


Figure 2-12: Band-Edge Compliance of RF Rad. Emissions.
Bluetooth, Single freq., Static PBRS,
3-DH5, Channel 78, Pol: H, Detector: PK

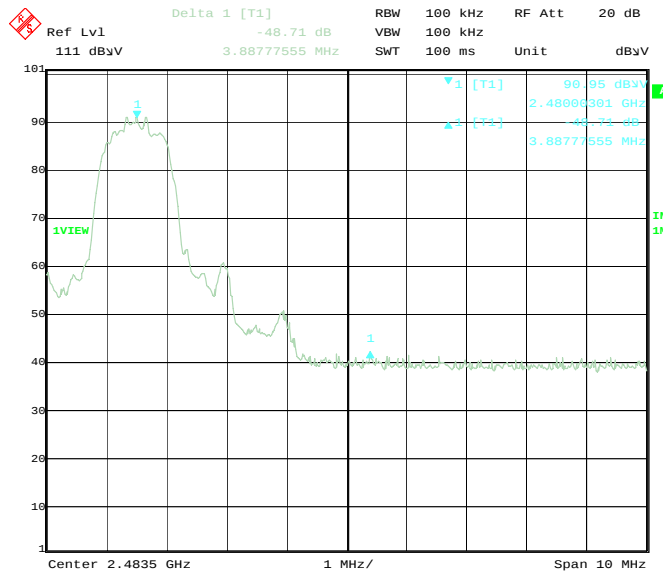

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 2	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

Radiated Emissions Test Results cont'd
802.11b/g/n Band

Date of Test: February 18 and March 23, 2009
Measurements were performed by Fahd Faisal.

The environmental test conditions were: Temperature: 21 – 25 °C
Pressure: 1010 – 1013 mb
Relative Humidity: 23 – 24 %

The test distance was 3.0 metres with a height of 0.8 metres, 30 MHz to 1000 MHz.
The BlackBerry® smartphone was in standalone, vertical position.

The frequency sweep measurements were performed in 802.11b Tx mode at 1 Mbps on channels 1, 6 and 11, in 802.11g Tx mode at 6 Mbps on channel 6, and in 802.11n Tx mode at MCS 0 and MCS7 on channels 1, 6, and 11.
All emissions had a test margin greater than 25.0 dB.

Date of Test: March 08 and March 23 to 24 & April 20-22, 2010
Measurements were performed by Heng Lin.

The environmental test conditions were: Temperature: 24 – 25 °C
Pressure: 1015 – 1017 mb
Relative Humidity: 27 – 30 %

The test distance was 1.0 metres with a height of 0.8 metres, 1GHz to 25GHz.
The BlackBerry® smartphone was in standalone, vertical position.

The frequency sweep measurements were performed in 802.11b Tx mode at 1 Mbps on channels 1, 6 and 11, in 802.11g Tx mode at 6 Mbps on channel 6, and in 802.11n Tx mode at MCS 0 and MCS 7 on channels 1, 6, and 11 as well.

Frequency (MHz)	Channel	Mbps	Antenna		Test Angle (Deg.)	RBW / VBW	Measured Level (dBµV)	Correction Factor for preamp/antenna/ cables/ filter (dB)	Field Strength Level (reading+corr) (dBµV/m)	Limit @ 3.0 m (dBµV/m)	Test Margin (dB)
			Pol. (V/H)	Height (metres)							
2359.091	6	6	H	4.00	184.00	1 MHz / 1 MHz	45.26	8.75	54.01	74.00	-19.99
2398.377	6	6	H	3.88	188.00	1 MHz / 1 MHz	44.31	8.54	52.85	74.00	-21.15
2359.091	6	6	H	4.00	184.00	1 MHz / 10 Hz	29.06	8.75	37.81	54.00	-16.19
2398.377	6	6	H	3.88	188.00	1 MHz / 10 Hz	32.05	8.54	40.59	54.00	-13.41

All other emissions, including harmonics, had a test margin greater than 25.0 dB.

		EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 2	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010		Author Data Michael Cino

802.11b/g/n Band-Edge Compliance of RF Radiated Emissions

Date of Tests: March 22, 2010

Measurements performed by Kevin Rose.

The environmental test conditions were: Temperature: 25 °C
Pressure: 1013 mb
Relative Humidity: 23 %

802.11b Band

The measurements were performed on BlackBerry® smartphone in standalone, vertical configuration on channels 1 and 11 for 802.11b mode at 1 Mbps.

The test distance was 3 metres.

Channel	Freq. (MHz)	Rx Antenna		Detector (MHz)	VBW For Peak (dBuV/m)	Peak Corrected Reading (dBuV/m)	Delta Marker (dB)	Corrected Band edge (dBuV/m)	Limit (dBuV/m)	Diff. To Limit (dB)
		Type	POL.							
1.0	2412.00	Horn	V	PK	1 MHz	53.18	0.00	53.18	74.00	-20.82
1.0	2412.00	Horn	H	PK	1 MHz	57.19	0.00	57.19	74.00	-16.81
1.0	2412.00	Horn	V	AV	10 Hz	45.23	0.00	45.23	54.00	-8.77
1.0	2412.00	Horn	H	AV	10 Hz	49.96	0.00	49.96	54.00	-4.04

Channel	Freq. (MHz)	Rx Antenna		Detector (MHz)	VBW For Peak (dBuV/m)	Peak Corrected Reading (dBuV/m)	Delta Marker (dB)	Corrected Band edge (dBuV/m)	Limit (dBuV/m)	Diff. To Limit (dB)
		Type	POL.							
11.0	2480.00	Horn	V	PK	1 MHz	100.60	50.17	50.43	74.00	-23.57
11.0	2480.00	Horn	H	PK	1 MHz	104.36	50.70	53.66	74.00	-20.34
11.0	2480.00	Horn	V	AV	10 Hz	96.49	50.17	46.32	54.00	-7.68
11.0	2480.00	Horn	H	AV	10 Hz	100.28	50.70	49.58	54.00	-4.42

		EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 2	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010		Author Data Michael Cino

802.11g Band

The measurements were performed on the BlackBerry® smartphone in standalone, vertical configuration on channels 1 and 11 for 802.11g mode at 6 Mbps.

The test distance was 3 metres.

Channel	Freq. (MHz)	Rx Antenna		Detector (MHz)	VBW For Peak (dBuV/m)	Peak Corrected Reading (dBuV/m)	Delta Marker (dB)	Corrected Band edge (dBuV/m)	Limit (dBuV/m)	Diff. To Limit (dB)
		Type	POL.							
1.0	2412.00	Horn	V	PK	1 MHz	64.74	0.00	64.74	74.00	-9.26
1.0	2412.00	Horn	H	PK	1 MHz	66.94	0.00	66.94	74.00	-7.06
1.0	2412.00	Horn	V	AV	10 Hz	49.84	0.00	49.84	54.00	-4.16
1.0	2412.00	Horn	H	AV	10 Hz	51.16	0.00	51.16	54.00	-2.84

Channel	Freq. (MHz)	Rx Antenna		Detector (MHz)	VBW For Peak (dBuV/m)	Peak Corrected Reading (dBuV/m)	Delta Marker (dB)	Corrected Band edge (dBuV/m)	Limit (dBuV/m)	Diff. To Limit (dB)
		Type	POL.							
11.0	2480.00	Horn	V	PK	1 MHz	97.94	42.60	55.34	74.00	-18.66
11.0	2480.00	Horn	H	PK	1 MHz	104.68	43.77	60.91	74.00	-13.09
11.0	2480.00	Horn	V	AV	10 Hz	84.53	42.60	41.93	54.00	-12.07
11.0	2480.00	Horn	H	AV	10 Hz	91.22	43.77	47.45	54.00	-6.55

		EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 2	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010		Author Data Michael Cino

802.11n Band

The measurements were performed on the BlackBerry® smartphone in standalone, vertical configuration on channels 1 and 11 for 802.11n mode at MCS 0.

The test distance was 3 metres.

Channel	Freq. (MHz)	Rx Antenna		Detector (MHz)	VBW For Peak (dBuV/m)	Peak Corrected Reading (dBuV/m)	Delta Marker (dB)	Corrected Band edge (dBuV/m)	Limit (dBuV/m)	Diff. To Limit (dB)
		Type	POL.							
1.0	2412.00	Horn	V	PK	1 MHz	64.89	0.00	64.89	74.00	-9.11
1.0	2412.00	Horn	H	PK	1 MHz	69.91	0.00	69.91	74.00	-4.09
1.0	2412.00	Horn	V	AV	10 Hz	46.20	0.00	46.20	54.00	-7.80
1.0	2412.00	Horn	H	AV	10 Hz	52.42	0.00	52.42	54.00	-1.58

Channel	Freq. (MHz)	Rx Antenna		Detector (MHz)	VBW For Peak (dBuV/m)	Peak Corrected Reading (dBuV/m)	Delta Marker (dB)	Corrected Band edge (dBuV/m)	Limit (dBuV/m)	Diff. To Limit (dB)
		Type	POL.							
11.0	2480.00	Horn	V	PK	1 MHz	101.70	42.31	59.39	74.00	-14.61
11.0	2480.00	Horn	H	PK	1 MHz	105.26	43.67	61.59	74.00	-12.41
11.0	2480.00	Horn	V	AV	10 Hz	87.88	42.31	45.57	54.00	-8.43
11.0	2480.00	Horn	H	AV	10 Hz	90.79	43.67	47.12	54.00	-6.88

See figures 2-13 to 2-16 for the plots of the 802.11b band-edge compliance.

See figures 2-17 to 2-20 for the plots of the 802.11g band-edge compliance.

See figures 2-21 to 2-24 for the plots of the 802.11n band-edge compliance.

802.11b/g/n Band-Edge Compliance of RF Radiated Emissions cont'd

Figure 2-13: Band-Edge Compliance of RF Radiated Emission
802.11b, Channel 1, 2412 MHz, Max Pol: V,
Detector: PK

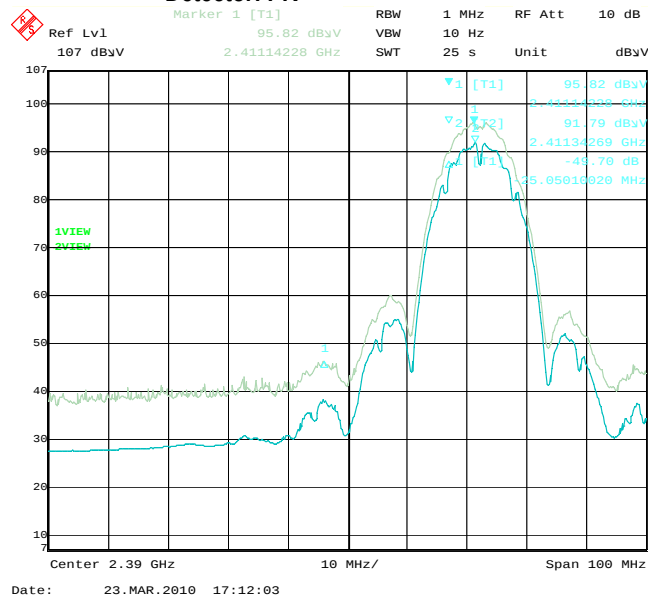


Figure 2-14: Band-Edge Compliance of RF Radiated Emission
802.11b, Channel 1, 2412 MHz, Max Pol: H,
Detector: PK

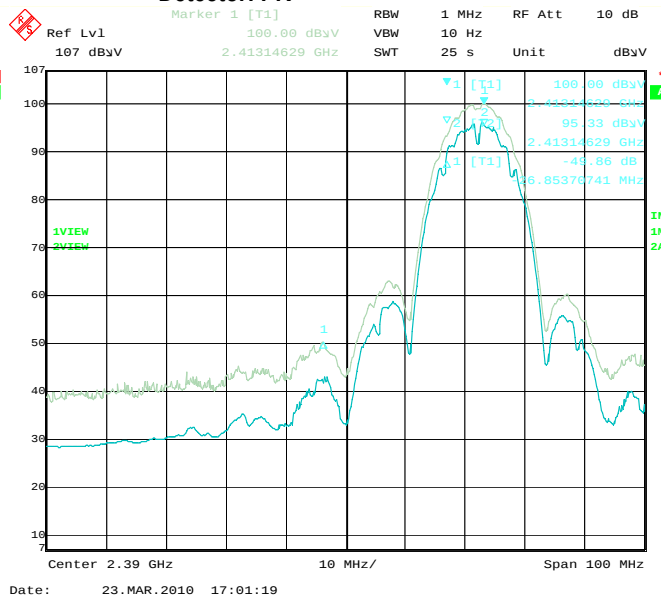


Figure 2-15: Band-Edge Compliance of RF Radiated Emission
802.11b, Channel 11, 2462 MHz, Max Pol: V,
Detector: PK



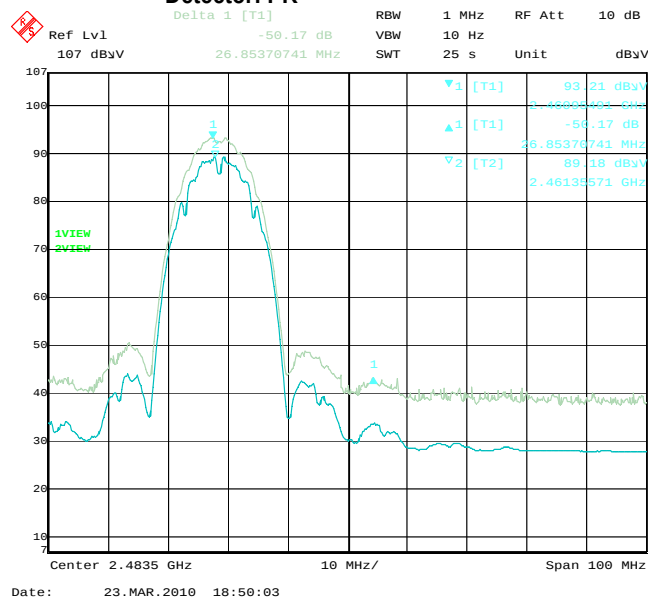


Figure 2-16: Band-Edge Compliance of RF Radiated Emission
802.11b, Channel 11, 2462 MHz, Max Pol: H,
Detector: PK

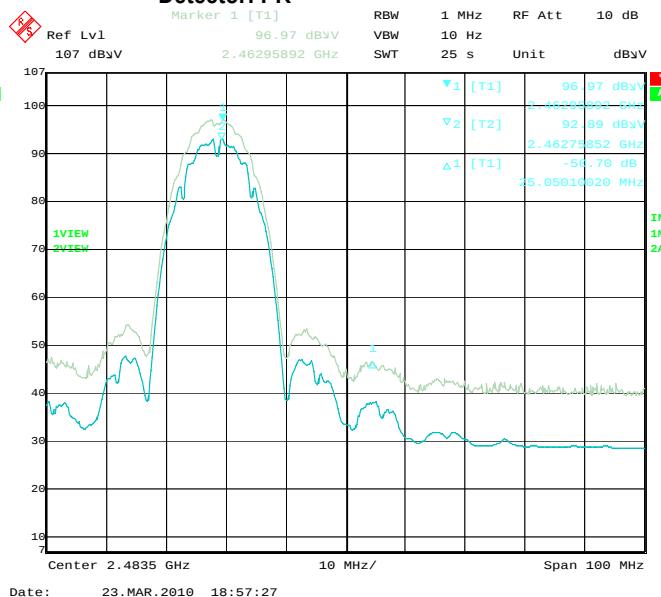


	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 2	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino


**Figure 2-17: Band-Edge Compliance of RF Radiated Emission
802.11g, Channel 1, 2412 MHz, Max Pol: V,
Detector: PK**

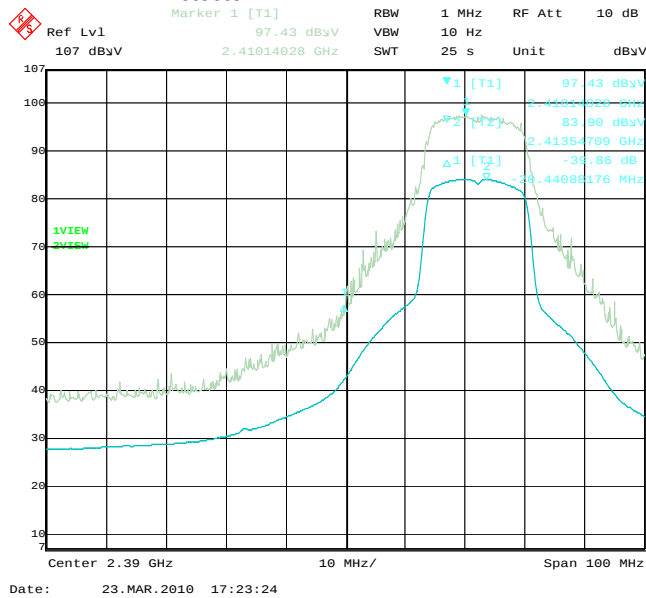


**Figure 2-18: Band-Edge Compliance of RF Radiated Emission
802.11g, Channel 1, 2412 MHz, Max Pol: H,
Detector: PK**

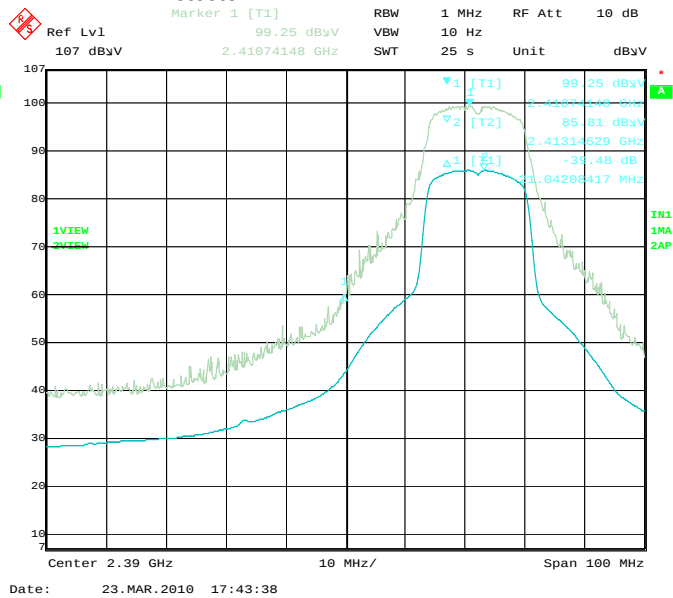

**Figure 2-19: Band-Edge Compliance of RF Radiated Emission
802.11g, Channel 11, 2462 MHz, Max Pol: V,
Detector: PK**

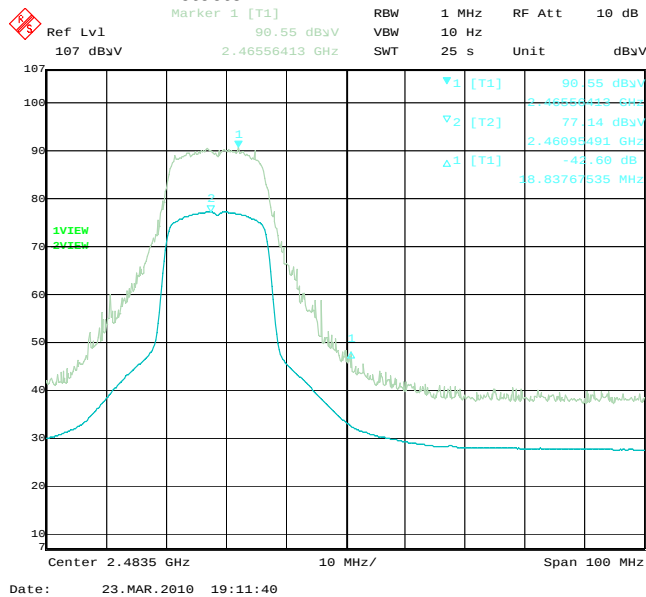

**Figure 2-20: Band-Edge Compliance of RF Radiated Emission
802.11g, Channel 11, 2462 MHz, Max Pol: H,
Detector: PK**

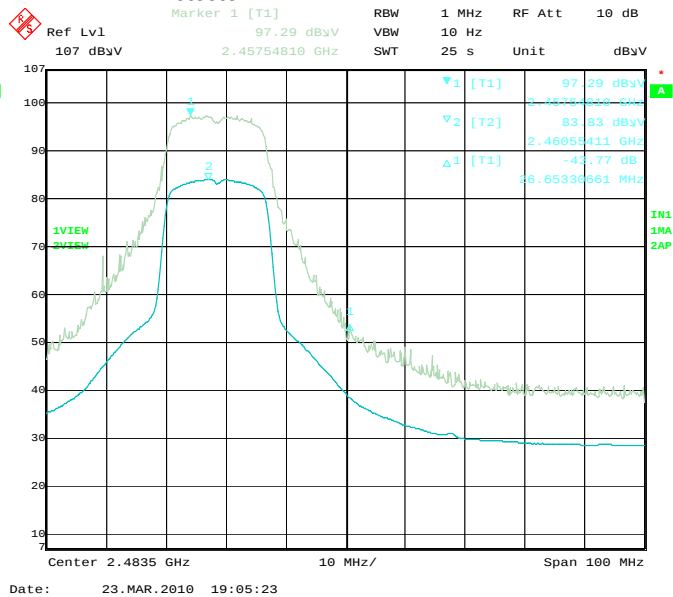

			EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 2		
Test Report No. RTS-2474-1001-38		Dates of Test January 27 to March 23 & April 20-22, 2010			Author Data Michael Cino

Figure 2-21: Band-Edge Compliance of RF Radiated Emission
802.11n, Channel 1, 2412 MHz, Max Pol: V,
Detector: PK

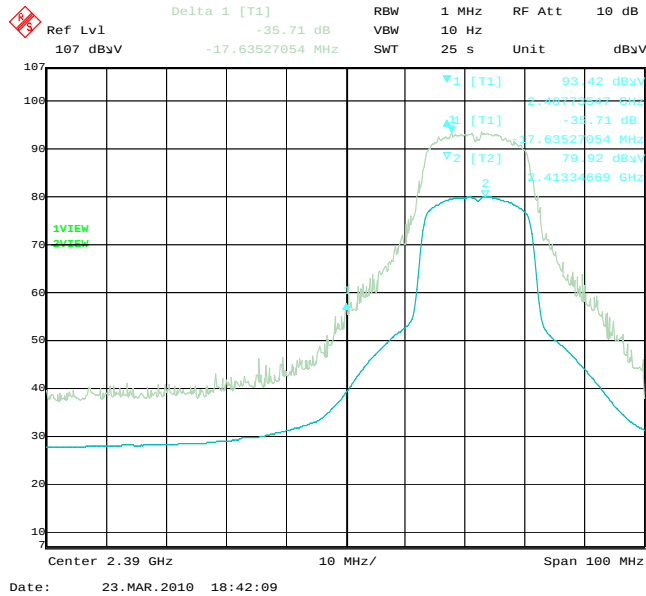


Figure 2-22: Band-Edge Compliance of RF Radiated Emission
802.11n, Channel 1, 2412 MHz, Max Pol: H,
Detector: PK

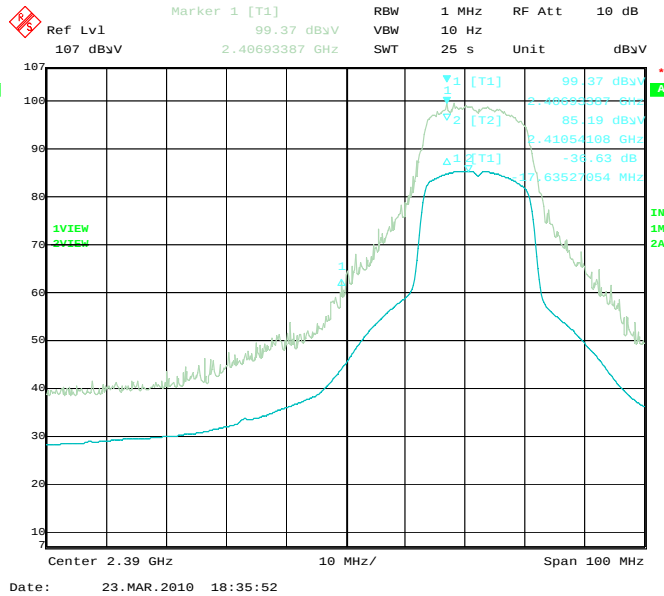


Figure 2-23: Band-Edge Compliance of RF Radiated Emission
802.11n, Channel 11, 2462 MHz, Max Pol: V,
Detector: PK


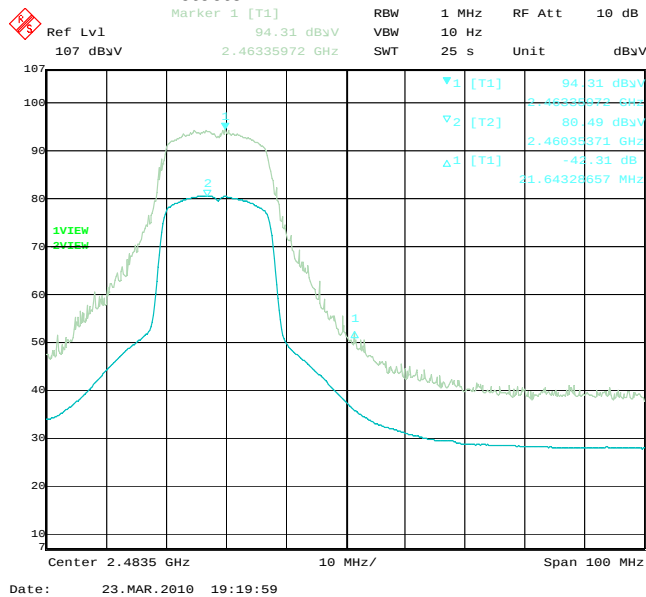


Figure 2-24: Band-Edge Compliance of RF Radiated Emission
802.11n, Channel 11, 2462 MHz, Max Pol: H,
Detector: PK

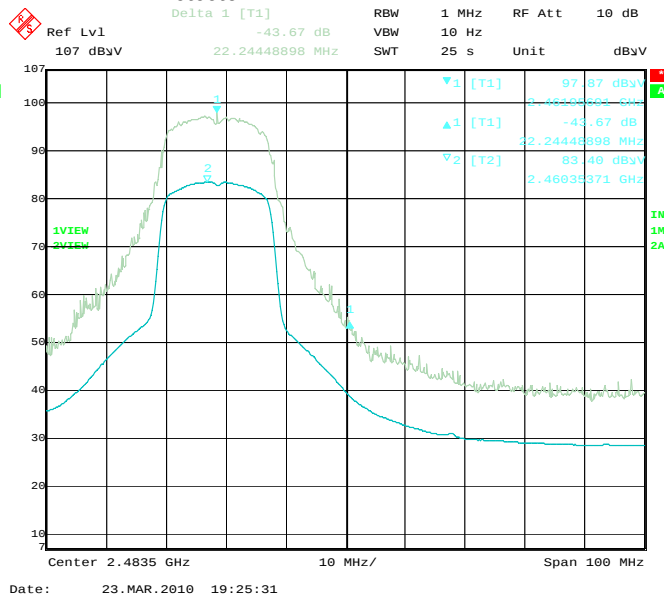

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 3	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

APPENDIX 3 – BLUETOOTH CONDUCTED EMISSIONS TEST DATA/PLOTS

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 3	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino


Bluetooth RF Conducted Emission Test Results

Bluetooth power output from BlackBerry® smartphone was at maximum for all the recorded measurements shown below.

The measurements were performed by Maurice Battler.

Date of test: February 02, 2010

Test Setup Diagram

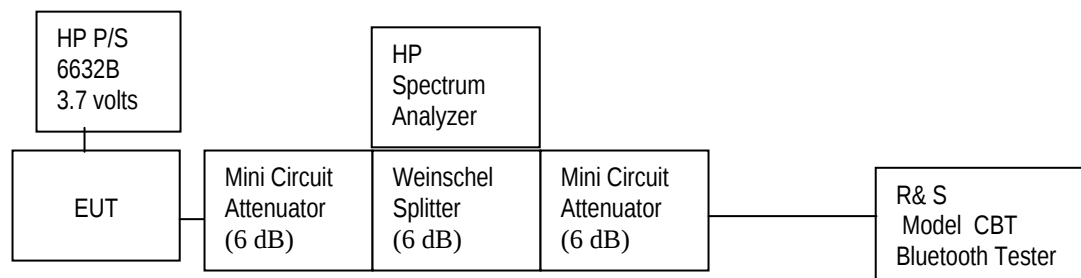

A reference offset of 12.4 dB was applied to the spectrum analyzer reference level for the attenuators and coaxial cable loss in the test circuit.

The environmental test conditions were: Temperature: 24 °C
Pressure: 1016 mb
Relative Humidity: 21 %

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 3	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

Bluetooth RF Conducted Emission Test Results cont'd

20 dB Bandwidth

The EUT met the requirements of the 20 dB bandwidth as per 47 CFR 15.247(a) and RSS-210. Low channel (0), middle channel (39) and high channel (78) were measured. Bluetooth was operating in single frequency mode.

Using pattern type "Static PRBS" and packet type "DH5" during the measurements.

Bluetooth Channel	Limit (MHz)	Measured Level (MHz)
0	≤1.0	0.923
39	≤1.0	0.923
78	≤1.0	0.927

See figures 3-1 to 3-3 for the plots of the 20 dB bandwidth measurements.

Figure 3-1: 20 dB Bandwidth

Single freq., Static PBRS, DH5

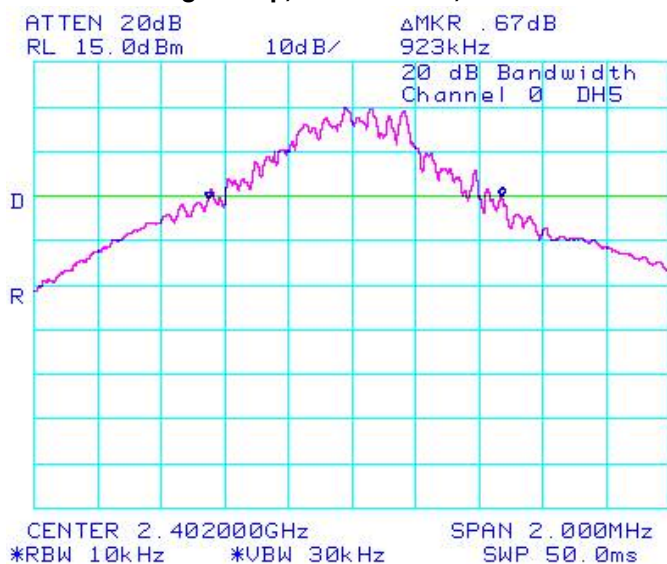


Figure 3-2: 20 dB Bandwidth

Single freq., Static PBRS, DH5




	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 3	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

Bluetooth RF Conducted Emission Test Results cont'd

Figure 3-3: 20 dB Bandwidth

Single freq., Static PBRs, DH5

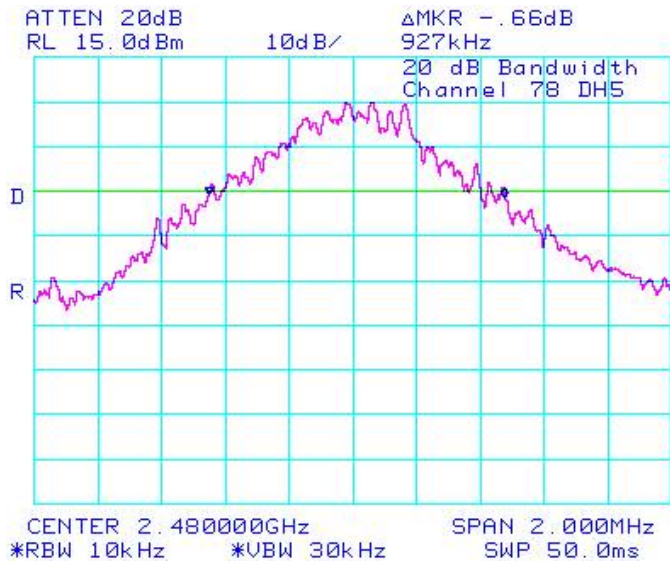

Using Pattern type “Static PRBS” and packet type “3-DH5” during the measurements.

Bluetooth Channel	Limit (MHz)	Measured Level (MHz)
0	≤1.5	1.303
39	≤1.5	1.307
78	≤1.5	1.307

See figures 3-4 to 3-6 for the plots of the 20 dB bandwidth measurements.

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 3	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

Bluetooth RF Conducted Emission Test Results cont'd

Figure 3-4: 20 dB Bandwidth

Single freq., Static PBRS, 3-DH5

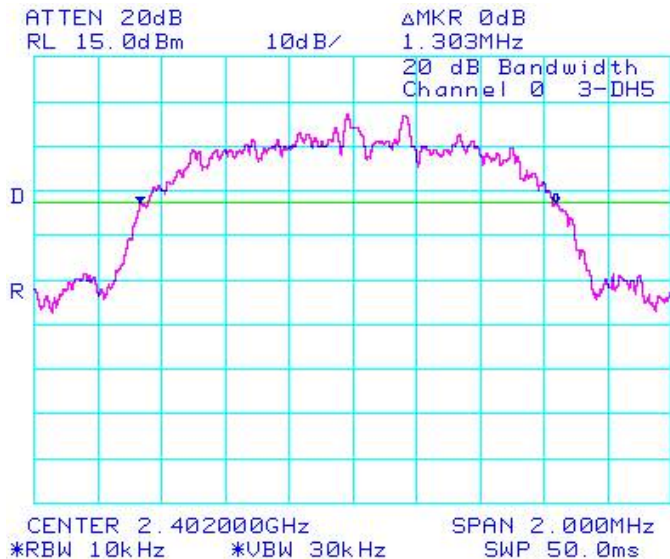


Figure 3-5: 20 dB Bandwidth

Single freq., Static PBRS, 3-DH5


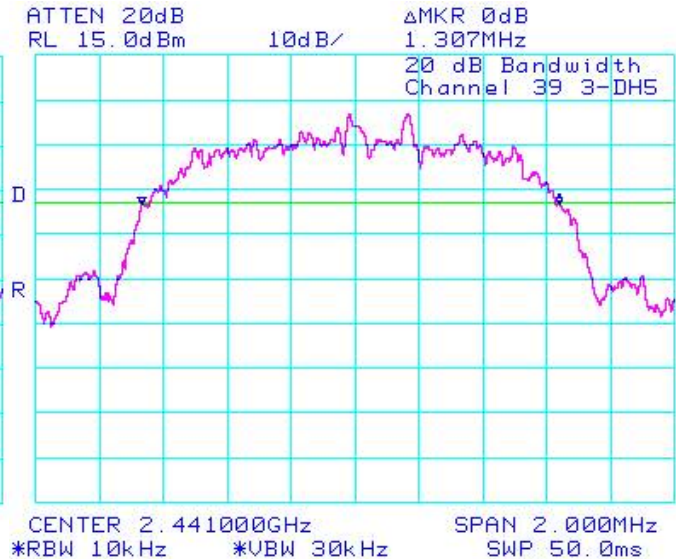


Figure 3-6: 20 dB Bandwidth

Single freq., Static PBRS, 3-DH5

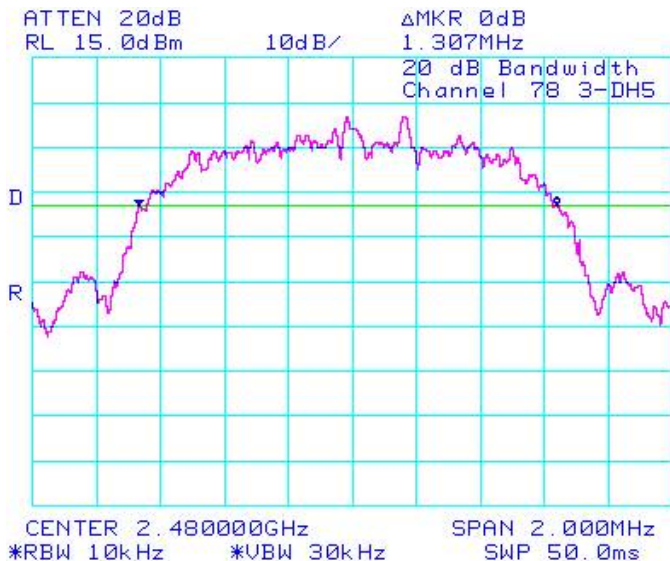

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 3	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

Bluetooth RF Conducted Emission Test Results cont'd

Carrier Frequency Separation


The EUT met the requirements of the Carrier Frequency Separation as per 47 CFR 15.247(a) and RSS-210. Channel 38 to 39 was measured. Bluetooth was operating in frequency hopping (Euro/US) mode.

Using pattern type "Static PRBS" and packet type "DH5" during the measurements.

Bluetooth Channels	Limit (MHz)	Measured Level (MHz)
38 to 39	≥ 0.025 or 20 dB bandwidth	1.000

See figure 3-7 for the plot of the Carrier Frequency Separation measurement.

Figure 3-7: Carrier Frequency Separation, Freq. Hopping, Static PBRS, DH5, Channels 38 to 39

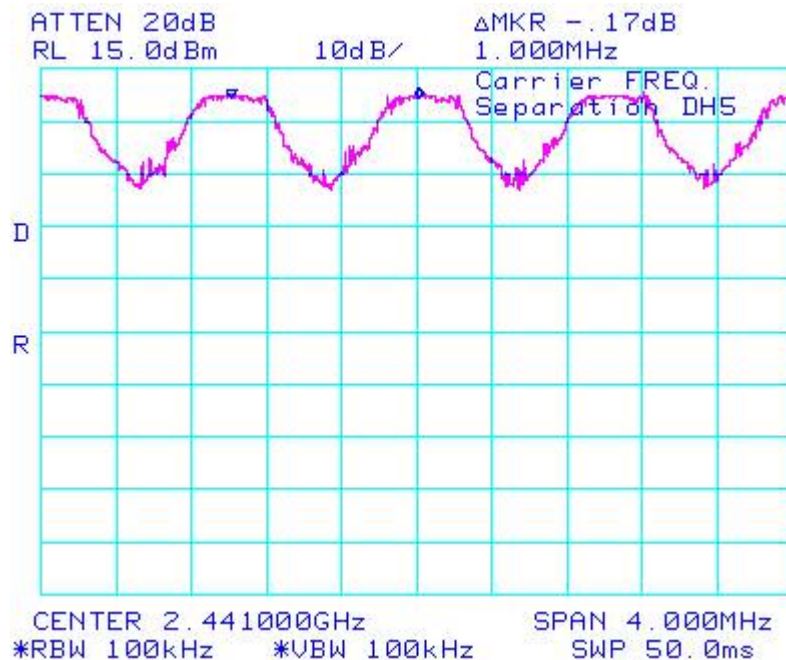

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 3	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino


Bluetooth RF Conducted Emission Test Results cont'd

Using Pattern type "Static PRBS" and packet type "3-DH5" during the measurements.

Bluetooth Channels	Limit (MHz)	Measured Level (MHz)
38 to 39	≥ 0.025 or 20 dB bandwidth	1.000

See figure 3-8 for the plot of the Carrier Frequency Separation measurement.

Figure 3-8: Carrier Frequency Separation, Freq. Hopping, Static PBRS, 3-DH5, Channels 38 to 39

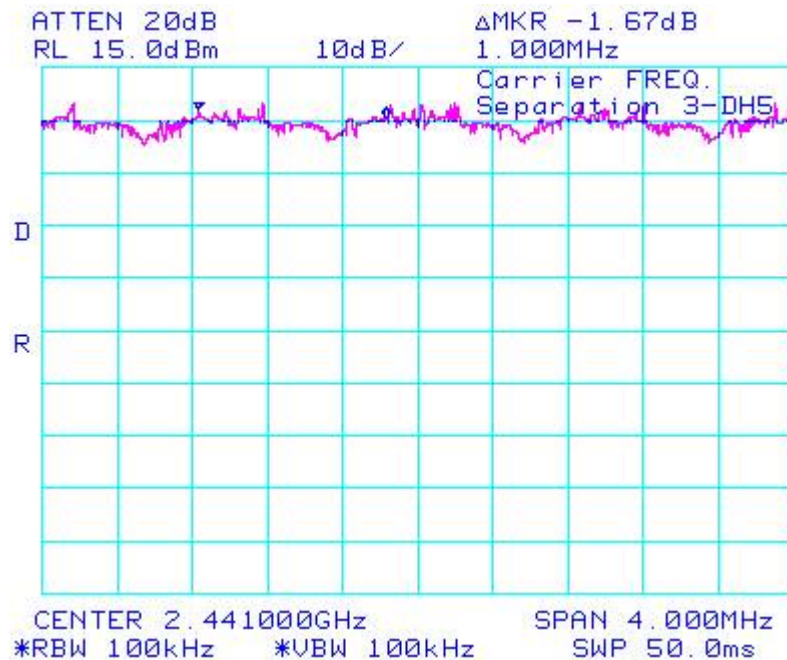

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 3	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

Bluetooth RF Conducted Emission Test Results cont'd

Number of Hopping Frequencies


The EUT met the requirements of the number of hopping frequencies as per 47 CFR 15.247(a) and RSS-210. Bluetooth was operating in frequency hopping (Euro/US) mode.

Using pattern type "Static PRBS" and packet type "DH5" during the measurements.


Limit (CH)	Number of Hopping Frequencies (CH)
≥75	79

See figures 3-9 to 3-12 for the plots of the number of hopping frequencies.

**Figure 3-6: Number of Hopping Frequencies
Static PBRS, DH5**

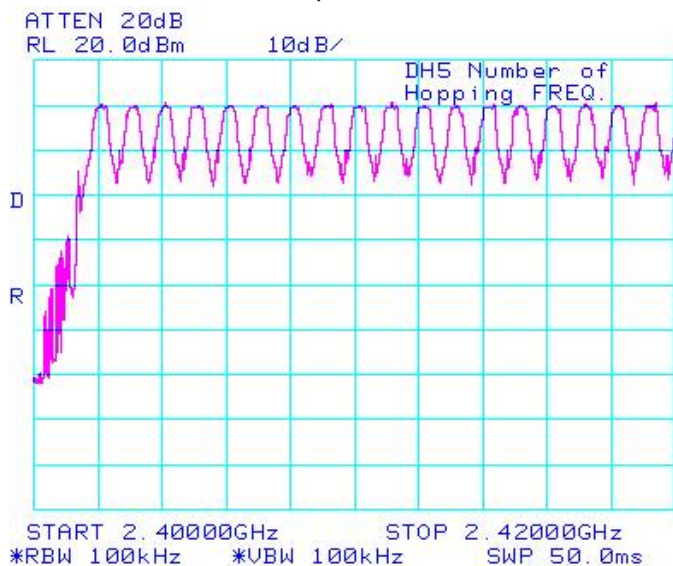


**Figure 3-7: Number of Hopping Frequencies
Static PBRS, DH5**

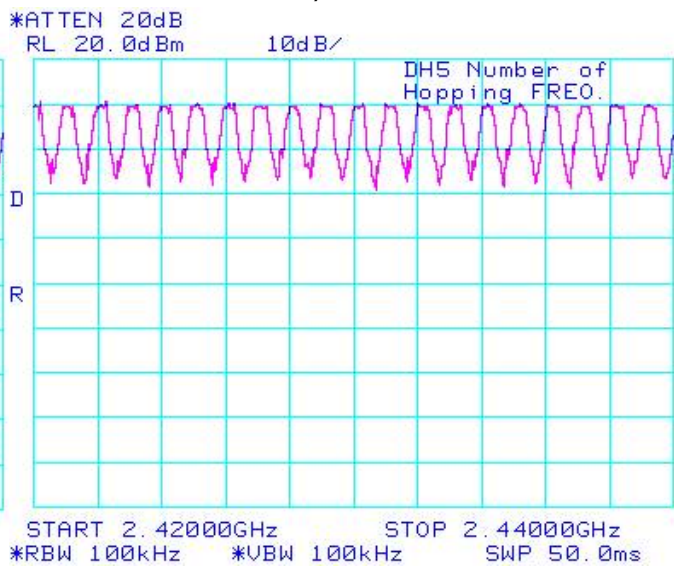


	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 3	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

Bluetooth RF Conducted Emission Test Results cont'd

**Figure 3-8: Number of Hopping Frequencies
Static PBRS, DH5**

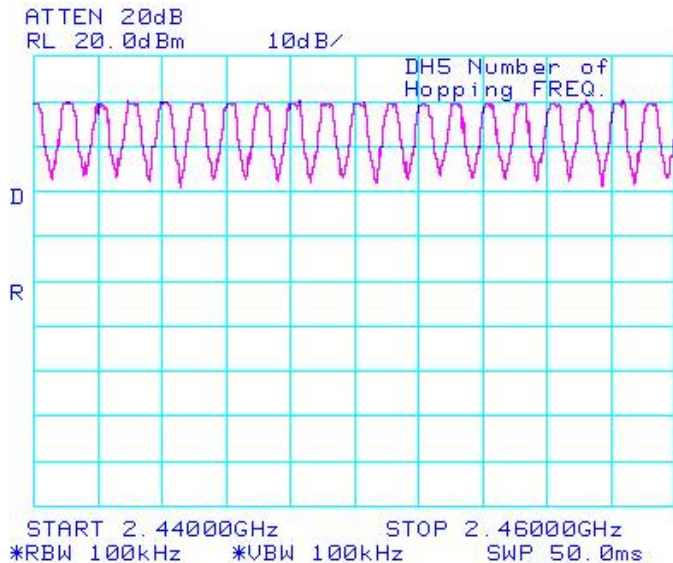

**Figure 3-9: Number of Hopping Frequencies
Static PBRS, DH5**

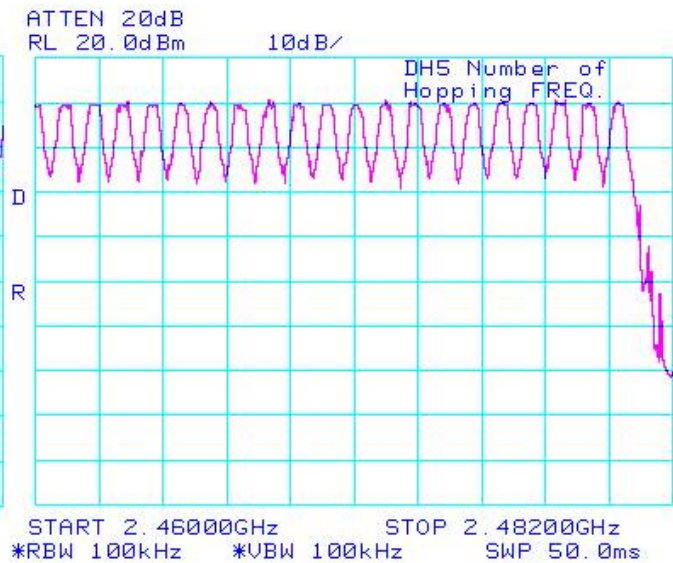

Time of Occupancy (Dwell Time)

The EUT met the requirements of the time of occupancy (dwell time) as per 47 CFR 15.247(a) and RSS-210. Low channel (0), middle channel (39) and high channel (78) were measured in packet types DH1, DH3 and DH5. Bluetooth was operating in frequency hopping (Euro/US) mode during the measurements. The frequency hopping is 1600 hops per second for a dwell time of 625 µsec for 79 channels.

A DH1 packet needs one time slot for transmitting and one time slot for receiving. The frequency hopping is 800 hops per second with 79 channels which is 10.127 times per second. As per 15.247(a) (iii) "The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed". Therefore for 31.6 seconds (79x0.4) there are 320.0 times of appearance.

A DH3 packet needs one time slot for transmitting and one time slot for receiving. The frequency hopping is 400 hops per second with 79 channels which is 5.06 times per second. Therefore for 31.6 seconds there are 159.9 times of appearance.

A DH5 packet needs one time slot for transmitting and one time slot for receiving. The frequency hopping is 266.7 hops per second with 79 channels which is 3.38 times per second. Therefore for 31.6 seconds there are 106.8 times of appearance.

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 3	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

Bluetooth RF Conducted Emission Test Results cont'd

Bluetooth Channel	Mode	Tx Time (ms)	Dwell Time/31.6 sec. (msec.)	Limit (msec.)	Margin (msec.)
0	DH1	0.3997	$0.3997 \times 320.0 = 127.90$	400	272.10
39	DH1	0.3997	$0.3997 \times 320.0 = 127.90$	400	272.10
78	DH1	0.3978	$0.3978 \times 320.0 = 127.30$	400	272.70
0	DH3	1.6667	$1.6667 \times 159.9 = 266.51$	400	133.49
39	DH3	1.6600	$1.6600 \times 159.9 = 265.43$	400	134.57
78	DH3	1.6600	$1.6600 \times 159.9 = 265.43$	400	134.57
0	DH5	2.9150	$2.9150 \times 106.8 = 311.32$	400	88.68
39	DH5	2.9150	$2.9150 \times 106.8 = 311.32$	400	88.68
78	DH5	2.9150	$2.9150 \times 106.8 = 311.32$	400	88.68

See figures 3-13 to 3-21 for the plots of the dwell time.

Bluetooth RF Conducted Emission Test Results cont'd

Figure 3-13: Time of Occupancy (Dwell Time)
Freq. Hopping, Static PBRS, DH1


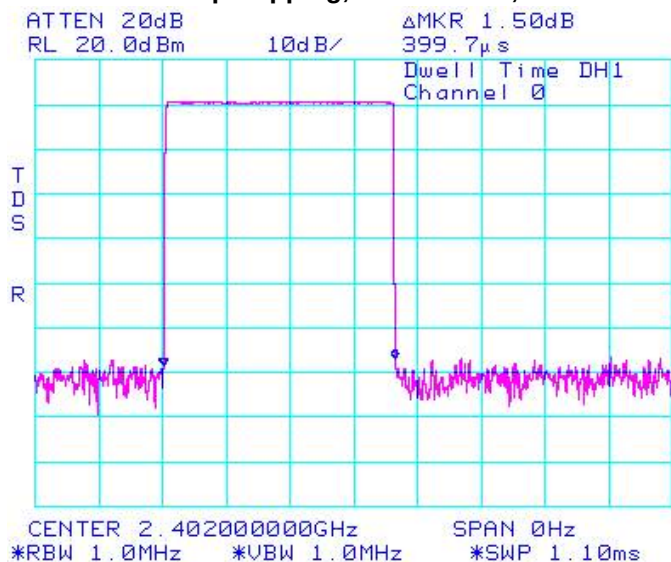


Figure 3-14: Time of Occupancy (Dwell Time)
Freq. Hopping, Static PBRS, DH1

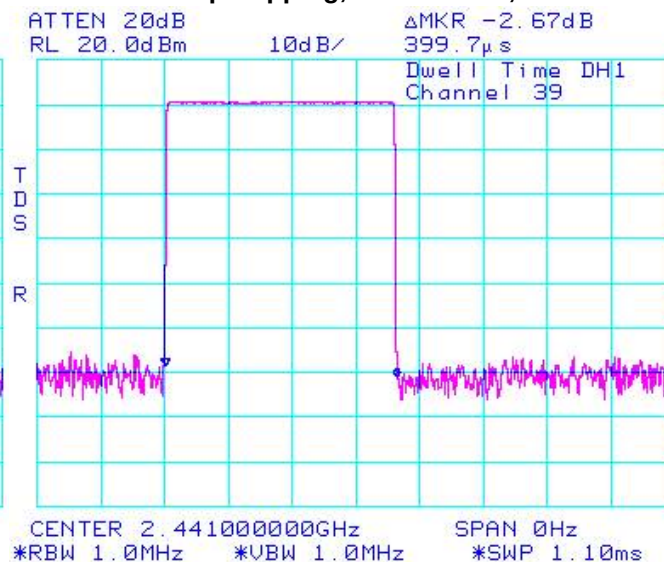

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 3	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

Bluetooth RF Conducted Emission Test Results cont'd

Figure 3-15: Time of Occupancy (Dwell Time)
Freq. Hopping, Static PBRS, DH1

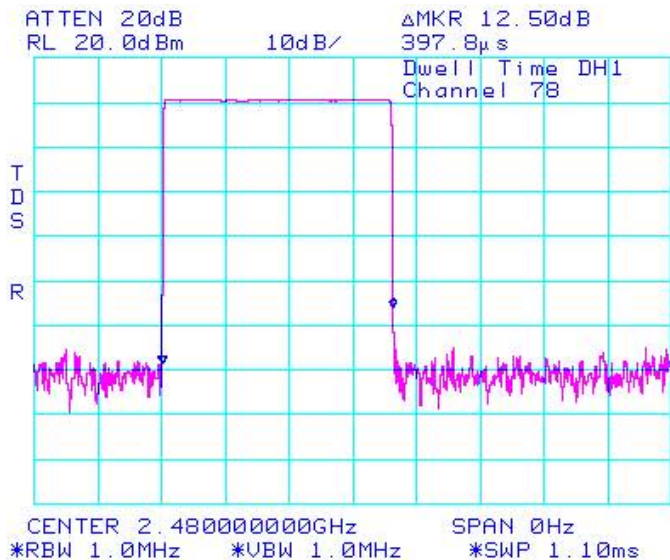


Figure 3-16: Time of Occupancy (Dwell Time)
Freq. Hopping, Static PBRS, DH3

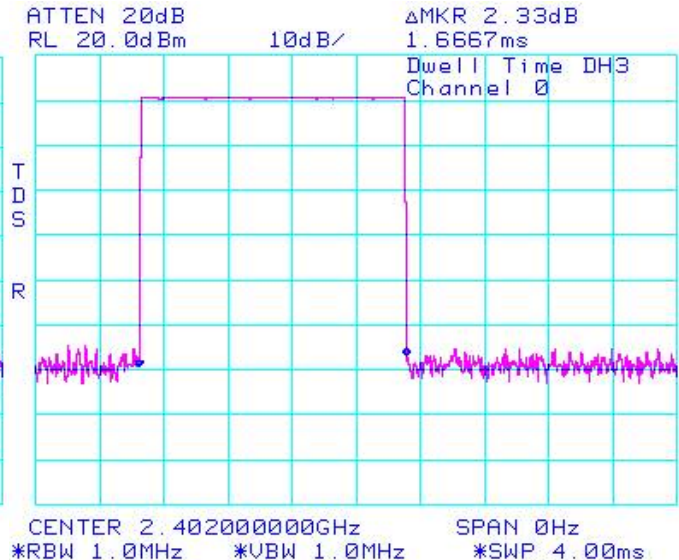


Figure 3-17: Time of Occupancy (Dwell Time)
Freq. Hopping, Static PBRS, DH3


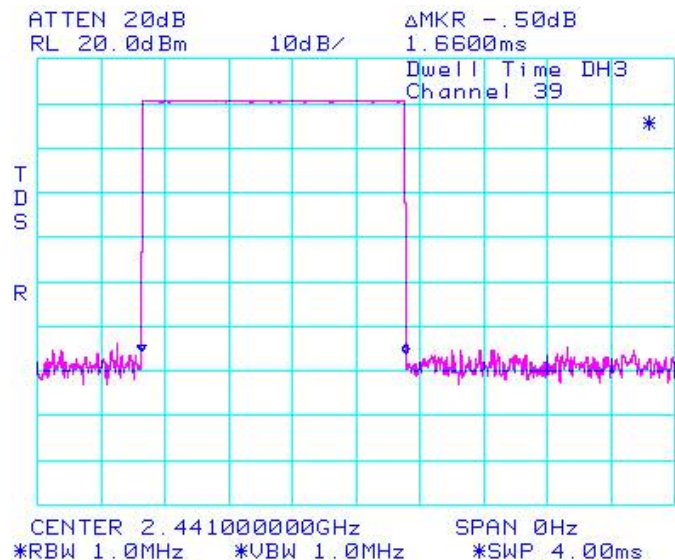


Figure 3-18 : Time of Occupancy (Dwell Time)
Freq. Hopping, Static PBRS, DH3

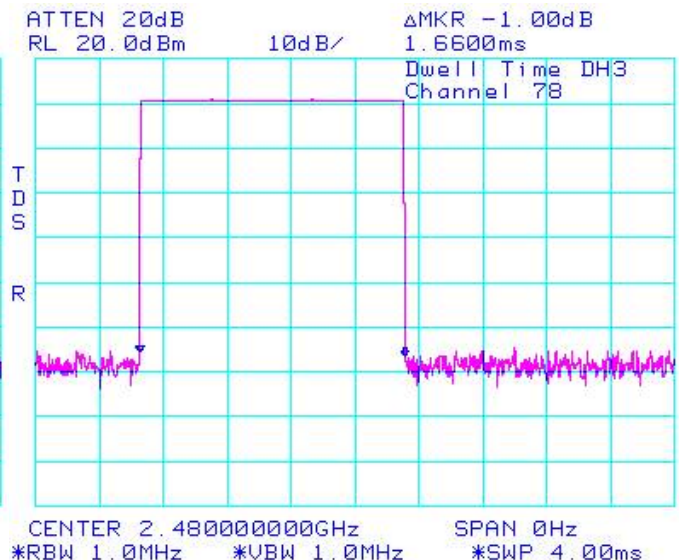

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 3	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

Bluetooth RF Conducted Emission Test Results cont'd

Figure 3-19: Time of Occupancy (Dwell Time)
Freq. Hopping, Static PBRs, DH5

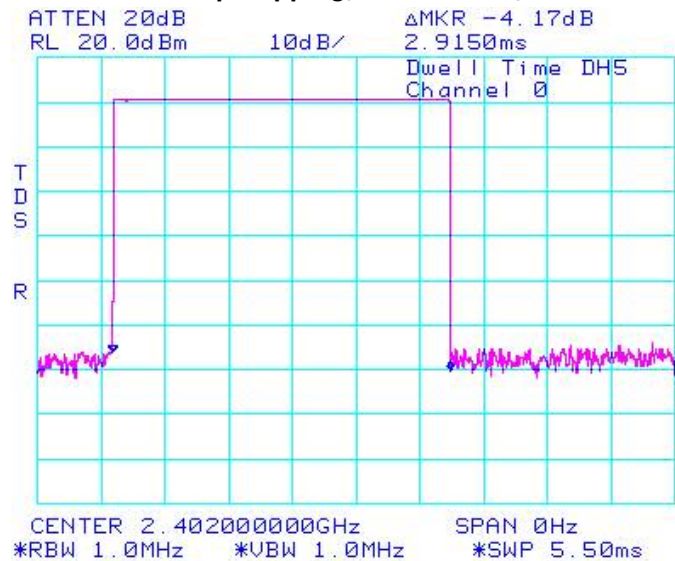


Figure 3-20: Time of Occupancy (Dwell Time)
Freq. Hopping, Static PBRs, DH5


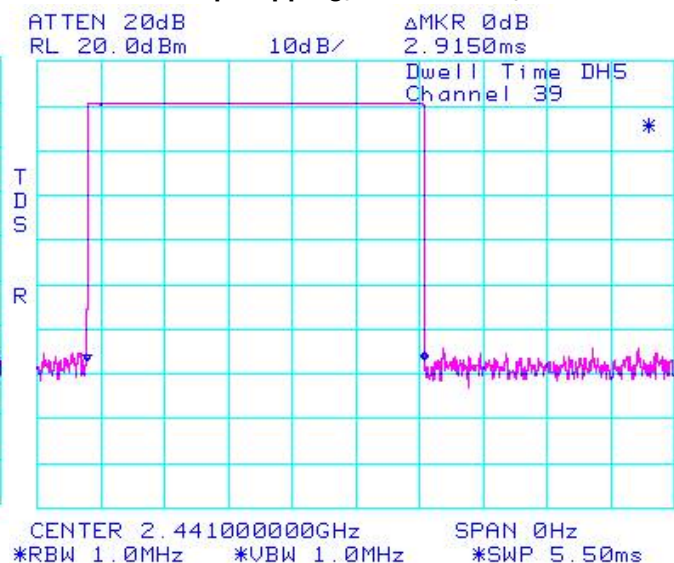


Figure 3-21: Time of Occupancy (Dwell Time)
Freq. Hopping, Static PBRs, DH5

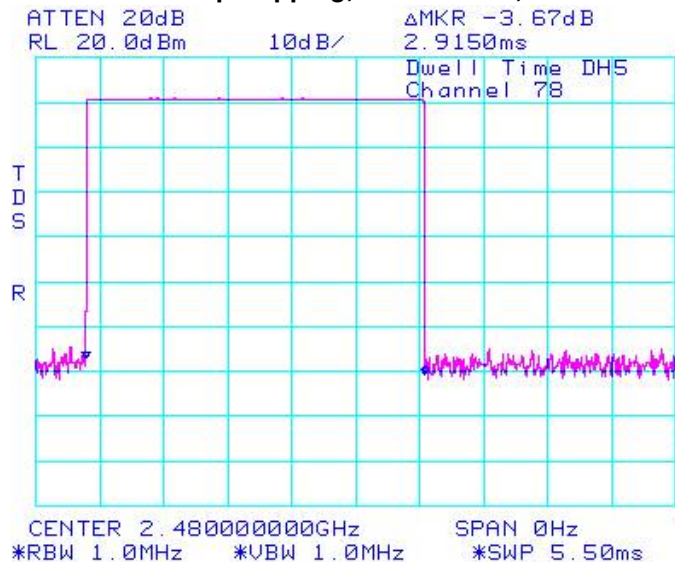

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 3	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

Bluetooth RF Conducted Emission Test Results cont'd

Maximum Peak Conducted Output Power

The EUT met the requirements of the maximum peak conducted output power of class 2 as per 47 CFR 15.247(b) and RSS-210. Low channel (0), middle channel (39) and high channel (78) were measured. Bluetooth was operating in single frequency mode during the measurements. A reference offset of 12.4 dB was applied to the spectrum analyzer reference level for the coaxial cable loss and attenuators in the test circuit.

Using pattern type "Static PRBS" and packet type "DH5" during the measurements.

Bluetooth Channel	Measured Level (dBm)	Measured Level (W)	Class 1 Limit (dBm)
0	10.67	0.01167	0.0 to 20.0
39	10.67	0.01167	0.0 to 20.0
78	11.00	0.01259	0.0 to 20.0

See figures 3-22 to 3-24 for the plots of the maximum peak conducted output power.

Figure 3-22: Max. Peak Conducted Output Power
Single Freq., Static PBRS, DH5


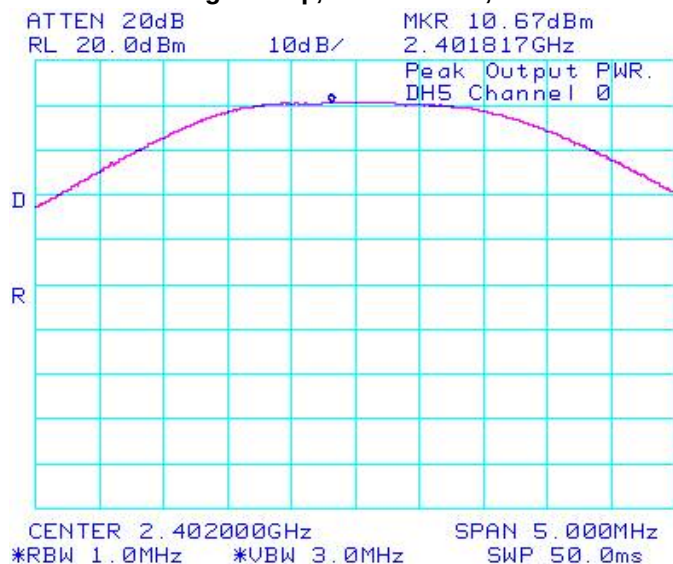



Figure 3-23: Max. Peak Conducted Output Power
Single Freq., Static PBRS, DH5

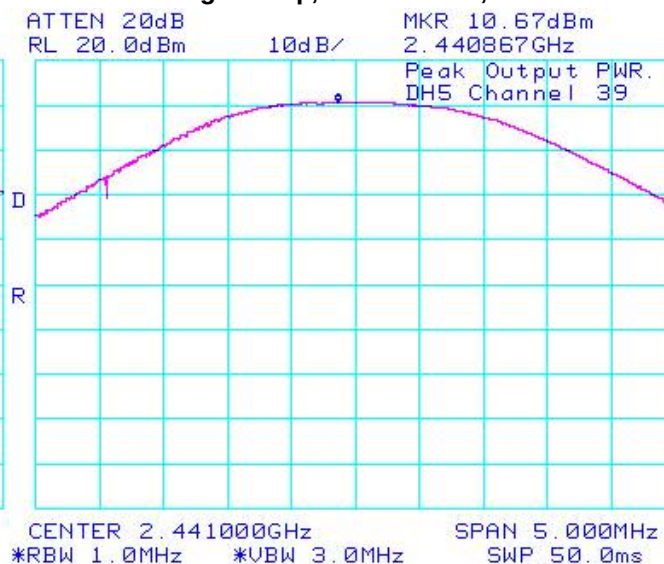

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 3	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

Bluetooth RF Conducted Emission Test Results cont'd

Figure 3-24: Max. Peak Conducted Output Power

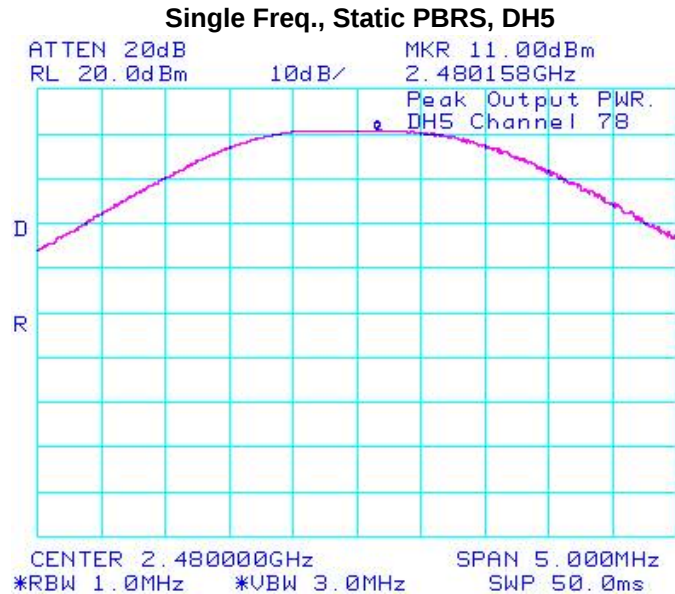

Using Pattern type “Static PRBS” and packet type “3-DH5” during the measurements.

Bluetooth Channel	Measured Level (dBm)	Measured Level (W)	Class 1 Limit (dBm)
0	10.33	0.01079	0.0 to 20.0
39	10.17	0.01040	0.0 to 20.0
78	10.50	0.01122	0.0 to 20.0

See figures 3-25 to 3-27 for the plots of the maximum peak conducted output power.

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 3	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

Bluetooth RF Conducted Emission Test Results cont'd

Figure 3-25: Max. Peak Conducted Output Power
Single Freq., Static PBRs, 3-DH5

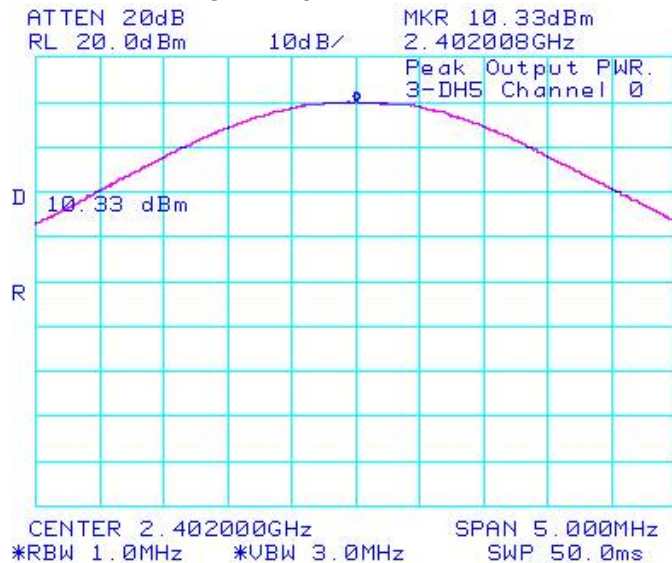


Figure 3-26: Max. Peak Conducted Output Power
Single Freq., Static PBRs, 3-DH5


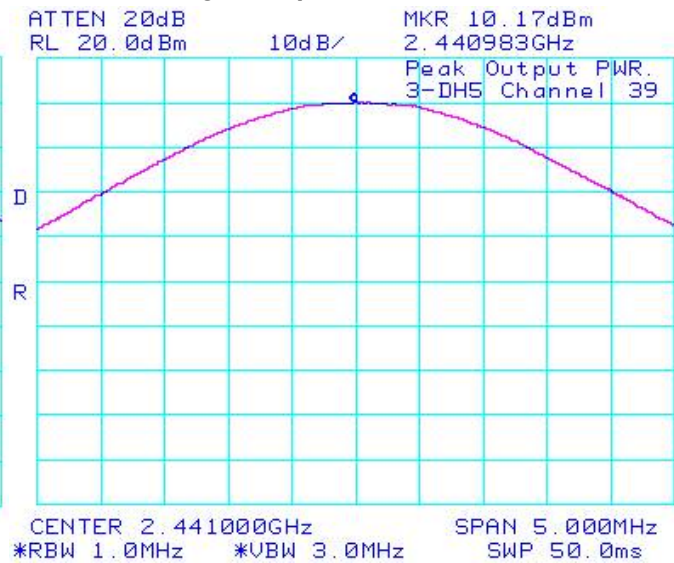


Figure 3-27: Max. Peak Conducted Output Power
Single Freq., Static PBRs, 3-DH5

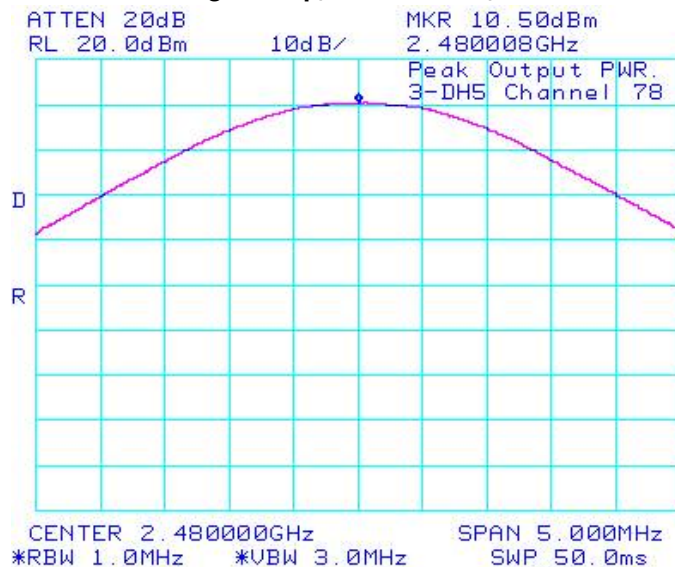

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 3	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

Bluetooth RF Conducted Emission Test Results cont'd

Band Edge Compliance

The EUT met the requirements of the band edge compliance as per 47 CFR 15.247(c) and RSS-210. Low channel (0) and high channel (78) were measured. Bluetooth was operating in single frequency and hopping mode.

Using pattern type "Static PRBS" and packet type "DH5" during the measurements.

Bluetooth Channel	Operating Mode	Measured Level (dBc)	Limit (dBc)	Margin (dB)
0	Single Frequency	-27.67	-20	-7.67
78	Single Frequency	-31.17	-20	-11.17
0	Hopping	-27.83	-20	-7.83
78	Hopping	-31.84	-20	-11.84

See figures 3-28 to 3-31 for the plots of the band edge compliance measurements.

Figure 3-28: Band Edge Compliance

Single Freq., Static PBRS, DH5


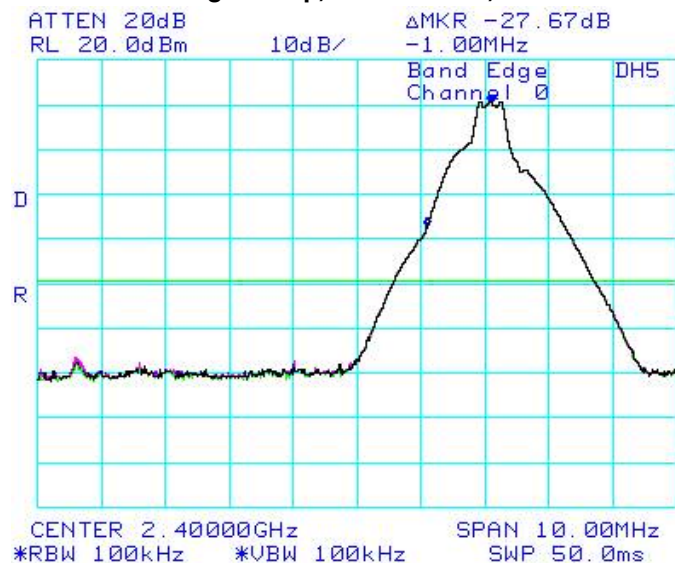


Figure 3-29: Band Edge Compliance

Single Freq., Static PBRS, DH5

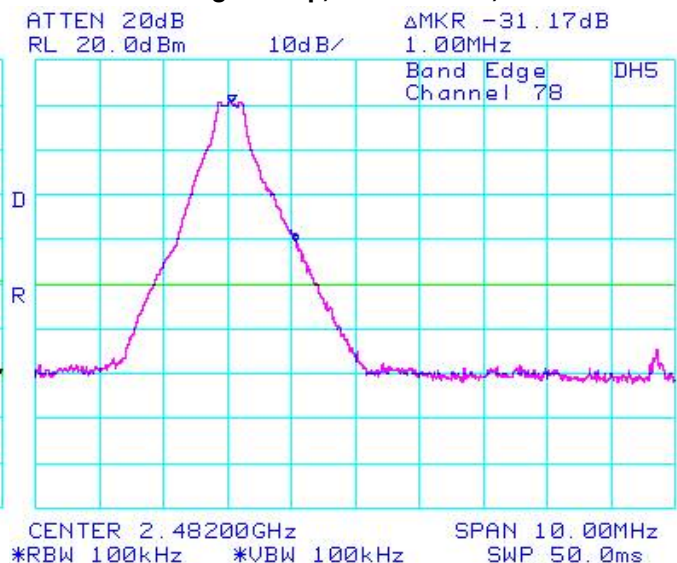

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 3	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

Bluetooth RF Conducted Emission Test Results cont'd

Figure 3-30: Band Edge Compliance

Freq. Hopping, Static PBRS, DH5


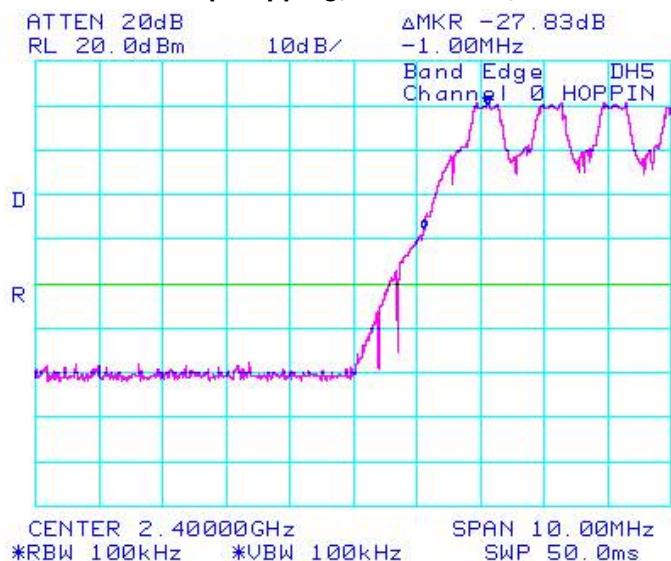


Figure 3-31: Band Edge Compliance

Freq. Hopping, Static PBRS, DH5

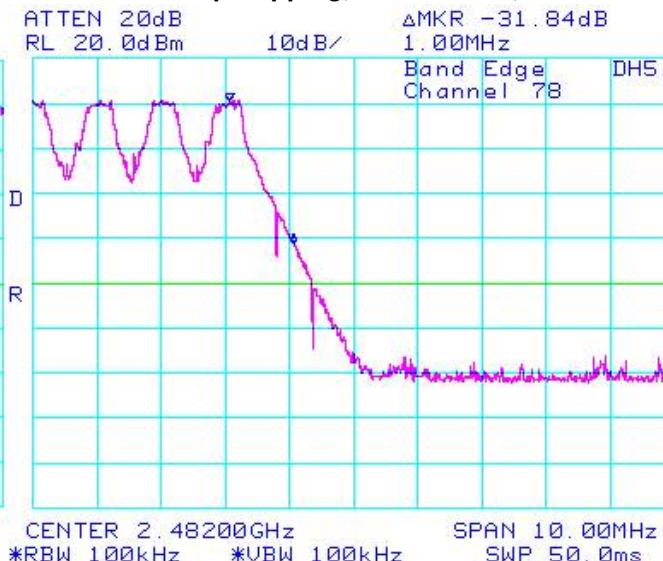

Using pattern type “Static PRBS” and packet type “3-DH5” during the measurements.

Bluetooth Channel	Operating Mode	Measured Level (dBc)	Limit (dBc)	Margin (dB)
0	Single Frequency	-28.16	-20	-8.16
78	Single Frequency	-33.00	-20	-13.00
0	Hopping	-28.33	-20	-8.33
78	Hopping	-30.50	-20	-10.50

See figures 3-32 to 3-35 for the plots of the band edge compliance measurements.

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 3	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

Bluetooth RF Conducted Emission Test Results cont'd

Figure 3-32: Band Edge Compliance

Single Freq., Static PBRS, 3-DH5

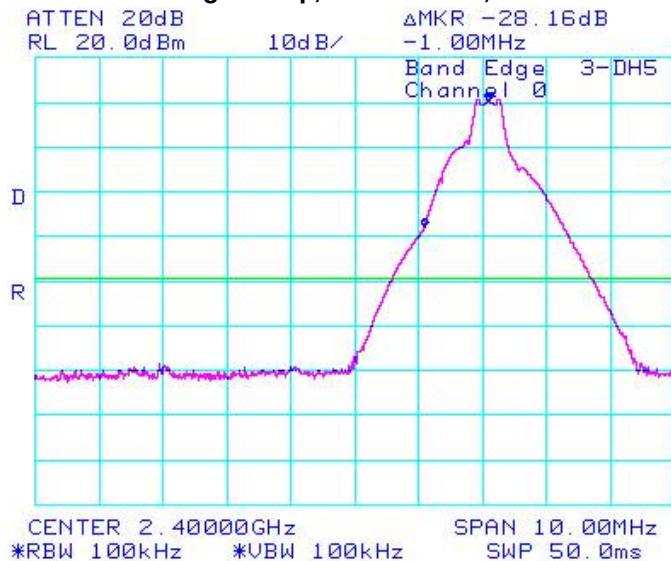


Figure 3-33: Band Edge Compliance

Single Freq., Static PBRS, 3-DH5

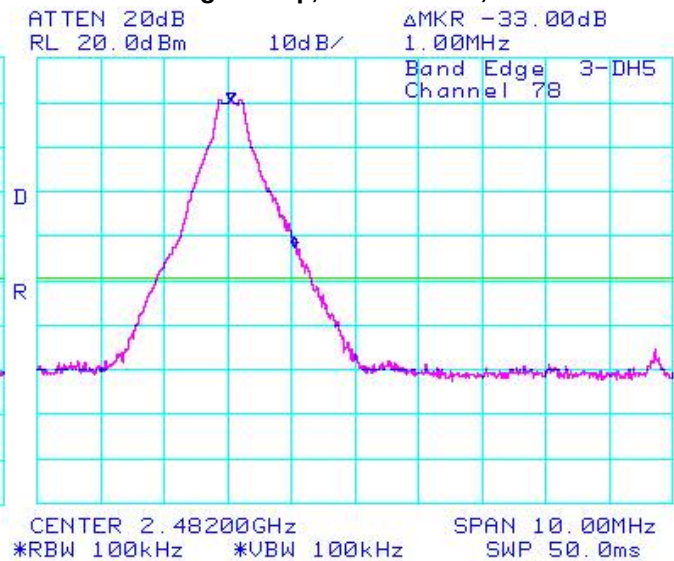


Figure 3-34: Band Edge Compliance

Freq. Hopping, Static PBRS, 3-DH5


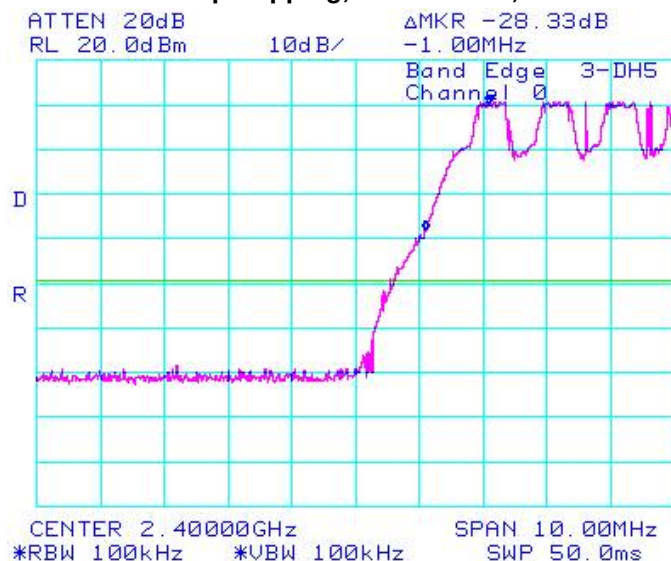


Figure 3-35: Band Edge Compliance

Freq. Hopping, Static PBRS, 3-DH5

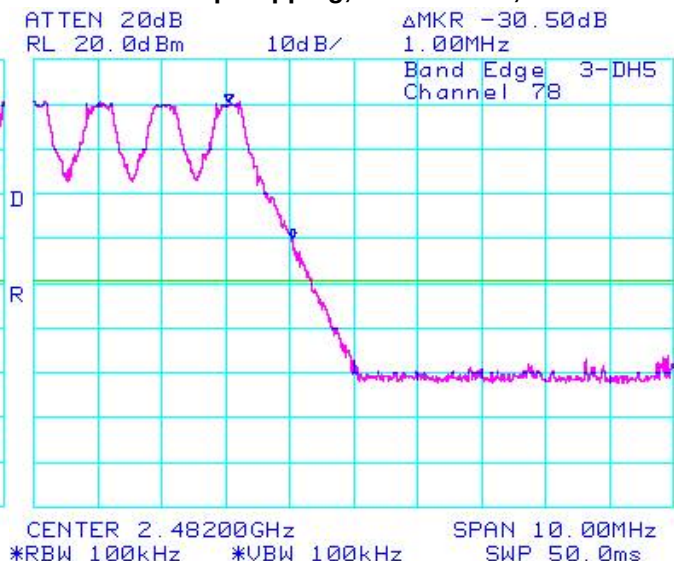

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 3	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

Bluetooth RF Conducted Emission Test Results cont'd

Spurious RF Conducted Emissions

The EUT met the requirements of the spurious RF conducted emissions as per 47 CFR 15.247(c) and RSS-210. Low channel (0), mid channel (39) and high channel (78) were measured. Bluetooth was operating in single frequency and hopping mode. A reference offset of 12.4 dB was applied to the spectrum analyzer reference level for the attenuators and coaxial cable loss in the test circuit.

Using pattern type "Static PRBS" and packet type "DH5" during the measurements.

Bluetooth Channel	Channel Power (dBm)	Max. Measured Level (dBm)	Max. Measured Level from carrier (dBc)	Limit (dBc)
0	10.67	-30.67	41.34	-20
39	10.67	-30.67	41.34	-20
78	11.00	-33.67	44.67	-20
Hopping mode	10.67	-31.33	42	-20

See figures 2-36 to 2-39 for the plots of the spurious RF conducted emissions.

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 3	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

Bluetooth RF Conducted Emission Test Results cont'd

Figure 2-36: Spurious RF Conducted Emissions

Single Freq., Static PBRS, DH5,


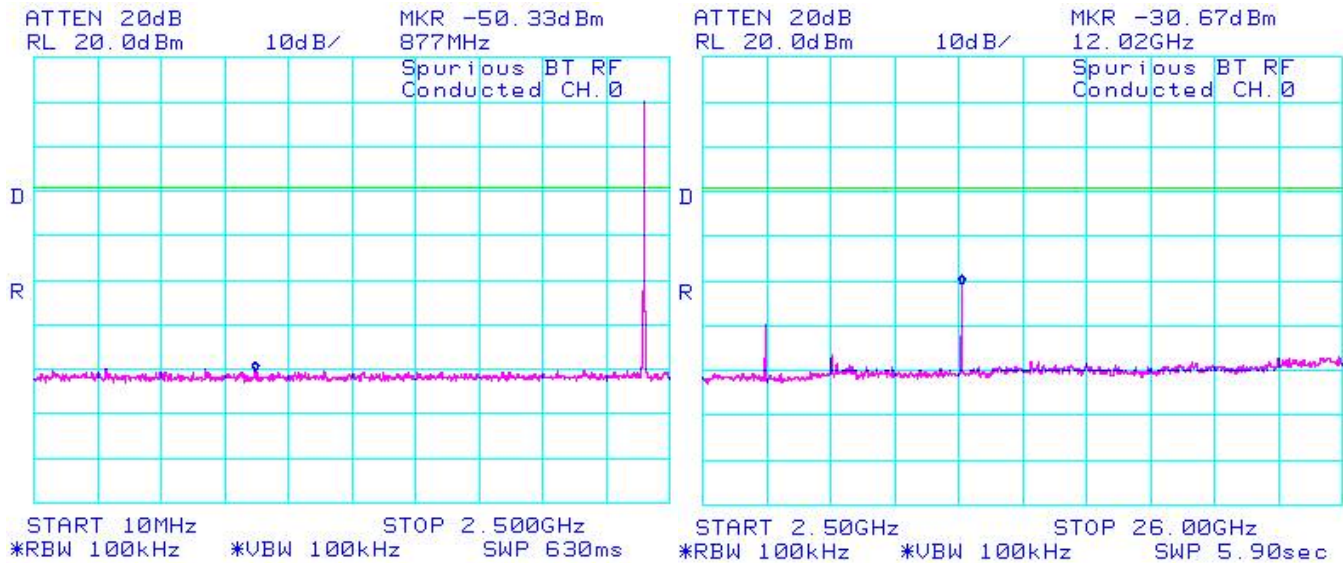


Figure 2-37: Spurious RF Conducted Emissions

Single Freq., Static PBRS, DH5

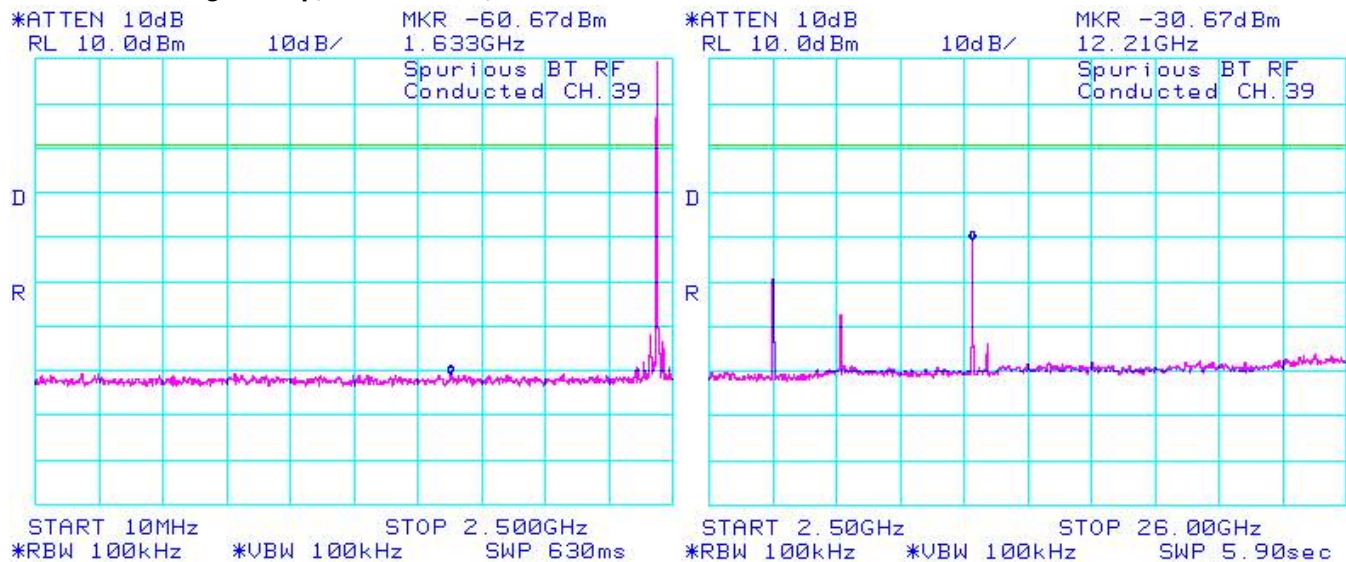

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 3	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

Bluetooth RF Conducted Emission Test Results cont'd

Figure 2-38: Spurious RF Conducted Emissions

Single Freq., Static PBRS, DH5


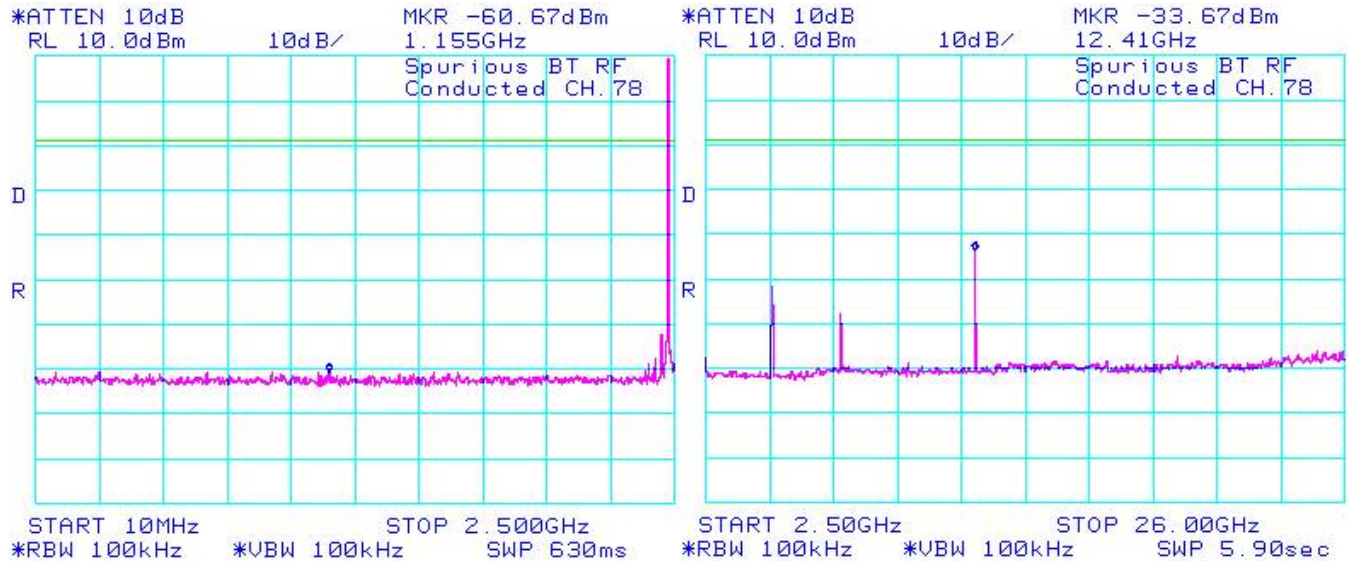


Figure 2-39: Spurious RF Conducted Emissions

Freq. Hopping, Static PBRS, DH5

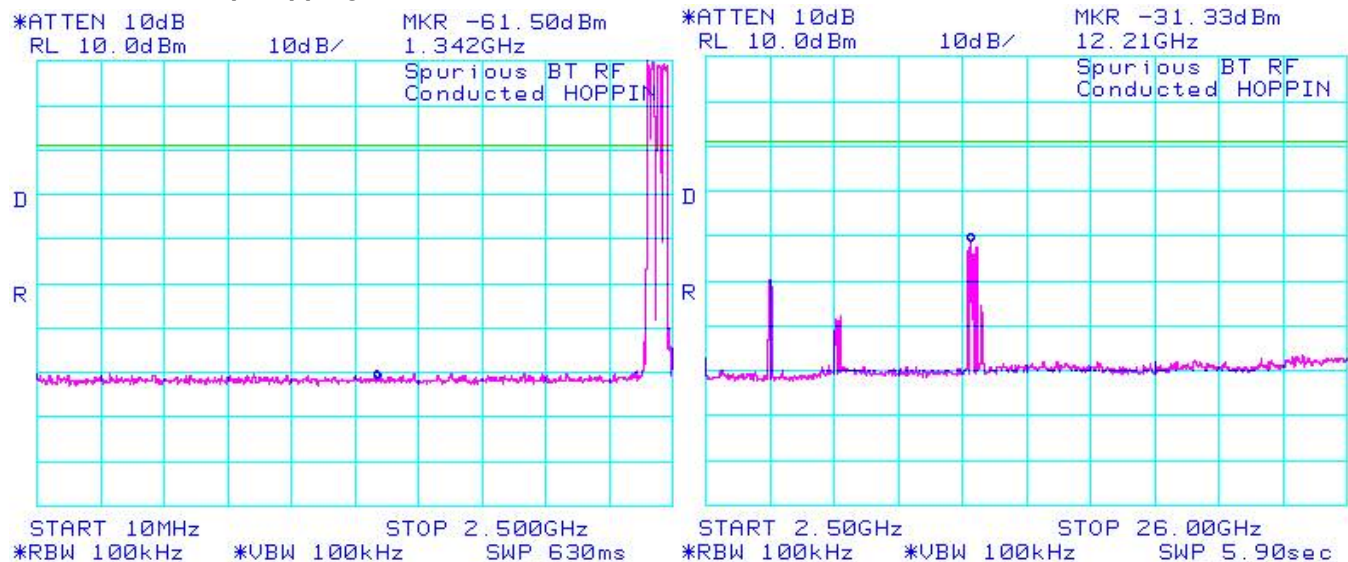

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 3	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

Bluetooth RF Conducted Emission Test Results cont'd

Using pattern type "Static PRBS" and packet type "3-DH5" during the measurements.

Bluetooth Channel	Channel Power (dBm)	Max. Measured Level (dBm)	Max. Measured Level from carrier (dBc)	Limit (dBc)
0	10.33	-42.00	52.33	-20
39	10.17	-38.83	49.00	-20
78	10.50	-38.38	48.88	-20
Hopping mode	10.17	-40.17	50.34	-20

See figures 3-40 to 3-43 for the plots of the spurious RF conducted emissions.

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 3	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

Bluetooth RF Conducted Emission Test Results cont'd

Figure 3-40 : Spurious RF Conducted Emissions

Single Freq., Static PBRS, 3-DH5


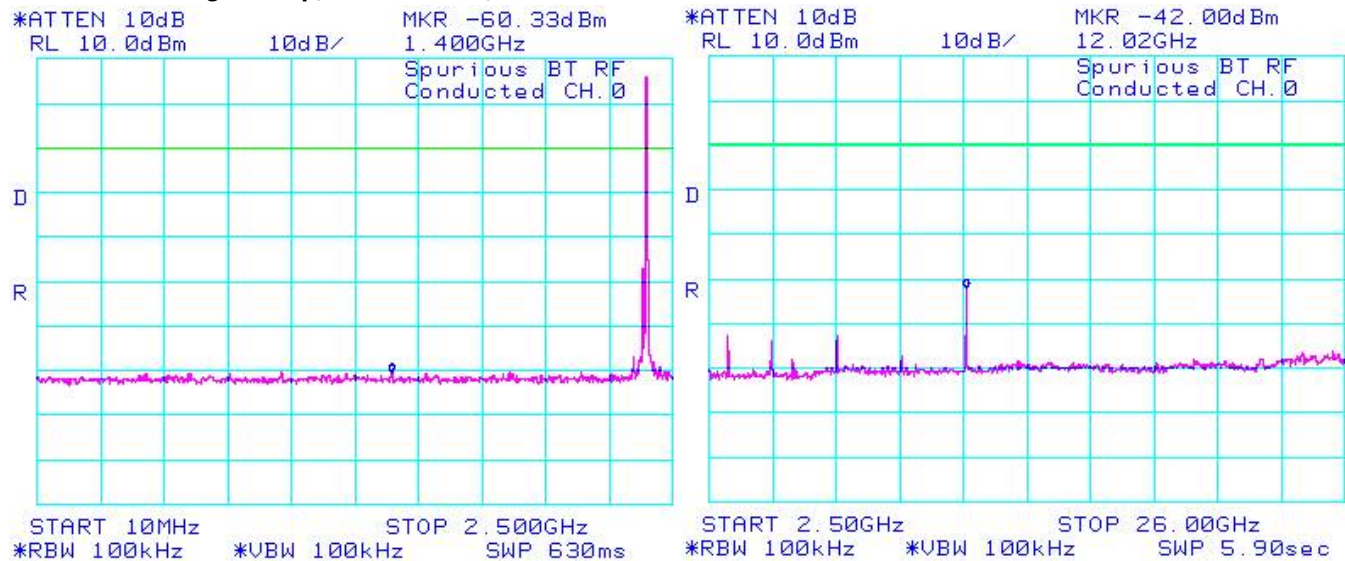


Figure 3-41: Spurious RF Conducted Emissions

Single Freq., Static PBRS, 3-DH5

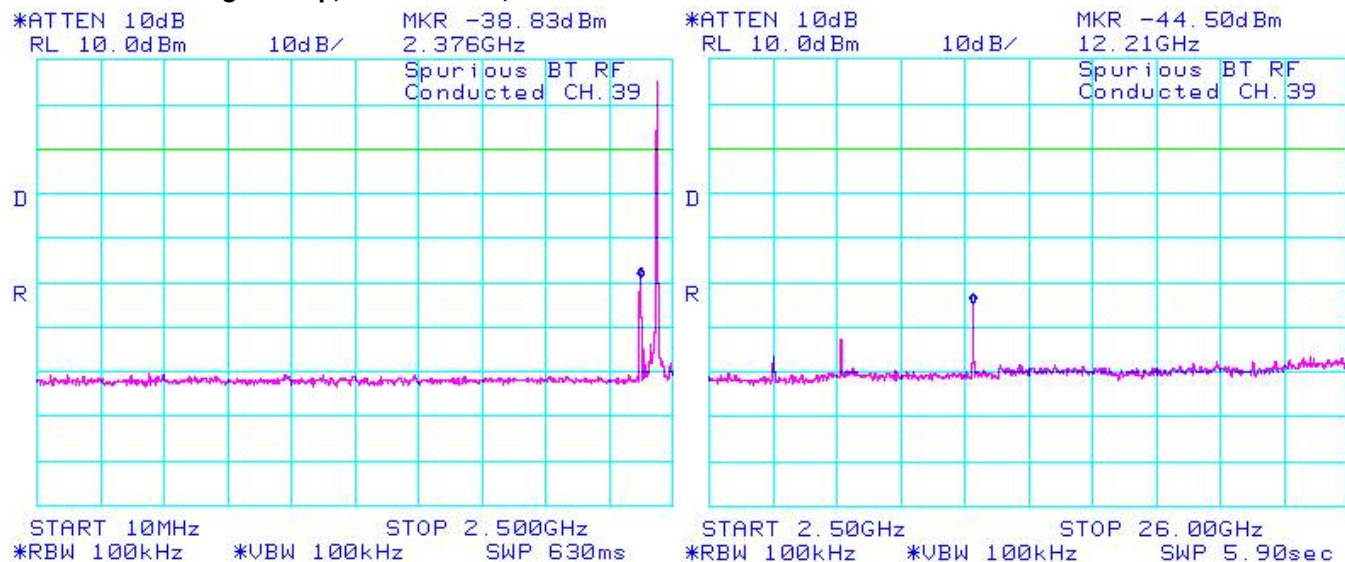

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 3	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

Bluetooth RF Conducted Emission Test Results cont'd

Figure 3-42: Spurious RF Conducted Emissions

Single Freq., Static PBRS, 3-DH5


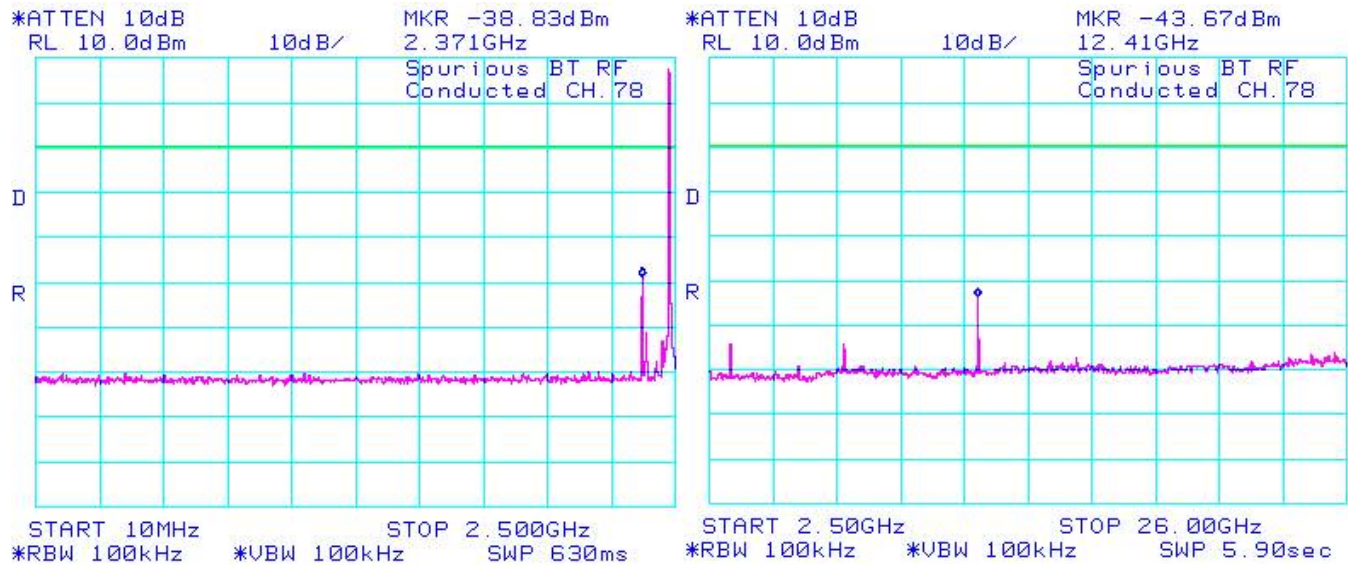


Figure 3-43 : Spurious RF Conducted Emissions

Freq. Hopping, Static PBRS, 3-DH5

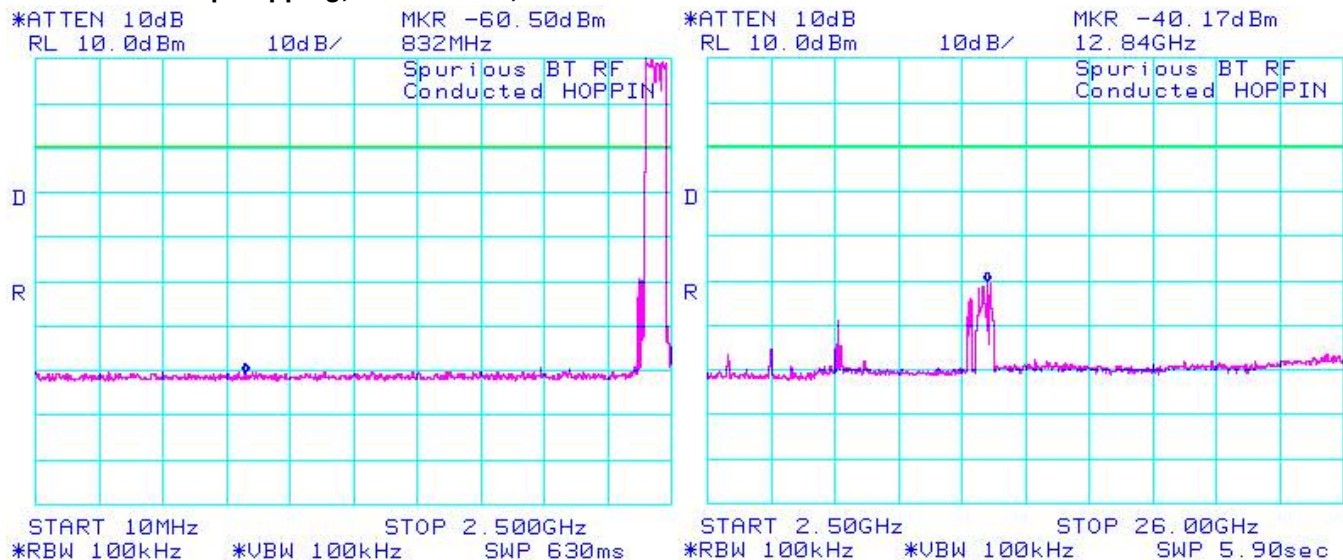

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 4	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

APPENDIX 4 – 802.11b/g/n CONDUCTED EMISSIONS TEST DATA/PLOTS


	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 4	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

802.11b/g/n RF Conducted Emission Test Results

802.11b/g/n Target Power Output for all the recorded measurements shown below:

Channel	Frequency	802.11b		802.11g		802.11n	
		Data Rate	Power output (dBm)	Data Rate	Power output (dBm)	Data Rate	Power output (dBm)
1	2412 MHz	1 Mbps	18.0	6 Mbps	14.0	MCS 0	15.0
		5.5 Mbps	18.0	24 Mbps	14.0	MCS 4	14.5
		11 Mbps	18.0	54 Mbps	13.0	MCS 7	12.0
6	2437 MHz	1 Mbps	18.0	6 Mbps	17.0	MCS 0	17.0
		5.5 Mbps	18.0	24 Mbps	14.5	MCS 4	14.5
		11 Mbps	18.0	54 Mbps	13.0	MCS 7	12.0
11	2462 MHz	1 Mbps	18.0	6 Mbps	14.0	MCS 0	15.0
		5.5 Mbps	18.0	24 Mbps	14.0	MCS 4	14.5
		11 Mbps	18.0	54 Mbps	13.0	MCS 7	12.0

Test Setup Diagram

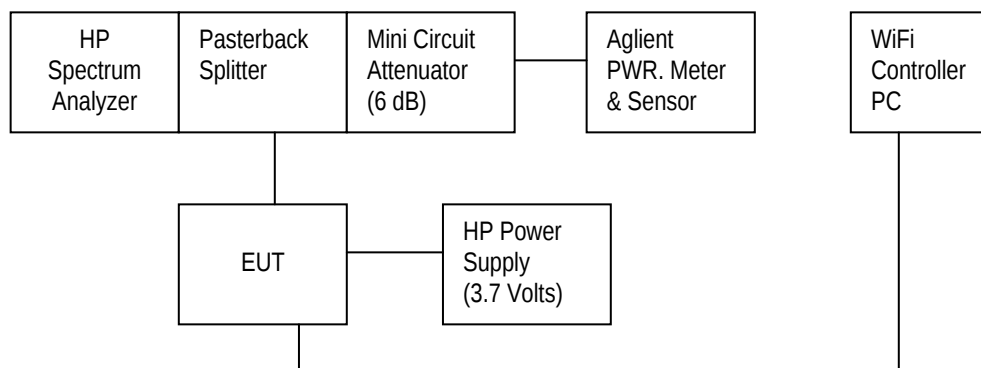

A reference offset of 20.4 dB was applied to the spectrum analyzer and 6.6 dB was applied to the Power Meter reference level for the attenuators and coaxial cable loss in the test circuit.

Date of test: February 02, 2010

The measurements on the BlackBerry® smartphone were performed by Maurice Battler.

The environmental test conditions were:

Temperature:	24 °C
Pressure:	1014 mb
Relative Humidity:	21 %

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 4	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

802.11b/g/n RF Conducted Emission Test Results cont'd

6 dB Bandwidth

The EUT met the requirements of the 6 dB bandwidth as per 47 CFR 15.247(a)(2) and RSS-210. Channels 1, 6 and 11 were measured at 1 Mbps, 5.5 Mbps, and 11Mbps each for 802.11b mode, 6 Mbps, 24 Mbps, and 54 Mbps each for 802.11g mode, and MCS 0, 4, and 7 for 802.11n mode.

Channel	Data Rate	Limit (kHz)	Measured Level (MHz)
1	1 Mbps	≥ 500	10.13
	5.5 Mbps	≥ 500	10.57
	11 Mbps	≥ 500	11.20
	6 Mbps	≥ 500	16.20
	24 Mbps	≥ 500	16.60
	54 Mbps	≥ 500	16.57
	MCS 0	≥ 500	17.67
	MCS 4	≥ 500	17.83
	MCS 7	≥ 500	17.70
6	1 Mbps	≥ 500	10.13
	5.5 Mbps	≥ 500	10.67
	11 Mbps	≥ 500	10.57
	6 Mbps	≥ 500	16.40
	24 Mbps	≥ 500	16.57
	54 Mbps	≥ 500	16.60
	MCS 0	≥ 500	17.07
	MCS 4	≥ 500	17.80
	MCS 7	≥ 500	17.77
11	1 Mbps	≥ 500	10.13
	5.5 Mbps	≥ 500	11.10
	11 Mbps	≥ 500	10.53
	6 Mbps	≥ 500	16.37
	24 Mbps	≥ 500	16.53
	54 Mbps	≥ 500	16.60
	MCS 0	≥ 500	17.77
	MCS 4	≥ 500	17.80
	MCS 7	≥ 500	17.73

This report shall **NOT** be reproduced except in full without the written consent of RIM Testing Services
- A division of Research in Motion Limited.

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 4	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

802.11b/g/n RF Conducted Emission Test Results cont'd

See figures 4-1 to 4-9 for the plots of the 6 dB bandwidth measurements for Channels 1, 6, and 11, at 1 Mbps each for 802.11b mode, 6 Mbps each for 802.11g mode, and MCS 0 each for 802.11n mode.

Figure 4-1: 6 dB Bandwidth

802.11b, Channel 1, 1 Mbps

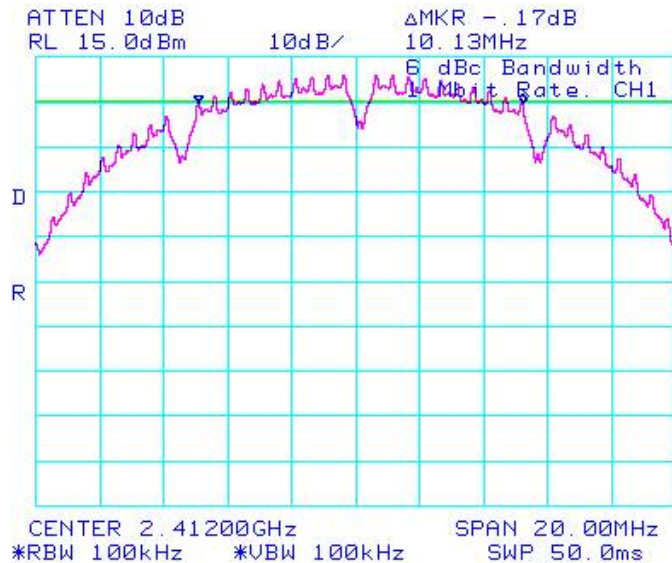


Figure 4-2: 6 dB Bandwidth

802.11b, Channel 6, 1 Mbps

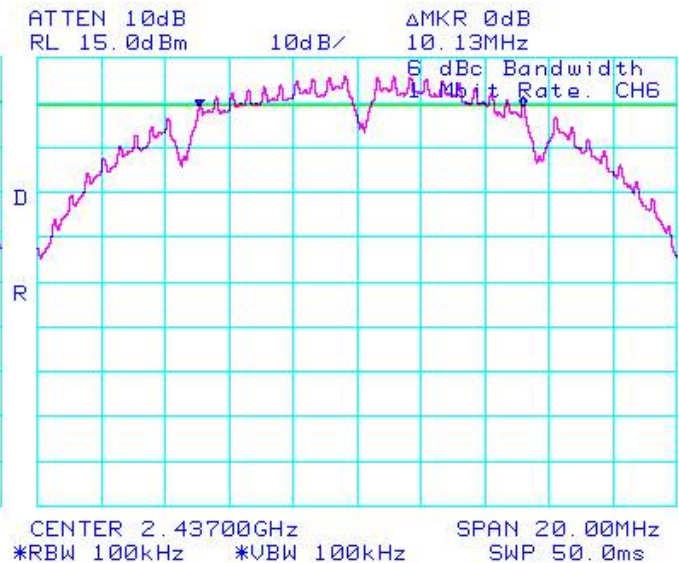


Figure 4-3: 6 dB Bandwidth

802.11b, Channel 11, 1 Mbps


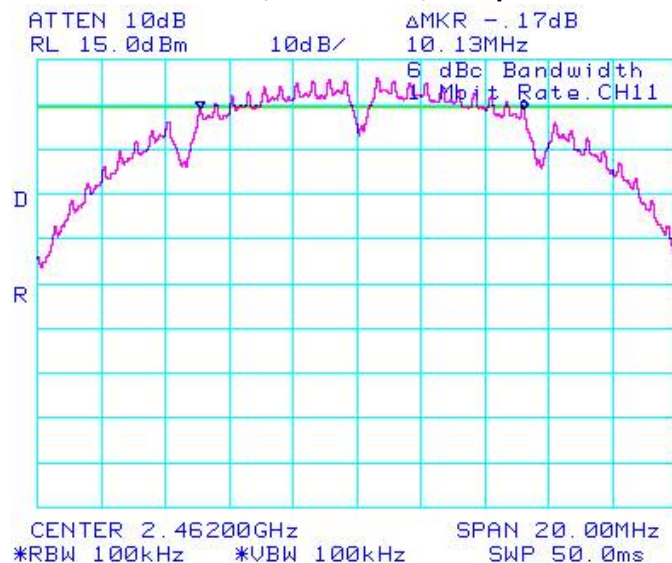


Figure 4-4: 6 dB Bandwidth

802.11g, Channel 1, 6 Mbps

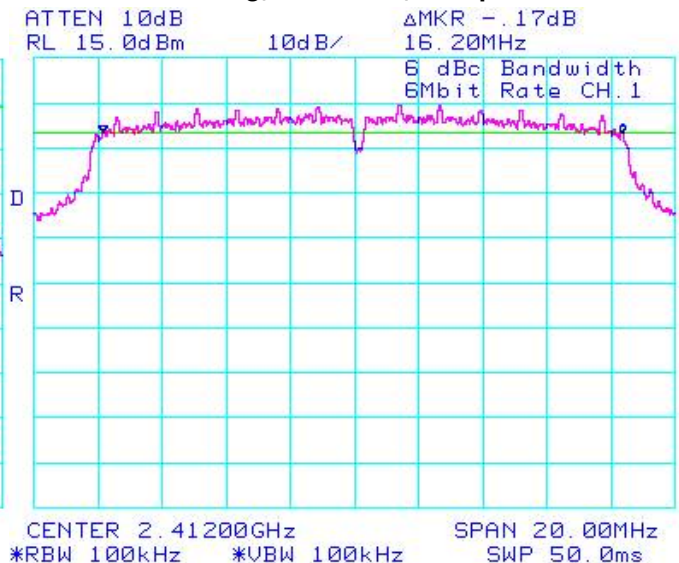

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 4	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

802.11b/g/n RF Conducted Emission Test Results cont'd

Figure 4-5: 6 dB Bandwidth

802.11g, Channel 6, 6 Mbps

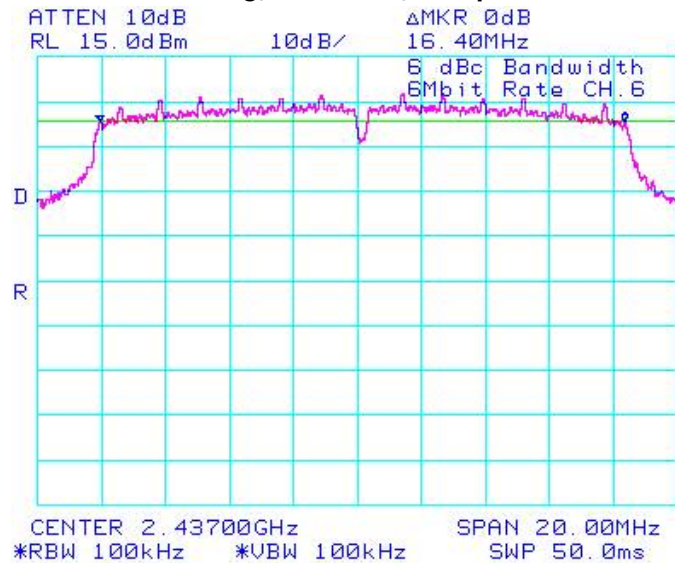


Figure 4-6: 6 dB Bandwidth

802.11g, Channel 11, 6 Mbps

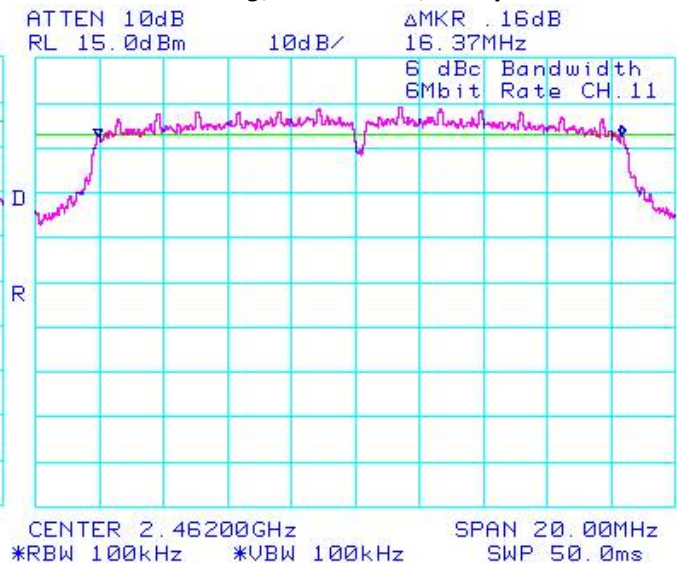


Figure 4-7: 6 dB Bandwidth

802.11n, Channel 1, MCS 0


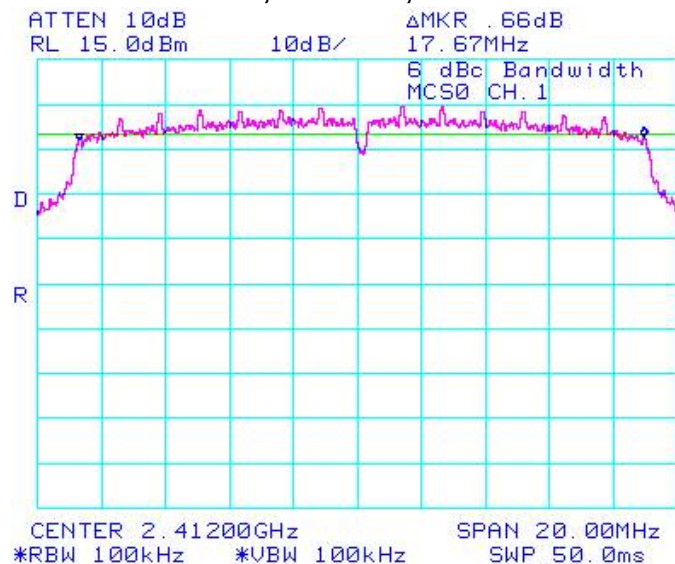



Figure 4-8: 6 dB Bandwidth

802.11n, Channel 6, MCS 0

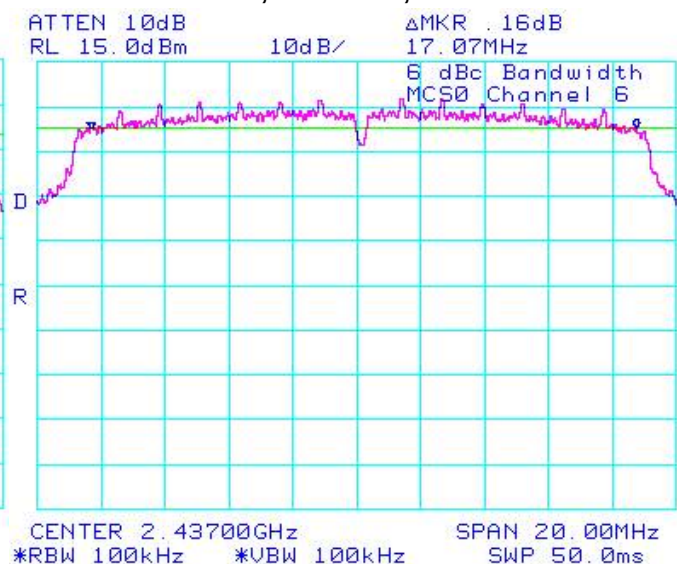

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 4	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

Figure 4-9: 6 dB Bandwidth

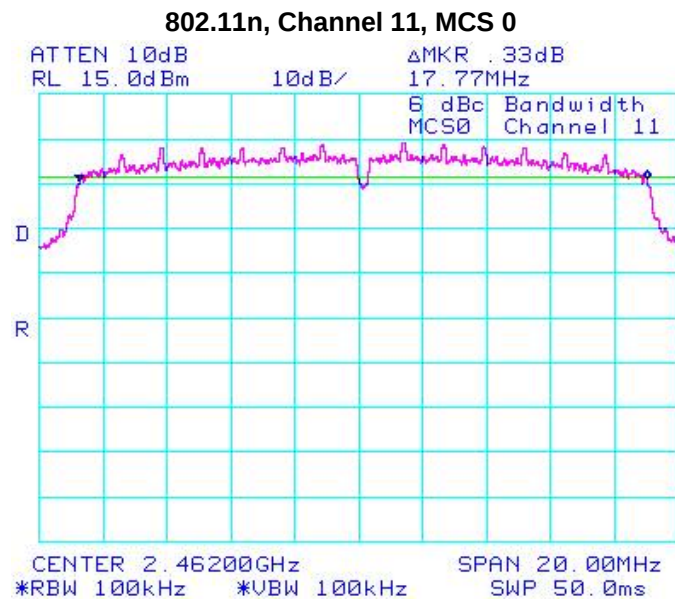

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 4	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

802.11b/g/n RF Conducted Emission Test Results cont'd

Maximum Conducted Output Power

The EUT met the requirements of the maximum conducted output power of class 2 as per 47 CFR 15.247(b)(3) and RSS-210. Channels 1, 6 and 11 were measured at 1 Mbps, 5.5 Mbps, and 11 Mbps each for 802.11b mode, 6 Mbps, 24 Mbps, and 54 Mbps each for 802.11g mode, and MCS 0, 4 and 7 for 802.11n mode using an Aglient power meter, model N1911A with model N1921A power sensor. A reference offset of 18.4 dB was applied to the power meter reference level for the coaxial cable loss and attenuators in the test circuit.

Channel	Data Rate	Class 2 Limit (W)	Measured Level (dBm)	Measured Level (mW)
1	1 Mbps	< 1.00	17.72	59.16
	5.5 Mbps	< 1.00	17.67	58.48
	11 Mbps	< 1.00	17.67	58.48
	6 Mbps	< 1.00	14.87	30.69
	24 Mbps	< 1.00	14.20	26.30
	54 Mbps	< 1.00	12.50	17.78
	MCS 0	< 1.00	14.72	29.65
	MCS 4	< 1.00	14.78	30.06
	MCS 7	< 1.00	11.90	15.49
6	1 Mbps	< 1.00	17.65	58.21
	5.5 Mbps	< 1.00	17.60	57.54
	11 Mbps	< 1.00	17.58	57.28
	6 Mbps	< 1.00	17.17	52.12
	24 Mbps	< 1.00	14.02	25.23
	54 Mbps	< 1.00	13.01	20.00
	MCS 0	< 1.00	17.05	50.70
	MCS 4	< 1.00	14.81	30.27
	MCS 7	< 1.00	11.90	15.49

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 4	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

802.11b/g/n RF Conducted Emission Test Results cont'd

Channel	Data Rate	Class 2 Limit (W)	Measured Level (dBm)	Measured Level (mW)
11	1 Mbps	< 1.00	17.52	56.49
	5.5 Mbps	< 1.00	17.46	55.72
	11 Mbps	< 1.00	17.50	56.23
	6 Mbps	< 1.00	14.95	31.26
	24 Mbps	< 1.00	14.05	25.41
	54 Mbps	< 1.00	13.04	20.14
	MCS 0	< 1.00	14.79	30.13
	MCS 4	< 1.00	14.80	30.20
	MCS 7	< 1.00	11.10	12.88

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 4	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

802.11b/g/n RF Conducted Emission Test Results cont'd

Band Edge Compliance

The EUT met the requirements of the band edge compliance as per 47 CFR 15.247(c) and RSS-210. Channels 1 and 11 were measured at 1 Mbps, 5.5 Mbps, and 11 Mbps each for 802.11b mode, 6 Mbps, 24 Mbps, and 54 Mbps each for 802.11g mode, and MCS 0, 4 and 7 for 802.11n mode.

Channel	Data Rate	Limit (dBc)	Measured Level (dBc)	Margin (dBc)
1	1 Mbps	< -20	-39.34	-19.34
	5.5 Mbps	< -20	-41.38	-21.38
	11 Mbps	< -20	-40.17	-20.17
	6 Mbps	< -20	-25.66	-5.66
	24 Mbps	< -20	-26.66	-6.66
	54 Mbps	< -20	-29.00	-9.00
	MCS 0	< -20	-24.84	-4.84
	MCS 4	< -20	-26.50	-6.50
	MCS 7	< -20	-28.00	-8.00
11	1 Mbps	< -20	-41.50	-21.50
	5.5 Mbps	< -20	-46.33	-26.33
	11 Mbps	< -20	-45.67	-25.67
	6 Mbps	< -20	-37.50	-17.50
	24 Mbps	< -20	-39.17	-19.17
	54 Mbps	< -20	-37.50	-17.50
	MCS 0	< -20	-37.50	-17.50
	MCS 4	< -20	-39.17	-19.17
	MCS 7	< -20	-40.17	-20.17

See figures 4-10 to 4-15 for the plots of the band edge compliance measurements for Channels 1 and 11, at 1 Mbps each for 802.11b mode, 6 Mbps each for 802.11g mode, and MCS 0 each for 802.11n mode.

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 4	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

802.11b/g/n RF Conducted Emission Test Results cont'd

Figure 4-10: Band Edge Compliance

802.11b, Channel 1, 1 Mbps

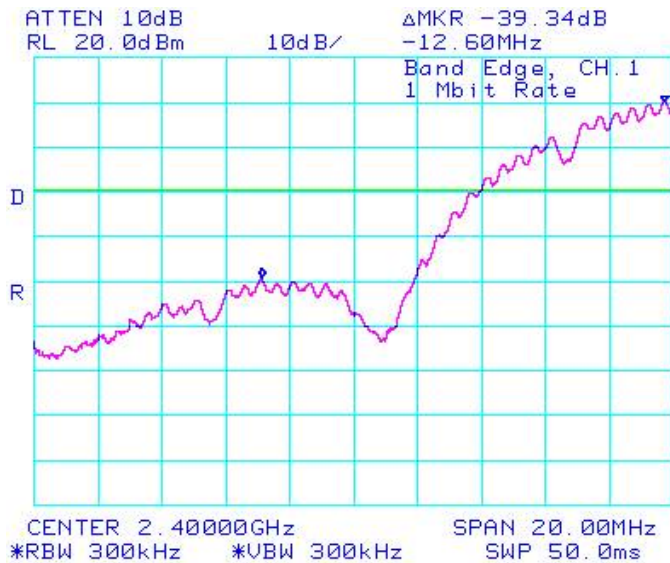


Figure 4-11: Band Edge Compliance

802.11b, Channel 11, 1 Mbps

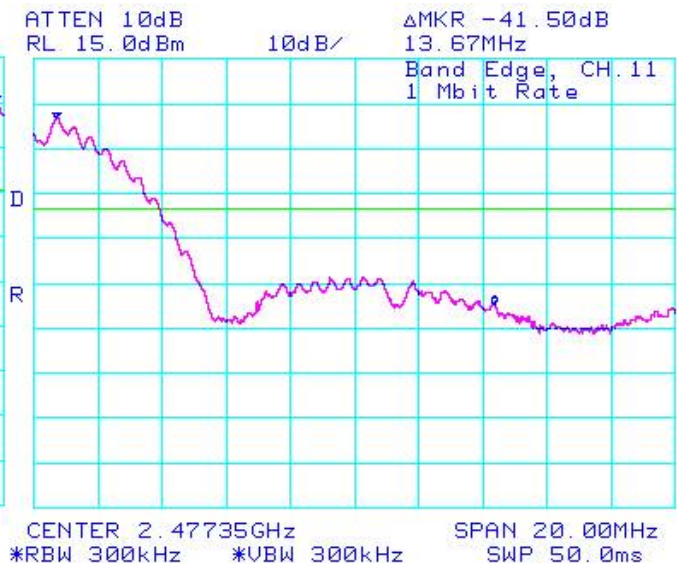


Figure 4-12: Band Edge Compliance

802.11g, Channel 1, 6 Mbps


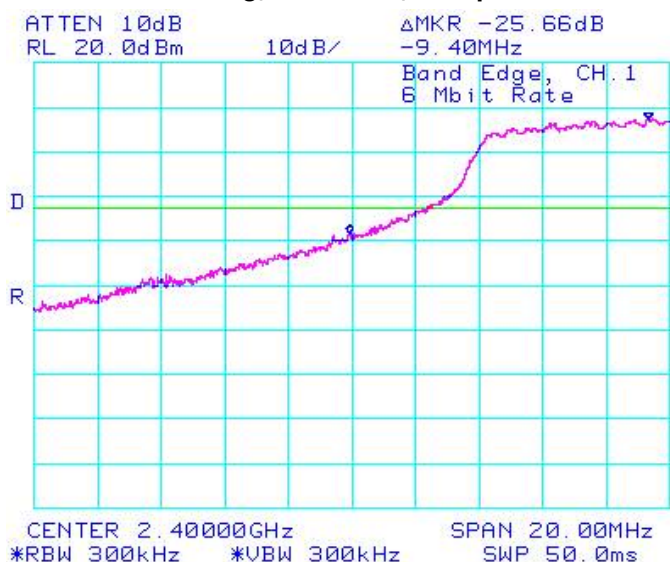


Figure 4-13: Band Edge Compliance

802.11g, Channel 11, 6 Mbps

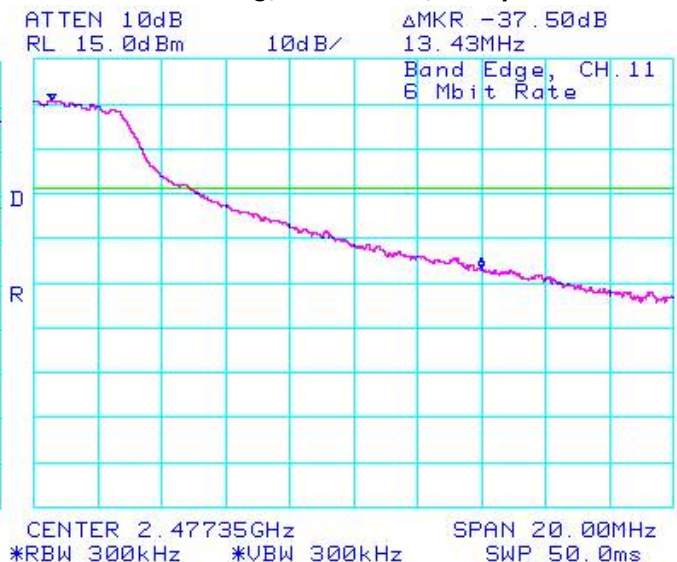

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 4	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

802.11b/g/n RF Conducted Emission Test Results cont'd

Figure 4-14: Band Edge Compliance

802.11n, Channel 1, MCS 0


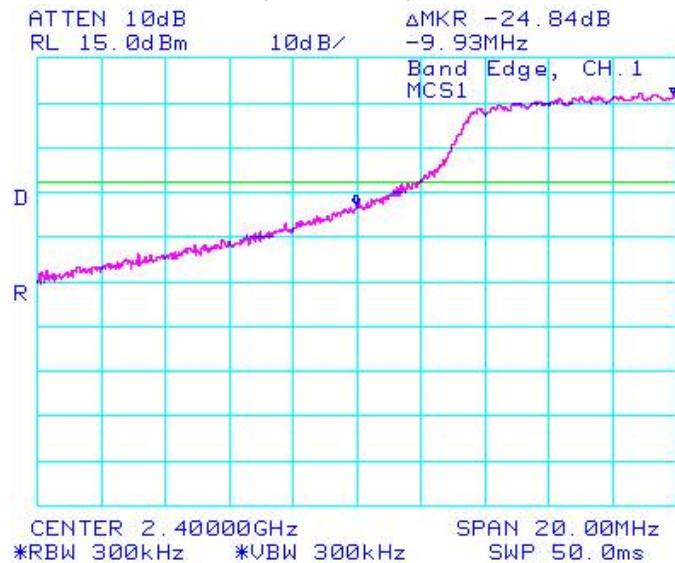


Figure 4-15: Band Edge Compliance

802.11n, Channel 11, MCS 0

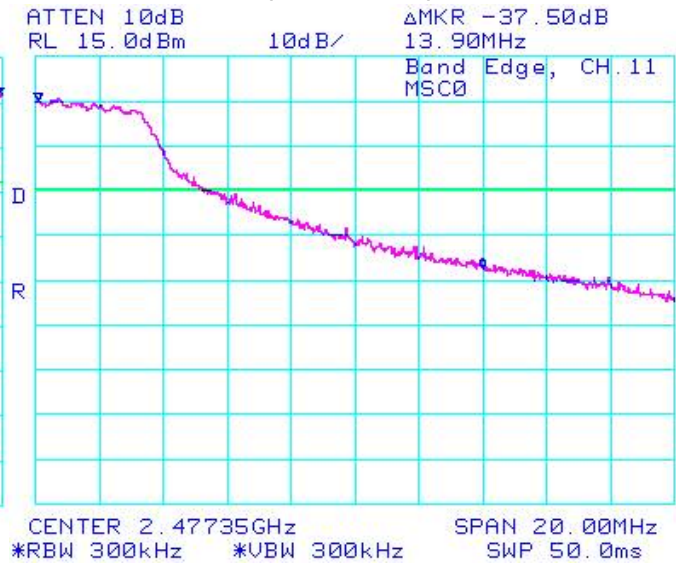

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 4	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

802.11b/g/n RF Conducted Emission Test Results cont'd

Peak Power Spectral Density

The EUT met the requirements of the peak power spectral density as per 47 CFR 15.247(d) and RSS-210. Channels 1, 6 and 11 were measured at 1 Mbps, 5.5 Mbps, and 11 Mbps each for 802.11b mode, 6 Mbps, 24 Mbps, and 54 Mbps each for 802.11g mode, and MCS 0, 4, and 7 for 802.11n mode.

Channel	Data Rate	Limit (dBm)	Measured Level (dBm)	Margin (dBm)
1	1 Mbps	< 8.00	-2.33	-10.33
	5.5 Mbps	< 8.00	-3.83	-11.83
	11 Mbps	< 8.00	-3.00	-11.00
	6 Mbps	< 8.00	-8.33	-16.33
	24 Mbps	< 8.00	-7.83	-15.83
	54 Mbps	< 8.00	-9.33	-17.33
	MCS 0	< 8.00	-7.50	-15.50
	MCS 4	< 8.00	-8.50	-16.50
	MCS 7	< 8.00	-10.83	-18.83
6	1 Mbps	< 8.00	-2.17	-10.17
	5.5 Mbps	< 8.00	-4.00	-12.00
	11 Mbps	< 8.00	-3.33	-11.33
	6 Mbps	< 8.00	-6.17	-14.17
	24 Mbps	< 8.00	-8.00	-16.00
	54 Mbps	< 8.00	-10.50	-18.50
	MCS 0	< 8.00	-5.67	-13.67
	MCS 4	< 8.00	-8.50	-16.50
	MCS 7	< 8.00	-11.00	-19.00
11	1 Mbps	< 8.00	-2.67	-10.67
	5.5 Mbps	< 8.00	-4.33	-12.33
	11 Mbps	< 8.00	-3.67	-11.67
	6 Mbps	< 8.00	-9.00	-17.00
	24 Mbps	< 8.00	-8.67	-16.67
	54 Mbps	< 8.00	-10.33	-18.33
	MCS 0	< 8.00	-8.33	-16.33
	MCS 4	< 8.00	-8.83	-16.83
	MCS 7	< 8.00	-11.50	-19.50

This report shall **NOT** be reproduced except in full without the written consent of RIM Testing Services
- A division of Research in Motion Limited.

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 4	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

802.11b/g/n RF Conducted Emission Test Results cont'd

See figures 4-16 to 4-24 for the plots of the peak power spectral density for Channels 1, 6 and 11, at 1 Mbps each for 802.11b mode, 6 Mbps each for 802.11g mode, and MCS 0 for 802.11n mode.

Figure 4-16: Peak Power Spectral Density

802.11b, Channel 1, 1 Mbps

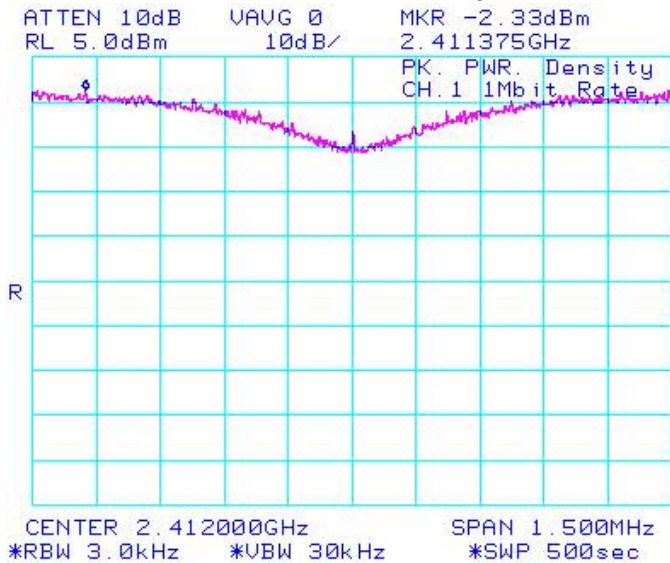


Figure 4-17: Peak Power Spectral Density

802.11b, Channel 6, 1 Mbps


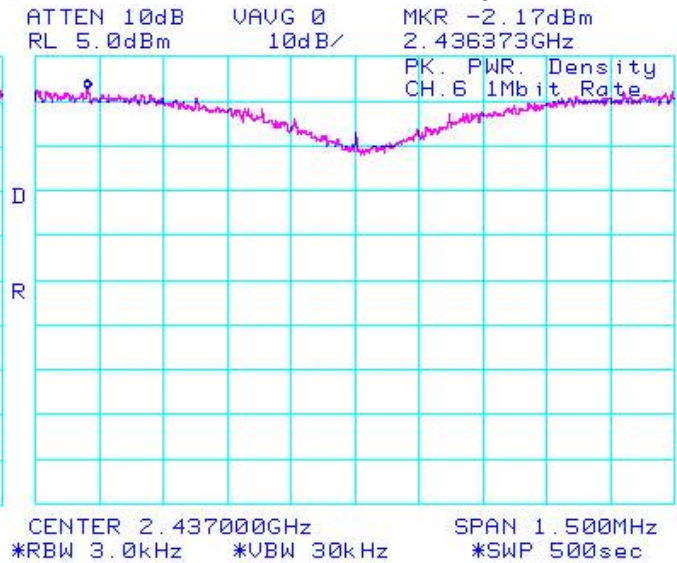


Figure 4-18: Peak Power Spectral Density

802.11b, Channel 11, 1 Mbps

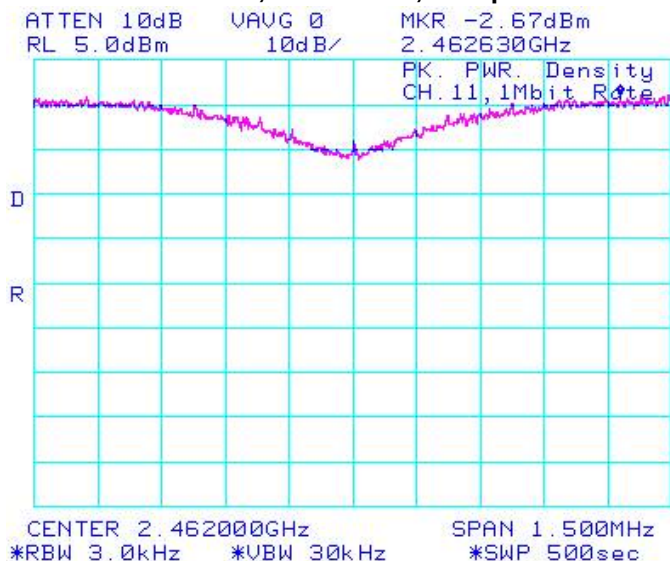

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 4	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

802.11b/g/n RF Conducted Emission Test Results cont'd

Figure 4-19: Peak Power Spectral Density
802.11g, Channel 1, 6 Mbps

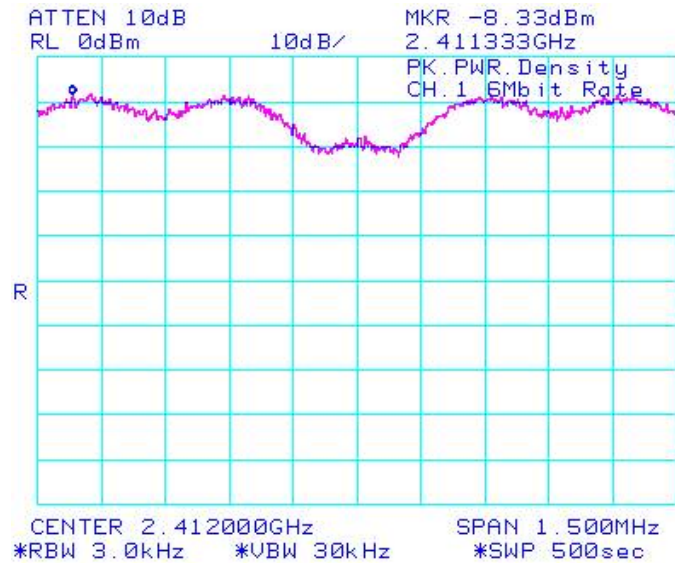


Figure 4-20: Peak Power Spectral Density
802.11g, Channel 6, 6 Mbps


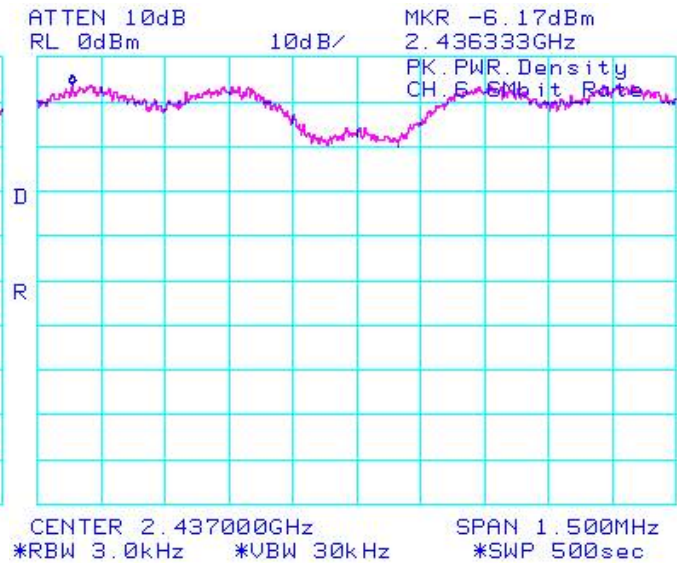


Figure 4-21: Peak Power Spectral Density
802.11g, Channel 11, 6 Mbps

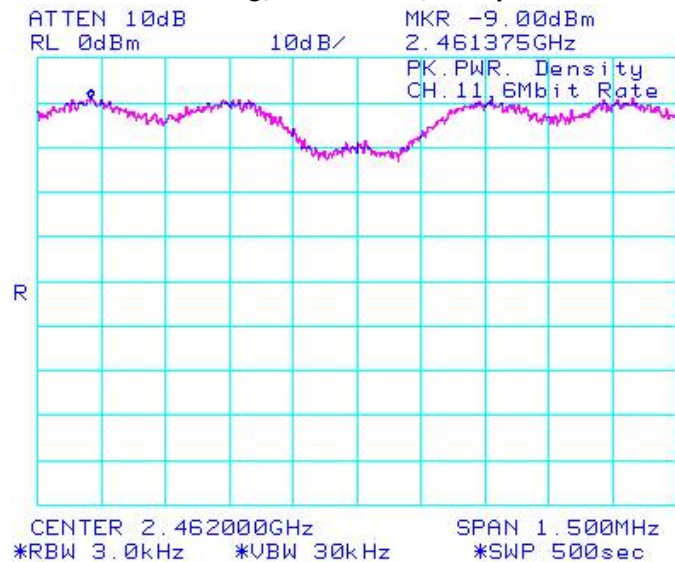

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 4	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

802.11b/g/n RF Conducted Emission Test Results cont'd

Figure 4-22: Peak Power Spectral Density
802.11n, Channel 1, MCS 0

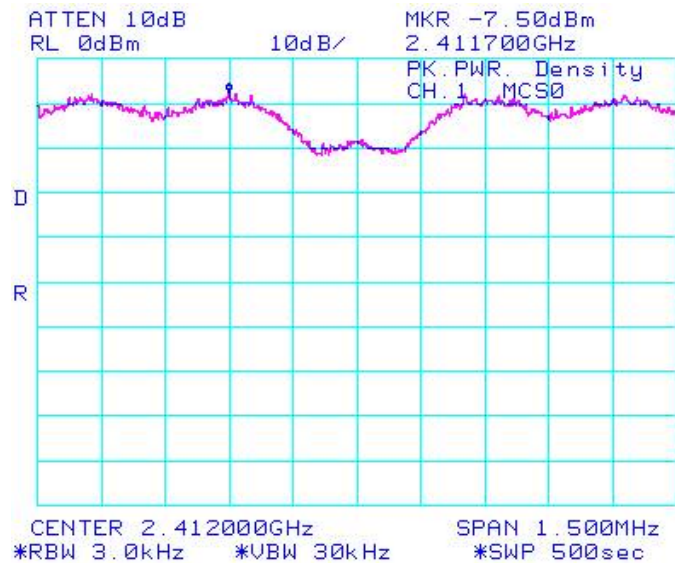


Figure 4-23: Peak Power Spectral Density
802.11n, Channel 6, MCS 0


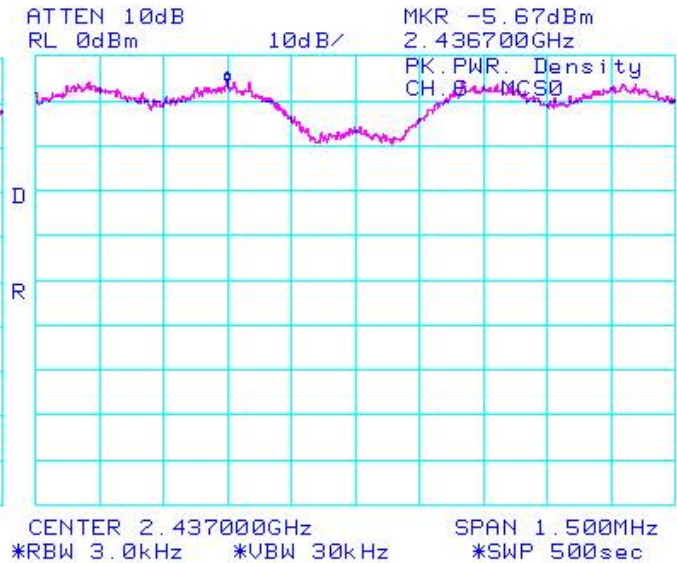


Figure 4-24: Peak Power Spectral Density
802.11n, Channel 11, MCS 0

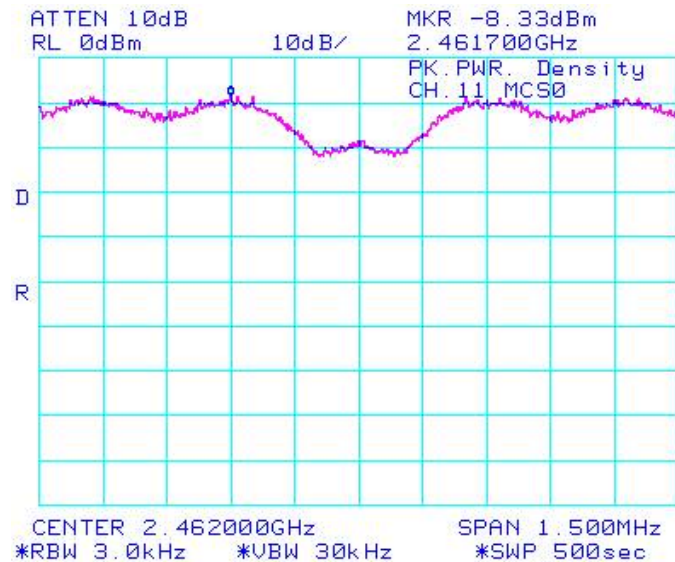

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 4	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

802.11b/g/n RF Conducted Emission Test Results cont'd

Spurious RF Conducted Emissions

The EUT met the requirements of the spurious RF conducted emissions as per 47 CFR 15.247(c) and RSS-210. Channels 1, 6 and 11 were measured at 1 Mbps, 5.5 Mbps, and 11 Mbps each for 802.11b mode, 6 Mbps, 24 Mbps, and 54 Mbps each for 802.11g mode, and MCS 0, 4, and 7 for 802.11n mode. Peak power was measured using an Agilent power meter, model N1911A with model N1921A power sensor. A reference offset of 18.4 dB was applied to the power meter reference level for the coaxial cable loss and attenuators in the test circuit.

Channel	Data Rate	Power (dBm)	Max. Measured Level (dBm)	Max. Measured Level from Carrier (dBc)	Limit (dBc)
1	1 Mbps	17.72	-45.50	-63.22	-20
	5.5 Mbps	17.67	-42.33	-60.00	-20
	11 Mbps	17.67	-43.83	-61.50	-20
	6 Mbps	14.87	-45.67	-60.54	-20
	24 Mbps	14.20	-46.67	-60.87	-20
	54 Mbps	12.50	-47.83	-60.33	-20
	MCS 0	14.72	-46.33	-61.05	-20
	MCS 4	14.78	-46.83	-61.61	-20
	MCS 7	11.90	-49.00	-60.90	-20
6	1 Mbps	17.65	-49.67	-67.32	-20
	5.5 Mbps	17.60	-46.33	-63.93	-20
	11 Mbps	17.58	-45.00	-62.58	-20
	6 Mbps	17.17	-49.83	-67.00	-20
	24 Mbps	14.02	-47.33	-61.35	-20
	54 Mbps	13.01	-48.17	-61.18	-20
	MCS 0	17.05	-47.67	-64.72	-20
	MCS 4	14.81	-47.33	-62.14	-20
	MCS 7	11.90	-48.50	-60.40	-20

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 4	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

802.11b/g/n RF Conducted Emission Test Results cont'd

Channel	Data Rate	Power (dBm)	Max. Measured Level (dBm)	Max. Measured Level from Carrier (dBc)	Limit (dBc)
11	1 Mbps	17.52	-46.00	-63.52	-20
	5.5 Mbps	17.46	-48.00	-65.46	-20
	11 Mbps	17.50	-45.67	-63.17	-20
	6 Mbps	14.95	-49.17	-64.12	-20
	24 Mbps	14.05	-48.67	-62.72	-20
	54 Mbps	13.04	-49.50	-62.54	-20
	MCS 0	14.79	-49.83	-64.62	-20
	MCS 4	14.80	-48.00	-62.80	-20
	MCS 7	11.10	-49.83	-60.93	-20

The emissions were in the NF.

See figures 4-25 to 4-33 for the plots of the spurious RF conducted emissions for Channels 1, 6 and 11, at 1 Mbps each for 802.11b mode, 6 Mbps each for 802.11g mode, and MCS 0 each for 802.11n mode.

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 4	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

802.11b/g/n RF Conducted Emission Test Results cont'd

Figure 4-25: Spurious Conducted RF Emissions

802.11b, Channel 1, 1 Mbps


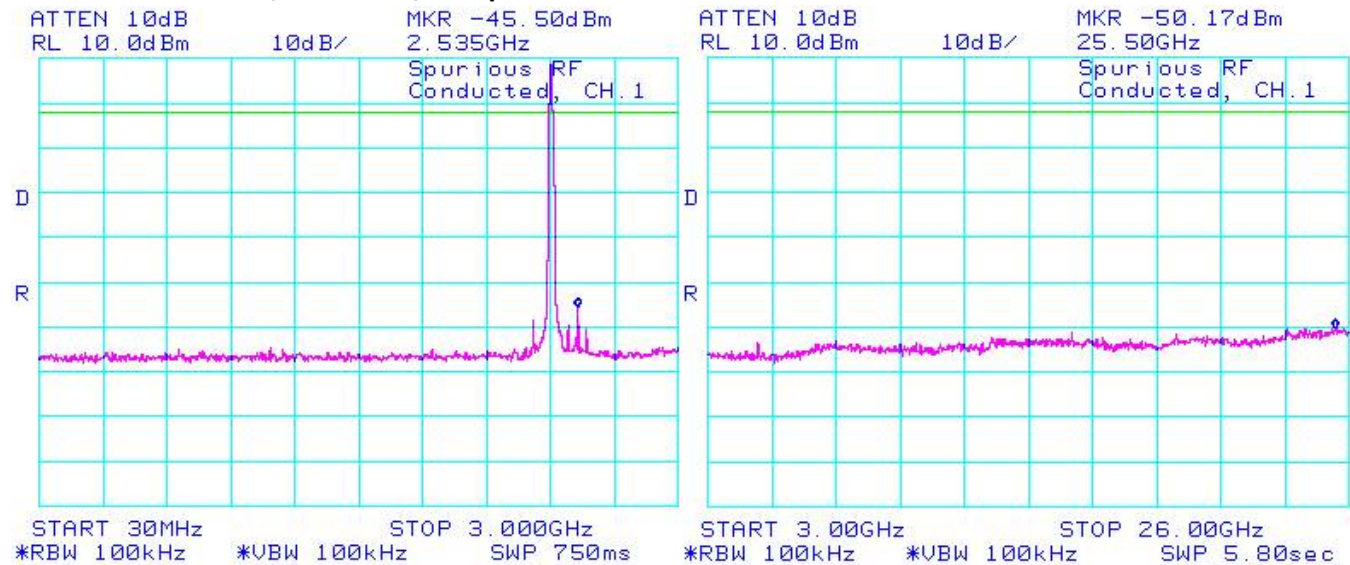


Figure 4-26 : Spurious Conducted RF Emissions

802.11b, Channel 6, 1 Mbps

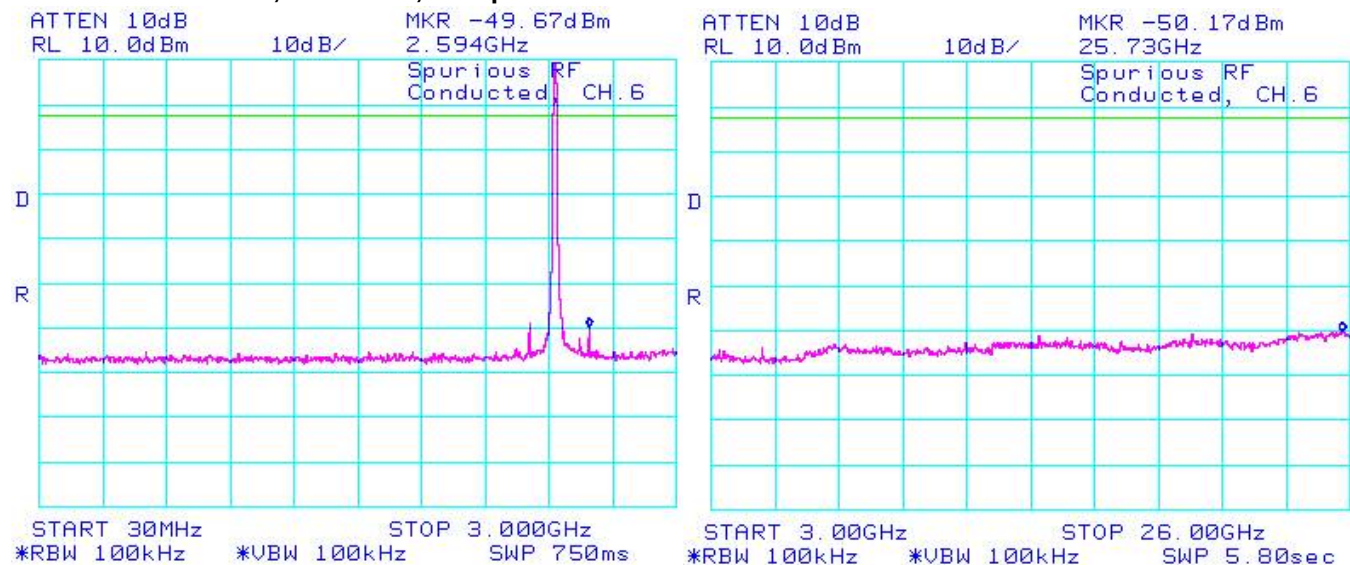

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 4	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

802.11b/g/n RF Conducted Emission Test Results cont'd

Figure 4-27: Spurious Conducted RF Emissions

802.11b, Channel 11, 1 Mbps


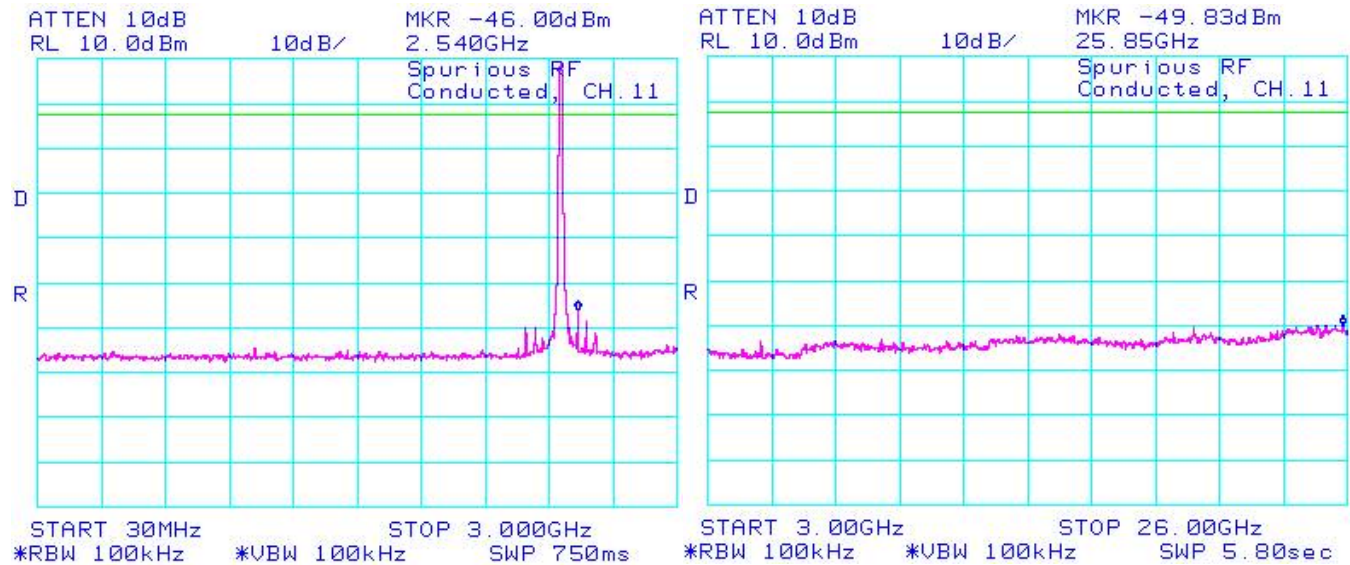


Figure 4-28: Spurious Conducted RF Emissions

802.11g, Channel 1, 6 Mbps

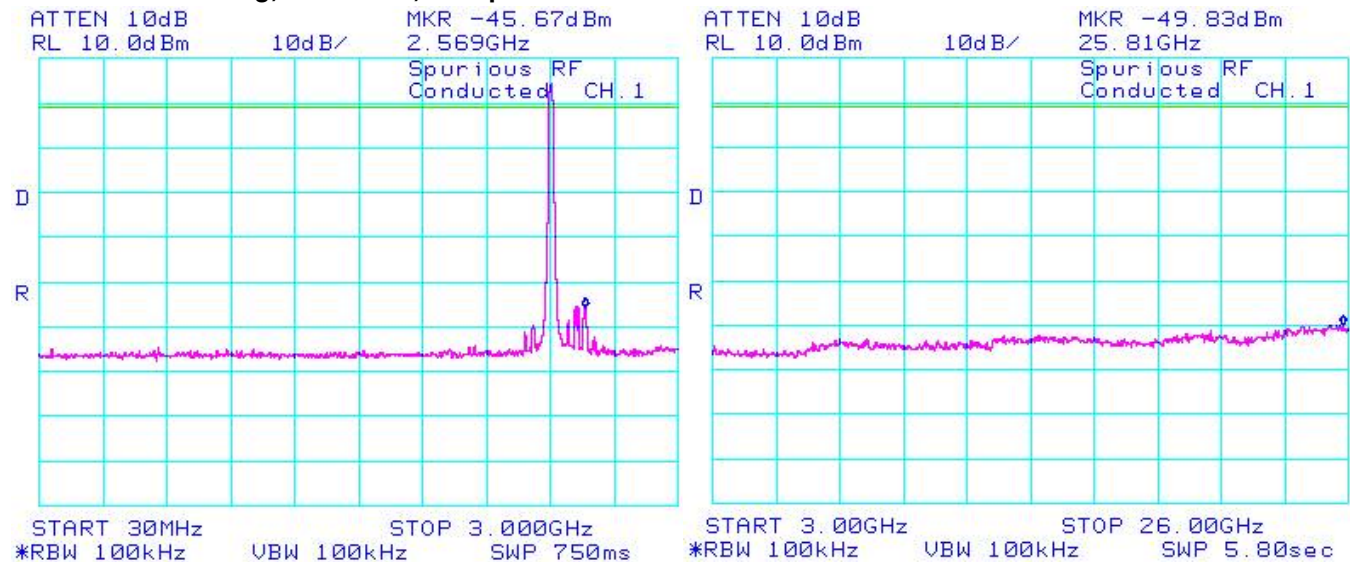

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 4	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

802.11b/g/n RF Conducted Emission Test Results cont'd

Figure 4-29: Spurious Conducted RF Emissions
802.11g, Channel 6, 6 Mbps


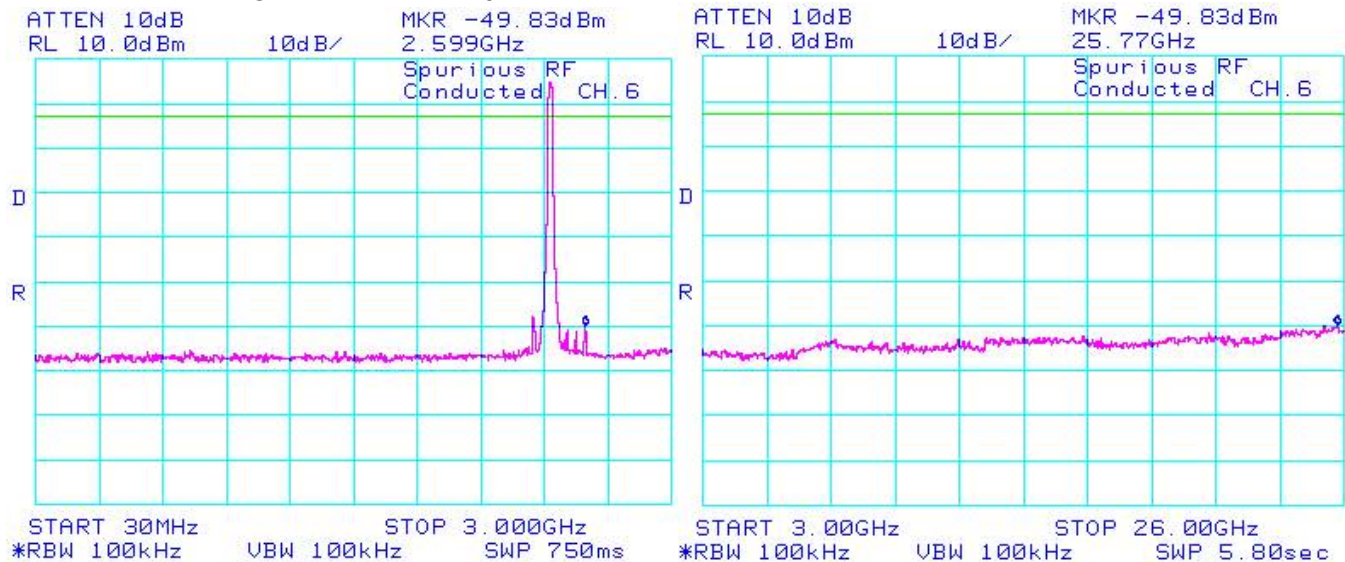



Figure 4-30: Spurious Conducted RF Emissions
802.11g, Channel 11, 6 Mbps

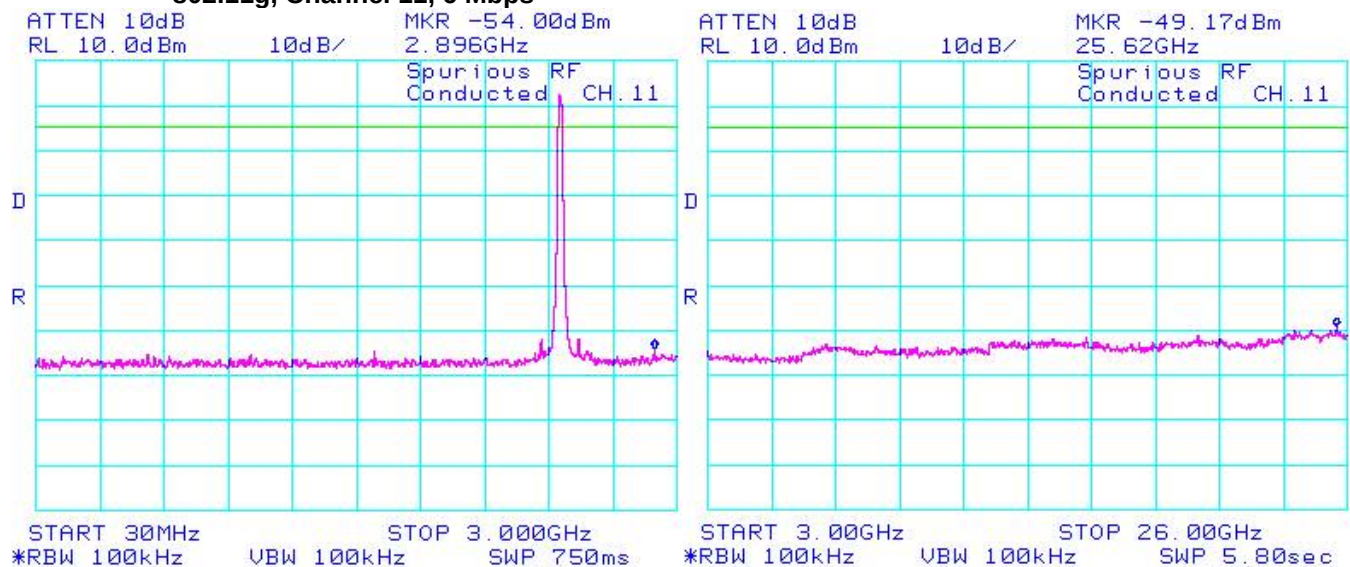


	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 4	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

802.11b/g/n RF Conducted Emission Test Results cont'd

**Figure 4-31: Spurious Conducted RF Emissions
802.11n, Channel 1, MCS 0**

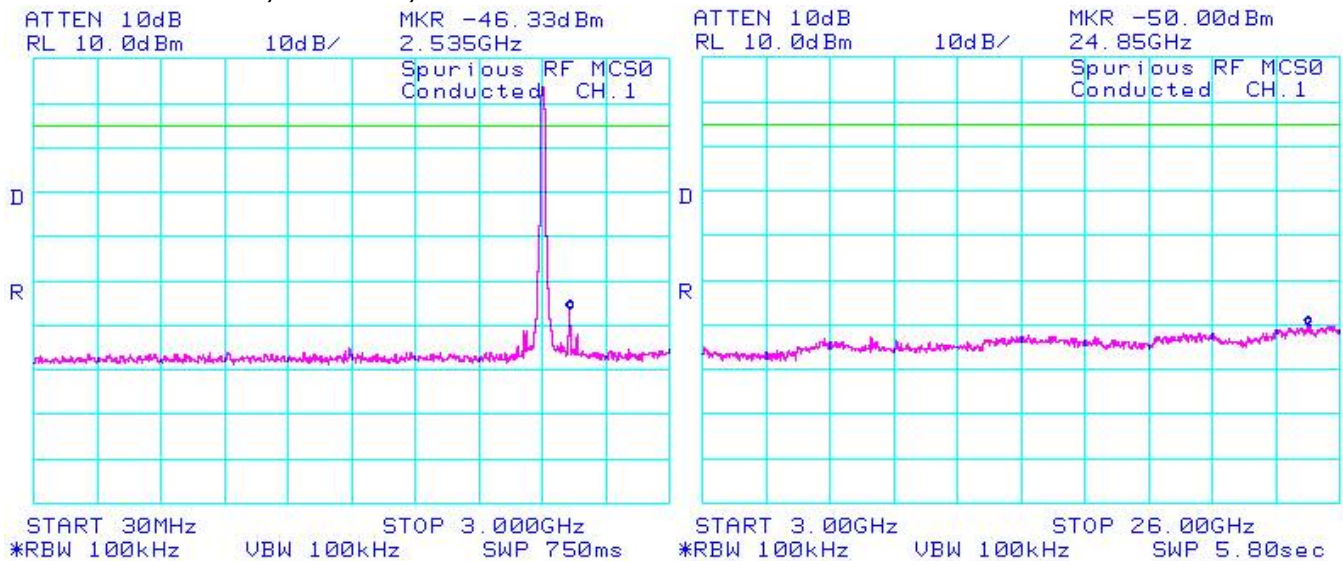

**Figure 4-32: Spurious Conducted RF Emissions
802.11n, Channel 6, MCS 0**

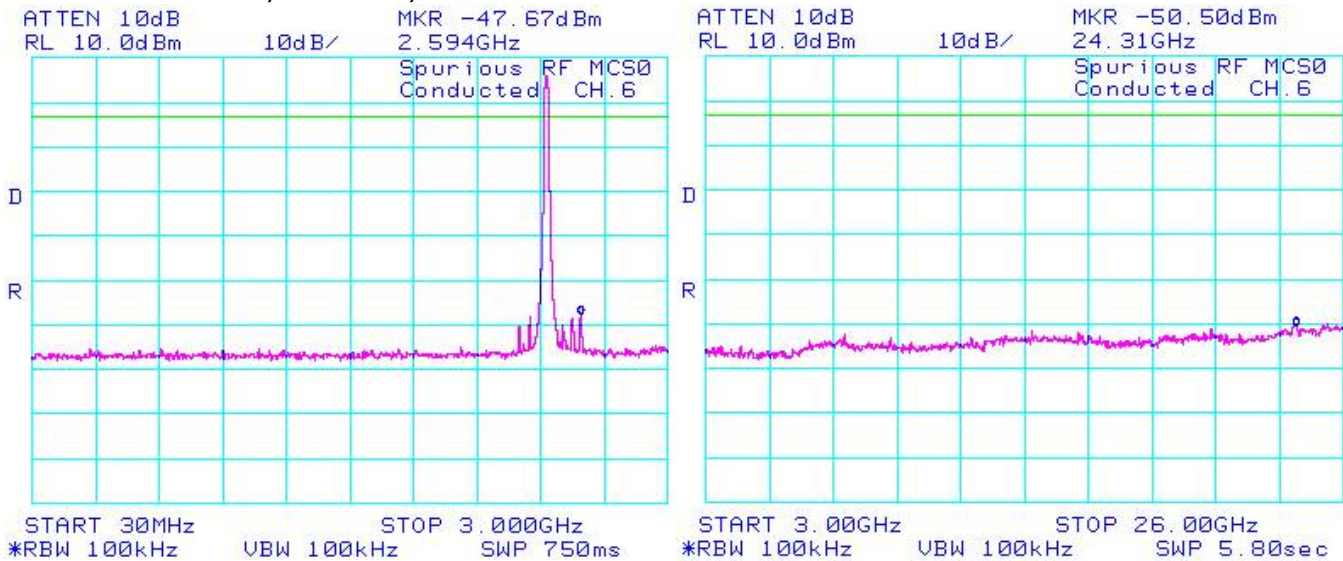

	EMI Test Report for the BlackBerry® smartphone Model RCX71UW APPENDIX 4	
Test Report No. RTS-2474-1001-38	Dates of Test January 27 to March 23 & April 20-22, 2010	Author Data Michael Cino

802.11b/g/n RF Conducted Emission Test Results cont'd

Figure 4-33: Spurious Conducted RF Emissions
802.11n, Channel 11, MCS 0

