

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 1(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

APPENDIX B: SAR DISTRIBUTION PLOTS FOR HEAD CONFIGURATION

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 2(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

Date/Time: 7/27/2010 1:45:07 PM

Test Laboratory: RIM Testing Services

RightHandSide_EDGE850_mid_chan_Amb_Tem_22.9_Liq_Tem_22.5C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 229CD418

Communication System: EDGE 850 (2slots); Frequency: 836.8 MHz; Duty Cycle: 1:4.2
Medium parameters used (interpolated): $f = 836.8 \text{ MHz}$; $\sigma = 0.899 \text{ mho/m}$; $\epsilon_r = 43$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.12, 6.12, 6.12); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.117 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

$dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.33 V/m ; Power Drift = 0.030 dB


Peak SAR (extrapolated) = 0.136 W/kg

SAR(1 g) = 0.107 mW/g ; SAR(10 g) = 0.081 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.112 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 3(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

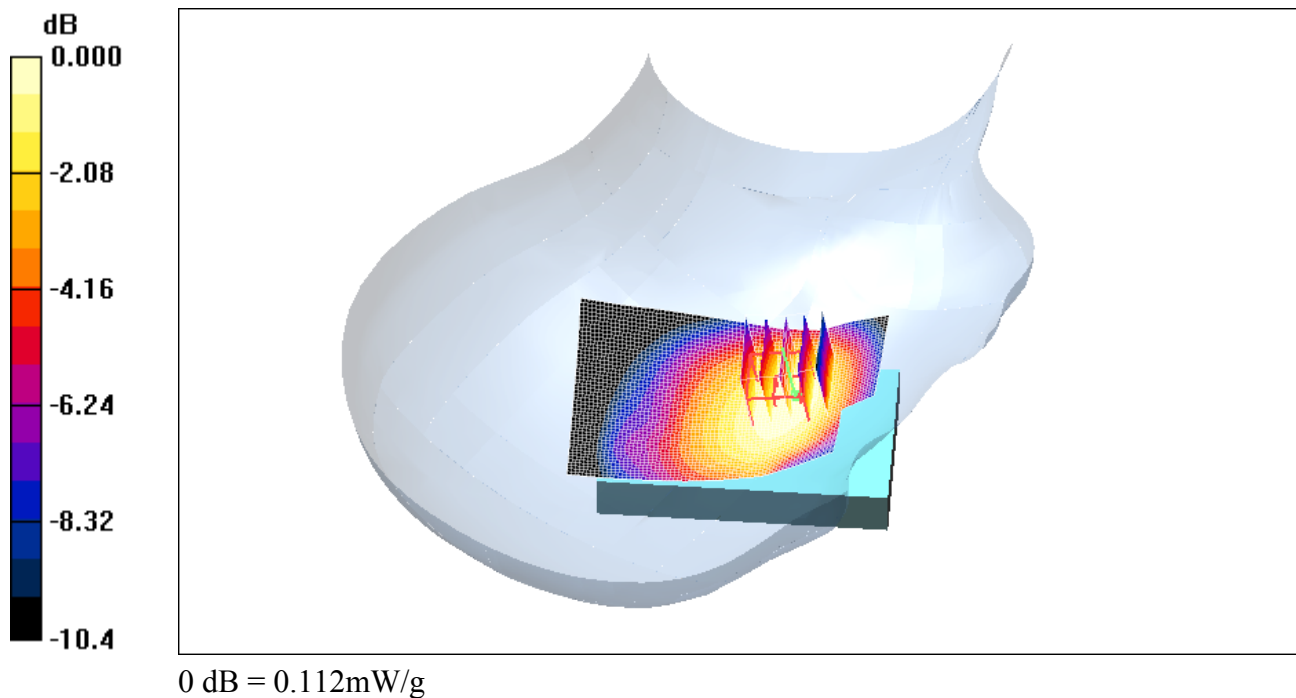

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 4(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

Date/Time: 7/27/2010 2:00:35 PM

Test Laboratory: RIM Testing Services

**RightHandSide_EDGE850_Slide_Open_mid_chan_Amb_Tem_22.8_Liq
_Tem_22.4C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 229CD418

Communication System: EDGE 850 (2slots); Frequency: 836.8 MHz; Duty Cycle: 1:4.2
Medium parameters used (interpolated): $f = 836.8 \text{ MHz}$; $\sigma = 0.899 \text{ mho/m}$; $\epsilon_r = 43$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.12, 6.12, 6.12); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.133 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

$dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.91 V/m; Power Drift = 0.082 dB


Peak SAR (extrapolated) = 0.162 W/kg

SAR(1 g) = 0.124 mW/g; SAR(10 g) = 0.095 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.131 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 5(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

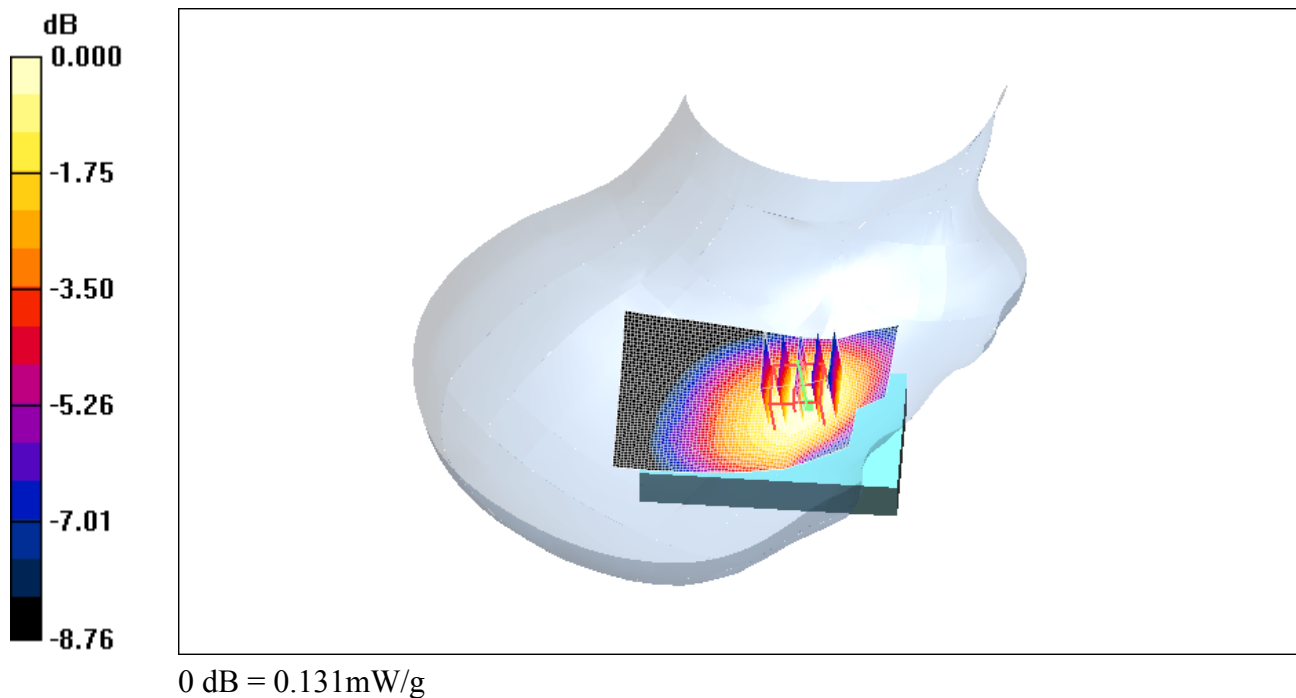

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 6(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

Date/Time: 7/27/2010 2:17:03 PM

Test Laboratory: RIM Testing Services

**RightHandSide_Tilt_EDGE850_Slide_Open_mid_chan_Amb_Tem_22.7
_Liq_Tem_22.3C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 229CD418

Communication System: EDGE 850 (2slots); Frequency: 836.8 MHz; Duty Cycle: 1:4.2
Medium parameters used (interpolated): $f = 836.8 \text{ MHz}$; $\sigma = 0.899 \text{ mho/m}$; $\epsilon_r = 43$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.12, 6.12, 6.12); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.105 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

$dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.01 V/m ; Power Drift = -0.113 dB


Peak SAR (extrapolated) = 0.121 W/kg

SAR(1 g) = 0.099 mW/g ; SAR(10 g) = 0.077 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.105 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 7(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

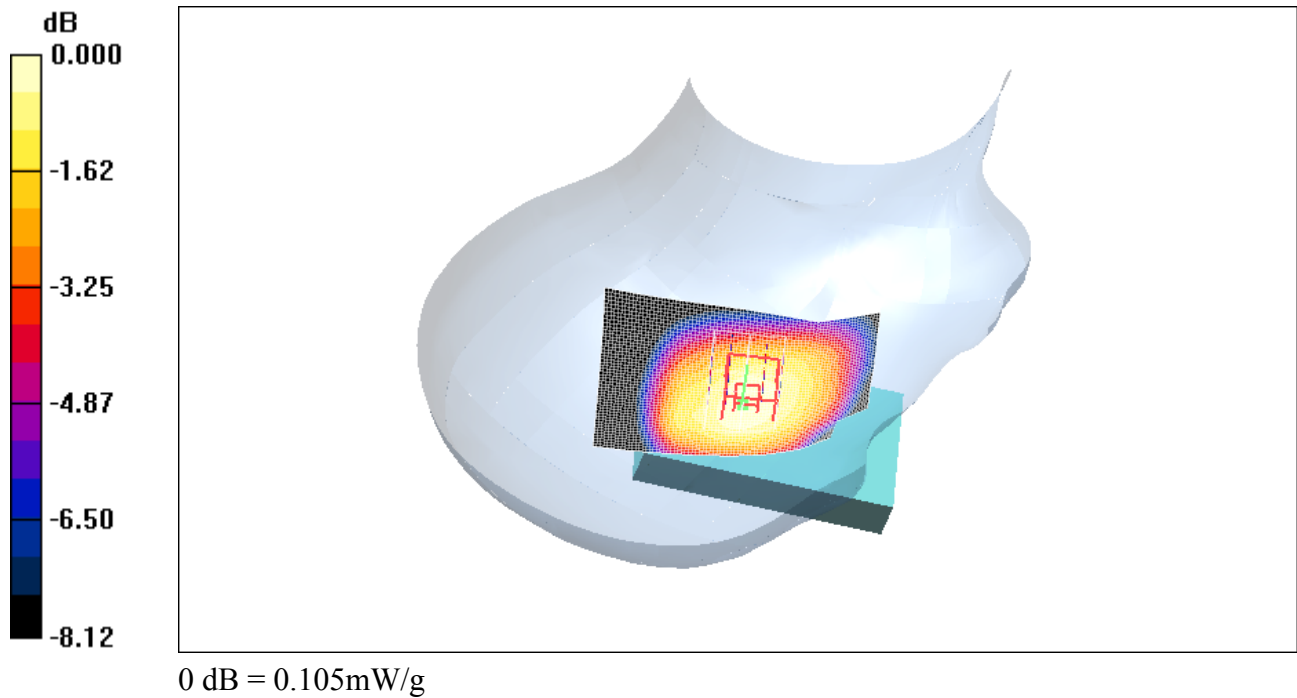

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 8(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

Date/Time: 7/27/2010 2:35:08 PM

Test Laboratory: RIM Testing Services

RightHandSide_GSM850_Slide_Open_mid_chan_Amb_Tem_22.6_Liq_Tem_22.2C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 229CD418

Communication System: GSM 850; Frequency: 836.8 MHz; Duty Cycle: 1:8.3
Medium parameters used (interpolated): $f = 836.8 \text{ MHz}$; $\sigma = 0.899 \text{ mho/m}$; $\epsilon_r = 43$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.12, 6.12, 6.12); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.149 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

$dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.90 V/m ; Power Drift = 0.021 dB


Peak SAR (extrapolated) = 0.181 W/kg

SAR(1 g) = 0.138 mW/g ; SAR(10 g) = 0.106 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.145 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 9(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

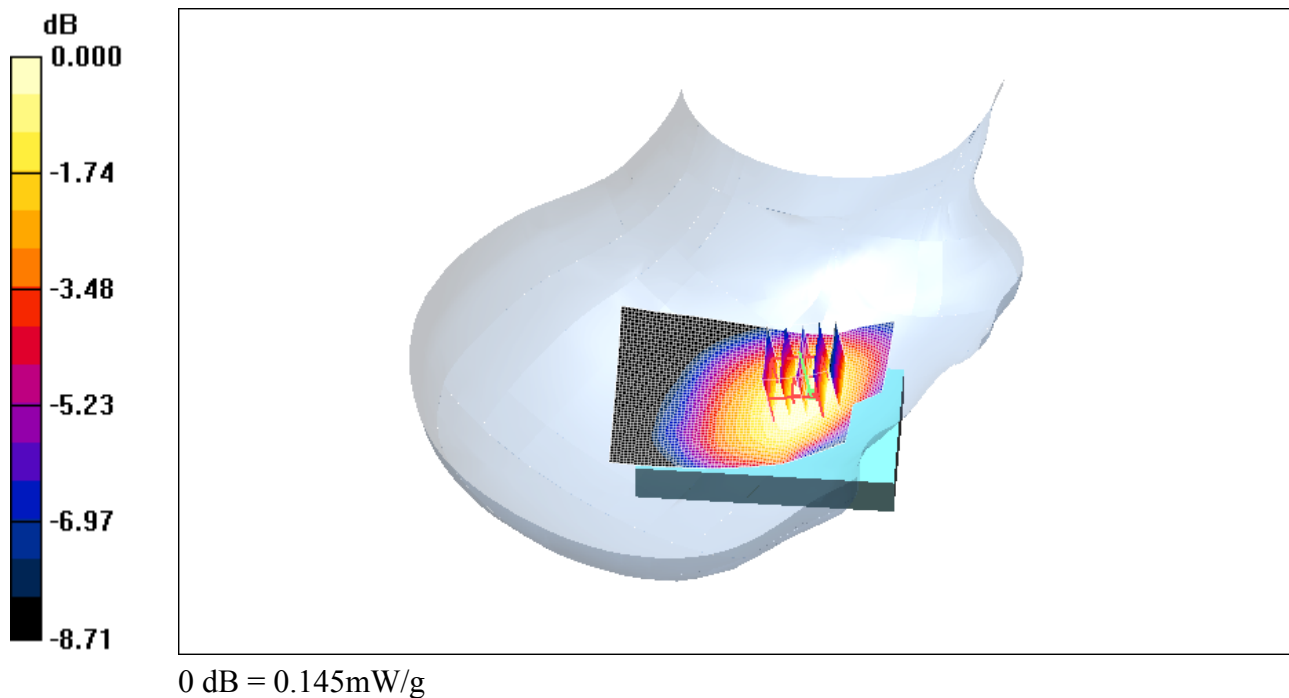

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 10(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

Date/Time: 7/27/2010 12:23:05 PM

Test Laboratory: RIM Testing Services

LeftHandSide_EDGE850_mid_chan_Amb_Tem_22.8_Liq_Tem_22.4_C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 229CD418

Communication System: EDGE 850 (2slots); Frequency: 836.8 MHz; Duty Cycle: 1:4.2
Medium parameters used (interpolated): $f = 836.8 \text{ MHz}$; $\sigma = 0.899 \text{ mho/m}$; $\epsilon_r = 43$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.12, 6.12, 6.12); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.109 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

$dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.89 V/m ; Power Drift = 0.452 dB


Peak SAR (extrapolated) = 0.131 W/kg

SAR(1 g) = 0.102 mW/g ; SAR(10 g) = 0.076 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.106 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 11(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

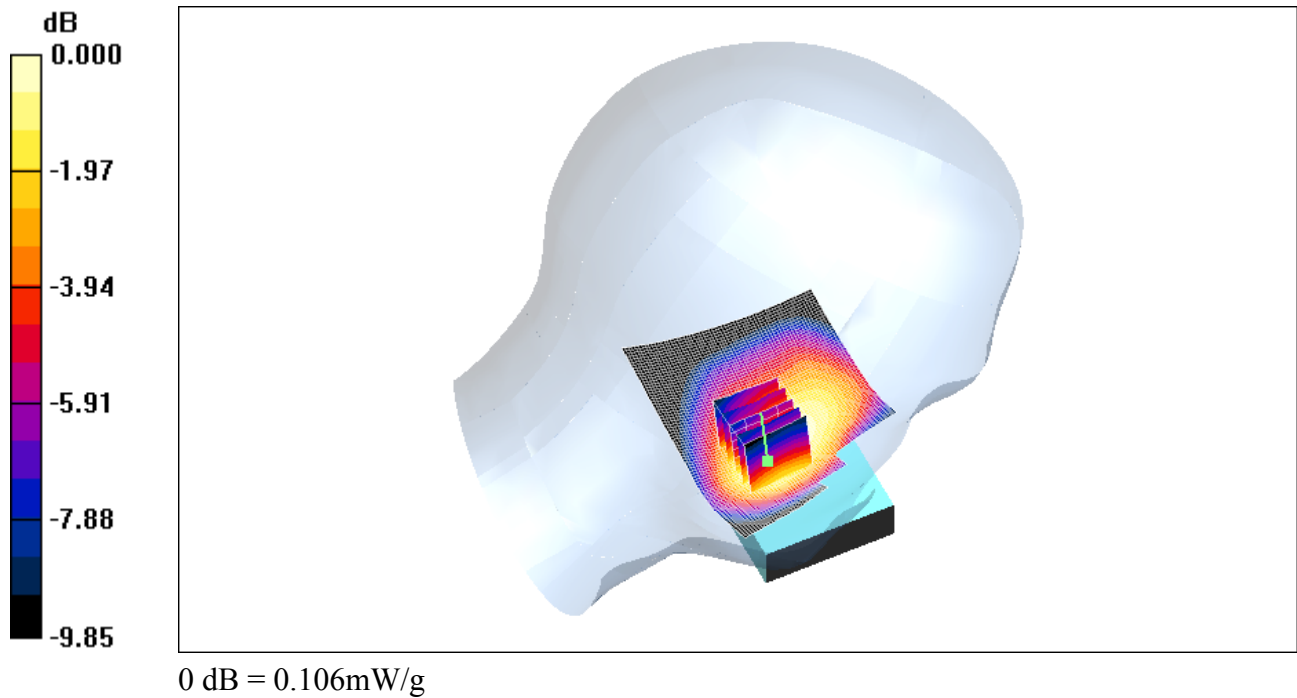

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 12(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

Date/Time: 7/27/2010 12:41:20 PM

Test Laboratory: RIM Testing Services

LeftHandSide_EDGE850_Slide_Open_mid_chan_Amb_Tem_22.9_Liq_Tem_22.5_C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 229CD418

Communication System: EDGE 850 (2slots); Frequency: 836.8 MHz; Duty Cycle: 1:4.2
Medium parameters used (interpolated): $f = 836.8 \text{ MHz}$; $\sigma = 0.899 \text{ mho/m}$; $\epsilon_r = 43$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.12, 6.12, 6.12); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.118 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

$dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.90 V/m ; Power Drift = -0.015 dB


Peak SAR (extrapolated) = 0.134 W/kg

SAR(1 g) = 0.111 mW/g ; SAR(10 g) = 0.088 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.115 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 13(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

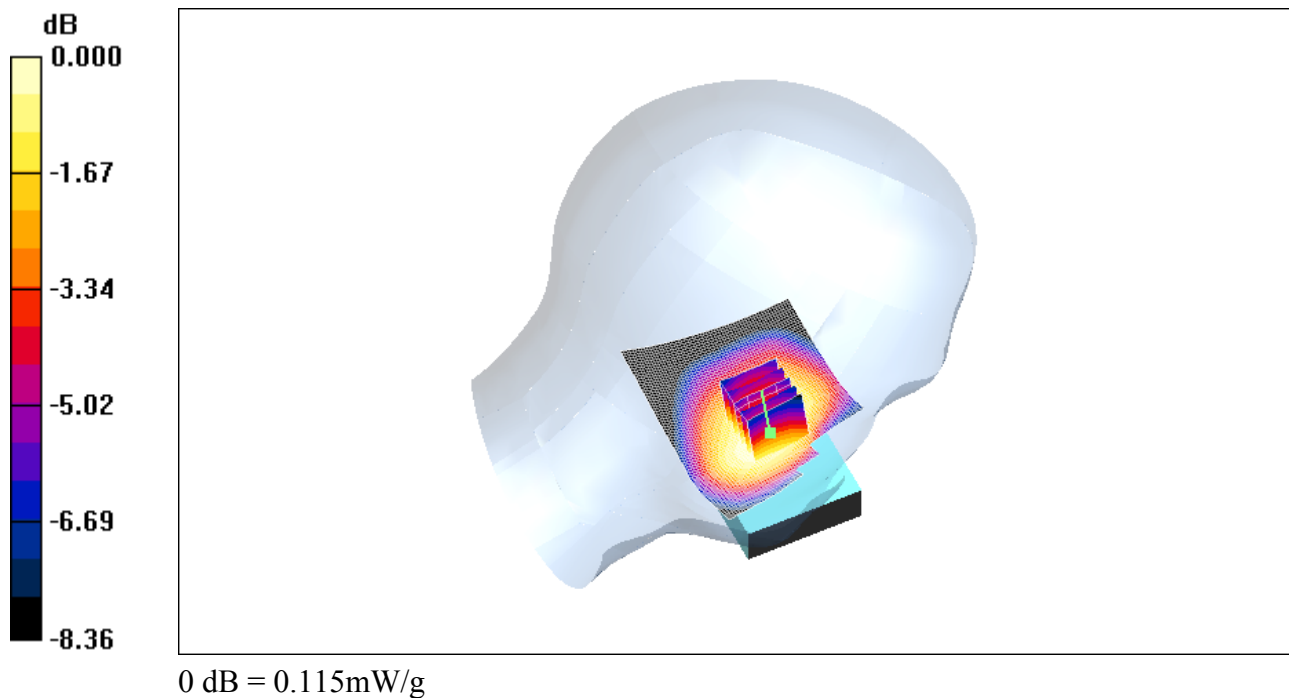

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 14(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

Date/Time: 7/27/2010 1:28:12 PM

Test Laboratory: RIM Testing Services

**LeftHandSide_Tilt_EDGE850_Slide_Open_mid_chan_Amb_Tem_22.7_L
iq_Tem_22.3_C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 229CD418

Communication System: EDGE 850 (2slots); Frequency: 836.8 MHz; Duty Cycle: 1:4.2
Medium parameters used (interpolated): $f = 836.8 \text{ MHz}$; $\sigma = 0.899 \text{ mho/m}$; $\epsilon_r = 43$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(6.12, 6.12, 6.12); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.090 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

$dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.40 V/m ; Power Drift = -0.020 dB


Peak SAR (extrapolated) = 0.107 W/kg

SAR(1 g) = 0.087 mW/g ; SAR(10 g) = 0.067 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.091 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 15(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

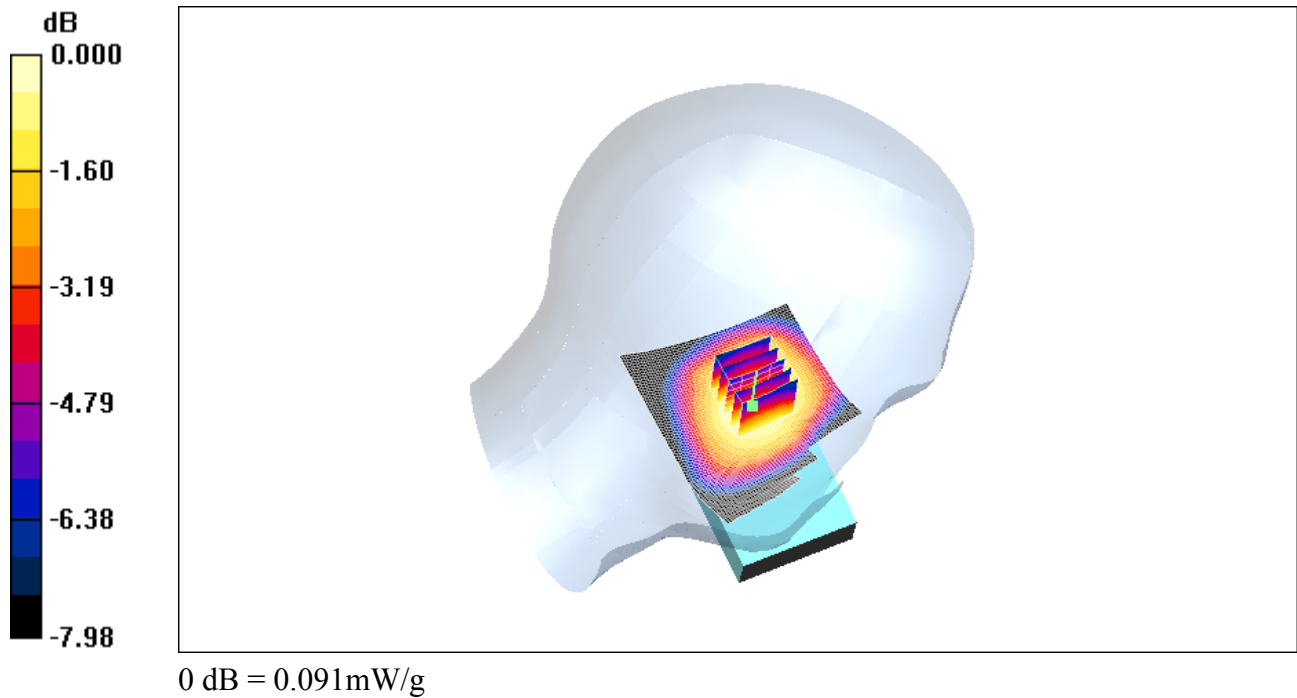

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 16(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

Date/Time: 7/19/2010 6:46:26 PM

Test Laboratory: RIM Testing Services

**RightHandSide_EDGE1900_mid_chan_Amb_Tem_23.0_Liq_Tem_22.4
C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 229CD418

Communication System: EDGE 1900; Frequency: 1880 MHz; Duty Cycle: 1:4.2
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.45 \text{ mho/m}$; $\epsilon_r = 40.2$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section


DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.14, 5.14, 5.14); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.390 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
 $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$
Reference Value = 14.1 V/m; Power Drift = -0.182 dB
Peak SAR (extrapolated) = 0.606 W/kg
SAR(1 g) = 0.380 mW/g; SAR(10 g) = 0.232 mW/g
Maximum value of SAR (measured) = 0.418 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 17(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

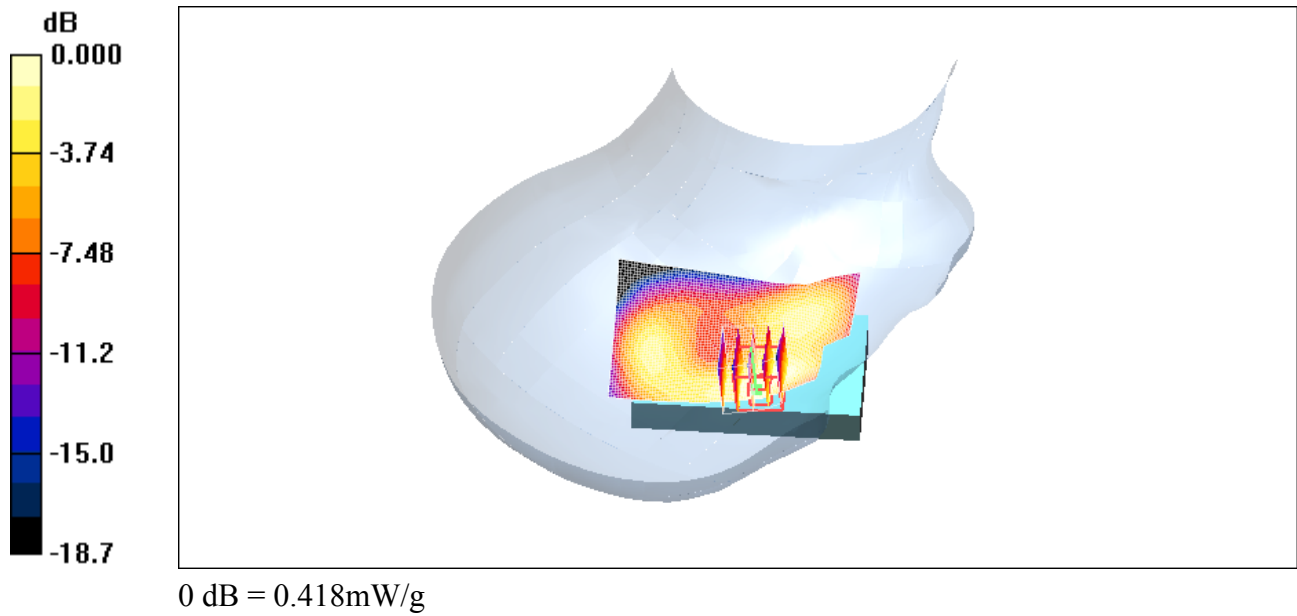

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 18(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

Date/Time: 7/19/2010 7:02:45 PM

Test Laboratory: RIM Testing Services

**RightHandSide_EDGE1900_Slide_Open_mid_chan_Amb_Tem_22.8_Li
q_Tem_22.2C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 229CD418

Communication System: EDGE 1900; Frequency: 1880 MHz; Duty Cycle: 1:4.2
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.45 \text{ mho/m}$; $\epsilon_r = 40.2$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section


DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.14, 5.14, 5.14); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.252 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
 $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$
Reference Value = 9.83 V/m; Power Drift = -0.040 dB
Peak SAR (extrapolated) = 0.397 W/kg
SAR(1 g) = 0.258 mW/g; SAR(10 g) = 0.161 mW/g
Maximum value of SAR (measured) = 0.281 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 19(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

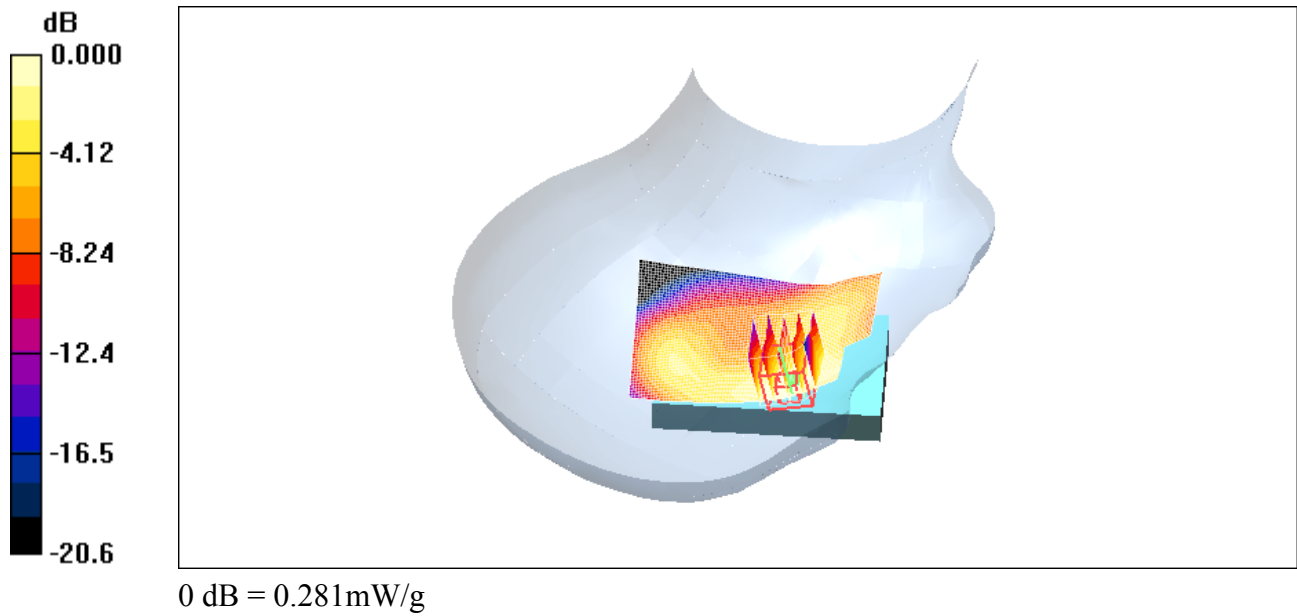

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 20(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

Date/Time: 7/19/2010 7:20:45 PM

Test Laboratory: RIM Testing Services

RightHandSide_Tilt_EDGE1900_mid_chan_Amb_Tem_22.7_Liq_Tem_2 2.1C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 229CD418

Communication System: EDGE 1900; Frequency: 1880 MHz; Duty Cycle: 1:4.2
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.45 \text{ mho/m}$; $\epsilon_r = 40.2$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section


DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.14, 5.14, 5.14); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.463 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
 $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$
Reference Value = 16.5 V/m; Power Drift = 0.215 dB
Peak SAR (extrapolated) = 0.687 W/kg
SAR(1 g) = 0.418 mW/g; SAR(10 g) = 0.232 mW/g
Maximum value of SAR (measured) = 0.471 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 21(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

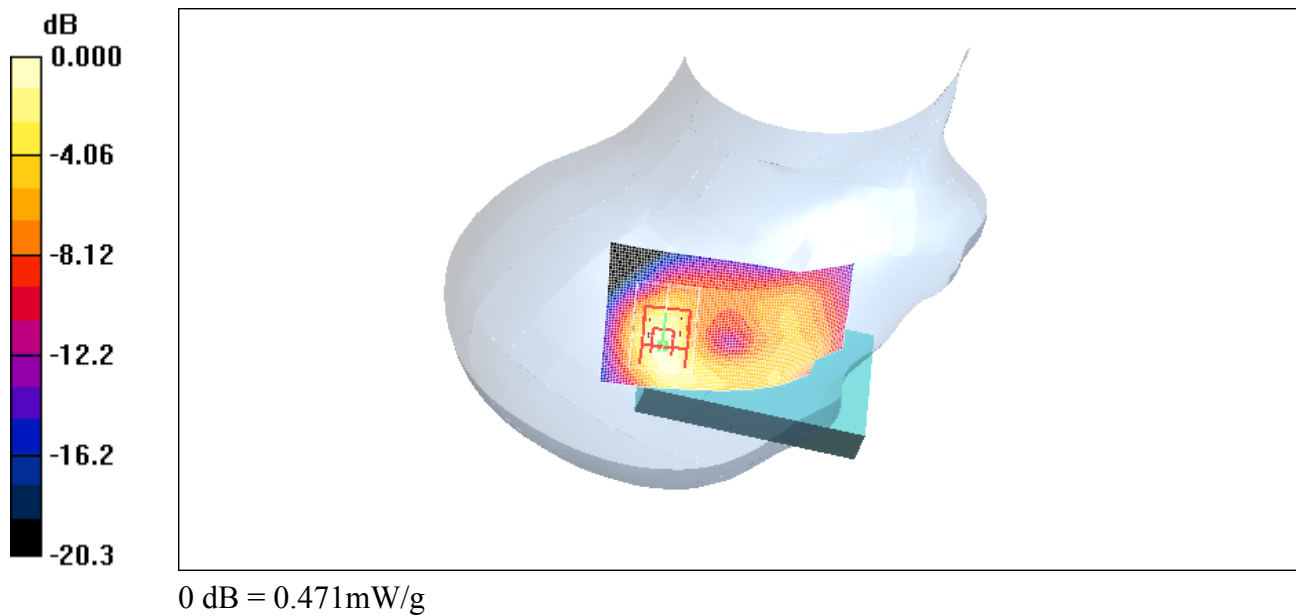

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 22(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

Date/Time: 7/19/2010 7:36:35 PM

Test Laboratory: RIM Testing Services

LeftHandSide_EDGE1900_mid_chan_Amb_Tem_22.8_Liq_Tem_22.2_C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 229CD418

Communication System: EDGE 1900; Frequency: 1880 MHz; Duty Cycle: 1:4.2
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.45 \text{ mho/m}$; $\epsilon_r = 40.2$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section


DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.14, 5.14, 5.14); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.719 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
 $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$
Reference Value = 14.5 V/m; Power Drift = 0.045 dB
Peak SAR (extrapolated) = 0.913 W/kg
SAR(1 g) = 0.616 mW/g; SAR(10 g) = 0.371 mW/g
Maximum value of SAR (measured) = 0.677 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 23(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

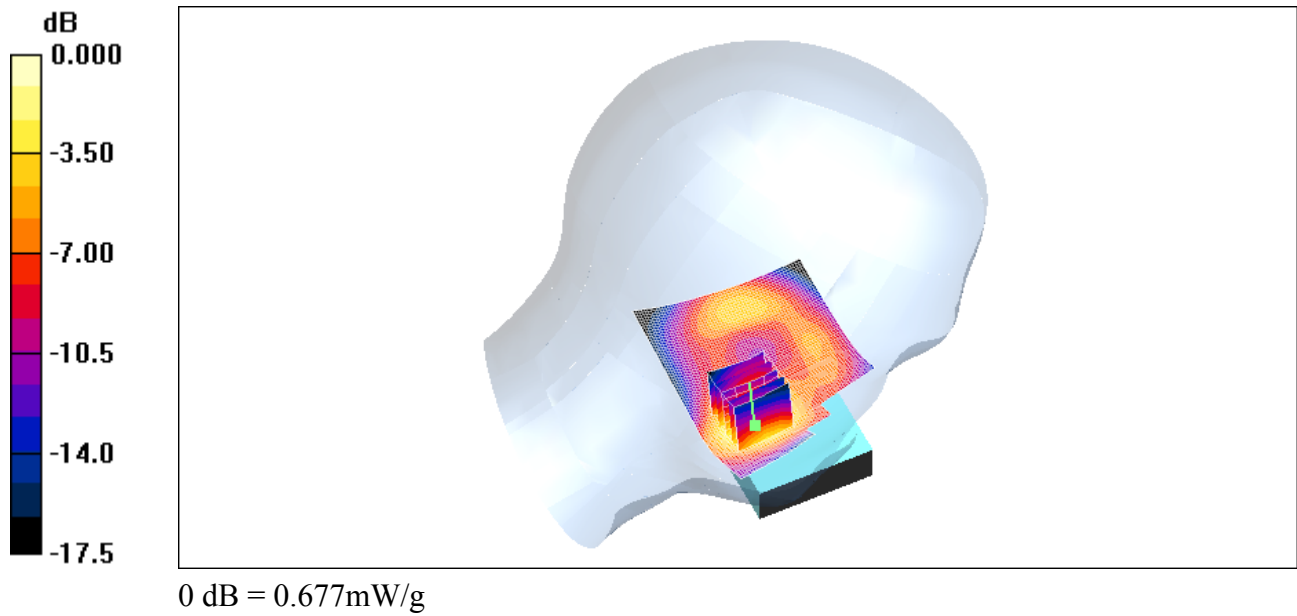

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 24(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

Date/Time: 7/19/2010 8:20:03 PM

Test Laboratory: RIM Testing Services

LeftHandSide_EDGE1900_Slide_Open_mid_chan_Amb_Tem_22.7_Liq_Tem_22.1_C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 229CD418

Communication System: EDGE 1900; Frequency: 1880 MHz; Duty Cycle: 1:4.2
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.45 \text{ mho/m}$; $\epsilon_r = 40.2$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section


DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.14, 5.14, 5.14); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.541 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
 $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$
Reference Value = 8.25 V/m; Power Drift = 0.006 dB
Peak SAR (extrapolated) = 0.762 W/kg
SAR(1 g) = 0.475 mW/g; SAR(10 g) = 0.287 mW/g
Maximum value of SAR (measured) = 0.523 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 25(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

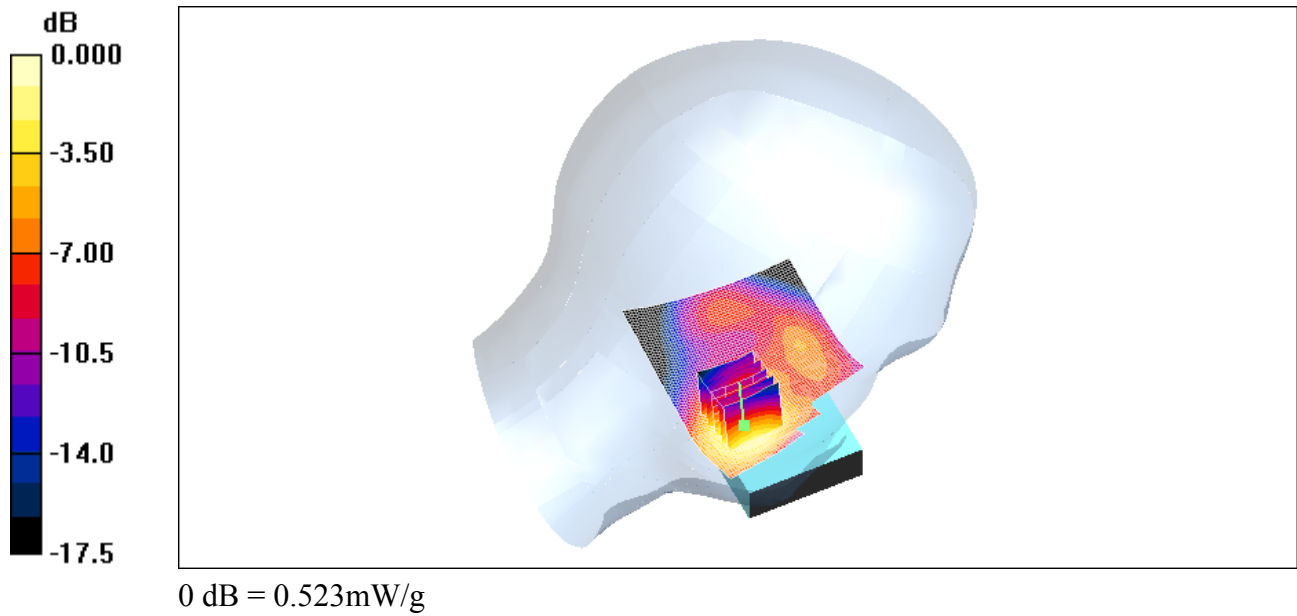

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 26(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

Date/Time: 7/19/2010 8:38:25 PM

Test Laboratory: RIM Testing Services

LeftHandSide_Tilt_EDGE1900_mid_chan_Amb_Tem_22.6_Liq_Tem_22.0_C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 229CD418

Communication System: EDGE 1900; Frequency: 1880 MHz; Duty Cycle: 1:4.2
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.45 \text{ mho/m}$; $\epsilon_r = 40.2$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section


DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.14, 5.14, 5.14); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.462 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
 $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$
Reference Value = 18.4 V/m; Power Drift = 0.105 dB
Peak SAR (extrapolated) = 0.752 W/kg
SAR(1 g) = 0.444 mW/g; SAR(10 g) = 0.239 mW/g
Maximum value of SAR (measured) = 0.502 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 27(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

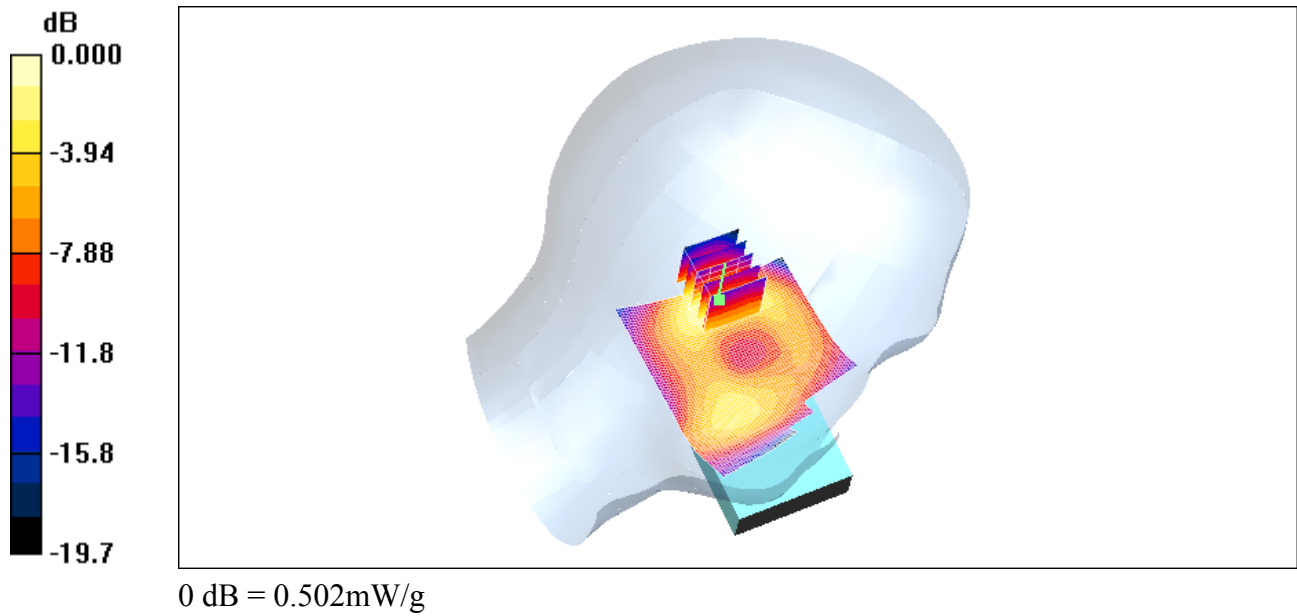

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 28(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

Date/Time: 7/19/2010 8:56:32 PM

Test Laboratory: RIM Testing Services

LeftHandSide_GSM1900_mid_chan_Amb_Tem_22.7_Liq_Tem_22.1_C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 229CD418

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.45 \text{ mho/m}$; $\epsilon_r = 40.2$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section


DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.14, 5.14, 5.14); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.649 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
 $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$
Reference Value = 13.5 V/m; Power Drift = -0.020 dB
Peak SAR (extrapolated) = 0.823 W/kg
SAR(1 g) = 0.550 mW/g; SAR(10 g) = 0.328 mW/g
Maximum value of SAR (measured) = 0.604 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 29(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

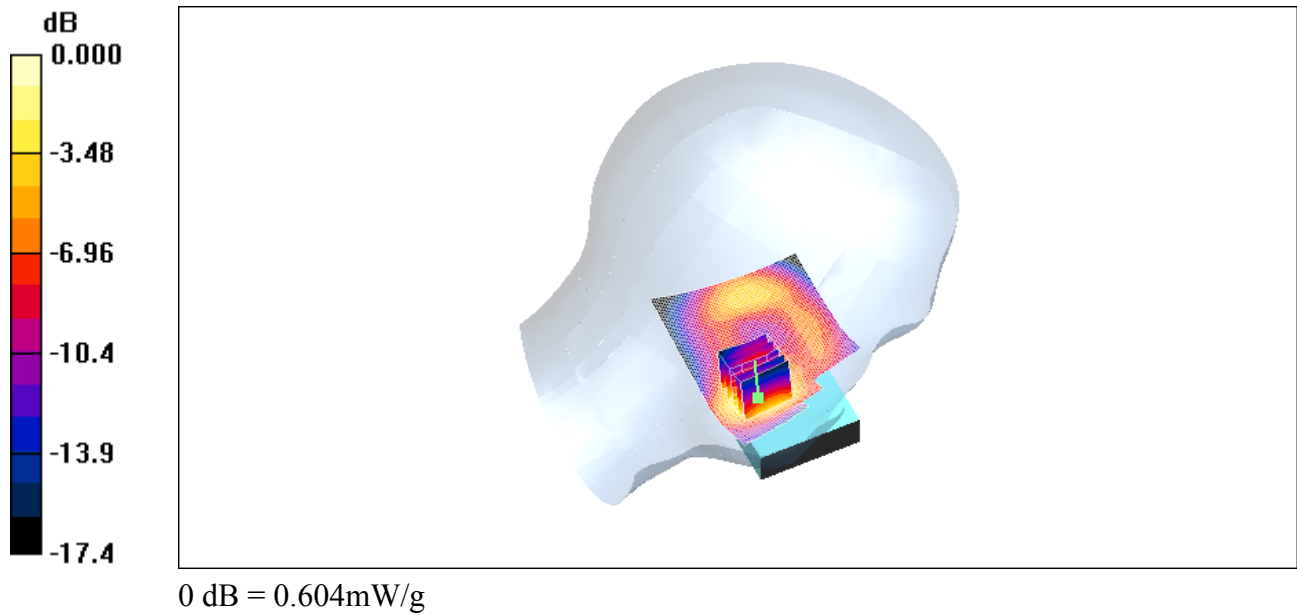

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 30(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

Date/Time: 7/19/2010 11:40:46 PM

Test Laboratory: RIM Testing Services

RightHandSide_UMTS_band_II_high_chan_Amb_Tem_22.4_Liq_Tem_2 1.8C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 229CD418

Communication System: WCDMA FDD II; Frequency: 1907.6 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1907.6 \text{ MHz}$; $\sigma = 1.46 \text{ mho/m}$; $\epsilon_r = 40.3$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.14, 5.14, 5.14); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.607 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

$dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.9 V/m ; Power Drift = 0.131 dB


Peak SAR (extrapolated) = 0.879 W/kg

SAR(1 g) = 0.575 mW/g ; SAR(10 g) = 0.343 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.609 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 31(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

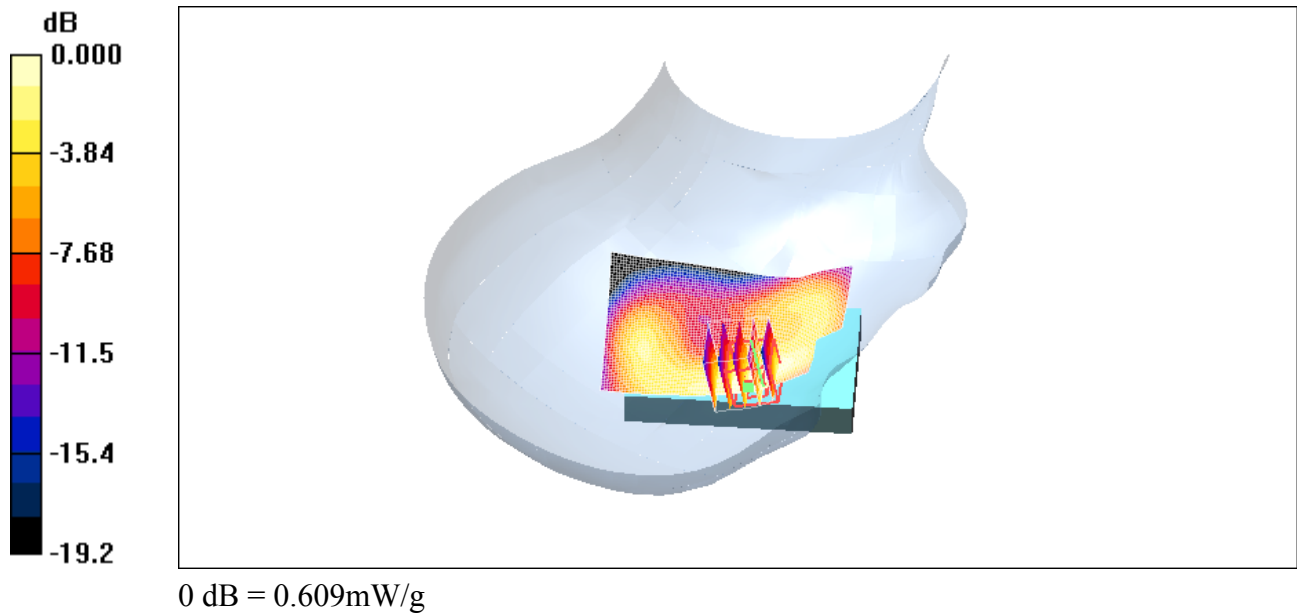

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 32(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

Date/Time: 7/19/2010 11:57:56 PM

Test Laboratory: RIM Testing Services

**RightHandSide_UMTS_band_II_Slide_Open_high_chan_Amb_Tem_22.
3_Liq_Tem_21.7C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 229CD418

Communication System: WCDMA FDD II; Frequency: 1907.6 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1907.6 \text{ MHz}$; $\sigma = 1.46 \text{ mho/m}$; $\epsilon_r = 40.3$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.14, 5.14, 5.14); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.501 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

$dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.71 V/m; Power Drift = -0.057 dB


Peak SAR (extrapolated) = 0.771 W/kg

SAR(1 g) = 0.498 mW/g; SAR(10 g) = 0.297 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.542 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 33(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

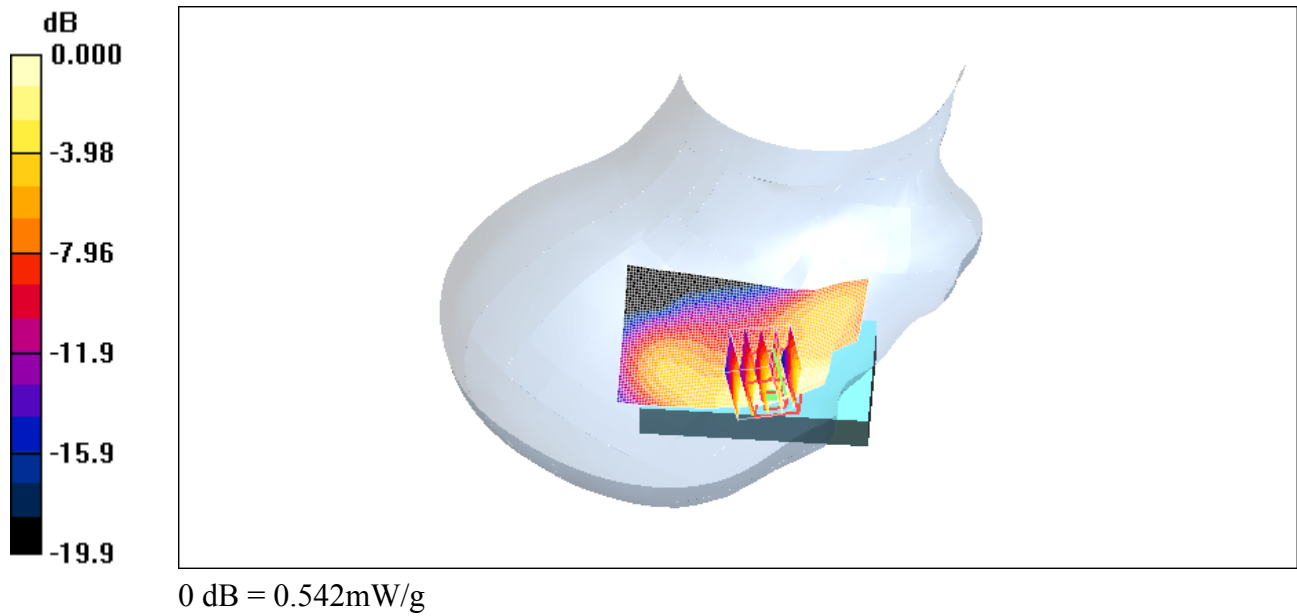

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 34(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

Date/Time: 7/20/2010 12:15:53 AM

Test Laboratory: RIM Testing Services

RightHandSide_Tilt_UMTS_band_II_high_chan_Amb_Tem_22.3_Liq_Tem_21.7C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 229CD418

Communication System: WCDMA FDD II; Frequency: 1907.6 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1907.6 \text{ MHz}$; $\sigma = 1.46 \text{ mho/m}$; $\epsilon_r = 40.3$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.14, 5.14, 5.14); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.704 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

$dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.3 V/m ; Power Drift = -0.059 dB


Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.632 mW/g ; SAR(10 g) = 0.368 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.671 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 35(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

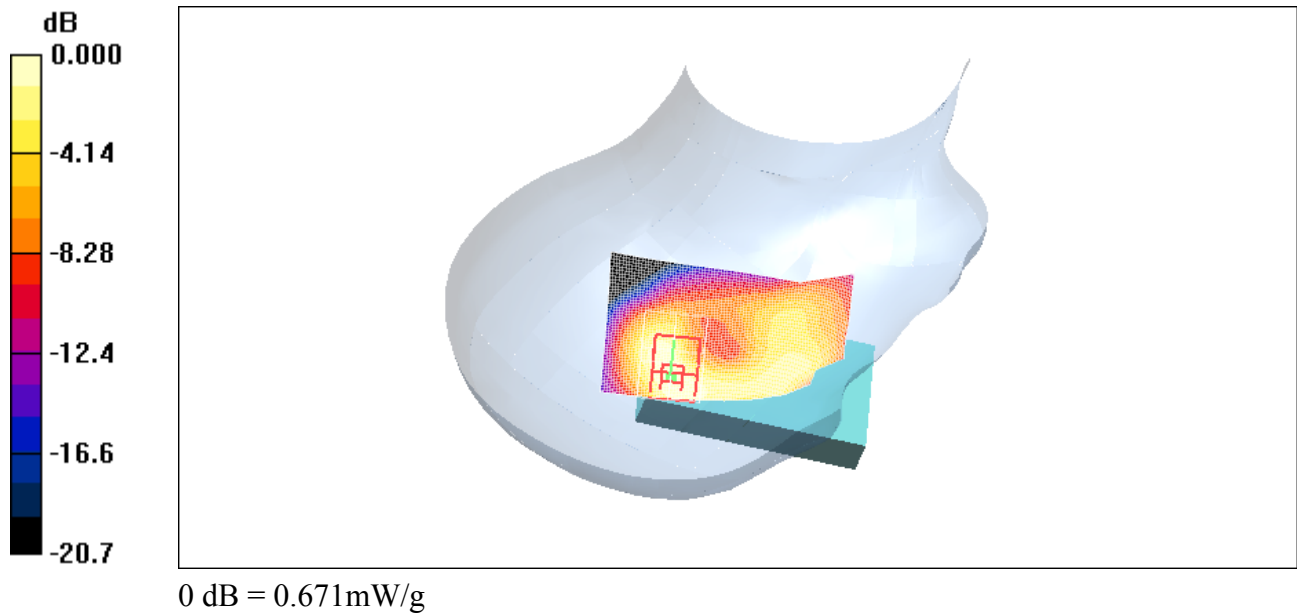

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 36(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

Date/Time: 7/19/2010 9:34:45 PM

Test Laboratory: RIM Testing Services

LeftHandSide_UMTS_band_II_low_chan_Amb_Tem_22.6_Liq_Tem_22.0_C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 229CD418

Communication System: WCDMA FDD II; Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1852.4 \text{ MHz}$; $\sigma = 1.4 \text{ mho/m}$; $\epsilon_r = 40.4$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.14, 5.14, 5.14); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.29 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

$dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.3 V/m ; Power Drift = -0.092 dB


Peak SAR (extrapolated) = 1.60 W/kg

SAR(1 g) = 1.07 mW/g ; SAR(10 g) = 0.646 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.15 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 37(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

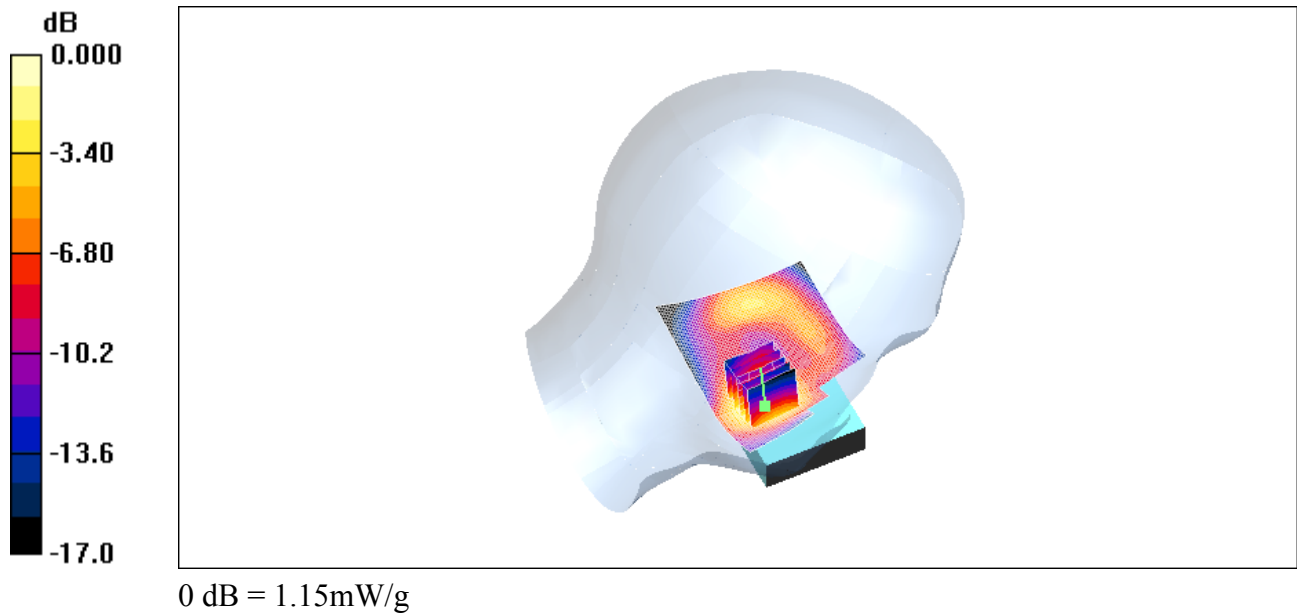

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report				Page 38(66)
	Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

Date/Time: 7/19/2010 10:50:00 PM

Test Laboratory: RIM Testing Services

LeftHandSide_UMTS_band_II_Slide_Open_low_chan_Amb_Tem_22.6_ Liq_Tem_22.0_C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 229CD418

Communication System: WCDMA FDD II; Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1852.4 \text{ MHz}$; $\sigma = 1.4 \text{ mho/m}$; $\epsilon_r = 40.4$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.14, 5.14, 5.14); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.758 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

$dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.9 V/m ; Power Drift = -0.021 dB


Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.681 mW/g ; SAR(10 g) = 0.421 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.738 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 39(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

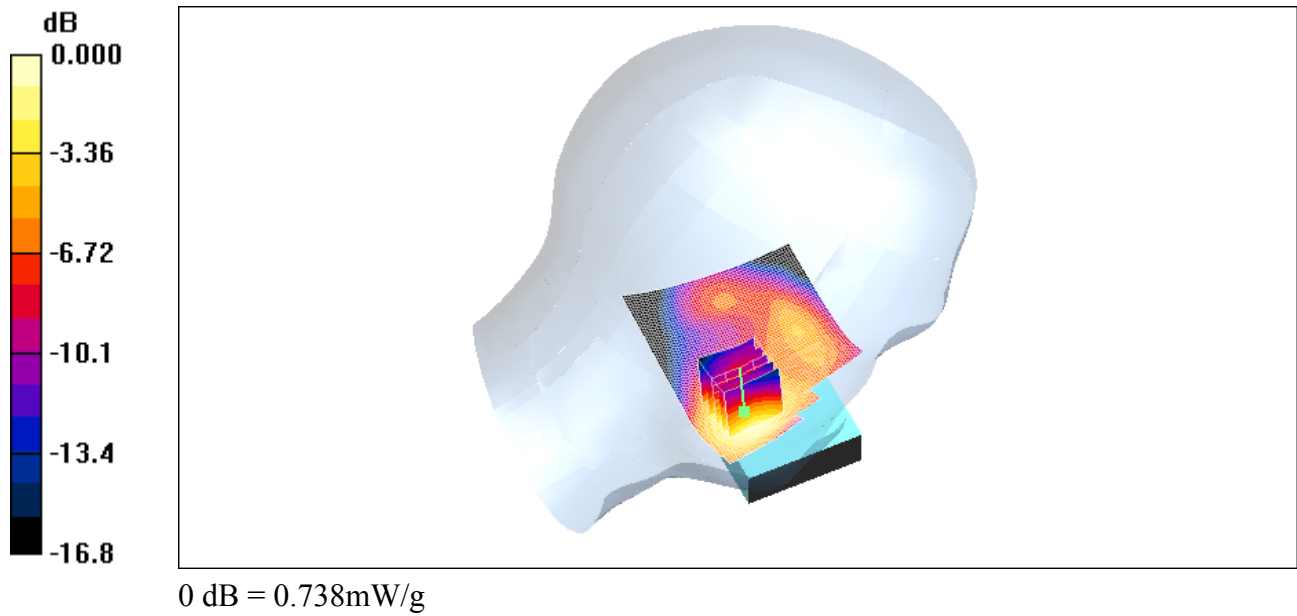

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 40(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

Date/Time: 7/19/2010 9:18:39 PM

Test Laboratory: RIM Testing Services

LeftHandSide_UMTS_band_II_mid_chan_Amb_Tem_22.5_Liq_Tem_21.9_C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 229CD418

Communication System: WCDMA FDD II; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.45 \text{ mho/m}$; $\epsilon_r = 40.2$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section


DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.14, 5.14, 5.14); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 1.24 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
 $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$
Reference Value = 19.3 V/m; Power Drift = -0.125 dB
Peak SAR (extrapolated) = 1.55 W/kg
SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.625 mW/g
Maximum value of SAR (measured) = 1.14 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 41(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

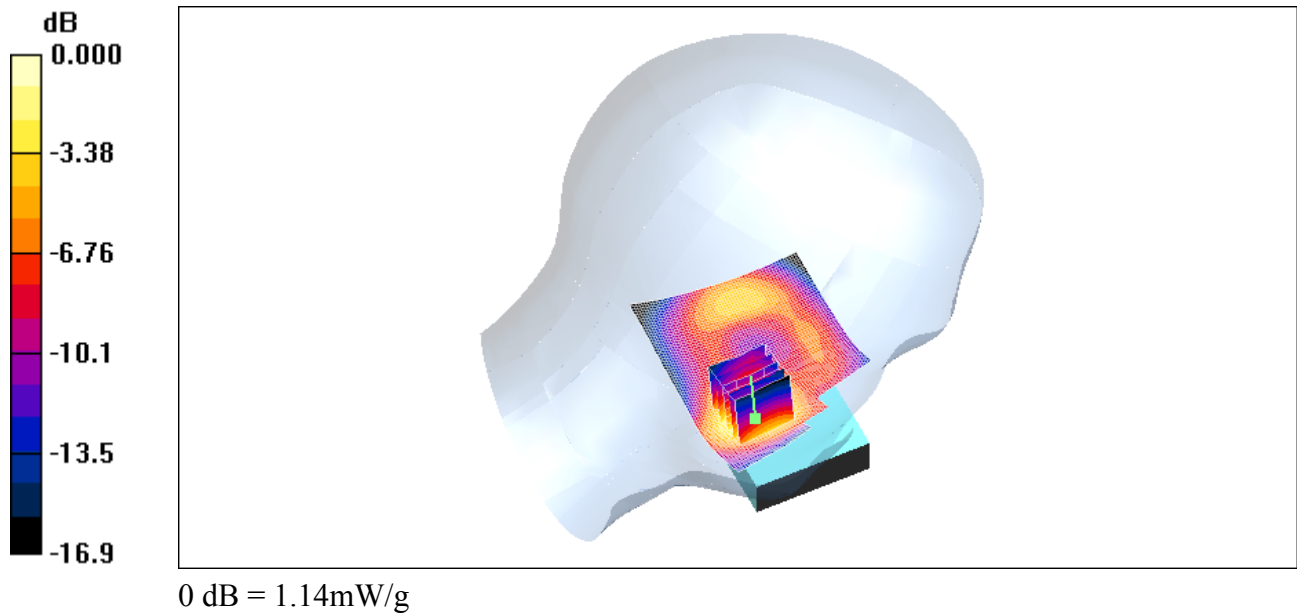

	Document			Page
	Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			42(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

Date/Time: 7/19/2010 10:23:06 PM

Test Laboratory: RIM Testing Services

**LeftHandSide_UMTS_band_II_Slide_Open_mid_chan_Amb_Tem_22.5_
Liq_Tem_21.9_C**

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 229CD418

Communication System: WCDMA FDD II; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.45 \text{ mho/m}$; $\epsilon_r = 40.2$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section


DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.14, 5.14, 5.14); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.866 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:
 $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$
Reference Value = 10.8 V/m; Power Drift = -0.059 dB
Peak SAR (extrapolated) = 1.23 W/kg
SAR(1 g) = 0.776 mW/g; SAR(10 g) = 0.471 mW/g
Maximum value of SAR (measured) = 0.842 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 43(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

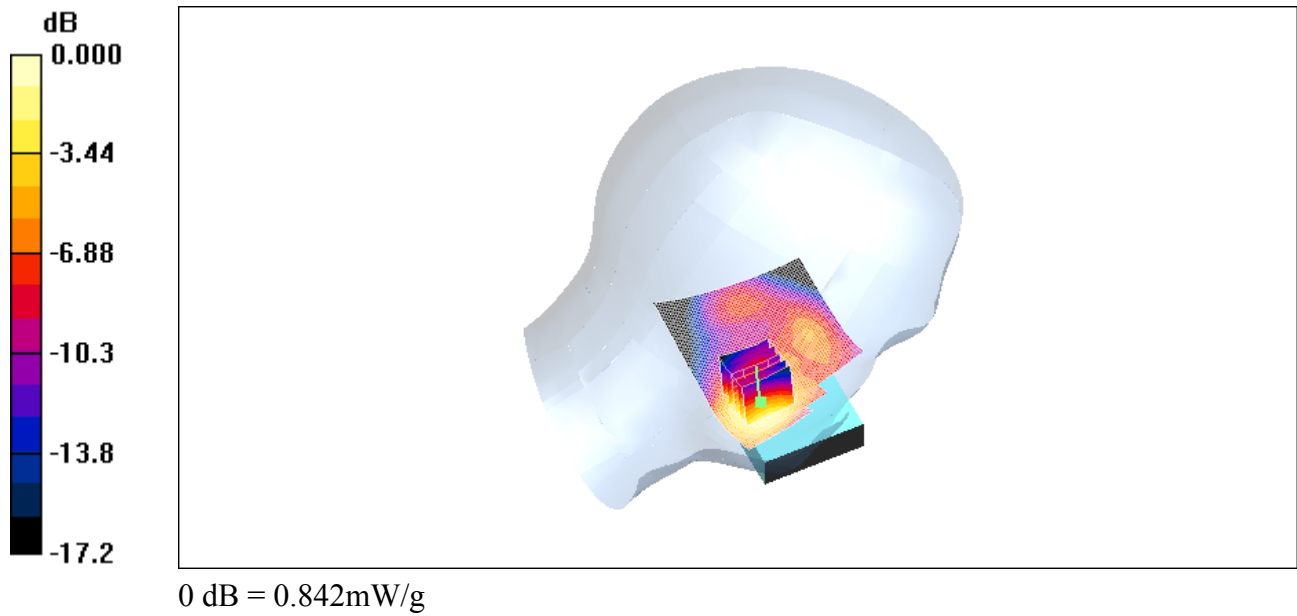

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 44(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

Date/Time: 7/19/2010 9:49:34 PM

Test Laboratory: RIM Testing Services

LeftHandSide_UMTS_band_II_high_chan_Amb_Tem_22.5_Liq_Tem_21.9_C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 229CD418

Communication System: WCDMA FDD II; Frequency: 1907.6 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1907.6 \text{ MHz}$; $\sigma = 1.46 \text{ mho/m}$; $\epsilon_r = 40.3$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.14, 5.14, 5.14); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.31 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

$dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.8 V/m ; Power Drift = -0.030 dB


Peak SAR (extrapolated) = 1.70 W/kg

SAR(1 g) = 1.13 mW/g ; SAR(10 g) = 0.663 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.23 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 45(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

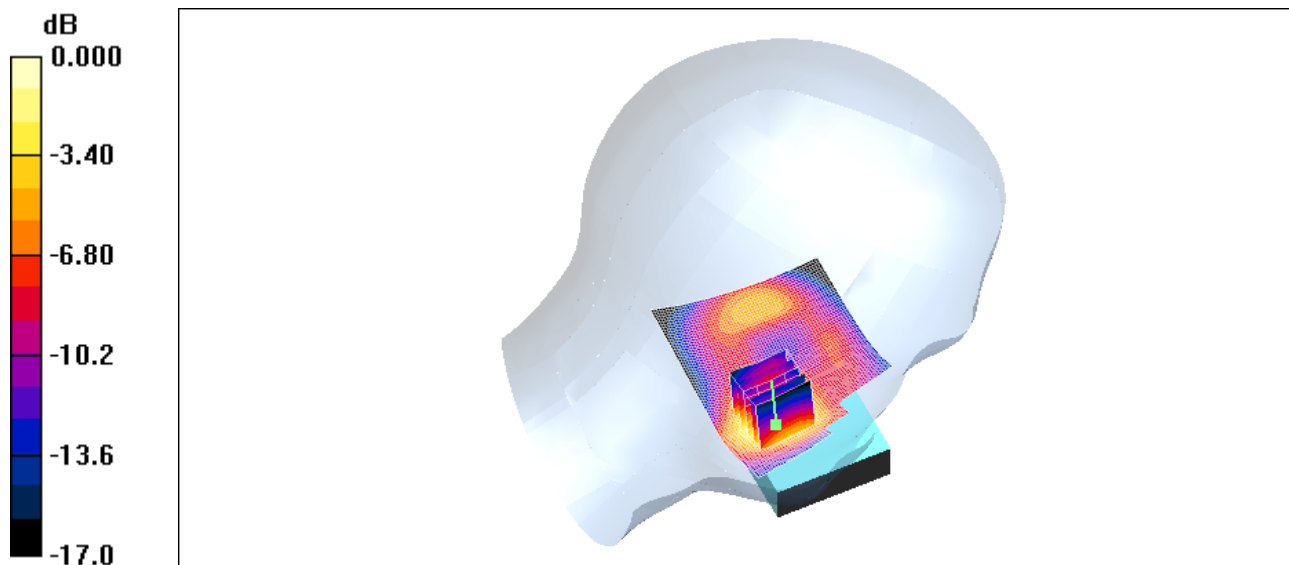

0 dB = 1.23mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 46(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

Date/Time: 7/19/2010 10:06:53 PM

Test Laboratory: RIM Testing Services

LeftHandSide_UMTS_band_II_Slide_Open_high_chan_Amb_Tem_22.5_Liq_Tem_21.9_C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 229CD418

Communication System: WCDMA FDD II; Frequency: 1907.6 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1907.6 \text{ MHz}$; $\sigma = 1.46 \text{ mho/m}$; $\epsilon_r = 40.3$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.14, 5.14, 5.14); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.02 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

$dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.4 V/m ; Power Drift = 0.015 dB


Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.896 mW/g ; SAR(10 g) = 0.533 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.993 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 47(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

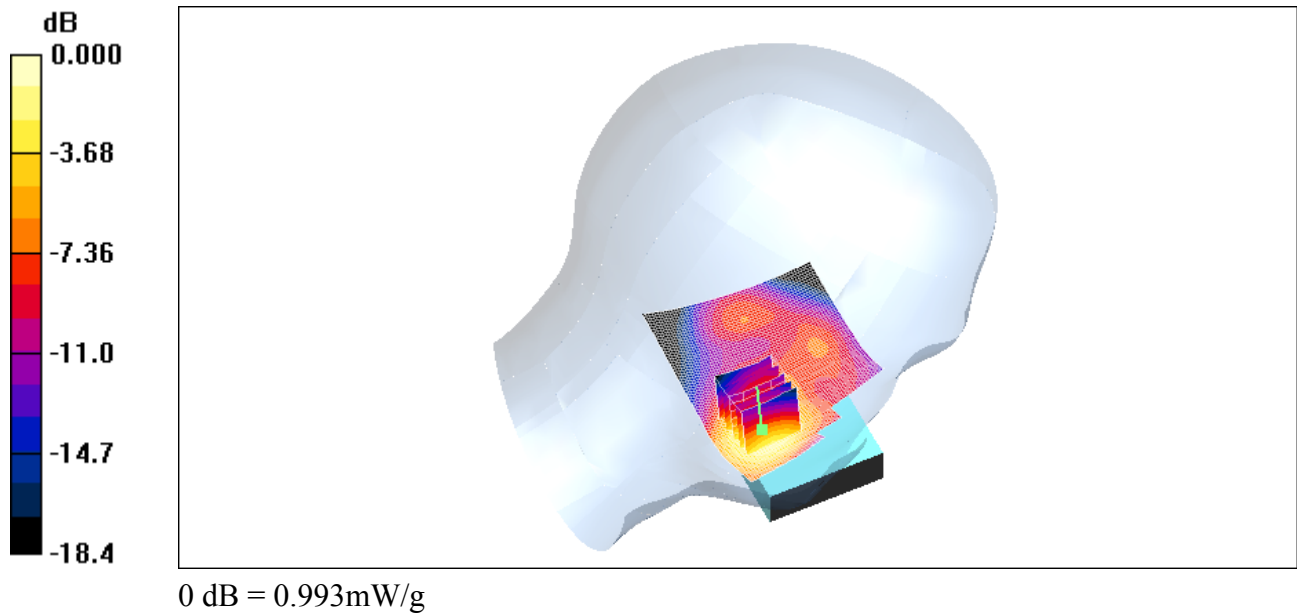

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 48(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

Date/Time: 7/19/2010 11:23:44 PM

Test Laboratory: RIM Testing Services

LeftHandSide_Tilt_UMTS_band_II_high_chan_Amb_Tem_22.4_Liq_Tem_21.8_C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 229CD418

Communication System: WCDMA FDD II; Frequency: 1907.6 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1907.6 \text{ MHz}$; $\sigma = 1.46 \text{ mho/m}$; $\epsilon_r = 40.3$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(5.14, 5.14, 5.14); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.700 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

$dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 23.0 V/m ; Power Drift = -0.036 dB


Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.649 mW/g ; SAR(10 g) = 0.352 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.726 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 49(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

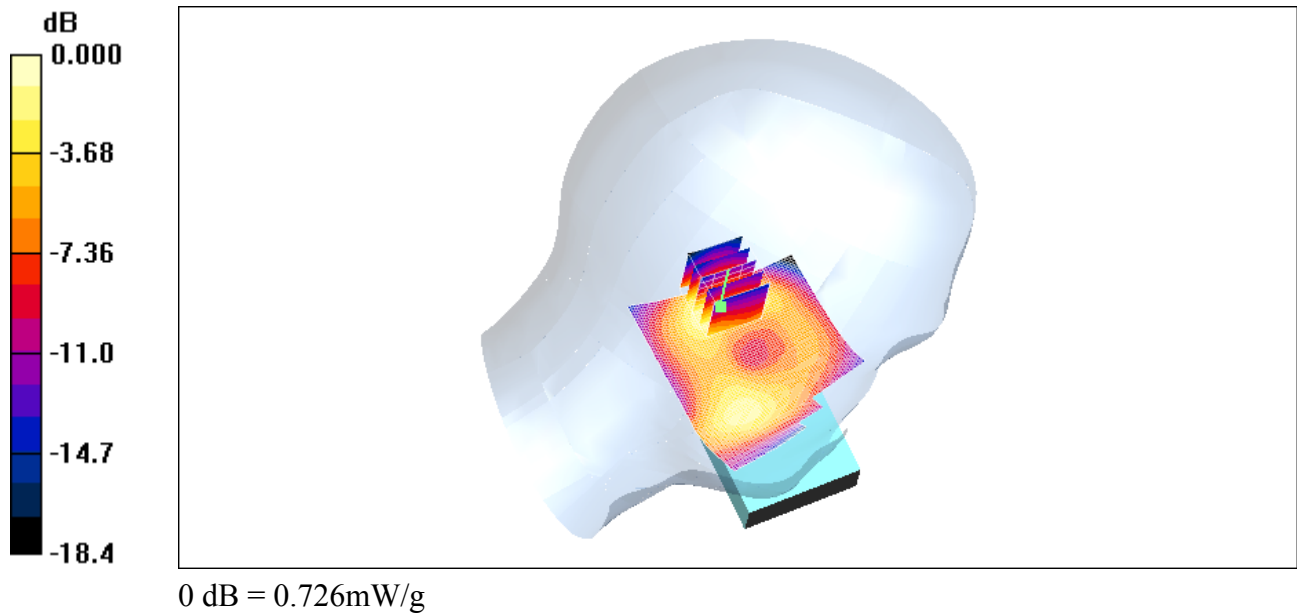

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 50(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

Date/Time: 8/5/2010 1:03:44 AM

Test Laboratory: RIM Testing Services

RightHandSide_802.11b_mid_chan_Amb_Tem_23.0_Liq_Tem_22.3C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 229CD418

Communication System: 802.11 b (2450); Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2437 \text{ MHz}$; $\sigma = 1.89 \text{ mho/m}$; $\epsilon_r = 40.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.53, 4.53, 4.53); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.132 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

$dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.35 V/m ; Power Drift = 0.079 dB


Peak SAR (extrapolated) = 0.204 W/kg

SAR(1 g) = 0.118 mW/g ; SAR(10 g) = 0.067 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.128 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 51(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

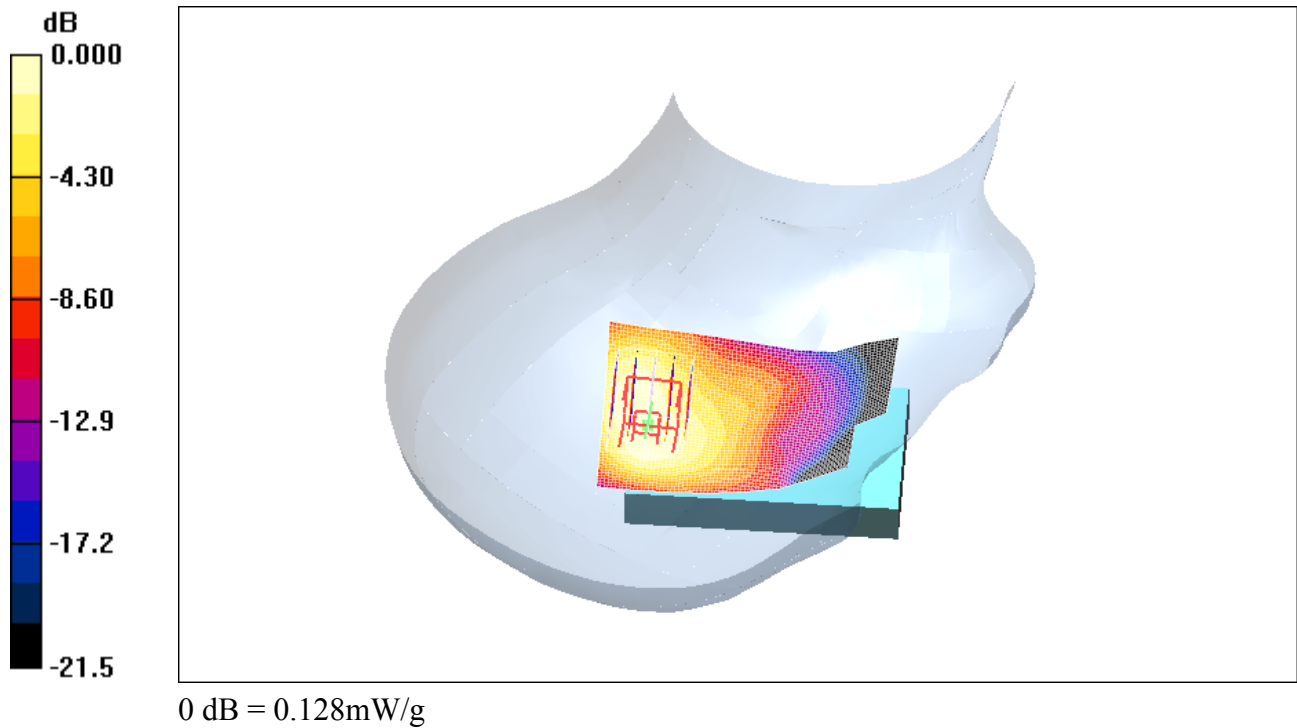

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 52(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

Date/Time: 8/5/2010 1:18:19 AM

Test Laboratory: RIM Testing Services

RightHandSide_802.11b_Slide_Open_mid_chan_Amb_Tem_22.8_Liq_Tem_22.1C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 229CD418

Communication System: 802.11 b (2450); Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2437 \text{ MHz}$; $\sigma = 1.89 \text{ mho/m}$; $\epsilon_r = 40.8$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.53, 4.53, 4.53); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.041 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

$dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.35 V/m; Power Drift = -0.009 dB


Peak SAR (extrapolated) = 0.066 W/kg

SAR(1 g) = 0.034 mW/g; SAR(10 g) = 0.017 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.039 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 53(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

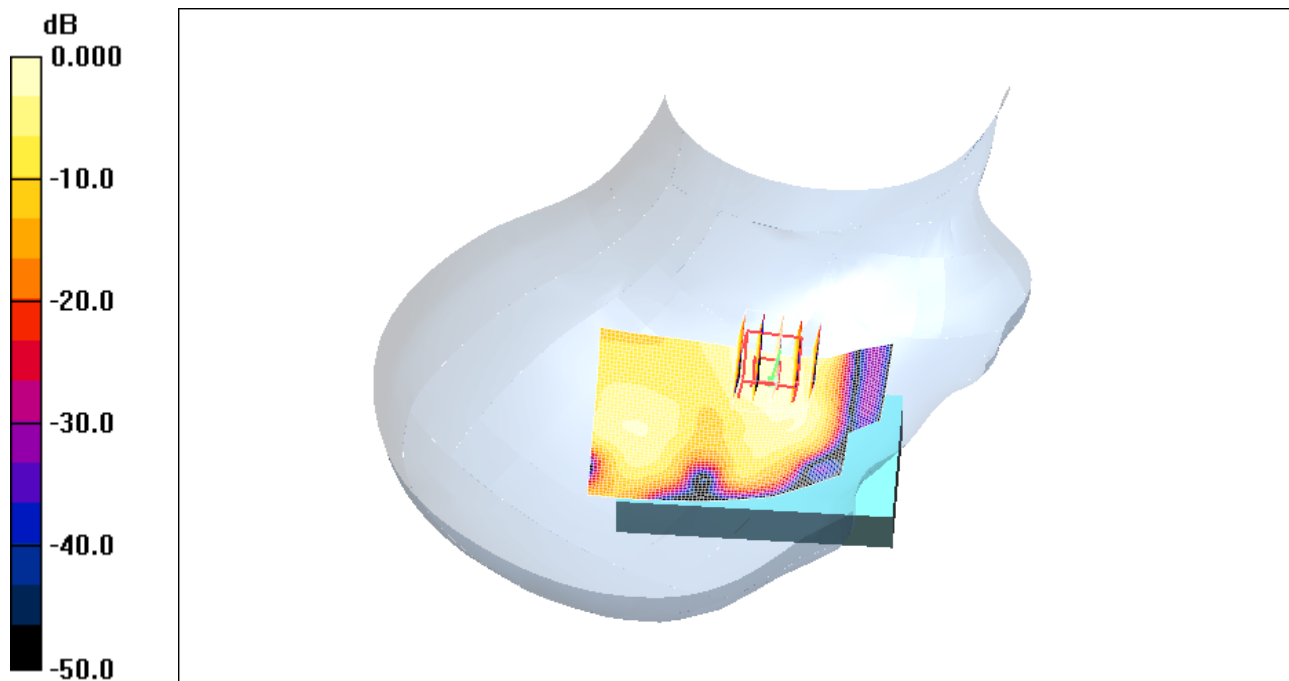

0 dB = 0.039mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 54(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

Date/Time: 8/5/2010 1:34:08 AM

Test Laboratory: RIM Testing Services

RightHandSide_Tilt_802.11b_mid_chan_Amb_Tem_22.7_Liq_Tem_22.0
C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 229CD418

Communication System: 802.11 b (2450); Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2437 \text{ MHz}$; $\sigma = 1.89 \text{ mho/m}$; $\epsilon_r = 40.8$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.53, 4.53, 4.53); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.179 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

$dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.64 V/m ; Power Drift = 0.025 dB


Peak SAR (extrapolated) = 0.294 W/kg

SAR(1 g) = 0.161 mW/g ; SAR(10 g) = 0.083 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.172 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 55(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

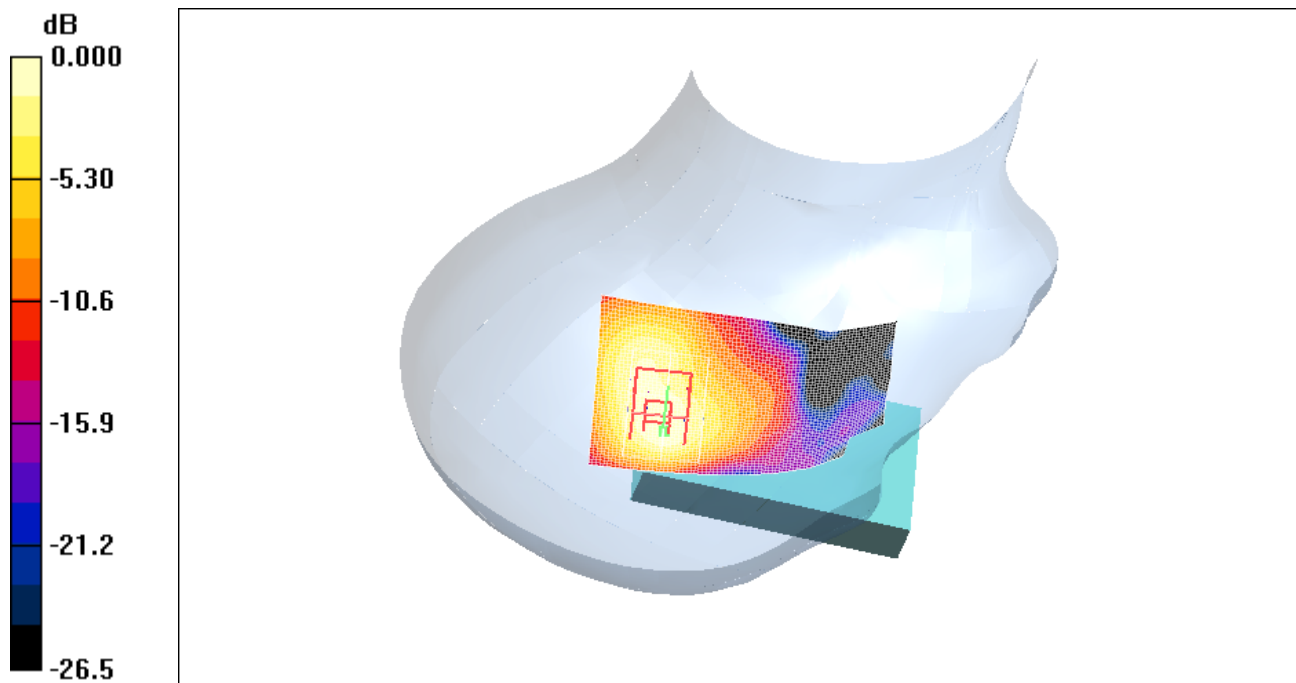

0 dB = 0.172mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 56(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

Date/Time: 8/5/2010 12:23:32 PM

Test Laboratory: RIM Testing Services

LeftHandSide_802.11b_low_chan_Amb_Tem_22.0_Liq_Tem_21.2C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 229CD418

Communication System: 802.11 b (2450); Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.98$ mho/m; $\epsilon_r = 41.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.53, 4.53, 4.53); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.149 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 5.60 V/m; Power Drift = 0.001 dB


Peak SAR (extrapolated) = 0.286 W/kg

SAR(1 g) = 0.135 mW/g; SAR(10 g) = 0.065 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.150 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 57(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

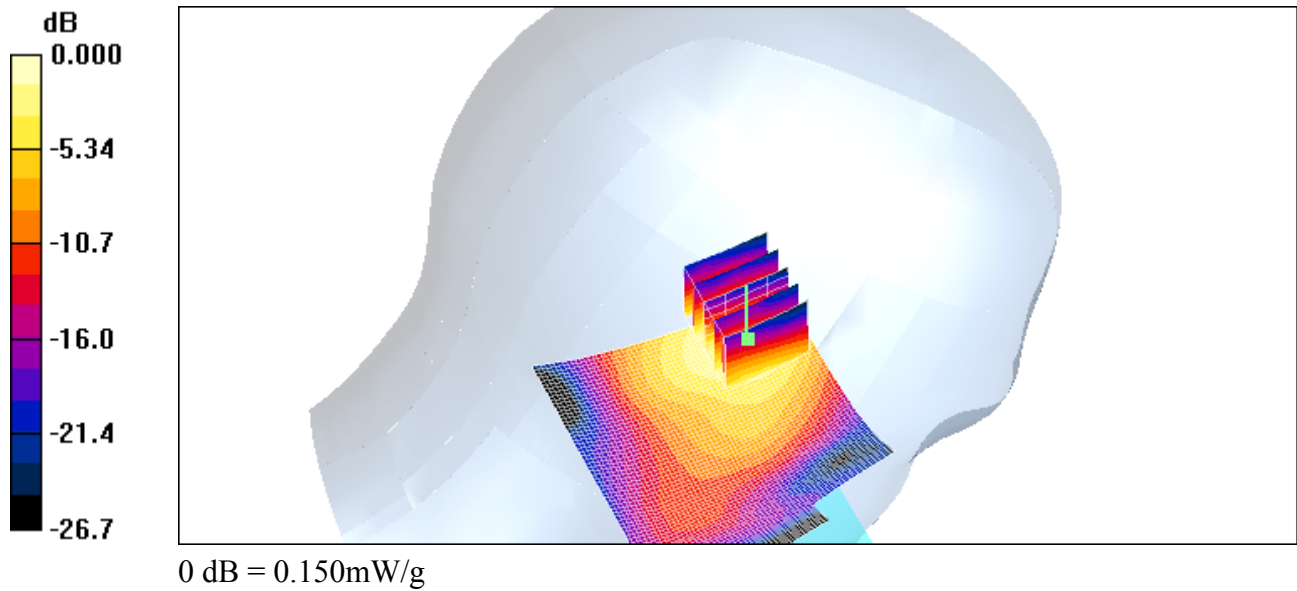

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 58(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

Date/Time: 8/5/2010 1:52:41 AM

Test Laboratory: RIM Testing Services

LeftHandSide_802.11b_mid_chan_Amb_Tem_22.6_Liq_Tem_21.9_C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 229CD418

Communication System: 802.11 b (2450); Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2437 \text{ MHz}$; $\sigma = 1.89 \text{ mho/m}$; $\epsilon_r = 40.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.53, 4.53, 4.53); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.239 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

$dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.26 V/m ; Power Drift = 0.153 dB


Peak SAR (extrapolated) = 0.456 W/kg

SAR(1 g) = 0.221 mW/g ; SAR(10 g) = 0.107 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.247 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 59(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

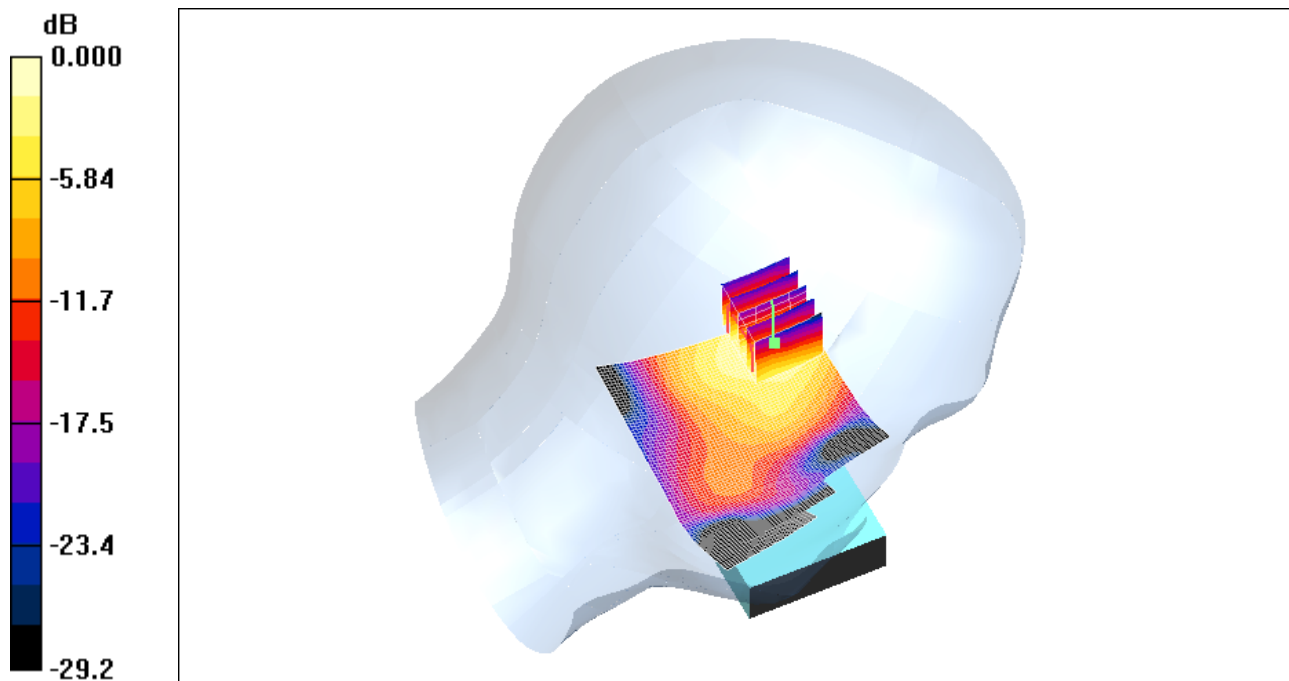

0 dB = 0.247mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 60(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

Date/Time: 8/5/2010 2:08:38 AM

Test Laboratory: RIM Testing Services

LeftHandSide_802.11b_Slide_Open_mid_chan_Amb_Tem_22.7_Liq_Tem_22.0_C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 229CD418

Communication System: 802.11 b (2450); Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2437 \text{ MHz}$; $\sigma = 1.89 \text{ mho/m}$; $\epsilon_r = 40.8$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.53, 4.53, 4.53); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.070 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

$dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.87 V/m ; Power Drift = 1.86 dB


Peak SAR (extrapolated) = 0.110 W/kg

SAR(1 g) = 0.057 mW/g ; SAR(10 g) = 0.025 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.063 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 61(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

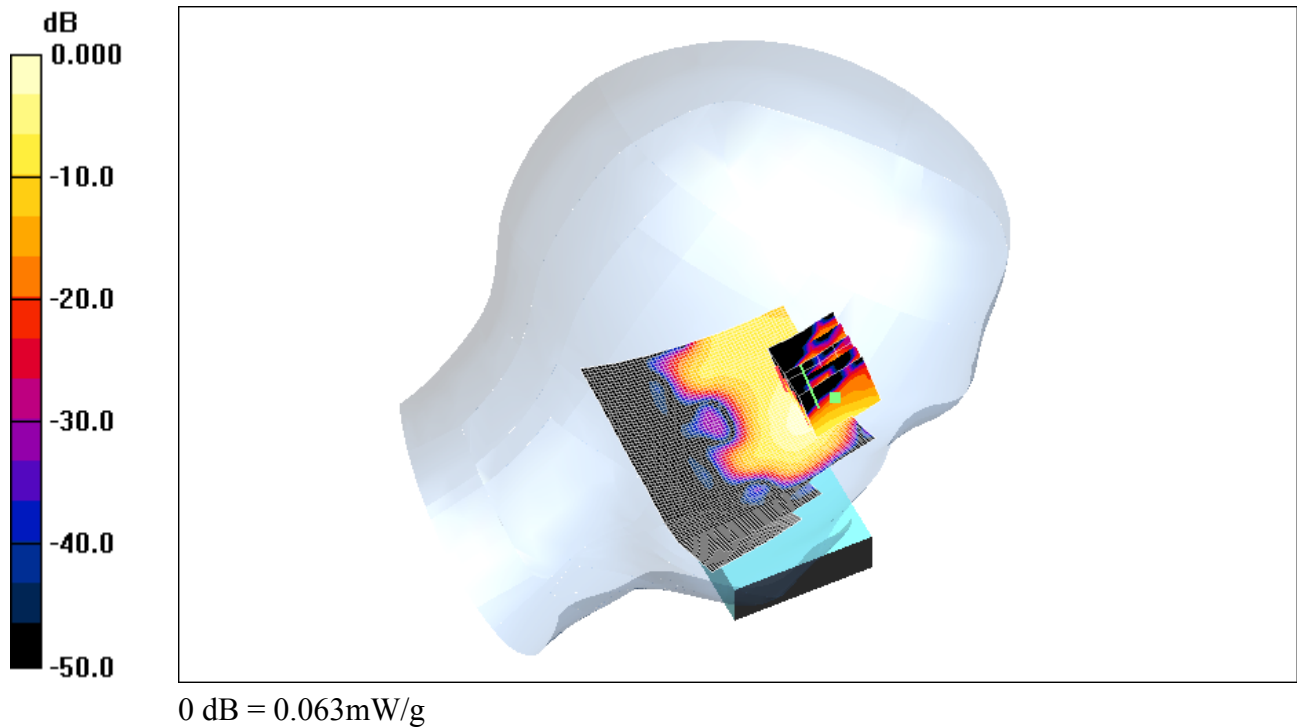

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 62(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

Date/Time: 8/5/2010 12:40:10 PM

Test Laboratory: RIM Testing Services

LeftHandSide_802.11b_high_chan_Amb_Tem_21.9_Liq_Tem_21.0C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 229CD418

Communication System: 802.11 b (2450); Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.91$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.53, 4.53, 4.53); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.147 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 5.64 V/m; Power Drift = -0.023 dB


Peak SAR (extrapolated) = 0.274 W/kg

SAR(1 g) = 0.131 mW/g; SAR(10 g) = 0.063 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.150 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 63(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

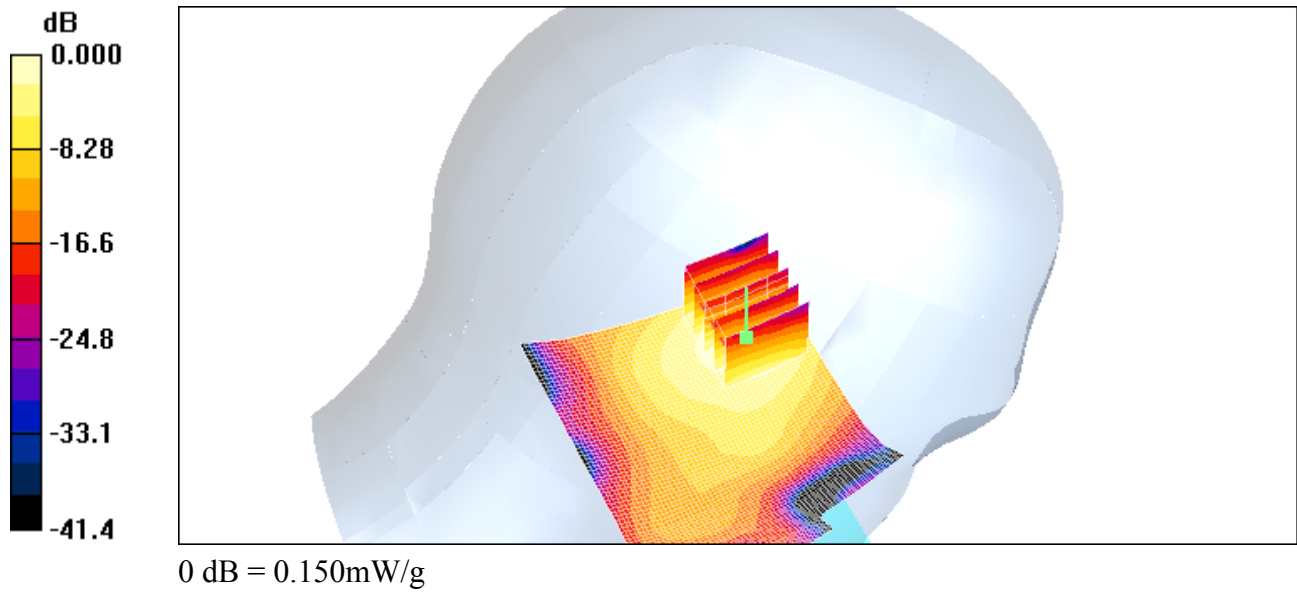

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 64(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

Date/Time: 8/5/2010 2:30:33 AM

Test Laboratory: RIM Testing Services

LeftHandSide_Tilt_802.11b_mid_chan_Amb_Tem_22.9_Liq_Tem_22.2_C

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 229CD418

Communication System: 802.11 b (2450); Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2437 \text{ MHz}$; $\sigma = 1.89 \text{ mho/m}$; $\epsilon_r = 40.8$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3225; ConvF(4.53, 4.53, 4.53); Calibrated: 12/11/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn473; Calibrated: 1/4/2010
- Phantom: SAM 1; Type: SAM 4.0; Serial: 1076
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position -/Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.252 mW/g

Touch position -/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

$dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.40 V/m; Power Drift = -0.011 dB


Peak SAR (extrapolated) = 0.467 W/kg

SAR(1 g) = 0.218 mW/g; SAR(10 g) = 0.103 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.243 mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 65(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

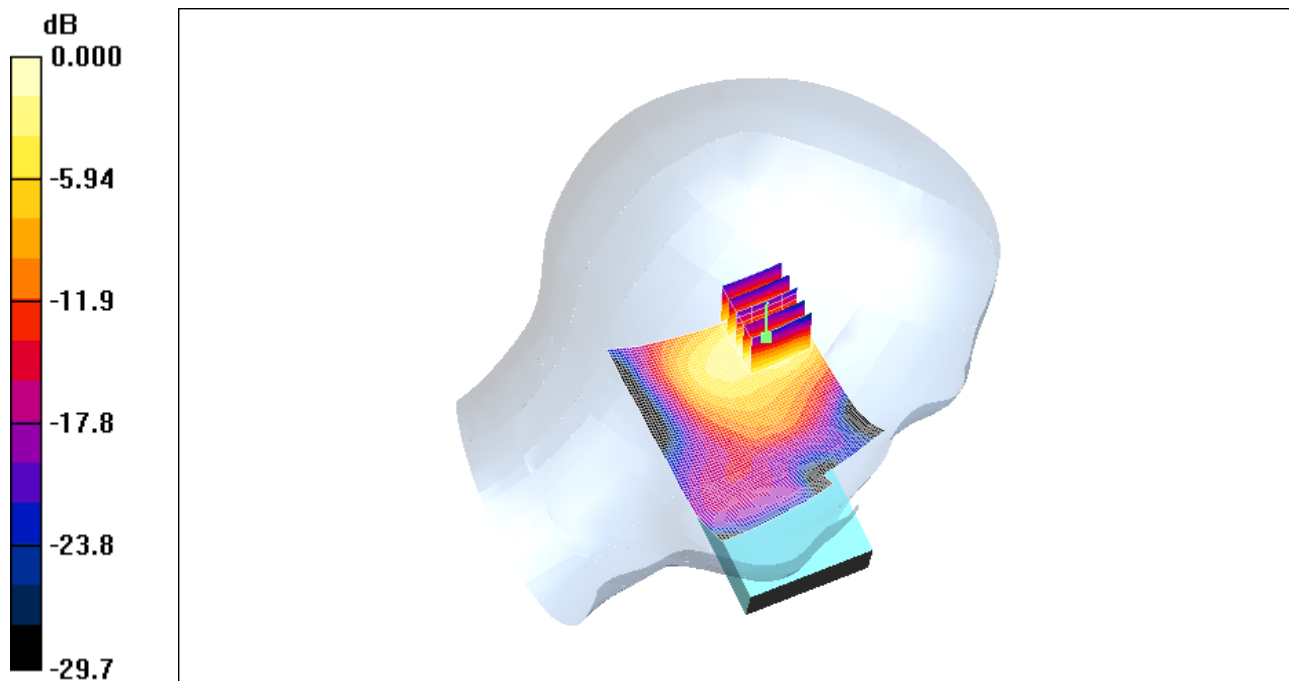

0 dB = 0.243mW/g

	Document Appendix B for the BlackBerry® Smartphone Model RDG71UW SAR Report			Page 66(66)
Author Data Andrew Becker	Dates of Test July 19 – Aug. 6, 2010	Test Report No RTS-2337-1008-36	FCC ID: L6ARDG70UW	IC ID 2503A-RDG70UW

Z axis plot for the worst case head configuration:

