


	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 4A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 5 Conducted RF Emission Test Data cont'd

Figure 4-1a: Band 5, Spurious Conducted Emissions, Low channel, 10MHz BW (RB= 1)

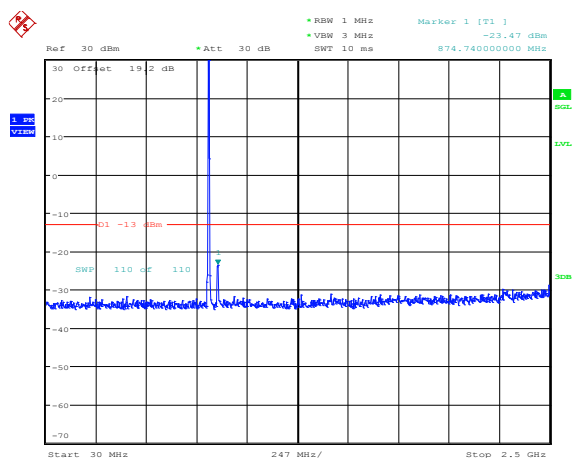


Date: 31.JUL.2015 14:15:16

Figure 4-2a: Band 5, Spurious Conducted Emissions, Low channel, 10MHz BW (RB= 1)

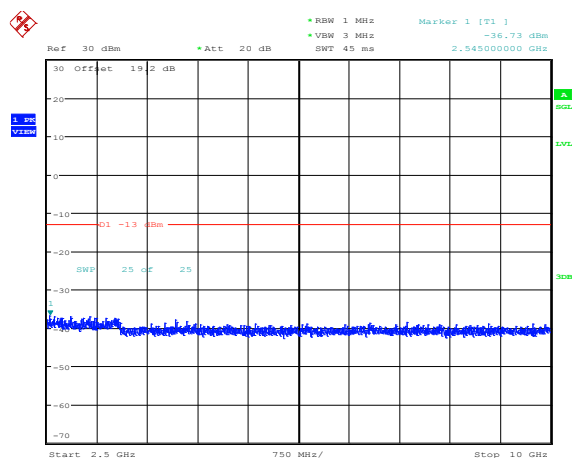


Date: 31.JUL.2015 14:15:22

Figure 4-3a: Band 5, Spurious Conducted Emissions, Middle channel, 10MHz BW (RB= 25)

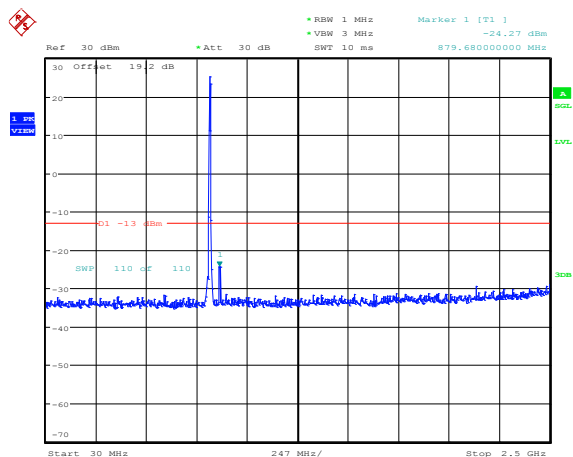

Date: 31.JUL.2015 14:15:34

Figure 4-4a: Band 5, Spurious Conducted Emissions, Middle channel, 10MHz BW (RB= 25)

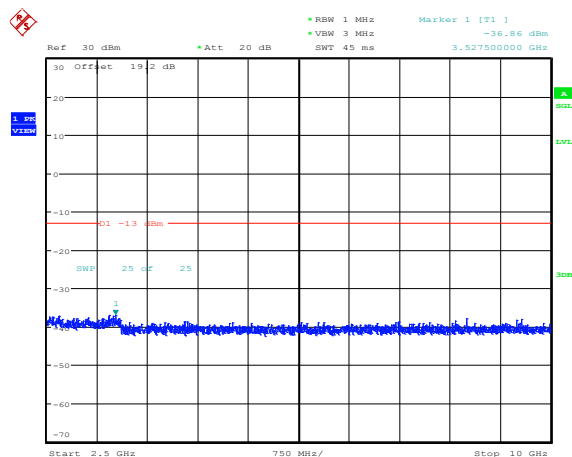


Date: 31.JUL.2015 14:15:39

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 4A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 5 Conducted RF Emission Test Data cont'd

Figure 4-5a: Band 5, Spurious Conducted Emissions, High Channel, 10MHz BW (RB= 50)

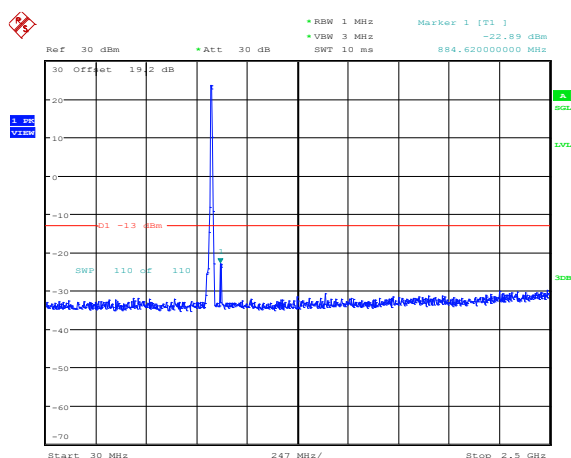


Date: 31.JUL.2015 14:15:51

Figure 4-6a: Band 5, Spurious Conducted Emissions, High Channel, 10MHz BW (RB= 50)

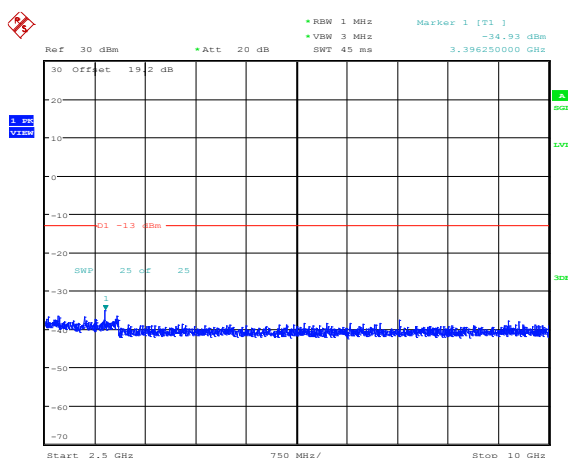


Date: 31.JUL.2015 14:15:56

Figure 4-7a: Band 5, Spurious Conducted Emissions, Low channel, 5MHz BW (RB= 1)

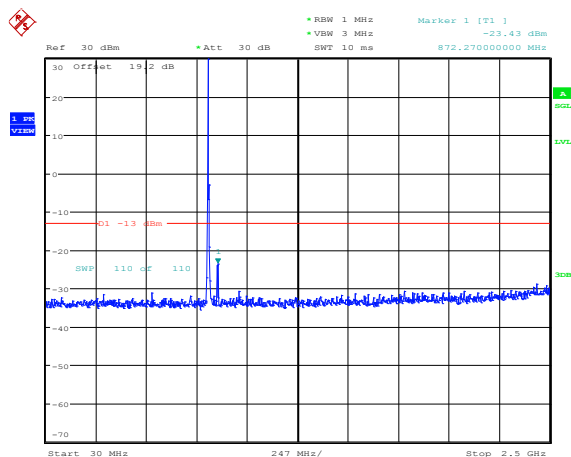

Date: 31.JUL.2015 14:16:17

Figure 4-8a: Band 5, Spurious Conducted Emissions, Low channel, 5MHz BW (RB= 1)

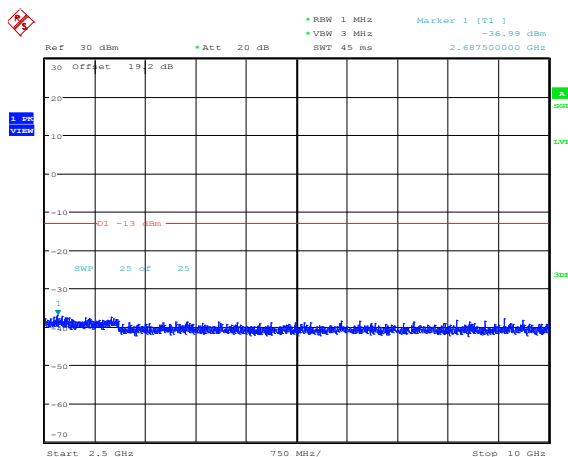


Date: 31.JUL.2015 14:16:22

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 4A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 5 Conducted RF Emission Test Data cont'd

Figure 4-9a: Band 5, Spurious Conducted Emissions, Middle Channel, 5MHz BW (RB= 15)

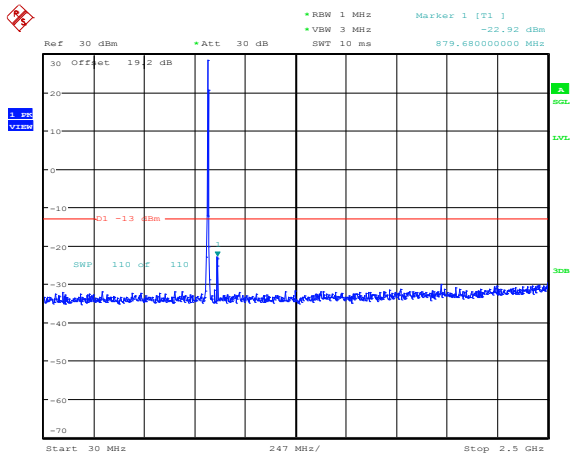


Date: 31.JUL.2015 14:16:34

Figure 4-10a: Band 5, Spurious Conducted Emissions, Middle Channel, 5MHz BW (RB= 15)

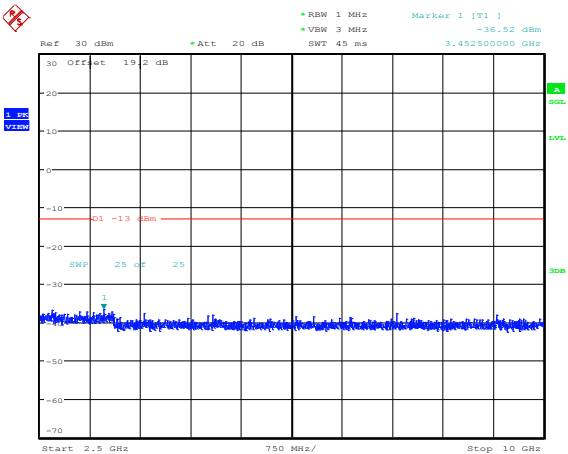


Date: 31.JUL.2015 14:16:39

Figure 4-11a: Band 5, Spurious Conducted Emissions, High channel, 5MHz BW (RB= 25)

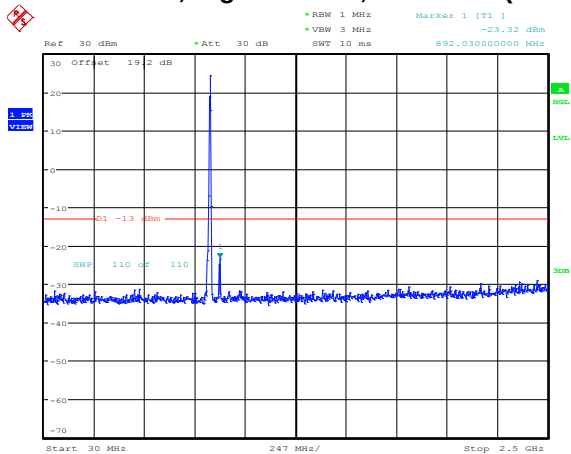

Date: 31.JUL.2015 14:16:51

Figure 4-12a: Band 5, Spurious Conducted Emissions, High channel, 5MHz BW (RB= 25)

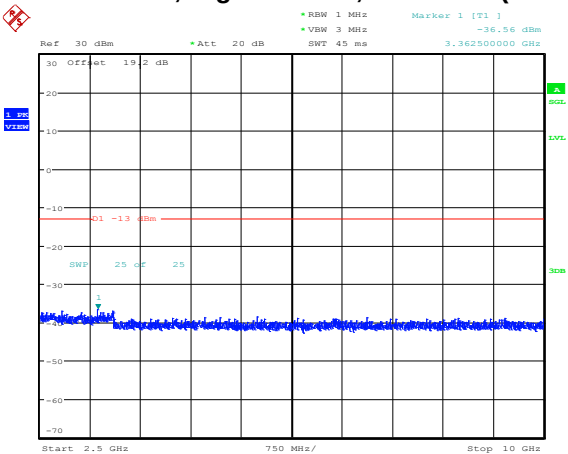


Date: 31.JUL.2015 14:16:57

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 4A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 5 Conducted RF Emission Test Data cont'd

Figure 4-13a: Band 5, Spurious Conducted Emissions, Low Channel, 1.4MHz BW (RB= 1)

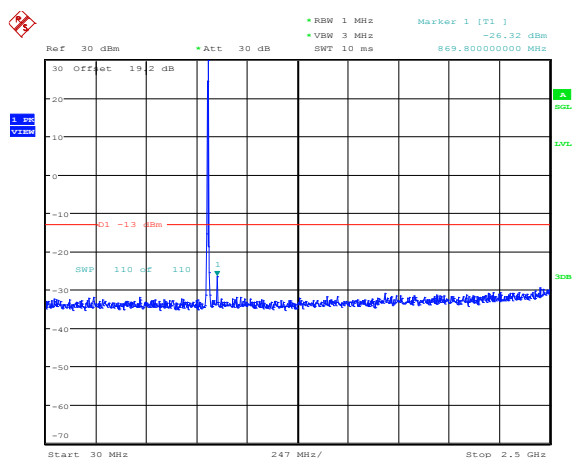


Date: 31.JUL.2015 14:17:17

Figure 4-14a: Band 5, Spurious Conducted Emissions, Low Channel, 1.4MHz BW (RB= 1)

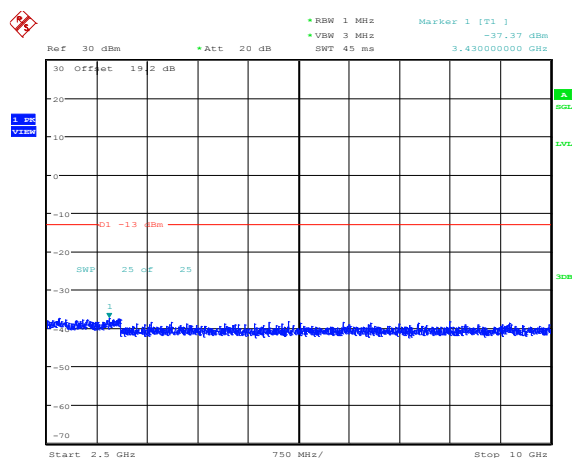


Date: 31.JUL.2015 14:17:23

Figure 4-15a: Band 5, Spurious Conducted Emissions, Middle channel, 1.4MHz BW (RB= 3)

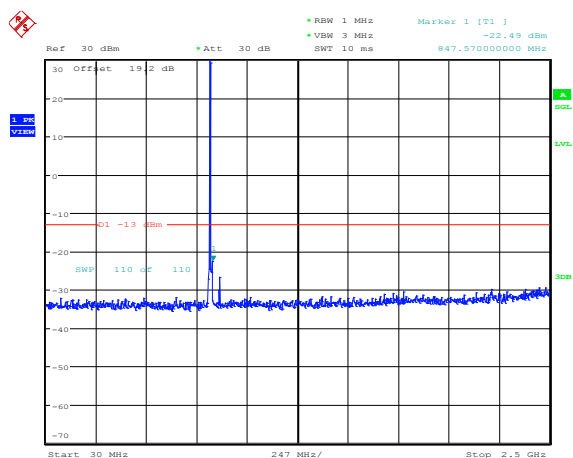

Date: 31.JUL.2015 14:17:34

Figure 4-16a: Band 5, Spurious Conducted Emissions, Middle channel, 1.4MHz BW (RB= 3)

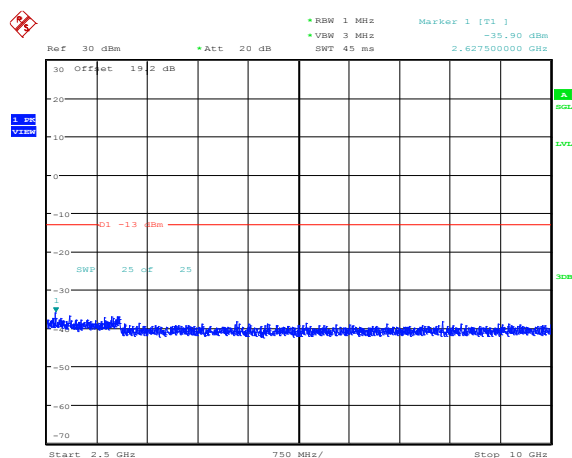


Date: 31.JUL.2015 14:17:40

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 4A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 5 Conducted RF Emission Test Data
 cont'd

Figure 4-17a: Band 5, Spurious Conducted Emissions, High channel, 1.4MHz BW (RB= 6)

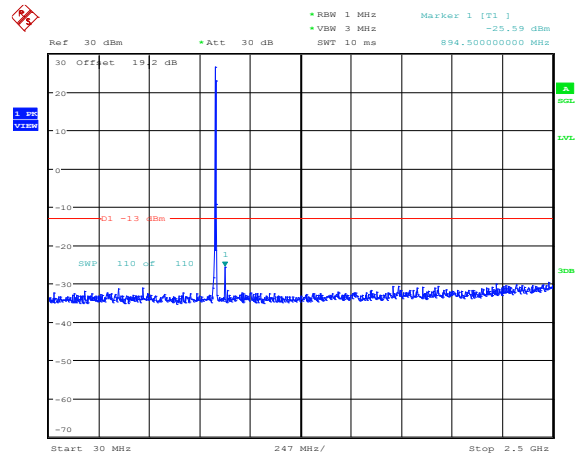

Date: 31.JUL.2015 14:17:51

Figure 4-18a: Band 5, Spurious Conducted Emissions, High channel, 1.4MHz BW (RB= 6)

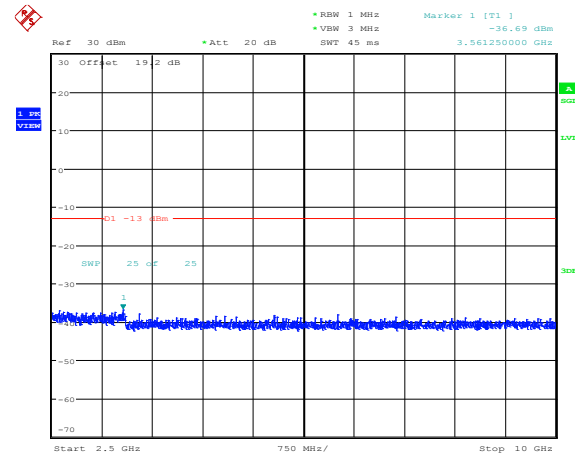

Date: 31.JUL.2015 14:17:57


FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW
IC: 2503A-RHK210LW, 2503A-RHL210LW

Page 223 of 537

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 4A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 5 Conducted RF Emission Test Data_cont'd

Figure 4-22a: Occupied Bandwidth, Band 5 Low Channel, 10MHz BW, RB=50

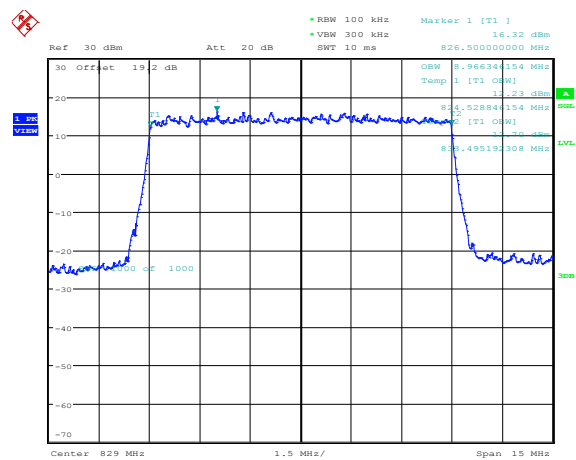


Date: 30.JUL.2015 15:35:35

Figure 4-23a: Occupied Bandwidth, Band 5 Middle Channel, 10MHz BW, RB=50

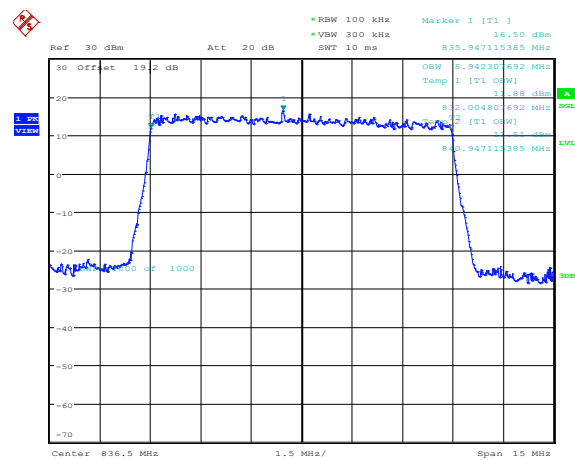

Date: 30.JUL.2015 15:36:50

Figure 4-24a: Occupied Bandwidth, Band 5 High Channel, 10MHz BW, RB=50

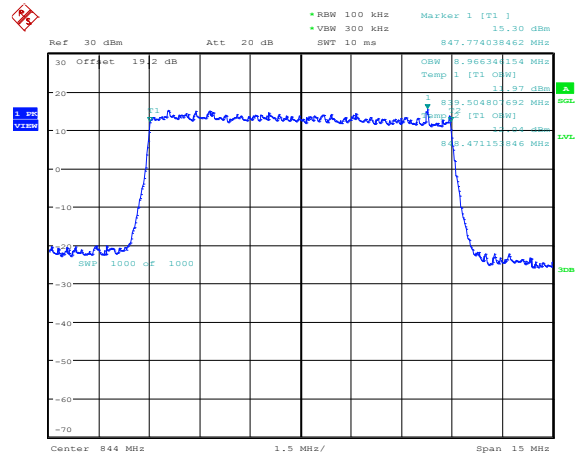


Date: 30.JUL.2015 15:37:52

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 4A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 5 Conducted RF Emission Test Data cont'd

Figure 4-25a: Occupied Bandwidth, Band 5 Low Channel, 5MHz BW, RB=25

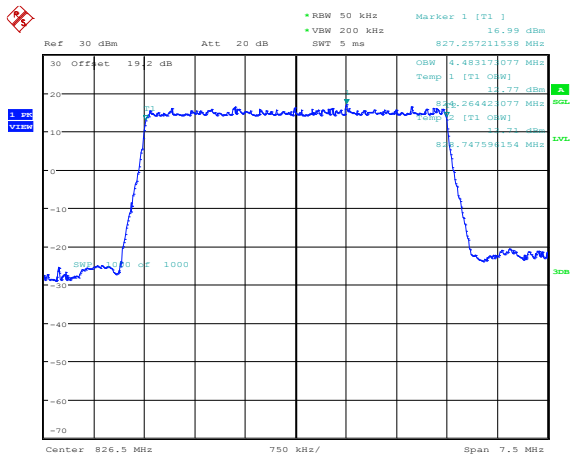


Date: 30.JUL.2015 15:38:26

Figure 4-26a: Occupied Bandwidth, Band 5 Middle Channel, 5MHz BW, RB=25

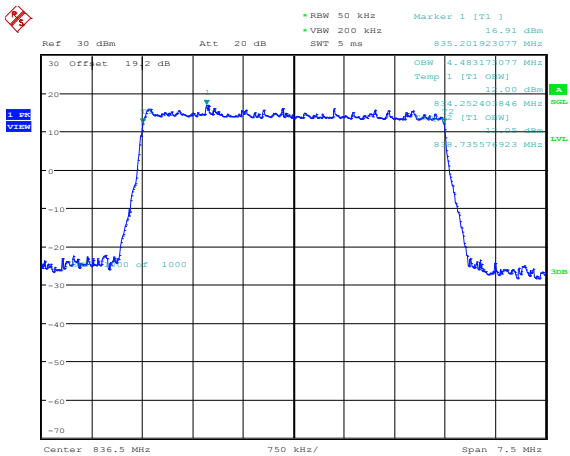

Date: 30.JUL.2015 15:39:28

Figure 4-27a: Occupied Bandwidth, Band 5 High Channel, 5MHz BW, RB=25

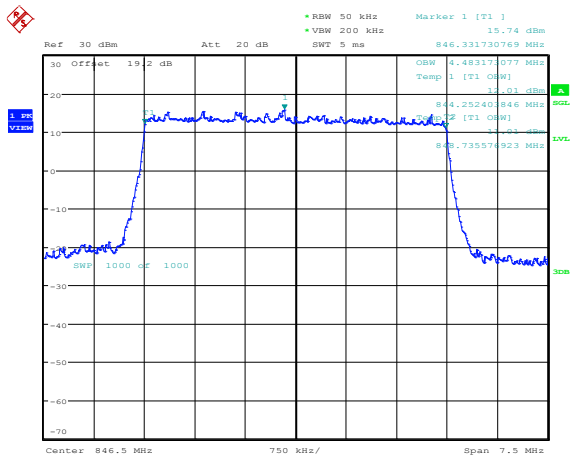


Date: 30.JUL.2015 15:39:54

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 4A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 5 Conducted RF Emission Test Data cont'd

Figure 4-31a: Occupied Bandwidth, Band 5 Low Channel, 3MHz BW, RB=15

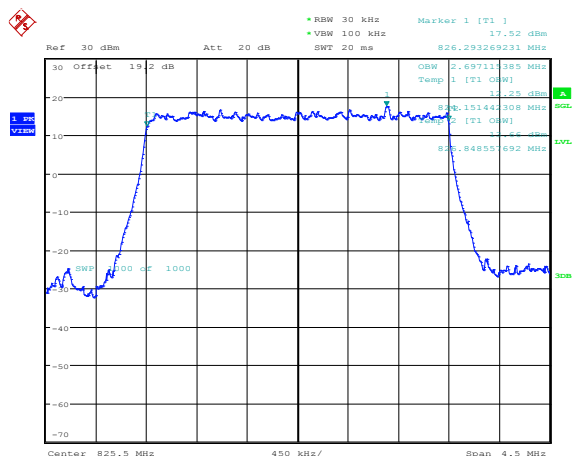


Date: 30.JUL.2015 15:42:33

Figure 4-32a: Occupied Bandwidth, Band 5 Middle Channel, 3MHz BW, RB=15

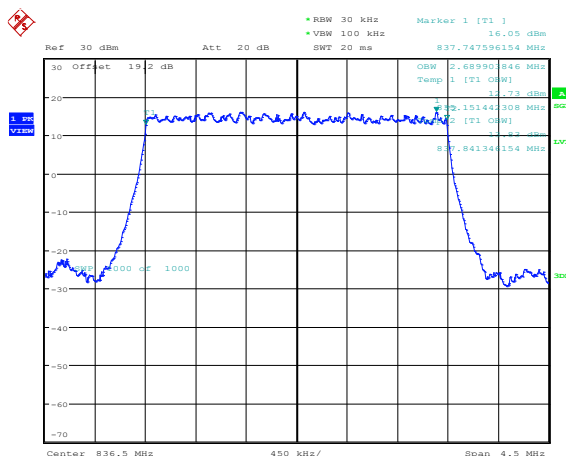

Date: 30.JUL.2015 15:43:27

Figure 4-33a: Occupied Bandwidth, Band 5 High Channel, 3MHz BW, RB=15

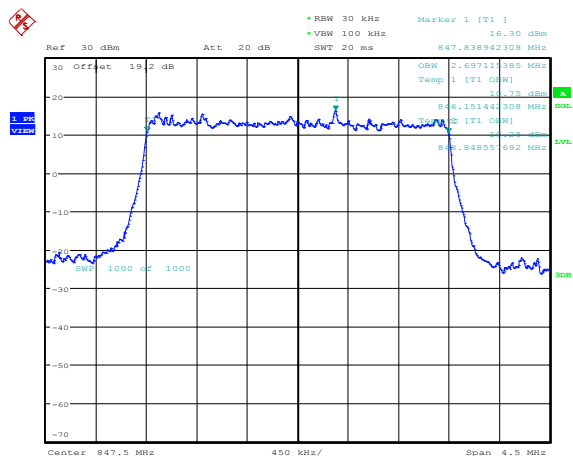


Date: 30.JUL.2015 15:44:01

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 4A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 5 Conducted RF Emission Test Data cont'd

Figure 4-34a: Occupied Bandwidth, Band 5 Low Channel, 3MHz BW, RB=15

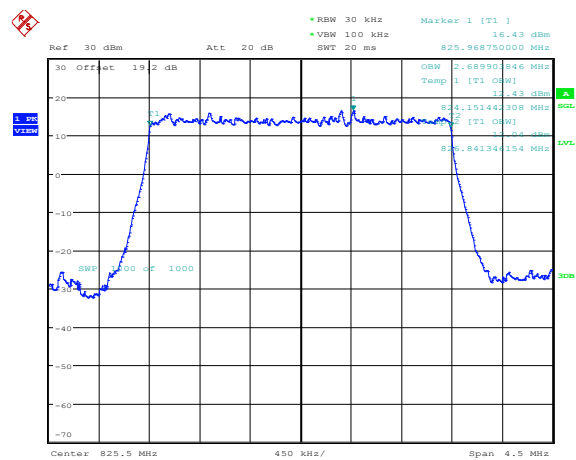


Date: 30.JUL.2015 15:44:37

Figure 4-35a: Occupied Bandwidth, Band 5 Middle Channel, 3MHz BW, RB=15

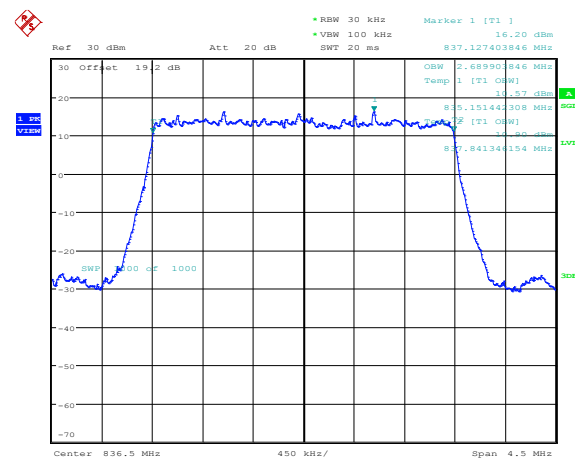

Date: 30.JUL.2015 15:45:31

Figure 4-36a: Occupied Bandwidth, Band 5 High Channel, 3MHz BW, RB=15

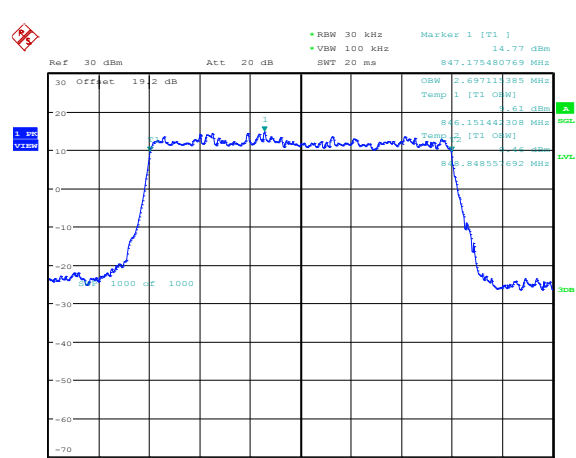


Date: 30.JUL.2015 15:46:06

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 4A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 5 Conducted RF Emission Test Data cont'd

Figure 4-37a: Occupied Bandwidth, Band 5 Low Channel, 1.4MHz BW, RB=6

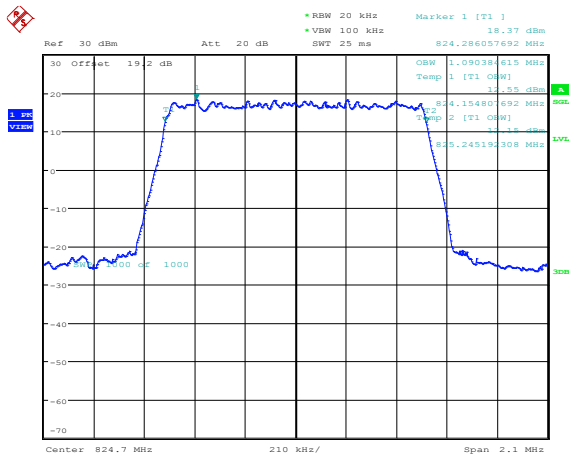


Date: 30.JUL.2015 15:46:52

Figure 4-38a: Occupied Bandwidth, Band 5 Middle Channel, 1.4MHz BW, RB=6

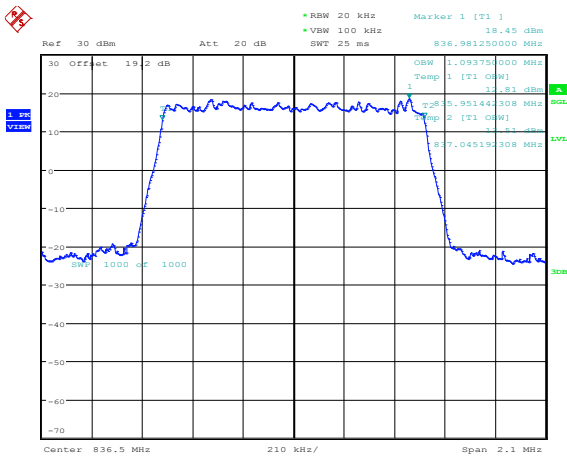

Date: 30.JUL.2015 15:47:48

Figure 4-39a: Occupied Bandwidth, Band 5 High Channel, 1.4MHz BW, RB=6

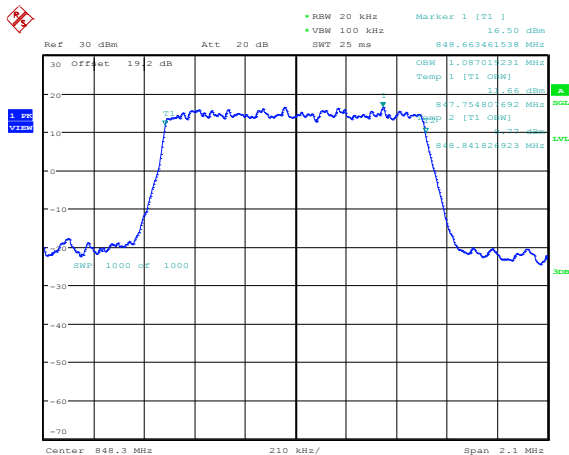


Date: 30.JUL.2015 15:48:26

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 4A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 5 Conducted RF Emission Test Data cont'd

Figure 4-40a: Occupied Bandwidth, Band 5 Low Channel, 1.4MHz BW, RB=6

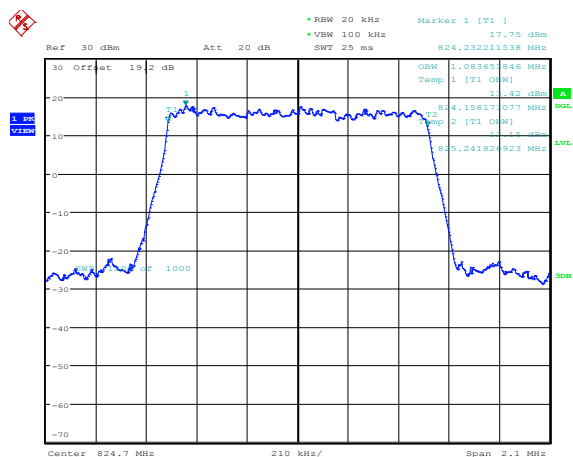


Date: 30.JUL.2015 15:49:04

Figure 4-41a: Occupied Bandwidth, Band 5 Middle Channel, 1.4MHz BW, RB=6

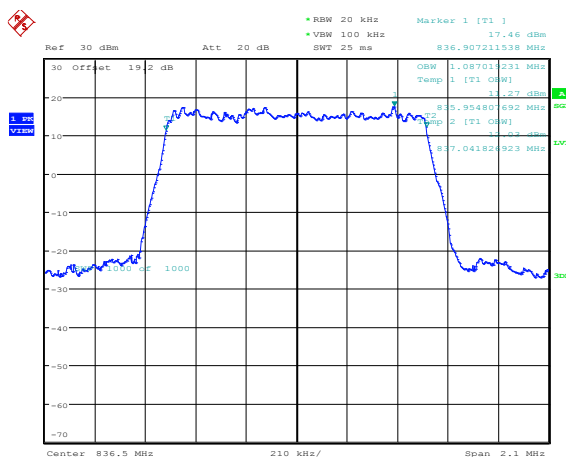

Date: 30.JUL.2015 15:50:00

Figure 4-42a: Occupied Bandwidth, Band 5 High Channel, 1.4MHz BW, RB=6

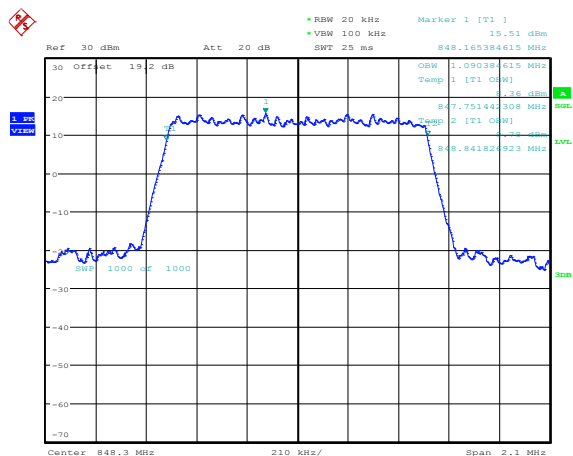


Date: 30.JUL.2015 15:50:37

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 4A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 5 Conducted RF Emission Test Data cont'd

Figure 4-43a: -26 dBc Bandwidth, Band 5 Low Channel, 10MHz BW, RB=50

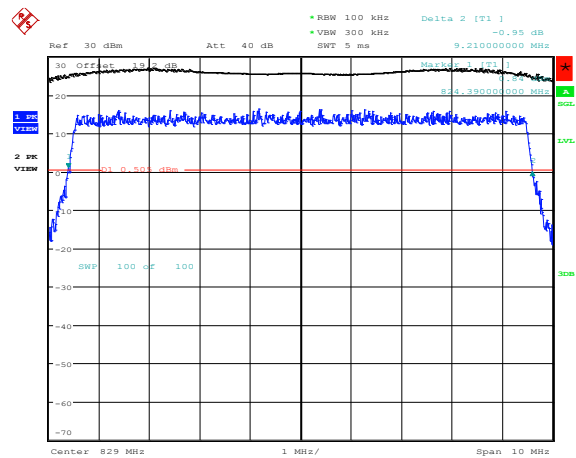


Date: 30.JUL.2015 15:22:42

Figure 4-44a: -26 dBc Bandwidth, Band 5 Middle Channel, 10MHz BW, RB=50

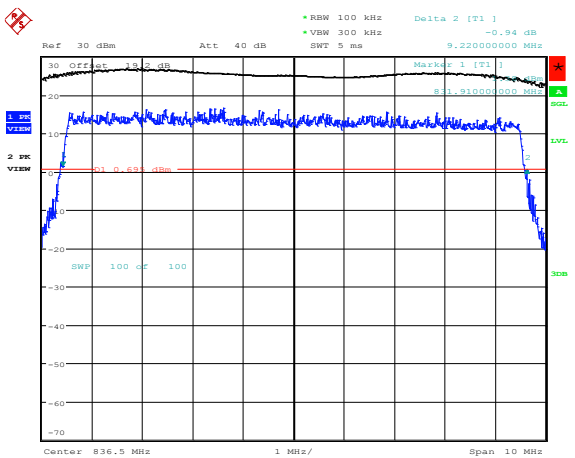


Date: 30.JUL.2015 15:22:59

Figure 4-45a: -26 dBc Bandwidth, Band 5 High Channel, 10MHz BW, RB=50

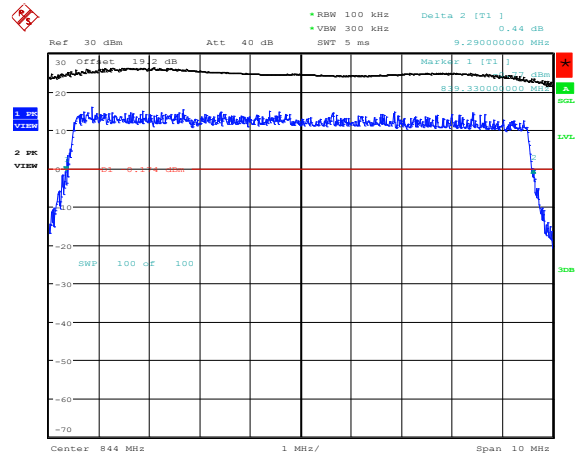

Date: 30.JUL.2015 15:23:15

Figure 4-46a: -26 dBc Bandwidth, Band 5 Low Channel, 5MHz BW, RB=25

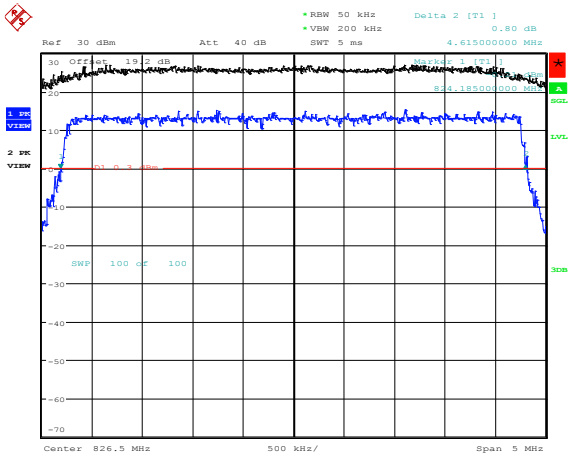


Date: 30.JUL.2015 15:23:37

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 4A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 5 Conducted RF Emission Test Data cont'd

Figure 4-47a: -26 dBc Bandwidth, Band 5 Middle Channel, 5MHz BW, RB=25

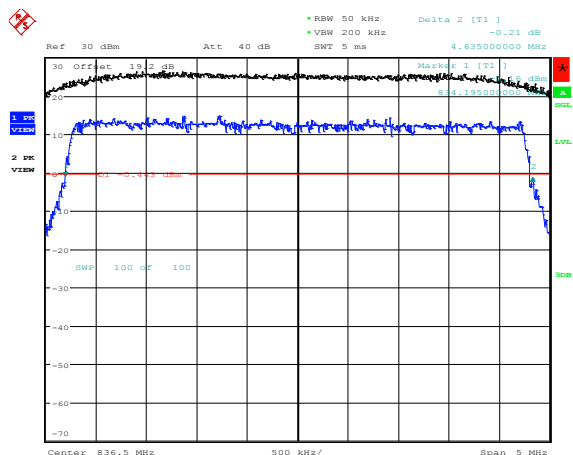


Date: 30.JUL.2015 15:23:53

Figure 4-48a: -26 dBc Bandwidth, Band 5 High Channel, 5MHz BW, RB=25

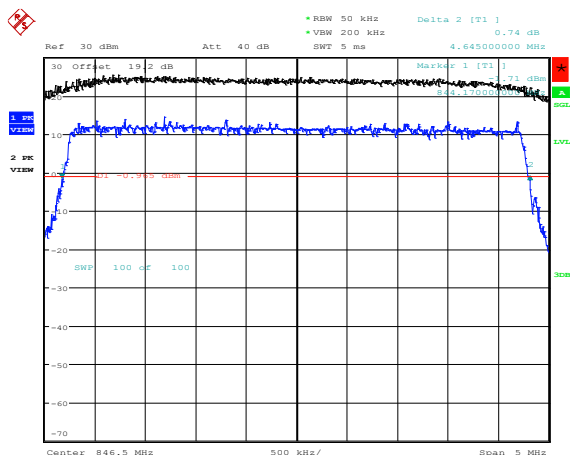


Date: 30.JUL.2015 15:24:06

Figure 4-49a: -26 dBc Bandwidth, Band 5 Low Channel, 1.4MHz BW, RB=6

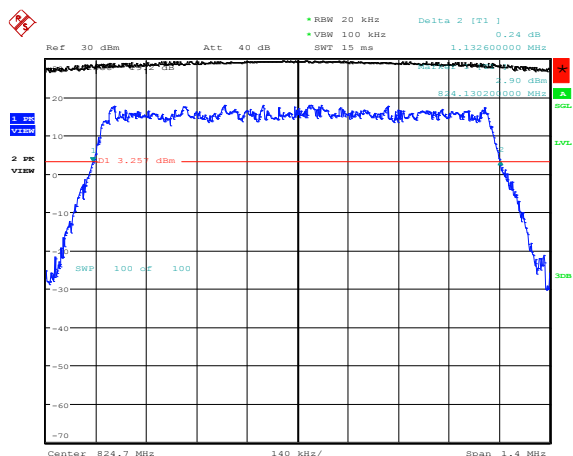

Date: 30.JUL.2015 15:24:30

Figure 4-50a: -26 dBc Bandwidth, Band 5 Middle Channel, 1.4MHz BW, RB=6

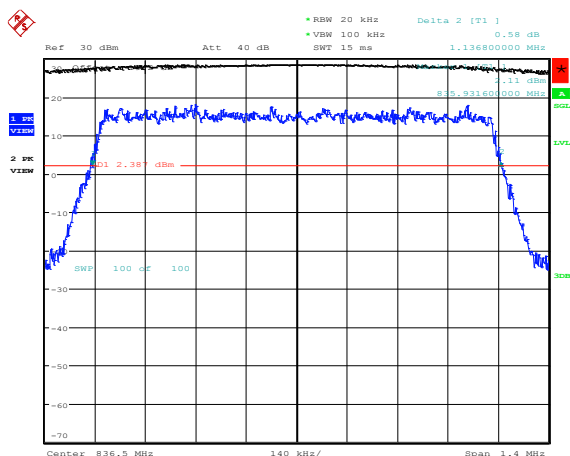


Date: 30.JUL.2015 15:24:45

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 4A	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 5 Conducted RF Emission Test Data cont'd

Figure 4-51a: -26 dBc Bandwidth, Band 5 High Channel, 1.4MHz BW, RB=6

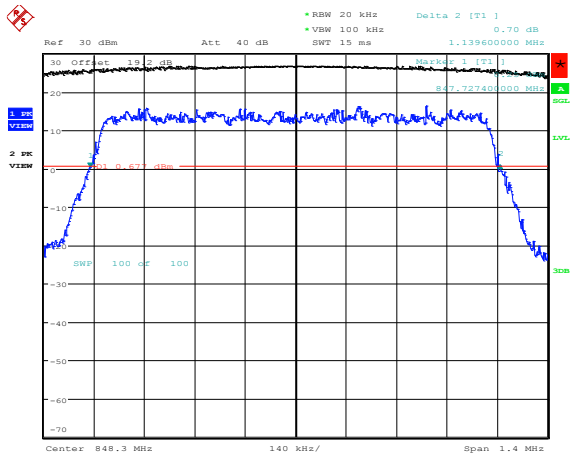


Date: 30.JUL.2015 15:25:00

Figure 4-52a: Band 5 Low Channel Mask, 10MHz BW, RB=50

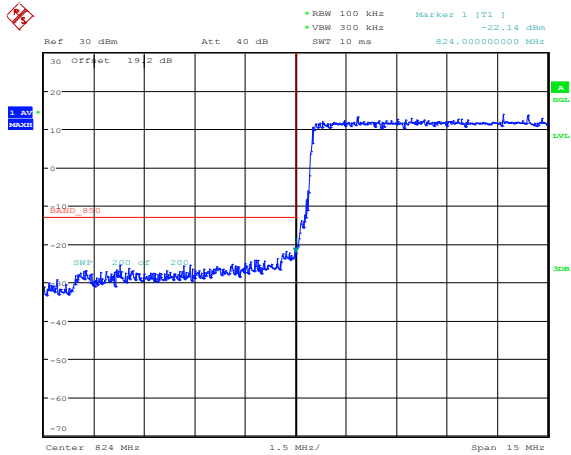

Date: 30.JUL.2015 22:52:35

Figure 4-53a: Band 5 High Channel Mask, 10MHz BW, RB=50

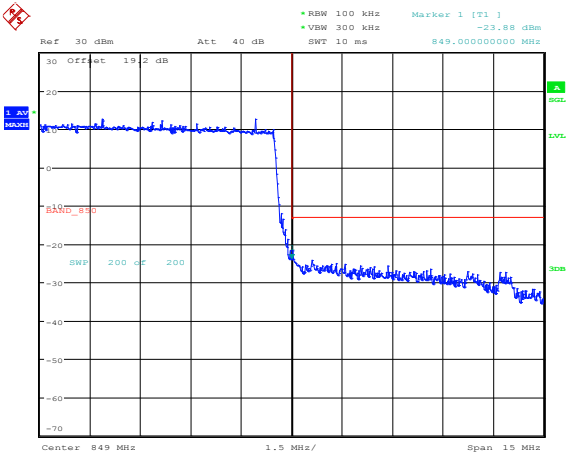


Date: 30.JUL.2015 22:53:07

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 4A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 5 Conducted RF Emission Test Data cont'd

Figure 4-54a: Band 5 Low Channel Mask, 5MHz BW, RB=25

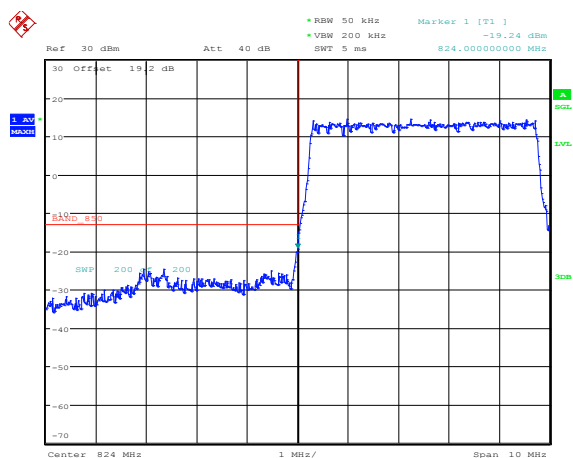


Date: 30.JUL.2015 22:53:42

Figure 4-55a: Band 5 High Channel Mask, 5MHz BW, RB=25

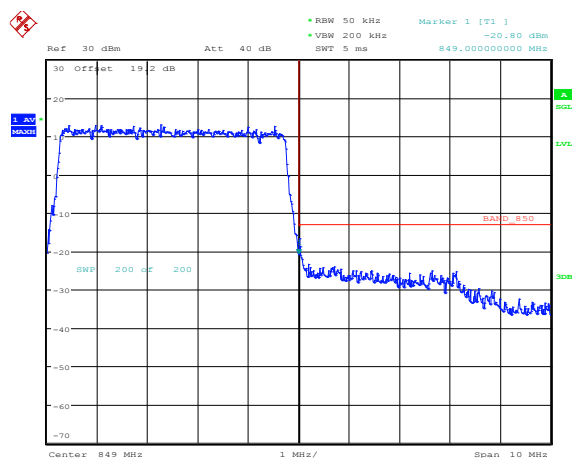


Date: 30.JUL.2015 22:54:11

Figure 4-56a: Band 5 Low Channel Mask, 1.4MHz BW, RB=6

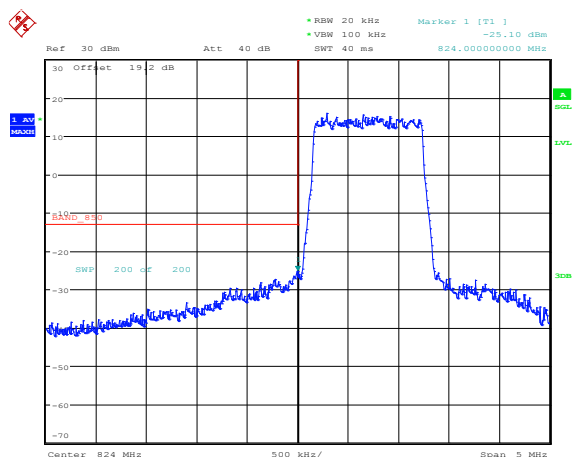

Date: 30.JUL.2015 22:54:51

Figure 4-57a: Band 5 High Channel Mask, 1.4MHz BW, RB=6

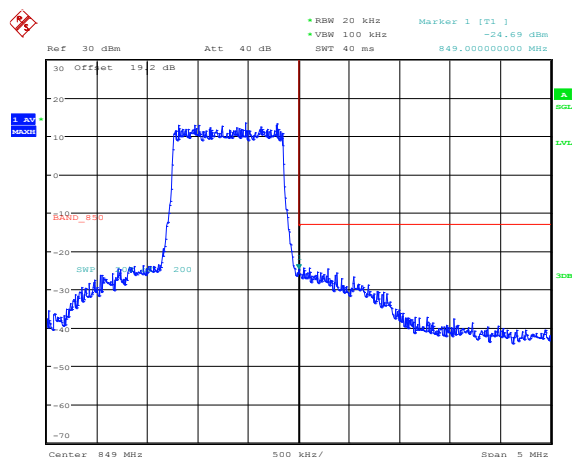


Date: 30.JUL.2015 22:55:23

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 4A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 5 Conducted RF Emission Test Data cont'd

Figure 4-58a: Band 5 Low Channel Mask, 10MHz BW, RB=1

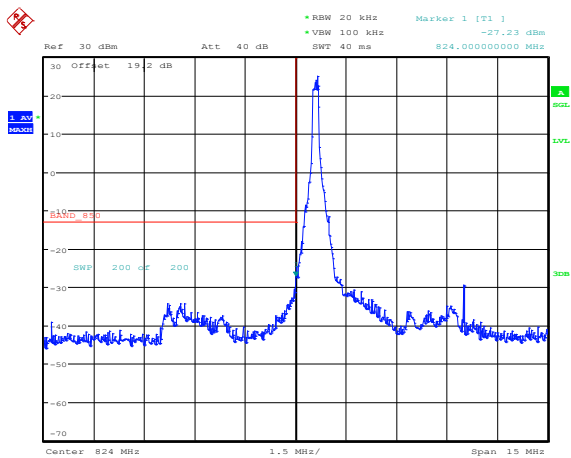

Date: 30.JUL.2015 22:52:25

Figure 4-59a: Band 5 High Channel Mask, 10MHz BW, RB=1

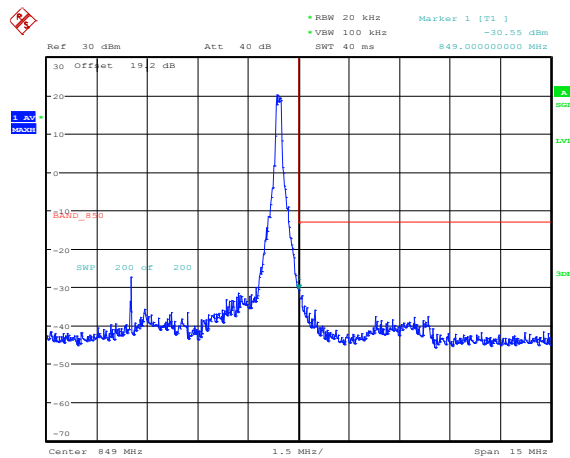


Date: 30.JUL.2015 22:52:54

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 4A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 5 Conducted RF Emission Test Data cont'd

**Figure 4-60a: Band 5 Low Channel Mask, 5MHz
BW, RB=1**

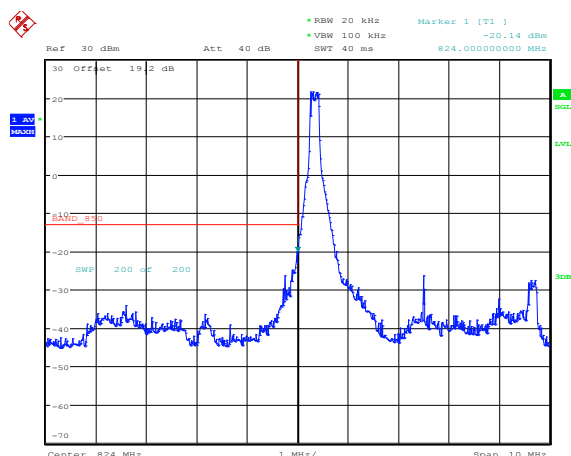


Date: 30.JUL.2015 22:53:33

**Figure 4-61a: Band 5 High Channel Mask, 5MHz
BW, RB=1**

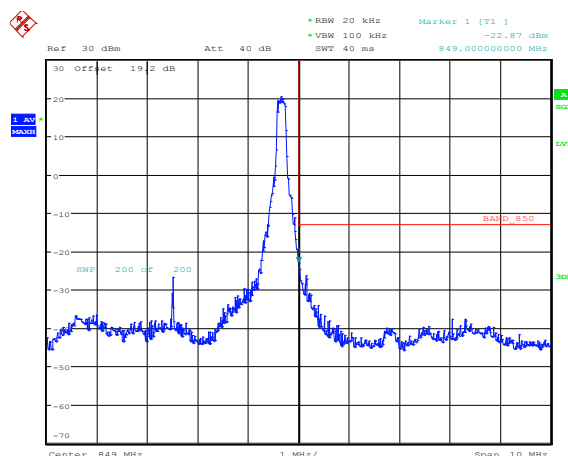


Date: 30.JUL.2015 22:54:00

**Figure 4-62a: Band 5 Low Channel Mask, 1.4MHz
BW, RB=1**

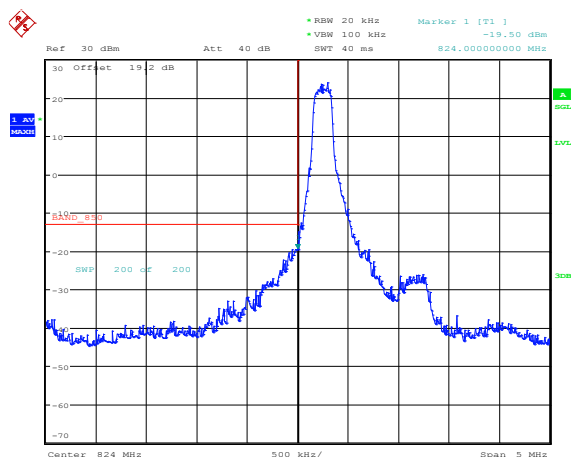

Date: 30.JUL.2015 22:54:36

**Figure 4-63a: Band 5 High Channel Mask, 1.4MHz
BW, RB=1**

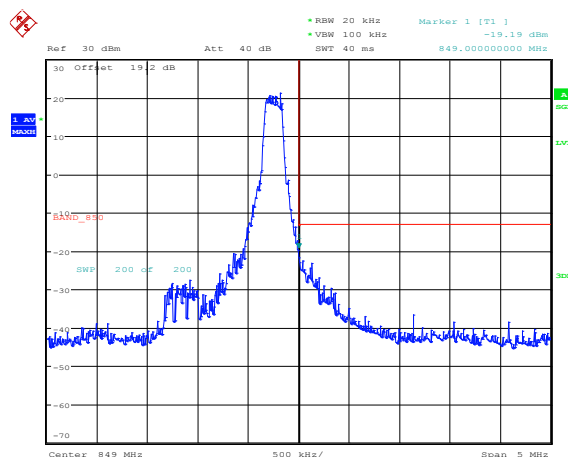


Date: 30.JUL.2015 22:55:08

APPENDIX 4B – LTE Band 5 FREQUENCY STABILITY TEST DATA

BlackBerry	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 4B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE Band 5 Frequency Stability Test Data

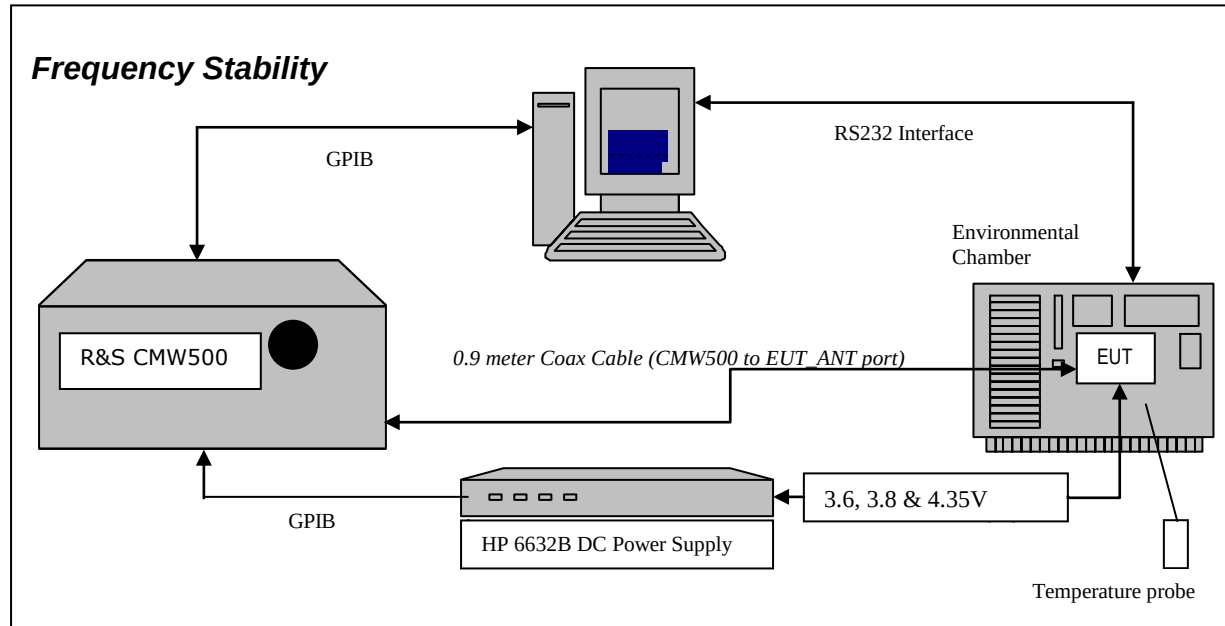

The following measurements were performed by Sijia Li.

CFR 47 Chapter 1 - Federal Communications Commission Rules

Part 2 Required Measurements

2.1055 Frequency Stability - Procedures

(a,b) Frequency Stability - Temperature Variation

(d) Frequency Stability - Voltage Variation

24.236 Frequency Stability.

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

The EUT meets the requirements as stated in CFR 47 chapter 1, Section 27.54, CFR 47 and RSS-139, 6.3 Frequency Stability.

Frequency Stability measurement devices were configured as presented in the block diagram recording frequency, power, data, temperatures, and stepped voltages controlled via a GPIB interface linked to the Environmental chamber, a DC power supply, and the Communications Test Set. A 0.9-metre coax cable was calibrated to characterize the insertion loss for the transmitted frequencies between the RF input/output of the CMW 500 and the EUT antenna port.

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 4B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

Test Setup:

The EUT was placed in the Temperature chamber and connected to CMW 500 outside as shown in the figure above. Dry air was pumped inside the temperature chamber to maintain a backpressure during the test. The EUT was kept in the off condition at all times except when the following measurements were to be made.

The chamber was switched on and the temperature was set to -30°C. After the chamber stabilized at -30 °C there was a soak period of one hour to alleviate moisture in the chamber, the EUT voltage was enabled. The system software recorded the frequency, power, and associated measurements.

A Computer system controlled the automated software. This application was given the command of activating all machines intrinsic to the temperature and voltage tests controlling the CMW 500 via the GPIB Bus. The Environmental Chamber was instructed through an RS-232 serial line. The EUT dialogue was passed through a serial connection.

The EUT repetitively transmitted 100 bursts for each set of programmed parameters recording temperature, voltage settings, and systematically selected frequencies. The power supply was cycled from minimum voltage 3.6 volts, 3.8 volts and to 4.35 volts maximum voltage. The frequency error was measured at a maximum output power and recorded by the automated system test software.

The EUT output power and frequency was measured at 3.6 volts, 3.8 volts and 4.35 volts. The transmit frequency was varied in 3 steps consisting of 829.0 MHz, 836.5 MHz and 844.0 MHz each was measured under 10 MHz bandwidth with maximum (50) RBs. This frequency was recorded in MHz and deviation from nominal, in Parts Per Million.

After the initial one-hour soak at the beginning of the tests, a period of thirty minutes soak was initialized between each ascending temperature step, before proceeding to the next measurement test cycle.

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 4B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

Procedure:

The test system software for commencing the Frequency Stability Tests carried through the following cycle.

15. Switch on the HP 6632B power supply; CMW 500 Communications test Set, and Environmental Chamber.
16. Start test program
17. Set the Temperature to –30°C and maintain a period of one- hour soak time, with the EUT supply voltage disabled.
18. Set power supply voltage to 3.6 volts.
19. Set up CMW 500 Radio Communication Tester.
20. Command the CMW 500 to switch to the low channel.
21. Enable the voltage to the EUT, and connect a link to the CMW 500 test set.
22. EUT is commanded to Transmit 100 Bursts.
23. Software logs the following data from the CMW 500, power supply and temperature chamber: Traffic Channel Number, Traffic Channel Frequency, Power Level, Chamber Temperature, Supply Voltage, Power and Frequency Error.
24. The CMW 500 commands the EUT to change frequency to the middle channel and high channel and repeats steps 7 to 9.
25. Repeat steps 5 to 10 changing the supply voltage to 3.8 Volts
26. Increase temperature by 10°C and soak for 1/2 hour.
27. Repeat steps 4 - 12 for temperatures –30°C to 60°C.
28. Repeat steps 5 to 10 changing the supply voltage to 4.35 volts

Procedure 5 to 10 was repeated at room temperature (20°C) with the power supply voltage set to 3.6, 3.8 and 4.35 volts

The following test configurations were measured on model RHK211LW (STV100-1):

The maximum frequency error in the LTE Band 5 measured was **0.0041 PPM**.

The following test configurations were measured on model RHL211LW (STV100-3):

The maximum frequency error in the LTE Band 5 measured was **-0.0062 PPM**.

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 4B	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

The following test configurations were measured on model RHK211LW (STV100-1):

LTE Band 5 results: channels 20400, 20525 and 20649 @ 20°C maximum transmitted power

Traffic Channel Number	LTE Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20450	829.0	3.6	20	1.72	0.0021
20525	836.5	3.6	20	2.17	0.0026
20600	844.0	3.6	20	-1.92	-0.0023

Traffic Channel Number	LTE Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20450	829.0	3.8	20	3.40	0.0041
20525	836.5	3.8	20	1.89	0.0023
20600	844.0	3.8	20	-2.98	-0.0035

Traffic Channel Number	LTE Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20450	829.0	4.35	20	1.97	0.0024
20525	836.5	4.35	20	-2.39	-0.0029
20600	844.0	4.35	20	-2.35	-0.0028

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 4B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE band 5 Results: channel 20400 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20450	829.0	3.6	-30	-3.33	-0.0040
20450	829.0	3.6	-20	-3.91	-0.0047
20450	829.0	3.6	-10	-2.05	-0.0025
20450	829.0	3.6	0	3.36	0.0041
20450	829.0	3.6	10	3.46	0.0042
20450	829.0	3.6	20	1.72	0.0021
20450	829.0	3.6	30	-2.89	-0.0035
20450	829.0	3.6	40	-2.27	-0.0027
20450	829.0	3.6	50	-2.85	-0.0034
20450	829.0	3.6	60	-2.86	-0.0035
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20450	829.0	3.8	-30	-4.48	-0.0054
20450	829.0	3.8	-20	3.92	0.0047
20450	829.0	3.8	-10	-3.08	-0.0037
20450	829.0	3.8	0	2.96	0.0036
20450	829.0	3.8	10	-1.16	-0.0014
20450	829.0	3.8	20	3.40	0.0041
20450	829.0	3.8	30	-2.49	-0.0030
20450	829.0	3.8	40	-2.53	-0.0031
20450	829.0	3.8	50	-2.55	-0.0031
20450	829.0	3.8	60	-1.57	-0.0019
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20450	829.0	4.35	-30	-2.80	-0.0034
20450	829.0	4.35	-20	-3.76	-0.0045
20450	829.0	4.35	-10	2.39	0.0029
20450	829.0	4.35	0	3.58	0.0043
20450	829.0	4.35	10	3.82	0.0046
20450	829.0	4.35	20	1.97	0.0024
20450	829.0	4.35	30	-3.75	-0.0045
20450	829.0	4.35	40	-3.45	-0.0042
20450	829.0	4.35	50	1.85	0.0022
20450	829.0	4.35	60	3.45	0.0042

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 4B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE band 5 Results: channel 20525 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20525	836.5	3.6	-30	2.92	0.0035
20525	836.5	3.6	-20	-3.26	-0.0039
20525	836.5	3.6	-10	2.52	0.0030
20525	836.5	3.6	0	2.95	0.0035
20525	836.5	3.6	10	-1.85	-0.0022
20525	836.5	3.6	20	2.17	0.0026
20525	836.5	3.6	30	-3.59	-0.0043
20525	836.5	3.6	40	2.32	0.0028
20525	836.5	3.6	50	-4.06	-0.0049
20525	836.5	3.6	60	-3.68	-0.0044
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20525	836.5	3.8	-30	-4.01	-0.0048
20525	836.5	3.8	-20	-2.90	-0.0035
20525	836.5	3.8	-10	3.60	0.0043
20525	836.5	3.8	0	1.92	0.0023
20525	836.5	3.8	10	2.95	0.0035
20525	836.5	3.8	20	1.89	0.0023
20525	836.5	3.8	30	2.07	0.0025
20525	836.5	3.8	40	-3.12	-0.0037
20525	836.5	3.8	50	2.92	0.0035
20525	836.5	3.8	60	-4.02	-0.0048
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20525	836.5	4.35	-30	-2.39	-0.0029
20525	836.5	4.35	-20	-3.19	-0.0038
20525	836.5	4.35	-10	3.50	0.0042
20525	836.5	4.35	0	3.25	0.0039
20525	836.5	4.35	10	3.22	0.0038
20525	836.5	4.35	20	-2.39	-0.0029
20525	836.5	4.35	30	-3.72	-0.0044
20525	836.5	4.35	40	-1.97	-0.0024
20525	836.5	4.35	50	-2.16	-0.0026
20525	836.5	4.35	60	-2.27	-0.0027

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 4B	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE band 5 Results: channel 20649 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20600	844.0	3.6	-30	-5.31	-0.0063
20600	844.0	3.6	-20	-4.65	-0.0055
20600	844.0	3.6	-10	-3.60	-0.0043
20600	844.0	3.6	0	-2.59	-0.0031
20600	844.0	3.6	10	2.83	0.0034
20600	844.0	3.6	20	-1.92	-0.0023
20600	844.0	3.6	30	-2.60	-0.0031
20600	844.0	3.6	40	-2.89	-0.0034
20600	844.0	3.6	50	-3.68	-0.0044
20600	844.0	3.6	60	-3.83	-0.0045
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20600	844.0	3.8	-30	-5.09	-0.0060
20600	844.0	3.8	-20	-4.16	-0.0049
20600	844.0	3.8	-10	-2.57	-0.0031
20600	844.0	3.8	0	1.96	0.0023
20600	844.0	3.8	10	1.95	0.0023
20600	844.0	3.8	20	-2.98	-0.0035
20600	844.0	3.8	30	-3.92	-0.0046
20600	844.0	3.8	40	-2.90	-0.0034
20600	844.0	3.8	50	2.15	0.0025
20600	844.0	3.8	60	-4.84	-0.0057
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20600	844.0	4.35	-30	-2.76	-0.0033
20600	844.0	4.35	-20	-5.01	-0.0059
20600	844.0	4.35	-10	-4.48	-0.0053
20600	844.0	4.35	0	-2.26	-0.0027
20600	844.0	4.35	10	2.62	0.0031
20600	844.0	4.35	20	-2.35	-0.0028
20600	844.0	4.35	30	-3.50	-0.0042
20600	844.0	4.35	40	-4.22	-0.0050
20600	844.0	4.35	50	-4.08	-0.0048
20600	844.0	4.35	60	-3.76	-0.0045

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 4B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

The following test configurations were measured on model RHL211LW (STV100-3):

LTE Band 5 results: channels 20400, 20525 and 20649 @ 20°C maximum transmitted power

Traffic Channel Number	LTE Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20450	829.0	3.6	20	-1.76	-0.0021
20525	836.5	3.6	20	-3.22	-0.0038
20600	844.0	3.6	20	-2.75	-0.0033

Traffic Channel Number	LTE Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20450	829.0	3.8	20	-2.57	-0.0031
20525	836.5	3.8	20	-2.82	-0.0034
20600	844.0	3.8	20	-3.15	-0.0037

Traffic Channel Number	LTE Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20450	829.0	4.35	20	2.17	0.0026
20525	836.5	4.35	20	-2.50	-0.0030
20600	844.0	4.35	20	-4.32	-0.0051

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 4B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE band 5 Results: channel 20400 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20450	829.0	3.6	-30	-1.80	-0.0022
20450	829.0	3.6	-20	-3.10	-0.0037
20450	829.0	3.6	-10	-2.39	-0.0029
20450	829.0	3.6	0	-2.10	-0.0025
20450	829.0	3.6	10	-2.92	-0.0035
20450	829.0	3.6	20	-1.76	-0.0021
20450	829.0	3.6	30	-2.39	-0.0029
20450	829.0	3.6	40	-1.62	-0.0019
20450	829.0	3.6	50	-4.33	-0.0052
20450	829.0	3.6	60	-1.80	-0.0022
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20450	829.0	3.8	-30	-1.96	-0.0024
20450	829.0	3.8	-20	2.60	0.0031
20450	829.0	3.8	-10	-2.27	-0.0027
20450	829.0	3.8	0	2.73	0.0033
20450	829.0	3.8	10	-1.90	-0.0023
20450	829.0	3.8	20	-2.57	-0.0031
20450	829.0	3.8	30	-2.55	-0.0031
20450	829.0	3.8	40	-3.73	-0.0045
20450	829.0	3.8	50	-2.39	-0.0029
20450	829.0	3.8	60	-1.96	-0.0024
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20450	829.0	4.35	-30	-2.46	-0.0030
20450	829.0	4.35	-20	2.16	0.0026
20450	829.0	4.35	-10	-1.83	-0.0022
20450	829.0	4.35	0	1.63	0.0020
20450	829.0	4.35	10	2.83	0.0034
20450	829.0	4.35	20	2.17	0.0026
20450	829.0	4.35	30	2.90	0.0035
20450	829.0	4.35	40	-3.82	-0.0046
20450	829.0	4.35	50	-4.15	-0.0050
20450	829.0	4.35	60	-2.46	-0.0030

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 4B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE band 5 Results: channel 20525 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20525	836.5	3.6	-30	-2.43	-0.0029
20525	836.5	3.6	-20	1.97	0.0024
20525	836.5	3.6	-10	3.22	0.0038
20525	836.5	3.6	0	3.09	0.0037
20525	836.5	3.6	10	2.93	0.0035
20525	836.5	3.6	20	-3.22	-0.0038
20525	836.5	3.6	30	-2.59	-0.0031
20525	836.5	3.6	40	-3.42	-0.0041
20525	836.5	3.6	50	-2.76	-0.0033
20525	836.5	3.6	60	-2.43	-0.0029
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20525	836.5	3.8	-30	-4.09	-0.0049
20525	836.5	3.8	-20	3.18	0.0038
20525	836.5	3.8	-10	-3.35	-0.0040
20525	836.5	3.8	0	-2.20	-0.0026
20525	836.5	3.8	10	2.12	0.0025
20525	836.5	3.8	20	-2.82	-0.0034
20525	836.5	3.8	30	-2.83	-0.0034
20525	836.5	3.8	40	-3.86	-0.0046
20525	836.5	3.8	50	-2.12	-0.0025
20525	836.5	3.8	60	-4.09	-0.0049
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20525	836.5	4.35	-30	-3.09	-0.0037
20525	836.5	4.35	-20	1.95	0.0023
20525	836.5	4.35	-10	1.93	0.0023
20525	836.5	4.35	0	2.05	0.0024
20525	836.5	4.35	10	-1.92	-0.0023
20525	836.5	4.35	20	-2.50	-0.0030
20525	836.5	4.35	30	-2.36	-0.0028
20525	836.5	4.35	40	-3.82	-0.0046
20525	836.5	4.35	50	1.63	0.0019
20525	836.5	4.35	60	-3.09	-0.0037

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 4B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE band 5 Results: channel 20649 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20600	844.0	3.6	-30	-4.35	-0.0052
20600	844.0	3.6	-20	-3.50	-0.0042
20600	844.0	3.6	-10	4.02	0.0048
20600	844.0	3.6	0	-2.93	-0.0035
20600	844.0	3.6	10	-3.02	-0.0036
20600	844.0	3.6	20	-2.75	-0.0033
20600	844.0	3.6	30	-2.98	-0.0035
20600	844.0	3.6	40	-4.25	-0.0050
20600	844.0	3.6	50	-4.79	-0.0057
20600	844.0	3.6	60	-4.35	-0.0052
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20600	844.0	3.8	-30	-4.49	-0.0053
20600	844.0	3.8	-20	-2.90	-0.0034
20600	844.0	3.8	-10	-2.70	-0.0032
20600	844.0	3.8	0	-3.35	-0.0040
20600	844.0	3.8	10	-2.60	-0.0031
20600	844.0	3.8	20	-3.15	-0.0037
20600	844.0	3.8	30	-2.47	-0.0029
20600	844.0	3.8	40	-3.46	-0.0041
20600	844.0	3.8	50	-3.72	-0.0044
20600	844.0	3.8	60	-4.49	-0.0053
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20600	844.0	4.35	-30	-3.71	-0.0044
20600	844.0	4.35	-20	-1.86	-0.0022
20600	844.0	4.35	-10	-2.22	-0.0026
20600	844.0	4.35	0	-3.29	-0.0039
20600	844.0	4.35	10	-2.47	-0.0029
20600	844.0	4.35	20	-4.32	-0.0051
20600	844.0	4.35	30	-3.12	-0.0037
20600	844.0	4.35	40	-5.25	-0.0062
20600	844.0	4.35	50	-3.02	-0.0036
20600	844.0	4.35	60	-3.71	-0.0044

APPENDIX 4C – LTE Band 5 RADIATED EMISSIONS TEST DATA

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 4C		
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW	

Radiated Power Test Data Results

The following configurations were measured for model RHK211LW (STV100-1):

The following measurements were performed by Shiva Kumbham.

Date of Test: August 11, 2015

The environmental tests conditions were: Temperature: 26.0 °C
Relative Humidity: 36.9 %

The BlackBerry® smartphone was standalone horizontal down and LCD Screen pointing to the RX antenna when the turntable is at 0 degree position.

Measurements were performed with QPSK and 16QAM modulations.

Test Distance was 3.0 meters with the RX antenna height scans between 1-4 meters height.

LTE band 5, 5MHz BW, RB=1, QPSK modulation

								Substitution Method					
EUT				Rx Antenna		Spectrum Analyzer		Tracking Generator					
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBm)	Max (V,H) (dBm)	Pol. Tx-Rx	Reading (dBm)	Corrected Reading		Limit (dBm)	Diff to Limit (dBm)
F0	20425	826.50	5	Horn	V	-41.00	-32.20	V-V	2.62	20.43	0.11	38.50	18.07
F0	20425	826.50	5	Horn	H	-32.20		H-H	1.18				
F0	20525	836.50	5	Horn	V	-40.96	-34.25	V-V	1.29	18.98	0.08	38.50	19.52
F0	20525	836.50	5	Horn	H	-34.25		H-H	0.21				
F0	20624	846.40	5	Horn	V	-41.79	-34.38	V-V	1.80	19.55	0.09	38.50	18.95
F0	20624	846.40	5	Horn	H	-34.38		H-H	-0.21				

LTE band 5, 5MHz BW, RB=1, 16-QAM modulation

								Substitution Method					
EUT				Rx Antenna		Spectrum Analyzer		Tracking Generator					
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBm)	Max (V,H) (dBm)	Pol. Tx-Rx	Reading (dBm)	Corrected Reading		Limit (dBm)	Diff to Limit (dBm)
F0	20425	826.50	5	Horn	V	-42.06	-33.05	V-V	1.67	19.48	0.09	38.50	19.02
F0	20425	826.50	5	Horn	H	-33.05		H-H	0.31				
F0	20525	836.50	5	Horn	V	-41.89	-34.19	V-V	1.39	19.08	0.08	38.50	19.42
F0	20525	836.50	5	Horn	H	-34.19		H-H	0.31				
F0	20624	846.40	5	Horn	V	-42.74	-34.22	V-V	1.97	19.72	0.09	38.50	18.78

This report shall NOT be reproduced except in full without the written consent of BlackBerry RTS - A division of BlackBerry Limited.

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 4C	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

F0	20624	846.40	5	Horn	H	-34.22		H-H	-0.05				
----	-------	--------	---	------	---	--------	--	-----	-------	--	--	--	--

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 4C		
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW	

Radiated Power Test Data Results

The following configurations were measured for model RHL211LW (STV100-3):

The following measurements were performed by Shiva Kumbham.

Date of Test: August 13, 2015

The environmental tests conditions were: Temperature: 25.7 °C
Relative Humidity: 31.4 %

The BlackBerry® smartphone was standalone horizontal down and LCD Screen pointing to the RX antenna when the turntable is at 0 degree position.

Measurements were performed with QPSK and 16QAM modulations.

Test Distance was 3.0 meters with the RX antenna height scans between 1-4 meters height.

LTE band 5, 5MHz BW, RB=1, QPSK modulation

								Substitution Method					
EUT				Rx Antenna		Spectrum Analyzer		Tracking Generator					
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBm)	Max (V,H) (dBm)	Pol. Tx-Rx	Reading (dBm)	Corrected Reading		Limit (dBm)	Diff to Limit (dBm)
F0	20425	826.50	5	Horn	V	-42.30	-33.54	V-V	0.37	18.18	0.07	38.50	20.32
F0	20425	826.50	5	Horn	H	-33.54		H-H	-0.27				
F0	20525	836.50	5	Horn	V	-41.06	-32.86	V-V	2.67	20.36	0.11	38.50	18.14
F0	20525	836.50	5	Horn	H	-32.86		H-H	1.73				
F0	20624	846.40	5	Horn	V	-42.17	-32.90	V-V	4.33	22.08	0.16	38.50	16.42
F0	20624	846.40	5	Horn	H	-32.90		H-H	1.62				

LTE band 5, 5MHz BW, RB=1, 16-QAM modulation

								Substitution Method					
EUT				Rx Antenna		Spectrum Analyzer		Tracking Generator					
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBm)	Max (V,H) (dBm)	Pol. Tx-Rx	Reading (dBm)	Corrected Reading		Limit (dBm)	Diff to Limit (dBm)
F0	20425	826.50	5	Horn	V	-43.18	-34.35	V-V	-0.49	17.32	0.05	38.50	21.18
F0	20425	826.50	5	Horn	H	-34.35		H-H	-1.13				
F0	20525	836.50	5	Horn	V	-42.12	-33.72	V-V	1.80	19.49	0.09	38.50	19.01
F0	20525	836.50	5	Horn	H	-33.72		H-H	0.88				
F0	20624	846.40	5	Horn	V	-43.12	-33.92	V-V	3.29	21.04	0.13	38.50	17.46

This report shall **NOT** be reproduced except in full without the written consent of BlackBerry RTS - A division of BlackBerry Limited.

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 4C	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

F0	20624	846.40	5	Horn	H	-33.92		H-H	0.60				
----	-------	--------	---	------	---	--------	--	-----	------	--	--	--	--


APPENDIX 5A– LTE Band 4 CONDUCTED RF EMISSIONS TEST DATA/PLOTS

BlackBerry	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 5A	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE Band 4 Conducted RF Emission Test Data

This appendix contains measurement data pertaining to conducted spurious emissions, 99% power bandwidth and the channel mask.

Test Setup Diagram

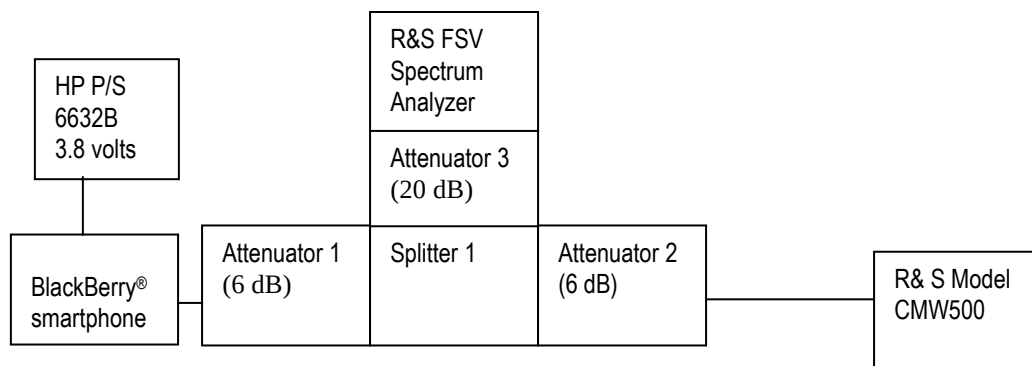

A reference offset of 31.4 dB was applied to the spectrum analyzer reference level for the attenuators and coaxial cable loss in the test circuit.

<u>UNIT</u>	<u>MANUFACTURER</u>	<u>MODEL</u>	<u>SERIAL NUMBER</u>
Attenuator 1	Mini-Circuits	BW-S6W2+	0647
Attenuator 2	Mini-Circuits	BW-S6W2+	0648
Attenuator 3	Mini-Circuits	BW-S20-2W263+	1234
Splitter 1	Weinschel	1515	MES 92

The following configurations were measured for model RHK211LW (STV100-1):

Date of Test: July 22 – September 3, 2015

The environmental test conditions were: Temperature: 26.3°C
 Relative Humidity: 38.6 %

The following measurements were performed by Sijia Li and Landon Martin.

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 5A	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE Band 4 Conducted RF Emission Test Data cont'd

Emission Designator Table

Frequency Range (MHz)	Conducted Output Power (dBm)	Emission Designator	Band	Bandwidth (MHz)	Modulation
1710.7-1754.3	22.57	1M09G7D	LTE B4	1.4	QPSK
1710.7-1754.3	21.92	1M09D7W	LTE B4	1.4	16QAM
1711.5-1753.5	22.95	2M69G7D	LTE B4	3	QPSK
1711.5-1753.5	22.17	2M69D7W	LTE B4	3	16QAM
1712.5-1752.5	23.13	4M49G7D	LTE B4	5	QPSK
1712.5-1752.5	22.17	4M49D7W	LTE B4	5	16QAM
1715-1750	23.14	8M96G7D	LTE B4	10	QPSK
1715-1750	22.53	8M96D7W	LTE B4	10	16QAM
1717.5-1747.5	22.92	13M4G7D	LTE B4	15	QPSK
1717.5-1747.5	22.17	13M4D7W	LTE B4	15	16QAM
1720-1745	23.08	17M9G7D	LTE B4	20	QPSK
1720-1745	22.24	18M0D7W	LTE B4	20	16QAM

The conducted spurious emissions – As per 47 CFR 2.1051, 27.53, RSS-139, 6.5 were measured from 30 MHz to 20 GHz.

–26 dBc Bandwidth and Occupied Bandwidth (99%)

The modulation spectrum was measured by both methods of 99% power bandwidth and –26 dBc bandwidth For each 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz and 20MHz with Resource Block allocations 100,75,50,25,6 and 3 for LTE band 4,.

QPSK and 16-QAM modulations were applied to each of the bandwidths. Only the worst case measurements are documented in this report.

The resolution bandwidth required for out-of-band emissions in the 1 MHz bands immediately outside and adjacent to the frequency block, was determined to be at least 1% of the emission bandwidth.

The worst case –26dBc bandwidth for LTE band 4 was measured to be 18.9 MHz. Results were derived in a 200 kHz resolution bandwidth.

On any frequency outside the frequency block and outside the adjacent 1 MHz bands, a resolution bandwidth of at least 1 MHz was applied.

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 5A	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

Test Data for LTE Band 4 selected Frequencies in 20MHz BW (RB = 100)

LTE Band 4 Frequency (MHz)	26dBc Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	
	QPSK	QPSK	16-QAM
1720.0	18.64	17.93	17.93
1732.5	18.6	17.88	17.88
1745.0	18.9	17.93	17.98

Test Data for LTE Band 4 selected Frequencies in 15MHz BW (RB = 75)

LTE Band 4 Frequency (MHz)	99% Occupied Bandwidth (MHz)	
	QPSK	16-QAM
1717.5	13.41	13.41
1732.5	13.41	13.45
1747.5	13.45	13.41

Test Data for LTE Band 4 selected Frequencies in 10MHz BW (RB = 50)

LTE Band 4 Frequency (MHz)	99% Occupied Bandwidth (MHz)	
	QPSK	16-QAM
1715	8.94	8.94
1732.5	8.97	8.97
1750	8.97	8.94

Test Data for LTE Band 4 selected Frequencies in 5MHz BW (RB = 25)

LTE Band 4 Frequency (MHz)	99% Occupied Bandwidth (MHz)	
	QPSK	16-QAM
1712.5	4.48	4.50
1732.5	4.48	4.47
1752.5	4.50	4.48

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 5A	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

Test Data for LTE Band 4 selected Frequencies in 3MHz BW (RB = 15)

LTE Band 4 Frequency (MHz)	99% Occupied Bandwidth (MHz)	
	QPSK	16-QAM
1711.5	2.70	2.69
1732.5	2.70	2.69
1753.5	2.70	2.69

Test Data for LTE Band 4 selected Frequencies in 1.4MHz BW (RB = 6)

LTE Band 4 Frequency (MHz)	99% Occupied Bandwidth (MHz)	
	QPSK	16-QAM
1710.7	1.09	1.08
1732.5	1.10	1.09
1754.3	1.09	1.09

Peak to Average Ratio (PAR)

For each 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz and 20MHz with different number of RBs as per scalable bandwidths for LTE band 4, the peak to average ratio was measured on the low, middle and high channels with QPSK modulation.

On any frequency outside the frequency block and outside the adjacent 1 MHz bands, a resolution bandwidth of at least 1 MHz was applied.

The worst case measured was 10.16 dB in 20MHz bandwidth with 50 RBs.

Measurement Plots for LTE Band 4

See Figures 5-1a to 5-18a for the plots of the conducted spurious emissions.

See Figures 5-19a to 5-34a and 5-51a to 5-53a for the plots of 99% Occupied Bandwidth and -26 dBc Bandwidth.


See Figures 5-35a to 5-44a for the plots of the Channel mask.

See Figures 5-45a to 5-50a for the plots of the Peak to Average Ratios.

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 5A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 4 Conducted RF Emission Test Data cont'd

Figure 5-1a: Band 4, Spurious Conducted Emissions, Low channel, 20MHz BW (RB= 1)

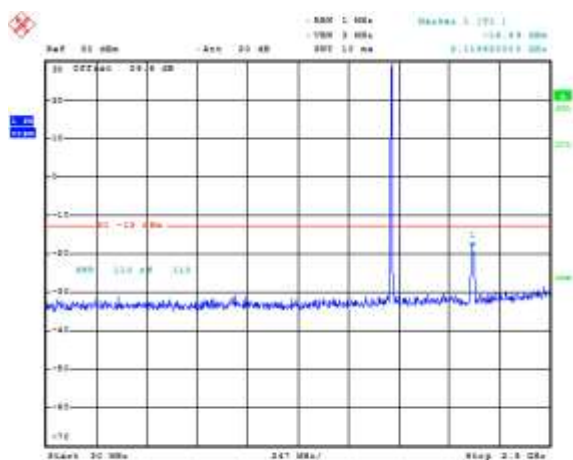


Date: 12-APR-2015 18:28:00

Figure 5-2a: Band 4, Spurious Conducted Emissions, Low channel, 20MHz BW (RB= 1)

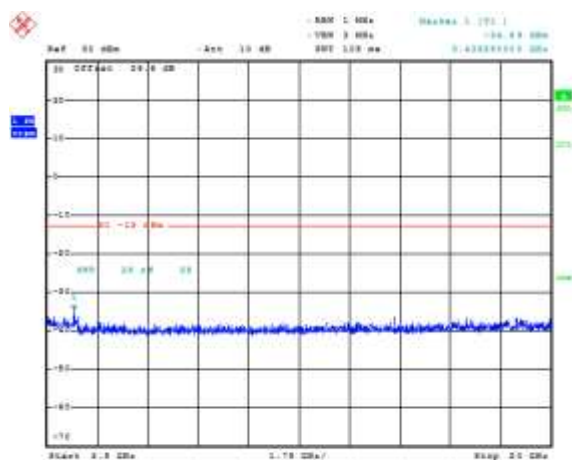


Date: 12-APR-2015 18:28:00

Figure 5-3a: Band 4, Spurious Conducted Emissions, Middle channel, 20MHz BW (RB= 50)

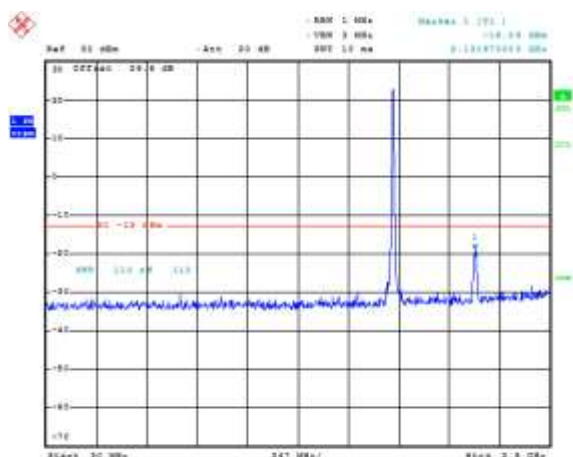

Date: 12-APR-2015 18:28:19

Figure 5-4a: Band 4, Spurious Conducted Emissions, Middle channel, 20MHz BW (RB= 50)

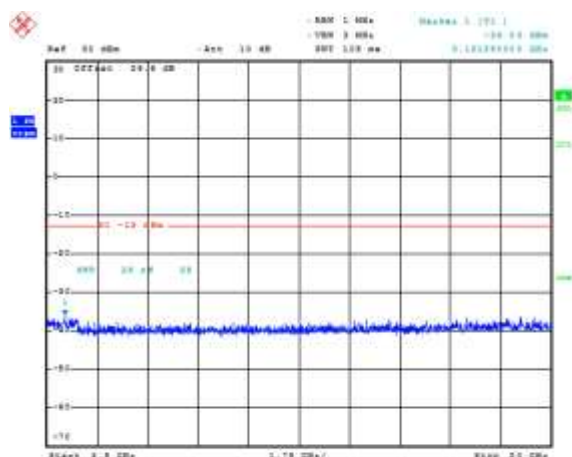


Date: 12-APR-2015 18:28:27

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 5A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 4 Conducted RF Emission Test Data cont'd

Figure 5-5a: Band 4, Spurious Conducted Emissions, High Channel, 20MHz BW (RB= 100)

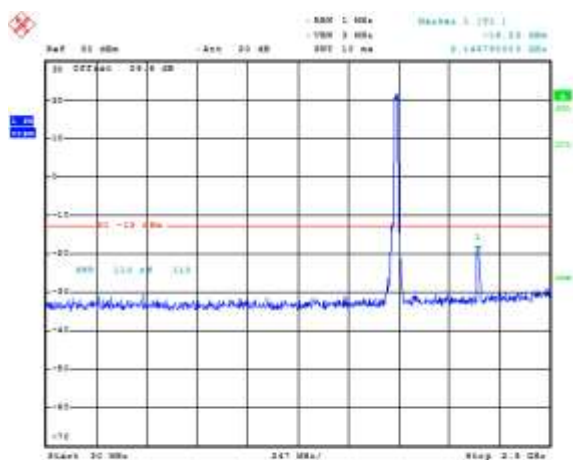


Date: 12-APR-2015 18:29:59

Figure 5-6a: Band 4, Spurious Conducted Emissions, High Channel, 20MHz BW (RB= 100)

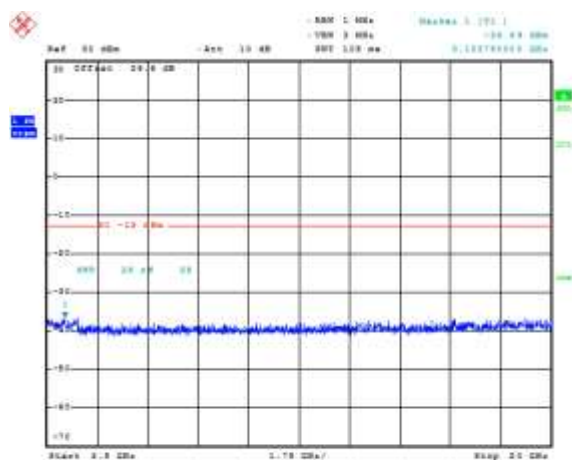


Date: 12-APR-2015 18:29:47

Figure 5-7a: Band 4, Spurious Conducted Emissions, Low channel, 10MHz BW (RB= 1)

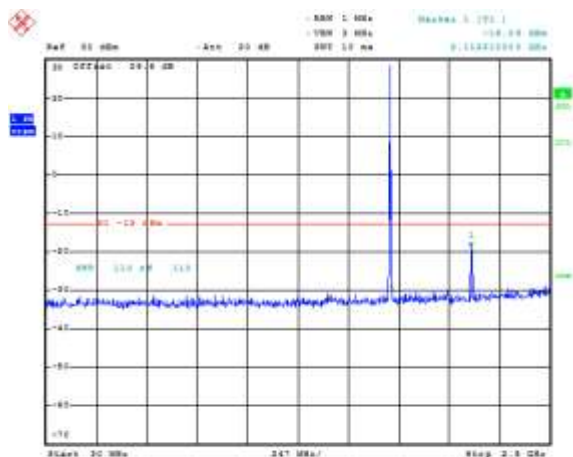

Date: 12-APR-2015 18:29:00

Figure 5-8a: Band 4, Spurious Conducted Emissions, Low channel, 10MHz BW (RB= 1)

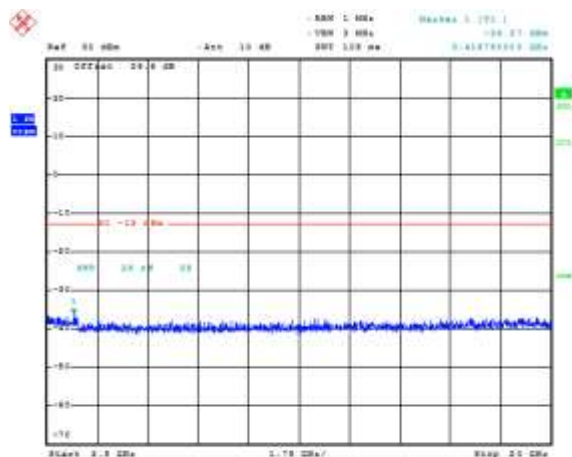


Date: 12-APR-2015 18:29:06

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 5A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 4 Conducted RF Emission Test Data cont'd

Figure 5-9a: Band 4, Spurious Conducted Emissions, Middle Channel, 10MHz BW (RB= 25)

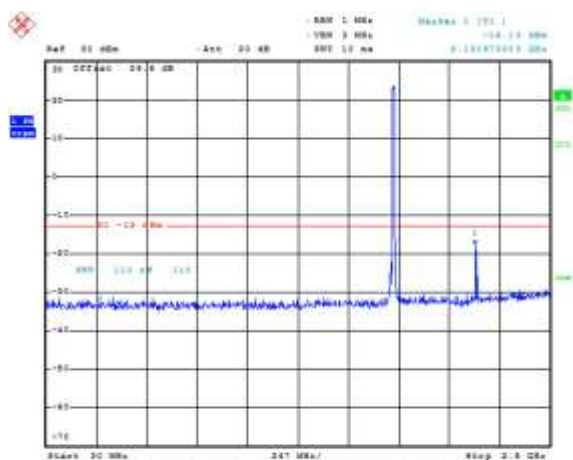


Date: 12-APR-2015 15:29:28

Figure 5-10a: Band 4, Spurious Conducted Emissions, Middle Channel, 10MHz BW (RB= 25)

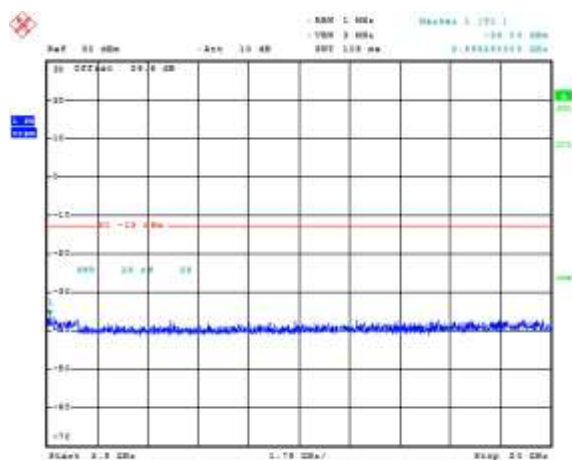


Date: 12-APR-2015 15:29:36

Figure 5-11a: Band 4, Spurious Conducted Emissions, High channel, 10MHz BW (RB= 50)

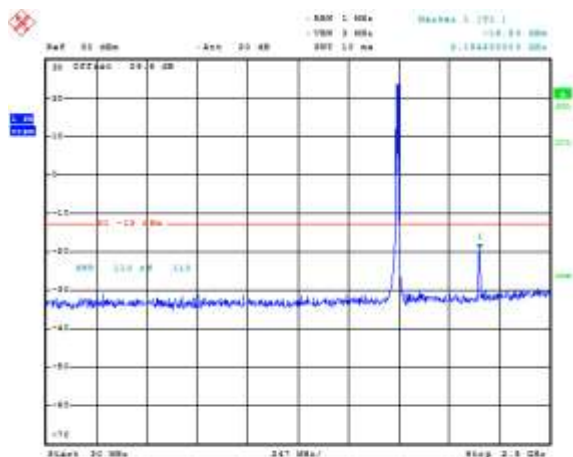

Date: 12-APR-2015 15:29:47

Figure 5-12a: Band 4, Spurious Conducted Emissions, High channel, 10MHz BW (RB= 50)

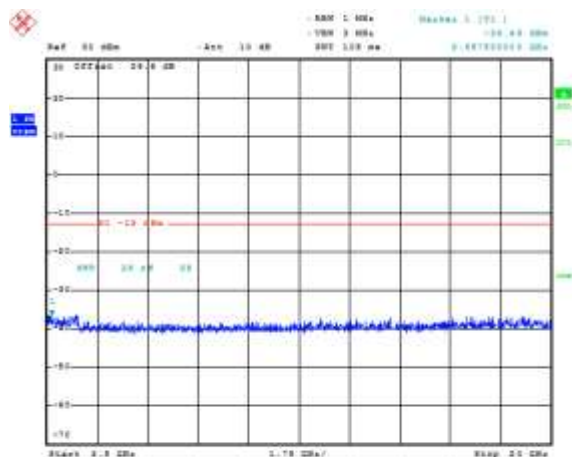


Date: 12-APR-2015 15:29:55

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 5A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 4 Conducted RF Emission Test Data cont'd

Figure 5-13a: Band 4, Spurious Conducted Emissions, Low Channel, 1.4MHz BW (RB= 1)

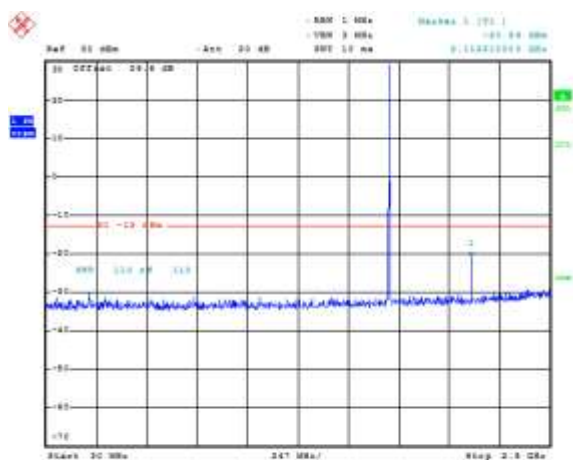


Date: 12-APR-2015 16:30:16

Figure 5-14a: Band 4, Spurious Conducted Emissions, Low Channel, 1.4MHz BW (RB= 1)

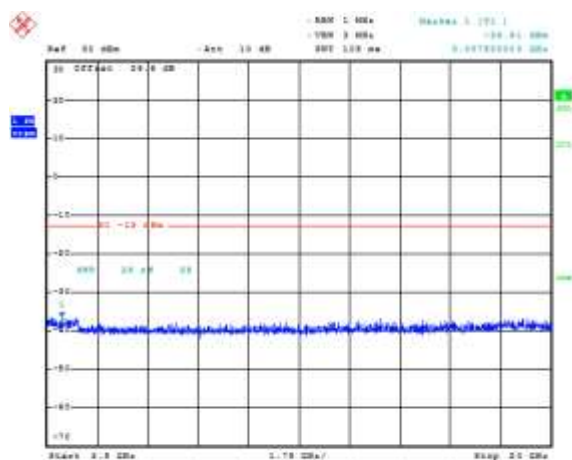


Date: 12-APR-2015 16:30:24

Figure 5-15a: Band 4, Spurious Conducted Emissions, Middle channel, 1.4MHz BW (RB= 3)

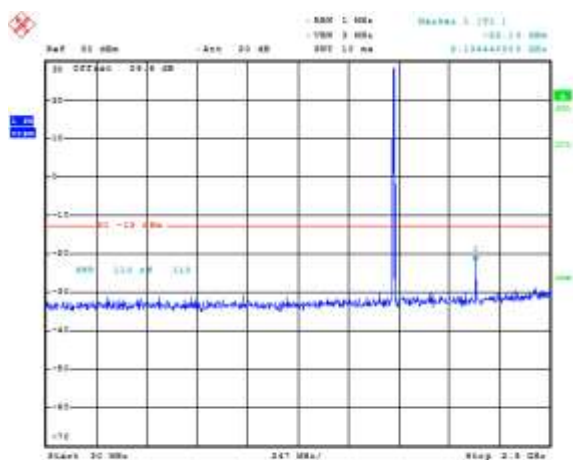

Date: 12-APR-2015 16:30:36

Figure 5-16a: Band 4, Spurious Conducted Emissions, Middle channel, 1.4MHz BW (RB= 3)

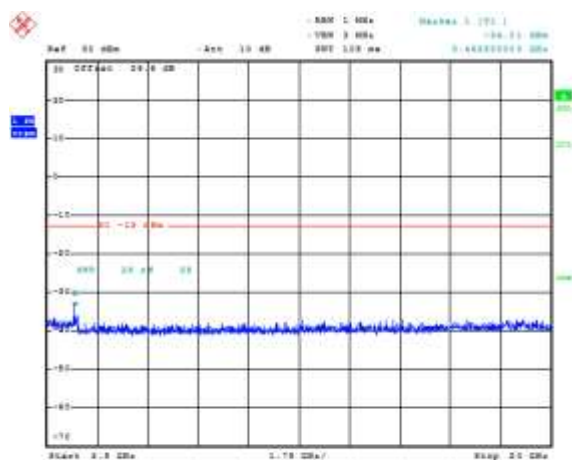


Date: 12-APR-2015 16:30:49

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 5A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 4 Conducted RF Emission Test Data cont'd

Figure 5-17a: Band 4, Spurious Conducted Emissions, High channel, 1.4MHz BW (RB= 6)

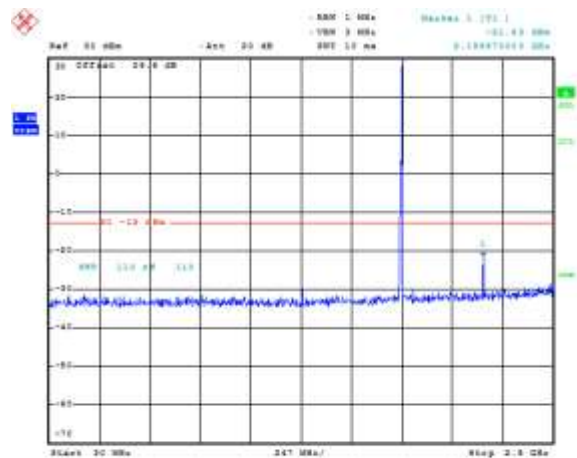

Date: 12.AUG.2015 16:50:55

Figure 5-18a: Band 4, Spurious Conducted Emissions, High channel, 1.4MHz BW (RB= 6)

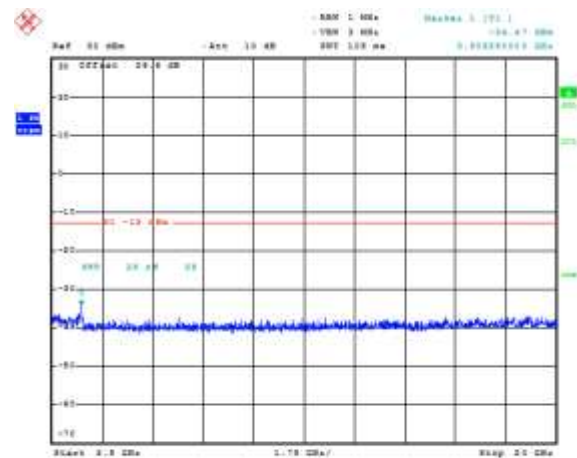

Date: 12.AUG.2015 16:51:55

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 5A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE Band 4 Conducted RF Emission Test Data cont'd

Figure 5-19a: Occupied Bandwidth, Band 4 Low Channel, 20MHz BW, RB=100

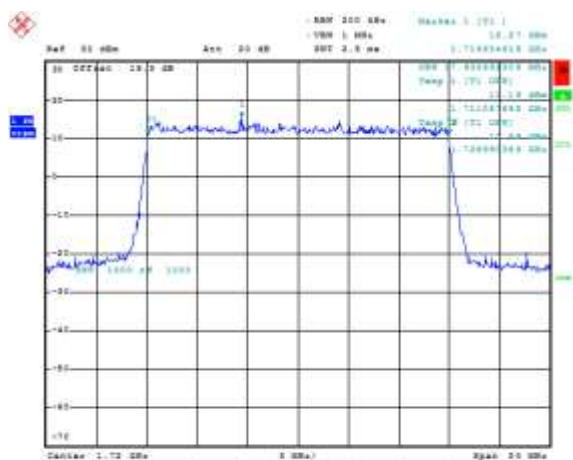


Figure 5-20a: Occupied Bandwidth, Band 4 Middle Channel, 20MHz BW, RB=100


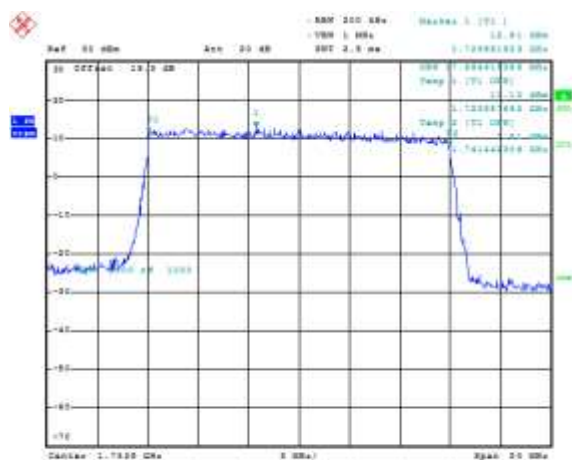



Figure 5-21a: Occupied Bandwidth, Band 4 High Channel, 20MHz BW, RB=100

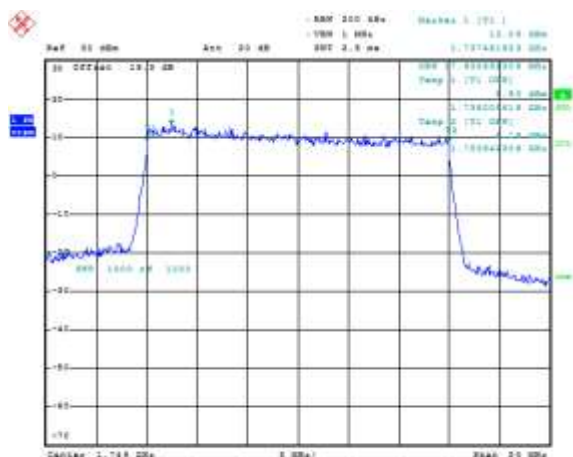

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 5A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 4 Conducted RF Emission Test Data cont'd

Figure 5-22a: Occupied Bandwidth, Band 4 Low Channel, 10MHz BW, RB=50

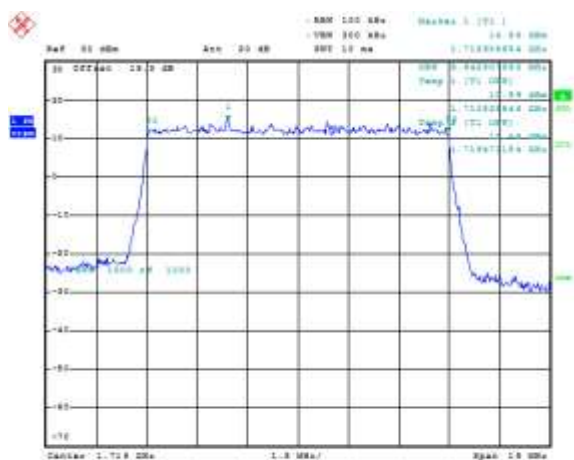


Date: 27.JUL.2015 11:50:48

Figure 5-23a: Occupied Bandwidth, Band Middle Channel, 10MHz BW, RB=50

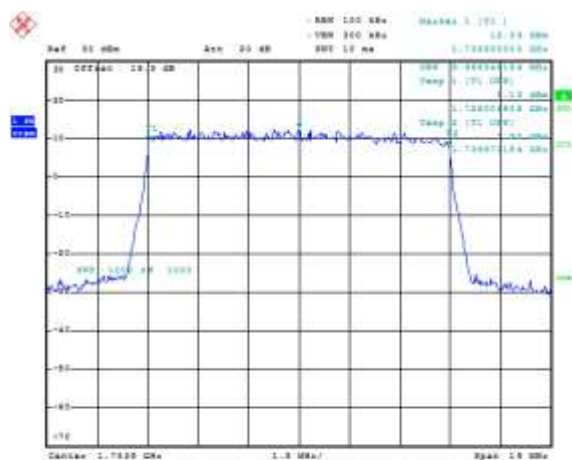

Date: 27.JUL.2015 11:51:22

Figure 5-24a: Occupied Bandwidth, Band 4 High Channel, 10MHz BW, RB=50

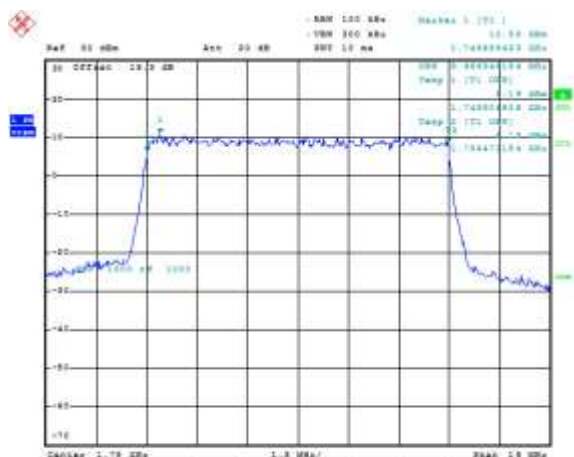

Date: 27.JUL.2015 11:51:46

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 5A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 4 Conducted RF Emission Test Data cont'd

Figure 5-25a: Occupied Bandwidth, Band 4 Low Channel, 1.4MHz BW, RB=6



Date: 27.JUL.2015 15:01:55

Figure 5-26a: Occupied Bandwidth, Band 4 Middle Channel, 1.4MHz BW, RB=6

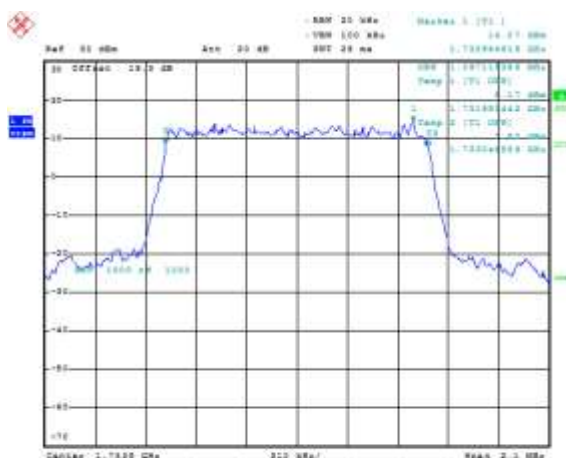

Date: 27.JUL.2015 15:02:02

Figure 5-27a: Occupied Bandwidth, Band 4 High Channel, 1.4MHz BW, RB=6




Date: 27.JUL.2015 15:02:09

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 5A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 4 Conducted RF Emission Test Data cont'd

Figure 5-28a: -26 dBc Bandwidth, Band 4 Low Channel, 20MHz BW, RB=100

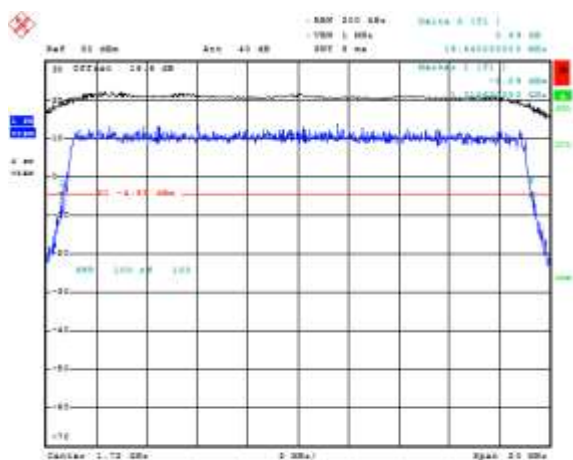


Date: 27-Jul-2015 11:02:48

Figure 5-29a: -26 dBc Bandwidth, Band 4 Middle Channel, 20MHz BW, RB=100

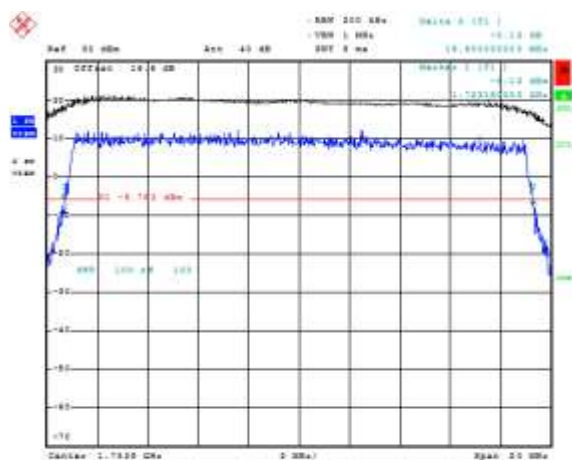


Date: 27-Jul-2015 11:02:57

Figure 5-30a: -26 dBc Bandwidth, Band 4 High Channel, 20MHz BW, RB=100

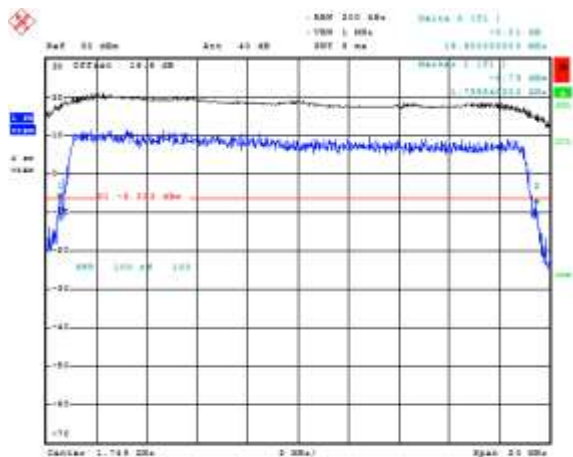

Date: 27-Jul-2015 11:03:00

Figure 5-31a: -26 dBc Bandwidth, Band 4 Low Channel, 10MHz BW, RB=50

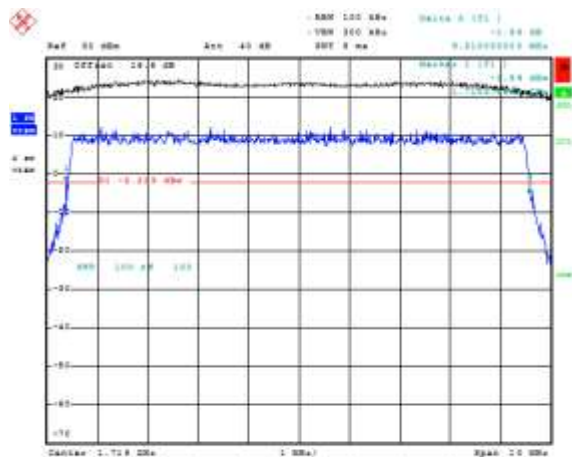


Date: 27-Jul-2015 11:03:09

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 5A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 4 Conducted RF Emission Test Data cont'd

Figure 5-32a: -26 dBc Bandwidth, Band 4 Middle Channel, 10MHz BW, RB=50

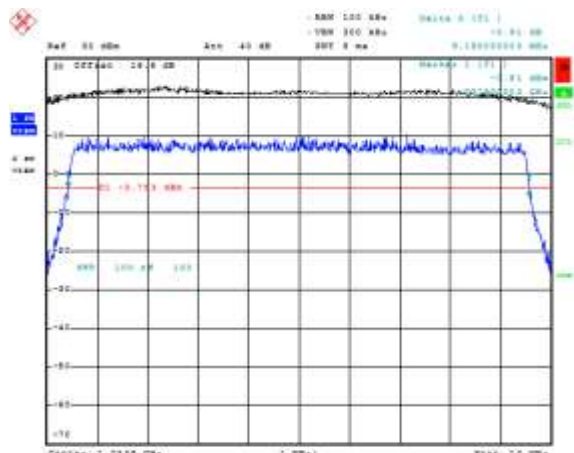


Date: 27-Jul-2015 11:09:49

Figure 5-33a: -26 dBc Bandwidth, Band 4 High Channel, 10MHz BW, RB=50

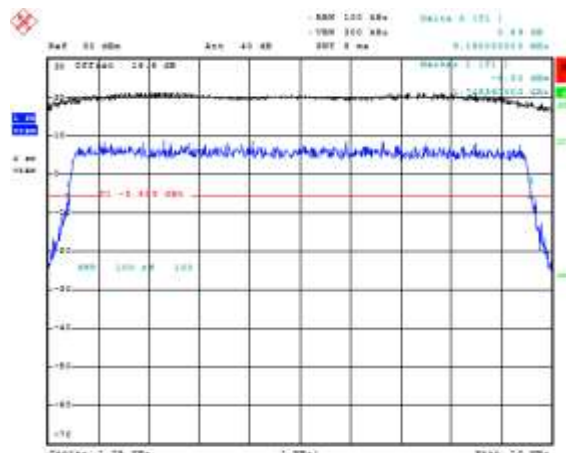


Date: 27-Jul-2015 11:09:51

Figure 5-34a: -26 dBc Bandwidth, Band 4 Low Channel, 1.4MHz BW, RB=6

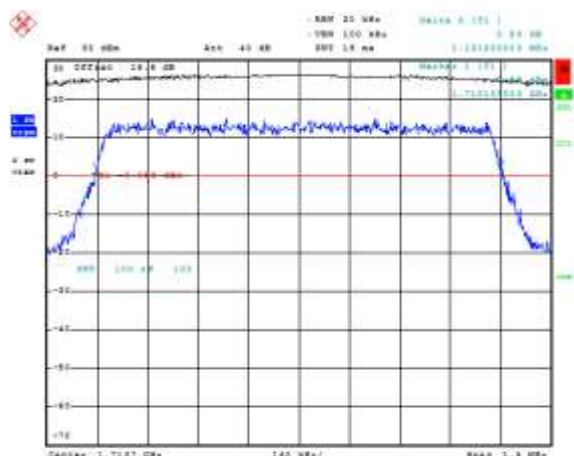

Date: 27-Jul-2015 11:09:57

Figure 5-35a: -26 dBc Bandwidth, Band 4 Middle Channel, 1.4MHz BW, RB=6

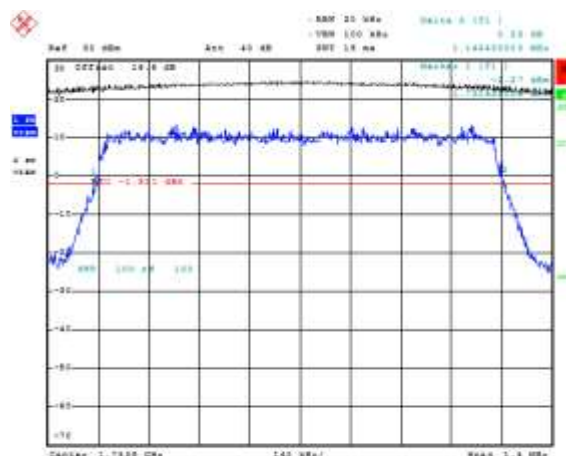


Date: 27-Jul-2015 11:09:51

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 5A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 4 Conducted RF Emission Test Data cont'd

Figure 5-36a: -26 dBc Bandwidth, Band 4 High Channel, 1.4MHz BW, RB=6

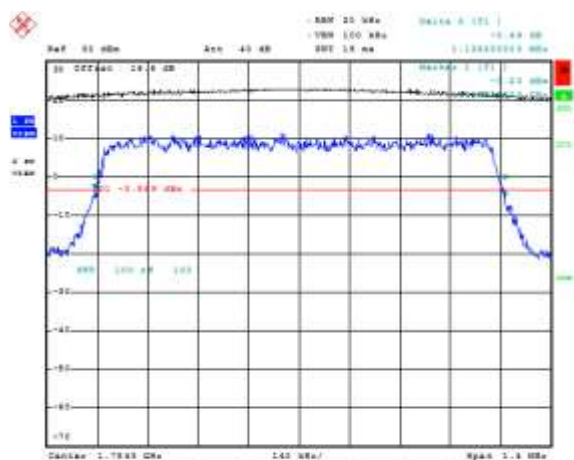


Date: 27-JUL-2015 15:06:56

Figure 5-37a: Band 4 Low Channel Mask, 20MHz BW, RB=100

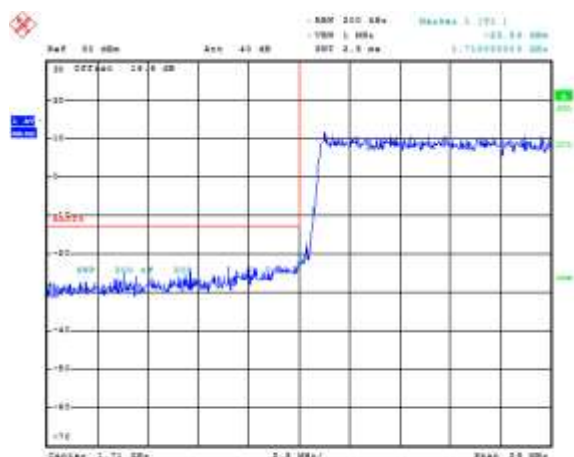

Date: 27-JUL-2015 16:05:51

Figure 5-38a: Band 4 High Channel Mask, 20MHz BW, RB=100

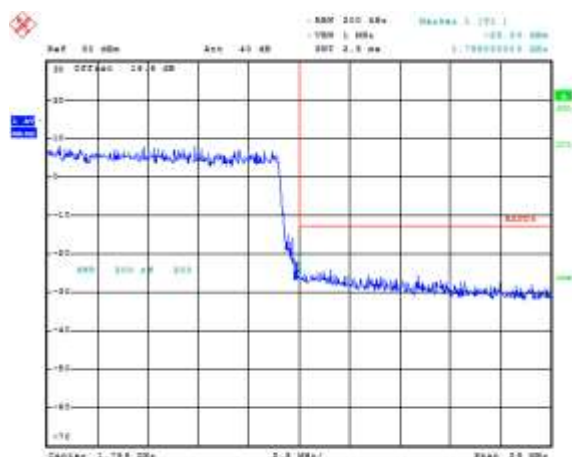


Date: 27-JUL-2015 16:06:29

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 5A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 4 Conducted RF Emission Test Data cont'd

Figure 5-39a: Band 4 Low Channel Mask, 10MHz
BW, RB=50

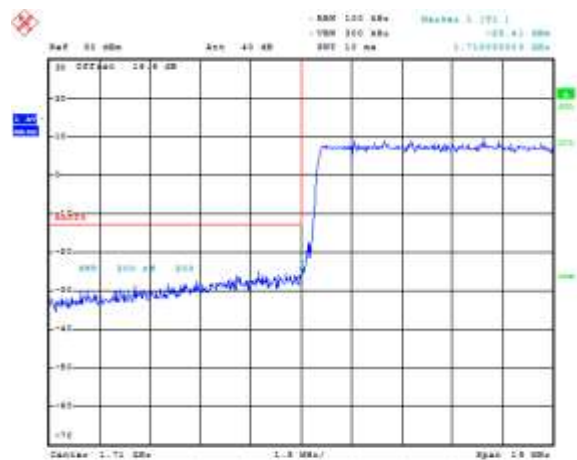


Date: 27-Jul-2015 16:07:11

Figure 5-40a: Band 4 High Channel Mask, 10MHz
BW, RB=50

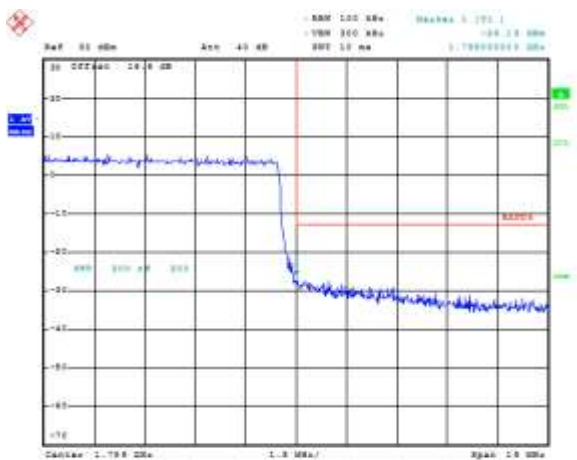


Date: 27-Jul-2015 16:07:49

Figure 5-41a: Band 4 Low Channel Mask, 1.4MHz
BW, RB=6

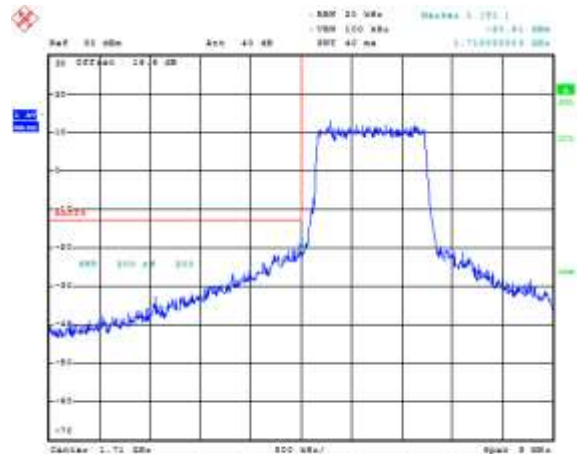

Date: 27-Jul-2015 16:09:16

Figure 5-42a: Band 4 High Channel Mask, 1.4MHz
BW, RB=6

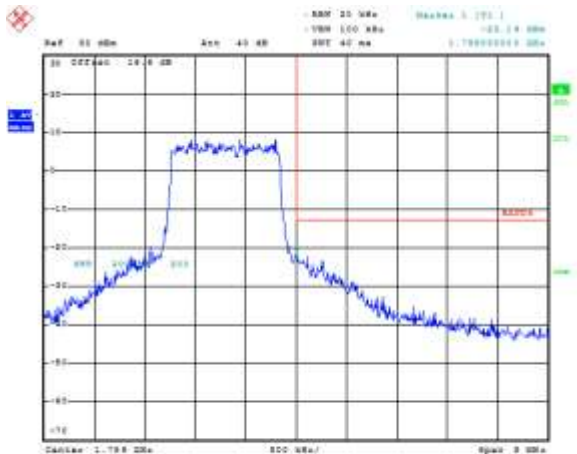

Date: 27-Jul-2015 16:09:58


BlackBerry	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 5A	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE Band 4 Conducted RF Emission Test Data cont'd

**Figure 5-47a: Band 4 Mid Channel PAR, 10MHz
BW, RB=25, QPSK**




**Figure 5-48a: Band 4 Mid Channel PAR, 10MHz
BW, RB=50, 16-QAM**

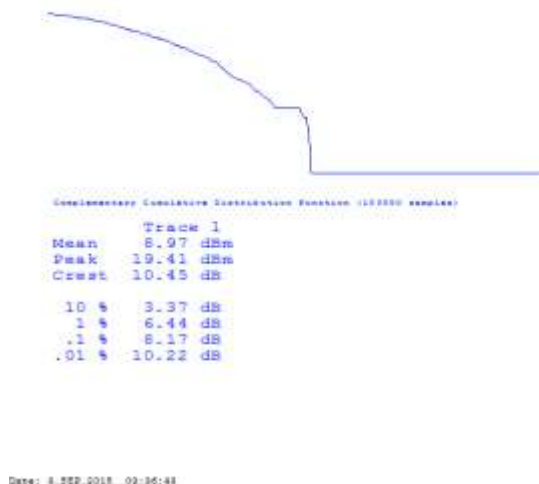

**Figure 5-49a: Band 4 Mid Channel PAR, 1.4MHz
BW, RB=3, QPSK**




**Figure 5-50a: Band 4 Middle Channel Mask, 5MHz
BW, RB=6, 16-QAM**

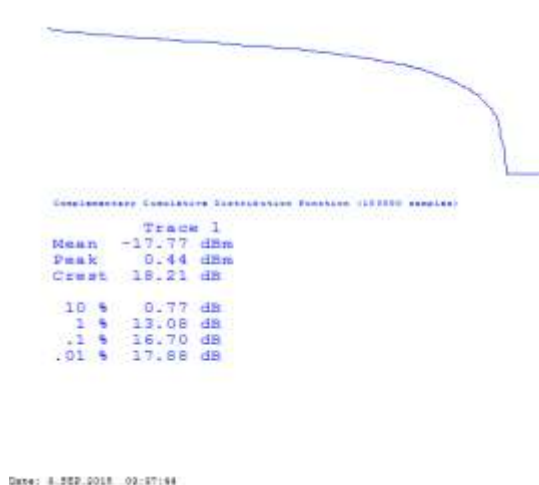

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 5A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 4 Conducted RF Emission Test Data cont'd

Figure 5-51a: Occupied Bandwidth, Band 4 Low Channel, 20MHz BW (RB= 100) 16-QAM

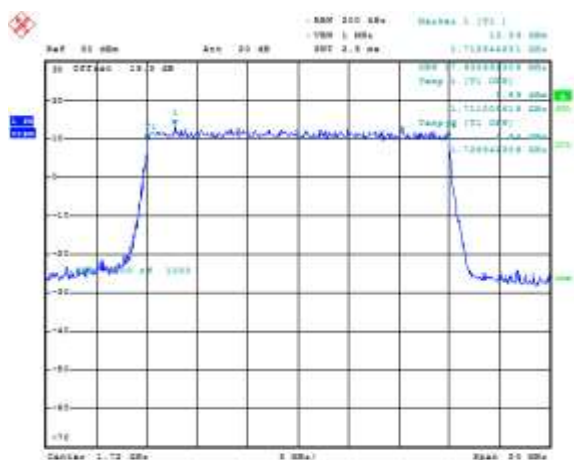


Date: 27-JUL-2015 11:44:00

Figure 5-52a: Occupied Bandwidth, Band 4 Mid Channel, 20MHz BW (RB= 100) 16-QAM

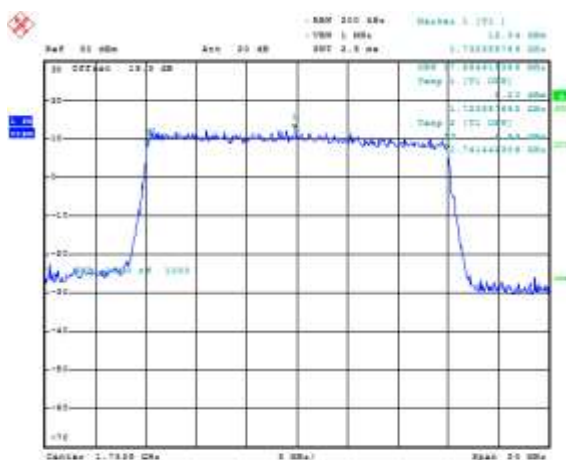

Date: 27-JUL-2015 11:44:01

Figure 5-53a: Occupied Bandwidth, Band 4 High Channel, 20MHz BW (RB= 100) 16-QAM

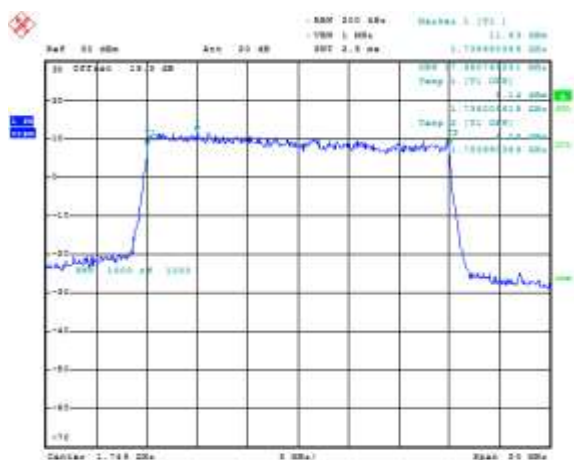


Date: 27-JUL-2015 11:45:04

APPENDIX 5B – LTE Band 4 FREQUENCY STABILITY TEST DATA

BlackBerry	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 5B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE Band 4 Frequency Stability Test Data

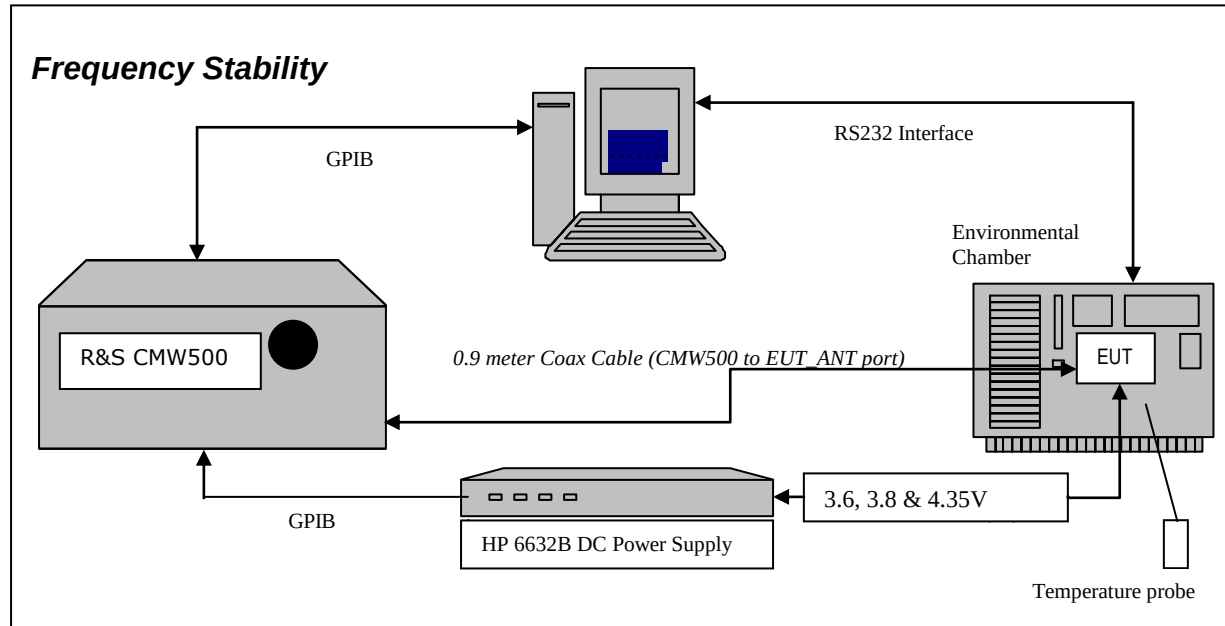

The following configurations were measured for model RHK211LW (STV100-1):

The following measurements were performed by Landon Martin.

CFR 47 Chapter 1 - Federal Communications Commission Rules

Part 2 Required Measurements

2.1055 Frequency Stability - Procedures

(a,b) Frequency Stability - Temperature Variation

(d) Frequency Stability - Voltage Variation

The EUT meets the requirements as stated in CFR 47 chapter 1, Section 27.54, CFR 47 and RSS-139, 6.3 Frequency Stability.

Frequency Stability measurement devices were configured as presented in the block diagram recording frequency, power, data, temperatures, and stepped voltages controlled via a GPIB interface linked to the Environmental chamber, a DC power supply, and the Communications Test Set. A 0.9-metre coax cable was calibrated to characterize the insertion loss for the transmitted frequencies between the RF input/output of the CMW 500 and the EUT antenna port.

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 5B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

Test Setup:

The EUT was placed in the Temperature chamber and connected to CMW 500 outside as shown in the figure above. Dry air was pumped inside the temperature chamber to maintain a backpressure during the test. The EUT was kept in the off condition at all times except when the following measurements were to be made.

The chamber was switched on and the temperature was set to -30°C. After the chamber stabilized at -30 °C there was a soak period of one hour to alleviate moisture in the chamber, the EUT voltage was enabled. The system software recorded the frequency, power, and associated measurements.

A Computer system controlled the automated software. This application was given the command of activating all machines intrinsic to the temperature and voltage tests controlling the CMW 500 via the GPIB Bus. The Environmental Chamber was instructed through an RS-232 serial line. The EUT dialogue was passed through a serial connection.

The EUT repetitively transmitted 100 bursts for each set of programmed parameters recording temperature, voltage settings, and systematically selected frequencies. The power supply was cycled from minimum voltage 3.6 volts, to 3.8 volts and to 4.35 volts maximum voltage. The frequency error was measured at a maximum output power and recorded by the automated system test software.

The EUT output power and frequency was measured at 3.6 volts, 3.8 volts and 4.35 volts. The transmit frequency was varied in 3 steps consisting of 1720.0 MHz, 1732.5 MHz and 1745.0 MHz each was measured under 20 MHz bandwidth with maximum (100) RBs. This frequency was recorded in MHz and deviation from nominal, in Parts Per Million.

After the initial one-hour soak at the beginning of the tests, a period of thirty minutes soak was initialized between each ascending temperature step, before proceeding to the next measurement test cycle.

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 5B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

Procedure:

The test system software for commencing the Frequency Stability Tests carried through the following cycle.

29. Switch on the HP 6632B power supply; CMW 500 Communications test Set, and Environmental Chamber.
30. Start test program
31. Set the Temperature to –30°C and maintain a period of one- hour soak time, with the EUT supply voltage disabled.
32. Set power supply voltage to 3.6 volts.
33. Set up CMW 500 Radio Communication Tester.
34. Command the CMW 500 to switch to the low channel.
35. Enable the voltage to the EUT, and connect a link to the CMW 500 test set.
36. EUT is commanded to Transmit 100 Bursts.
37. Software logs the following data from the CMW 500, power supply and temperature chamber: Traffic Channel Number, Traffic Channel Frequency, Power Level, Chamber Temperature, Supply Voltage, Power and Frequency Error.
38. The CMW 500 commands the EUT to change frequency to the middle channel and high channel and repeats steps 7 to 9.
39. Repeat steps 5 to 10 changing the supply voltage to 3.8 Volts
40. Increase temperature by 10°C and soak for 1/2 hour.
41. Repeat steps 4 - 12 for temperatures –30°C to 60°C.
42. Repeat steps 5 to 10 changing the supply voltage to 4.35 volts

Procedure 5 to 10 was repeated at room temperature (20°C) with the power supply voltage set to 3.6, 3.8 and 4.35 volts

The maximum frequency error in the LTE band 4 measured was **0.0043 PPM**.

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 5B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE Band 4 results: channels 20050, 20175 and 20300 @ 20°C maximum transmitted power

Traffic Channel Number	LTE Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20050	1720.0	3.6	20	6.04	0.0035
20175	1732.5	3.6	20	6.35	0.0037
20300	1745.0	3.6	20	-4.33	-0.0025

Traffic Channel Number	LTE Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20050	1720.0	3.8	20	4.86	0.0028
20175	1732.5	3.8	20	5.12	0.0030
20300	1745.0	3.8	20	-5.36	-0.0031

Traffic Channel Number	LTE Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20050	1720.0	4.35	20	7.32	0.0043
20175	1732.5	4.35	20	5.21	0.0030
20300	1745.0	4.35	20	-5.04	-0.0029

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 5B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE band 4 Results: channel 20050 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20050	1720.0	3.6	-30	5.55	0.0032
20050	1720.0	3.6	-20	5.94	0.0035
20050	1720.0	3.6	-10	5.99	0.0035
20050	1720.0	3.6	0	7.28	0.0042
20050	1720.0	3.6	10	6.24	0.0036
20050	1720.0	3.6	20	6.04	0.0035
20050	1720.0	3.6	30	5.39	0.0031
20050	1720.0	3.6	40	2.99	0.0017
20050	1720.0	3.6	50	5.08	0.0030
20050	1720.0	3.6	60	5.38	0.0031
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20050	1720.0	3.8	-30	4.05	0.0024
20050	1720.0	3.8	-20	7.12	0.0041
20050	1720.0	3.8	-10	4.75	0.0028
20050	1720.0	3.8	0	4.72	0.0027
20050	1720.0	3.8	10	5.95	0.0035
20050	1720.0	3.8	20	4.86	0.0028
20050	1720.0	3.8	30	5.79	0.0034
20050	1720.0	3.8	40	6.64	0.0039
20050	1720.0	3.8	50	7.77	0.0045
20050	1720.0	3.8	60	5.92	0.0034
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20050	1720.0	4.35	-30	5.87	0.0034
20050	1720.0	4.35	-20	4.63	0.0027
20050	1720.0	4.35	-10	5.34	0.0031
20050	1720.0	4.35	0	3.95	0.0023
20050	1720.0	4.35	10	5.26	0.0031
20050	1720.0	4.35	20	7.32	0.0043
20050	1720.0	4.35	30	4.75	0.0028
20050	1720.0	4.35	40	6.11	0.0036
20050	1720.0	4.35	50	8.10	0.0047
20050	1720.0	4.35	60	3.92	0.0023

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 5B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE band 4 Results: channel 20175 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20175	1732.5	3.6	-30	7.22	0.0042
20175	1732.5	3.6	-20	4.92	0.0028
20175	1732.5	3.6	-10	4.68	0.0027
20175	1732.5	3.6	0	6.79	0.0039
20175	1732.5	3.6	10	4.39	0.0025
20175	1732.5	3.6	20	6.35	0.0037
20175	1732.5	3.6	30	3.75	0.0022
20175	1732.5	3.6	40	5.49	0.0032
20175	1732.5	3.6	50	-4.22	-0.0024
20175	1732.5	3.6	60	4.02	0.0023
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20175	1732.5	3.8	-30	-3.58	-0.0021
20175	1732.5	3.8	-20	4.33	0.0025
20175	1732.5	3.8	-10	4.59	0.0027
20175	1732.5	3.8	0	4.82	0.0028
20175	1732.5	3.8	10	4.71	0.0027
20175	1732.5	3.8	20	5.12	0.0030
20175	1732.5	3.8	30	-5.58	-0.0032
20175	1732.5	3.8	40	4.36	0.0025
20175	1732.5	3.8	50	-4.05	-0.0023
20175	1732.5	3.8	60	4.19	0.0024
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20175	1732.5	4.35	-30	4.73	0.0027
20175	1732.5	4.35	-20	3.83	0.0022
20175	1732.5	4.35	-10	4.49	0.0026
20175	1732.5	4.35	0	5.21	0.0030
20175	1732.5	4.35	10	3.09	0.0018
20175	1732.5	4.35	20	5.21	0.0030
20175	1732.5	4.35	30	4.95	0.0029
20175	1732.5	4.35	40	-3.91	-0.0023
20175	1732.5	4.35	50	-3.02	-0.0017
20175	1732.5	4.35	60	4.72	0.0027

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 5B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE band 4 Results: channel 20300 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20300	1745.0	3.6	-30	-5.85	-0.0034
20300	1745.0	3.6	-20	-4.26	-0.0024
20300	1745.0	3.6	-10	-4.79	-0.0027
20300	1745.0	3.6	0	3.26	0.0019
20300	1745.0	3.6	10	-3.73	-0.0021
20300	1745.0	3.6	20	-4.33	-0.0025
20300	1745.0	3.6	30	-5.68	-0.0033
20300	1745.0	3.6	40	-4.21	-0.0024
20300	1745.0	3.6	50	-7.24	-0.0041
20300	1745.0	3.6	60	-6.29	-0.0036
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20300	1745.0	3.8	-30	-6.29	-0.0036
20300	1745.0	3.8	-20	-4.81	-0.0028
20300	1745.0	3.8	-10	3.66	0.0021
20300	1745.0	3.8	0	-2.78	-0.0016
20300	1745.0	3.8	10	-4.68	-0.0027
20300	1745.0	3.8	20	-5.36	-0.0031
20300	1745.0	3.8	30	-5.46	-0.0031
20300	1745.0	3.8	40	-6.47	-0.0037
20300	1745.0	3.8	50	-4.45	-0.0025
20300	1745.0	3.8	60	-5.82	-0.0033
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
20300	1745.0	4.35	-30	-6.14	-0.0035
20300	1745.0	4.35	-20	-5.68	-0.0033
20300	1745.0	4.35	-10	-2.78	-0.0016
20300	1745.0	4.35	0	-2.78	-0.0016
20300	1745.0	4.35	10	-3.46	-0.0020
20300	1745.0	4.35	20	-5.04	-0.0029
20300	1745.0	4.35	30	-5.51	-0.0032
20300	1745.0	4.35	40	-4.86	-0.0028
20300	1745.0	4.35	50	-4.46	-0.0026
20300	1745.0	4.35	60	-7.71	-0.0044

APPENDIX 5C – LTE Band 4 RADIATED EMISSIONS TEST DATA

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 5C		
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW	

Radiated Power Test Data Results

The following configurations were measured for model RHK211LW (STV100-1):

The following measurements were performed by Savtej Sandhu.

Date of Test: July 23, 2015

The environmental tests conditions were: Temperature: 24.1 °C

Relative Humidity: 34.2 %

The BlackBerry® smartphone was standalone, side button pointing down with the LCD facing to the RX antenna when the turntable is at 0 degree position.

Measurements were performed with QPSK and 16QAM modulations. The smallest test margins are reported below.

Test Distance was 3.0 meters with the RX antenna height scans between 1-4 meters height.

LTE band 4, 10MHz BW, RB=1, QPSK modulation

								Substitution Method					
EUT				Rx Antenna		Spectrum Analyzer		Tracking Generator					
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBuV)	Max (V,H) (dBuV)	Pol. Tx-Rx	Reading (dBm)	Corrected Reading (relative to Isotropic Radiator)		Limit (dBm)	Diff to Limit (dB)
										(dBm)	(W)		
F0	20000	1715.00	4	Horn	V	-21.34	-21.34	V-V	-13.41	25.78	0.38	30.00	4.22
F0	20000	1715.00	4	Horn	H	-23.07		H-H	-12.86				
F0	20175	1732.50	4	Horn	V	-21.74	-21.74	V-V	-13.50	25.94	0.39	30.00	4.06
F0	20175	1732.50	4	Horn	H	-23.31		H-H	-12.85				
F0	20349	1749.90	4	Horn	V	-22.25	-22.25	V-V	-13.43	25.79	0.38	30.00	4.21
F0	20349	1749.90	4	Horn	H	-22.70		H-H	-12.81				

LTE band 4, 10MHz BW, RB=1, 16-QAM modulation

								Substitution Method					
EUT				Rx Antenna		Spectrum Analyzer		Tracking Generator					
Type	Ch	Frequency	Band	Type	Pol.	Reading	Max (V,H)	Pol.	Reading	Corrected Reading (relative to Isotropic Radiator)		Limit	Diff to Limit
		(MHz)				(dBuV)	(dBm)			(W)	(dBm)		
F0	20000	1715.00	4	Horn	V	-21.99	-21.99	V-V	-14.01	25.11	0.32	30.00	4.89
F0	20000	1715.00	4	Horn	H	-23.98		H-H	-13.53				
F0	20175	1732.50	4	Horn	V	-22.71	-22.71	V-V	-14.53	24.95	0.31	30.00	5.05
F0	20175	1732.50	4	Horn	H	-23.95		H-H	-13.84				
F0	20349	1749.90	4	Horn	V	-23.19	-23.19	V-V	-14.50	24.89	0.31	30.00	5.11

This report shall **NOT** be reproduced except in full without the written consent of BlackBerry RTS - A division of BlackBerry Limited.

Copyright 2005-2015

Page 285 of 537

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 5C	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

F0	20349	1749.90	4	Horn	H	-23.75		H-H	-13.71				
----	-------	---------	---	------	---	--------	--	-----	--------	--	--	--	--


APPENDIX 6A– LTE Band 12 CONDUCTED RF EMISSIONS TEST DATA/PLOTS

BlackBerry	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 6A	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE Band 12 Conducted RF Emission Test Data

This appendix contains measurement data pertaining to conducted spurious emissions, 99% power bandwidth and the channel mask.

Test Setup Diagram

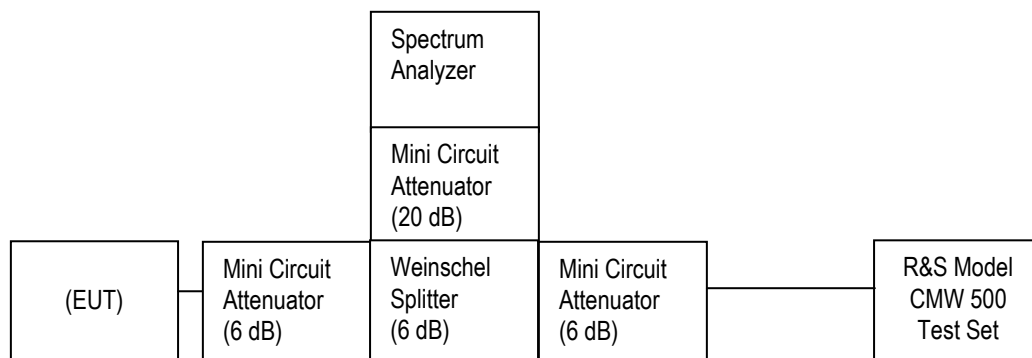

The following configurations were measured for model RHK211LW (STV100-1):

Date of Test: July 27 – September 3, 2015

The environmental test conditions were: Temperature: 22.7 – 23.6 °C
Relative Humidity: 38.7 – 61.2 %

The following measurements were performed by Sijia Li and Landon Martin.

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 6A	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE Band 12 Conducted RF Emission Test Data cont'd

Emission Designator Table

Frequency Range (MHz)	Conducted Output Power (dBm)	Emission Designator	Band	Bandwidth (MHz)	Modulation
701.5-713.5	22.74	4M50G7D	LTE B12	5	QPSK
701.5-713.5	22.45	4M48D7W	LTE B12	5	16QAM
704.0-711.0	22.72	8M97G7D	LTE B12	10	QPSK
704.0-711.0	22.55	8M94D7W	LTE B12	10	16QAM

The conducted spurious emissions – As per 47 CFR 2.202, 2.1046, 27.53, 27.54, 27.50 were measured from 30 MHz to 20 GHz.

–26 dBc Bandwidth and Occupied Bandwidth (99%)

the modulation spectrum was measured by both methods of 99% power bandwidth and –26 dBc bandwidth for each 5MHz and 10MHz with different number of RBs for LTE Band 12.

QPSK and 16-QAM modulations were applied to each of the bandwidths. Only the worst case measurements are documented in this report.

A minimum RB condition was also measured (RB = 1).

The resolution bandwidth required for out-of-band emissions in the 1 MHz bands immediately outside and adjacent to the frequency block, was determined to be at least 1% of the emission bandwidth.

The worst case –26dBc bandwidth for LTE Band 12 was measured to be 9.22 MHz. Results were derived in a 100 kHz resolution bandwidth.

On any frequency outside the frequency block and outside the adjacent 1 MHz bands, a resolution bandwidth of at least 1 MHz was applied.

Test Data for LTE Band 12 selected Frequencies in 10MHz BW (RB = 50)

LTE Band 12 Frequency (MHz)	26dBc Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
707.5	9.22	8.966

Test Data for LTE Band 12 selected Frequencies in 5MHz BW (RB = 25)

LTE Band 12 Frequency (MHz)	26dBc Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
704	4.635	4.495

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 6A	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

707.5	4.64	4.471
711	4.615	4.495

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 6A	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

Peak to Average Ratio (PAR)

For each 5MHz and 10MHz with Resource Block allocation 50,25 and 15 as per scalable bandwidths for LTE band 12, the peak to average ratio was measured on the low, middle and high channels with QPSK modulation.

On any frequency outside the frequency block and outside the adjacent 1 MHz bands, a resolution bandwidth of at least 1 MHz was applied.

The worst case measured was 9.61 dB on 10MHz bandwidth with Resource Block allocation 25 while transmitting at 707.5MHz.

Measurement Plots for LTE Band 12

See Figures 6-1a to 6-8a for the plots of the conducted spurious emissions.

See Figures 6-9a to 6-16a for the plots of 99% Occupied Bandwidth and -26 dBc Bandwidth.

See Figures 6-17a to 6-21a for the plots of the Channel mask.

See Figures 6-22a for the plots of the Peak to Average Ratio.

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 6A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE Band 12 Conducted RF Emission Test Data cont'd

Figure 3-1a: Band 12, Spurious Conducted Emissions, 10MHz BW (RB= 50)

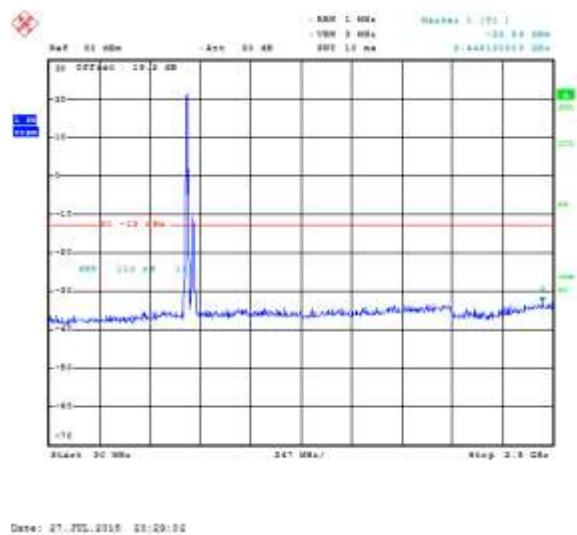


Figure 3-2a: Band 12, Spurious Conducted Emissions, 10MHz BW (RB= 50)

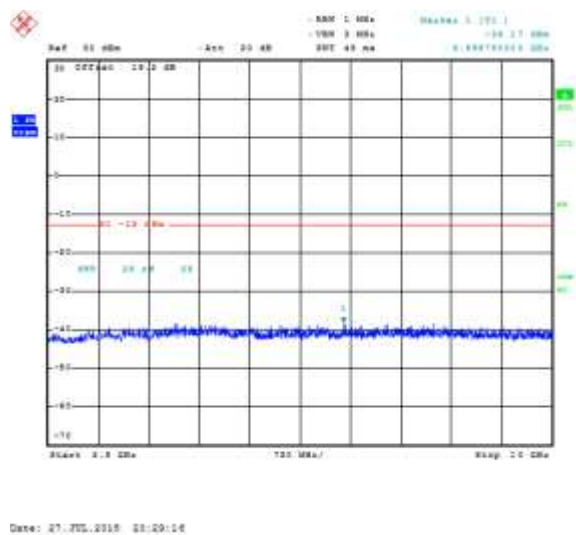


Figure 3-3a: Band 12, Spurious Conducted Emissions, Low channel, 5MHz BW (RB= 1)


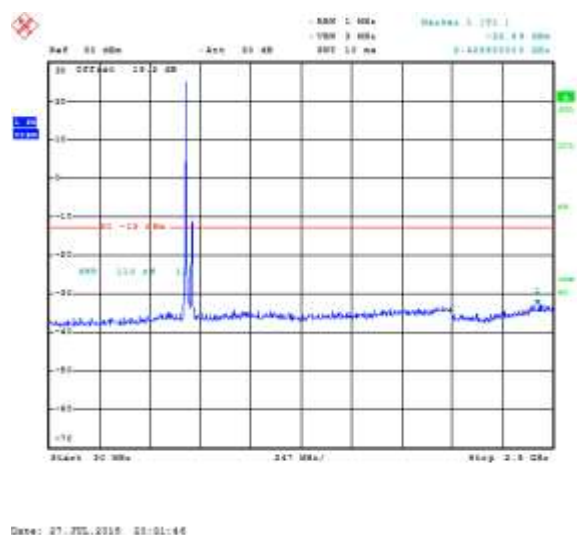


Figure 3-4a: Band 12, Spurious Conducted Emissions, Low channel, 5MHz BW (RB= 1)

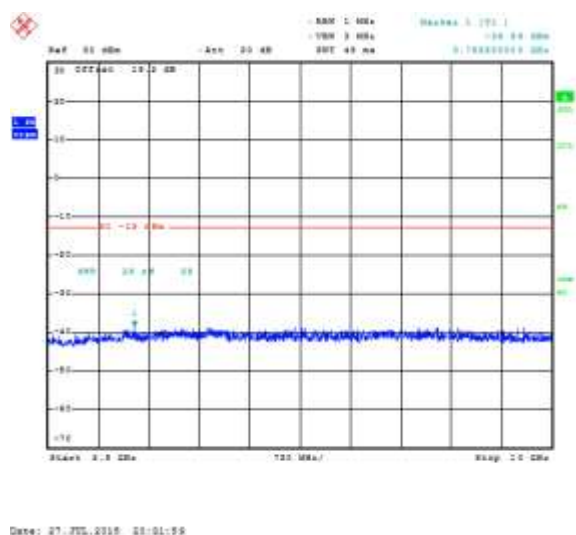

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 6A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE Band 12 Conducted RF Emission Test Data cont'd

Figure 3-5a: Band 12, Spurious Conducted Emissions, Middle Channel, 5MHz BW (RB= 25)

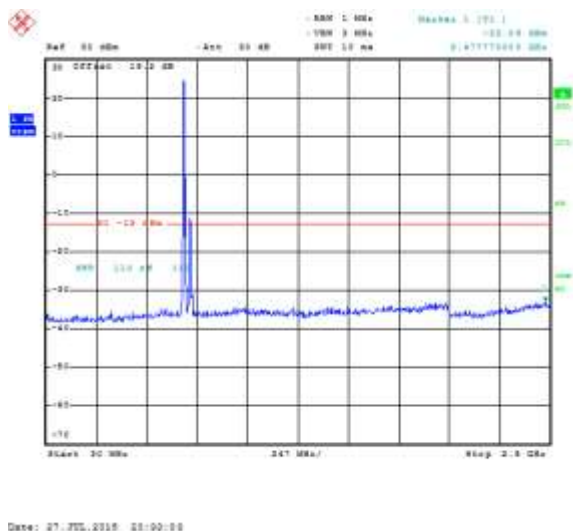


Figure 3-6a: Band 12, Spurious Conducted Emissions, High Channel, 5MHz BW (RB= 25)

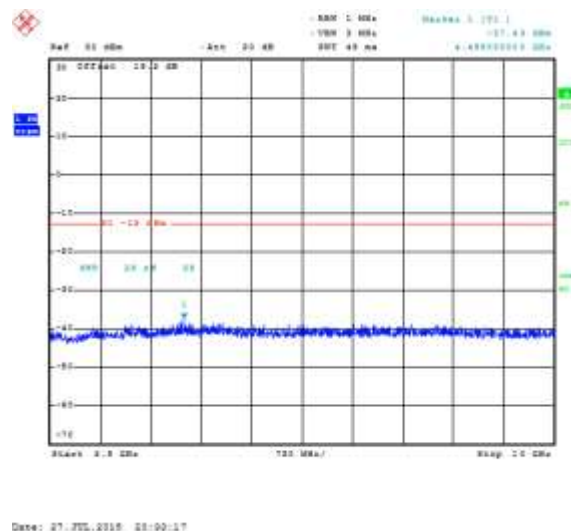


Figure 3-7a: Band 12, Spurious Conducted Emissions, High channel, 5MHz BW (RB= 25)


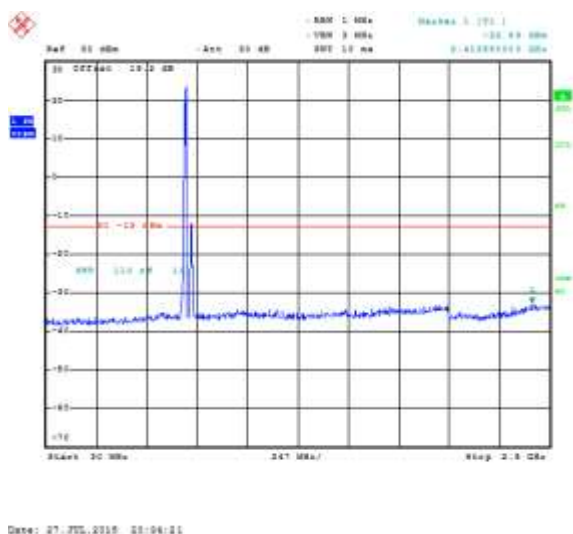



Figure 3-8a: Band 12, Spurious Conducted Emissions, High channel, 5MHz BW (RB= 25)

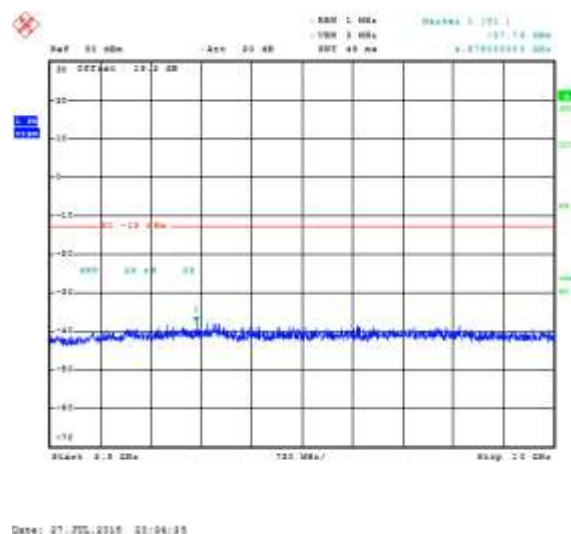

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 6A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 12 Conducted RF Emission Test Data cont'd

**Figure 3-9a: Occupied Bandwidth, Band 12
10MHz BW, RB=50**

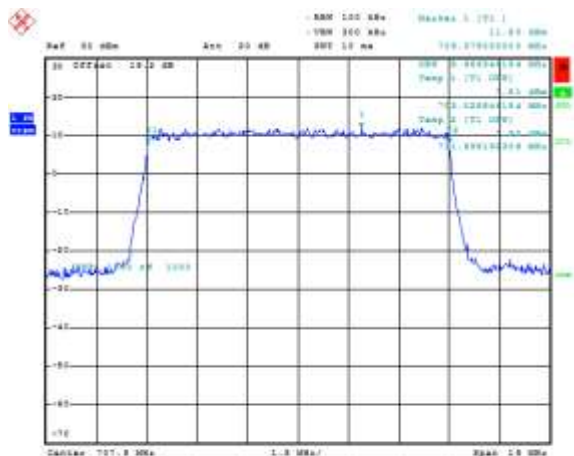


Date: 27.JUL.2015 17:45:49

**Figure 3-10a: Occupied Bandwidth, Band 5 Low
Channel, 5MHz BW, RB=25**

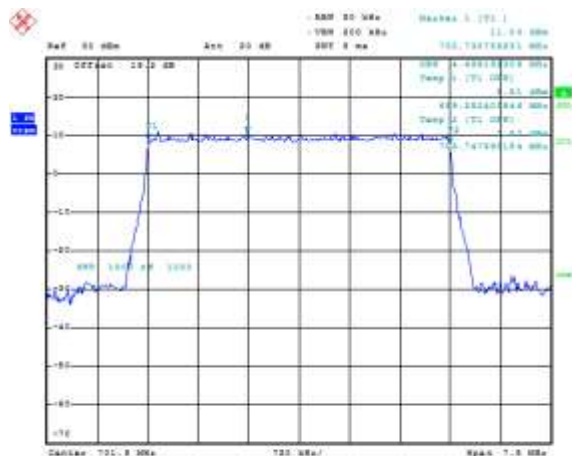


Date: 27.JUL.2015 17:47:36

**Figure 3-11a: Occupied Bandwidth, Band 5 Middle
Channel, 5MHz BW, RB=25**

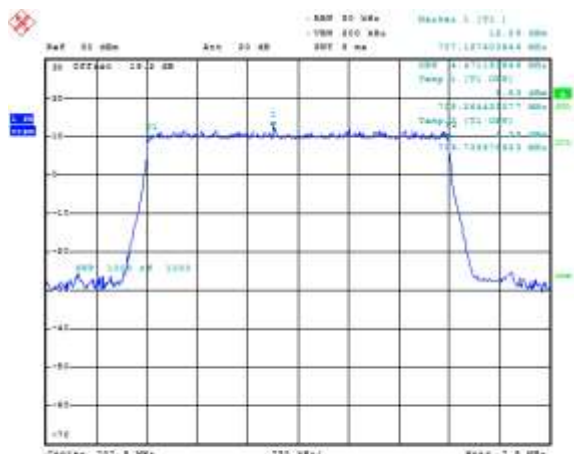

Date: 27.JUL.2015 17:48:04

**Figure 3-12a: Occupied Bandwidth, Band 5 High
Channel, 5MHz BW, RB=25**

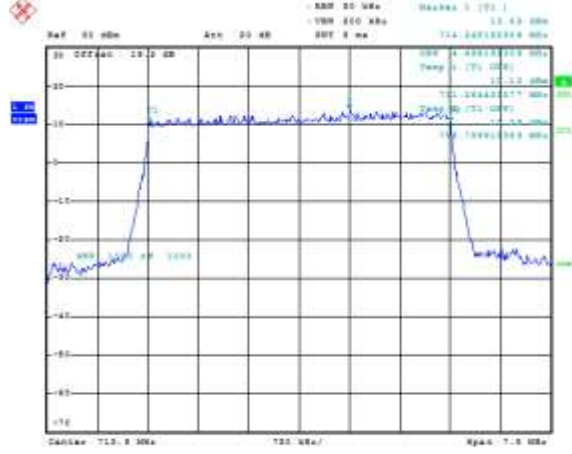


Date: 27.JUL.2015 17:48:29

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 6A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 12 Conducted RF Emission Test Data cont'd

Figure 3-13a: -26 dBc Bandwidth, Band 12 Middle Channel, 10MHz BW, RB=50

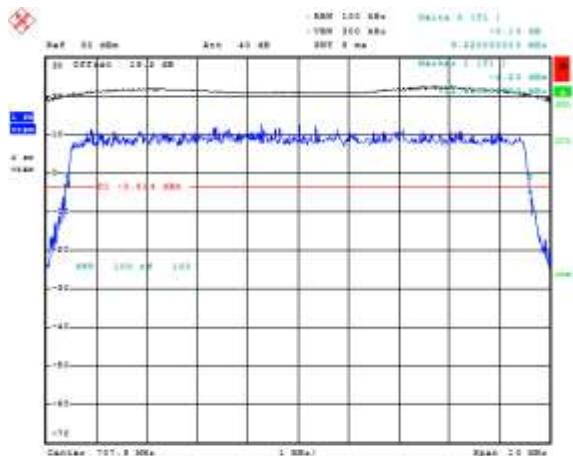


Date: 27.JUL.2015 17:22:55

Figure 3-14a: -26 dBc Bandwidth, Band 12 Low Channel, 5MHz BW, RB=25

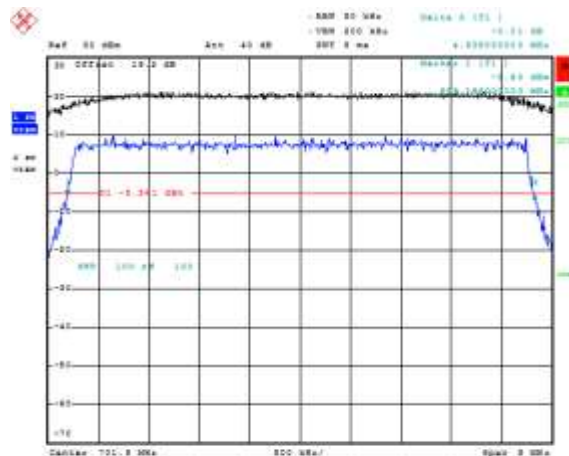


Date: 27.JUL.2015 17:22:56

Figure 3-15a: -26 dBc Bandwidth, Band 12 Middle Channel, 5MHz BW, RB=25

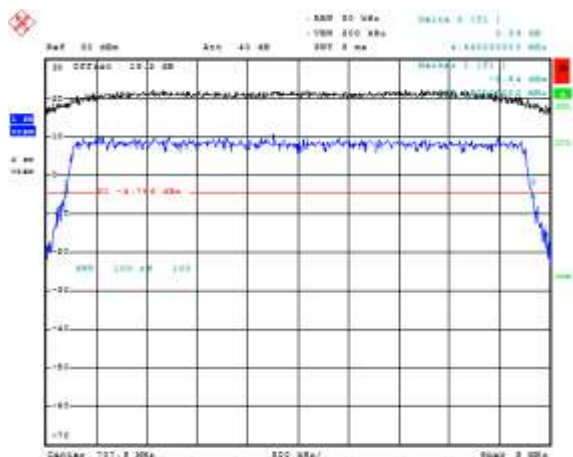

Date: 27.JUL.2015 17:23:07

Figure 3-16a: -26 dBc Bandwidth, Band 12 High Channel, 5MHz BW, RB=25

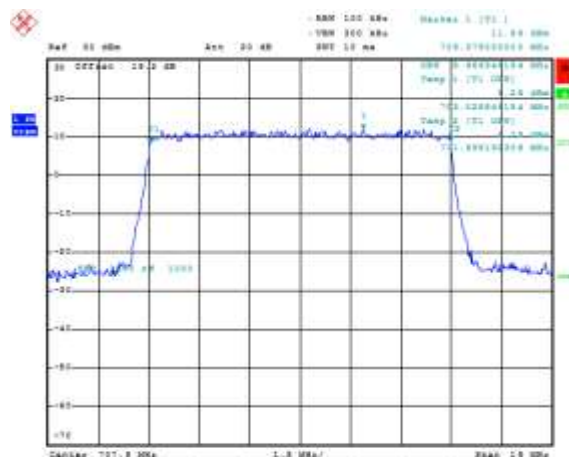


Date: 27.JUL.2015 17:40:56

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 6A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 12 Conducted RF Emission Test Data cont'd

Figure 3-17a: Band 12 Channel Mask, 10MHz BW, RB=50

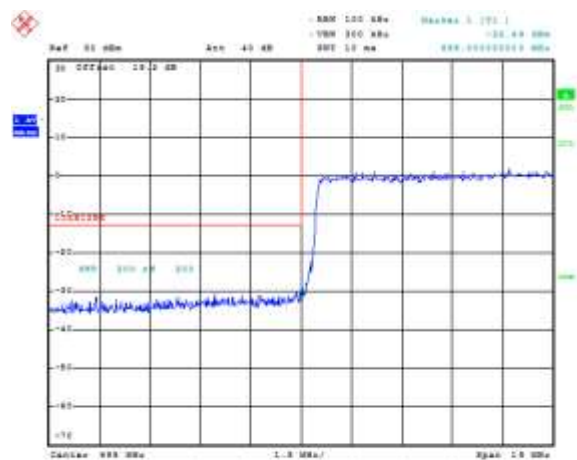


Date: 26-JUL-2015 03:29:55

Figure 3-17a: Band 12 Channel Mask, 10MHz BW, RB=50

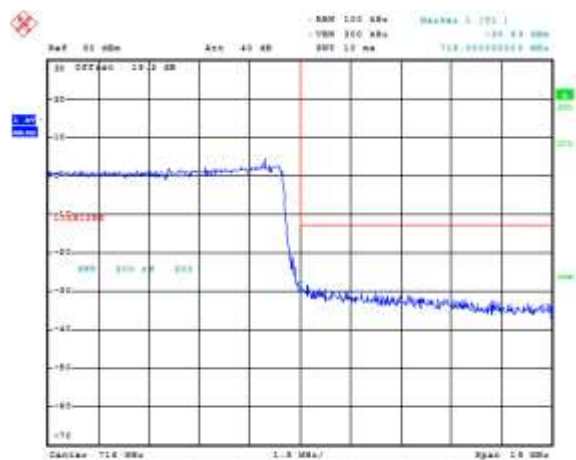


Date: 26-JUL-2015 03:30:24

Figure 3-18a: Band 12 Low Channel Mask, 5MHz BW, RB=1

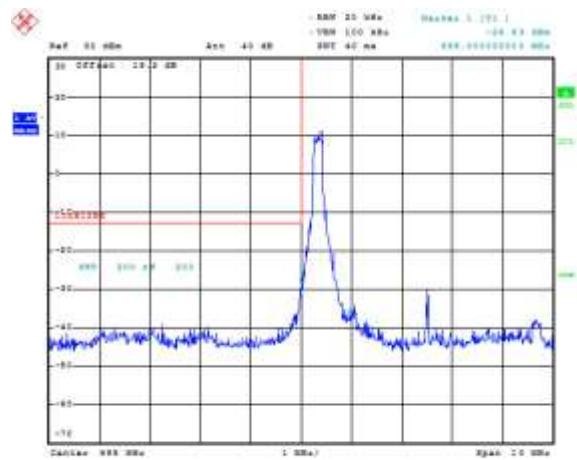

Date: 26-JUL-2015 03:30:55

Figure 3-19a: Band 12 Low Channel Mask, 5MHz BW, RB=25

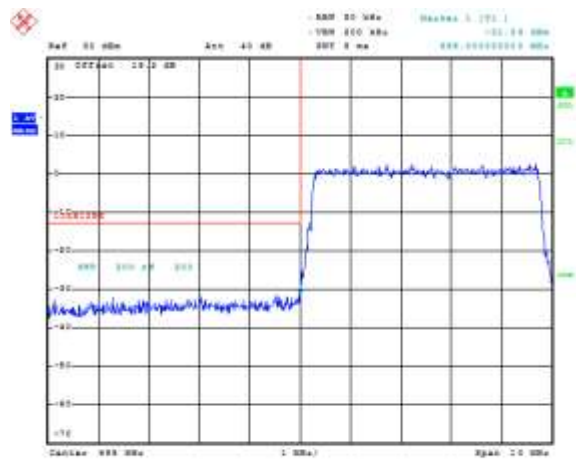

Date: 26-JUL-2015 03:31:07

BlackBerry	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 6A	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE Band 12 Conducted RF Emission Test Data cont'd

Figure 3-20a: Band 12 High Channel Mask, 5MHz BW, RB=1

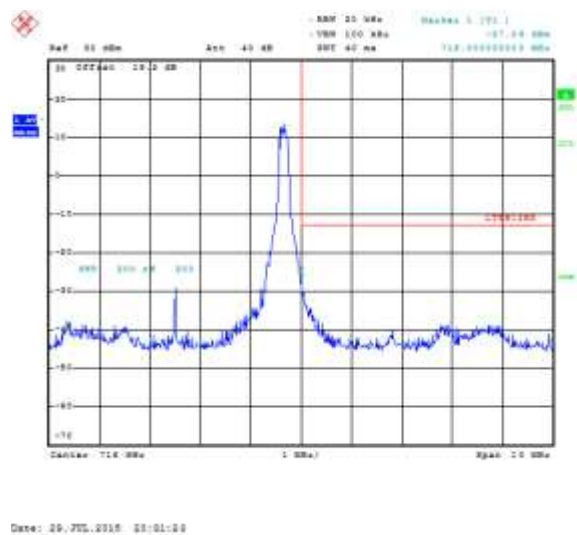


Figure 3-21a: Band 12 High Channel Mask, 5MHz BW, RB=25


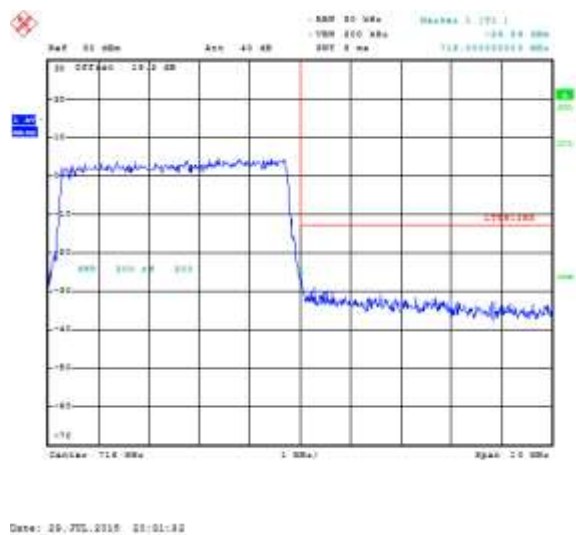


Figure 3-22a: Band 12 PAR, 10MHz BW, RB=25

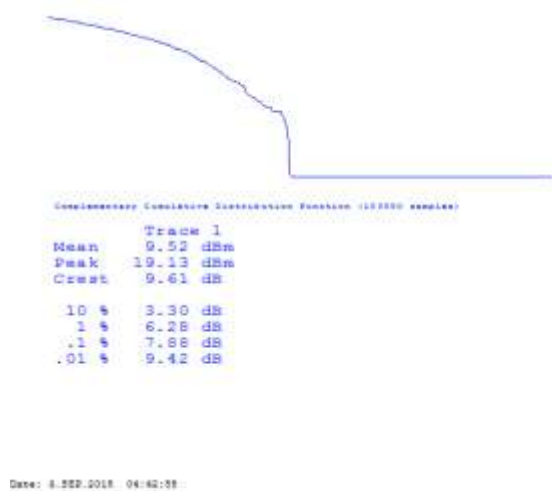

LTE Band 12 Conducted RF Emission Test Data cont'd

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 6A	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

The following configurations were measured for model RHL211LW (STV100-3):

Date of Test: July 30 and 31, 2015

The environmental test conditions were: Temperature: 24.0 °C
 Relative Humidity: 45.3 %

The following measurements were performed by Sijia Li and Landon Martin.

Emission Designator Table

Frequency Range (MHz)	Conducted Output Power (dBm)	Emission Designator	Band	Bandwidth (MHz)	Modulation
701.5-713.5	23.4	4M50G7D	LTE B12	5	QPSK
701.5-713.5	22.6	4M48D7W	LTE B12	5	16QAM
704.0-711.0	23.2	8M97G7D	LTE B12	10	QPSK
704.0-711.0	23.2	8M94D7W	LTE B12	10	16QAM

The conducted spurious emissions – As per 47 CFR 2.202, 2.1046, 27.53, 27.54, 27.50 were measured from 30 MHz to 20 GHz.

–26 dBc Bandwidth and Occupied Bandwidth (99%)

the modulation spectrum was measured by both methods of 99% power bandwidth and –26 dBc bandwidth for each 5MHz and 10MHz with different number of RBs for LTE Band 12.

QPSK and 16-QAM modulations were applied to each of the bandwidths. Only the worst case measurements are documented in this report.

A minimum RB condition was also measured (RB = 1).

The resolution bandwidth required for out-of-band emissions in the 1 MHz bands immediately outside and adjacent to the frequency block, was determined to be at least 1% of the emission bandwidth.

The worst case –26dBc bandwidth for LTE Band 12 was measured to be 9.22 MHz. Results were derived in a 100 kHz resolution bandwidth.

On any frequency outside the frequency block and outside the adjacent 1 MHz bands, a resolution bandwidth of at least 1 MHz was applied.

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 6A	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

Test Data for LTE Band 12 selected Frequencies in 10MHz BW (RB = 50)

LTE Band 12 Frequency (MHz)	26dBc Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
707.5	9.22	8.966

Test Data for LTE Band 12 selected Frequencies in 5MHz BW (RB = 25)

LTE Band 12 Frequency (MHz)	26dBc Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
704	4.59	4.495
707.5	4.625	4.471
711	4.65	4.495

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 6A	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

Peak to Average Ratio (PAR)

For each 5MHz and 10MHz with Resource Block allocation 50,25 and 15 as per scalable bandwidths for LTE band 12, the peak to average ratio was measured on the low, middle and high channels with QPSK modulation.

On any frequency outside the frequency block and outside the adjacent 1 MHz bands, a resolution bandwidth of at least 1 MHz was applied.

The worst case measured was 9.93 dB on 5MHz bandwidth with Resource Block allocation 25 while transmitting at 707.5MHz.

Measurement Plots for LTE Band 12

See Figures 6-1a to 6-12a for the plots of the conducted spurious emissions.

See Figures 6-13a to 6-26a for the plots of 99% Occupied Bandwidth and -26 dBc Bandwidth.


See Figures 6-27a to 6-34a for the plots of the Channel mask.

See Figures 6-35a to 6-38a for the plots of the Peak to Average Ratio.

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 6A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 12 Conducted RF Emission Test Data cont'd

Figure 3-5a: Band 12, Spurious Conducted Emissions, High Channel, 10MHz BW (RB= 100)

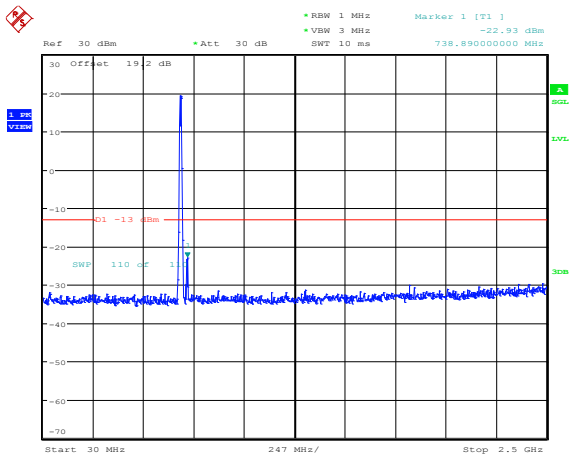


Date: 31.JUL.2015 14:25:00

Figure 3-6a: Band 12, Spurious Conducted Emissions, High Channel, 10MHz BW (RB= 100)

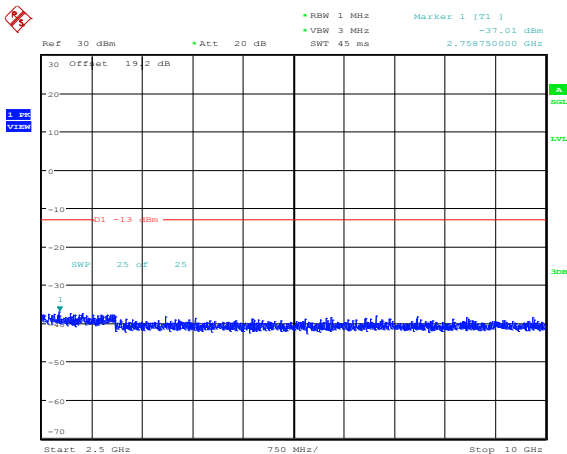


Date: 31.JUL.2015 14:25:06

Figure 3-7a: Band 12, Spurious Conducted Emissions, Low channel, 5MHz BW (RB= 1)

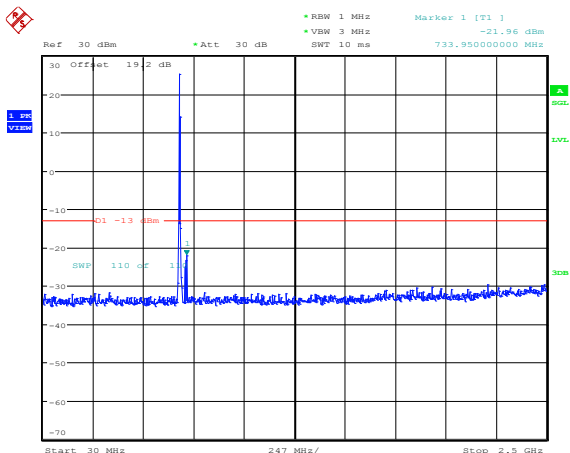

Date: 31.JUL.2015 14:25:26

Figure 3-8a: Band 12, Spurious Conducted Emissions, Low channel, 5MHz BW (RB= 1)

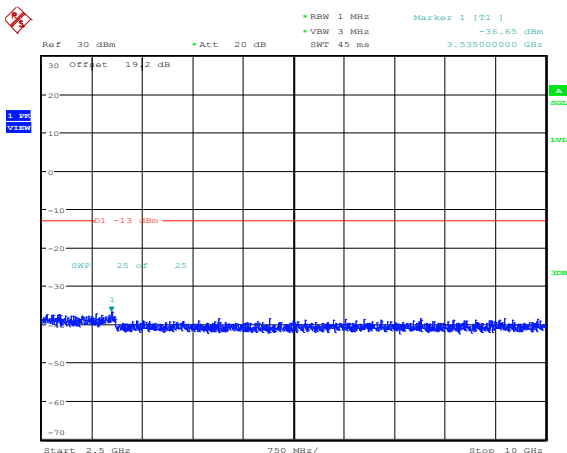

Date: 31.JUL.2015 14:25:31

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 6A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE Band 12 Conducted RF Emission Test Data cont'd

Figure 3-9a: Band 12, Spurious Conducted Emissions, Middle Channel, 5MHz BW (RB= 25)

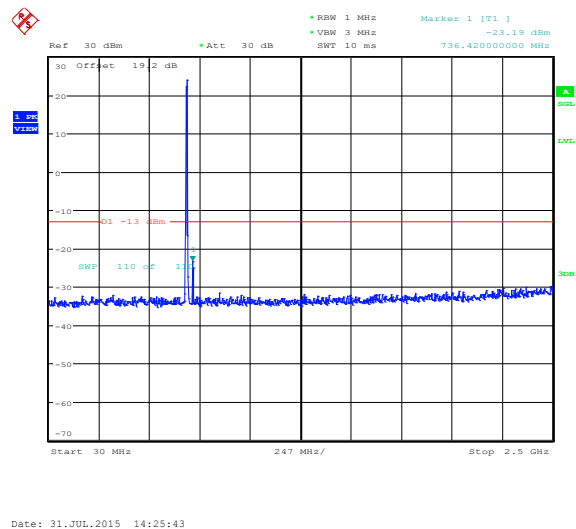


Figure 3-10a: Band 12, Spurious Conducted Emissions, Middle Channel, 5MHz BW (RB= 25)

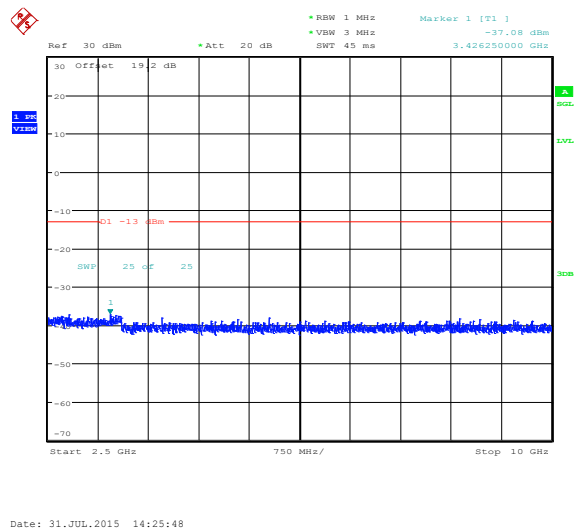


Figure 3-11a: Band 12, Spurious Conducted Emissions, High channel, 5MHz BW (RB= 50)


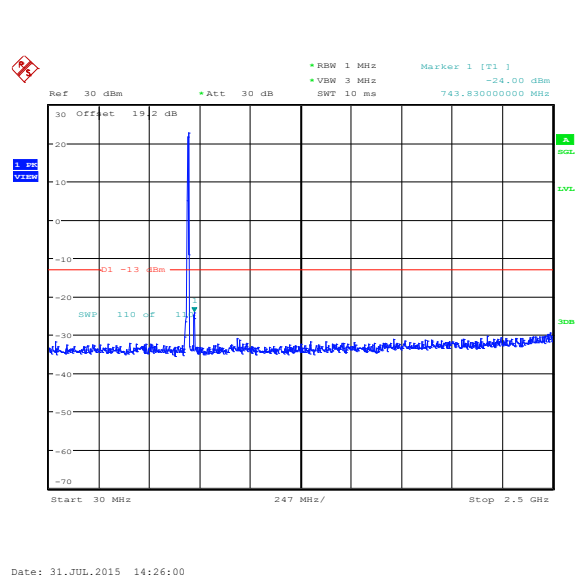



Figure 3-12a: Band 12, Spurious Conducted Emissions, High channel, 5MHz BW (RB= 50)

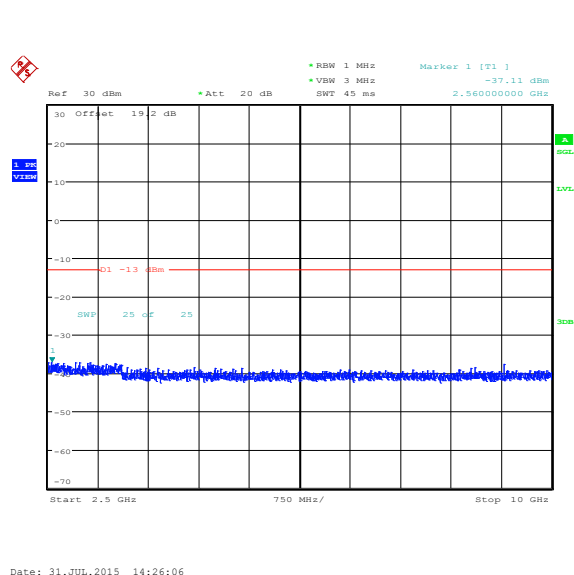

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 6A	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 12 Conducted RF Emission Test Data cont'd

Figure 3-13a: Occupied Bandwidth, Band 12
10MHz BW, RB=50

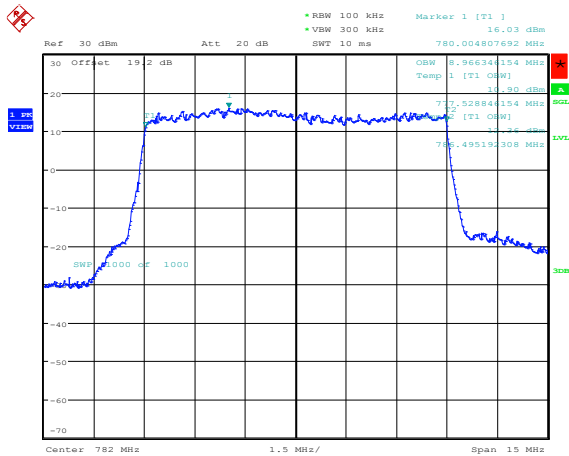


Date: 30.JUL.2015 21:20:38

Figure 3-14a: Occupied Bandwidth, Band 12,
10MHz BW, RB=50

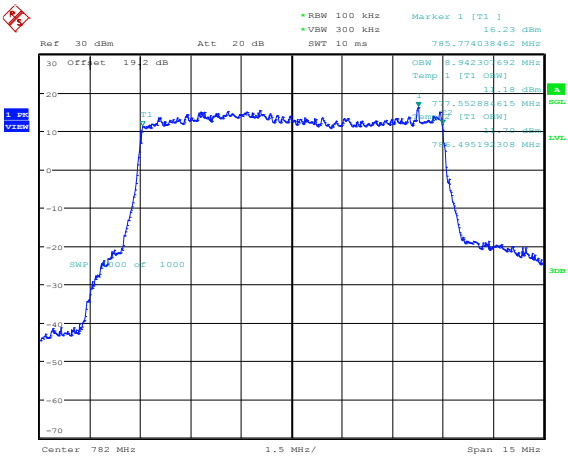


Date: 30.JUL.2015 21:21:21

Figure 3-15a: Occupied Bandwidth, Band 5 Low
Channel, 5MHz BW, RB=25

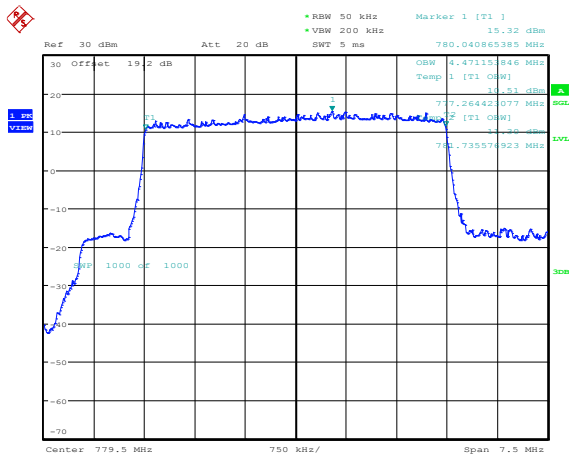

Date: 30.JUL.2015 21:22:11

Figure 3-16a: Occupied Bandwidth, Band 5 Middle
Channel, 5MHz BW, RB=25

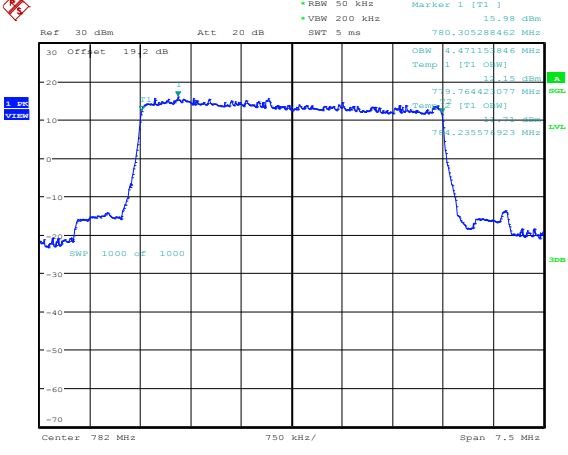


Date: 30.JUL.2015 21:22:40

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 6A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 12 Conducted RF Emission Test Data cont'd

Figure 3-17a: Occupied Bandwidth, Band 12 High Channel, 5MHz BW, RB=25

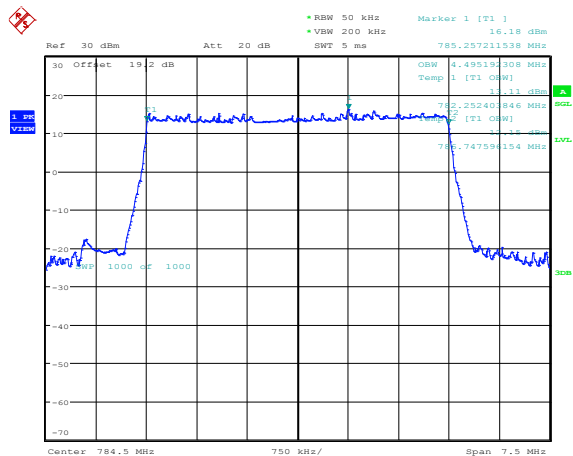


Date: 30.JUL.2015 21:23:15

Figure 3-18a: Occupied Bandwidth, Band 5 Low Channel, 5MHz BW, RB=25

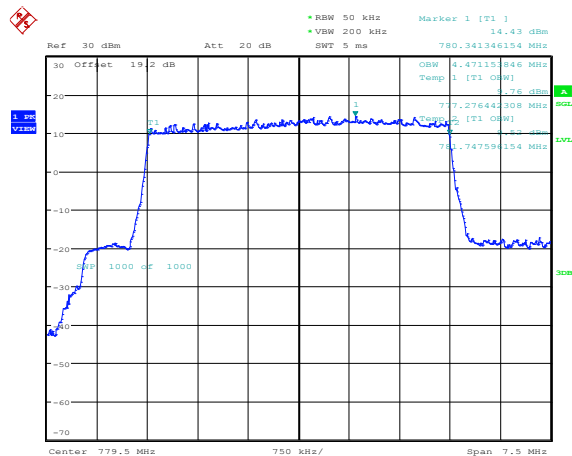


Date: 30.JUL.2015 21:23:42

Figure 3-19a: Occupied Bandwidth, Band 5 Middle Channel, 5MHz BW, RB=25

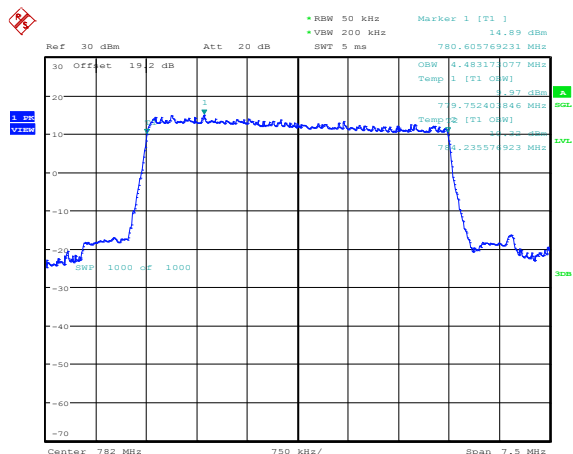

Date: 30.JUL.2015 21:24:11

Figure 3-20a: Occupied Bandwidth, Band 5 High Channel, 5MHz BW, RB=25

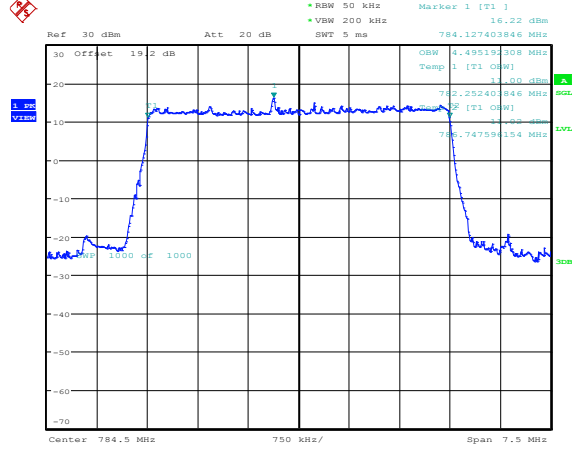


Date: 30.JUL.2015 21:24:46

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 6A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 12 Conducted RF Emission Test Data cont'd

Figure 3-21a: -26 dBc Bandwidth, Band 12 Low Channel, 10MHz BW, RB=50

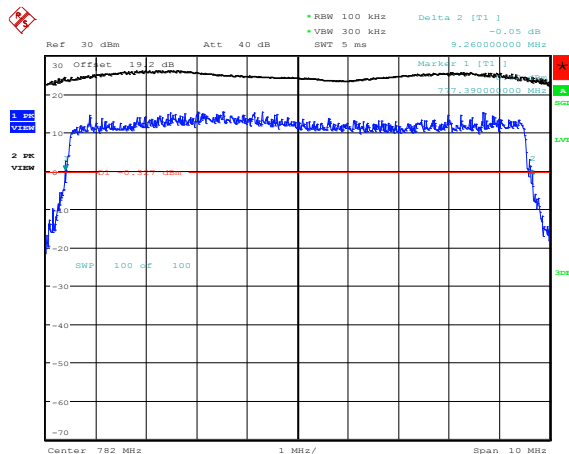


Date: 30.JUL.2015 21:06:53

Figure 3-22a: -26 dBc Bandwidth, Band 12 Middle Channel, 10MHz BW, RB=50

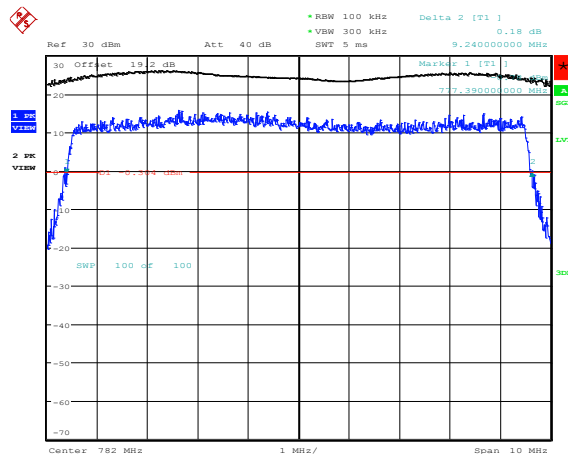


Date: 30.JUL.2015 21:07:08

Figure 3-23a: -26 dBc Bandwidth, Band 12 High Channel, 10MHz BW, RB=50

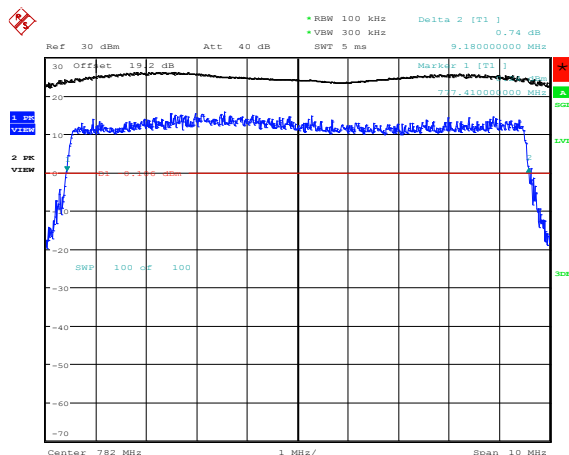

Date: 30.JUL.2015 21:07:23

Figure 3-24a: -26 dBc Bandwidth, Band 12 Low Channel, 5MHz BW, RB=25

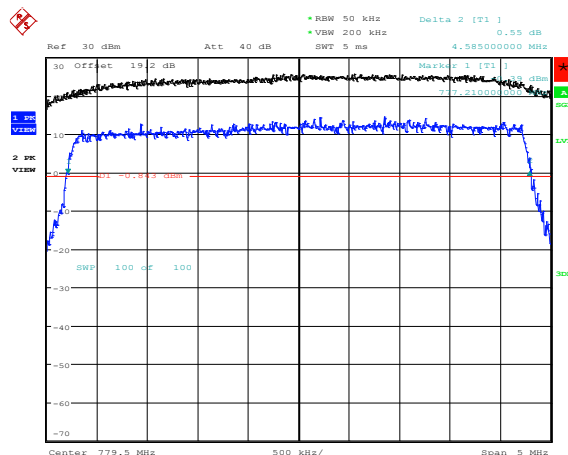


Date: 30.JUL.2015 21:08:02

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 6A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 12 Conducted RF Emission Test Data cont'd

Figure 3-25a: -26 dBc Bandwidth, Band 12 Middle Channel, 5MHz BW, RB=25

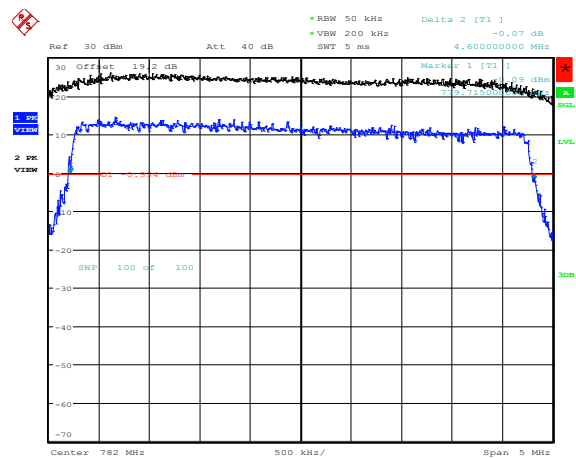

Date: 30.JUL.2015 21:08:16

Figure 3-26a: -26 dBc Bandwidth, Band 12 High Channel, 5MHz BW, RB=25

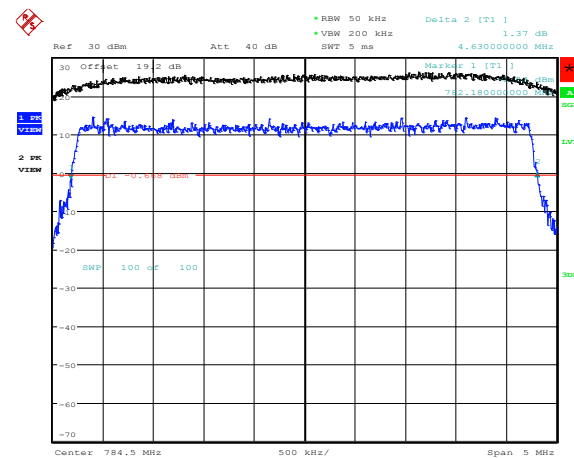


Date: 30.JUL.2015 21:08:30

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 6A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 12 Conducted RF Emission Test Data cont'd

Figure 3-27a: Band 12 Channel Mask, 10MHz BW, RB=50

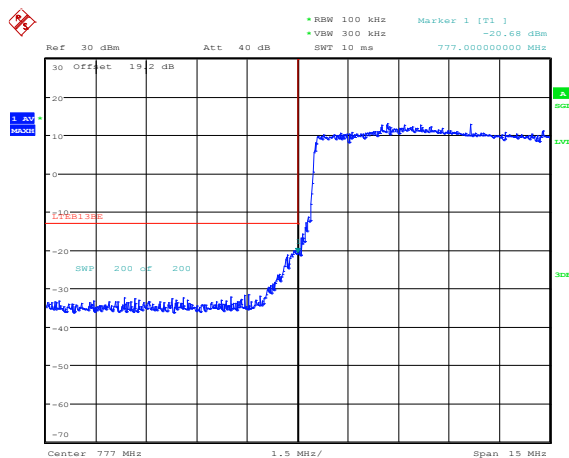


Date: 30.JUL.2015 22:31:38

Figure 3-28a: Band 12 Channel Mask, 10MHz BW, RB=50

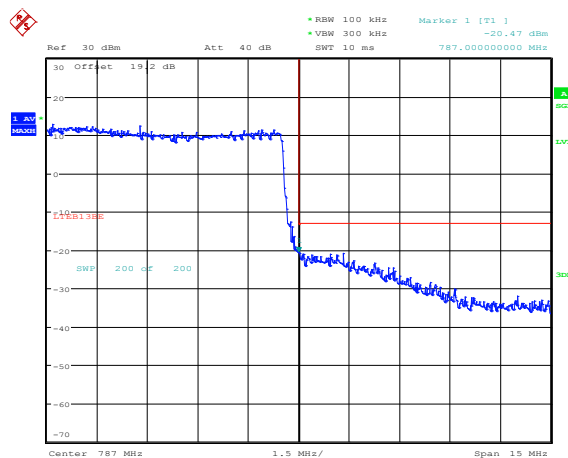


Date: 30.JUL.2015 22:32:07

Figure 3-29a: Band 12 Low Channel Mask, 5MHz BW, RB=25

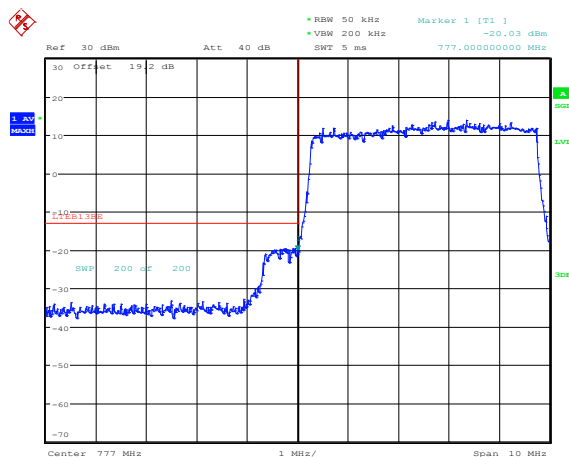

Date: 30.JUL.2015 22:32:42

Figure 3-30a: Band 12 High Channel Mask, 5MHz BW, RB=25

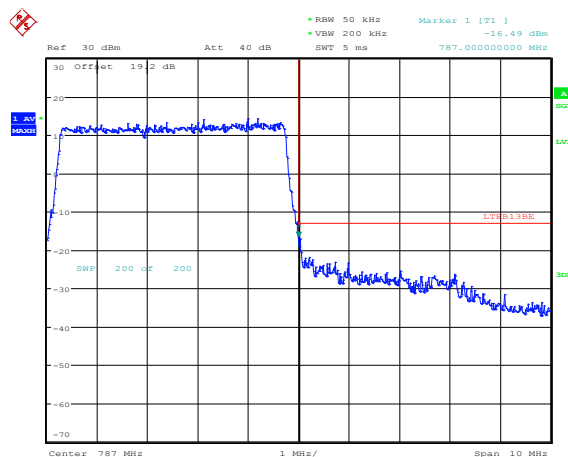


Date: 30.JUL.2015 22:33:11

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 6A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 12 Conducted RF Emission Test Data cont'd

Figure 3-31a: Band 12 Low Channel Mask, 10MHz BW, RB=1

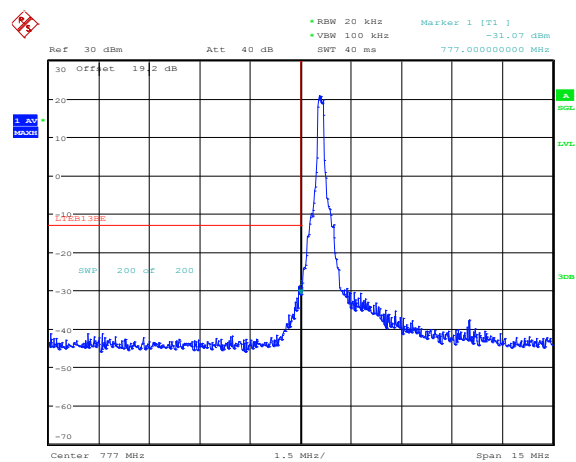

Date: 30.JUL.2015 22:31:25

Figure 3-32a: Band 12 High Channel Mask, 10MHz BW, RB=1

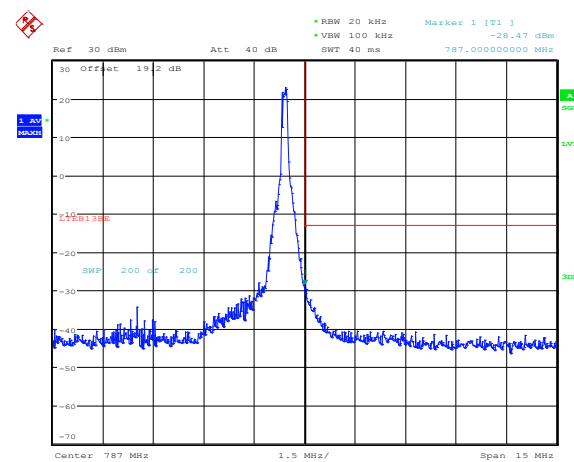


Date: 30.JUL.2015 22:31:55

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 6A	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 12 Conducted RF Emission Test Data cont'd

Figure 3-33a: Band 12 Low Channel Mask, 5MHz BW, RB=1

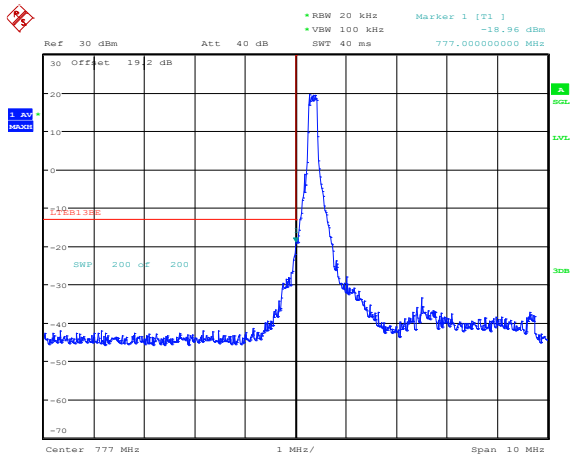


Date: 30.JUL.2015 22:32:33

Figure 3-34a: Band 12 High Channel Mask, 5MHz BW, RB=1

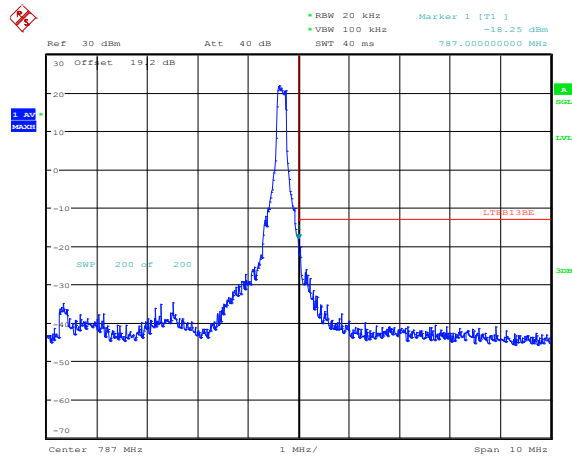


Date: 30.JUL.2015 22:33:00

Figure 3-35a: Band 12 PAR, 10MHz BW, RB=25

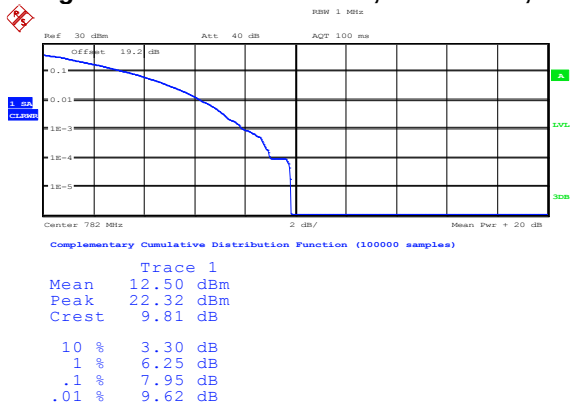

Date: 31.JUL.2015 15:03:07

Figure 3-36a: Band 12 PAR, 10MHz BW, RB=50

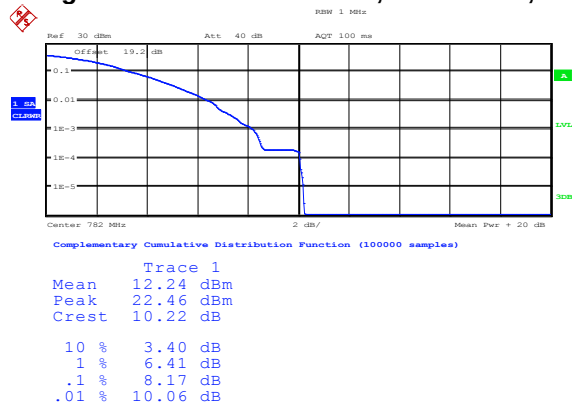


Date: 31.JUL.2015 15:03:25

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 6A	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 12 Conducted RF Emission Test Data cont'd

 **Figure 3-37a: Band 12 PAR, 5MHz BW, RB=15**

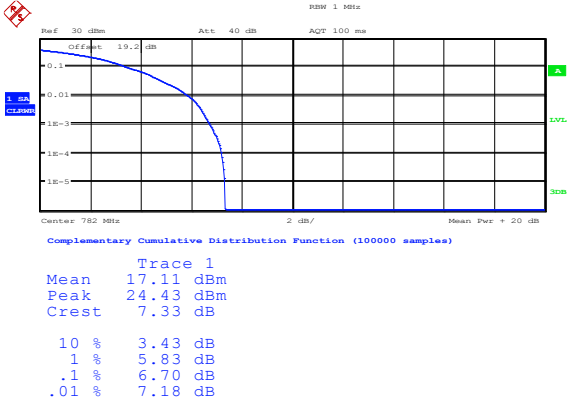

Date: 31.JUL.2015 15:03:51

 **Figure 3-38a: Band 12 PAR, 5MHz BW, RB=25**

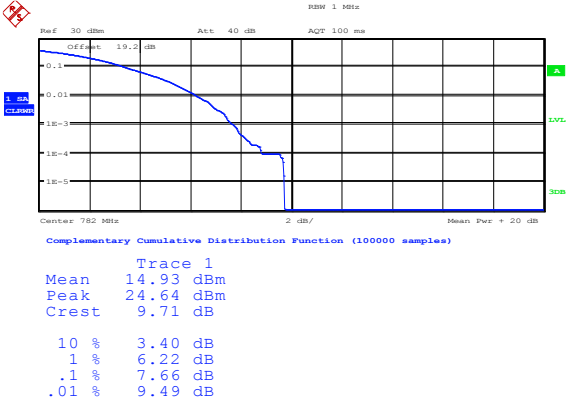


Date: 31.JUL.2015 15:04:09

APPENDIX 6B – LTE Band 12 FREQUENCY STABILITY TEST DATA

BlackBerry	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 6B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE Band 12 Frequency Stability Test Data

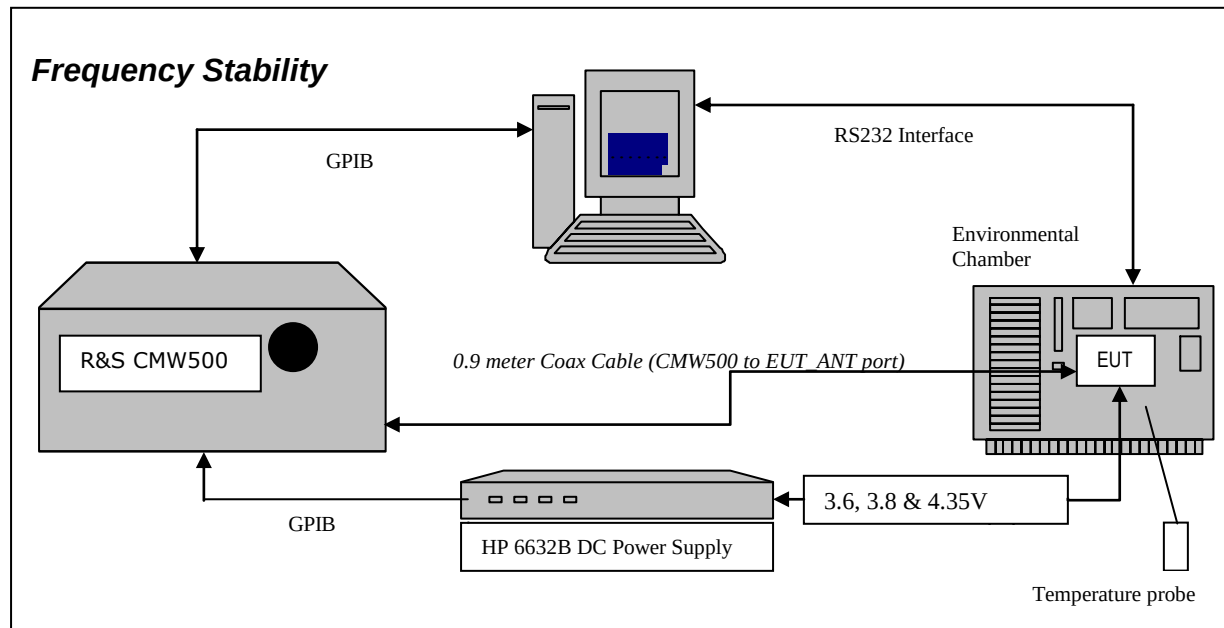

The following measurements were performed by Sijia Li.

CFR 47 Chapter 1 - Federal Communications Commission Rules

Part 2 Required Measurements

2.1055 Frequency Stability - Procedures

(a,b) Frequency Stability - Temperature Variation

(d) Frequency Stability - Voltage Variation

The EUT meets the requirements as stated in CFR 47 chapter 1, Section 27.54, Frequency Stability.

Frequency Stability measurement devices were configured as presented in the block diagram recording frequency, power, data, temperatures, and stepped voltages controlled via a GPIB interface linked to the Environmental chamber, a DC power supply, and the Communications Test Set. A 0.9-metre coax cable was calibrated to characterize the insertion loss for the transmitted frequencies between the RF input/output of the CMW 500 and the EUT antenna port.

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 6B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

Test Setup:

The EUT was placed in the Temperature chamber and connected to CMW 500 outside as shown in the figure above. Dry air was pumped inside the temperature chamber to maintain a backpressure during the test. The EUT was kept in the off condition at all times except when the following measurements were to be made.

The chamber was switched on and the temperature was set to -30°C. After the chamber stabilized at -30 °C there was a soak period of one hour to alleviate moisture in the chamber, the EUT voltage was enabled. The system software recorded the frequency, power, and associated measurements.

A Computer system controlled the automated software. This application was given the command of activating all machines intrinsic to the temperature and voltage tests controlling the CMW 500 via the GPIB Bus. The Environmental Chamber was instructed through an RS-232 serial line. The EUT dialogue was passed through a serial connection.

The EUT repetitively transmitted 100 bursts for each set of programmed parameters recording temperature, voltage settings, and systematically selected frequencies. The power supply was cycled from minimum voltage 3.6 volts, 3.8 volts and to 4.35 volts maximum voltage. The frequency error was measured at a maximum output power and recorded by the automated system test software.

The EUT output power and frequency was measured at 3.6 volts, 3.8 volts and 4.35 volts. The transmit frequency was measured on 782MHz for 10MHz bandwidth with maximum (50) RB. The transmit frequency was varied in 3 steps consisting of 779.5 MHz, 782.0 MHz and 784.5 MHz each was measured under 5 MHz bandwidth with maximum (25) RBs. This frequency was recorded in MHz and deviation from nominal, in Parts Per Million.

After the initial one-hour soak at the beginning of the tests, a period of thirty minutes soak was initialized between each ascending temperature step, before proceeding to the next measurement test cycle.

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 6B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

Procedure:

The test system software for commencing the Frequency Stability Tests carried through the following cycle.

43. Switch on the HP 6632B power supply; CMW 500 Communications test Set, and Environmental Chamber.
44. Start test program
45. Set the Temperature to –30°C and maintain a period of one- hour soak time, with the EUT supply voltage disabled.
46. Set power supply voltage to 3.6 volts.
47. Set up CMW 500 Radio Communication Tester.
48. Command the CMW 500 to switch to the low channel.
49. Enable the voltage to the EUT, and connect a link to the CMW 500 test set.
50. EUT is commanded to Transmit 100 Bursts.
51. Software logs the following data from the CMW 500, power supply and temperature chamber: Traffic Channel Number, Traffic Channel Frequency, Power Level, Chamber Temperature, Supply Voltage, Power and Frequency Error.
52. The CMW 500 commands the EUT to change frequency to the middle channel and high channel and repeats steps 7 to 9.
53. Repeat steps 5 to 10 changing the supply voltage to 3.8 Volts
54. Increase temperature by 10°C and soak for 1/2 hour.
55. Repeat steps 4 - 12 for temperatures –30°C to 60°C.
56. Repeat steps 5 to 10 changing the supply voltage to 4.35 volts

Procedure 5 to 10 was repeated at room temperature (20°C) with the power supply voltage set to 3.6, 3.8 and 4.35 volts

The following configurations were measured for model RHK211LW (STV100-1):

The maximum frequency error in the LTE Band 12 measured was **0.0058 PPM**.

The following configurations were measured for model RHL211LW (STV100-3):

The maximum frequency error in the LTE Band 12 measured was **-0.0067 PPM**.

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 6B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

The following configurations were measured for model RHK211LW (STV100-1):

Date of test: April 25, 2015

**LTE Band 12 results (10MHz Bandwidth): channels 23060, 23095 and 23129 @ 20°C
maximum transmitted power**

Traffic Channel Number	LTE Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23060	704	3.6	20	-3.09	-0.0044
23095	707.5	3.6	20	3.85	0.0054
23129	710.9	3.6	20	3.85	0.0054

Traffic Channel Number	LTE Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23060	704	3.8	20	3.68	0.0052
23095	707.5	3.8	20	4.09	0.0058
23129	710.9	3.8	20	3.30	0.0046

Traffic Channel Number	LTE Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23060	704	4.35	20	3.45	0.0049
23095	707.5	4.35	20	3.86	0.0055
23129	710.9	4.35	20	3.78	0.0053

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 6B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE Band 12 Results (10MHz Bandwidth): channel 23060 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23060	704	3.6	-30	-2.37	-0.0034
23060	704	3.6	-20	2.52	0.0036
23060	704	3.6	-10	3.45	0.0049
23060	704	3.6	0	4.68	0.0066
23060	704	3.6	10	2.69	0.0038
23060	704	3.6	20	-3.09	-0.0044
23060	704	3.6	30	3.63	0.0052
23060	704	3.6	40	-3.82	-0.0054
23060	704	3.6	50	-3.81	-0.0054
23060	704	3.6	60	-3.03	-0.0043

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23060	704	3.8	-30	1.97	0.0028
23060	704	3.8	-20	3.46	0.0049
23060	704	3.8	-10	3.39	0.0048
23060	704	3.8	0	1.65	0.0023
23060	704	3.8	10	-2.90	-0.0041
23060	704	3.8	20	3.68	0.0052
23060	704	3.8	30	2.57	0.0037
23060	704	3.8	40	-2.53	-0.0036
23060	704	3.8	50	-2.22	-0.0031
23060	704	3.8	60	-2.88	-0.0041

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23060	704	4.35	-30	-2.99	-0.0042
23060	704	4.35	-20	-2.79	-0.0040
23060	704	4.35	-10	2.99	0.0042
23060	704	4.35	0	1.66	0.0024
23060	704	4.35	10	-2.22	-0.0031
23060	704	4.35	20	3.45	0.0049
23060	704	4.35	30	-5.18	-0.0074
23060	704	4.35	40	-3.05	-0.0043
23060	704	4.35	50	2.06	0.0029
23060	704	4.35	60	3.25	0.0046

This report shall NOT be reproduced except in full without the written consent of BlackBerry RTS - A division of BlackBerry Limited.

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 6B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

**LTE Band 12 Results(5MHz Bandwidth): channel 23095 @ maximum transmitted power
(cont'd)**

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23095	707.5	3.6	-30	3.58	0.0051
23095	707.5	3.6	-20	3.73	0.0053
23095	707.5	3.6	-10	3.13	0.0044
23095	707.5	3.6	0	1.92	0.0027
23095	707.5	3.6	10	3.65	0.0052
23095	707.5	3.6	20	3.85	0.0054
23095	707.5	3.6	30	2.93	0.0041
23095	707.5	3.6	40	-4.11	-0.0058
23095	707.5	3.6	50	-3.08	-0.0043
23095	707.5	3.6	60	-3.60	-0.0051

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23095	707.5	3.8	-30	2.23	0.0032
23095	707.5	3.8	-20	-2.55	-0.0036
23095	707.5	3.8	-10	3.42	0.0048
23095	707.5	3.8	0	3.10	0.0044
23095	707.5	3.8	10	-2.57	-0.0036
23095	707.5	3.8	20	4.09	0.0058
23095	707.5	3.8	30	2.63	0.0037
23095	707.5	3.8	40	-3.30	-0.0047
23095	707.5	3.8	50	1.90	0.0027
23095	707.5	3.8	60	-3.39	-0.0048

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23095	707.5	4.35	-30	-4.28	-0.0060
23095	707.5	4.35	-20	-2.80	-0.0040
23095	707.5	4.35	-10	2.00	0.0028
23095	707.5	4.35	0	5.01	0.0071
23095	707.5	4.35	10	-2.52	-0.0036
23095	707.5	4.35	20	3.86	0.0055
23095	707.5	4.35	30	2.79	0.0039
23095	707.5	4.35	40	-4.03	-0.0057
23095	707.5	4.35	50	-3.22	-0.0045
23095	707.5	4.35	60	1.97	0.0028

This report shall NOT be reproduced except in full without the written consent of BlackBerry RTS - A division of BlackBerry Limited.

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 6B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE Band 12 Results(5MHz Bandwidth): channel 23129 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23129	710.9	3.6	-30	3.83	0.0054
23129	710.9	3.6	-20	3.81	0.0054
23129	710.9	3.6	-10	3.46	0.0049
23129	710.9	3.6	0	-2.20	-0.0031
23129	710.9	3.6	10	3.56	0.0050
23129	710.9	3.6	20	3.85	0.0054
23129	710.9	3.6	30	2.46	0.0035
23129	710.9	3.6	40	-3.09	-0.0043
23129	710.9	3.6	50	-2.13	-0.0030
23129	710.9	3.6	60	-3.35	-0.0047

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23129	710.9	3.8	-30	2.16	0.0030
23129	710.9	3.8	-20	-3.91	-0.0055
23129	710.9	3.8	-10	3.00	0.0042
23129	710.9	3.8	0	-1.69	-0.0024
23129	710.9	3.8	10	-2.92	-0.0041
23129	710.9	3.8	20	3.30	0.0046
23129	710.9	3.8	30	-3.00	-0.0042
23129	710.9	3.8	40	-2.99	-0.0042
23129	710.9	3.8	50	1.80	0.0025
23129	710.9	3.8	60	-2.96	-0.0042

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23129	710.9	4.35	-30	-3.25	-0.0046
23129	710.9	4.35	-20	-2.39	-0.0034
23129	710.9	4.35	-10	2.83	0.0040
23129	710.9	4.35	0	4.61	0.0065
23129	710.9	4.35	10	3.56	0.0050
23129	710.9	4.35	20	3.78	0.0053
23129	710.9	4.35	30	2.02	0.0028
23129	710.9	4.35	40	3.75	0.0053
23129	710.9	4.35	50	-2.76	-0.0039
23129	710.9	4.35	60	-2.70	-0.0038

This report shall NOT be reproduced except in full without the written consent of BlackBerry RTS - A division of BlackBerry Limited.

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 6B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

Procedure for IC:

The test system software for commencing the Frequency Stability Tests carried through the following cycle.

1. Switch on the HP 6632B power supply; CMW 500 Communications test Set, and Environmental Chamber.
2. Start test program
3. Set the Temperature to -30°C and maintain a period of one- hour soak time, with the EUT supply voltage disabled.
4. Set power supply voltage to 3.6 volts.
5. Set up CMW 500 Radio Communication Tester.
6. Command the CMW 500 to switch to the low channel.
7. Enable the voltage to the EUT, and connect a link to the CMW 500 test set.
8. EUT is commanded to Transmit 100 Bursts.
9. Software logs the following data from the CMW 500, power supply and temperature chamber: Traffic Channel Number, Traffic Channel Frequency, Power Level, Chamber Temperature, Supply Voltage, Power and Frequency Error.
10. Using a resolution bandwidth equal to that permitted within the 1MHz band immediately outside the channel edge, reference points will be selected at the unwanted emission levels which comply with the attenuation $43 + 10 \log_{10} p$, for the type of device under test, on the emission mask of the lowest and highest channels, and the frequency at these points shall be recorded as fL and fH respectively.
11. The frequency stability is calculated by fL minus the frequency offset (frequency error measured in step 9) and fH plus the frequency offset shall be within the frequency range that the equipment is designed to operate (2.5 to 2.57 GHz).
12. The CMW 500 commands the EUT to change frequency to the high channel and repeats steps 7 to 11.
13. Repeat steps 5 to 12 changing the supply voltage to 3.8 Volts
14. Increase temperature to 20 and 50°C and soak for 1/2 hour.
15. Repeat steps 4 - 14 for temperatures -30°C to 60°C .
16. Repeat steps 5 to 15 changing the supply voltage to 4.35 volts

Procedure 5 to 10 was repeated at room temperature (20°C) with the power supply voltage set to 3.6, 3.8 and 4.35 volts

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 6B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

Date of test: Sept 2, 2015.

IC RSS – 130, 4.3 LTE Band 12 Frequency Stability.

LTE Band 12 10MHz Bandwidth results: channels 23060, & 23129 @ 20°C maximum transmitted power

Traffic Channel Number	LTE Band 12 Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	fL (MHz)	fH (MHz)	fL-Freq Offset (MHz)	fH-Freq Offset (MHz)
23060	704	3.6	20	-2.489	700.585	N/A	700.585	N/A
23129	710.9	3.6	20	-3.576	N/A	713.980	N/A	713.980

Traffic Channel Number	LTE Band 12 Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	fL (MHz)	fH (MHz)	fL-Freq Offset (MHz)	fH-Freq Offset (MHz)
23060	704	3.8	20	-2.074	700.585	N/A	700.585	N/A
23129	710.9	3.8	20	2.661	N/A	714.205	N/A	714.205

Traffic Channel Number	LTE Band 12 Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	fL (MHz)	fH (MHz)	fL-Freq Offset (MHz)	fH-Freq Offset (MHz)
23060	704	4.35	20	-3.204	700.705	N/A	700.705	N/A
23129	710.9	4.35	20	-3.018	N/A	714.340	N/A	714.340

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 6B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE Band 12 10MHz Bandwidth results: channels 23060, & 23129 @ -30 and +60°C maximum transmitted power

Traffic Channel Number	LTE Band 12 Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	fL (MHz)	fH (MHz)	fL-Freq Offset (MHz)	fH-Freq Offset (MHz)
23060	704	3.6	-30	2.346	700.615	N/A	700.615	N/A
23129	710.9	3.6	-30	-2.460	N/A	711.055	N/A	711.055
23060	704	3.8	-30	2.632	700.600	N/A	700.600	N/A
23129	710.9	3.8	-30	3.390	N/A	713.710	N/A	713.710
23060	704	4.35	-30	2.918	700.600	N/A	700.600	N/A
23129	710.9	4.35	-30	-2.832	N/A	711.760	N/A	711.760
23060	704	3.6	60	-3.076	700.600	N/A	700.600	N/A
23129	710.9	3.6	60	2.317	N/A	714.340	N/A	714.340
23060	704	3.8	60	-3.004	700.600	N/A	700.600	N/A
23129	710.9	3.8	60	-2.875	N/A	714.325	N/A	714.325
23060	704	4.35	60	2.146	700.570	N/A	700.570	N/A
23129	710.9	4.35	60	-2.460	N/A	714.265	N/A	714.265

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 6B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

The following configurations were measured for model RHL211LW (STV100-3):

Date of test: April 13, 2015

**LTE Band 12 results (10MHz Bandwidth): channels 23060, 23095 and 23129 @ 20°C
maximum transmitted power**

Traffic Channel Number	LTE Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23060	704	3.6	20	-3.63	-0.0052
23095	707.5	3.6	20	-3.66	-0.0052
23129	710.9	3.6	20	-1.96	-0.0028

Traffic Channel Number	LTE Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23060	704	3.8	20	-2.83	-0.0040
23095	707.5	3.8	20	1.85	0.0026
23129	710.9	3.8	20	4.49	0.0063

Traffic Channel Number	LTE Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23060	704	4.35	20	-3.96	-0.0056
23095	707.5	4.35	20	-4.25	-0.0060
23129	710.9	4.35	20	-2.76	-0.0039

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 6B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE Band 12 Results (10MHz Bandwidth): channel 23060 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23060	704	3.6	-30	-2.98	-0.0042
23060	704	3.6	-20	3.55	0.0050
23060	704	3.6	-10	-1.93	-0.0027
23060	704	3.6	0	-2.59	-0.0037
23060	704	3.6	10	-1.79	-0.0025
23060	704	3.6	20	-3.63	-0.0052
23060	704	3.6	30	-2.20	-0.0031
23060	704	3.6	40	-2.79	-0.0040
23060	704	3.6	50	3.25	0.0046
23060	704	3.6	60	3.00	0.0043

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23060	704	3.8	-30	-2.73	-0.0039
23060	704	3.8	-20	3.46	0.0049
23060	704	3.8	-10	3.05	0.0043
23060	704	3.8	0	3.12	0.0044
23060	704	3.8	10	3.02	0.0043
23060	704	3.8	20	-2.83	-0.0040
23060	704	3.8	30	-2.37	-0.0034
23060	704	3.8	40	-3.09	-0.0044
23060	704	3.8	50	2.75	0.0039
23060	704	3.8	60	3.50	0.0050

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23060	704	4.35	-30	4.06	0.0058
23060	704	4.35	-20	3.38	0.0048
23060	704	4.35	-10	4.25	0.0060
23060	704	4.35	0	-2.39	-0.0034
23060	704	4.35	10	2.96	0.0042
23060	704	4.35	20	-3.96	-0.0056
23060	704	4.35	30	-3.38	-0.0048
23060	704	4.35	40	-3.28	-0.0047
23060	704	4.35	50	-4.08	-0.0058
23060	704	4.35	60	-3.42	-0.0049

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 6B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

**LTE Band 12 Results(5MHz Bandwidth): channel 23095 @ maximum transmitted power
(cont'd)**

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23095	707.5	3.6	-30	3.52	0.0050
23095	707.5	3.6	-20	3.36	0.0048
23095	707.5	3.6	-10	-2.56	-0.0036
23095	707.5	3.6	0	-1.92	-0.0027
23095	707.5	3.6	10	4.65	0.0066
23095	707.5	3.6	20	-3.66	-0.0052
23095	707.5	3.6	30	-3.16	-0.0045
23095	707.5	3.6	40	-1.82	-0.0026
23095	707.5	3.6	50	2.26	0.0032
23095	707.5	3.6	60	2.39	0.0034

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23095	707.5	3.8	-30	-2.90	-0.0041
23095	707.5	3.8	-20	3.99	0.0056
23095	707.5	3.8	-10	3.33	0.0047
23095	707.5	3.8	0	3.35	0.0047
23095	707.5	3.8	10	-3.50	-0.0050
23095	707.5	3.8	20	1.85	0.0026
23095	707.5	3.8	30	1.67	0.0024
23095	707.5	3.8	40	-3.23	-0.0046
23095	707.5	3.8	50	-4.76	-0.0067
23095	707.5	3.8	60	-3.92	-0.0055

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23095	707.5	4.35	-30	-3.36	-0.0048
23095	707.5	4.35	-20	-2.45	-0.0035
23095	707.5	4.35	-10	-2.47	-0.0035
23095	707.5	4.35	0	-3.79	-0.0054
23095	707.5	4.35	10	2.89	0.0041
23095	707.5	4.35	20	-4.25	-0.0060
23095	707.5	4.35	30	2.27	0.0032
23095	707.5	4.35	40	-3.69	-0.0052
23095	707.5	4.35	50	-2.85	-0.0040
23095	707.5	4.35	60	-4.55	-0.0064

This report shall NOT be reproduced except in full without the written consent of BlackBerry RTS - A division of BlackBerry Limited.

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 6B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE Band 12 Results(5MHz Bandwidth): channel 23129 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23129	710.9	3.6	-30	2.56	0.0036
23129	710.9	3.6	-20	4.18	0.0059
23129	710.9	3.6	-10	3.05	0.0043
23129	710.9	3.6	0	-3.08	-0.0043
23129	710.9	3.6	10	-2.47	-0.0035
23129	710.9	3.6	20	-1.96	-0.0028
23129	710.9	3.6	30	-2.70	-0.0038
23129	710.9	3.6	40	-2.19	-0.0031
23129	710.9	3.6	50	-2.90	-0.0041
23129	710.9	3.6	60	3.72	0.0052

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23129	710.9	3.8	-30	-3.83	-0.0054
23129	710.9	3.8	-20	3.15	0.0044
23129	710.9	3.8	-10	3.95	0.0056
23129	710.9	3.8	0	3.99	0.0056
23129	710.9	3.8	10	2.02	0.0028
23129	710.9	3.8	20	4.49	0.0063
23129	710.9	3.8	30	-2.85	-0.0040
23129	710.9	3.8	40	2.52	0.0035
23129	710.9	3.8	50	3.56	0.0050
23129	710.9	3.8	60	-3.46	-0.0049

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23129	710.9	4.35	-30	-1.82	-0.0026
23129	710.9	4.35	-20	2.17	0.0031
23129	710.9	4.35	-10	-3.00	-0.0042
23129	710.9	4.35	0	3.32	0.0047
23129	710.9	4.35	10	4.52	0.0064
23129	710.9	4.35	20	-2.76	-0.0039
23129	710.9	4.35	30	3.96	0.0056
23129	710.9	4.35	40	2.52	0.0035
23129	710.9	4.35	50	-2.13	-0.0030
23129	710.9	4.35	60	2.80	0.0039

Procedure for IC:

This report shall NOT be reproduced except in full without the written consent of BlackBerry RTS - A division of BlackBerry Limited.

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 6B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

The test system software for commencing the Frequency Stability Tests carried through the following cycle.

1. Switch on the HP 6632B power supply; CMW 500 Communications test Set, and Environmental Chamber.
2. Start test program
3. Set the Temperature to –30°C and maintain a period of one- hour soak time, with the EUT supply voltage disabled.
4. Set power supply voltage to 3.6 volts.
5. Set up CMW 500 Radio Communication Tester.
6. Command the CMW 500 to switch to the low channel.
7. Enable the voltage to the EUT, and connect a link to the CMW 500 test set.
8. EUT is commanded to Transmit 100 Bursts.
9. Software logs the following data from the CMW 500, power supply and temperature chamber: Traffic Channel Number, Traffic Channel Frequency, Power Level, Chamber Temperature, Supply Voltage, Power and Frequency Error.
10. Using a resolution bandwidth equal to that permitted within the 1MHz band immediately outside the channel edge, reference points will be selected at the unwanted emission levels which comply with the attenuation $43 + 10 \log_{10} p$, for the type of device under test, on the emission mask of the lowest and highest channels, and the frequency at these points shall be recorded as fL and fH respectively.
11. The frequency stability is calculated by fL minus the frequency offset (frequency error measured in step 9) and fH plus the frequency offset shall be within the frequency range that the equipment is designed to operate (2.5 to 2.57 GHz).
12. The CMW 500 commands the EUT to change frequency to the high channel and repeats steps 7 to 11.
13. Repeat steps 5 to 12 changing the supply voltage to 3.8 Volts
14. Increase temperature to 20 and 50°C and soak for 1/2 hour.
15. Repeat steps 4 - 14 for temperatures –30°C to 60°C.
16. Repeat steps 5 to 15 changing the supply voltage to 4.35 volts

Procedure 5 to 10 was repeated at room temperature (20°C) with the power supply voltage set to 3.6, 3.8 and 4.35 volts

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 6B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

Date of test: Sept 2, 2015.

IC RSS – 130, 4.3 LTE Band 12 Frequency Stability.

LTE Band 12 10MHz Bandwidth results: channels 23060, & 23129 @ 20°C maximum transmitted power

Traffic Channel Number	LTE Band 12 Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	fL (MHz)	fH (MHz)	fL-Freq Offset (MHz)	fH-Freq Offset (MHz)
23060	704	3.6	20	-2.160	777.690	N/A	777.690	N/A
23129	710.9	3.6	20	2.575	N/A	785.890	N/A	785.890

Traffic Channel Number	LTE Band 12 Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	fL (MHz)	fH (MHz)	fL-Freq Offset (MHz)	fH-Freq Offset (MHz)
23060	704	3.8	20	3.762	777.690	N/A	777.690	N/A
23129	710.9	3.8	20	-2.718	N/A	785.800	N/A	785.800

Traffic Channel Number	LTE Band 12 Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	fL (MHz)	fH (MHz)	fL-Freq Offset (MHz)	fH-Freq Offset (MHz)
23060	704	4.35	20	-3.161	777.525	N/A	777.525	N/A
23129	710.9	4.35	20	-2.418	N/A	785.800	N/A	785.800

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 6B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE Band 12 10MHz Bandwidth results: channels 23060, & 23129 @ -30 and +60°C maximum transmitted power

Traffic Channel Number	LTE Band 12 Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	fL (MHz)	fH (MHz)	fL-Freq Offset (MHz)	fH-Freq Offset (MHz)
23060	704	3.6	-30	-4.148	777.645	N/A	777.645	N/A
23129	710.9	3.6	-30	-2.861	N/A	783.715	N/A	783.715
23060	704	3.8	-30	-3.190	777.600	N/A	777.600	N/A
23129	710.9	3.8	-30	-2.861	N/A	782.815	N/A	782.815
23060	704	4.35	-30	-3.834	777.525	N/A	777.525	N/A
23129	710.9	4.35	-30	2.446	N/A	785.575	N/A	785.575
23060	704	3.6	60	2.789	777.615	N/A	777.615	N/A
23129	710.9	3.6	60	-3.648	N/A	786.205	N/A	786.205
23060	704	3.8	60	-4.134	777.555	N/A	777.555	N/A
23129	710.9	3.8	60	-2.761	N/A	786.220	N/A	786.220
23060	704	4.35	60	2.732	777.525	N/A	777.525	N/A
23129	710.9	4.35	60	-3.490	N/A	786.160	N/A	786.160

APPENDIX 6C – LTE Band 12 RADIATED EMISSIONS TEST DATA

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 6C		
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW	

Radiated Power Test Data Results

The following configurations were measured for model RHL211LW (STV100-3):

The following measurements were performed by Shiva Kumbham.

Date of Test: August 11, 2015

The environmental tests conditions were: Temperature: 25.5 °C

Relative Humidity: 35.6 %

The BlackBerry® smartphone was standalone, with horizontal top pointing up the RX antenna when the turntable is at 0 degree position.

Measurements were performed with QPSK and 16QAM modulations. The smallest test margins are reported below.

Test Distance was 3.0 meters with the RX antenna height scans between 3-4 meters height.

LTE Band 12, 5MHz BW, RB=1, QPSK modulation

EUT				Rx Antenna		Spectrum Analyzer		Substitution Method Tracking Generator					
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBm)	Max (V,H) (dBm)	Pol. Tx-Rx	Reading (dBm)	Corrected Reading (relative to Dipole)		Limit (dBm)	Diff. To Limit (dB)
F0	23035	701.50	12	Dipole	V	-45.71	-30.66	V-V	1.94	20.23	0.11	35.00	14.77
F0	23035	701.50	12	Dipole	H	-30.66		H-H	-0.54				
F0	23095	707.50	12	Dipole	V	-45.24	-29.38	V-V	3.16	21.48	0.14	35.00	13.52
F0	23095	707.50	12	Dipole	H	-29.38		H-H	0.60				
F0	23154	713.40	12	Dipole	V	-45.39	-29.22	V-V	3.91	22.17	0.16	35.00	12.83
F0	23154	713.40	12	Dipole	H	-29.22		H-H	0.97				

LTE Band 12, 5MHz BW, RB=1, 16QAM modulation

EUT				Rx Antenna		Spectrum Analyzer		Substitution Method Tracking Generator					
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBm)	Max (V,H) (dBm)	Pol. Tx-Rx	Reading (dBm)	Corrected Reading (relative to Dipole)		Limit (dBm)	Diff. To Limit (dB)
F0	23060	704.00	12	Dipole	V	-45.99	-30.80	V-V	1.56	19.85	0.10	35.00	15.15
F0	23060	704.00	12	Dipole	H	-30.80		H-H	-0.80				
F0	23095	707.50	12	Dipole	V	-45.53	-30.25	V-V	2.23	20.55	0.11	35.00	14.45
F0	23095	707.50	12	Dipole	H	-30.25		H-H	-0.28				
F0	23129	710.90	12	Dipole	V	-45.86	-30.06	V-V	2.88	21.14	0.13	35.00	13.86

This report shall NOT be reproduced except in full without the written consent of BlackBerry RTS - A division of BlackBerry Limited.

Copyright 2005-2015

Page 332 of 537

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 6C	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

F0	23129	710.90	12	Dipole	H	-30.06		H-H	0.01				
----	-------	--------	----	--------	---	--------	--	-----	------	--	--	--	--

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 6C		
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW	

Radiated Power Test Data Results

The following configurations were measured for model RHK211LW (STV100-1):

The following measurements were performed by Shiva Kumbham.

Date of Test: August 13, 2015

The environmental tests conditions were: Temperature: 25.5 °C

Relative Humidity: 35.6 %

The BlackBerry® smartphone was standalone, with horizontal top pointing up the RX antenna when the turntable is at 0 degree position.

Measurements were performed with QPSK and 16QAM modulations. The smallest test margins are reported below.

Test Distance was 3.0 meters with the RX antenna height scans between 3-4 meters height.

LTE Band 12, 5MHz BW, RB=1, QPSK modulation

EUT				Rx Antenna		Spectrum Analyzer		Substitution Method Tracking Generator					
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBm)	Max (V,H) (dBm)	Pol. Tx-Rx	Reading (dBm)	Corrected Reading (relative to Dipole)		Limit (dBm)	Diff. To Limit (dB)
F0	23035	701.50	12	Dipole	V	-41.44	-30.02	V-V	2.61	20.90	0.12	35.00	14.10
F0	23035	701.50	12	Dipole	H	-30.02		H-H	0.14				
F0	23095	707.50	12	Dipole	V	-40.69	-29.81	V-V	2.71	21.03	0.13	35.00	13.97
F0	23095	707.50	12	Dipole	H	-29.81		H-H	0.21				
F0	23154	713.40	12	Dipole	V	-41.20	-29.84	V-V	3.28	21.54	0.14	35.00	13.46
F0	23154	713.40	12	Dipole	H	-29.84		H-H	0.31				

LTE Band 12, 5MHz BW, RB=1, 16QAM modulation

EUT				Rx Antenna		Spectrum Analyzer		Substitution Method Tracking Generator					
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBm)	Max (V,H) (dBm)	Pol. Tx-Rx	Reading (dBm)	Corrected Reading (relative to Dipole)		Limit (dBm)	Diff. To Limit (dB)
F0	23060	704.00	12	Dipole	V	-41.89	-30.67	V-V	1.76	20.05	0.10	35.00	14.95
F0	23060	704.00	12	Dipole	H	-30.67		H-H	-0.73				
F0	23095	707.50	12	Dipole	V	-41.66	-30.56	V-V	1.93	20.25	0.11	35.00	14.75
F0	23095	707.50	12	Dipole	H	-30.56		H-H	-0.61				
F0	23129	710.90	12	Dipole	V	-41.76	-31.26	V-V	1.64	19.90	0.10	35.00	15.10

This report shall NOT be reproduced except in full without the written consent of BlackBerry RTS - A division of BlackBerry Limited.

Copyright 2005-2015

Page 335 of 537

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 6C	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

F0	23129	710.90	12	Dipole	H	-31.26		H-H	-1.20			
----	-------	--------	----	--------	---	--------	--	-----	-------	--	--	--

Radiated Emissions Test Data Results cont'd

The following measurements were performed by Savtej Sandhu.

Date of Test: August 12, 2015

The environmental test conditions were:

Temperature:	26.8 °C
Relative Humidity:	33.2 %

The BlackBerry® smartphone was standalone, with horizontal pointing up and top facing the RX antenna when the turntable is at 0 degree position.

Test Distance was 3.0 meters with the RX antenna height scans between 3-4 meters height, and the frequency range scanned was 30MHz – 1GHz.

Measurements were performed in LTE Band 12 with 5MHz BW (channel 23060, 23095 and 23129 with RB = 1) with QPSK modulation. and 10MHz BW (channel 23060, 23095 and 23129 with RB = 1), with 16-QAM modulation.

All emissions had test margins greater than 25.0 dB.

The following measurements were performed by Xing Fang and Winston Vernon.

Date of Test: August 13, 2015

The environmental test conditions were:

Temperature:	27.9 °C
Relative Humidity:	39.7 %

Test Distance was 3.0 meters with the RX antenna height scans between 3-4 meters height, and a frequency range of 1 GHz to 10 GHz.

The BlackBerry® smartphone was standalone, horizontal with top facing to the RX antenna when the turntable is at 0 degree position

Measurements were performed in LTE Band 12 with 5MHz BW (channel 23060, 23095 and 23129 with RB = 1) with QPSK modulation. and 10MHz BW (channel 23060, 23095 and 23129 with RB = 1), with 16-QAM modulation.

All emissions had test margins greater than 25.0 dB.


APPENDIX 7A– LTE Band 17 CONDUCTED RF EMISSIONS TEST DATA/PLOTS

BlackBerry	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7A	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE Band 17 Conducted RF Emission Test Data

This appendix contains measurement data pertaining to conducted spurious emissions, 99% power bandwidth and the channel mask.

Test Setup Diagram

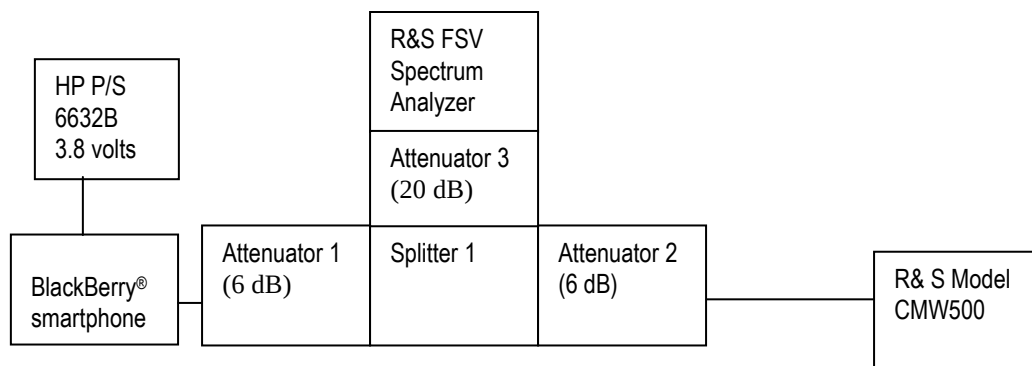

A reference offset of 31.4 dB was applied to the spectrum analyzer reference level for the attenuators and coaxial cable loss in the test circuit.

<u>UNIT</u>	<u>MANUFACTURER</u>	<u>MODEL</u>	<u>SERIAL NUMBER</u>
Attenuator 1	Mini-Circuits	BW-S6W2+	0647
Attenuator 2	Mini-Circuits	BW-S6W2+	0648
Attenuator 3	Mini-Circuits	BW-S20-2W263+	1234
Splitter 1	Weinschel	1515	MES 92

The following configurations were measured for model RHK211LW (STV100-1):

Date of Test: July 27 to September 3, 2015.

The environmental test conditions were: Temperature: 21.9 – 24.3°C
 Relative Humidity: 38.7 – 61.60%

The following measurements were performed by Sijia Li and Landon Martin.

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7A	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE Band 17 Conducted RF Emission Test Data cont'd

Emission Designator Table

Frequency Range (MHz)	Conducted Output Power (dBm)	Emission Designator	Band	Bandwidth (MHz)	Modulation
706.5-713.5	22.69	4M49G7D	LTE B17	5	QPSK
706.5-713.5	21.79	4M48D7W	LTE B17	5	16QAM
709-711	22.78	8M97G7D	LTE B17	10	QPSK
709-711	22.56	8M99D7W	LTE B17	10	16QAM

The conducted spurious emissions – As per 47 CFR 2.202, 2.1046, 27.53, 27.54, 27.50, RSS-139 were measured from 30 MHz to 20 GHz.

–26 dBc Bandwidth and Occupied Bandwidth (99%)

the modulation spectrum was measured by both methods of 99% power bandwidth and –26 dBc bandwidth for each 5MHz and 10MHz with Resource Block allocations 50 and 25 for LTE band 17.

QPSK and 16-QAM modulations were applied to each of the bandwidths. Only the worst case measurements are documented in this report.

The resolution bandwidth required for out-of-band emissions in the 1 MHz bands immediately outside and adjacent to the frequency block, was determined to be at least 1% of the emission bandwidth.

The worst case –26dBc bandwidth for LTE band 17 was measured to be 9.26MHz. Results were derived in a 100 kHz resolution bandwidth.

On any frequency outside the frequency block and outside the adjacent 1 MHz bands, a resolution bandwidth of at least 1 MHz was applied.

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7A	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

Test Data for LTE Band 17 selected Frequencies in 10MHz BW (RB = 50)

LTE Band 17 Frequency (MHz)	26dBc Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	
	QPSK	QPSK	16-QAM
709.0	9.2	8.966	8.966
710.0	9.2	8.966	8.966
711.0	9.26	8.966	8.990

Test Data for LTE Band 17 selected Frequencies in 5MHz BW (RB = 25)

LTE Band 17 Frequency (MHz)	99% Occupied Bandwidth (MHz)	
	QPSK	16-QAM
706.5	4.495	4.483
710	4.483	4.483
713.5	4.495	4.483

Peak to Average Ratio (PAR)

For each 5MHz and 10MHz with Resource Block allocations 50,25 and 15 as per scalable bandwidths for LTE band 17, the peak to average ratio was measured on the low, middle and high channels with QPSK modulation.

On any frequency outside the frequency block and outside the adjacent 1 MHz bands, a resolution bandwidth of at least 1 MHz was applied.

The worst case measured was 8.05 dB on in 10MHz bandwidth with Resource Block allocation 25.

Measurement Plots for LTE Band 17

See Figures 7-1a to 7-12a for the plots of the conducted spurious emissions.

See Figures 7-19a to 7-24a and 7-37a to 7-39a for the plots of 99% Occupied Bandwidth and -26 dBc Bandwidth.


See Figures 7-25a to 7-32a for the plots of the Channel mask.

See Figures 7-33a to 7-36a for the plots of the Peak to Average Ratio.

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 17 Conducted RF Emission Test Data cont'd

Figure 6-1a: Band 17, Spurious Conducted Emissions, Low channel, 10MHz BW (RB= 1)

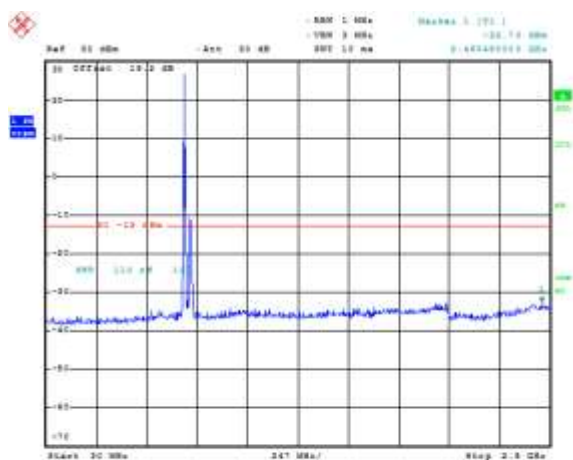


Date: 27-JUL-2015 05:14:29

Figure 6-2a: Band 17, Spurious Conducted Emissions, Low channel, 10MHz BW (RB= 1)

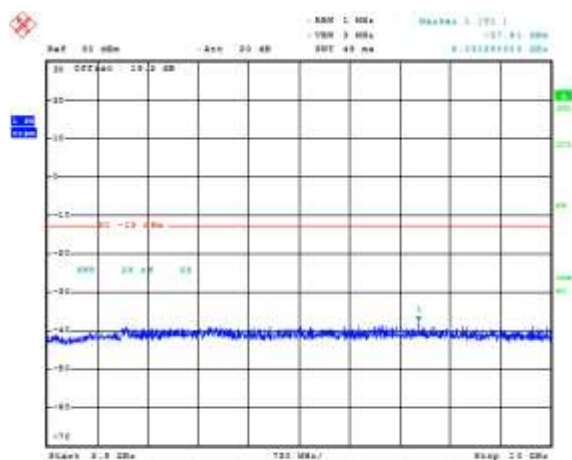


Date: 27-JUL-2015 05:14:42

Figure 6-3a: Band 17, Spurious Conducted Emissions, Middle channel, 10MHz BW (RB= 25)

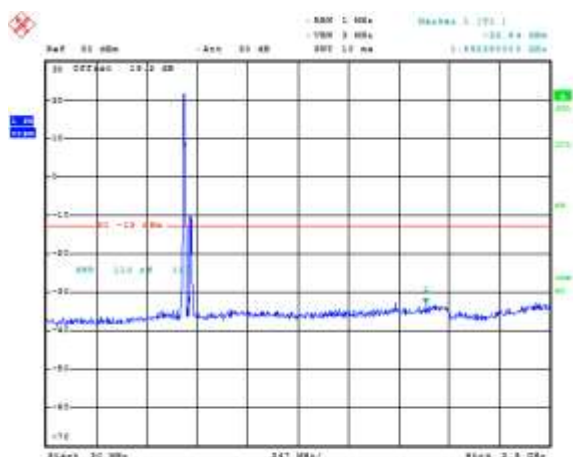

Date: 27-JUL-2015 05:15:46

Figure 6-4a: Band 17, Spurious Conducted Emissions, Middle channel, 10MHz BW (RB= 25)

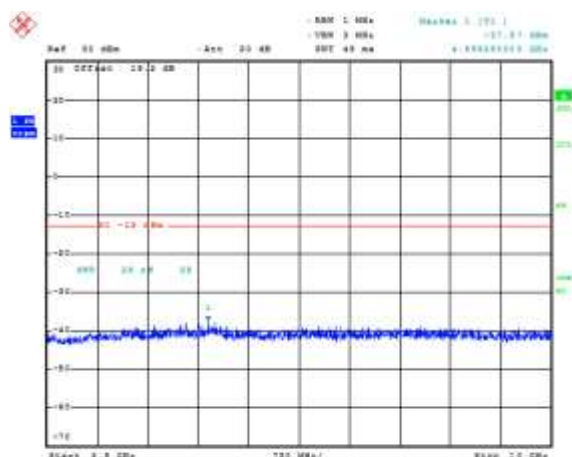

Date: 27-JUL-2015 05:16:00

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE Band 17 Conducted RF Emission Test Data cont'd

Figure 6-5a: Band 17, Spurious Conducted Emissions, High Channel, 10MHz BW (RB= 50)

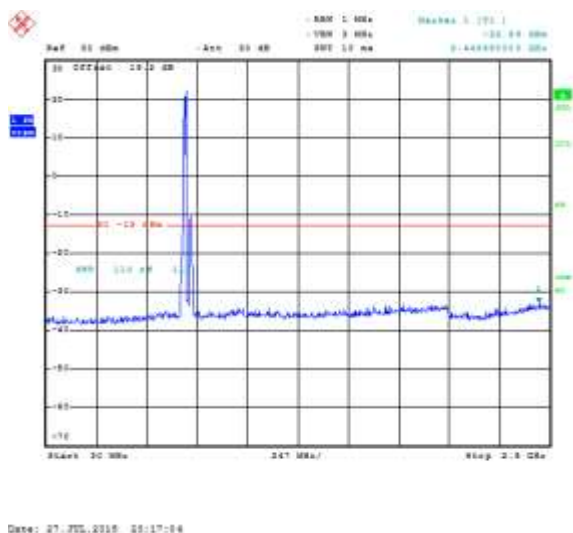


Figure 6-6a: Band 17, Spurious Conducted Emissions, High Channel, 10MHz BW (RB= 50)

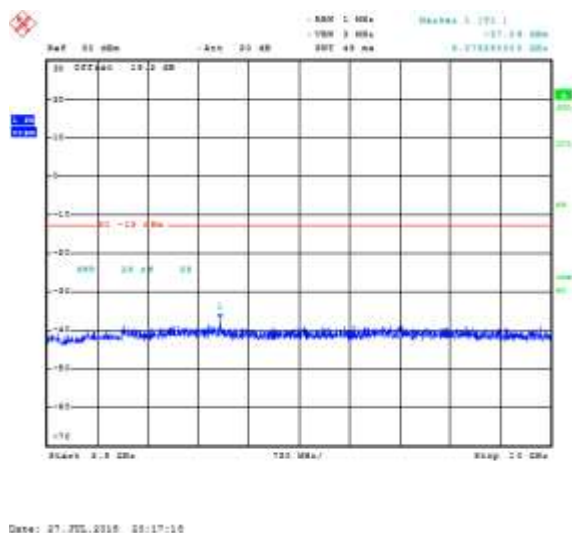


Figure 6-7a: Band 17, Spurious Conducted Emissions, Low channel, 5MHz BW (RB= 1)


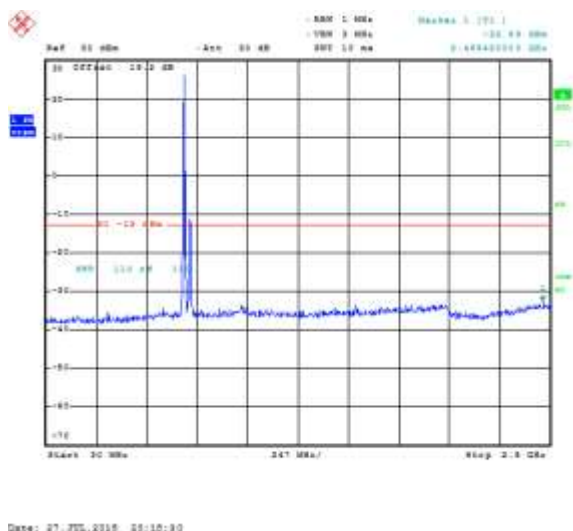


Figure 6-8a: Band 17, Spurious Conducted Emissions, Low channel, 5MHz BW (RB= 1)

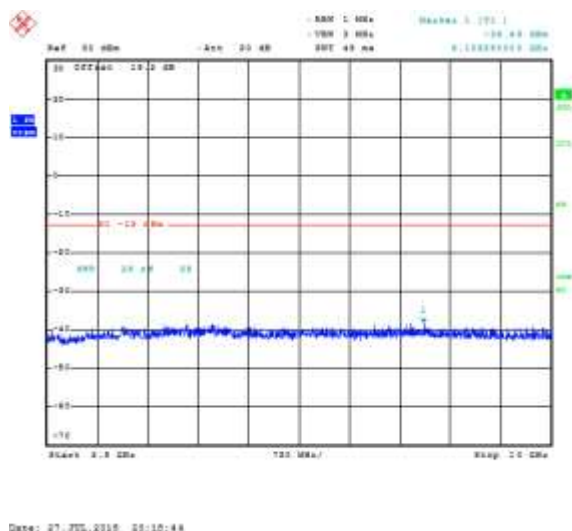

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE Band 17 Conducted RF Emission Test Data cont'd

Figure 6-9a: Band 17, Spurious Conducted Emissions, Middle Channel, 5MHz BW (RB= 15)

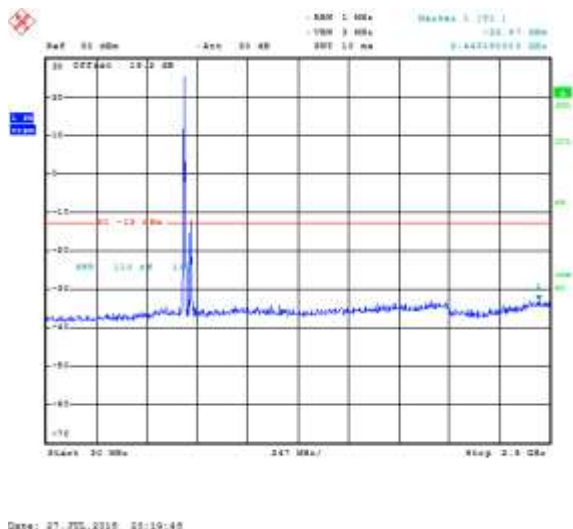


Figure 6-10a: Band 17, Spurious Conducted Emissions, High Channel, 5MHz BW (RB= 15)

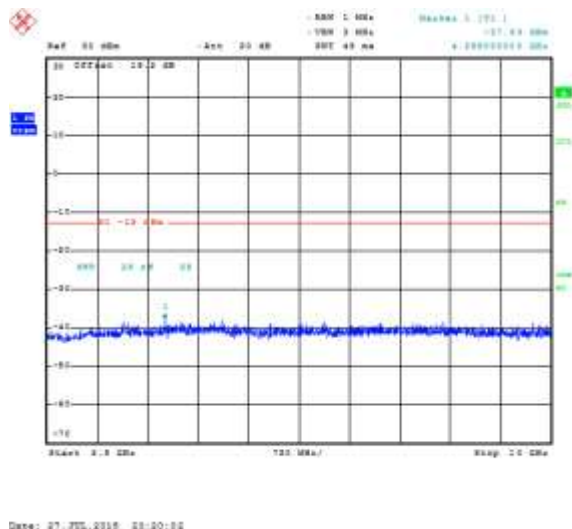


Figure 6-11a: Band 17, Spurious Conducted Emissions, High channel, 5MHz BW (RB= 25)


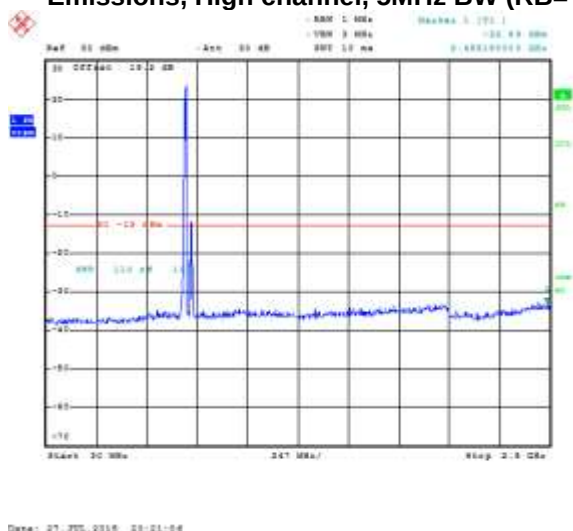



Figure 6-12a: Band 17, Spurious Conducted Emissions, High channel, 5MHz BW (RB= 25)

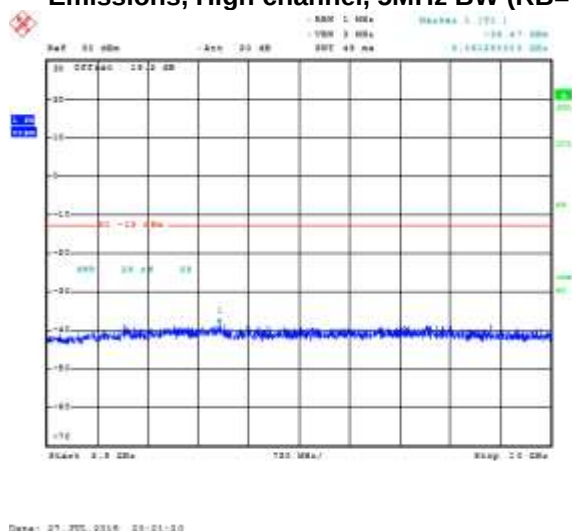

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 17 Conducted RF Emission Test Data cont'd

Figure 6-13a: Occupied Bandwidth, Band 17 Low Channel, 10MHz BW, RB=50

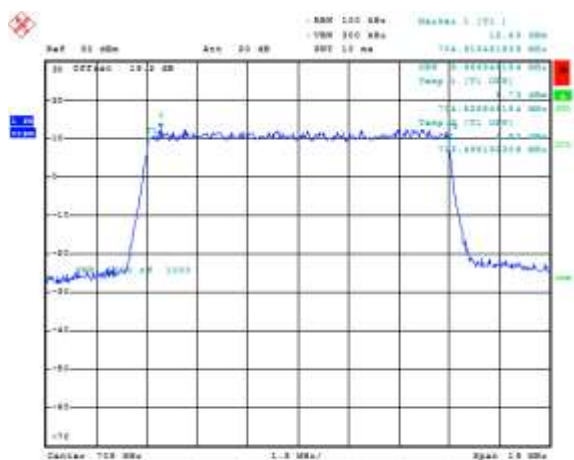


Date: 27.JUL.2015 18:02:16

Figure 6-14a: Occupied Bandwidth, Band 17 Middle Channel, 10MHz BW, RB=50

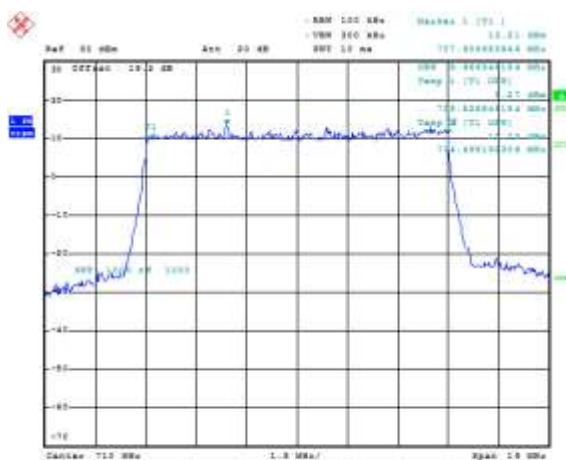

Date: 27.JUL.2015 18:09:06

Figure 6-15a: Occupied Bandwidth, Band 17 High Channel, 10MHz BW, RB=50

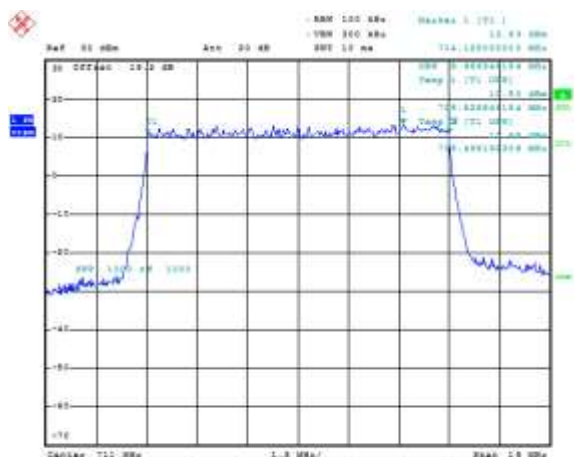


Date: 27.JUL.2015 18:09:41

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 17 Conducted RF Emission Test Data cont'd

Figure 6-16a: Occupied Bandwidth, Band 5 Low Channel, 5MHz BW, RB=50

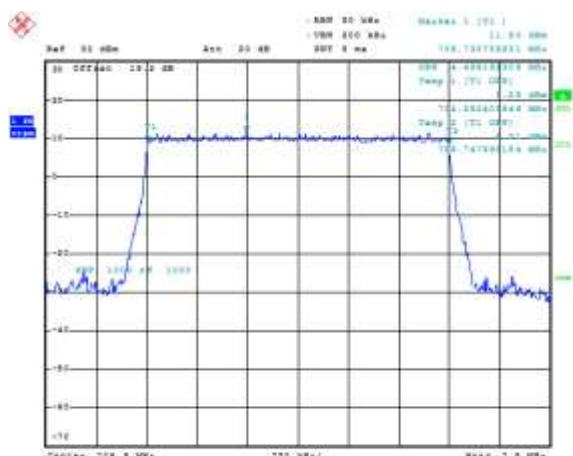


Date: 27.JUL.2015 18:06:22

Figure 6-17a: Occupied Bandwidth, Band 5 Middle Channel, 5MHz BW, RB=50

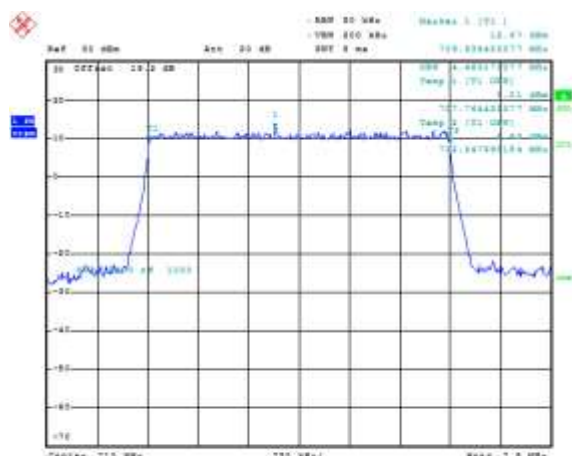

Date: 27.JUL.2015 18:07:21

Figure 6-18a: Occupied Bandwidth, Band 5 High Channel, 5MHz BW, RB=50

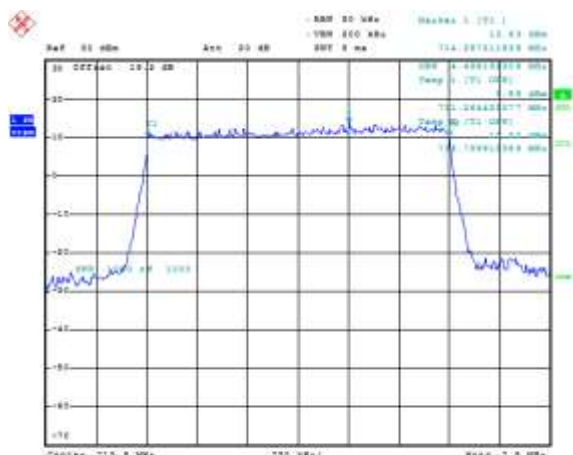


Date: 27.JUL.2015 18:07:48

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 17 Conducted RF Emission Test Data cont'd

Figure 6-19a: -26 dBc Bandwidth, Band 17 Low Channel, 10MHz BW, RB=50

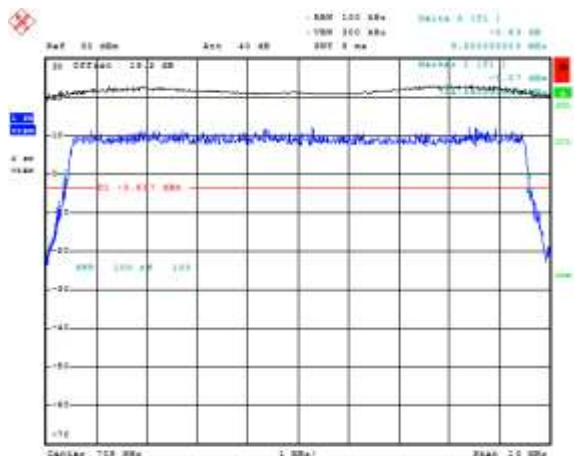


Date: 27-JUL-2015 15:18:57

Figure 6-20a: -26 dBc Bandwidth, Band 17 Middle Channel, 10MHz BW, RB=50

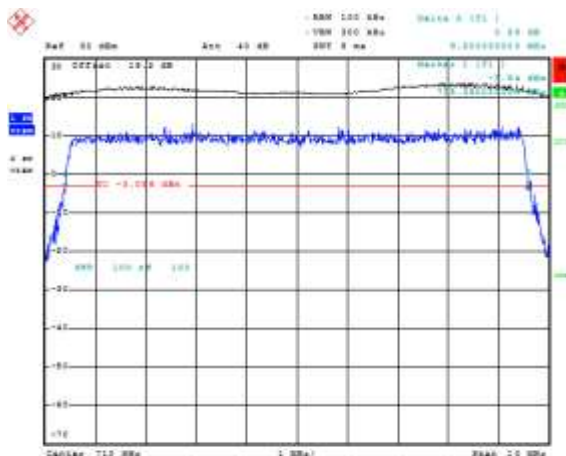


Date: 27-JUL-2015 15:19:11

Figure 6-21a: -26 dBc Bandwidth, Band 17 High Channel, 10MHz BW, RB=50

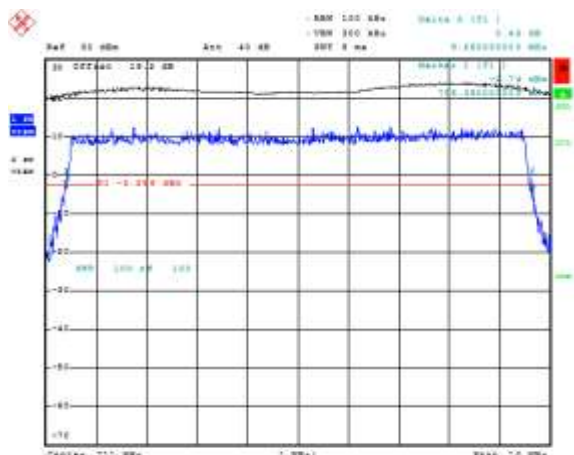

Date: 27-JUL-2015 15:19:16

Figure 6-22a: -26 dBc Bandwidth, Band 17 Low Channel, 5MHz BW, RB=25

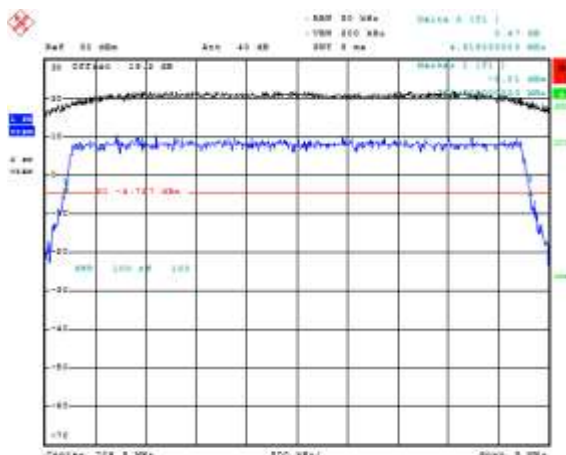


Date: 27-JUL-2015 15:19:49

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 17 Conducted RF Emission Test Data cont'd

Figure 6-23a: -26 dBc Bandwidth, Band 17 Middle Channel, 5MHz BW, RB=25

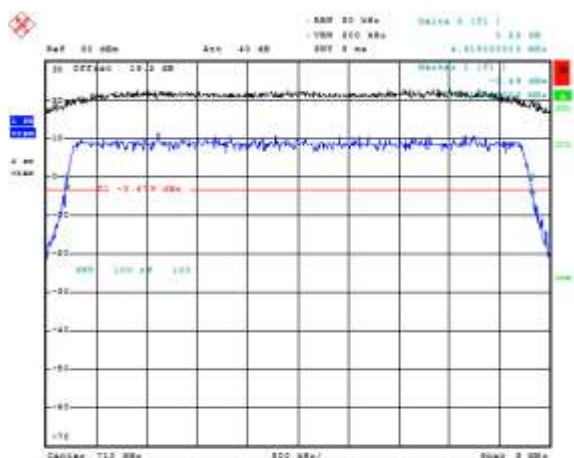


Date: 27.JUL.2015 18:50:58

Figure 6-24a: -26 dBc Bandwidth, Band 17 High Channel, 5MHz BW, RB=25

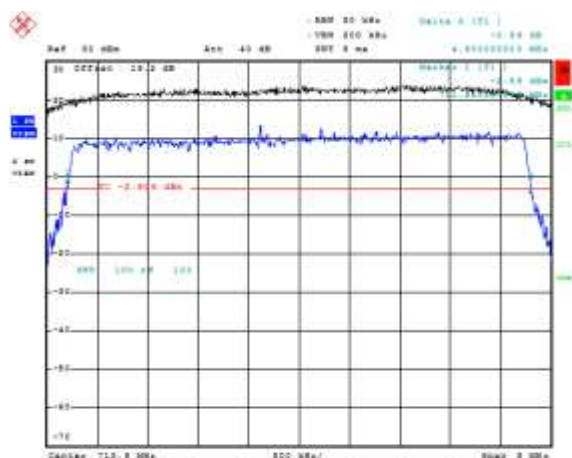


Date: 27.JUL.2015 18:50:58

Figure 6-25a: Band 17 Low Channel Mask, 10MHz BW, RB=50

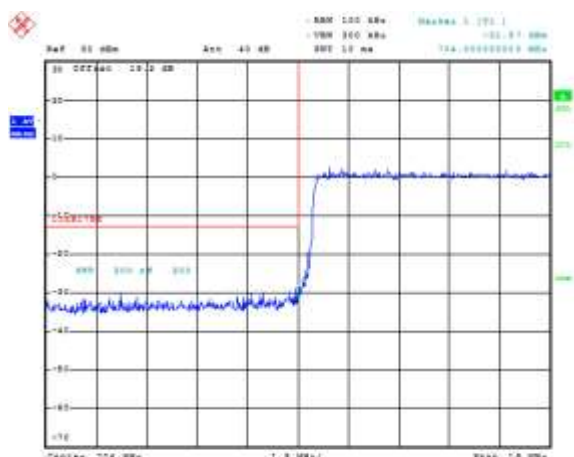

Date: 26.JUL.2015 08:12:06

Figure 6-26a: Band 17 High Channel Mask, 10MHz BW, RB=50

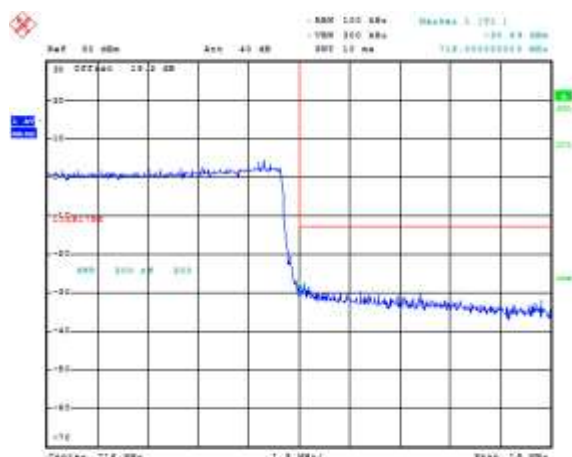


Date: 26.JUL.2015 08:10:31

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 17 Conducted RF Emission Test Data cont'd

**Figure 6-27a: Band 17 Low Channel Mask, 10MHz
BW, RB=1**

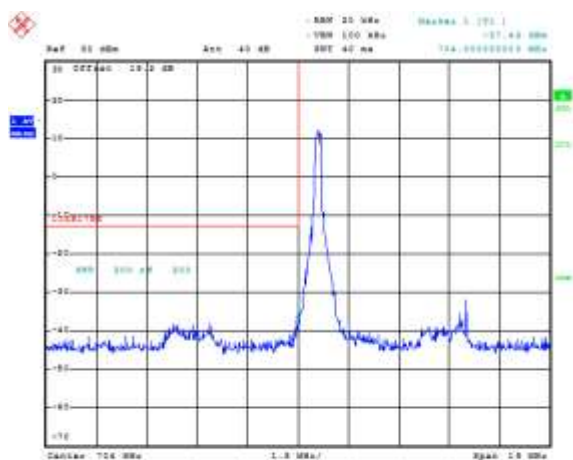


Date: 29-Jul-2015 05:12:40

**Figure 6-28a: Band 17 High Channel Mask, 10MHz
BW, RB=1**

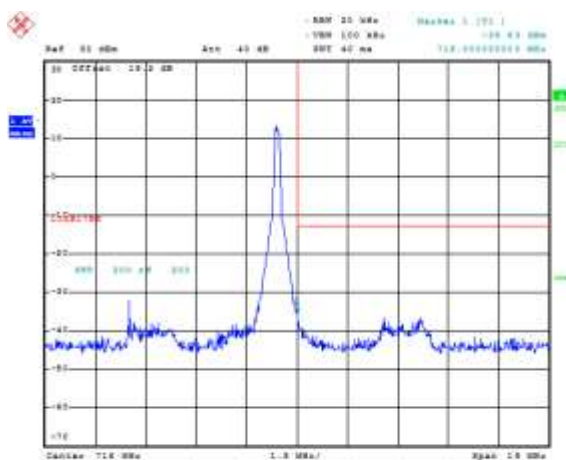


Date: 29-Jul-2015 05:10:11

**Figure 6-29a: Band 17 Low Channel Mask, 5MHz
BW, RB=25**

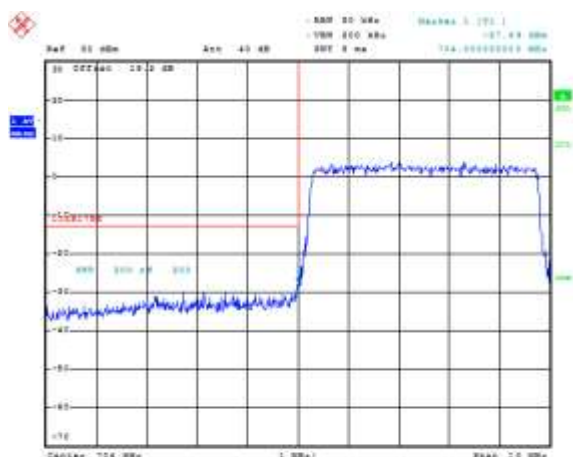

Date: 29-Jul-2015 05:14:08

**Figure 6-30a: Band 17 High Channel Mask, 5MHz
BW, RB=25**

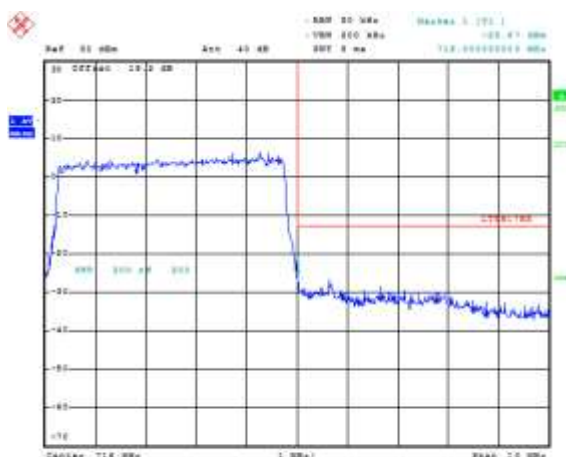


Date: 29-Jul-2015 05:14:08

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 17 Conducted RF Emission Test Data cont'd

**Figure 6-31a: Band 17 Low Channel Mask, 5MHz
BW, RB=1**

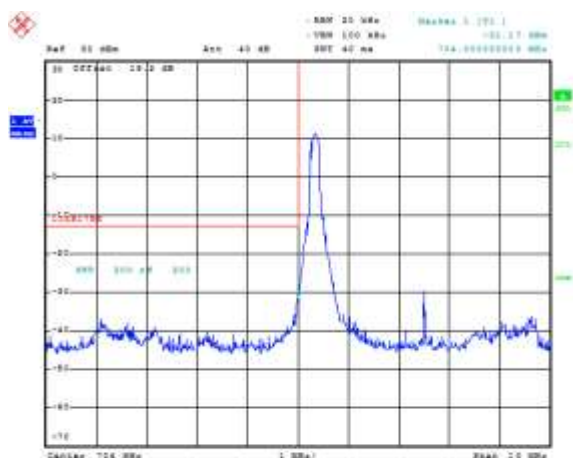


Date: 29-JUL-2015 05:10:20

**Figure 6-32a: Band 17 High Channel Mask, 5MHz
BW, RB=1**

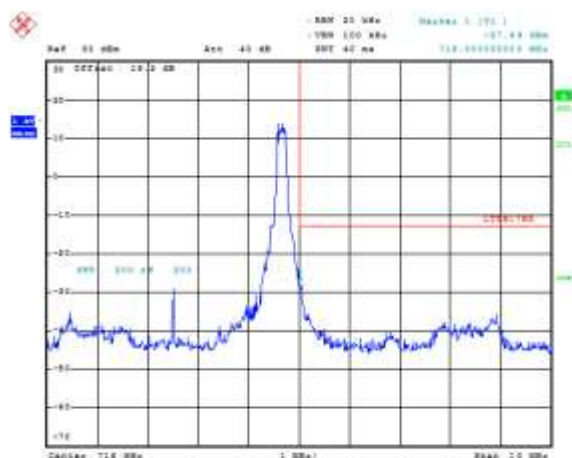


Date: 29-JUL-2015 05:14:29

**Figure 6-33a: Band 17 Mid Channel PAR, 10MHz
BW, RB=25**

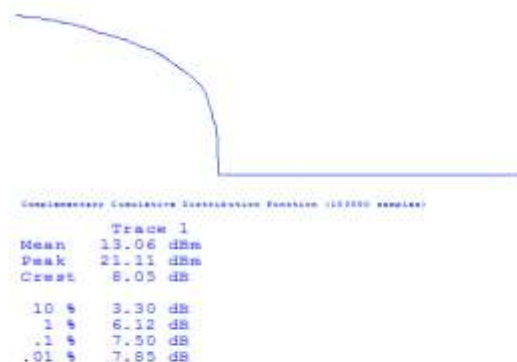

Date: 8-SEP-2015 04:46:22

**Figure 6-34a: Band 17 Middle Channel PAR, 10MHz
BW, RB=50**

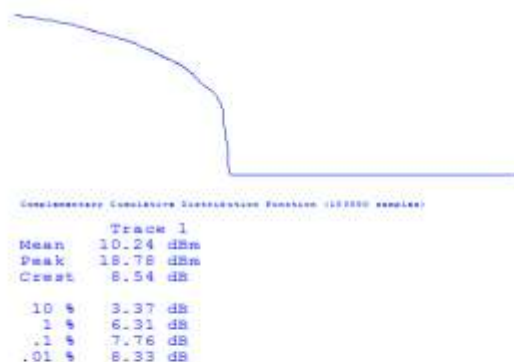


Date: 8-SEP-2015 04:46:24

BlackBerry	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7A	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 17 Conducted RF Emission Test Data cont'd

**Figure 6-35a: Band 17 Mid Channel PAR, 5MHz
BW, RB=15**

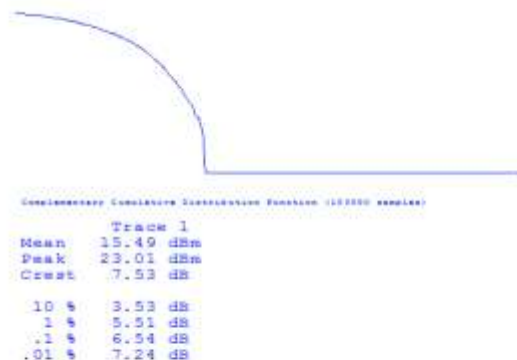

Date: 8-SEP-2015 06:46:54

**Figure 6-36a: Band 17 Mid Channel PAR, 5MHz
BW, RB=25**

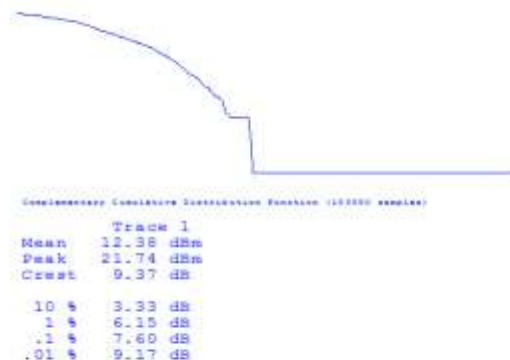

Date: 8-SEP-2015 06:47:06

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE Band 17 Conducted RF Emission Test Data cont'd

Figure 6-37a: Occupied Bandwidth, Band 17 Low Channel, 10MHz BW (RB= 50) 16-QAM

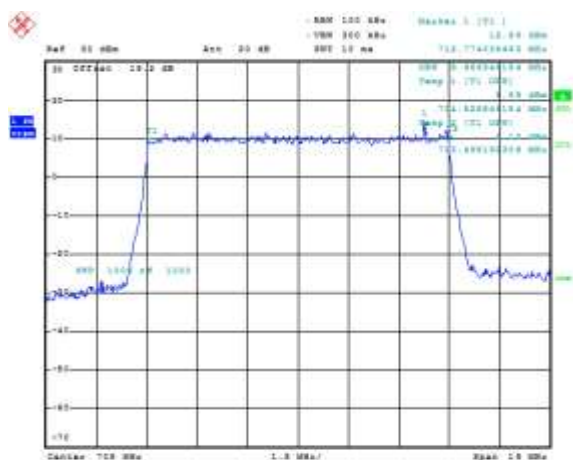


Figure 6-38a: Occupied Bandwidth, Band 17 Mid Channel, 10MHz BW (RB= 50) 16-QAM


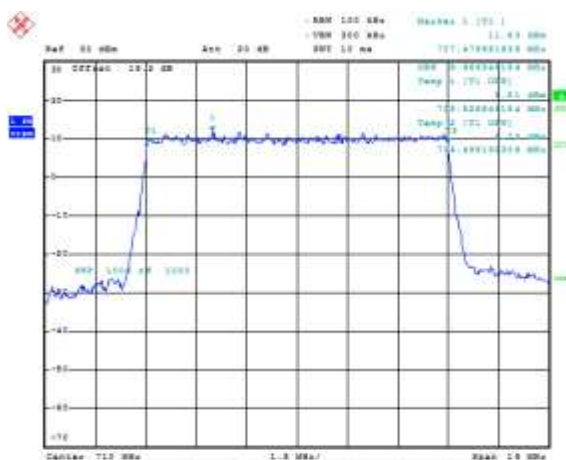


Figure 6-39a: Occupied Bandwidth, Band 17 High Channel, 10MHz BW (RB= 50) 16-QAM

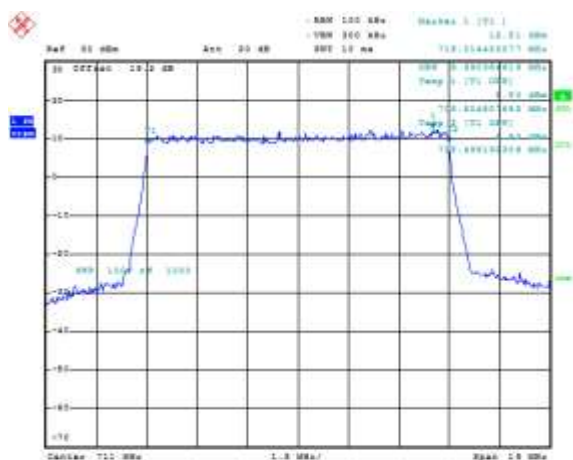


BlackBerry	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7A	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE Band 17 Conducted RF Emission Test Data

This appendix contains measurement data pertaining to conducted spurious emissions, 99% power bandwidth and the channel mask.

Test Setup Diagram

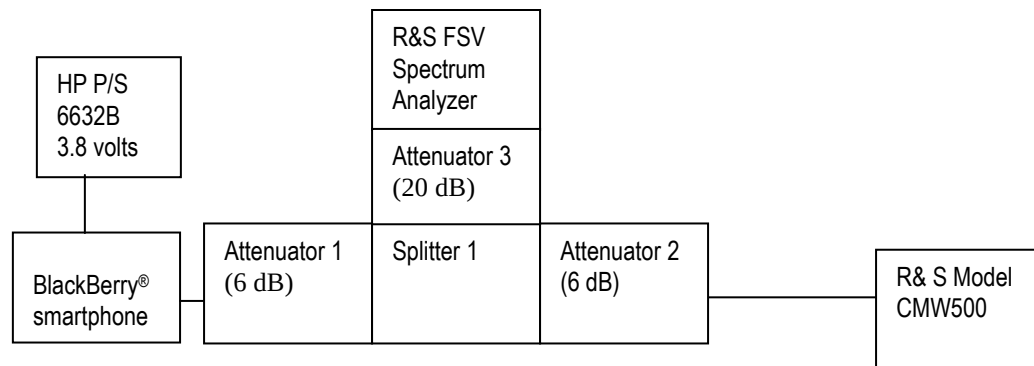

A reference offset of 31.4 dB was applied to the spectrum analyzer reference level for the attenuators and coaxial cable loss in the test circuit.

<u>UNIT</u>	<u>MANUFACTURER</u>	<u>MODEL</u>	<u>SERIAL NUMBER</u>
Attenuator 1	Mini-Circuits	BW-S6W2+	0647
Attenuator 2	Mini-Circuits	BW-S6W2+	0648
Attenuator 3	Mini-Circuits	BW-S20-2W263+	1234
Splitter 1	Weinschel	1515	MES 92

The following configurations were measured for model RHL211LW:

Date of Test: July 27 to September 3, 2015.

The environmental test conditions were: Temperature: 21.9 – 24.3°C
Relative Humidity: 38.7 – 61.60%

The following measurements were performed by Sijia Li and Landon Martin.

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7A	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE Band 17 Conducted RF Emission Test Data cont'd

Emission Designator Table

Frequency Range (MHz)	Conducted Output Power (dBm)	Emission Designator	Band	Bandwidth (MHz)	Modulation
706.5-713.5	23.36	4M50G7D	LTE B17	5	QPSK
706.5-713.5	22.55	4M48D7W	LTE B17	5	16QAM
709-711	23.33	8M97G7D	LTE B17	10	QPSK
709-711	22.73	8M99D7W	LTE B17	10	16QAM

The conducted spurious emissions – As per 47 CFR 2.202, 2.1046, 27.53, 27.54, 27.50, RSS-139 were measured from 30 MHz to 20 GHz.

–26 dBc Bandwidth and Occupied Bandwidth (99%)

the modulation spectrum was measured by both methods of 99% power bandwidth and –26 dBc bandwidth for each 5MHz and 10MHz with Resource Block allocations 50 and 25 for LTE band 17.

QPSK and 16-QAM modulations were applied to each of the bandwidths. Only the worst case measurements are documented in this report.

The resolution bandwidth required for out-of-band emissions in the 1 MHz bands immediately outside and adjacent to the frequency block, was determined to be at least 1% of the emission bandwidth.

The worst case –26dBc bandwidth for LTE band 17 was measured to be 9.22MHz. Results were derived in a 100 kHz resolution bandwidth.

On any frequency outside the frequency block and outside the adjacent 1 MHz bands, a resolution bandwidth of at least 1 MHz was applied.

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7A	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

Test Data for LTE Band 17 selected Frequencies in 10MHz BW (RB = 50)

LTE Band 17 Frequency (MHz)	26dBc Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	
	QPSK	QPSK	16-QAM
709.0	9.19	8.966	8.966
710.0	9.21	8.966	8.990
711.0	9.22	8.966	8.966

Peak to Average Ratio (PAR)

For each 5MHz and 10MHz with Resource Block allocations 50,25 and 15 as per scalable bandwidths for LTE band 17, the peak to average ratio was measured on the low, middle and high channels with QPSK modulation.

On any frequency outside the frequency block and outside the adjacent 1 MHz bands, a resolution bandwidth of at least 1 MHz was applied.

The worst case measured was 8.05 dB on in 10MHz bandwidth with Resource Block allocation 25.

Measurement Plots for LTE Band 17

See Figures 7-1a to 7-12a for the plots of the conducted spurious emissions.

See Figures 7-19a to 7-24a and 7-37a to 7-39a for the plots of 99% Occupied Bandwidth and -26 dBc Bandwidth.


See Figures 7-25a to 7-32a for the plots of the Channel mask.

See Figures 7-33a to 7-36a for the plots of the Peak to Average Ratio.

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 17 Conducted RF Emission Test Data cont'd

Figure 7-1a: Band 17, Spurious Conducted Emissions, Low channel, 10MHz BW (RB= 1)

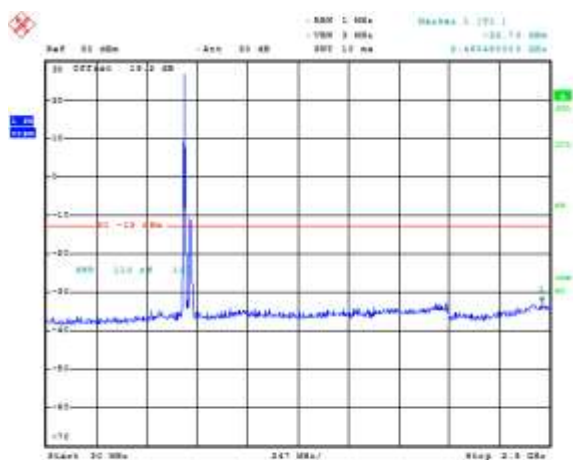


Date: 27-Jul-2015 05:14:29

Figure 7-2a: Band 17, Spurious Conducted Emissions, Low channel, 10MHz BW (RB= 1)

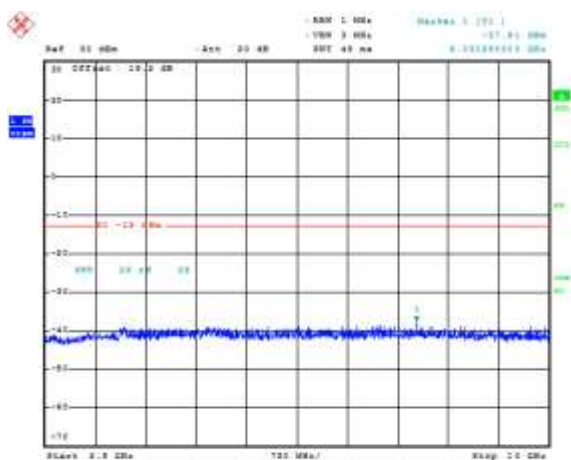


Date: 27-Jul-2015 05:14:42

Figure 7-3a: Band 17, Spurious Conducted Emissions, Middle channel, 10MHz BW (RB= 25)

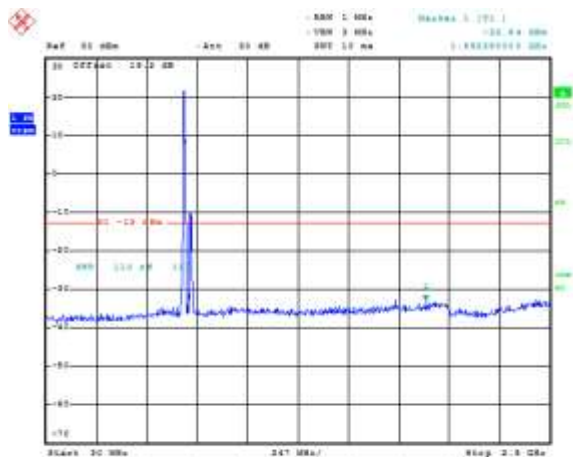

Date: 27-Jul-2015 05:15:46

Figure 7-4a: Band 17, Spurious Conducted Emissions, Middle channel, 10MHz BW (RB= 25)

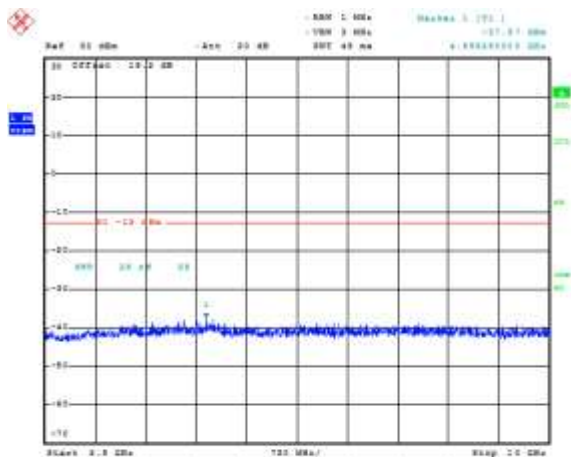

Date: 27-Jul-2015 05:16:00

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE Band 17 Conducted RF Emission Test Data cont'd

Figure 6-5a: Band 17, Spurious Conducted Emissions, High Channel, 10MHz BW (RB= 50)

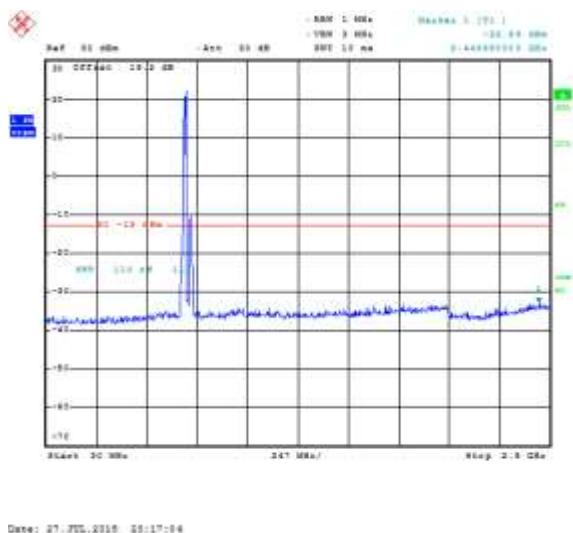


Figure 6-6a: Band 17, Spurious Conducted Emissions, High Channel, 10MHz BW (RB= 50)

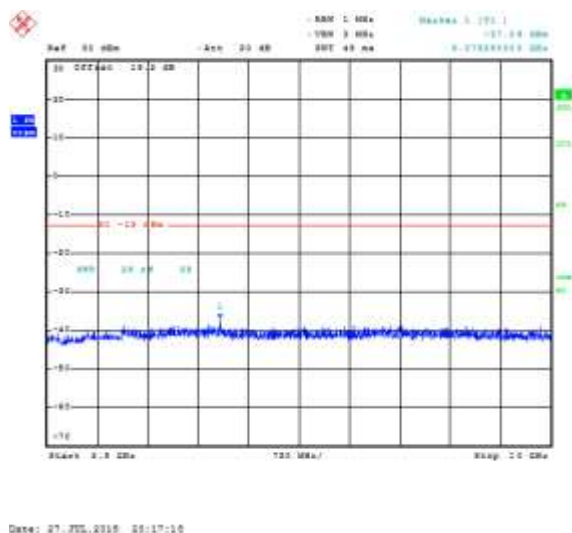


Figure 6-7a: Band 17, Spurious Conducted Emissions, Low channel, 5MHz BW (RB= 1)


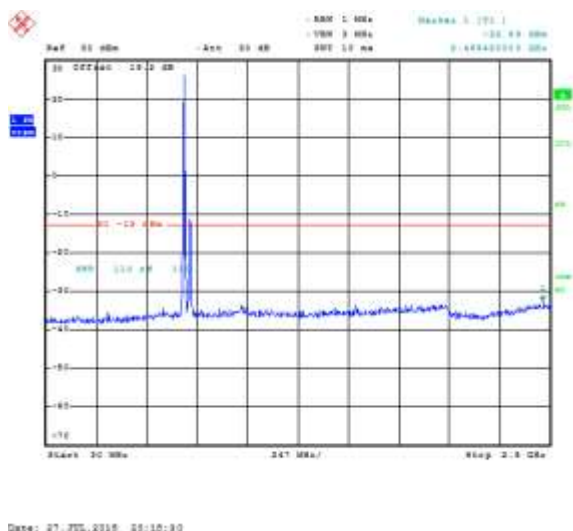



Figure 6-8a: Band 17, Spurious Conducted Emissions, Low channel, 5MHz BW (RB= 1)

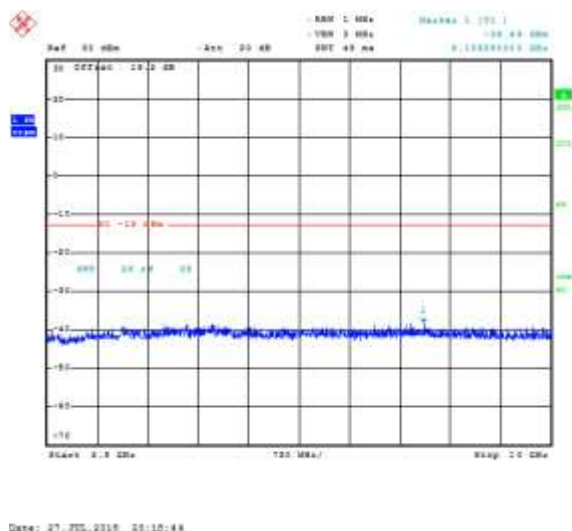

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 17 Conducted RF Emission Test Data cont'd

Figure 6-9a: Band 17, Spurious Conducted Emissions, Middle Channel, 5MHz BW (RB= 15)

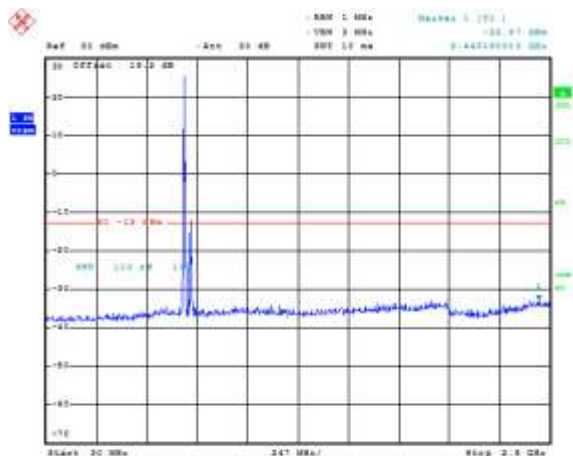


Date: 27-Jul-2015 08:19:48

Figure 6-10a: Band 17, Spurious Conducted Emissions, High Channel, 5MHz BW (RB= 15)

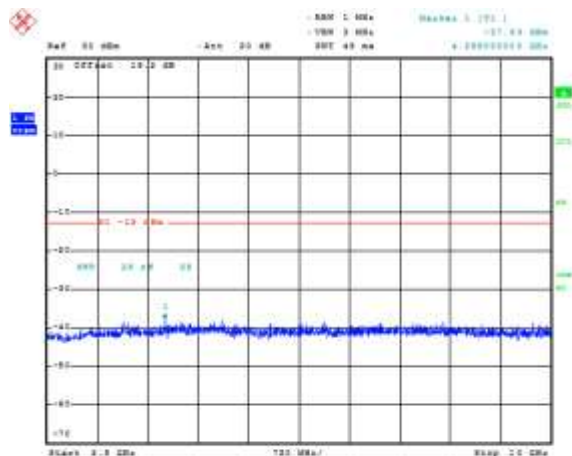


Date: 27-Jul-2015 08:20:02

Figure 6-11a: Band 17, Spurious Conducted Emissions, High channel, 5MHz BW (RB= 25)

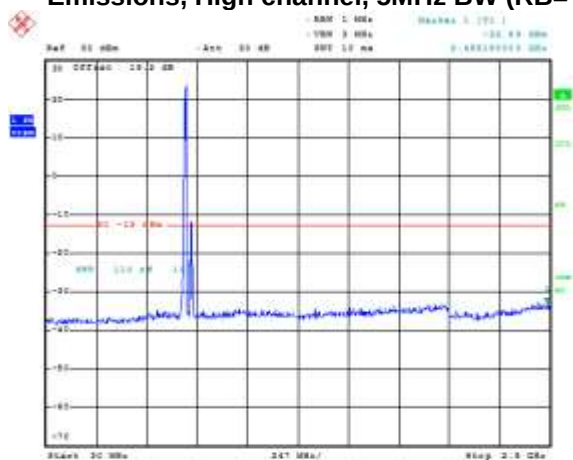

Date: 27-Jul-2015 08:21:06

Figure 6-12a: Band 17, Spurious Conducted Emissions, High channel, 5MHz BW (RB= 25)

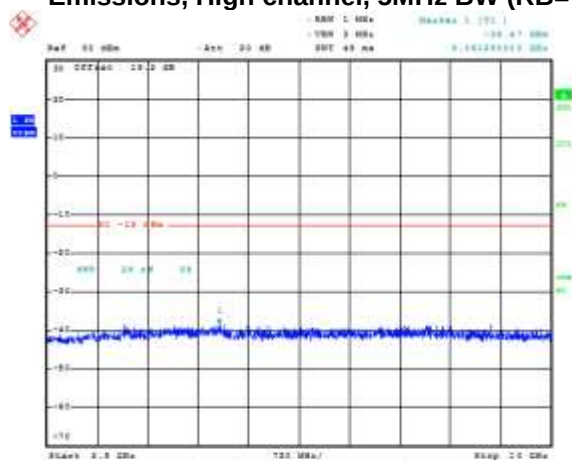


Date: 27-Jul-2015 08:21:20

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 17 Conducted RF Emission Test Data cont'd

Figure 6-13a: Occupied Bandwidth, Band 17 Low Channel, 10MHz BW, RB=50

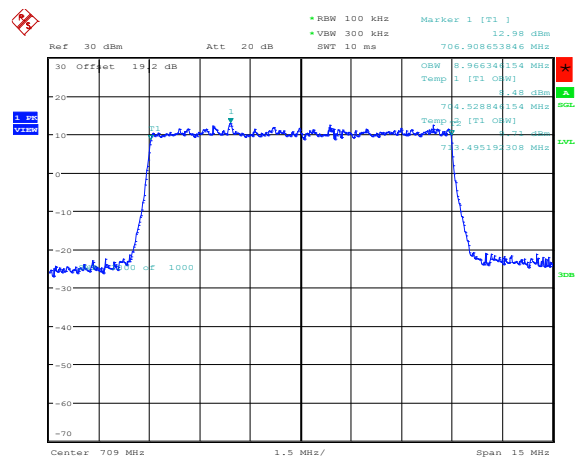


Date: 30.JUL.2015 21:29:35

Figure 6-14a: Occupied Bandwidth, Band 17 Middle Channel, 10MHz BW, RB=50

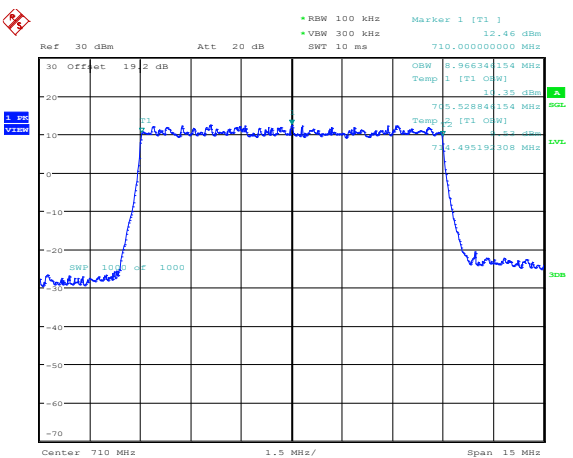

Date: 30.JUL.2015 21:30:25

Figure 6-15a: Occupied Bandwidth, Band 17 High Channel, 10MHz BW, RB=50

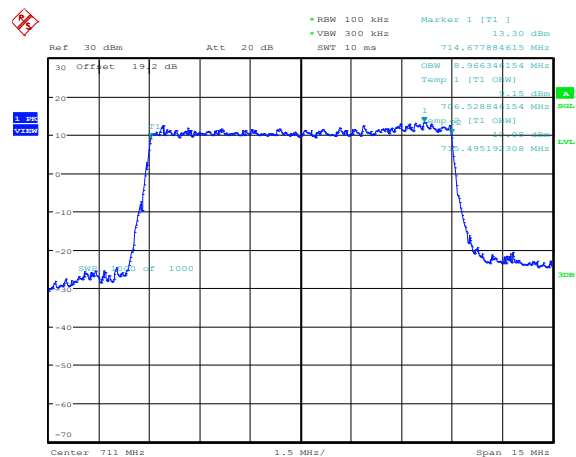


Date: 30.JUL.2015 21:30:59

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 17 Conducted RF Emission Test Data cont'd

Figure 6-16a: Occupied Bandwidth, Band 5 Low Channel, 5MHz BW, RB=50

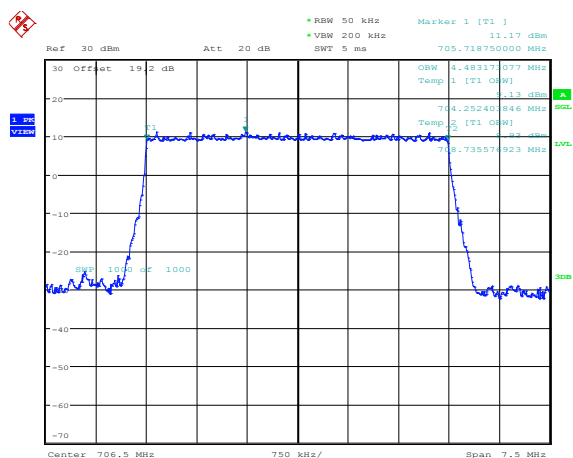


Date: 30.JUL.2015 21:34:10

Figure 6-17a: Occupied Bandwidth, Band 5 Middle Channel, 5MHz BW, RB=50

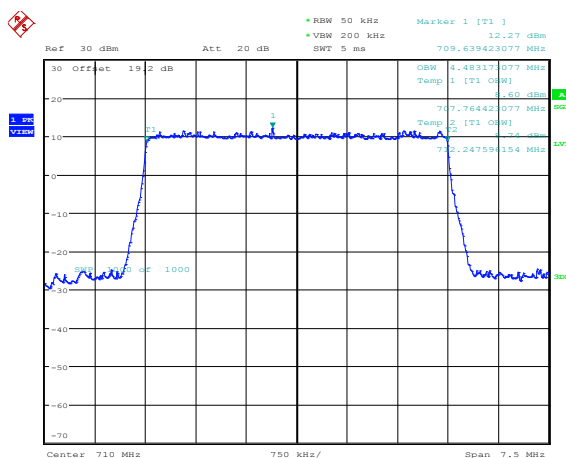

Date: 30.JUL.2015 21:34:39

Figure 6-18a: Occupied Bandwidth, Band 5 High Channel, 5MHz BW, RB=50

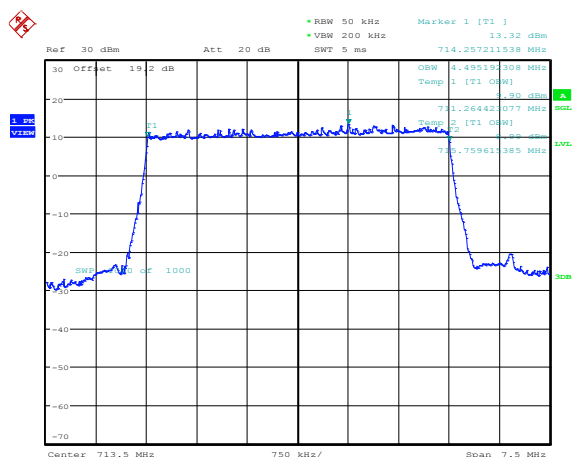


Date: 30.JUL.2015 21:35:02

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 17 Conducted RF Emission Test Data cont'd

Figure 6-19a: -26 dBc Bandwidth, Band 17 Low Channel, 10MHz BW, RB=50

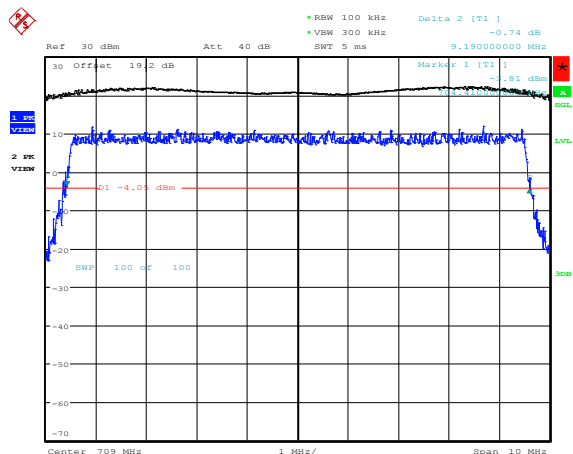


Date: 30.JUL.2015 21:39:31

Figure 6-20a: -26 dBc Bandwidth, Band 17 Middle Channel, 10MHz BW, RB=50

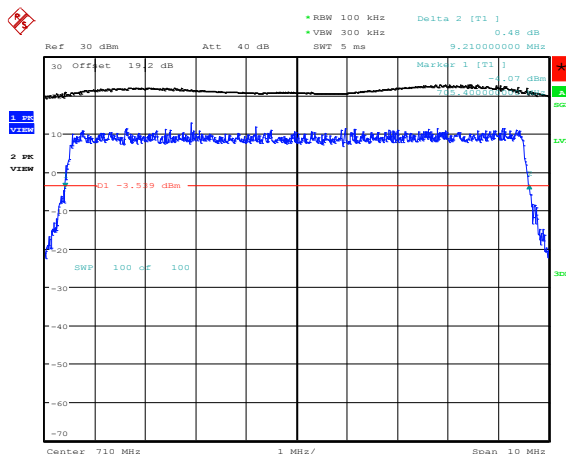


Date: 30.JUL.2015 21:39:46

Figure 6-21a: -26 dBc Bandwidth, Band 17 High Channel, 10MHz BW, RB=50

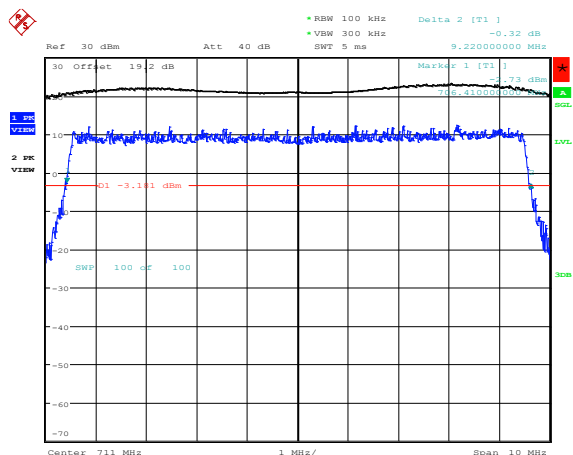

Date: 30.JUL.2015 21:40:02

Figure 6-22a: -26 dBc Bandwidth, Band 17 Low Channel, 5MHz BW, RB=25

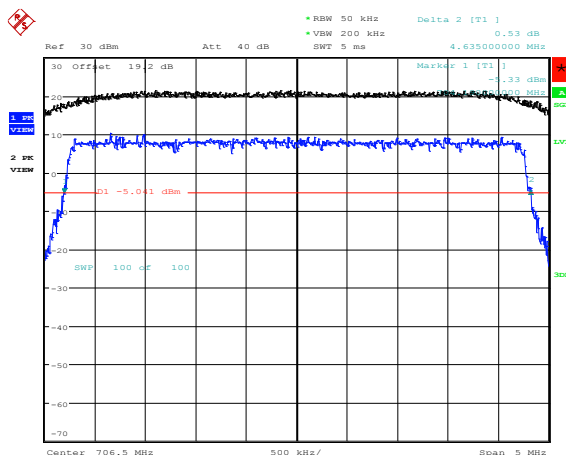


Date: 30.JUL.2015 21:40:25

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 17 Conducted RF Emission Test Data cont'd

Figure 6-23a: -26 dBc Bandwidth, Band 17 Middle Channel, 5MHz BW, RB=25

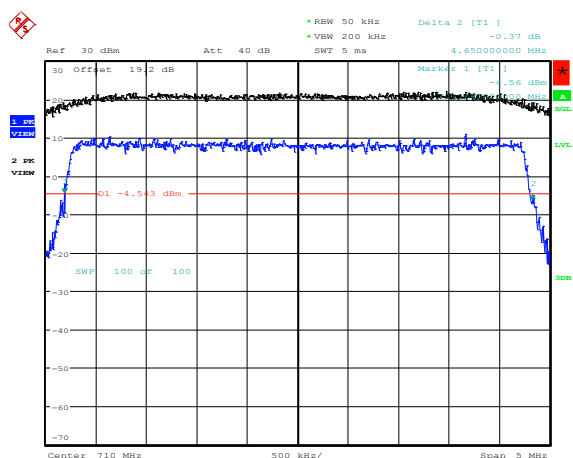


Date: 30.JUL.2015 21:40:38

Figure 6-24a: -26 dBc Bandwidth, Band 17 High Channel, 5MHz BW, RB=25

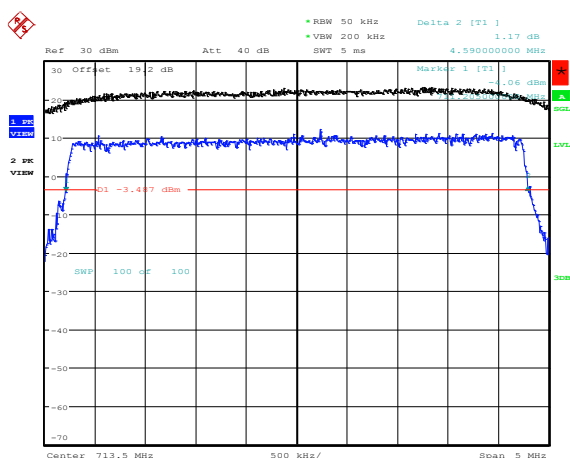


Date: 30.JUL.2015 21:40:52

Figure 6-25a: Band 17 Low Channel Mask, 10MHz BW, RB=50

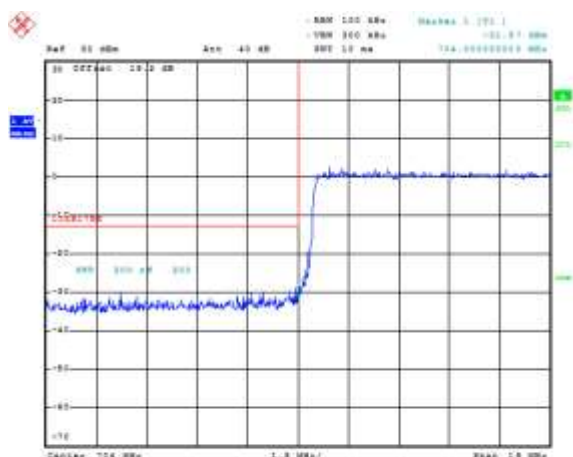

Date: 29.JUL.2015 05:12:06

Figure 6-26a: Band 17 High Channel Mask, 10MHz BW, RB=50

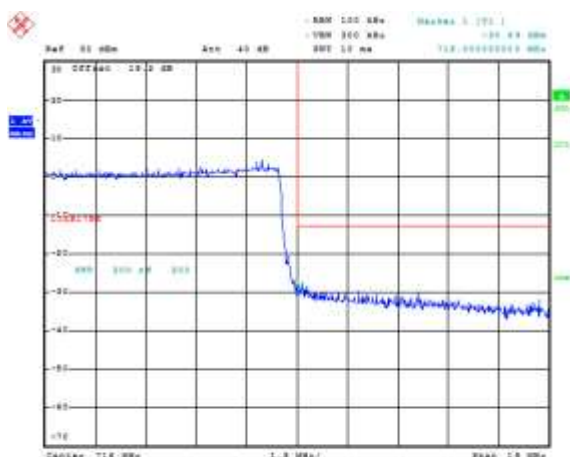


Date: 29.JUL.2015 05:10:11

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 17 Conducted RF Emission Test Data cont'd

**Figure 6-27a: Band 17 Low Channel Mask, 10MHz
BW, RB=1**

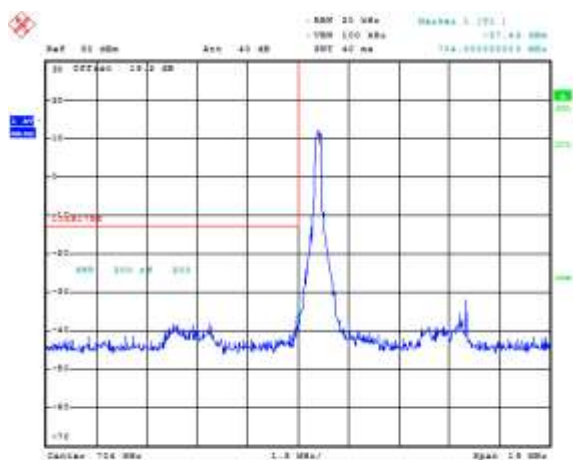


Date: 29-JUL-2015 05:12:40

**Figure 6-28a: Band 17 High Channel Mask, 10MHz
BW, RB=1**

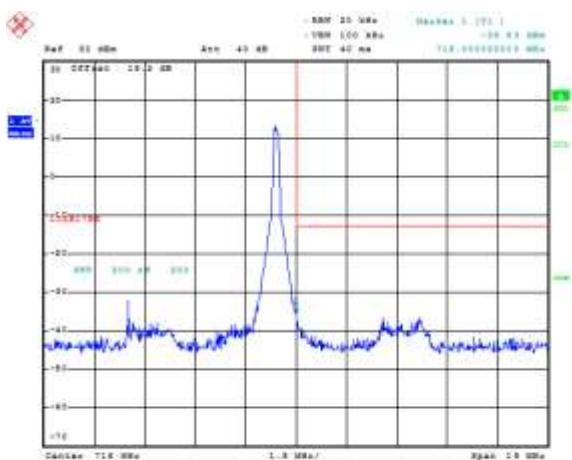


Date: 29-JUL-2015 05:10:11

**Figure 6-29a: Band 17 Low Channel Mask, 5MHz
BW, RB=25**

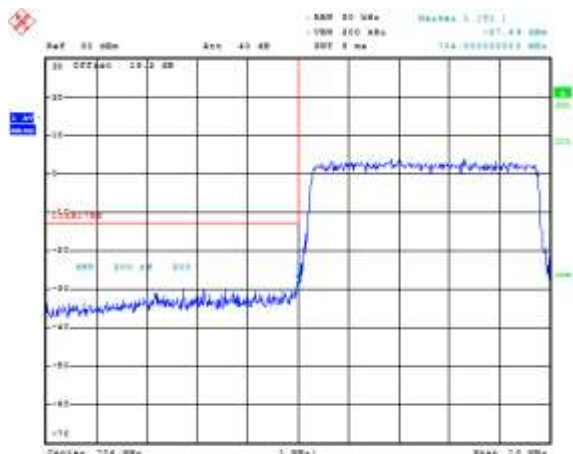

Date: 29-JUL-2015 05:14:08

**Figure 6-30a: Band 17 High Channel Mask, 5MHz
BW, RB=25**

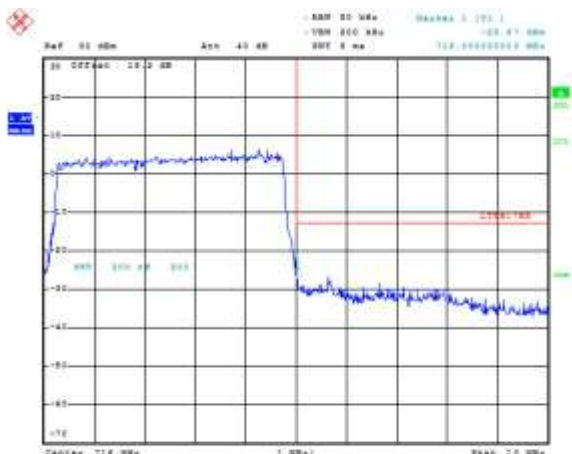


Date: 29-JUL-2015 05:14:08

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 17 Conducted RF Emission Test Data cont'd

**Figure 6-31a: Band 17 Low Channel Mask, 5MHz
BW, RB=1**

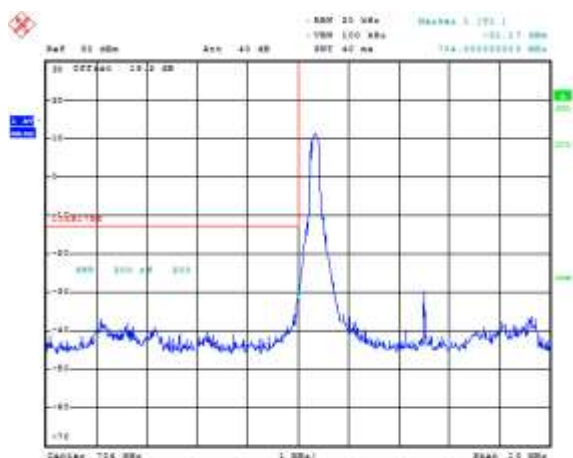


Date: 20-SEP-2015 05:10:20

**Figure 6-32a: Band 17 High Channel Mask, 5MHz
BW, RB=1**

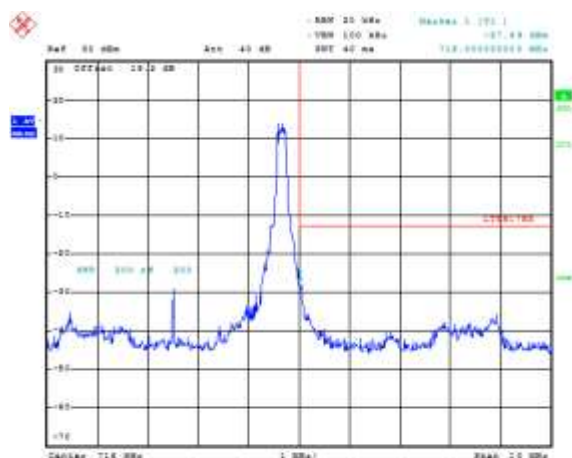


Date: 20-SEP-2015 05:14:29

**Figure 6-33a: Band 17 Mid Channel PAR, 10MHz
BW, RB=25**

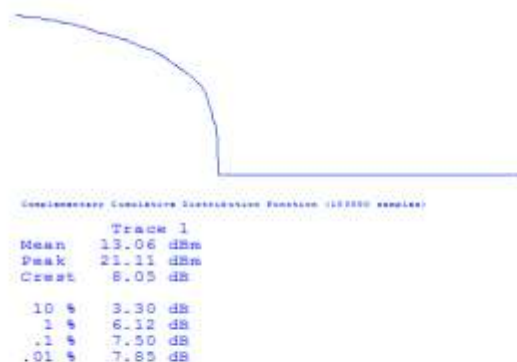

Date: 8-SEP-2015 04:46:25

**Figure 6-34a: Band 17 Middle Channel PAR, 10MHz
BW, RB=50**

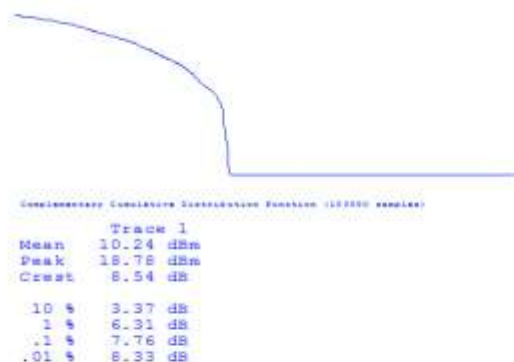


Date: 8-SEP-2015 04:46:24

BlackBerry	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7A	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 17 Conducted RF Emission Test Data cont'd

**Figure 6-35a: Band 17 Mid Channel PAR, 5MHz
BW, RB=15**

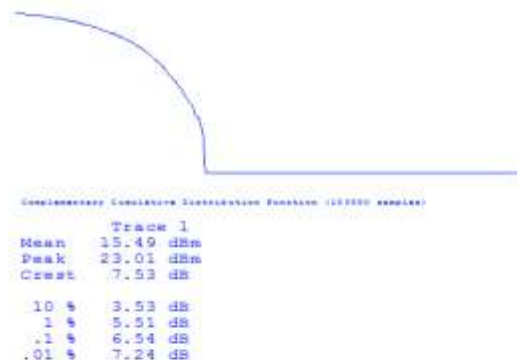

Date: 8-SEP-2015 06:46:54

**Figure 6-36a: Band 17 Mid Channel PAR, 5MHz
BW, RB=25**

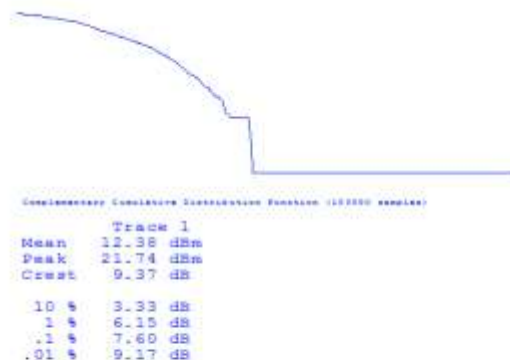


Date: 8-SEP-2015 06:47:06

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 17 Conducted RF Emission Test Data cont'd

Figure 6-37a: Occupied Bandwidth, Band 17 Low Channel, 10MHz BW (RB= 50) 16-QAM

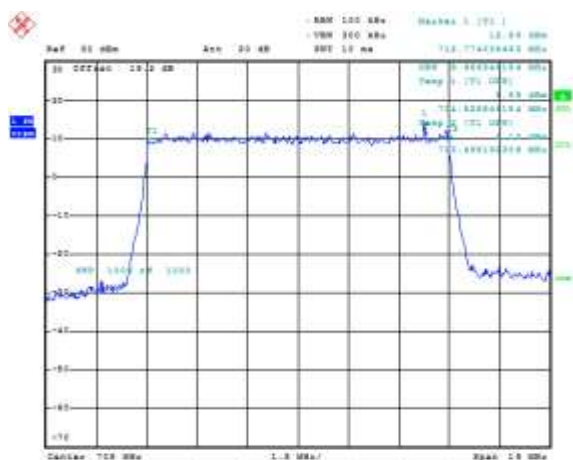


Date: 27-Jul-2015 18:04:38

Figure 6-38a: Occupied Bandwidth, Band 17 Mid Channel, 10MHz BW (RB= 50) 16-QAM

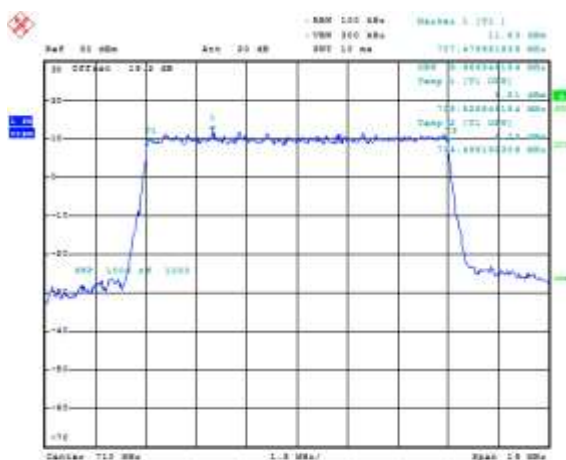

Date: 27-Jul-2015 18:05:38

Figure 6-39a: Occupied Bandwidth, Band 17 High Channel, 10MHz BW (RB= 50) 16-QAM

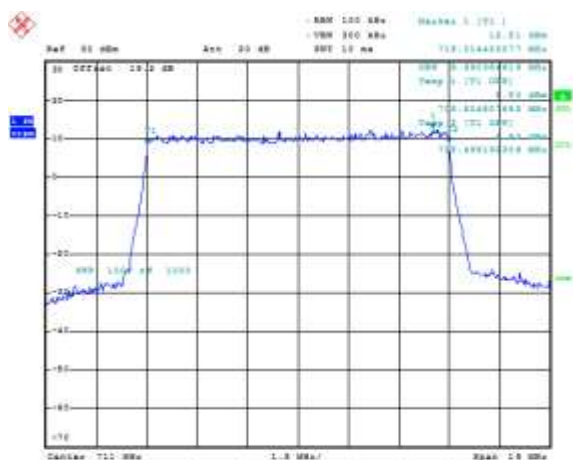


Date: 27-Jul-2015 18:06:38

APPENDIX 7B – LTE Band 17 FREQUENCY STABILITY TEST DATA

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE Band 17 Frequency Stability Test Data

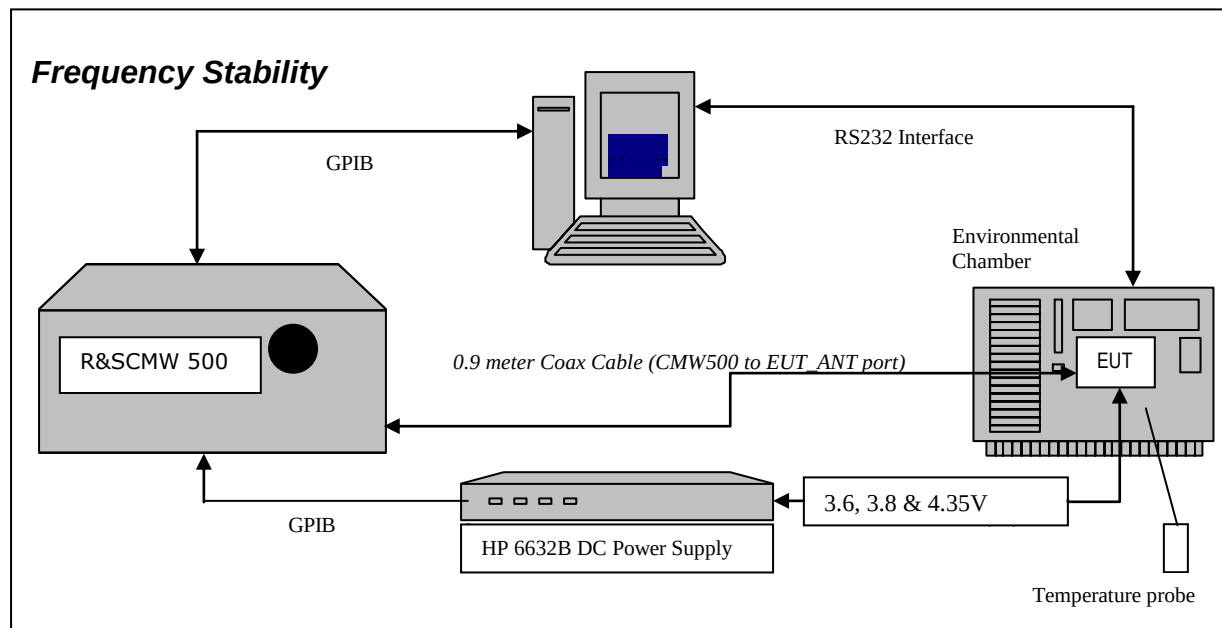

The following configurations were measured for model RHK211LW (STV100-1):

The following measurements were performed by Sijia Li.

CFR 47 Chapter 1 - Federal Communications Commission Rules

Part 2 Required Measurements

2.1055 Frequency Stability - Procedures

(a,b) Frequency Stability - Temperature Variation

(d) Frequency Stability - Voltage Variation

The EUT meets the requirements as stated in CFR 47 chapter 1, Section 27.54, CFR 47 and RSS-139, 6.3 Frequency Stability.

Frequency Stability measurement devices were configured as presented in the block diagram recording frequency, power, data, temperatures, and stepped voltages controlled via a GPIB interface linked to the Environmental chamber, a DC power supply, and the Communications Test Set. A 0.9-metre coax cable was calibrated to characterize the insertion loss for the transmitted frequencies between the RF input/output of the CMW 500 and the EUT antenna port.

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

Test Setup:

The EUT was placed in the Temperature chamber and connected to CMW 500 outside as shown in the figure above. Dry air was pumped inside the temperature chamber to maintain a backpressure during the test. The EUT was kept in the off condition at all times except when the following measurements were to be made.

The chamber was switched on and the temperature was set to -30°C. After the chamber stabilized at -30 °C there was a soak period of one hour to alleviate moisture in the chamber, the EUT voltage was enabled. The system software recorded the frequency, power, and associated measurements.

A Computer system controlled the automated software. This application was given the command of activating all machines intrinsic to the temperature and voltage tests controlling the CMW 500 via the GPIB Bus. The Environmental Chamber was instructed through an RS-232 serial line. The EUT dialogue was passed through a serial connection.

The EUT repetitively transmitted 100 bursts for each set of programmed parameters recording temperature, voltage settings, and systematically selected frequencies. The power supply was cycled from minimum voltage 3.6 volts, to 3.8 volts and to 4.35 volts maximum voltage. The frequency error was measured at a maximum output power and recorded by the automated system test software.

The EUT output power and frequency was measured at 3.6 volts, 3.8 volts and 4.35 volts. The transmit frequency was varied in 3 steps consisting of 709.0 MHz, 710.0 MHz and 711.0 MHz each was measured under 10 MHz bandwidth with maximum (50) RBs. This frequency was recorded in MHz and deviation from nominal, in Parts Per Million.

After the initial one-hour soak at the beginning of the tests, a period of thirty minutes soak was initialized between each ascending temperature step, before proceeding to the next measurement test cycle.

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

Procedure:

The test system software for commencing the Frequency Stability Tests carried through the following cycle.

57. Switch on the HP 6632B power supply; CMW 500 Communications test Set, and Environmental Chamber.
58. Start test program
59. Set the Temperature to –30°C and maintain a period of one- hour soak time, with the EUT supply voltage disabled.
60. Set power supply voltage to 3.6 volts.
61. Set up CMW 500 Radio Communication Tester.
62. Command the CMW 500 to switch to the low channel.
63. Enable the voltage to the EUT, and connect a link to the CMW 500 test set.
64. EUT is commanded to Transmit 100 Bursts.
65. Software logs the following data from the CMW 500, power supply and temperature chamber: Traffic Channel Number, Traffic Channel Frequency, Power Level, Chamber Temperature, Supply Voltage, Power and Frequency Error.
66. The CMW 500 commands the EUT to change frequency to the middle channel and high channel and repeats steps 7 to 9.
67. Repeat steps 5 to 10 changing the supply voltage to 3.8 Volts
68. Increase temperature by 10°C and soak for 1/2 hour.
69. Repeat steps 4 - 12 for temperatures –30°C to 60°C.
70. Repeat steps 5 to 10 changing the supply voltage to 4.35 volts

Procedure 5 to 10 was repeated at room temperature (20°C) with the power supply voltage set to 3.6, 3.8 and 4.35 volts

The maximum frequency error in the LTE band 17 measured was **-0.0045 PPM**.

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE Band 17 results: channels 23780, 23790 and 23800 @ 20°C maximum transmitted power

Traffic Channel Number	LTE Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23780	709.0	3.6	20	2.33	0.0033
23790	710.0	3.6	20	-1.90	-0.0027
23800	711.0	3.6	20	-3.18	-0.0045

Traffic Channel Number	LTE Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23780	709.0	3.8	20	1.80	0.0025
23790	710.0	3.8	20	2.70	0.0038
23800	711.0	3.8	20	-2.93	-0.0041

Traffic Channel Number	LTE Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23780	709.0	4.35	20	2.09	0.0029
23790	710.0	4.35	20	2.43	0.0034
23800	711.0	4.35	20	-2.23	-0.0031

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE band 17 Results: channel 23780 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23780	709.0	3.6	-30	-2.33	-0.0033
23780	709.0	3.6	-20	2.72	0.0038
23780	709.0	3.6	-10	-2.53	-0.0036
23780	709.0	3.6	0	3.20	0.0045
23780	709.0	3.6	10	-1.44	-0.0020
23780	709.0	3.6	20	2.33	0.0033
23780	709.0	3.6	30	-2.62	-0.0037
23780	709.0	3.6	40	-2.82	-0.0040
23780	709.0	3.6	50	-2.88	-0.0041
23780	709.0	3.6	60	-2.06	-0.0029
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23780	709.0	3.8	-30	-2.25	-0.0032
23780	709.0	3.8	-20	-2.70	-0.0038
23780	709.0	3.8	-10	2.43	0.0034
23780	709.0	3.8	0	3.25	0.0046
23780	709.0	3.8	10	1.65	0.0023
23780	709.0	3.8	20	1.80	0.0025
23780	709.0	3.8	30	-3.33	-0.0047
23780	709.0	3.8	40	-2.07	-0.0029
23780	709.0	3.8	50	-3.10	-0.0044
23780	709.0	3.8	60	-2.98	-0.0042
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23780	709.0	4.35	-30	3.18	0.0045
23780	709.0	4.35	-20	-2.06	-0.0029
23780	709.0	4.35	-10	-1.90	-0.0027
23780	709.0	4.35	0	3.76	0.0053
23780	709.0	4.35	10	2.66	0.0038
23780	709.0	4.35	20	2.09	0.0029
23780	709.0	4.35	30	-3.76	-0.0053
23780	709.0	4.35	40	2.55	0.0036
23780	709.0	4.35	50	-2.62	-0.0037
23780	709.0	4.35	60	2.17	0.0031

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE band 5 Results: channel 23790 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23790	710.0	3.6	-30	-2.70	-0.0038
23790	710.0	3.6	-20	-1.90	-0.0027
23790	710.0	3.6	-10	-2.29	-0.0032
23790	710.0	3.6	0	3.56	0.0050
23790	710.0	3.6	10	2.56	0.0036
23790	710.0	3.6	20	-1.90	-0.0027
23790	710.0	3.6	30	1.24	0.0018
23790	710.0	3.6	40	-2.85	-0.0040
23790	710.0	3.6	50	1.63	0.0023
23790	710.0	3.6	60	2.57	0.0036
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23790	710.0	3.8	-30	-1.50	-0.0021
23790	710.0	3.8	-20	3.45	0.0049
23790	710.0	3.8	-10	1.93	0.0027
23790	710.0	3.8	0	2.89	0.0041
23790	710.0	3.8	10	-2.15	-0.0030
23790	710.0	3.8	20	2.70	0.0038
23790	710.0	3.8	30	-2.63	-0.0037
23790	710.0	3.8	40	2.27	0.0032
23790	710.0	3.8	50	-2.60	-0.0037
23790	710.0	3.8	60	-2.99	-0.0042
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23790	710.0	4.35	-30	-2.33	-0.0033
23790	710.0	4.35	-20	-1.86	-0.0026
23790	710.0	4.35	-10	2.19	0.0031
23790	710.0	4.35	0	-2.53	-0.0036
23790	710.0	4.35	10	1.60	0.0023
23790	710.0	4.35	20	2.43	0.0034
23790	710.0	4.35	30	-2.47	-0.0035
23790	710.0	4.35	40	-2.03	-0.0029
23790	710.0	4.35	50	-2.96	-0.0042
23790	710.0	4.35	60	1.36	0.0019

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE band 17 Results: channel 23800 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23800	711.0	3.6	-30	-4.49	-0.0063
23800	711.0	3.6	-20	-4.41	-0.0062
23800	711.0	3.6	-10	2.03	0.0029
23800	711.0	3.6	0	-2.98	-0.0042
23800	711.0	3.6	10	-3.16	-0.0044
23800	711.0	3.6	20	-3.18	-0.0045
23800	711.0	3.6	30	-5.49	-0.0077
23800	711.0	3.6	40	-1.49	-0.0021
23800	711.0	3.6	50	-4.88	-0.0069
23800	711.0	3.6	60	-3.03	-0.0043
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23800	711.0	3.8	-30	-3.93	-0.0055
23800	711.0	3.8	-20	-3.38	-0.0047
23800	711.0	3.8	-10	2.05	0.0029
23800	711.0	3.8	0	-3.12	-0.0044
23800	711.0	3.8	10	-1.97	-0.0028
23800	711.0	3.8	20	-2.93	-0.0041
23800	711.0	3.8	30	-2.99	-0.0042
23800	711.0	3.8	40	-4.06	-0.0057
23800	711.0	3.8	50	-3.65	-0.0051
23800	711.0	3.8	60	-3.79	-0.0053
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23800	711.0	4.35	-30	-2.76	-0.0039
23800	711.0	4.35	-20	-3.63	-0.0051
23800	711.0	4.35	-10	-2.12	-0.0030
23800	711.0	4.35	0	-2.92	-0.0041
23800	711.0	4.35	10	-1.93	-0.0027
23800	711.0	4.35	20	-2.23	-0.0031
23800	711.0	4.35	30	-3.02	-0.0042
23800	711.0	4.35	40	-3.22	-0.0045
23800	711.0	4.35	50	-5.19	-0.0073
23800	711.0	4.35	60	2.10	0.0030

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

Procedure for IC:

The test system software for commencing the Frequency Stability Tests carried through the following cycle.

1. Switch on the HP 6632B power supply; CMW 500 Communications test Set, and Environmental Chamber.
2. Start test program
3. Set the Temperature to –30°C and maintain a period of one- hour soak time, with the EUT supply voltage disabled.
4. Set power supply voltage to 3.6 volts.
5. Set up CMW 500 Radio Communication Tester.
6. Command the CMW 500 to switch to the low channel.
7. Enable the voltage to the EUT, and connect a link to the CMW 500 test set.
8. EUT is commanded to Transmit 100 Bursts.
9. Software logs the following data from the CMW 500, power supply and temperature chamber: Traffic Channel Number, Traffic Channel Frequency, Power Level, Chamber Temperature, Supply Voltage, Power and Frequency Error.
10. Using a resolution bandwidth equal to that permitted within the 1MHz band immediately outside the channel edge, reference points will be selected at the unwanted emission levels which comply with the attenuation $43 + 10 \log_{10} p$, for the type of device under test, on the emission mask of the lowest and highest channels, and the frequency at these points shall be recorded as fL and fH respectively.
11. The frequency stability is calculated by fL minus the frequency offset (frequency error measured in step 9) and fH plus the frequency offset shall be within the frequency range that the equipment is designed to operate (2.5 to 2.57 GHz).
12. The CMW 500 commands the EUT to change frequency to the high channel and repeats steps 7 to 11.
13. Repeat steps 5 to 12 changing the supply voltage to 3.8 Volts
14. Increase temperature to 20 and 50°C and soak for 1/2 hour.
15. Repeat steps 4 - 14 for temperatures –30°C to 60°C.
16. Repeat steps 5 to 15 changing the supply voltage to 4.35 volts

Procedure 5 to 10 was repeated at room temperature (20°C) with the power supply voltage set to 3.6, 3.8 and 4.35 volts

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

Date of test: September 2, 2015.

IC RSS – 130, 4.3 LTE Band 17 Frequency Stability.

LTE Band 17 10MHz Bandwidth results: channels 23780, & 23800 @ 20°C maximum transmitted power

Traffic Channel Number	LTE Band 17 Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	fL (MHz)	fH (MHz)	fL-Freq Offset (MHz)	fH-Freq Offset (MHz)
23780	709.0	3.6	20	-1.90258	704.405	N/A	704.405	N/A
23800	711.0	3.6	20	-2.446175	N/A	715.565	N/A	715.565

Traffic Channel Number	LTE Band 17 Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	fL (MHz)	fH (MHz)	fL-Freq Offset (MHz)	fH-Freq Offset (MHz)
23780	709.0	3.8	20	3.733635	704.42	N/A	704.42	N/A
23800	711.0	3.8	20	-1.945496	N/A	715.58	N/A	715.58

Traffic Channel Number	LTE Band 17 Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	fL (MHz)	fH (MHz)	fL-Freq Offset (MHz)	fH-Freq Offset (MHz)
23780	709.0	4.35	20	-2.717972	704.405	N/A	704.405	N/A
23800	711.0	4.35	20	-1.373291	N/A	715.565	N/A	715.565


	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE Band 17 10MHz Bandwidth results: channels 23780, & 23800 @ -30 and +60°C maximum transmitted power

Traffic Channel Number	LTE Band 17 Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	fL (MHz)	fH (MHz)	fL-Freq Offset (MHz)	fH-Freq Offset (MHz)
23780	709.0	3.6	-30	-3.347397	704.42	N/A	704.42	N/A
23800	711.0	3.6	-30	-4.320145	N/A	715.565	N/A	715.565
23780	709.0	3.8	-30	-3.318787	704.42	N/A	704.42	N/A
23800	711.0	3.8	-30	-3.962517	N/A	715.565	N/A	715.565
23780	709.0	4.35	-30	-2.474785	704.435	N/A	704.435	N/A
23800	711.0	4.35	-30	-4.205704	N/A	715.565	N/A	715.565
23780	709.0	3.6	60	-2.989769	704.405	N/A	704.405	N/A
23800	711.0	3.6	60	-3.232956	N/A	715.565	N/A	715.565
23780	709.0	3.8	60	-1.730919	704.435	N/A	704.435	N/A
23800	711.0	3.8	60	-3.876686	N/A	715.58	N/A	715.58
23780	709.0	4.35	60	-2.717972	704.435	N/A	704.435	N/A
23800	711.0	4.35	60	-4.177094	N/A	715.565	N/A	715.565

BlackBerry	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE Band 17 Frequency Stability Test Data

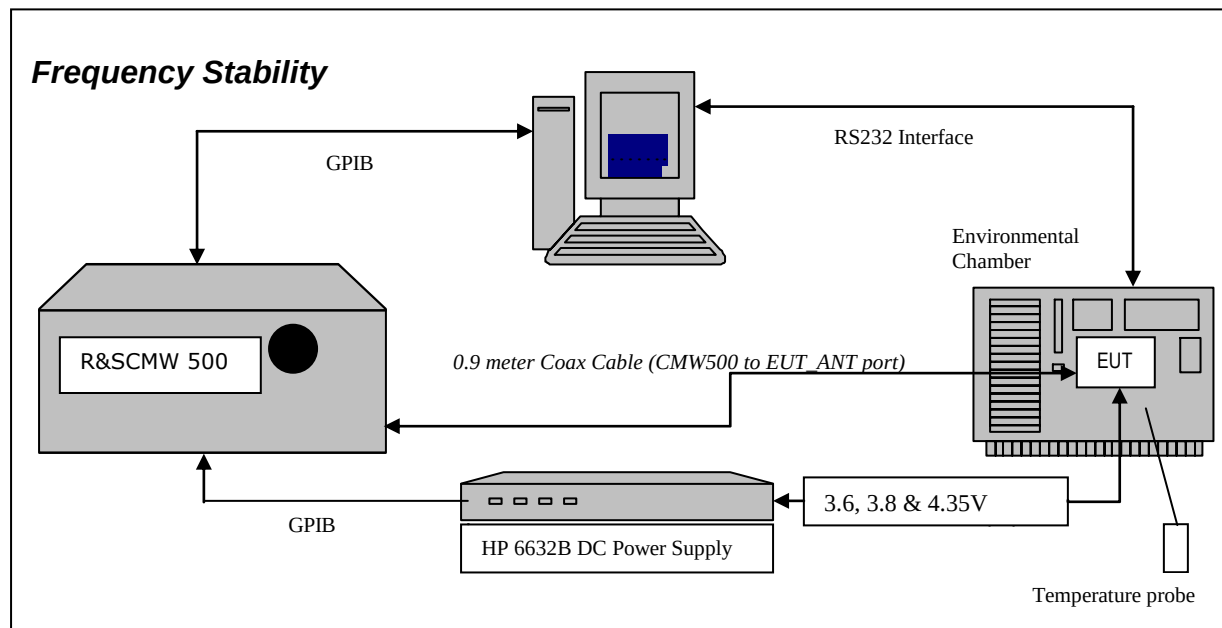

The following configurations were measured for model RHL211LW:

The following measurements were performed by Sijia Li.

CFR 47 Chapter 1 - Federal Communications Commission Rules

Part 2 Required Measurements

2.1055 Frequency Stability - Procedures

(a,b) Frequency Stability - Temperature Variation

(d) Frequency Stability - Voltage Variation

The EUT meets the requirements as stated in CFR 47 chapter 1, Section 27.54, CFR 47 and RSS-139, 6.3 Frequency Stability.

Frequency Stability measurement devices were configured as presented in the block diagram recording frequency, power, data, temperatures, and stepped voltages controlled via a GPIB interface linked to the Environmental chamber, a DC power supply, and the Communications Test Set. A 0.9-metre coax cable was calibrated to characterize the insertion loss for the transmitted frequencies between the RF input/output of the CMW 500 and the EUT antenna port.

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

Test Setup:

The EUT was placed in the Temperature chamber and connected to CMW 500 outside as shown in the figure above. Dry air was pumped inside the temperature chamber to maintain a backpressure during the test. The EUT was kept in the off condition at all times except when the following measurements were to be made.

The chamber was switched on and the temperature was set to -30°C. After the chamber stabilized at -30 °C there was a soak period of one hour to alleviate moisture in the chamber, the EUT voltage was enabled. The system software recorded the frequency, power, and associated measurements.

A Computer system controlled the automated software. This application was given the command of activating all machines intrinsic to the temperature and voltage tests controlling the CMW 500 via the GPIB Bus. The Environmental Chamber was instructed through an RS-232 serial line. The EUT dialogue was passed through a serial connection.

The EUT repetitively transmitted 100 bursts for each set of programmed parameters recording temperature, voltage settings, and systematically selected frequencies. The power supply was cycled from minimum voltage 3.6 volts, to 3.8 volts and to 4.35 volts maximum voltage. The frequency error was measured at a maximum output power and recorded by the automated system test software.

The EUT output power and frequency was measured at 3.6 volts, 3.8 volts and 4.35 volts. The transmit frequency was varied in 3 steps consisting of 709.0 MHz, 710.0 MHz and 711.0 MHz each was measured under 10 MHz bandwidth with maximum (50) RBs. This frequency was recorded in MHz and deviation from nominal, in Parts Per Million.

After the initial one-hour soak at the beginning of the tests, a period of thirty minutes soak was initialized between each ascending temperature step, before proceeding to the next measurement test cycle.

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

Procedure:

The test system software for commencing the Frequency Stability Tests carried through the following cycle.

71. Switch on the HP 6632B power supply; CMW 500 Communications test Set, and Environmental Chamber.
72. Start test program
73. Set the Temperature to –30°C and maintain a period of one- hour soak time, with the EUT supply voltage disabled.
74. Set power supply voltage to 3.6 volts.
75. Set up CMW 500 Radio Communication Tester.
76. Command the CMW 500 to switch to the low channel.
77. Enable the voltage to the EUT, and connect a link to the CMW 500 test set.
78. EUT is commanded to Transmit 100 Bursts.
79. Software logs the following data from the CMW 500, power supply and temperature chamber: Traffic Channel Number, Traffic Channel Frequency, Power Level, Chamber Temperature, Supply Voltage, Power and Frequency Error.
80. The CMW 500 commands the EUT to change frequency to the middle channel and high channel and repeats steps 7 to 9.
81. Repeat steps 5 to 10 changing the supply voltage to 3.8 Volts
82. Increase temperature by 10°C and soak for 1/2 hour.
83. Repeat steps 4 - 12 for temperatures –30°C to 60°C.
84. Repeat steps 5 to 10 changing the supply voltage to 4.35 volts

Procedure 5 to 10 was repeated at room temperature (20°C) with the power supply voltage set to 3.6, 3.8 and 4.35 volts

The maximum frequency error in the LTE band 17 measured was **-0.0071 PPM**.

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE Band 17 results: channels 23780, 23790 and 23800 @ 20°C maximum transmitted power

Traffic Channel Number	LTE Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23780	709.0	3.6	20	-3.23	-0.0046
23790	710.0	3.6	20	3.28	0.0046
23800	711.0	3.6	20	-4.26	-0.0060

Traffic Channel Number	LTE Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23780	709.0	3.8	20	-2.55	-0.0036
23790	710.0	3.8	20	1.97	0.0028
23800	711.0	3.8	20	-4.31	-0.0061

Traffic Channel Number	LTE Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23780	709.0	4.35	20	-3.35	-0.0047
23790	710.0	4.35	20	-3.62	-0.0051
23800	711.0	4.35	20	-3.06	-0.0043

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE band 17 Results: channel 23780 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23780	709.0	3.6	-30	-2.20	-0.0031
23780	709.0	3.6	-20	3.12	0.0044
23780	709.0	3.6	-10	2.23	0.0031
23780	709.0	3.6	0	1.93	0.0027
23780	709.0	3.6	10	3.06	0.0043
23780	709.0	3.6	20	-3.23	-0.0046
23780	709.0	3.6	30	2.10	0.0030
23780	709.0	3.6	40	-1.76	-0.0025
23780	709.0	3.6	50	-2.42	-0.0034
23780	709.0	3.6	60	-1.93	-0.0027
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23780	709.0	3.8	-30	-2.32	-0.0033
23780	709.0	3.8	-20	2.88	0.0041
23780	709.0	3.8	-10	3.02	0.0043
23780	709.0	3.8	0	1.53	0.0022
23780	709.0	3.8	10	3.03	0.0043
23780	709.0	3.8	20	-2.55	-0.0036
23780	709.0	3.8	30	1.93	0.0027
23780	709.0	3.8	40	2.09	0.0029
23780	709.0	3.8	50	-2.85	-0.0040
23780	709.0	3.8	60	1.79	0.0025
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23780	709.0	4.35	-30	-1.52	-0.0021
23780	709.0	4.35	-20	3.50	0.0049
23780	709.0	4.35	-10	3.63	0.0051
23780	709.0	4.35	0	2.35	0.0033
23780	709.0	4.35	10	-1.57	-0.0022
23780	709.0	4.35	20	-3.35	-0.0047
23780	709.0	4.35	30	-3.50	-0.0049
23780	709.0	4.35	40	-2.27	-0.0032
23780	709.0	4.35	50	-2.36	-0.0033
23780	709.0	4.35	60	-2.78	-0.0039

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE band 5 Results: channel 23790 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23790	710.0	3.6	-30	-2.89	-0.0041
23790	710.0	3.6	-20	2.56	0.0036
23790	710.0	3.6	-10	1.57	0.0022
23790	710.0	3.6	0	4.15	0.0058
23790	710.0	3.6	10	2.45	0.0034
23790	710.0	3.6	20	3.28	0.0046
23790	710.0	3.6	30	1.69	0.0024
23790	710.0	3.6	40	-2.05	-0.0029
23790	710.0	3.6	50	-1.80	-0.0025
23790	710.0	3.6	60	1.62	0.0023
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23790	710.0	3.8	-30	-2.26	-0.0032
23790	710.0	3.8	-20	2.60	0.0037
23790	710.0	3.8	-10	2.37	0.0033
23790	710.0	3.8	0	-1.50	-0.0021
23790	710.0	3.8	10	1.63	0.0023
23790	710.0	3.8	20	1.97	0.0028
23790	710.0	3.8	30	1.87	0.0026
23790	710.0	3.8	40	2.06	0.0029
23790	710.0	3.8	50	2.20	0.0031
23790	710.0	3.8	60	2.15	0.0030
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23790	710.0	4.35	-30	1.65	0.0023
23790	710.0	4.35	-20	1.23	0.0017
23790	710.0	4.35	-10	2.02	0.0028
23790	710.0	4.35	0	-2.23	-0.0031
23790	710.0	4.35	10	3.45	0.0049
23790	710.0	4.35	20	-3.62	-0.0051
23790	710.0	4.35	30	-2.19	-0.0031
23790	710.0	4.35	40	2.22	0.0031
23790	710.0	4.35	50	-1.62	-0.0023
23790	710.0	4.35	60	-2.98	-0.0042

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE band 17 Results: channel 23800 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23800	711.0	3.6	-30	-3.09	-0.0043
23800	711.0	3.6	-20	-2.19	-0.0031
23800	711.0	3.6	-10	-1.72	-0.0024
23800	711.0	3.6	0	-3.13	-0.0044
23800	711.0	3.6	10	2.36	0.0033
23800	711.0	3.6	20	-4.26	-0.0060
23800	711.0	3.6	30	-5.35	-0.0075
23800	711.0	3.6	40	-2.88	-0.0040
23800	711.0	3.6	50	-3.98	-0.0056
23800	711.0	3.6	60	-4.55	-0.0064
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23800	711.0	3.8	-30	-3.73	-0.0053
23800	711.0	3.8	-20	2.57	0.0036
23800	711.0	3.8	-10	-2.47	-0.0035
23800	711.0	3.8	0	-2.16	-0.0030
23800	711.0	3.8	10	-3.40	-0.0048
23800	711.0	3.8	20	-4.31	-0.0061
23800	711.0	3.8	30	-3.28	-0.0046
23800	711.0	3.8	40	-3.49	-0.0049
23800	711.0	3.8	50	-3.92	-0.0055
23800	711.0	3.8	60	-5.08	-0.0071
Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
23800	711.0	4.35	-30	-2.10	-0.0030
23800	711.0	4.35	-20	-3.25	-0.0046
23800	711.0	4.35	-10	1.50	0.0021
23800	711.0	4.35	0	-1.63	-0.0023
23800	711.0	4.35	10	-3.12	-0.0044
23800	711.0	4.35	20	-3.06	-0.0043
23800	711.0	4.35	30	-4.35	-0.0061
23800	711.0	4.35	40	-2.89	-0.0041
23800	711.0	4.35	50	-4.38	-0.0062
23800	711.0	4.35	60	-2.73	-0.0038

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

Procedure for IC:

The test system software for commencing the Frequency Stability Tests carried through the following cycle.

17. Switch on the HP 6632B power supply; CMW 500 Communications test Set, and Environmental Chamber.
18. Start test program
19. Set the Temperature to –30°C and maintain a period of one- hour soak time, with the EUT supply voltage disabled.
20. Set power supply voltage to 3.6 volts.
21. Set up CMW 500 Radio Communication Tester.
22. Command the CMW 500 to switch to the low channel.
23. Enable the voltage to the EUT, and connect a link to the CMW 500 test set.
24. EUT is commanded to Transmit 100 Bursts.
25. Software logs the following data from the CMW 500, power supply and temperature chamber: Traffic Channel Number, Traffic Channel Frequency, Power Level, Chamber Temperature, Supply Voltage, Power and Frequency Error.
26. Using a resolution bandwidth equal to that permitted within the 1MHz band immediately outside the channel edge, reference points will be selected at the unwanted emission levels which comply with the attenuation $43 + 10 \log_{10} p$, for the type of device under test, on the emission mask of the lowest and highest channels, and the frequency at these points shall be recorded as fL and fH respectively.
27. The frequency stability is calculated by fL minus the frequency offset (frequency error measured in step 9) and fH plus the frequency offset shall be within the frequency range that the equipment is designed to operate (2.5 to 2.57 GHz).
28. The CMW 500 commands the EUT to change frequency to the high channel and repeats steps 7 to 11.
29. Repeat steps 5 to 12 changing the supply voltage to 3.8 Volts
30. Increase temperature to 20 and 50°C and soak for 1/2 hour.
31. Repeat steps 4 - 14 for temperatures –30°C to 60°C.
32. Repeat steps 5 to 15 changing the supply voltage to 4.35 volts

Procedure 5 to 10 was repeated at room temperature (20°C) with the power supply voltage set to 3.6, 3.8 and 4.35 volts

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

Date of test: September 2, 2015.

IC RSS – 130, 4.3 LTE Band 17 Frequency Stability.

LTE Band 17 10MHz Bandwidth results: channels 23780, & 23800 @ 20°C maximum transmitted power

Traffic Channel Number	LTE Band 17 Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	fL (MHz)	fH (MHz)	fL-Freq Offset (MHz)	fH-Freq Offset (MHz)
23780	709.0	3.6	20	-3.504753	704.435	N/A	704.435	N/A
23800	711.0	3.6	20	-2.54631	N/A	715.565	N/A	715.565

Traffic Channel Number	LTE Band 17 Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	fL (MHz)	fH (MHz)	fL-Freq Offset (MHz)	fH-Freq Offset (MHz)
23780	709.0	3.8	20	-2.603531	704.435	N/A	704.435	N/A
23800	711.0	3.8	20	-3.118515	N/A	715.565	N/A	715.565

Traffic Channel Number	LTE Band 17 Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	fL (MHz)	fH (MHz)	fL-Freq Offset (MHz)	fH-Freq Offset (MHz)
23780	709.0	4.35	20	1.301765	704.405	N/A	704.405	N/A
23800	711.0	4.35	20	-3.247261	N/A	715.58	N/A	715.58

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7B	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE Band 17 10MHz Bandwidth results: channels 23780, & 23800 @ -30 and +60°C maximum transmitted power

Traffic Channel Number	LTE Band 17 Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	fL (MHz)	fH (MHz)	fL-Freq Offset (MHz)	fH-Freq Offset (MHz)
23780	709.0	3.6	-30	-4.663467	704.405	N/A	704.405	N/A
23800	711.0	3.6	-30	-2.46048	N/A	715.565	N/A	715.565
23780	709.0	3.8	-30	-3.175735	704.435	N/A	704.435	N/A
23800	711.0	3.8	-30	-3.948212	N/A	715.55	N/A	715.55
23780	709.0	4.35	-30	1.93119	704.435	N/A	704.435	N/A
23800	711.0	4.35	-30	-3.762245	N/A	715.565	N/A	715.565
23780	709.0	3.6	60	2.245903	704.42	N/A	704.42	N/A
23800	711.0	3.6	60	-1.959801	N/A	715.565	N/A	715.565
23780	709.0	3.8	60	-3.848076	704.405	N/A	704.405	N/A
23800	711.0	3.8	60	-2.846718	N/A	715.565	N/A	715.565
23780	709.0	4.35	60	2.388954	704.405	N/A	704.405	N/A
23800	711.0	4.35	60	-3.247261	N/A	715.565	N/A	715.565

APPENDIX 7C – LTE Band 17 RADIATED EMISSIONS TEST DATA

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7C		
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW	

Radiated Power Test Data Results

The following configurations were measured for model RHK211LW (STV100-1):

Date of Test: August 7, 2015

The following measurements were performed by Shiva Kumbham.

The environmental tests conditions were: Temperature: 27.0 °C

Relative Humidity: 37 %

The BlackBerry® smartphone was standalone, vertically with LCD facing the RX antenna when the turntable is at 0 degree position.

Measurements were performed with QPSK and 16QAM modulations. The smallest test margins are reported below.

Test Distance was 3.0 meters with the RX antenna height scans between 1-4 meters height.

LTE band 17, 5MHz BW, RB=1, QPSK modulation

EUT				Rx Antenna		Spectrum Analyzer		Substitution Method					
								Tracking Generator					
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBm)	Max (V,H) (dBm)	Pol. Tx-Rx	Reading (dBm)	Corrected Reading (relative to Dipole)		Limit (dBm)	Diff. To Limit (dB)
										(dBm)	(W)		
F0	23780	709.00	17	Dipole	V	-45.77	-30.93	V-V	2.26	20.55	0.11	35.00	14.45
F0	23780	709.00	17	Dipole	H	-30.93		H-H	-1.53				
F0	23790	710.00	17	Dipole	V	-46.00	-30.96	V-V	2.38	20.70	0.12	35.00	14.30
F0	23790	710.00	17	Dipole	H	-30.96		H-H	-1.51				
F0	23799	710.90	17	Dipole	V	-46.30	-31.13	V-V	2.30	20.56	0.11	35.00	14.44
F0	23799	710.90	17	Dipole	H	-31.13		H-H	-1.68				

LTE band 17, 5MHz BW, RB=1, 16-QAM modulation

EUT				Rx Antenna		Spectrum Analyzer		Substitution Method					
								Tracking Generator					
Type	Ch	Frequency	Band	Type	Pol.	Reading	Max	Pol.	Reading	Corrected Reading		Limit	Diff. To
		(MHz)				(dBm)	(V,H)			(dBm)	Tx-Rx		
F0	23780	709.00	17	Dipole	V	-46.68	-31.67	V-V	1.51	19.80	0.10	35.00	15.20
F0	23780	709.00	17	Dipole	H	-31.67		H-H	-2.26				
F0	23790	710.00	17	Dipole	V	-46.99	-32.10	V-V	1.26	19.58	0.09	35.00	15.42
F0	23790	710.00	17	Dipole	H	-32.10		H-H	-2.61				
F0	23799	710.90	17	Dipole	V	-47.02	-31.97	V-V	1.49	19.75	0.09	35.00	15.25
F0	23799	710.90	17	Dipole	H	-31.97		H-H	-2.50				

This report shall **NOT** be reproduced except in full without the written consent of BlackBerry RTS - A division of BlackBerry Limited.

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7C		
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW	

Radiated Power Test Data Results

The following configurations were measured for model RHL211LW (STV100-3):

Date of Test: August 14, 2015

The following measurements were performed by Shiva Kumbham.

The environmental tests conditions were: Temperature: 27.0 °C

Relative Humidity: 37 %

The BlackBerry® smartphone was standalone, vertically with LCD facing the RX antenna when the turntable is at 0 degree position.

Measurements were performed with QPSK and 16QAM modulations. The smallest test margins are reported below.

Test Distance was 3.0 meters with the RX antenna height scans between 1-4 meters height.

LTE band 17, 5MHz BW, RB=1, QPSK modulation

EUT				Rx Antenna		Spectrum Analyzer		Substitution Method					
								Tracking Generator					
Type	Ch	Frequency	Band	Type	Pol.	Reading (dBm)	Max (V,H) (dBm)	Pol.	Reading (dBm)	Corrected Reading (relative to Dipole)		Limit (dBm)	Diff. To Limit (dB)
		(MHz)						Tx-Rx		(dBm)	(W)		
F0	23780	709.00	17	Dipole	V	-44.28	-30.85	V-V	2.29	20.58	0.11	35.00	14.42
F0	23780	709.00	17	Dipole	H	-30.85		H-H	-1.42				
F0	23790	710.00	17	Dipole	V	-44.75	-31.08	V-V	2.24	20.56	0.11	35.00	14.44
F0	23790	710.00	17	Dipole	H	-31.08		H-H	-1.62				
F0	23799	710.90	17	Dipole	V	-44.96	-30.88	V-V	2.56	20.82	0.12	35.00	14.18
F0	23799	710.90	17	Dipole	H	-30.88		H-H	-1.43				

LTE band 17, 5MHz BW, RB=1, 16-QAM modulation

EUT				Rx Antenna		Spectrum Analyzer		Substitution Method					
								Tracking Generator					
Type	Ch	Frequency	Band	Type	Pol.	Reading	Max	Pol.	Reading	Corrected Reading (relative to Dipole)		Limit	Diff. To Limit (dB)
		(MHz)				(dBm)	(V,H)			(dBm)	Tx-Rx		
F0	23780	709.00	17	Dipole	V	-45.55	-31.86	V-V	1.35	19.64	0.09	35.00	15.36
F0	23780	709.00	17	Dipole	H	-31.86		H-H	-2.43				
F0	23790	710.00	17	Dipole	V	-46.36	-31.83	V-V	1.50	19.82	0.10	35.00	15.18
F0	23790	710.00	17	Dipole	H	-31.83		H-H	-2.38				
F0	23799	710.90	17	Dipole	V	-45.88	-31.63	V-V	1.82	20.08	0.10	35.00	14.92
F0	23799	710.90	17	Dipole	H	-31.63		H-H	-2.10				

This report shall NOT be reproduced except in full without the written consent of BlackBerry RTS - A division of BlackBerry Limited.

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 7C	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

Radiated Emissions Test Data Results cont'd

The following measurements were performed by Imran Kanji.

Date of Test: August 13, 2015

The environmental test conditions were: Temperature: 26.2 °C
 Relative Humidity: 32.4 %

The BlackBerry® smartphone was standalone, vertically with LCD facing the RX antenna when the turntable is at 0 degree position.

Test Distance was 3.0 meters with the RX antenna height scans between 1-4 meters height, and the frequency range scanned was 30MHz – 1GHz.

Measurements were performed in LTE band 17 with QPSK and 16-QAM modulations for 10MHz BW (channel 23780, 23790, 23800 with RB = 1).

All emissions were at least 25.0 dB below the limit.

The following measurements were performed by Kevin Guo

Date of Test: August 13, 2015

The environmental test conditions were: Temperature: 27.7 °C
 Relative Humidity: 40 %

Test Distance was 3.0 meters with the RX antenna height scans between 1-4 meters height, and a frequency range of 1 GHz to 10 GHz.

The BlackBerry® smartphone was standalone, horizontally with LCD facing up and the top pointing to the RX antenna when the turntable is at 0 degree position

Measurements were performed in LTE band 17 with QPSK and 16-QAM modulations for 10MHz BW (channel 23780, 23790, 23800 with RB = 1).

All emissions were at least 25.0 dB below the limit.


APPENDIX 8A– LTE Band 30 CONDUCTED RF EMISSIONS TEST DATA/PLOTS

BlackBerry	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 8A	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE Band 30 Conducted RF Emission Test Data

This appendix contains measurement data pertaining to conducted spurious emissions, 99% power bandwidth and the channel mask.

Test Setup Diagram

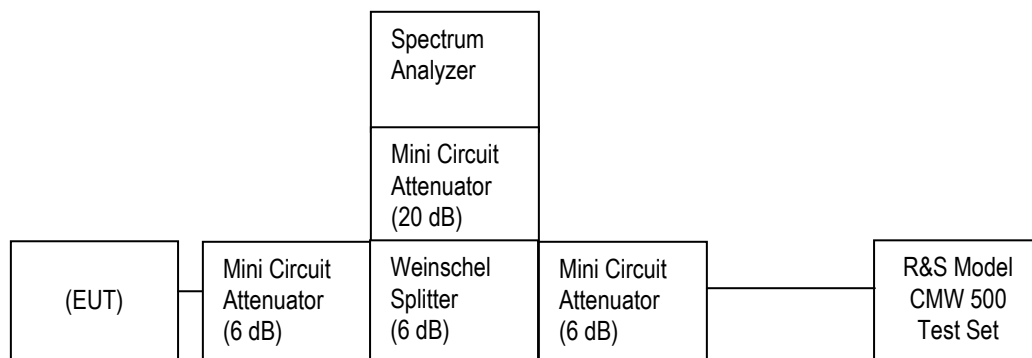

The following configurations were measured for model RHK211LW (STV100-1):

Date of Test: July 27 – September 21, 2015

The environmental test conditions were: Temperature: 22.7 – 23.6 °C
 Relative Humidity: 38.7 – 61.2 %

The following measurements were performed by Kevin Guo and Landon Martin.

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 8A	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

LTE Band 30 Conducted RF Emission Test Data cont'd

Emission Designator Table

Frequency Range (MHz)	Conducted Output Power (dBm)	Emission Designator	Band	Bandwidth (MHz)	Modulation
2307.5-2312.5	24.57	4M48G7D	LTE B30	5	QPSK
2307.5-2312.5	23.54	4M48D7W	LTE B30	5	16QAM
2310-2310	24.56	8M94G7D	LTE B30	10	QPSK
2310-2310	24.36	8M94D7W	LTE B30	10	16QAM

The conducted spurious emissions – As per 47 CFR 2.1051, 27.53(a)(4), RSS-195, 5.6 were measured from 30 MHz to 20 GHz.

–26 dBc Bandwidth and Occupied Bandwidth (99%)

the modulation spectrum was measured by both methods of 99% power bandwidth and –26 dBc bandwidth for each 5MHz and 10MHz with different number of RBs for LTE Band 30.

QPSK and 16-QAM modulations were applied to each of the bandwidths. Only the worst case measurements are documented in this report.

A minimum RB condition was also measured (RB = 1).

The resolution bandwidth required for out-of-band emissions in the 1 MHz bands immediately outside and adjacent to the frequency block, was determined to be at least 1% of the emission bandwidth.

The worst case –26dBc bandwidth for LTE Band 30 was measured to be 9.15 MHz. Results were derived in a 100 kHz resolution bandwidth.

On any frequency outside the frequency block and outside the adjacent 1 MHz bands, a resolution bandwidth of at least 1 MHz was applied.

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 8A	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

Test Data for LTE Band 30 selected Frequencies in 10MHz BW (RB = 50)

LTE Band 30 Frequency (MHz)	26dBc Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
2310	9.15	8.94

Test Data for LTE Band 30 selected Frequencies in 5MHz BW (RB = 25)

LTE Band 30 Frequency (MHz)	26dBc Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
2307.5	4.625	4.48
2310	4.63	4.47
2312.5	4.66	4.48

Test Data for LTE Band 30 selected Frequencies in 10MHz BW (RB = 25)

LTE Band 30 Frequency (MHz)	99% Occupied Bandwidth (MHz)	
	QPSK	16-QAM
2310	8.94	8.92

Test Data for LTE Band 30 selected Frequencies in 5MHz BW (RB = 25)

LTE Band 17 Frequency (MHz)	99% Occupied Bandwidth (MHz)	
	QPSK	16-QAM
2307.5	4.48	4.48
2310	4.47	4.48
2312.5	4.48	4.47

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 8A	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW

Peak to Average Ratio (PAR)

For each 5MHz and 10MHz with Resource Block allocation 50,25 and 15 as per scalable bandwidths for LTE Band 30, the peak to average ratio was measured on the low, middle and high channels with QPSK modulation.

On any frequency outside the frequency block and outside the adjacent 1 MHz bands, a resolution bandwidth of at least 1 MHz was applied.

The worst case measured was 9.61 dB on 10MHz bandwidth with Resource Block allocation 25 while transmitting at 707.5MHz.

Measurement Plots for LTE Band 30

See Figures 8-1a to 8-8a for the plots of the conducted spurious emissions.

See Figures 8-9a to 8-16a for the plots of 99% Occupied Bandwidth and -26 dBc Bandwidth.


See Figures 8-17a to 8-21a for the plots of the Channel mask.

See Figures 8-22a for the plots of the Peak to Average Ratio.

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 8A	
Test Report No.: RTS-6066-1509-13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW, L6ARHL210LW, L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 30 Conducted RF Emission Test Data cont'd

Figure 8-1a: Band 30, Spurious Conducted Emissions, 10MHz BW (RB= 50)

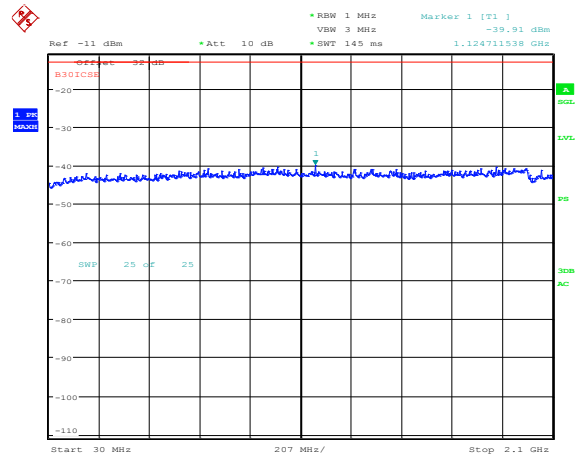


Date: 21.SEP.2015 22:03:03

Figure 8-2a: Band 30, Spurious Conducted Emissions, 10MHz BW (RB= 50)

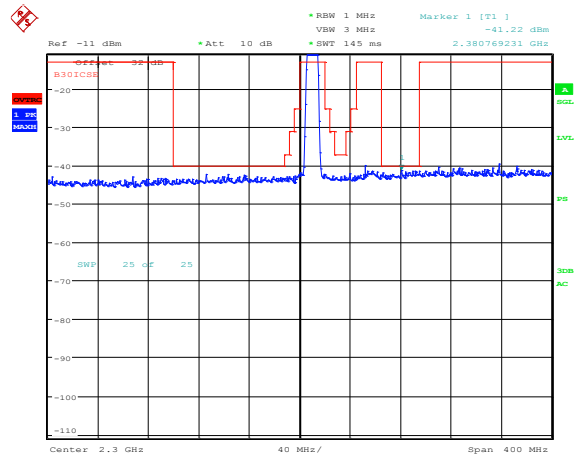


Date: 21.SEP.2015 21:56:52

Figure 8-3a: Band 30, Spurious Conducted Emissions, 10MHz BW (RB= 50)

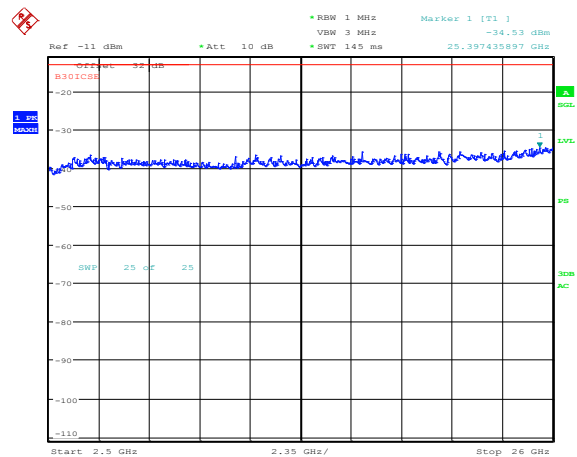

Date: 21.SEP.2015 22:04:08

Figure 8-4a: Band 30, Spurious Conducted Emissions, High channel, 5MHz BW (RB= 25)

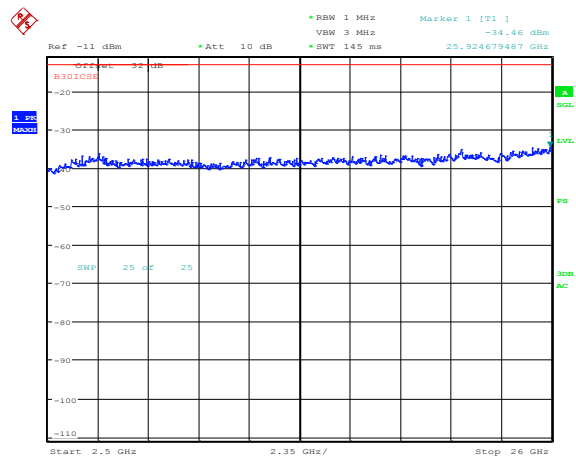


Date: 21.SEP.2015 22:05:08

	EMC Test Report for the BlackBerry® smartphone Model RHK211LW (STV100-1), RHL211LW (STV100-3), RHM181LW (STV100-4) APPENDIX 8A	
Test Report No.: RTS-6066-1509- 13B_Rev1	Dates of Test: July 21 to September 25, 2015	FCC ID: L6ARHK210LW,L6ARHL210LW,L6ARHM181LW IC: 2503A-RHK210LW, 2503A-RHL210LW


LTE Band 30 Conducted RF Emission Test Data cont'd

Figure 8-5a: Band 30, Spurious Conducted Emissions, High channel, 5MHz BW (RB= 25)

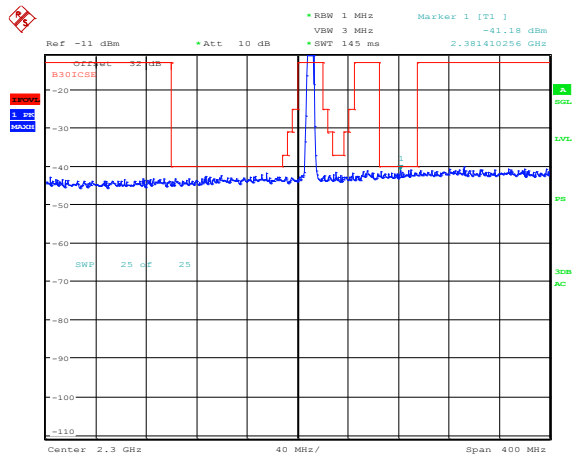


Date: 21.SEP.2015 21:59:24

Figure 8-6a: Band 30, Spurious Conducted Emissions, High channel, 5MHz BW (RB= 25)

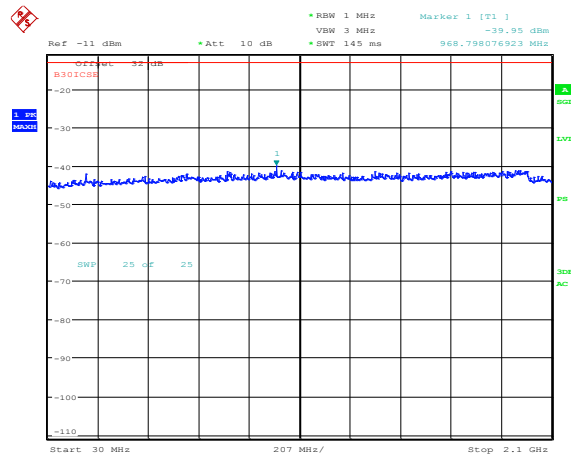


Date: 21.SEP.2015 22:06:27

Figure 8-7a: Band 30, Spurious Conducted Emissions, Low channel, 5MHz BW (RB= 1)

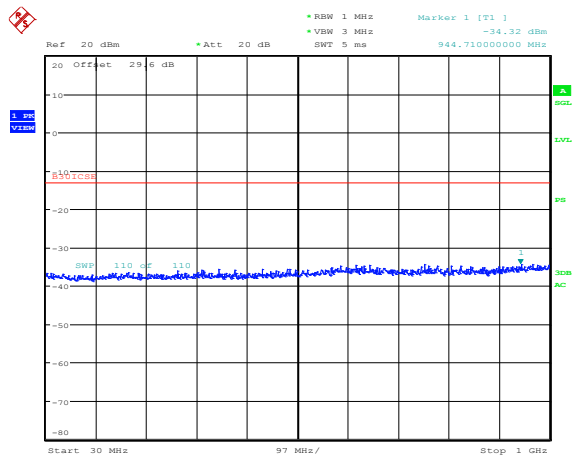

Date: 21.SEP.2015 19:41:26

Figure 8-8a: Band 30, Spurious Conducted Emissions, Low channel, 5MHz BW (RB= 1)

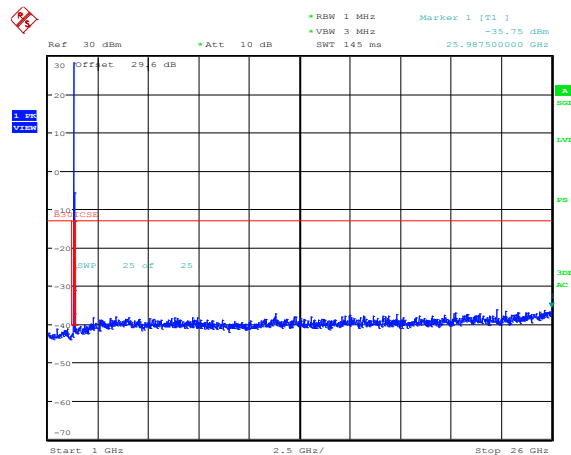

Date: 21.SEP.2015 19:41:50