



APPLICATION FOR EQUIPMENT AUTHORIZATION

Type acceptance of a
NOKIA PCS 3 dB Booster Module
under
FCC ID: **L7KTBUL-01**

as a
PCS 3 dB Booster Module
under
Title 47 of the CFR, Part 24

MET REPORT EMI9333
February 3, 1998

PREPARED FOR:

NOKIA Telecommunications, Inc.
7 Village Circle, Suite 100
Westlake, TX 76262

PREPARED BY:

MET Laboratories, Inc.
914 West Patapsco Avenue
Baltimore, Maryland 21230-3493

Test Engineer:


Kenneth Bass

Reviewed by:



Christopher Harvey
EMI Laboratory Director



Table of Contents

EXHIBIT 1	3
EQUIPMENT ID LABEL	3
EXHIBIT 2	4
AGENT AUTHORIZATION	4
EXHIBIT 3	5
PHOTOGRAPHS	5
EXHIBIT 4	13
MANUFACTURER & PRODUCT INFORMATION	14
ENGINEERING STATEMENT	14
COMPANY OFFICIAL SIGNATURE	14
EXHIBIT 5	16
Photograph of Occupied Bandwidth Test Configuration	20
Photograph of Conducted Spurious Emissions and RF Power Output Test Configuration	21
EXHIBIT 6	22
Radiated Emissions	23
Radiated Emissions	24
Occupied Bandwidth	25
RF Power Output	26
Spurious Emissions	27
ANTENNA TERMINALS - BLOCK A	27
ANTENNA TERMINALS - BLOCK E	28
ANTENNA TERMINALS - BLOCK C	29
Antenna Terminals at Block Edges	30
EXHIBIT 7	31
USER'S MANUAL	31
EXHIBIT 8	32
BLOCK DIAGRAM	32
EQUIPMENT DESCRIPTION	32
EXHIBIT 9	33
APPENDIX	33



EXHIBIT 4

MANUFACTURER & PRODUCT INFORMATION

ENGINEERING STATEMENT

COMPANY OFFICIAL SIGNATURE

MANUFACTURER'S STATEMENT REGARDING MODIFICATIONS

**MANUFACTURER & PRODUCT INFORMATION**

TYPE OF AUTHORIZATION: Type acceptance of a PCS 3 dB Booster Module as installed in a PCS (BTS) system Transmitter.

FCC IDENTIFIER: L7KTBUL-01

APPLICABLE FCC RULES: FCC Part 24 - 2.985/24.232(a); 2.987; 2.989/24.238; 2.993/24.238, 2.983(a) thru (g); 2.995(a)(1),(d)(1)/24.135(a); 2.991

CLIENT: NOKIA Telecommunications, Inc.
7 Village Circle, Suite 100
Westlake, TX 76262

EQUIPMENT: PCS 3 dB Booster Module

TESTING DATE(S): January 13 thru 15, 1998

MANUFACTURER'S REPRESENTATIVE: Mr. Jersey Lai

ENGINEERING STATEMENT

I ATTEST: the measurements shown in this report were made in accordance with the procedures indicated, and that the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

I FURTHER ATTEST: on the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Part 24 of the FCC Rules under normal use and maintenance.


Kenneth Bass
EMI Engineer, MET Laboratories



MODIFICATIONS STATEMENT

No modifications were made during testing.



EXHIBIT 5

INTRODUCTION

TEST SITE

REPORT OF MEASUREMENT

INSTRUMENTATION

TEST CONFIGURATION

PHOTOGRAPHS



INTRODUCTION

As required by §2.931 and §2.938 of 47 CFR, the following data is presented on behalf of the manufacturer, NOKIA Telecommunications, Inc., as verification of the compliance of the NOKIA PCS 3 dB Booster Module to the requirements of Part 24 of FCC CFR 47. (All references are to the most current version of 47 CFR in effect.)

TEST SITE

All testing was conducted at MET Laboratories, Inc., 914 West Patapsco Avenue, Baltimore, Maryland 21230-3493. Radiated emissions measurements were performed on a three-meter open air test site (OATS). In accordance with 47 CFR, §2.948, a complete site description is on file with the FCC Laboratory Division as 31040/SIT/MET.

MEASUREMENT PROCEDURES

As required by §2.993, *field strength of spurious radiation measurements* were made in accordance with the general procedures of ANSI C63.4-1992 "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz". Preliminary radiated emission measurements were performed inside a shielded chamber with all transmitters on and terminated. The frequency list from the preliminary measurements was used as a guide for making final measurements on an 10 meter open area test site. The unit was scanned over the frequency range of 9 kHz to 20 GHz using the following equipment:

Frequency Range	Input Transducer	Measurement Instrumentation
30 MHz to 1 GHz above 1 GHz	Dipole Antenna Set Double Ridged Guide Horn	Spectrum Analyzer Spectrum Analyzer

Radiated Spurious RF emissions must be attenuated by $43+10\log(P)$ from the calculated field strength of the fundamental emission as radiated from a tuned dipole.

$$E(V/m) = \sqrt{(49.2 \cdot P)/R}$$

$$P_{(Tx - Booster)} = 32.81 \text{ watts correlated to } 152.17 \text{ dBuV/m at 1 meter and } 142.53 \text{ dBuV/m at 3 meters}$$

$$\text{The attenuation required is } 43+10\log(32.81W) = 58.16 \text{ dB}$$

Thus, the spurious limits are: 94.01 dBuV/m at 1 meter and 84.73 dBuV/m at 3 meters

[A more detailed derivation of the spurious emissions limits is on page ²⁵ 29.]



As required by §2.985 of CFR 47, *RF power output measurements* were made at the RF output terminals using an attenuator and spectrum analyzer. This test was performed with carrier modulated by a GMSK modulation signal. No significant difference in RF field strength was noted when compared to the RF field strength level with the EUT set for frequency hopping mode.

Frequency tolerance measurements, as required by §2.995 of CFR 47, were not performed on the PCS 3 dB Booster Module over the temperature range -30 C to +50 C, or for variations of the primary voltage between 85% and 115% (of the rated supply voltage). These measurements were performed during Authorization of the attached BTS transmitter module and were therefore not necessary for the 3 dB Booster Module.

As required by §2.989 of CFR 47, *occupied bandwidth measurements* were made on the 3 dB Booster Module pre- and post- module. The transmitter was configured to transmit a random data pattern which produced a GMSK signal to modulate the carrier. The limit was calculated from FCC Rule 24.238. We determined the resolution bandwidth (RBW) at which the frequency components of the transmission could be resolved. Using this bandwidth, we determined the 26dB bandwidth of the emission at the lowest, a middle, and highest selectable channel range.

As recommended in §2.238, 1% of this 26dB bandwidth was chosen to measure the peak of any spurious emission inside the 1.0 MHz frequency band adjacent to each frequency block edge. This test was also performed at a reduced power level for those channels that were previously blocked (i.e. used as guard band channels). The reduced RF power level at these previously blocked channels is accomplished with software where the final rev. of the software will not allow the user to adjust the output power at these frequencies beyond the levels presented in this report. All other frequencies were measured using a 1.0 MHz RBW. The unit was exercised using signal types required by §2.989.

As required by §2.991 of CFR 47, *spurious emissions at antenna terminal measurements* were made at the RF output terminals using a 50 Ω attenuator and spectrum analyzer set for a 100 KHz bandwidth. This test was performed with a GMSK modulated carrier signal. The Transmitter was adjusted for continuous transmit on frequencies at the low, middle, and high frequencies in the band of operation. The frequency spectrum was investigated from 10.0 KHz to 20.0 Ghz. For measuring emissions above 2 Ghz, a high-pass filter was used to eliminate the fundamental transmit frequency to prevent possible saturation effects on the front end of the spectrum analyzer.



INSTRUMENTATION

Radiated emissions measurements were made using a Hewlett-Packard 8563A Spectrum Analyzer. EMCO models 3104 biconical and 3146A log period antennas were used as input for the frequency range 30 - 1000 MHz. From 1- 18 GHz, an EMCO Model 3115 Double-Ridge Guided Horn antenna was used. From 18 - 20 GHz a Waveline model 899 Standard Gain Horn antenna was used.

Carrier field strength measurements, when necessary, were made using the equipment described above.

Occupied bandwidth measurements were made using a Hewlett-Packard 8563A Spectrum Analyzer.

TEST CONFIGURATION

The 3 dB Booster Modules was installed between the RF output port and bandpass filter stages of an indoor BTS cabinet and configured in accordance with the manufacturer's instructions. The EUT with host BTS (base transceiver station) was operated in a manner representative of the typical usage of the equipment. During all testing, system components were manipulated within the confines of typical usage to maximize each emission.

Radiated spurious emissions were performed with the transmitter modules, 3 dB Booster Module, and Mast Head Amplifier (MHA) modules installed in the indoor cabinets.



EXHIBIT 6

TEST DATA



SUBJECT: Radiated Emissions
GMSK Modulated Carrier
FCC Part 24

MET REPORT: EMI9333
MFG: NOKIA
TESTED BY: Kenneth Bass
TEST DATE(S): 15 Jan 1998

EUT: 3 dB Booster Module
MODEL: TBUL11

TECHNICAL SPECIFICATION: 2.993; 24.238(a)

Carrier Emission: 32.81 Watts
Spurious Emissions Limits: See table below and text on page 24

FREQUENCY	EUT AZIMUTH	ANTENNA		EUT RADIATION	ANTENNA FACTOR	TEST DISTANCE	CABLE LOSS	AMP GAIN MINUS FILTER LOSS	FIELD STRENGTH	LIMITS @ 3m
(MHz)	(Degrees)	POL (H/V)	HGT (m)	(dBμV)	(dB/m)	(m)	(dB)	(dBμV)	(dBuV/m)	(dBuV/m)
177.57	135	H	2.0	15.4	15.6	3	1.25	n/a	32.25	84.37
177.57	0	V			16.0	3	1.25	n/a	33.45	84.37
179.11	135	H	1.5	15.3	15.6	3	1.25	n/a	32.15	84.37
179.11	315	V	1.5	16.7	16.2	3	1.25	n/a	34.15	84.37
188.21	180	H	2.0	15.1	16.5	3	1.25	n/a	32.85	84.37
188.21	315	V	2.5	14.4	17.0	3	12.5	n/a	32.65	84.37
185.03	90	H	1.5	14.8	16.1	3	1.25	n/a	32.05	84.37
185.03	270	V	1.5	14.9	16.6	3	1.25	n/a	32.75	84.37
272.00	180	H	2.0	13.0	18.0	3	1.75	n/a	32.75	84.37
272.00	270	V	1.5	13.0	19.0	3	1.75	n/a	32.35	84.37
389.09	0	H	2.0	14.1	19.3	3	1.5	n/a	34.9	84.37
389.09	315	V	1.5	14.0	19.6	3	1.5	n/a	35.1	84.37

Equipment meets the specifications of 2.985, 2.993, 24.238(a)



SUBJECT: Radiated Emissions
GMSK Modulated Carrier
FCC Part 24

MET REPORT: EMI9333
MFG: NOKIA
TESTED BY: Kenneth Bass
TEST DATE(S): 15 Jan 1998

EUT: 3 dB Booster Module

MODEL: TBUL11

TECHNICAL SPECIFICATION: 2.993; 24.238(a)

The radiated spurious emissions limit is obtained by the following:

Based on an input power (as measured at the output of the Mast Head Amplifier) of 32.81 watts:

$$P_o = 32.81 \text{ W}$$

As per 2.993 (a), it is assumed this power is to be fed to a half-wave tuned dipole. Using a conversion formula for distance, the field strength at one meter can be derived:

$$E(V/m)_{1m} = \frac{\sqrt{49.2 \times 32.81}}{1}$$

$$E(V/m)_{1m} = 40.17 \text{ V/m or } 153.00 \text{ dB}\mu\text{V}$$

As per 24.238, the spurious emissions must be attenuated by $43 + \log(P)$ which is:

$$43 + 10\log(32.81) = 58.16 \text{ dB}$$

Therefore, the limit for spurious emissions is:

$$152.17 \text{ dB}\mu\text{V} - 58.168 \text{ dB} = 94.01 \text{ dB}\mu\text{V} @ 1m$$

At 3 meters measurement distance, the limit is;

$$E(V/m)_{3m} = \frac{\sqrt{49.2 \times 32.81}}{3}$$

$$E(V/m)_{3m} = 13.39 \text{ V/m or } 142.53 \text{ dB}\mu\text{V}$$

Again, according to 24.238, all signals must be attenuated by 58 dB;
Therefore, the limit for spurious emissions for a test distance of 3 meters is:

$$142.53 - 58.16 = 84.37 \text{ dB}\mu\text{V} @ 3m$$



SUBJECT: Occupied Bandwidth
GMSK modulated Carrier
FCC Part 24

MET REPORT: EMI9333
MFG: NOKIA
TESTED BY: Kenneth Bass
TEST DATE(S): 14 Jan 1998

EUT: 3 dB Booster Module
MODEL: TBUL11

Comment: Equipment complies with Section 2.989. The fundamental emission is confined within a 313 KHz band (maximum) centered on the actual carrier frequency. The resolution bandwidth (RBW) selected for the measurement was 10 KHz. Plots of the occupied bandwidth, as measured at the Transmitter RF output port and at the antenna output port, are presented on the following pages.


Results: The following plots illustrate that the introduction of the 3 dB booster module as implemented in the RF path (after the Tx output) will broaden the signal bandwidth from 298 kHz to 313 kHz.

2

*ATTEN 40dB
RL 63.5dBm

ΔMKR 0dB
-298kHz

10dB/

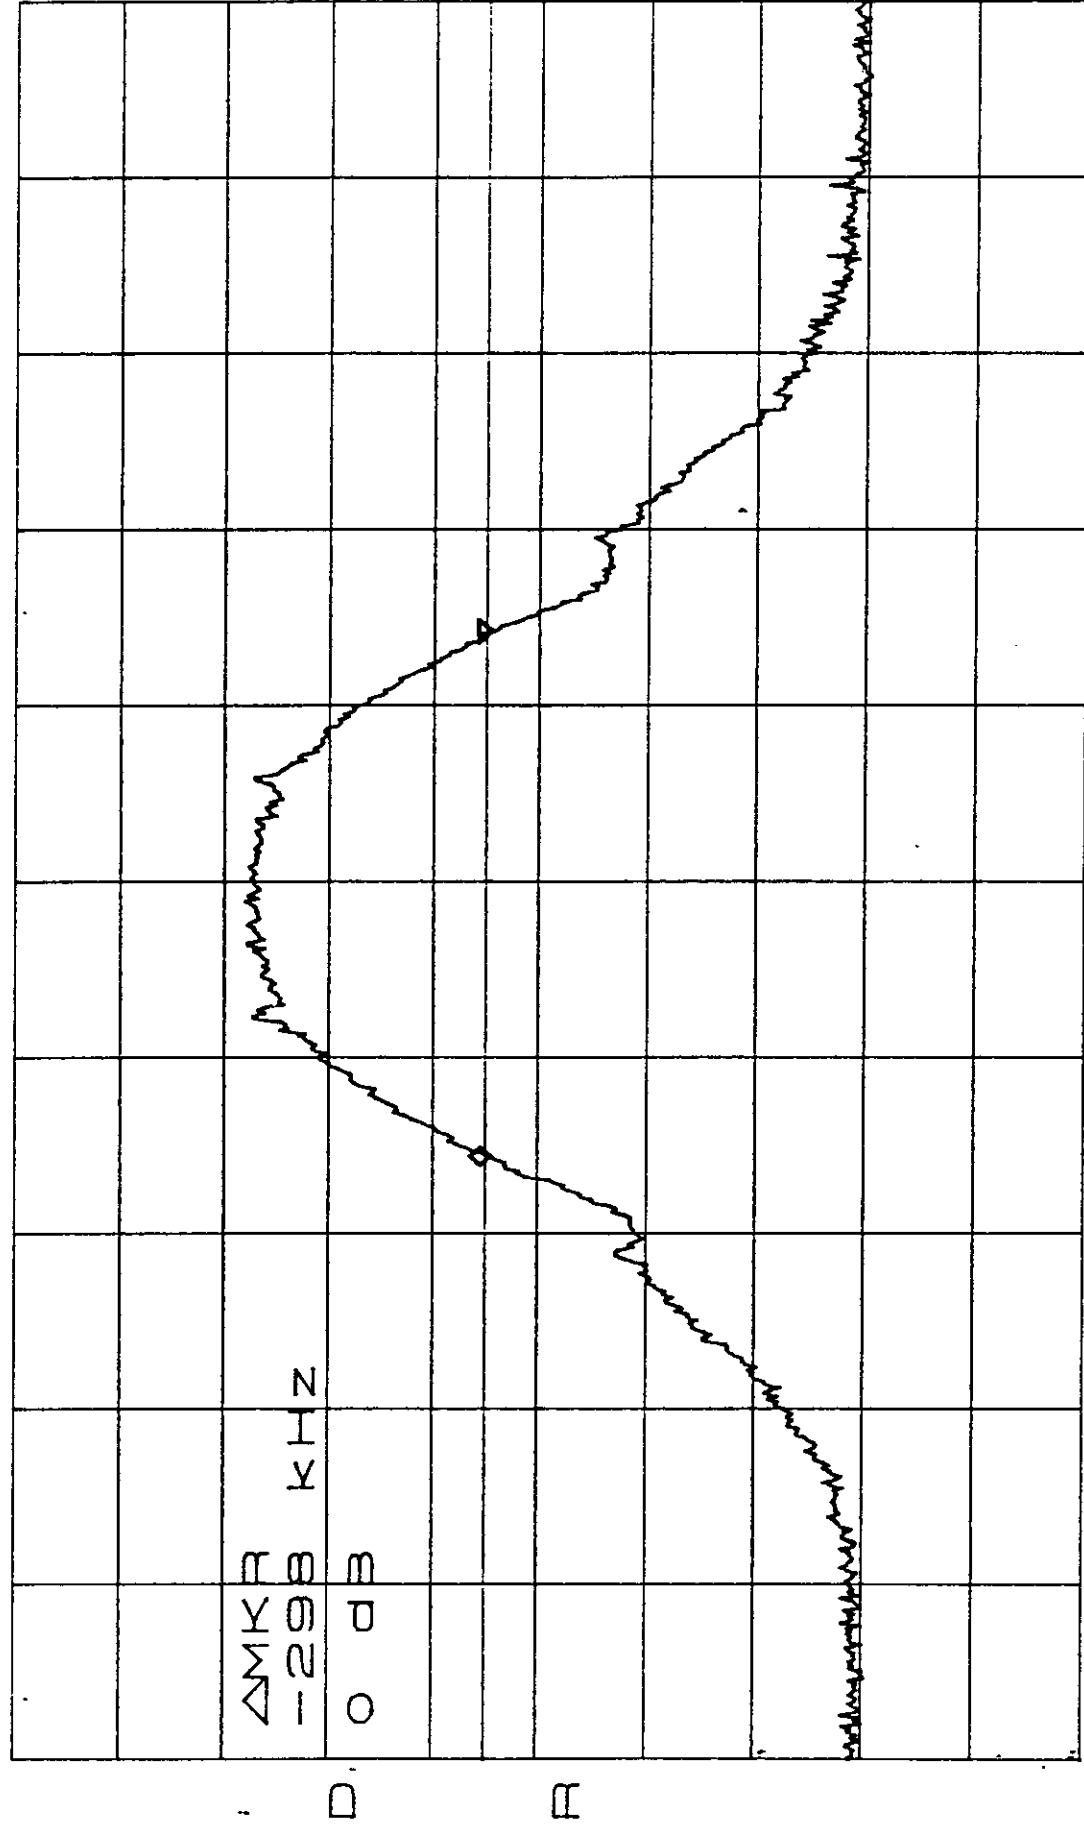

CENTER 1.930203GHz

SPAN 1.000MHz

*RBW 10kHz


*VBW 30kHz

SWP 50ms

*ATTEN 40dB
PL 63.5dBm

ΔMKR 0dB
313KHZ

10dB/

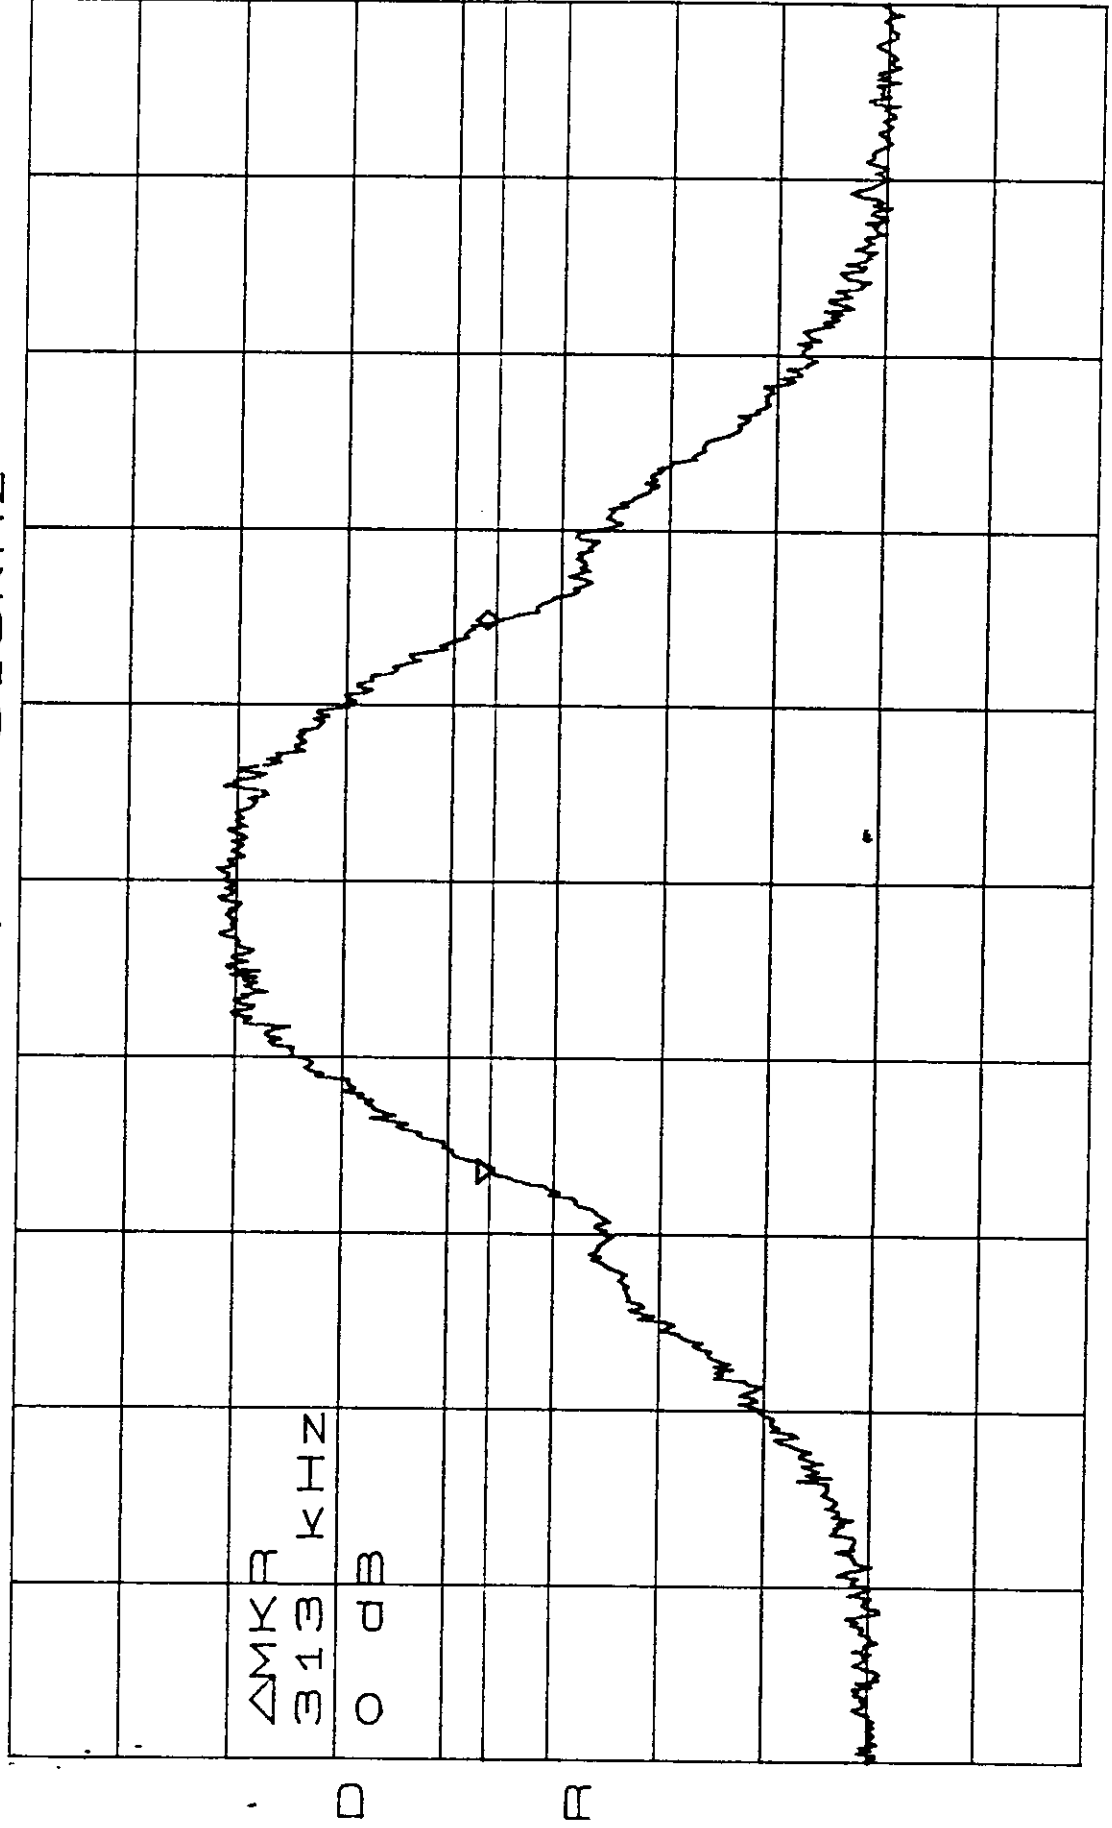

CENTER 1.930203GHz

SPAN 1.000MHz

*VBW 30KHZ

*RBW 10KHZ

SWP 50ms



SUBJECT: RF Power Output
FCC Part 24

MET REPORT: EMI9333
MFG: NOKIA
TESTED BY: Kenneth Bass
TEST DATE(S): 14 Jan 1998

EUT: 3 dB Booster Module
MODEL: TBUL11

Comment: Equipment complies with Section 2.985 and 24.232(a). The transmitter power shall not exceed 100 W (157 dBμV) at the carrier frequency.


Plots of the RF output Power level of the GMSK modulated carrier, as measured at the RF output terminals of the MHA (mast head amplifier), appear on the following pages. The transmitter power output was measured for Channels at the low, middle, and high end of the transmitter frequency range. The spectrum analyzer was replaced with an HP RF power meter for comparison. The levels obtained with the spectrum analyzer are displayed on the following graphs.

*ATTEN 40dB

PL 61.0dBm

MKR 44.33dBm

10dB/ 1.93038GHz

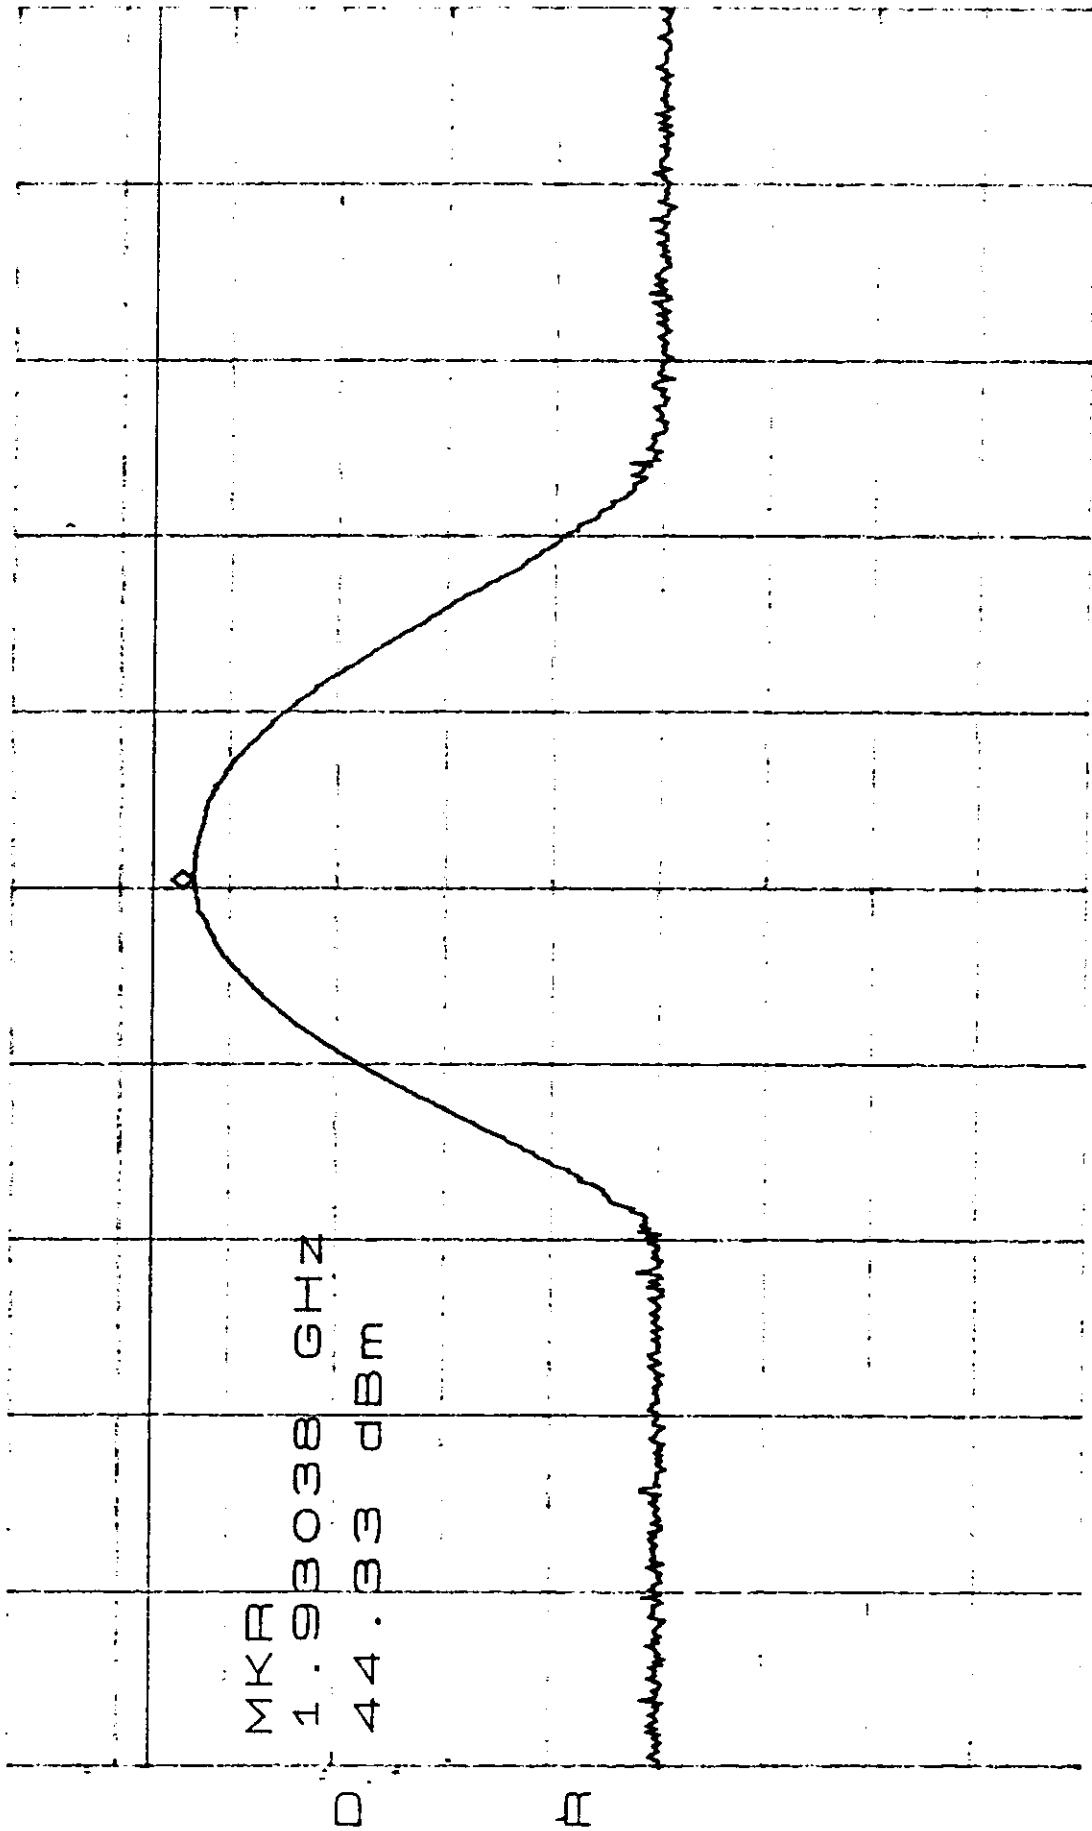

MKR
1.93038 GHz
44.33 dBm

CENTER 1.93028GHz

SPAN 20.00MHz

*RBW 2.0MHz

*VBW 3.0MHz


SWP 50ms

*ATTENT 4000

NYR 45.17088E

RL 61.0433n

10dB / 1.96017GHz

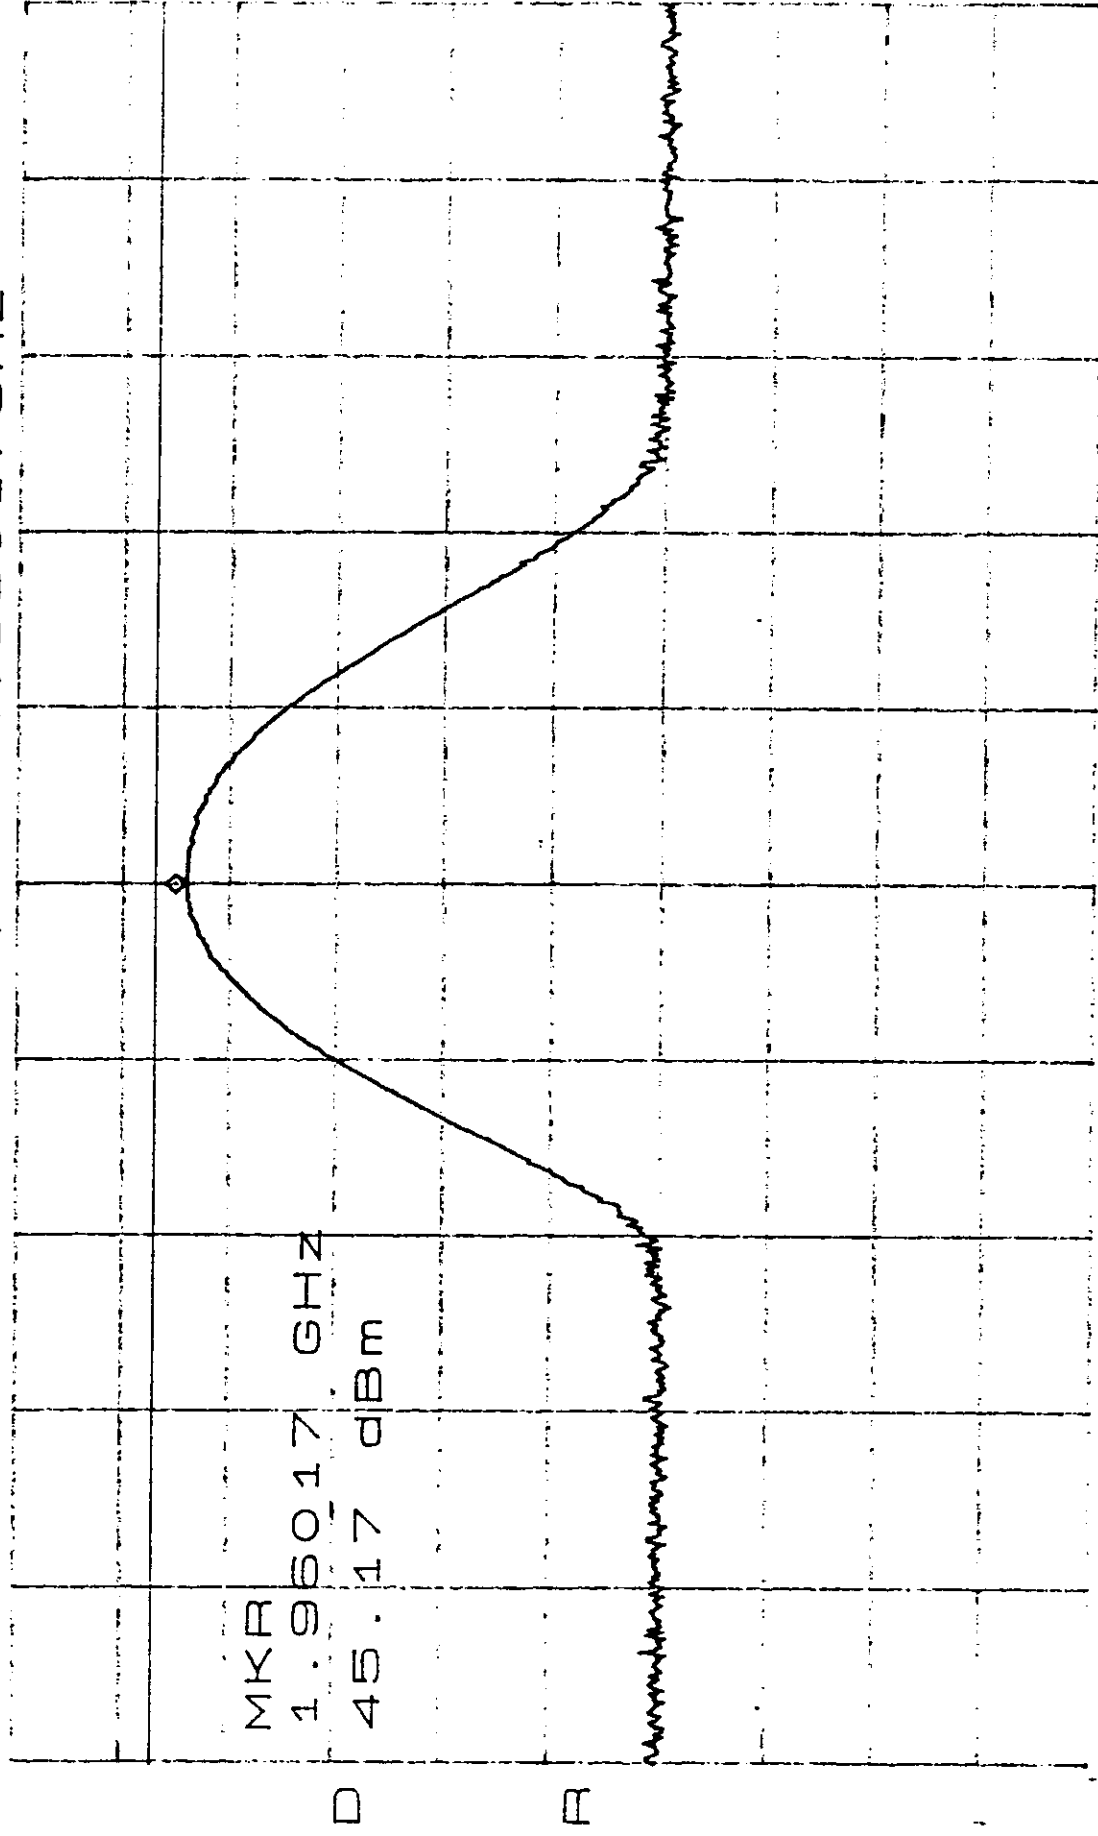

CENTER 1.96017GHZ

SPAN 20.00MHN

*****RBBS.OZIN

*VBW 3. OMHN


SSW 505 SS

*ATTEN 40dB

RL 61.0dBm

MKR 44.67dBm

10dB/ 1.98982GHz

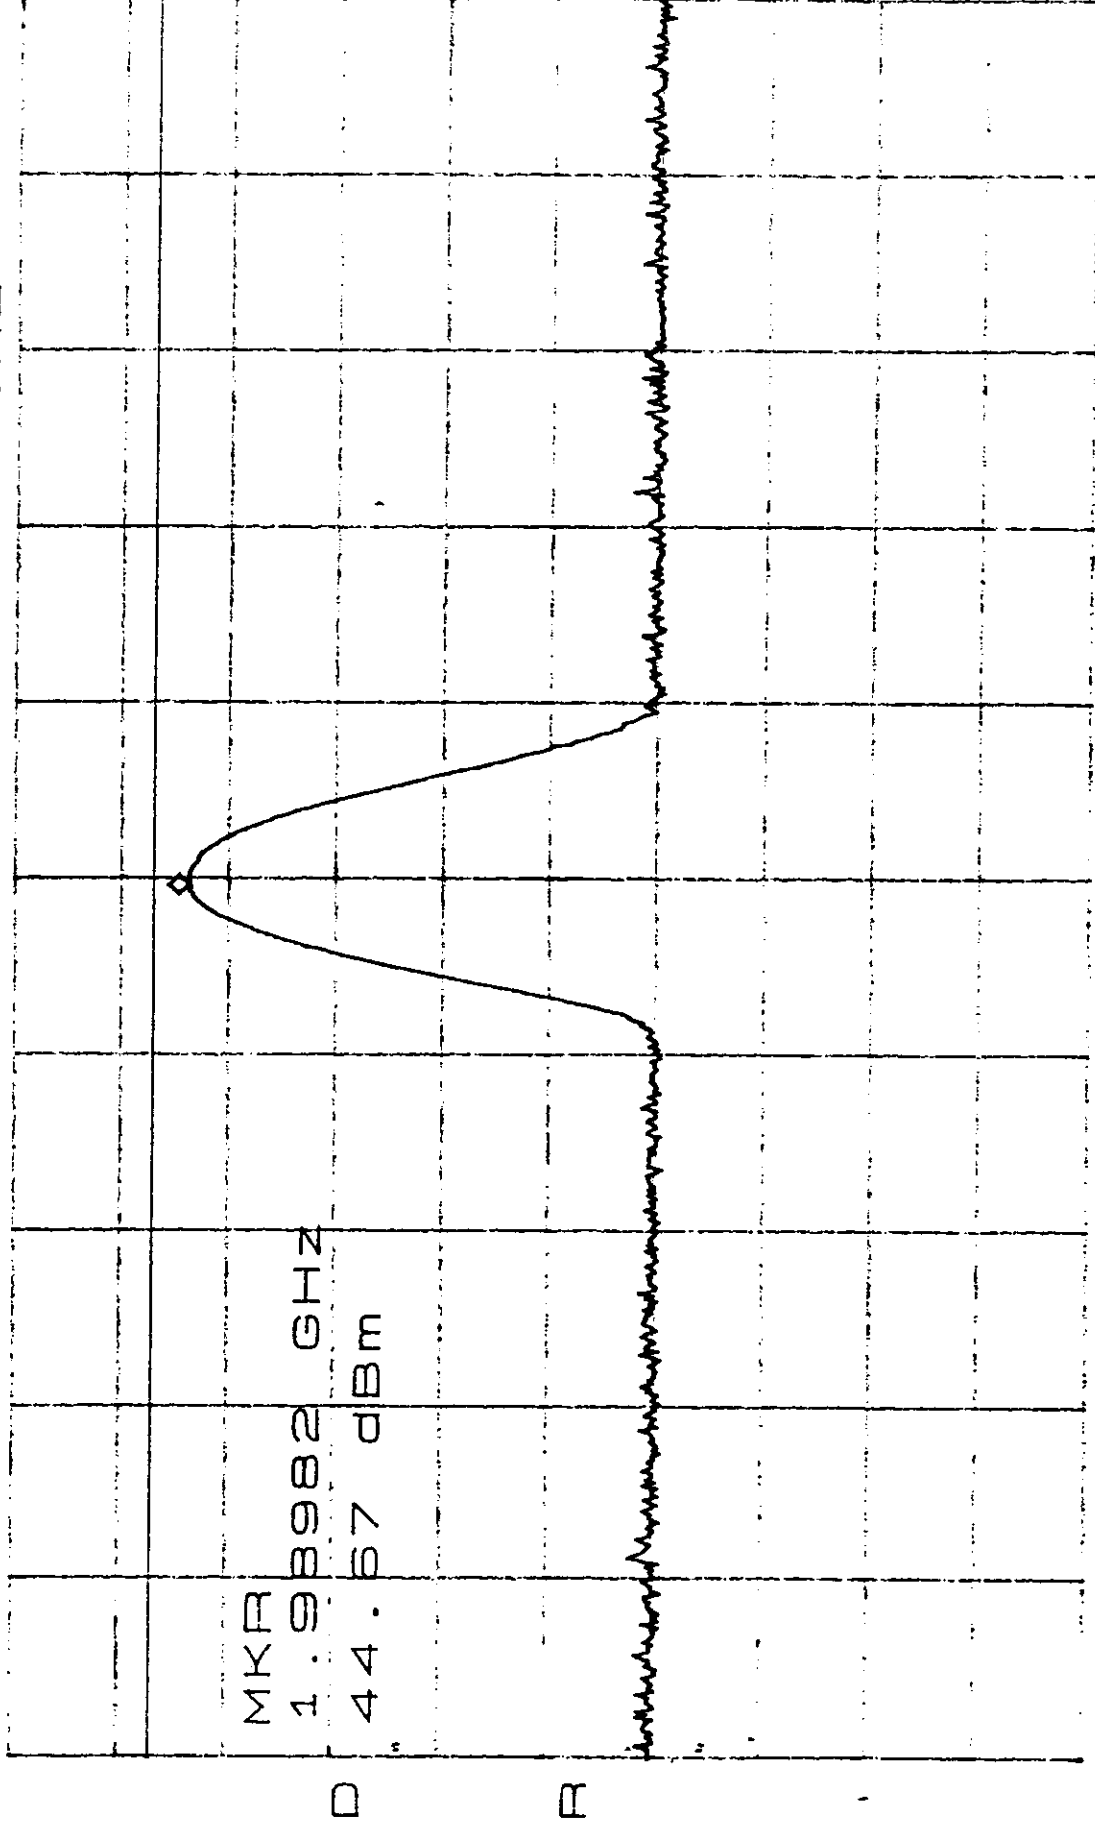

MKR
1.98982 GHz
44.67 dBm

CENTER 1.98998GHz

SPAN 50.00MHz

*RBW 2.0MHz

*VBW 3.0MHz

SWP 50ms



SUBJECT: Spurious Emissions at
Antenna Terminals
FCC Part 24

MET REPORT: EMI9333
MFG: NOKIA
TESTED BY: Kenneth Bass
TEST DATE(S): 14 Jan 1998

EUT: 3 dB Booster Module
MODEL: TBUL11

Comment: Equipment complies with Section 2.991. Spurious emissions were measured at the antenna terminal with the Transmitter tuned to transmit on a frequency in the low, middle, and high end of its tuneable range. Summaries of the highest emissions appear on the following pages. The following data is a summary of the emissions present with the Transmitter tuned to a frequency in the low end of operating range.

SUMMARY OF SPURIOUS EMISSIONS AT ANTENNA TERMINALS - BLOCK A

Frequency Range	Emission Frequency	Emission Level (dBm)	Limit (dBm)
10 kHz - 30 MHz	none	n/a	-13.1
30 - 200 MHz	34.450	-24.00	-13.1
200 MHz - 2.75 GHz	1.016	-24.67	-13.1
2.75 - 5.00 GHz	3.969	-28.00	-13.1
5.00 - 10.0 GHz	5.967	-26.83	-13.1
10 - 20 GHz	none	n/a	-13.1


Plots of the spurious emissions as measured at the antenna port, appear on the following pages.

*ATTEN 20dB

RL 41.0dBm

MKR -45.33dBm

10dB/ 15.20MHZ

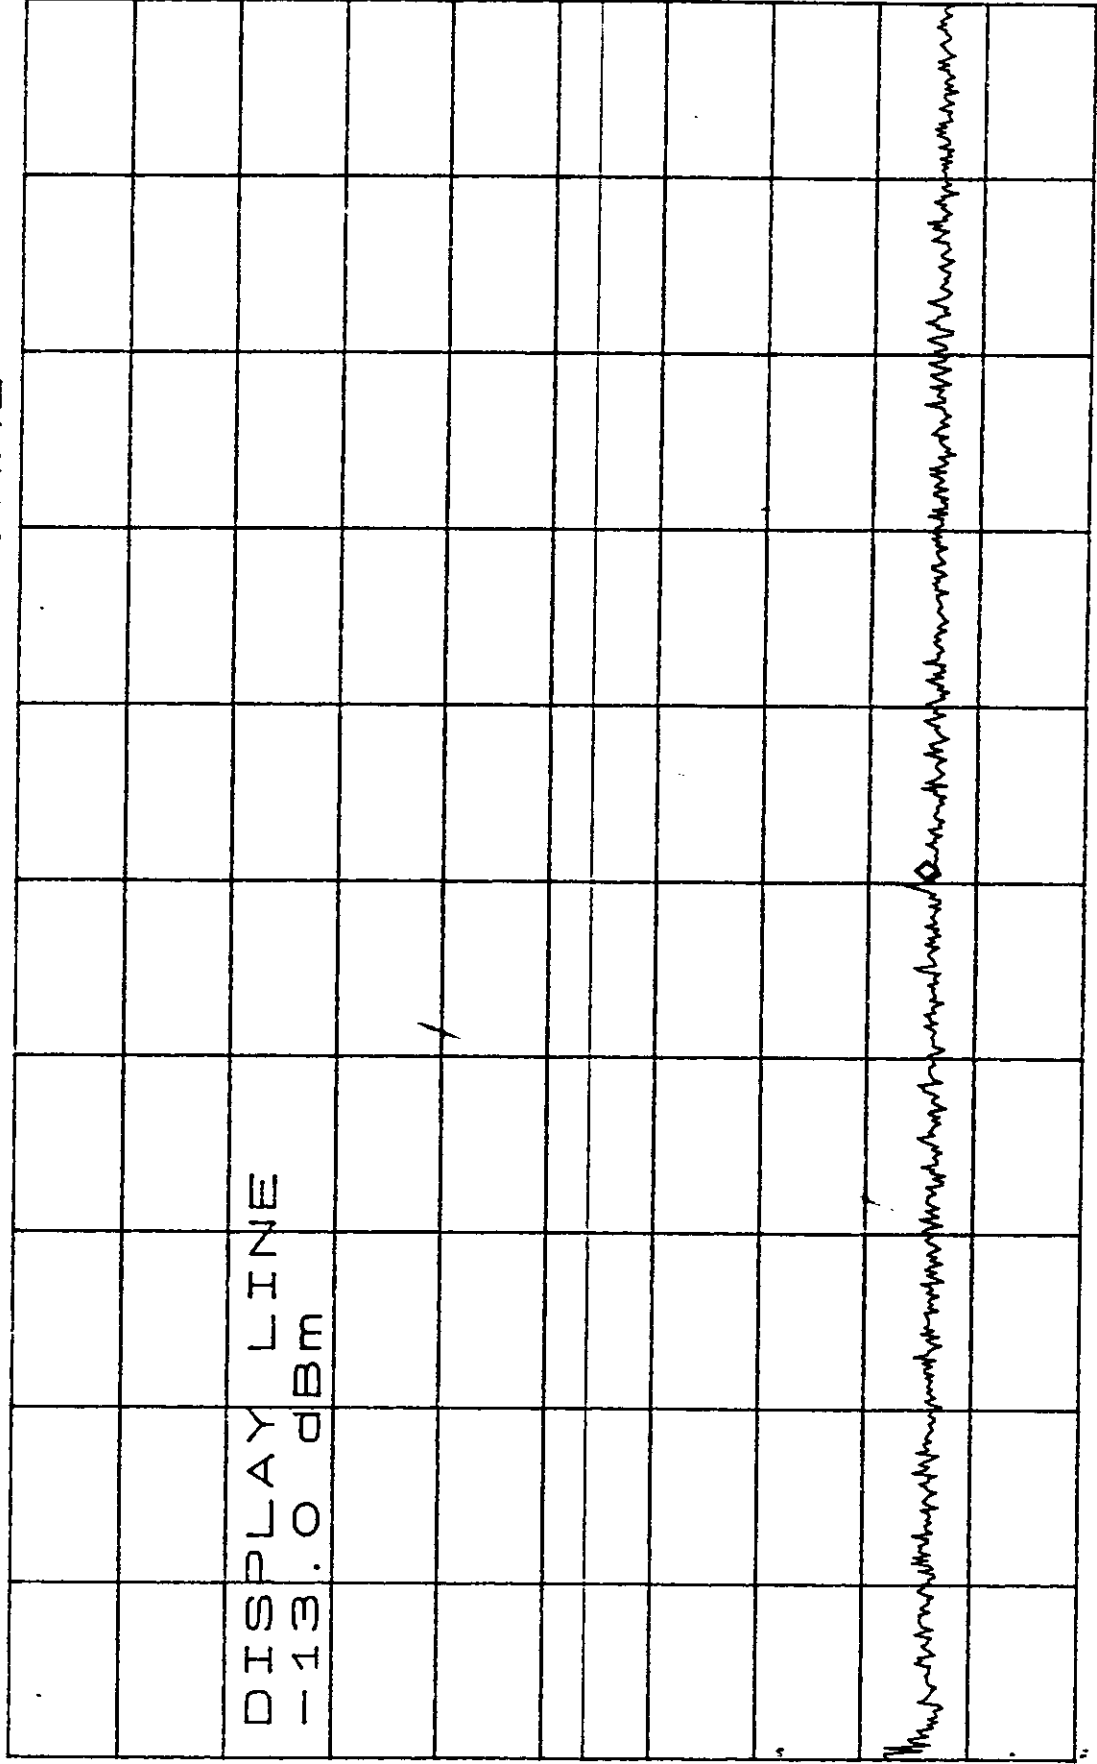

D

R

START 10KHZ

STOP 30.00MHZ

*RBW 3.0KHZ

*VBW 10KHZ


SWP 8.4sec

*ATTEN 20dB

RL 41.0dBm

MKR -13.67dBm

33.7MHz / 10dB

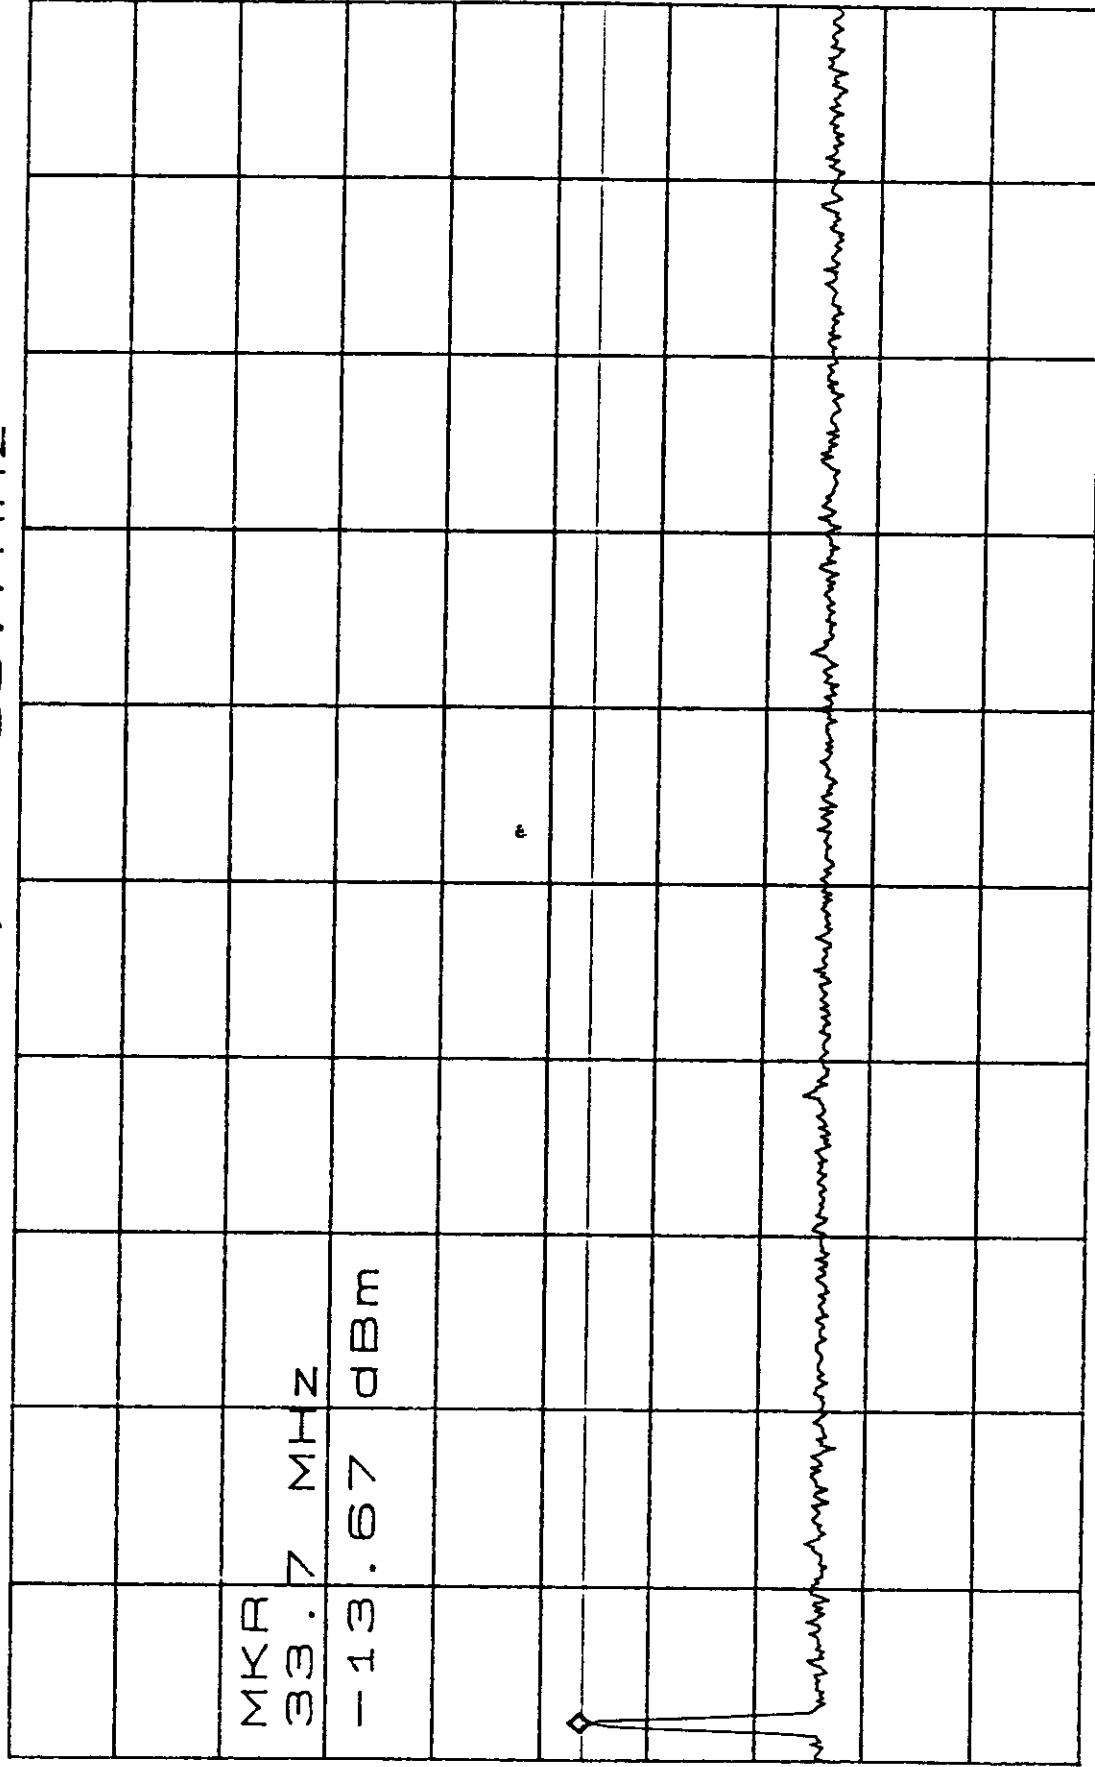

START 30.0MHz

STOP 200.0MHz

RBW 1.0MHz

*V BW 10KHz


SWP 50ms

*ATTEN 20dB

RL 41.0dBm

MKR -24.00dBm

10dB/ 34.450MHZ

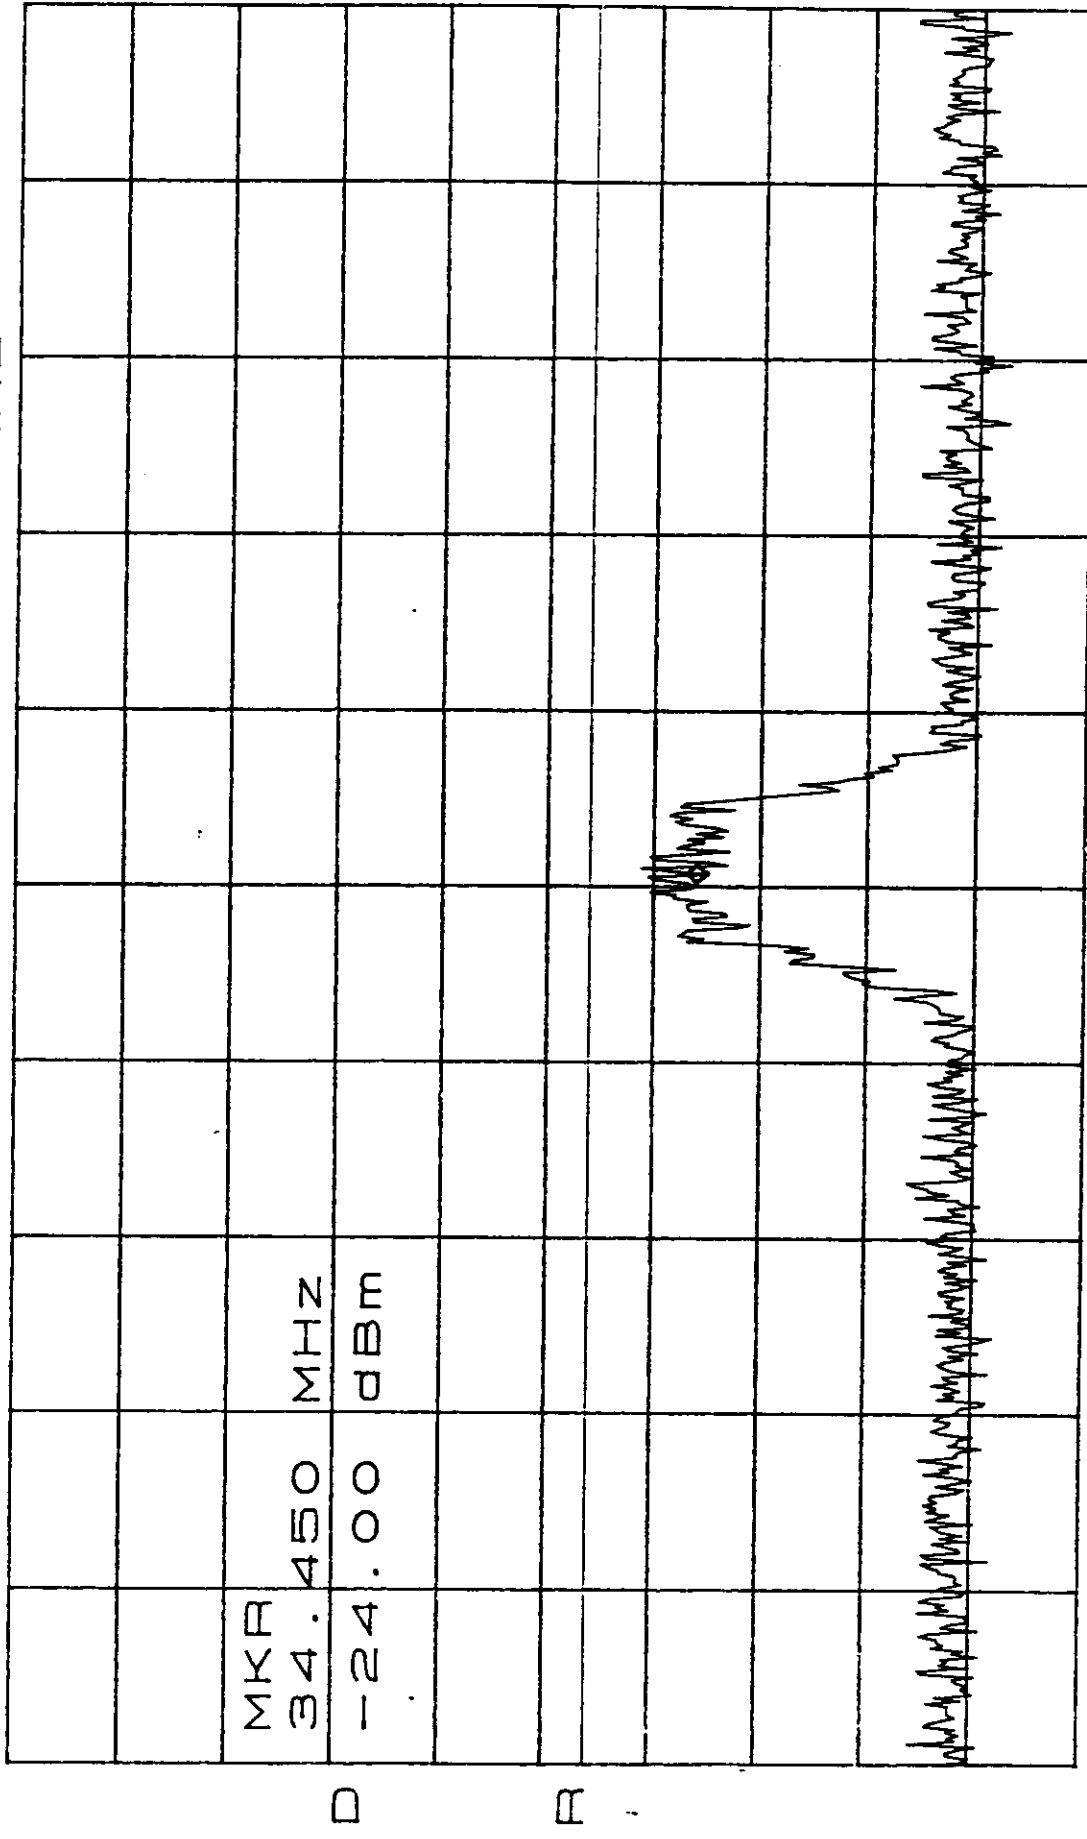

CENTER 34.437MHZ

RBW 30KHZ

*VBW 10KHZ

SPAN 2.000MHZ


SWP 50ms

*ATTEN 20dB

RL 41.0dBm

MKR -24.67dBm

1.016GHz

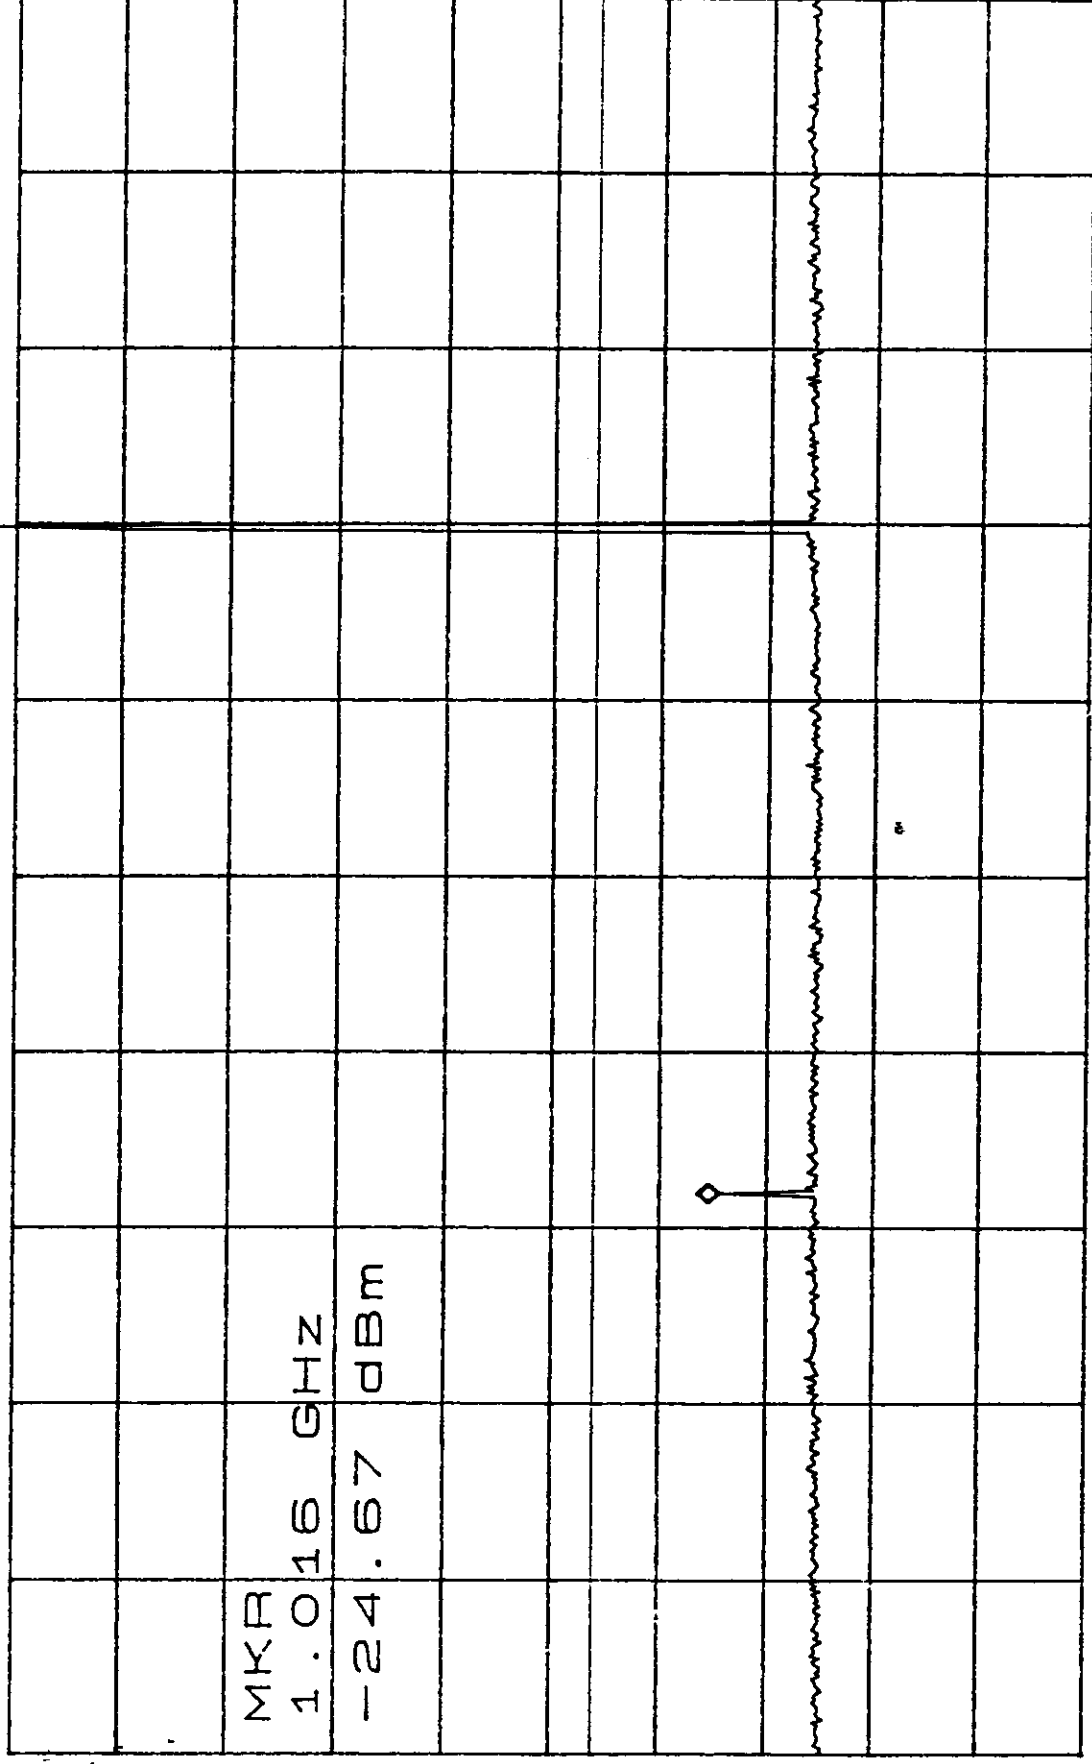

START 200MHz

STOP 2.750GHz

*RBW 1.0MHz

*VBW 10kHz


SWP 640ms

*ATTEN 20dB

RL 41.0dBm

MKR -28.00dBm

10dB/ 3.969GHz

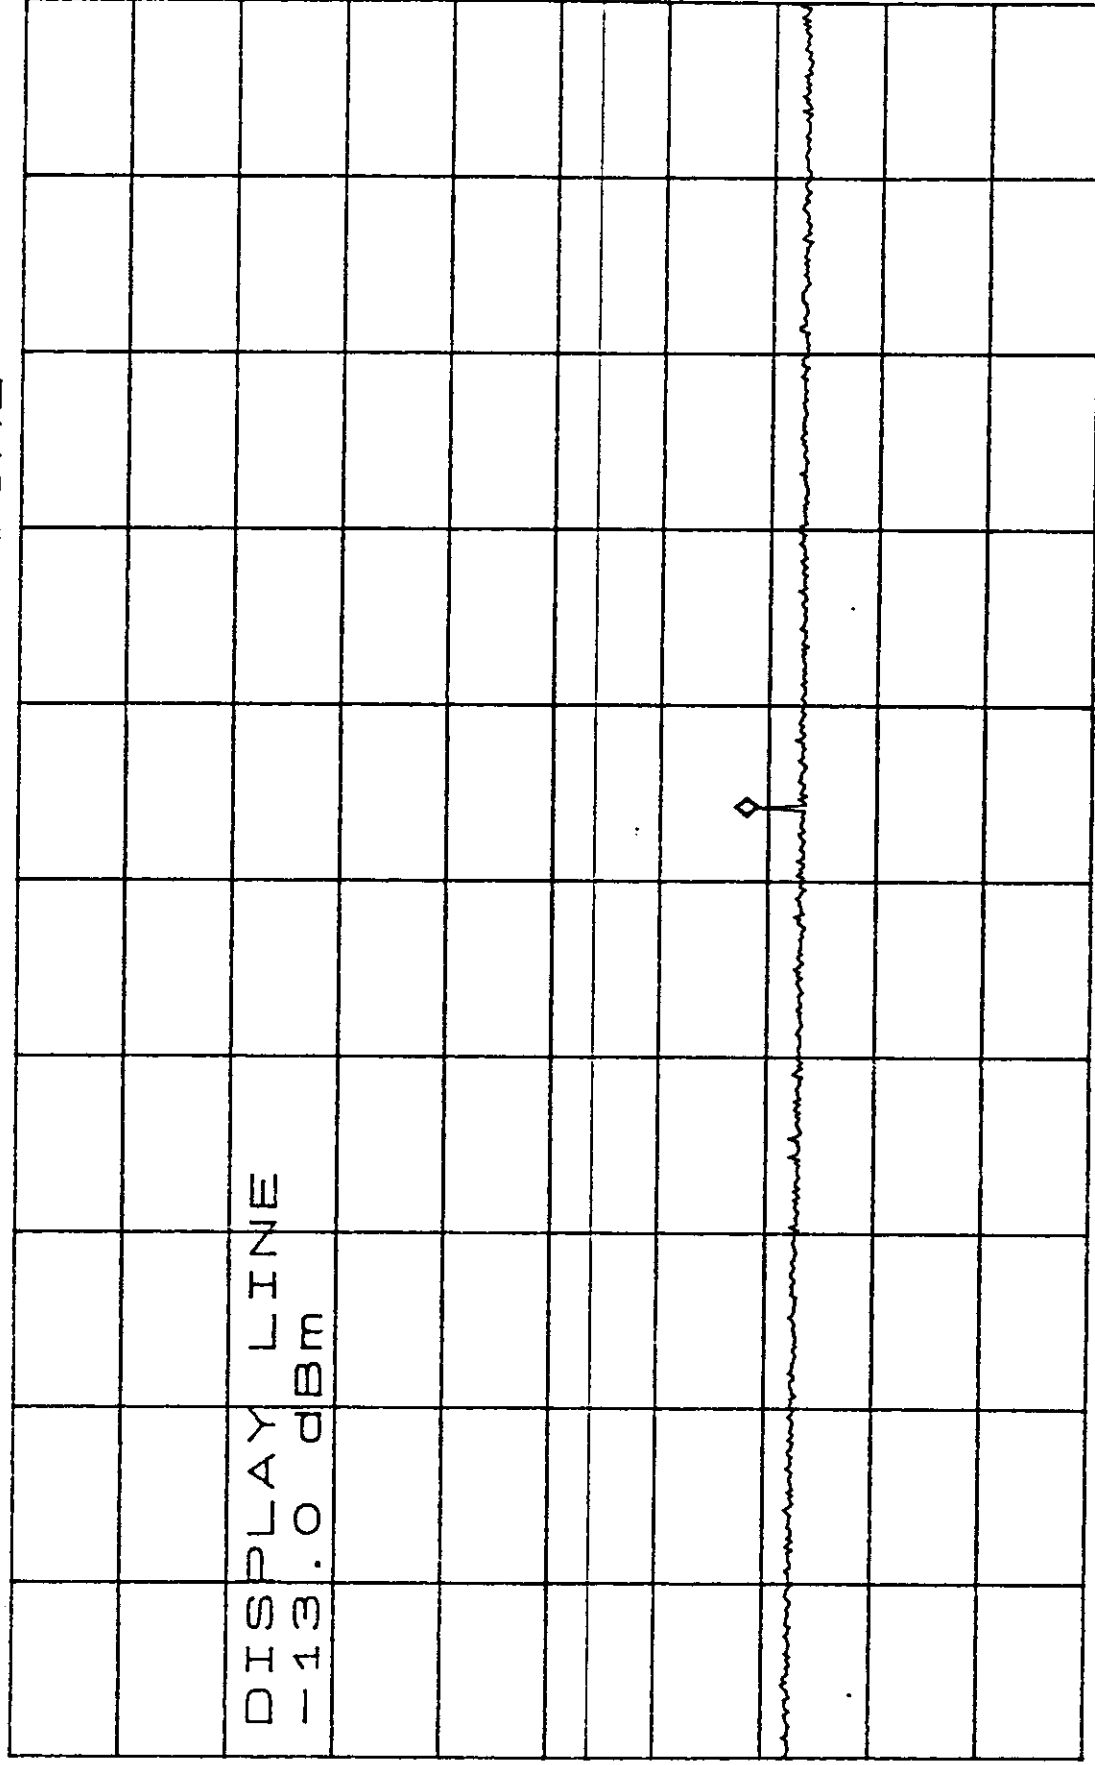

START 2.750GHz

STOP 5.000GHz

*RBW 1.0MHz

*VBW 10kHz


SWP 570ms

*ATTEN 20dB

RL 41.0dBm

MKR -26.83dBm

10dB/ 5.967GHz

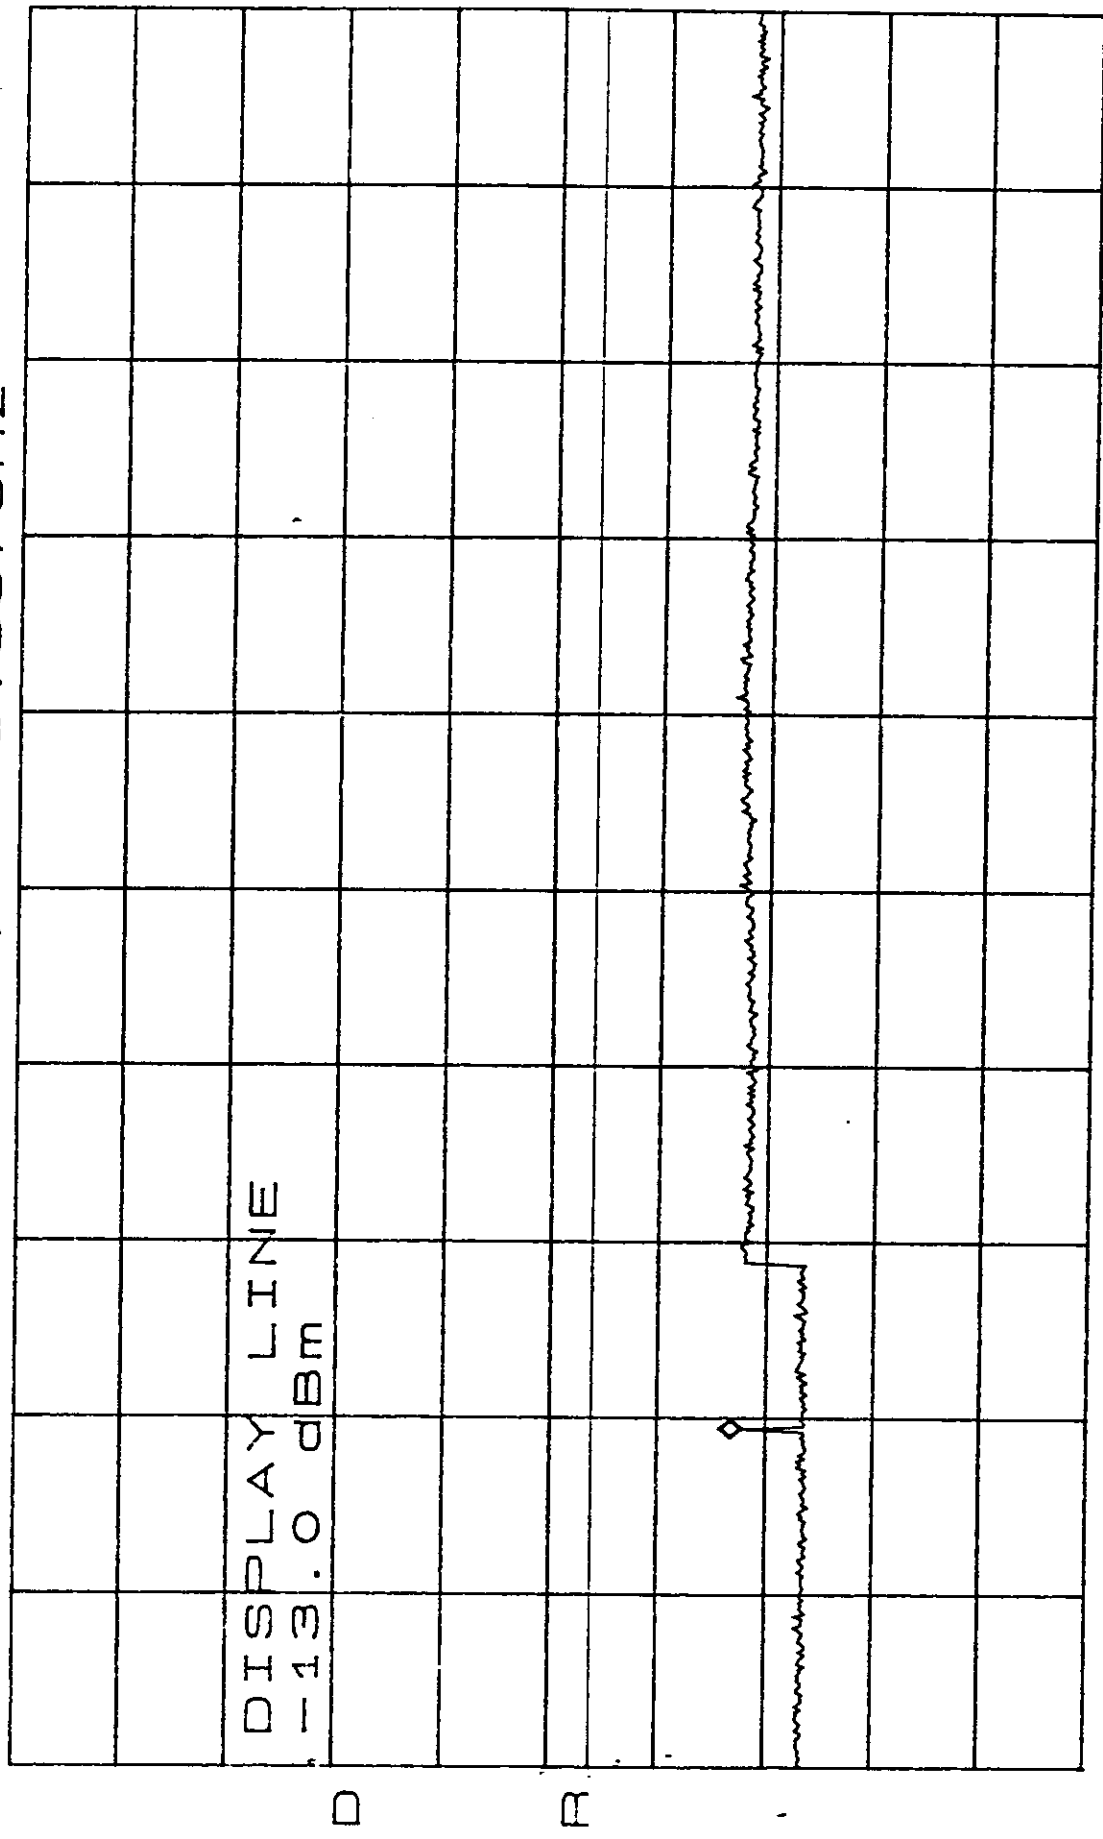

START 5.000GHZ

STOP 10.000GHZ

*RBW 1.0MHZ

*VBW 10KHZ


SWP 1.3sec

*ATTEN 20dB

RL 41.0dBm

MKR -19.83dBm

10dB/ 15.00GHZ

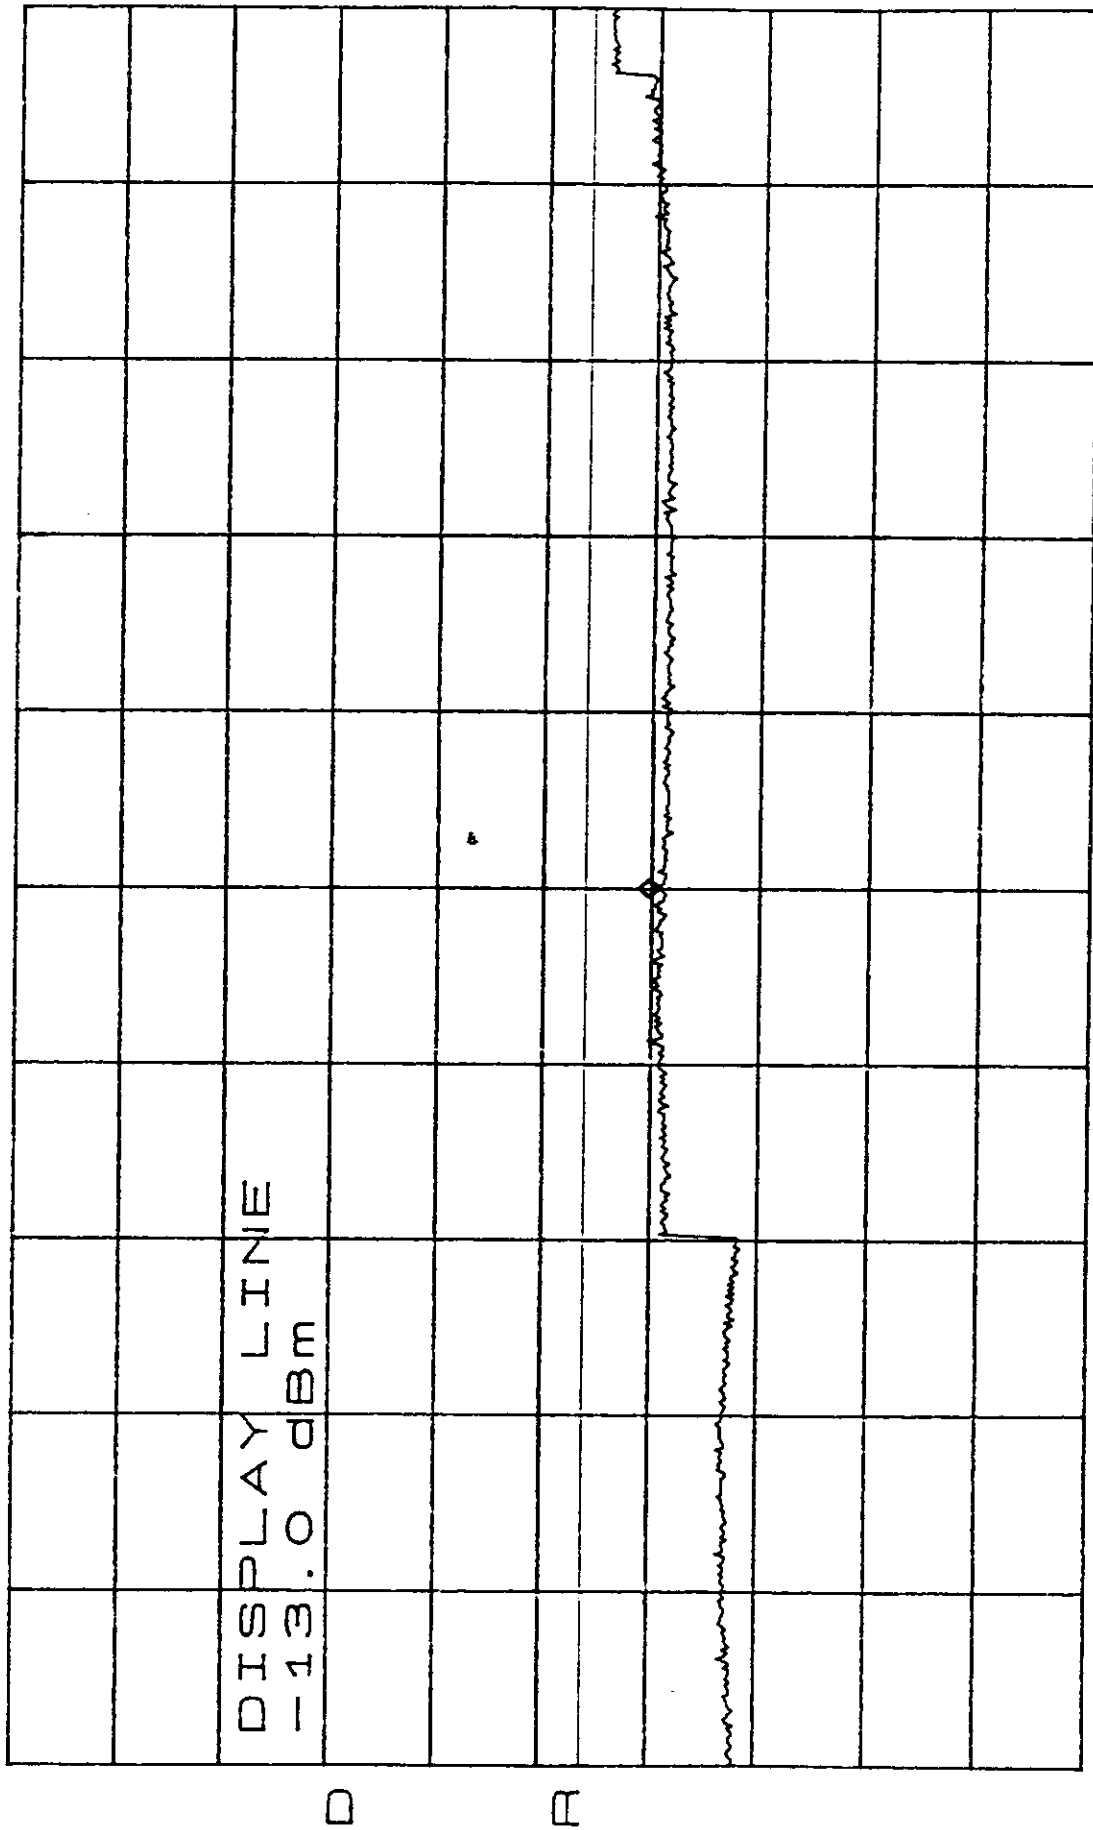

START 10.00GHZ

STOP 20.00GHZ

*RBW 1.0MHZ

*VBW 10KHZ

SWP 2.5sec



SUBJECT: Spurious Emissions at
Antenna Terminals
FCC Part 24

MET REPORT: EMI9333
MFG: NOKIA
TESTED BY: Kenneth Bass
TEST DATE(S): 14 Jan 1998

EUT: 3 dB Booster Module
MODEL: TBUL11

Comment: Equipment complies with Section 2.991. The transmitter was tuned to transmit at a frequency in the center of the frequency range of operation.

SPURIOUS EMISSIONS AT ANTENNA TERMINALS - BLOCK E

Frequency Range	Emission Frequency	Emission Level (dBm)	Limit (dBm)
10 kHz - 30 MHz	4.41 MHz	-19.83	-13.1
30 - 200 MHz	94.6	-32.17	-13.1
200 MHz - 2.7 GHz	971 MHz	-23.17	-13.1
2.7 - 5.0 GHz	3.909	-27.50	-13.1
5.0 - 10 GHz	5.883	-30.00	-13.1
10 - 20 GHz	none	n/a	-13.1


*ATTEN 20dB

MKR -19.83dBm

RL 41.0dBm

10dB/

4.41MHz

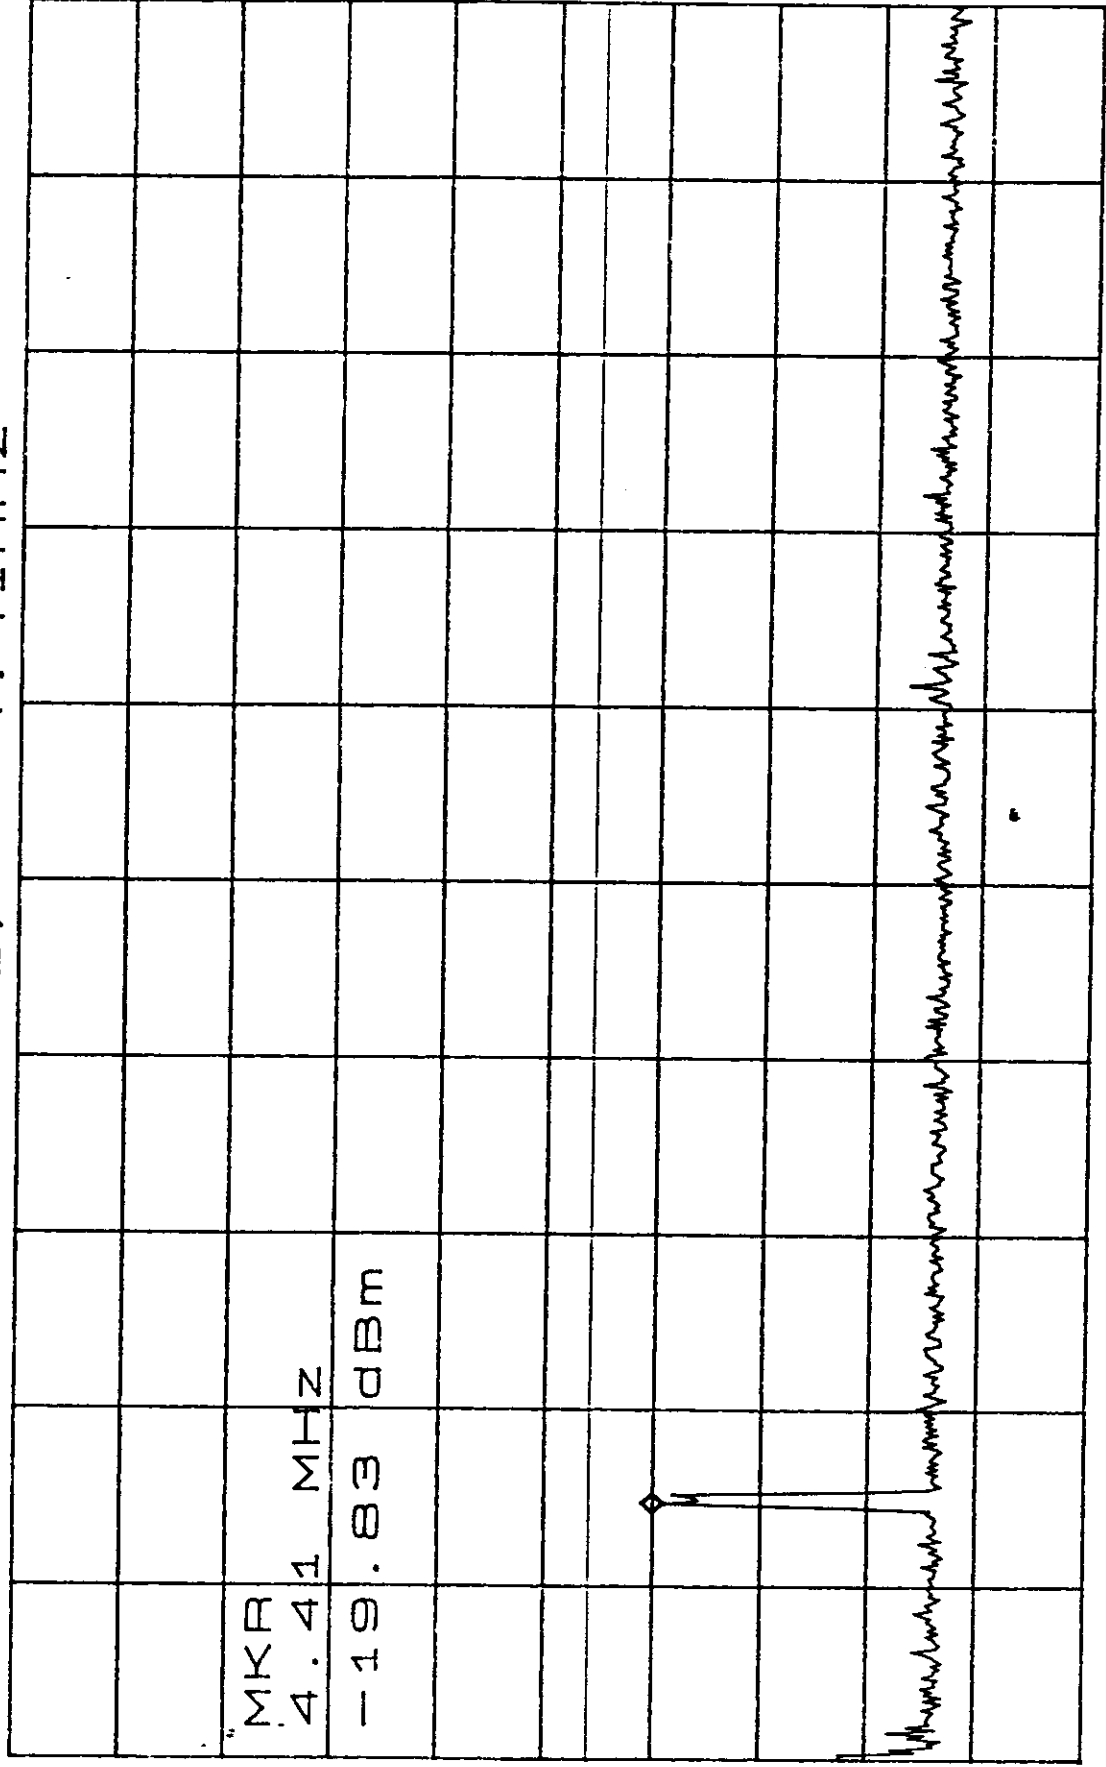

START 10KHZ

STOP 30.00MHZ

*RBW 3.0KHZ

*VBW 10KHZ


SWP 8.4sec

*ATTEN 20dB

RL 41.0dBm

MKR -32.17dBm

10dB/ 94.6MHz

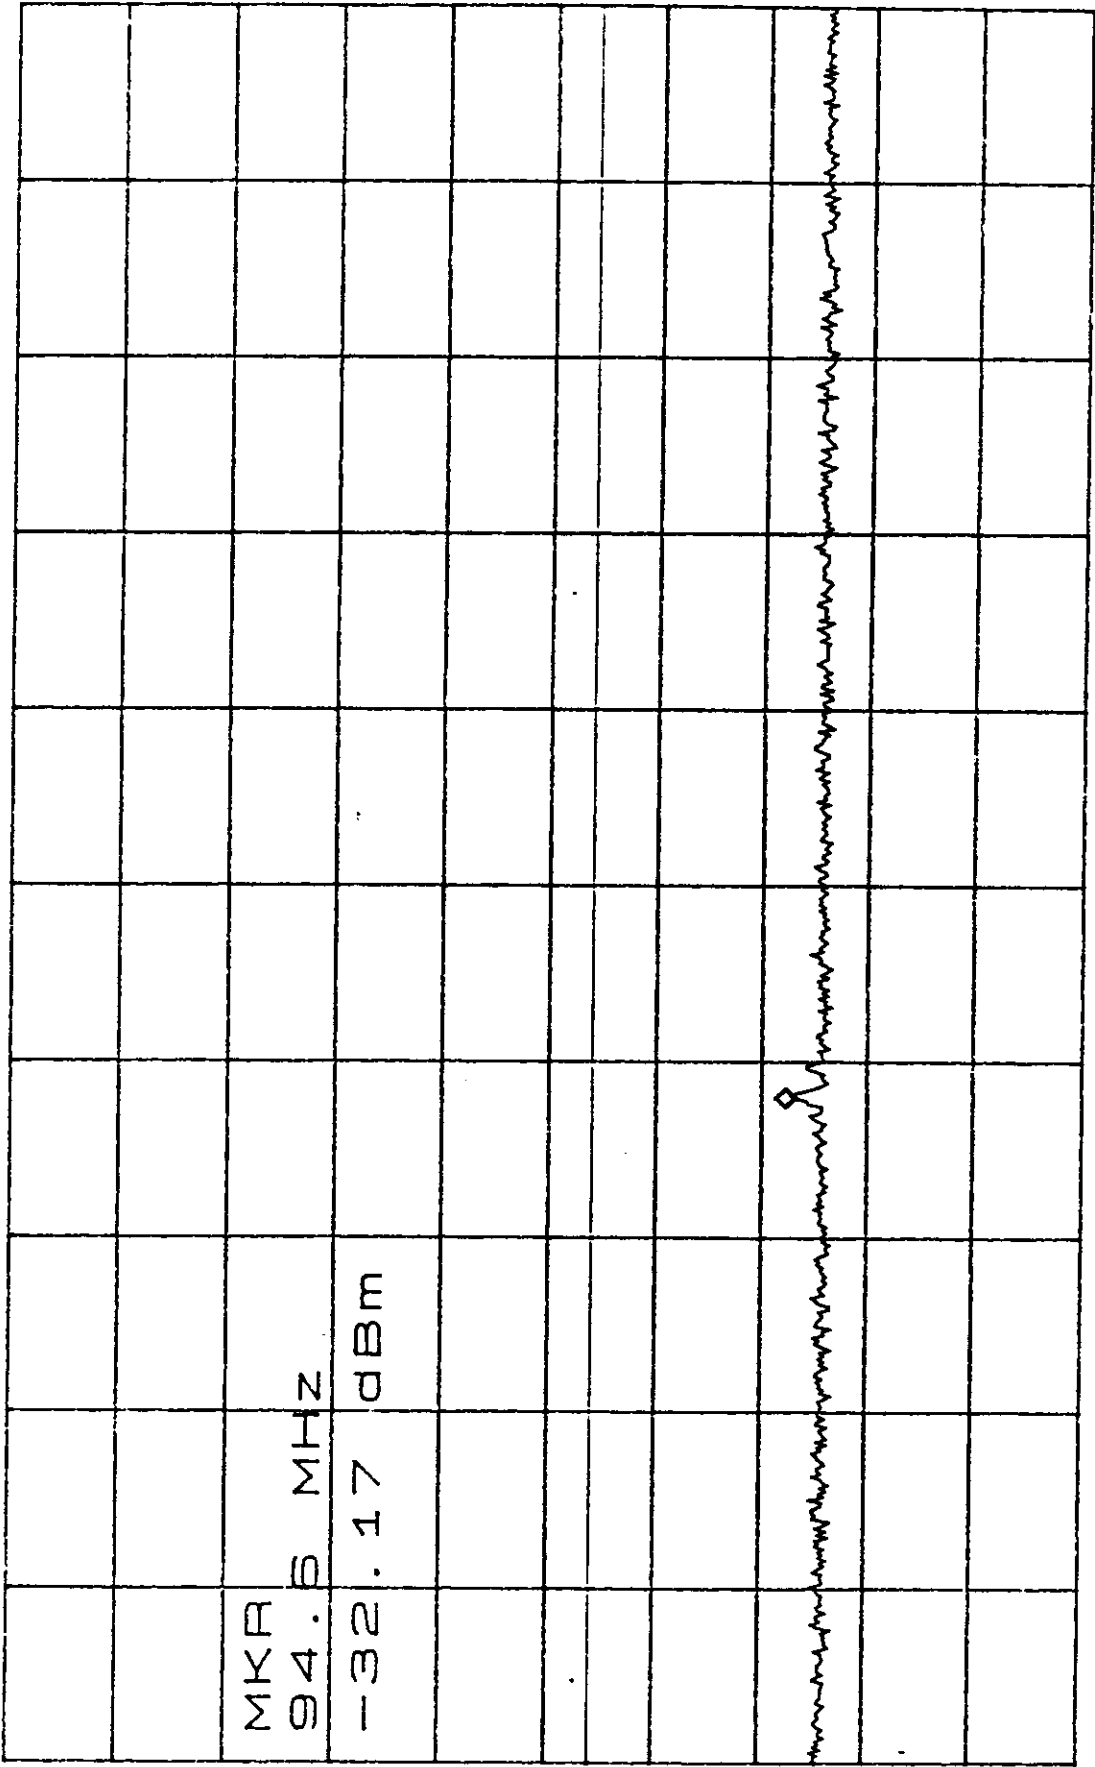

START 30.0MHz

STOP 200.0MHz

*RBW 1.0MHz

*VBW 10kHz


SWP 50ms

*ATTEN 20dB

RL 41.0dBm

MKR -23.17dBm

971MHz / 10dB

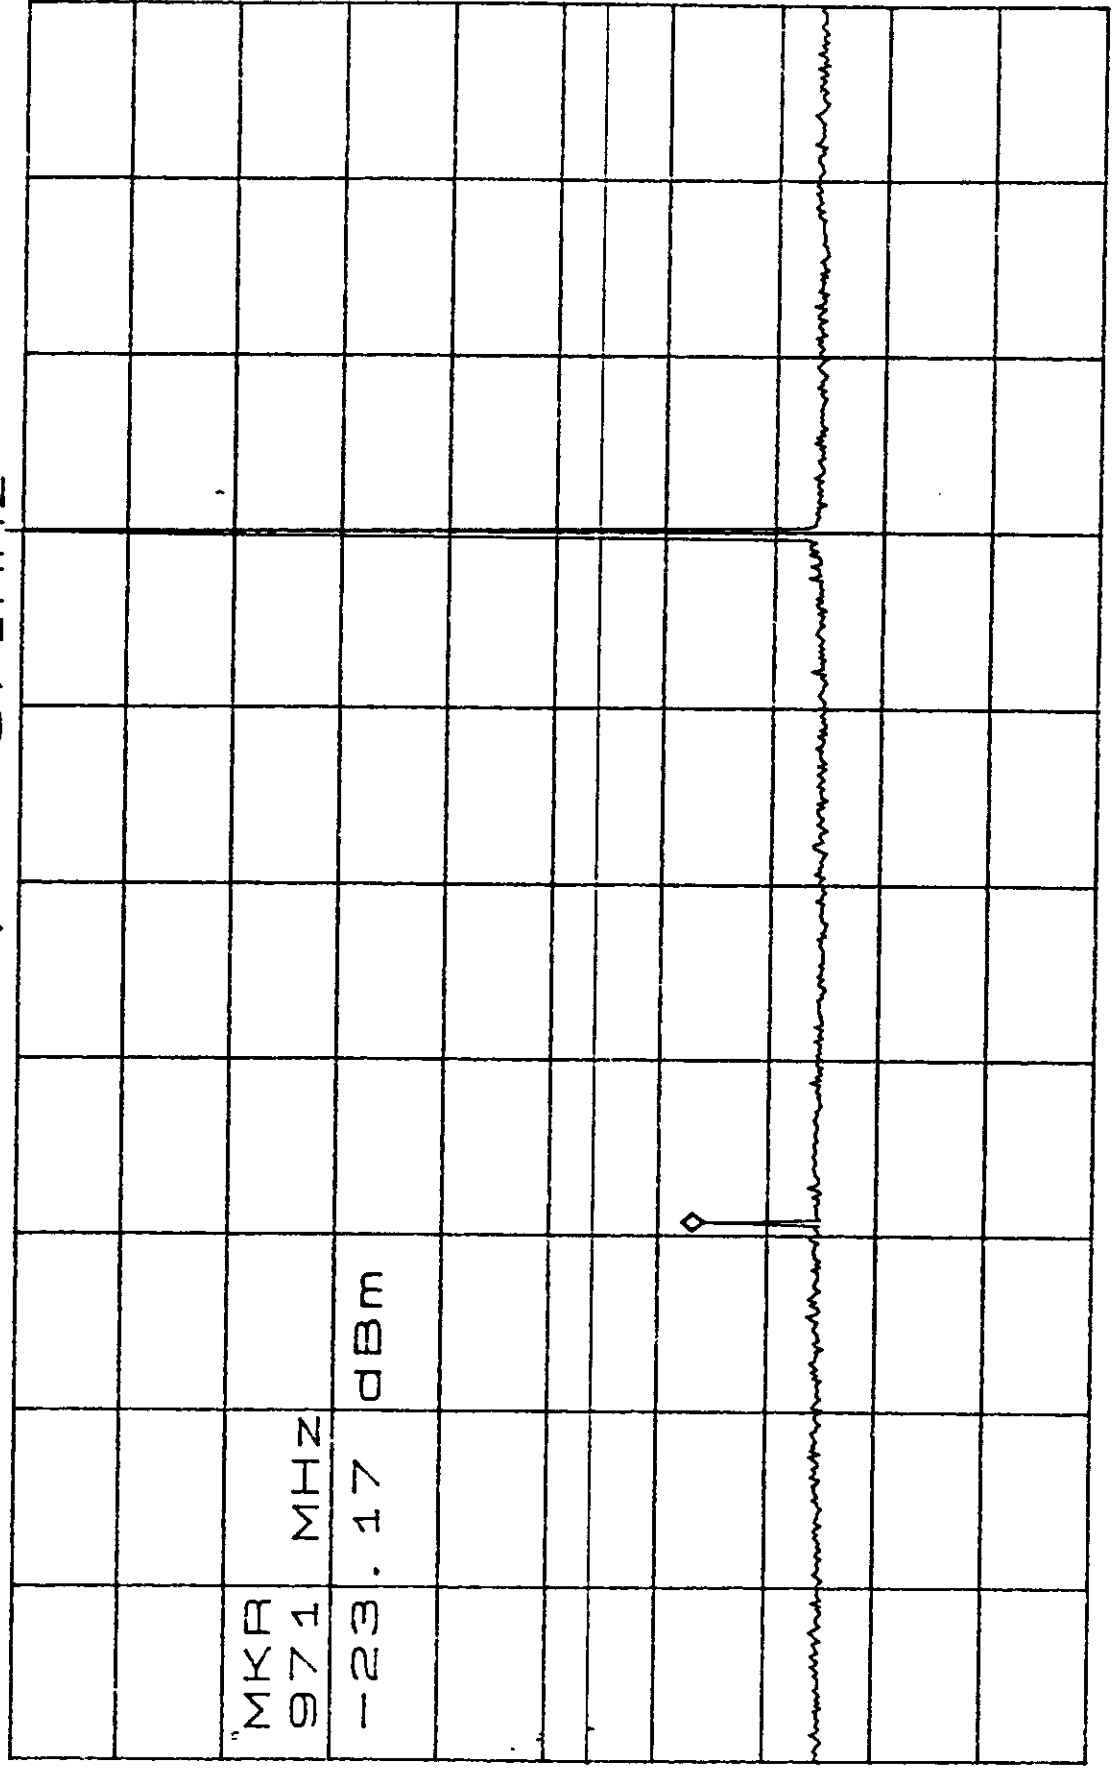

START 200MHz

STOP 2.700GHz

*RBW 1.0MHz

*VBW 10kHz


SWP 630ms

*ATTEN 20dB

RL 41.0dBm

MKR -27.50dBm

10dB/ 3.909GHZ

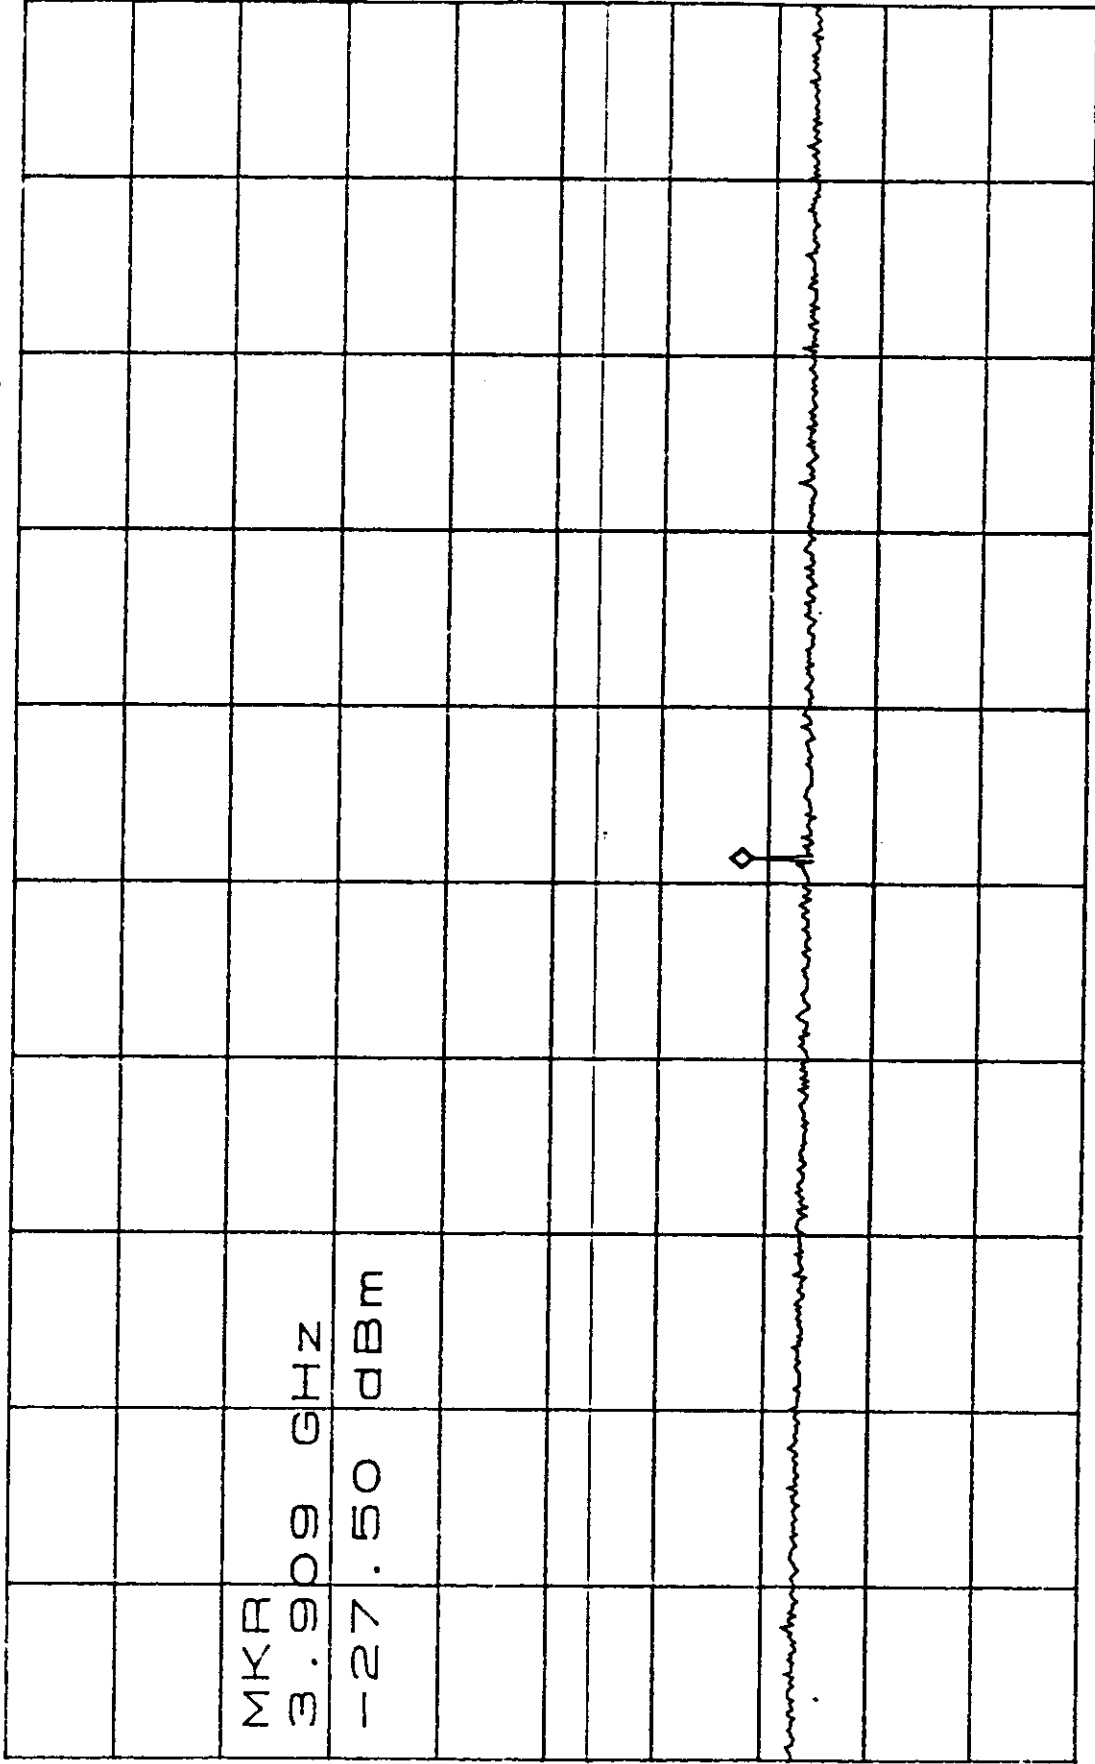

START 2.750GHZ

STOP 5.000GHZ

*RBW 1.0MHZ


*VBW 10KHZ

SWP 570ms

*ATTEN 20dB
RL 41.0dBm

MKR -30.00dBm
5.883GHz

10dB/

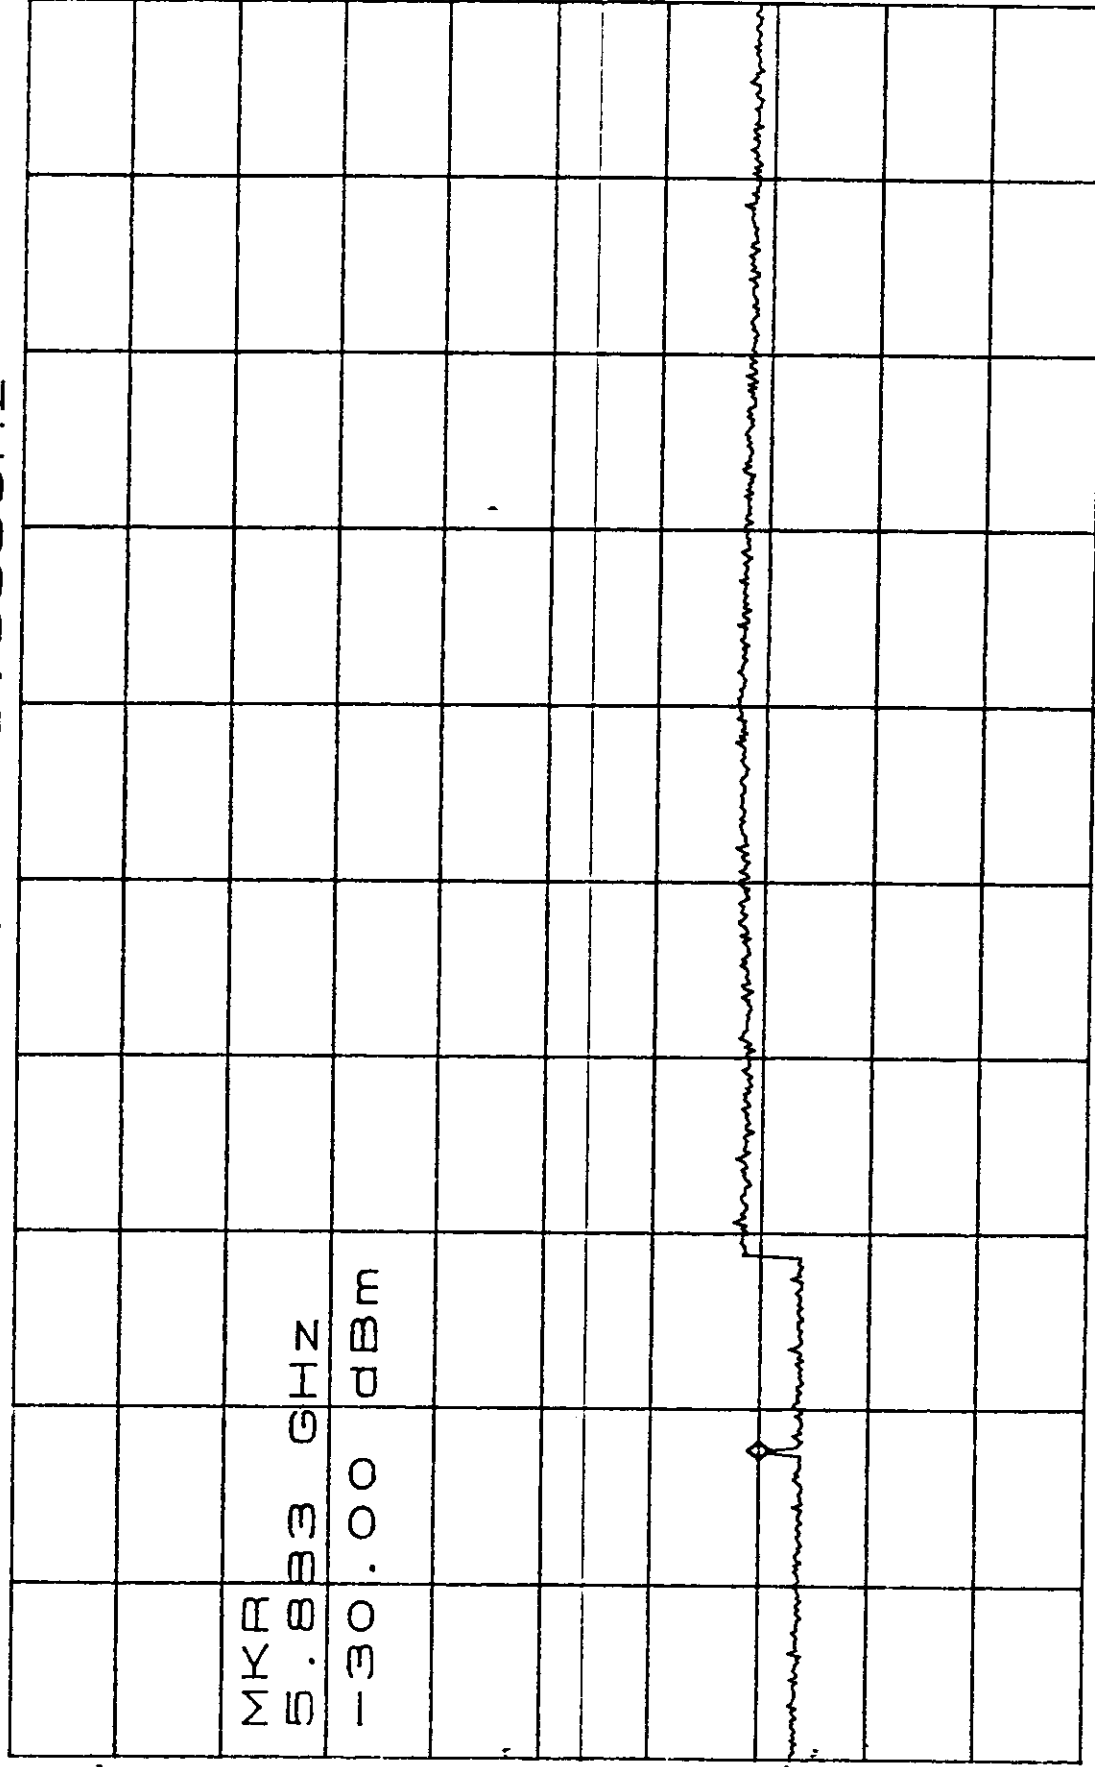

D

R

START 5.000GHz

STOP 10.000GHz

*RBW 1.0MHz


*VBW 10KHz

SWP 1.3sec

*ATTEN 20dB
RL 41.0dBm

MKR -20.17dBm
13.20GHz

10dB/

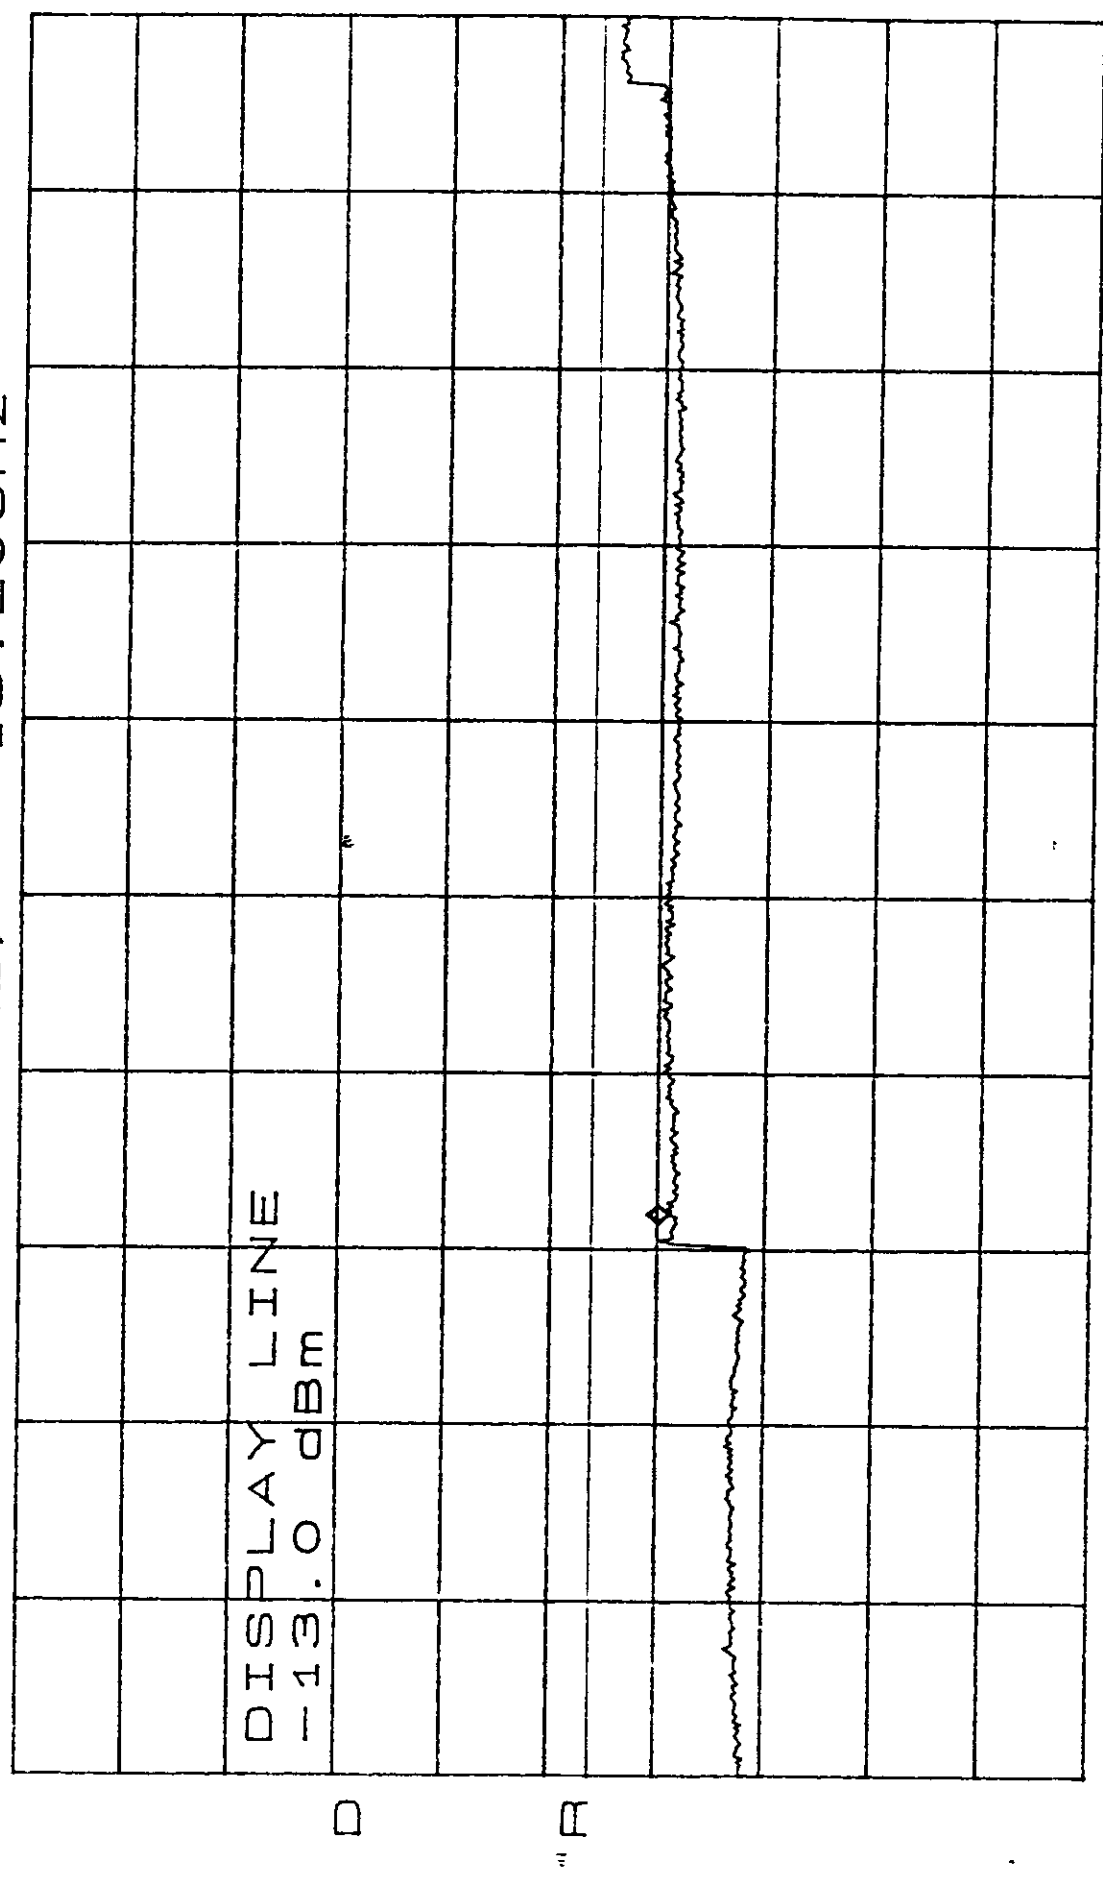

START 10.00GHz

STOP 20.00GHz

*RBW 1.0MHz

*VBW 10kHz

SWP 2.5sec



SUBJECT: Spurious Emissions at
Antenna Terminals
FCC Part 24

MET REPORT: EMI9333
MFG: NOKIA
TESTED BY: Kenneth Bass
TEST DATE(S): 14 Jan 1998

EUT: 3 dB Booster Module
MODEL: TBUL11

Comment: Equipment complies with Section 2.991. Plots of the spurious emissions as measured at the antenna port, appears on the following page.

SPURIOUS EMISSIONS AT ANTENNA TERMINALS - BLOCK C


Frequency Range	Emission Frequency	Emission Level (dBm)	Limit (dBm)
10 kHz - 30 MHz	510 KHz	-34.17	-13.1
30 - 200 MHz	97.4	-32.67	-13.1
200 MHz - 2.75 GHz	927 MHz	-23.50	-13.1
2.75 - 5.0 GHz	3.849	-27.67	-13.1
5.0 - 10 GHz	none	n/a	-13.1
10 - 20 GHz	none	n/a	-13.1

*ATTEN 20dB

PL 41.0dBm

MKR -34.17dBm

510KHZ 10dB/

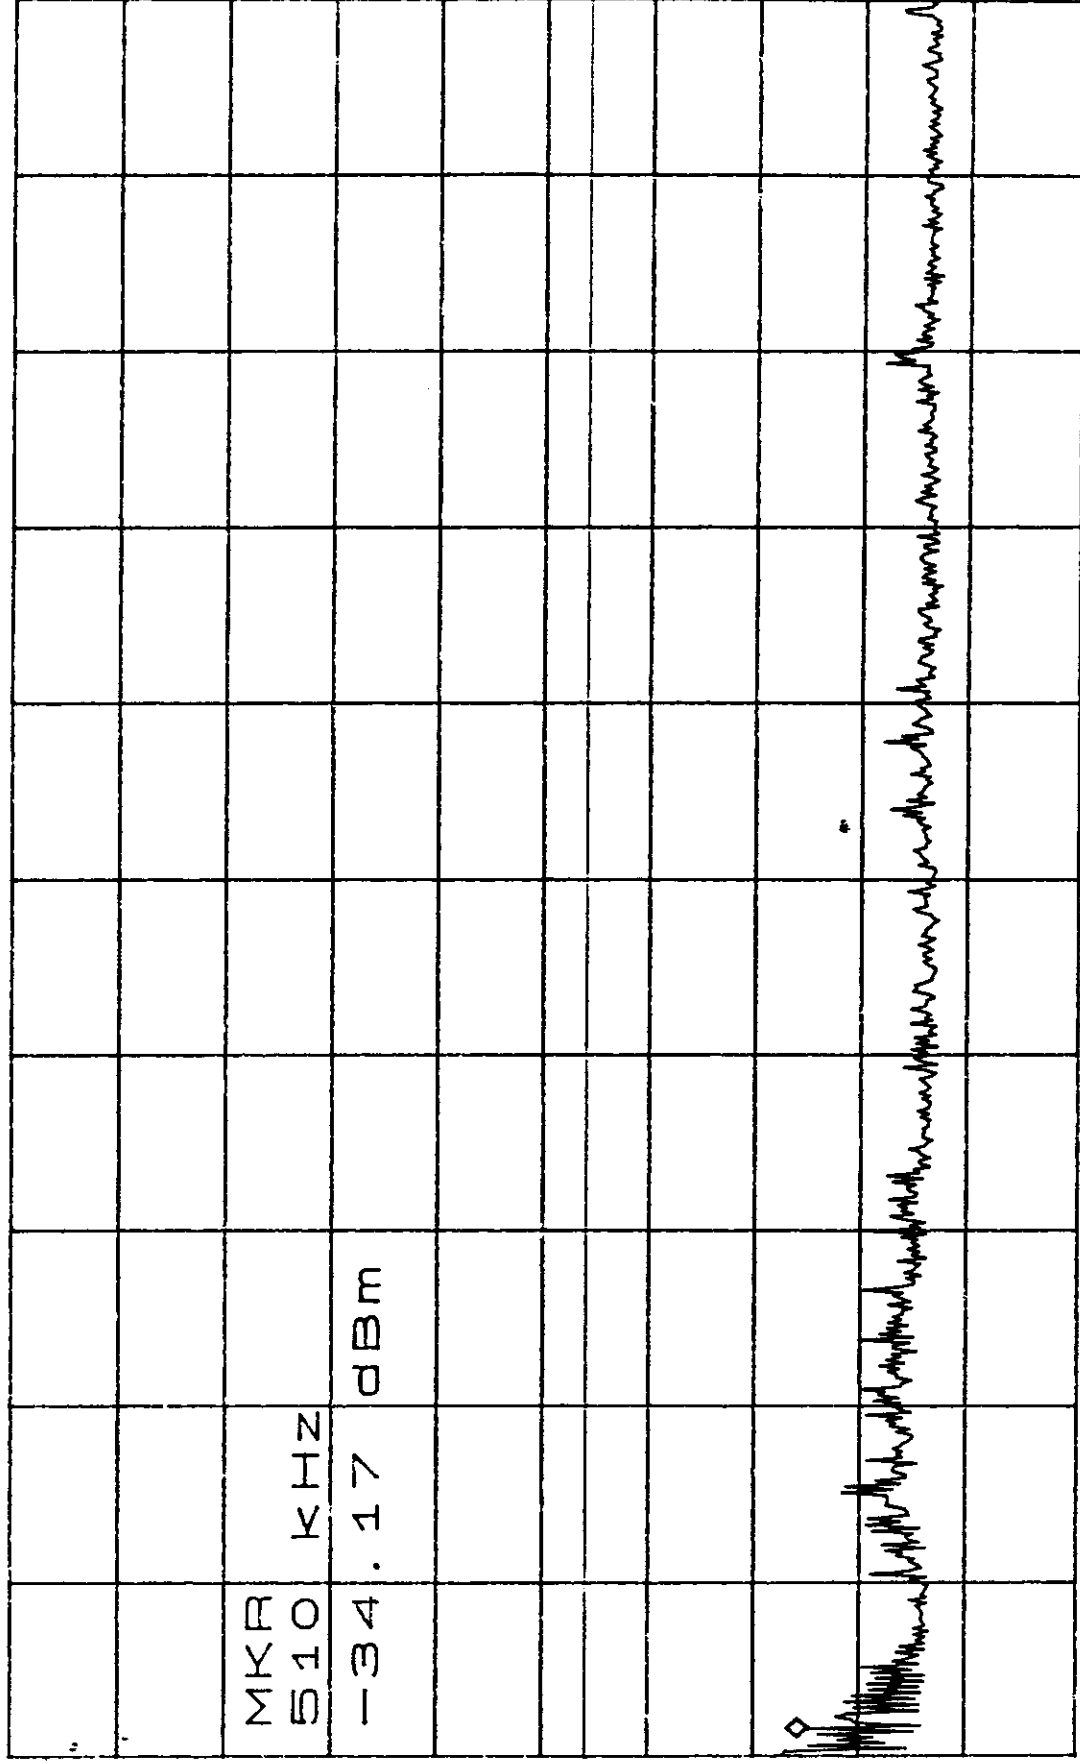

START 10KHZ

STOP 30.00MHZ

*RBW 3.0KHZ

*VBW 10KHZ


SWP 8.4sec

*ATTEN 20dB

RL 41.0dBm

MKR -32.67dBm

10dB/ 97.4MHz

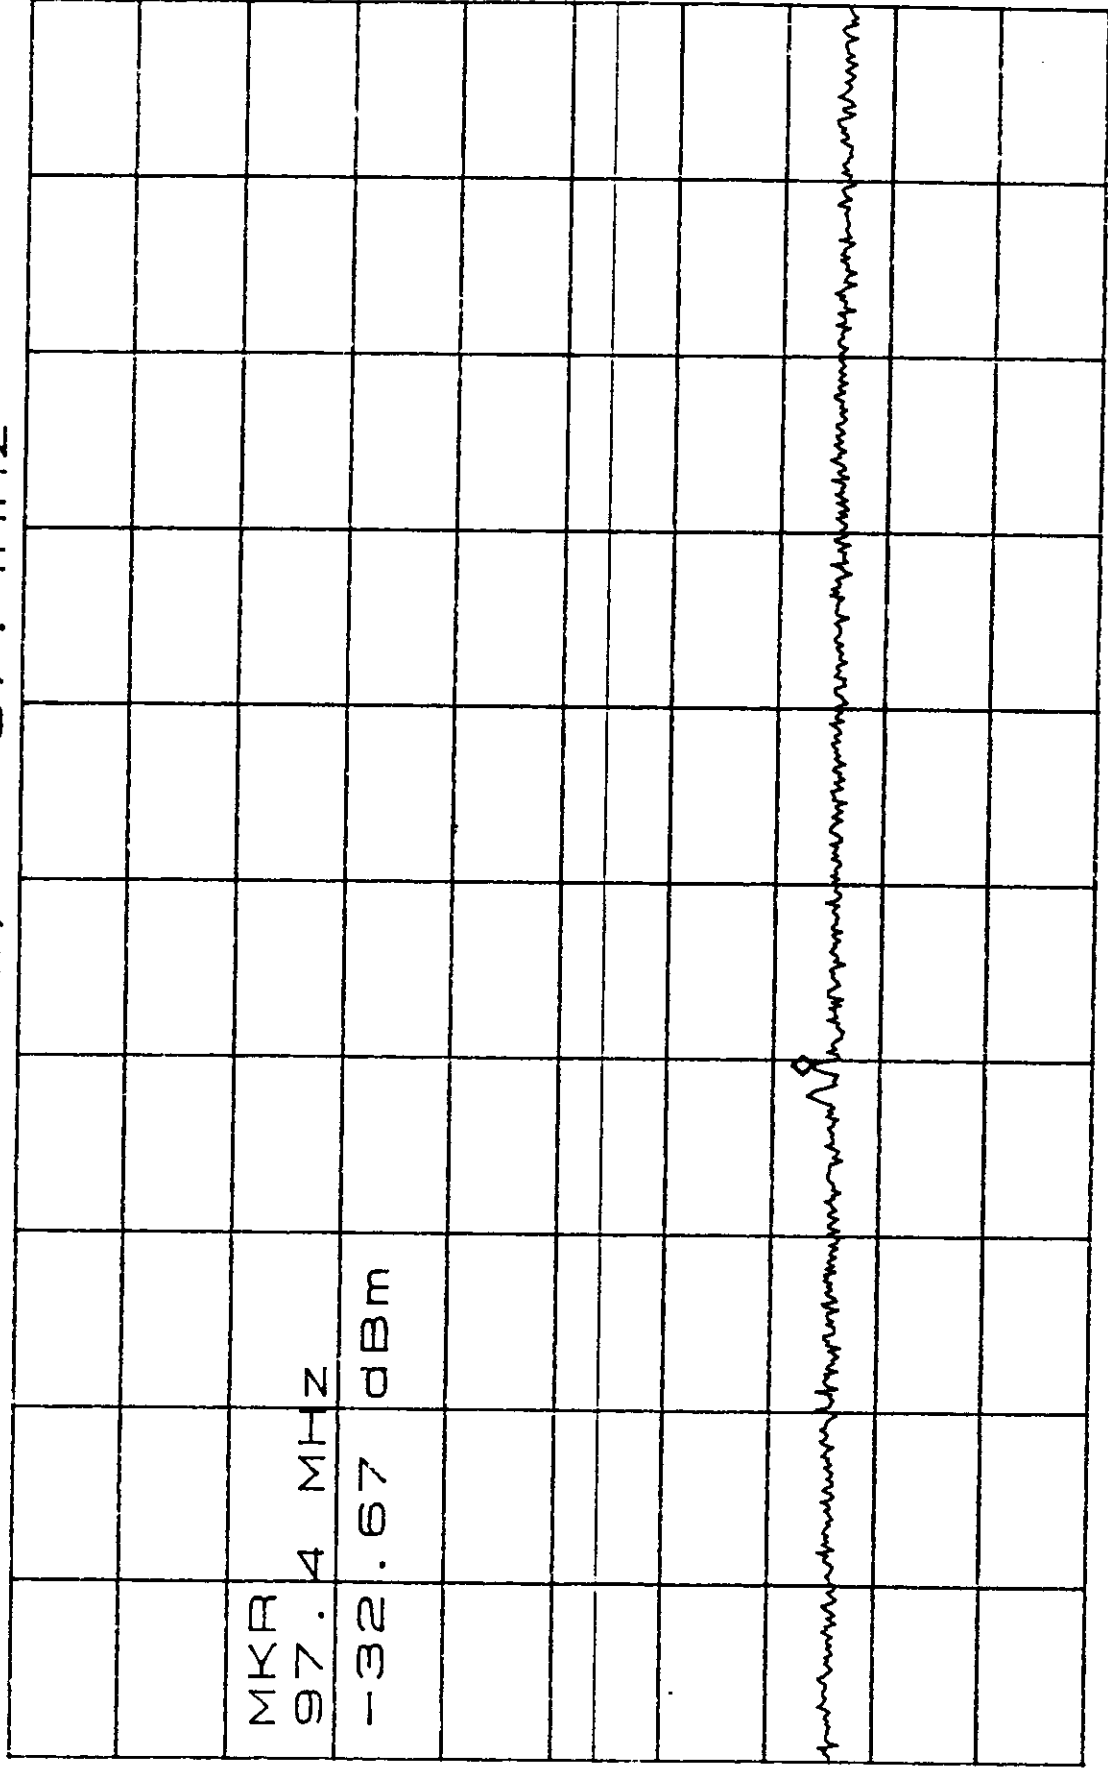

START 30.0MHz

STOP 200.0MHz

*RBW 1.0MHz

*VBW 10kHz

SWP 50ms


*ATTEN 20dB

RL 41.0dBm

MKR -23.50dBm

10dB/

927MHz

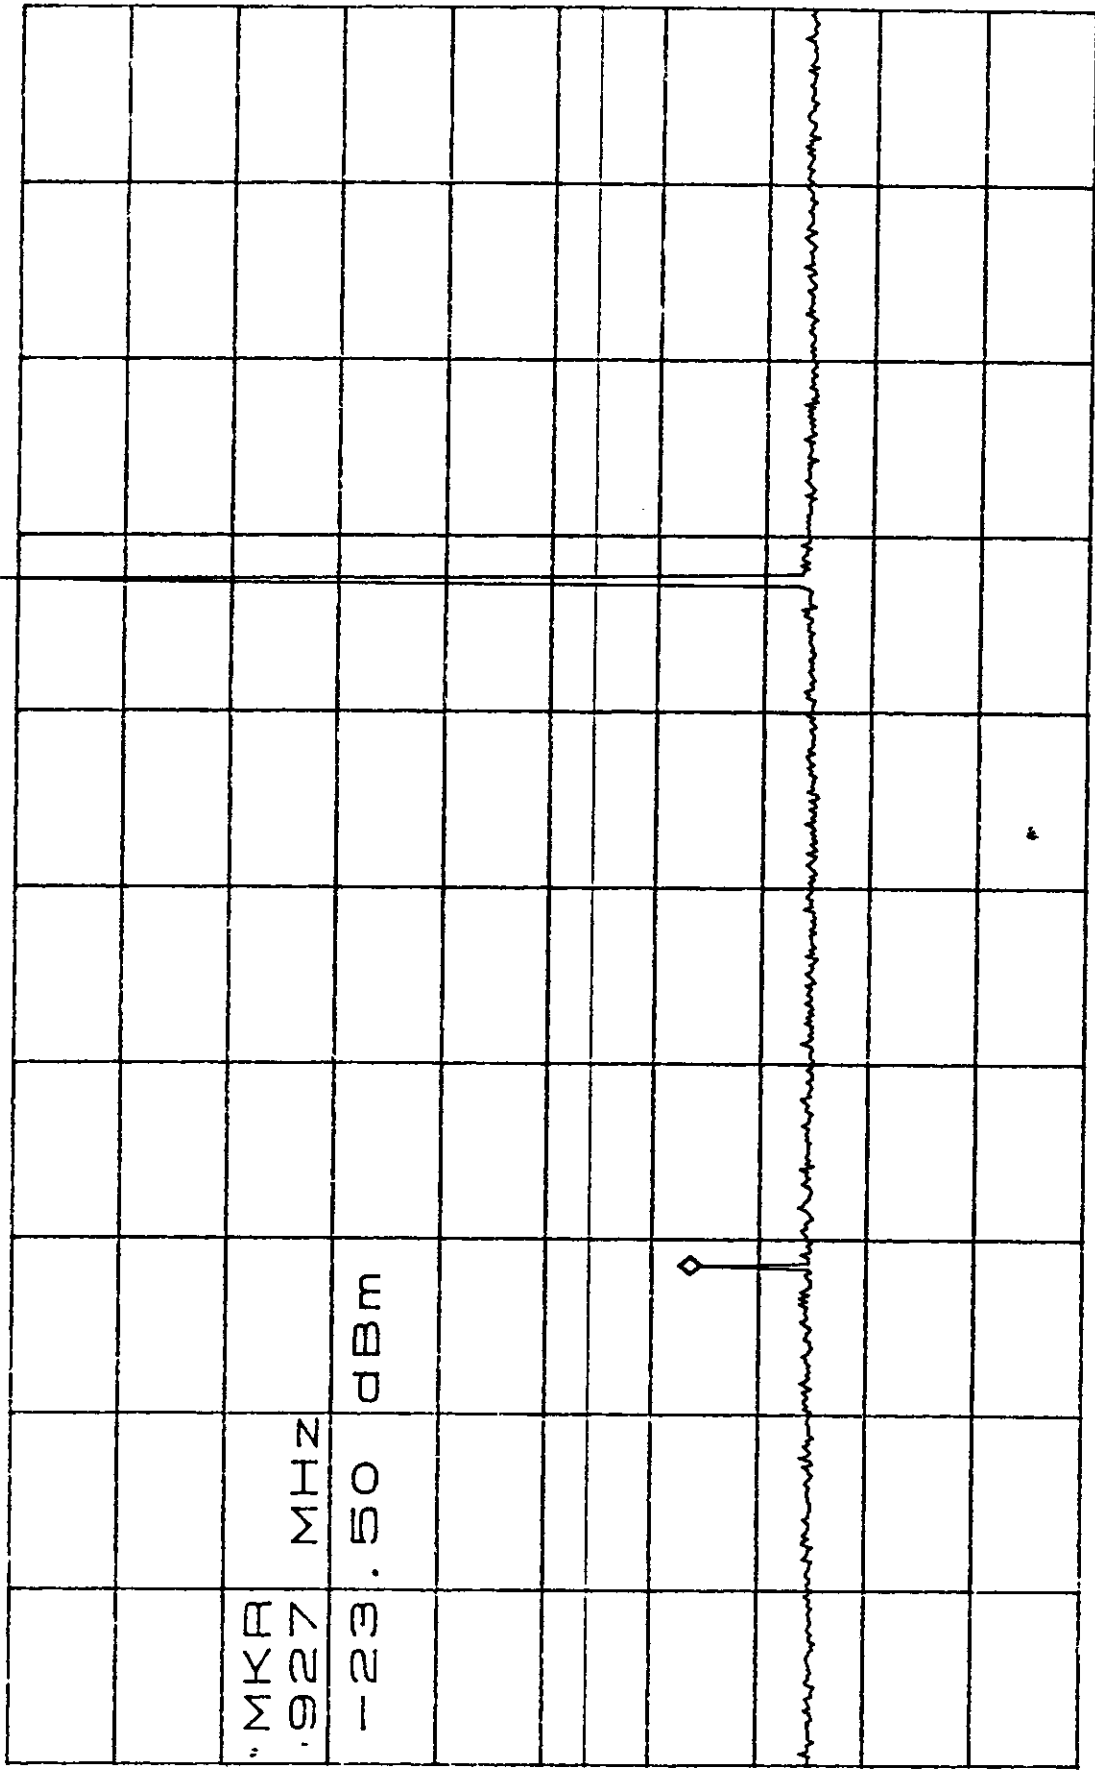

START 200MHz

STOP 2.750GHz

*RBW 1.0MHz

*VBW 10kHz


SWP 640ms

*ATTEN 20dB

RL 41.0dBm

MKR -27.67dBm

3.849GHz 10dB/

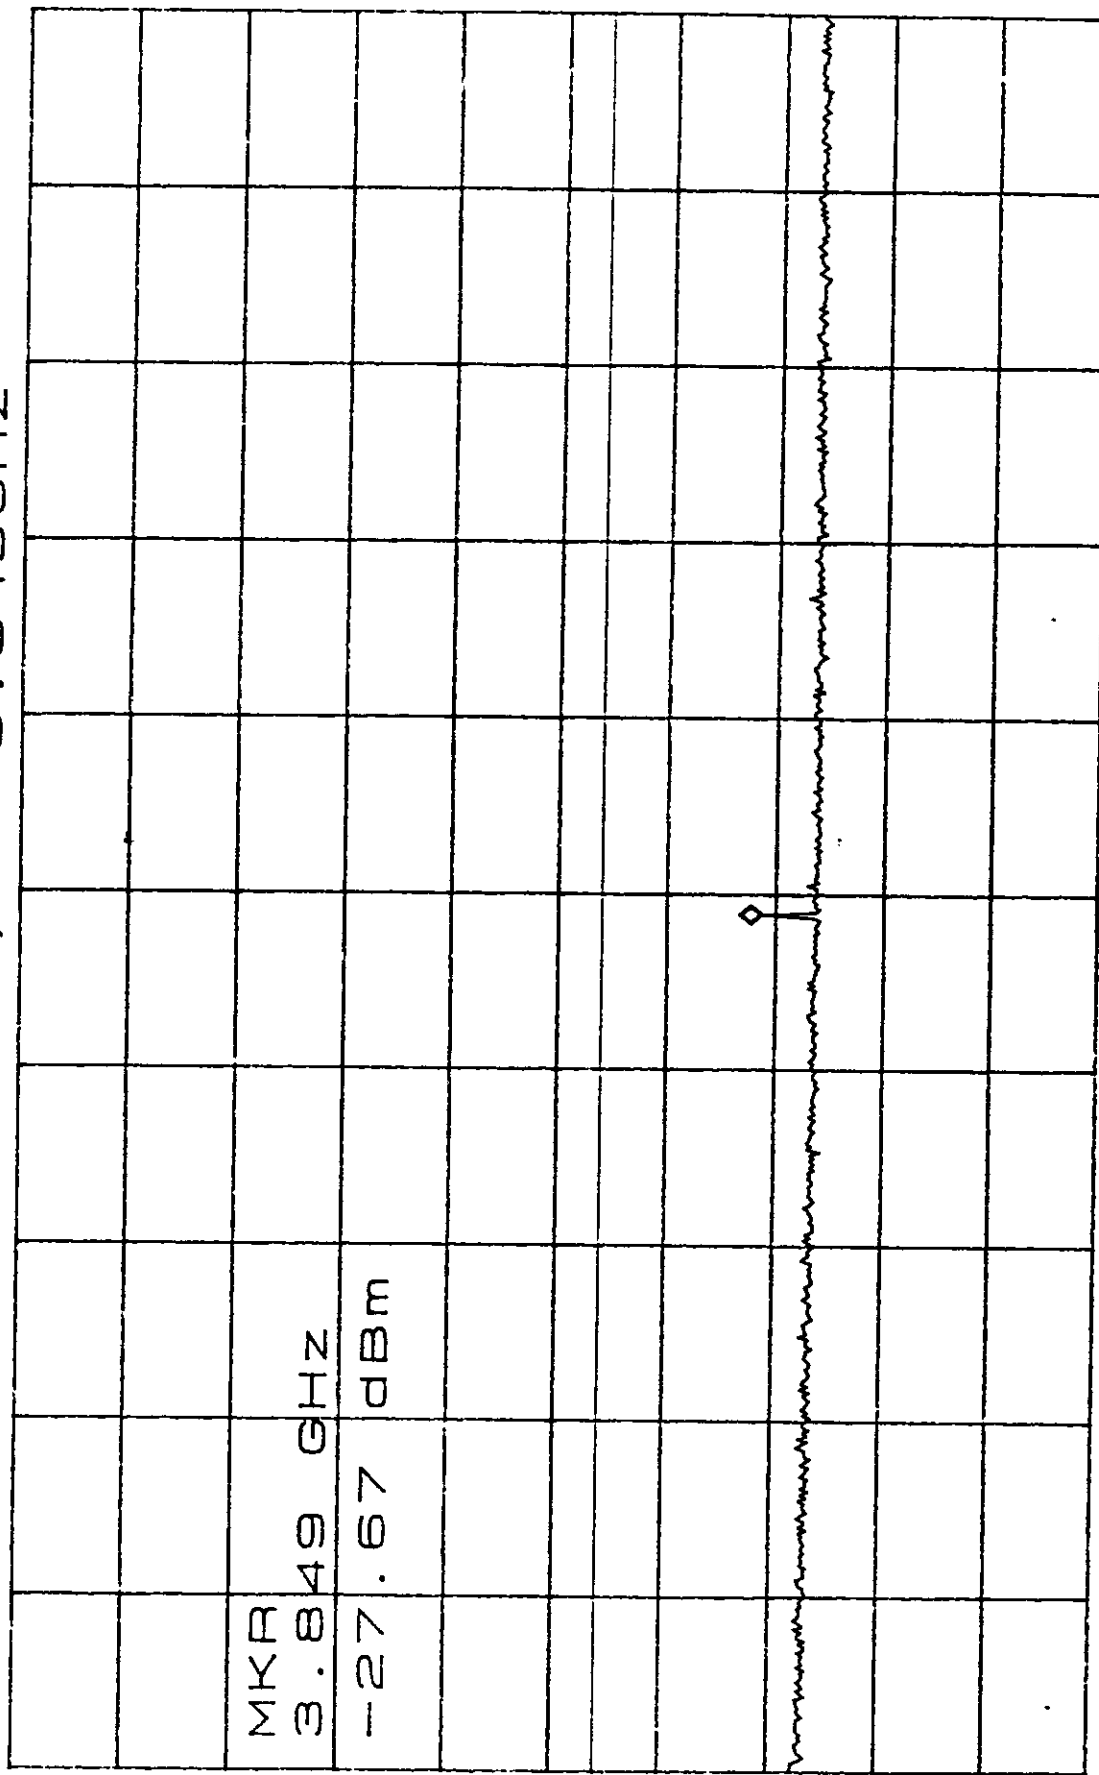

MKR
3.849 GHz
-27.67 dBm

START 2.750GHz

STOP 5.000GHz

*RBW 1.0MHz

*VBW 10kHz


SWP 570ms

*ATTEN 20dB

RL 41.0dBm

MKR -27.17dBm

10dB/ 7.442GHz

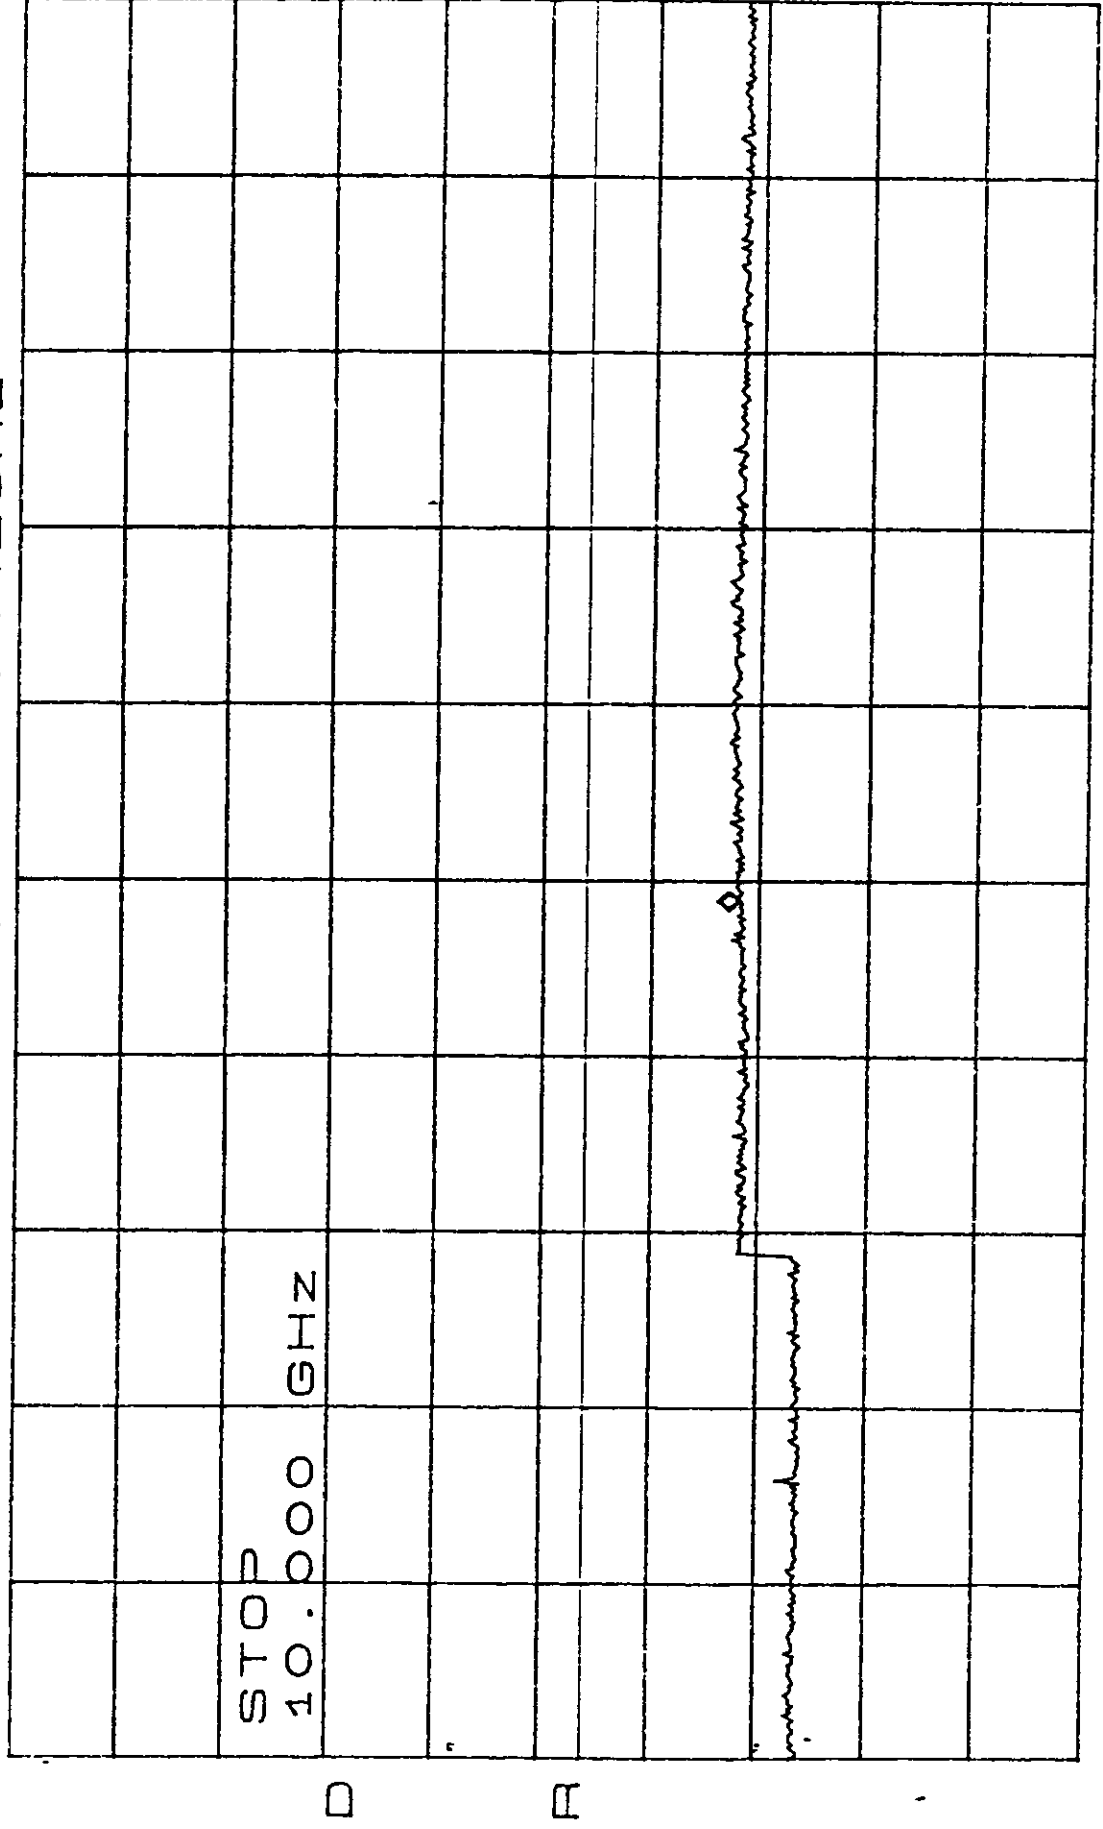

STOP

10.000 GHz

D

R

START 5.000GHz

STOP 10.000GHz

*RBW 1.0MHz

*VBW 10kHz


SWP 1.3sec

*ATTEN 20dB

RL 41.0dBm

MKR -19.83dBm

10dB/ 14.88GHz

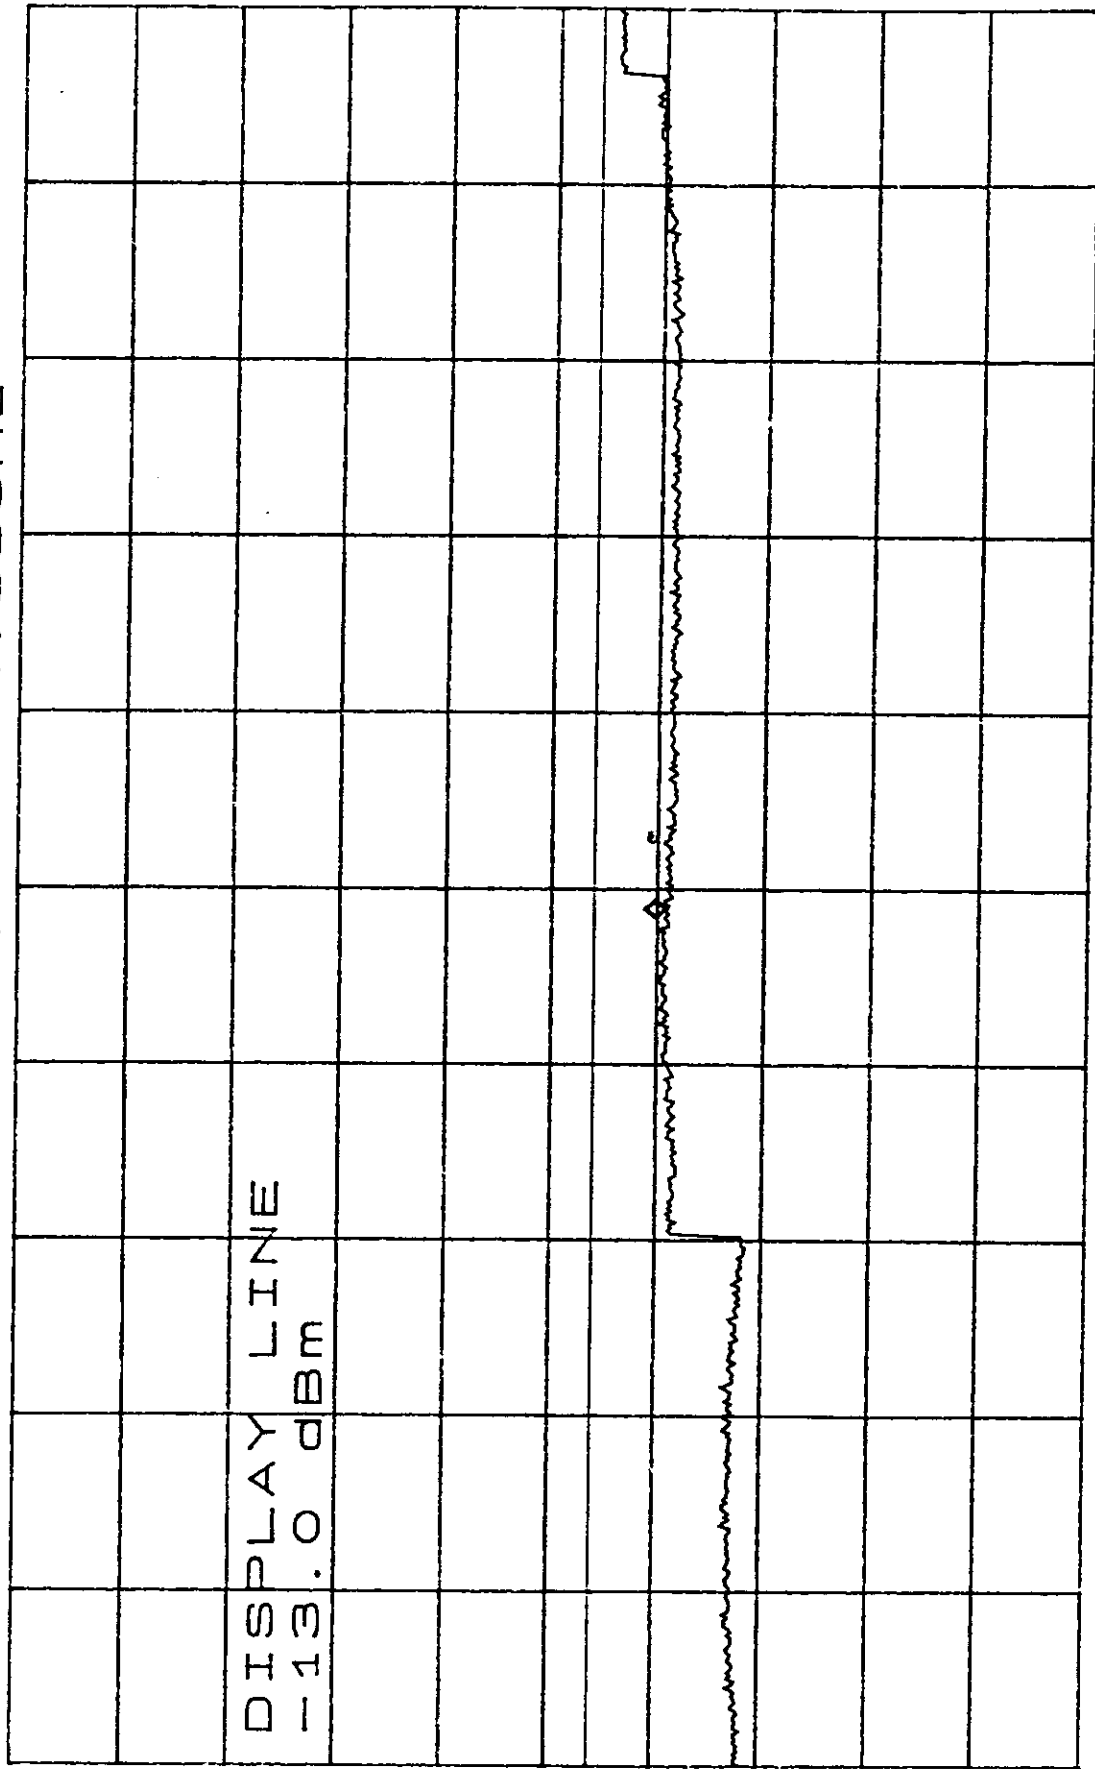

D

R

START 10.00GHz

STOP 20.00GHz

*RBW 1.0MHz

*VBW 10kHz

SWP 2.5sec



SUBJECT: Spurious Emissions at
Antenna Terminals at Block Edges
(For previously blocked/guard band
Channels) FCC Part 24

MET REPORT: EMI9333
MFG: NOKIA

TESTED BY: Kenneth Bass
TEST DATE(S): 14 Jan 1998

EUT: 3 dB Booster Module
MODEL: TBUL11

Modulation products outside of this band are attenuated at least $43 + 10 \log(P)$ below the level of the modulated carrier. A Plot of the spurious emissions at ± 1 MHz around the transmit frequency, as measured at the antenna port, appears on the following page.

SPURIOUS EMISSION FREQUENCY BLOCKS

Frequency Block (MHz)	Low Frequency (CH #)	Hi Frequency (CH #)
A (1930 - 1945)	512 (1930.2)	585 (1944.8)
B (1950 - 1965)	612 (1950.2)	685 (1964.8)
C (1975 - 1990)	737 (1975.2)	810 (1989.8)
D (1945 - 1950)	587 (1945.2)	610 (1949.8)
E (1965 - 1970)	687 (1965.2)	710 (1969.8)
F (1970 - 1975)	712 (1969.2)	734 (1974.8)


Plots of the spurious emissions as measured at the extremes of each frequency block appear on the following pages.

*ATTEN 30dB

RL 31.5dBm

MKR -17.00dBm

10dB/ 1.930000GHZ

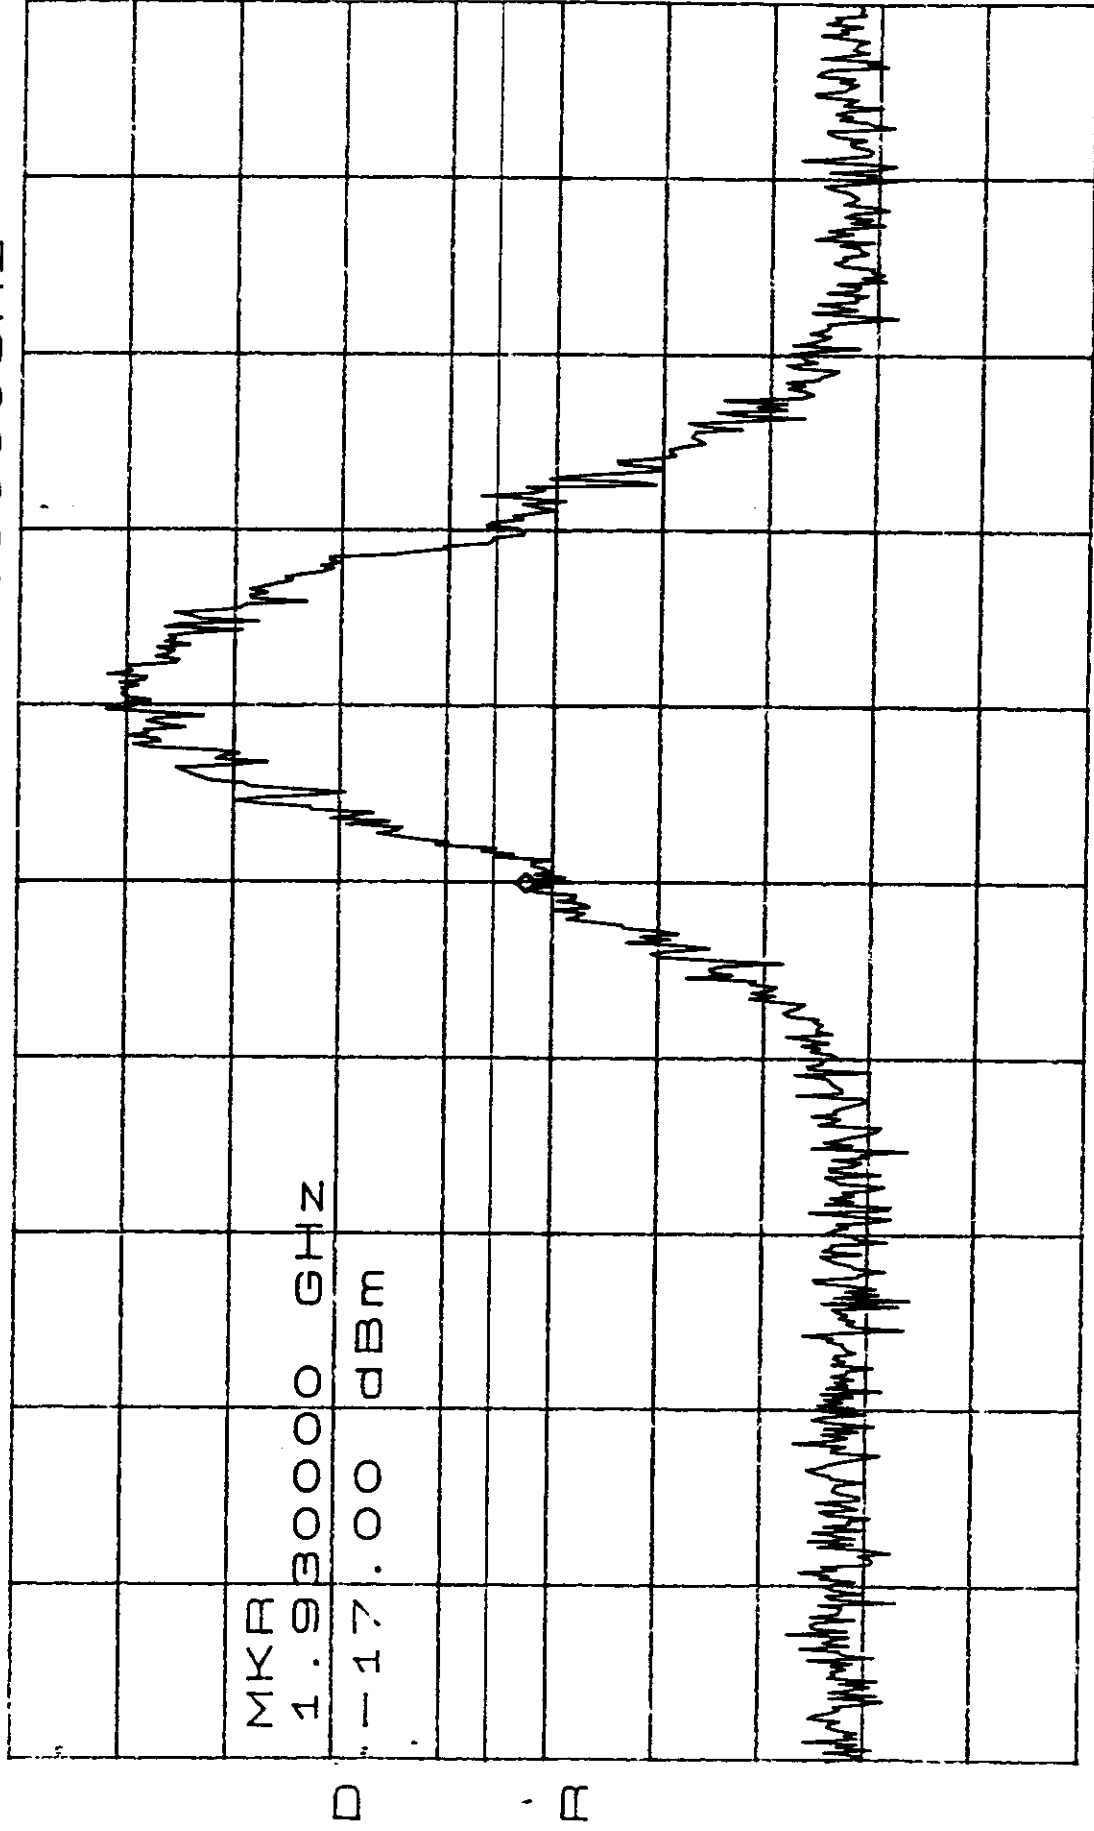

CENTER 1.930000GHZ

*RBW 3.0KHZ


VBW 3.0KHZ

SPAN 2.000MHZ

SWP 560ms

*ATTEN 30dB
RL 31.5dBm

MKR -13.33dBm
1.945000GHZ

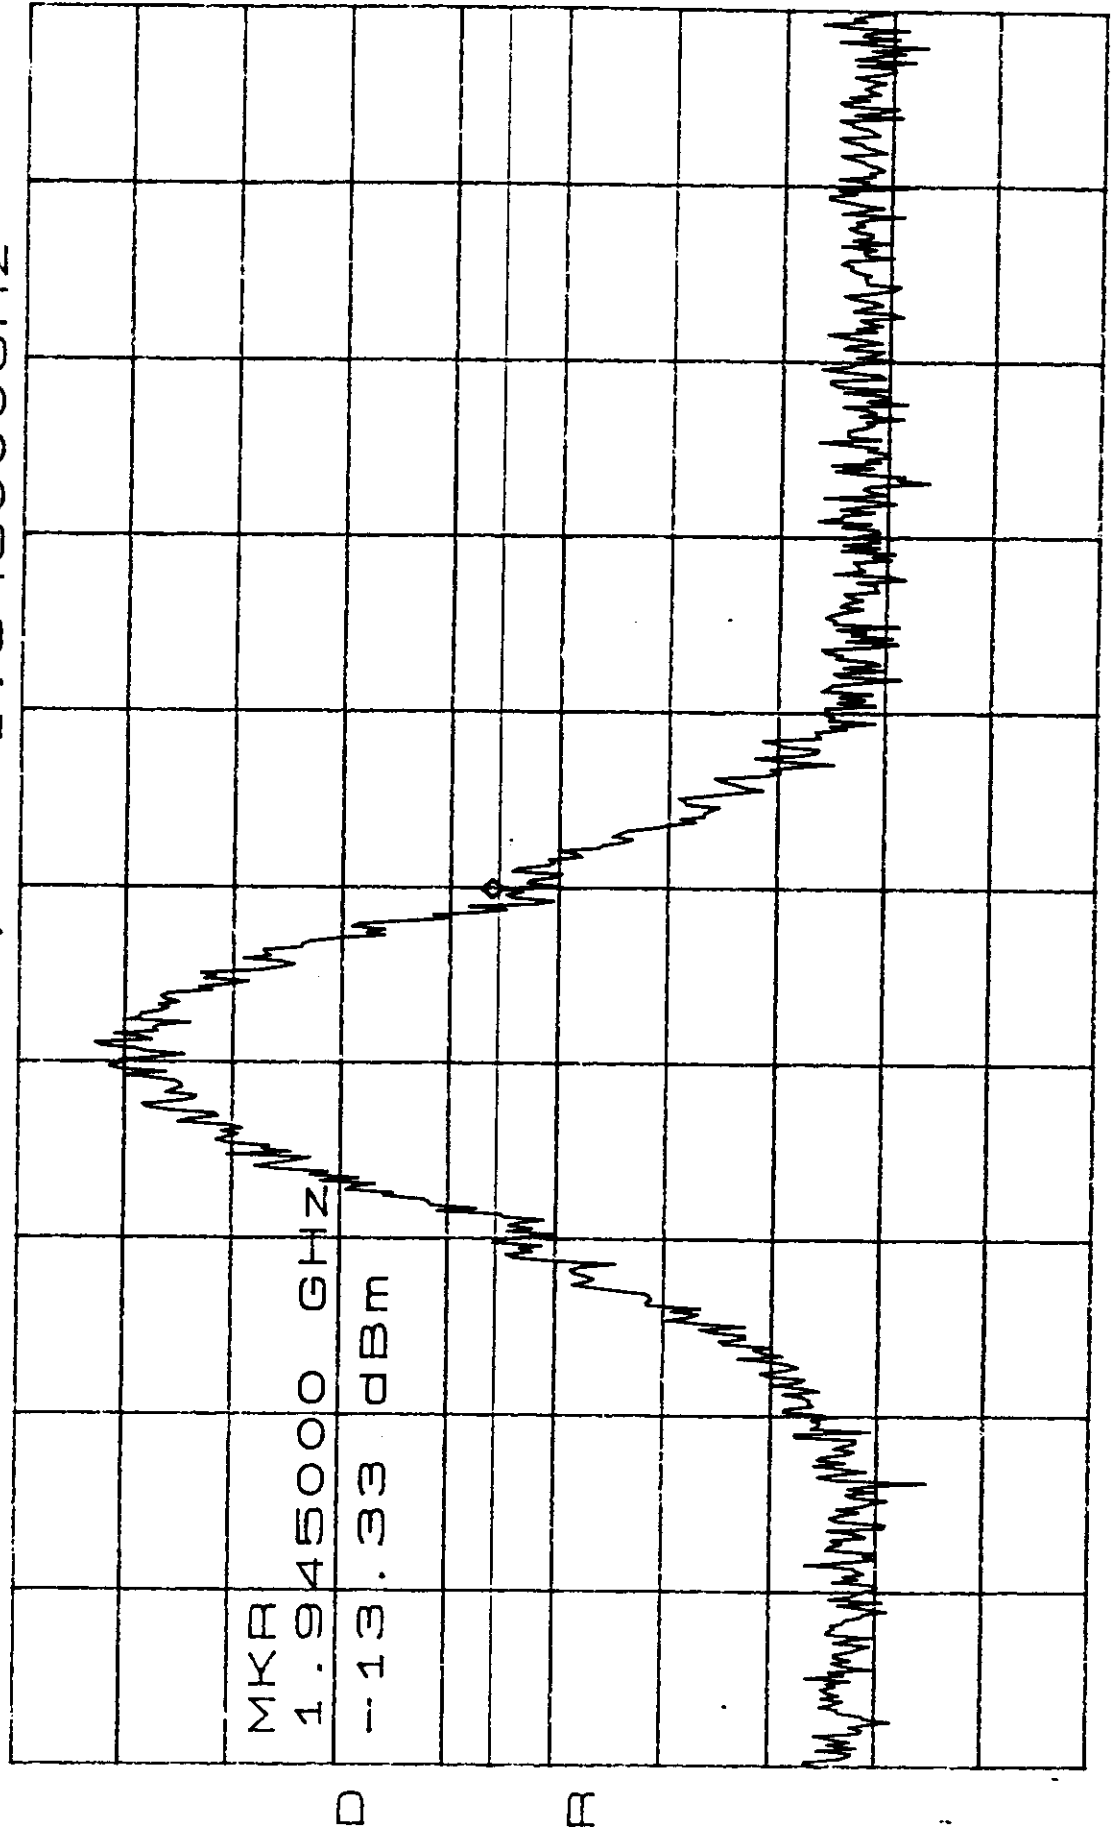

CENTER 1.945000GHZ

SPAN 2.000MHZ

*RBW 3.0KHZ


VBW 3.0KHZ

SWP 560ms

*ATTEN 30dB
RL 31.5dBm

MKR -14.67dBm
1.944990GHZ

10dB/

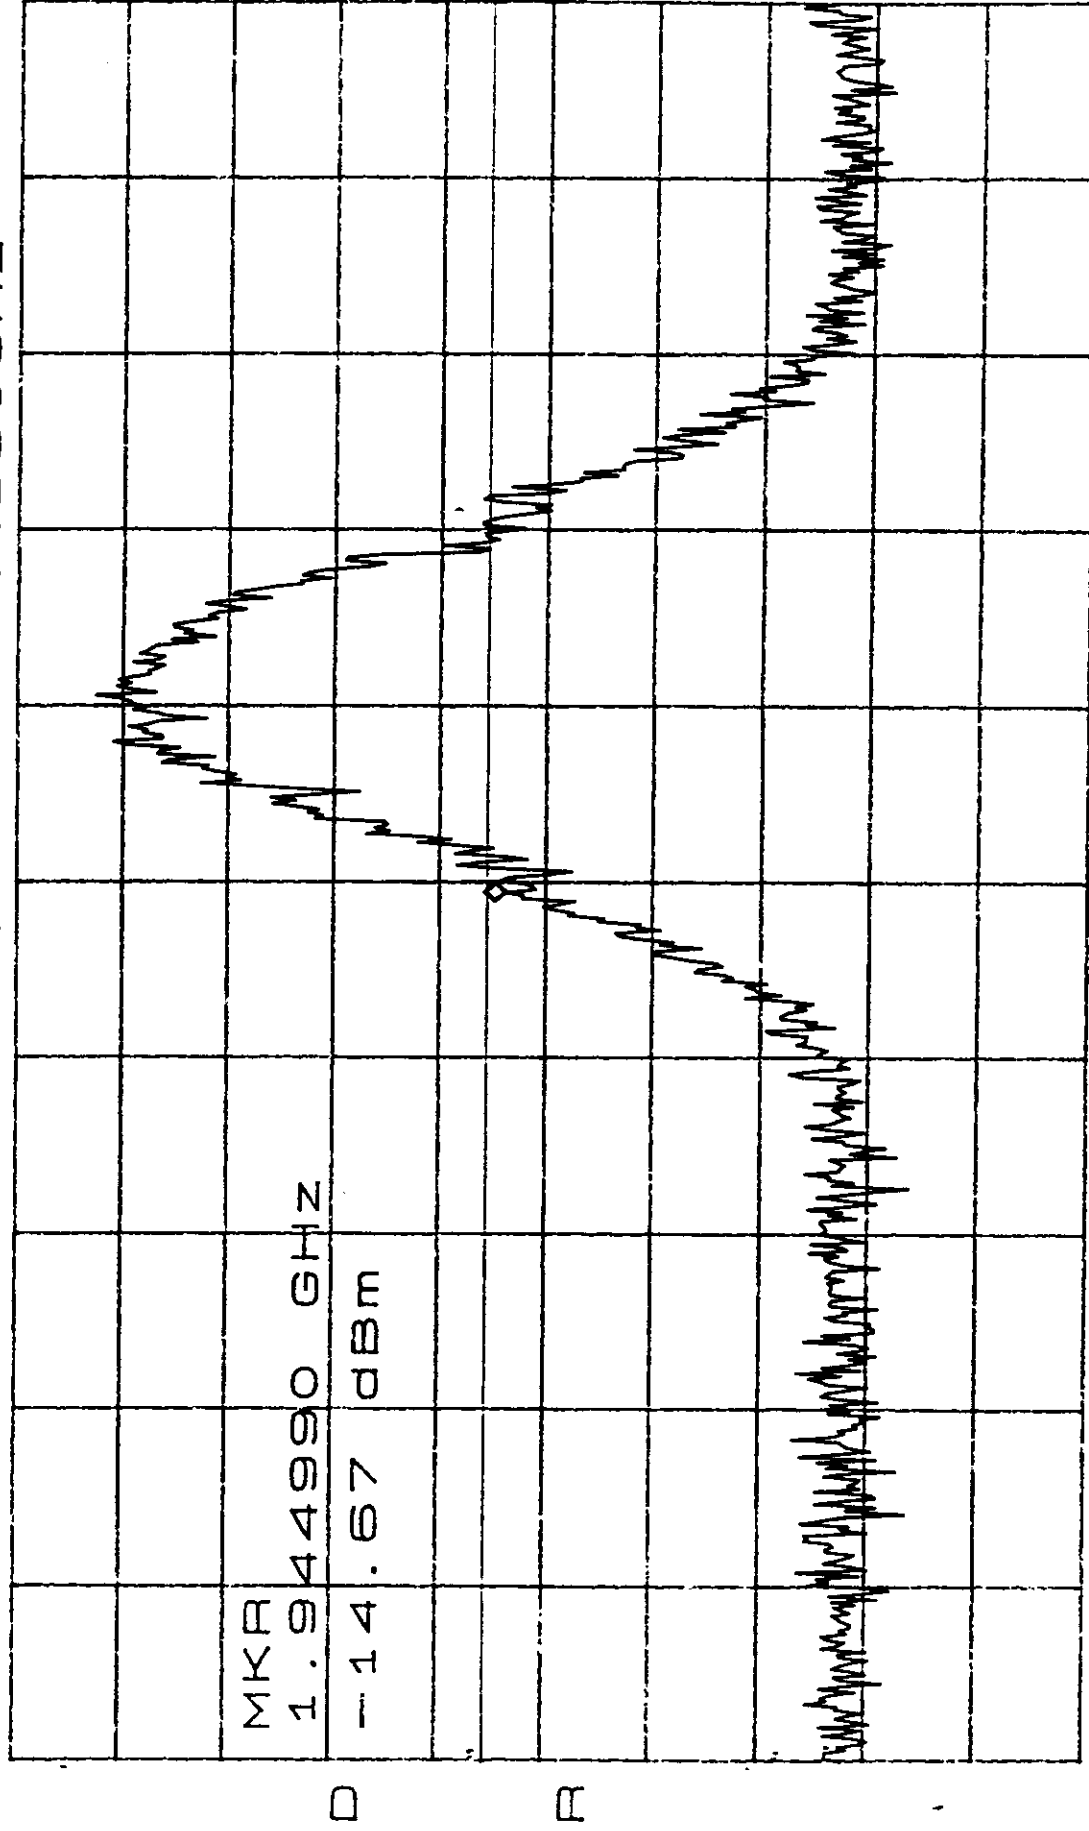

CENTER 1.945000GHZ

SPAN 2.000MHZ


*RBW 3.0KHZ

VBW 3.0KHZ

SWP 560ms

*ATTEN 30dB
RL 31.5dBm

MKR -13.33dBm
1.950010GHz

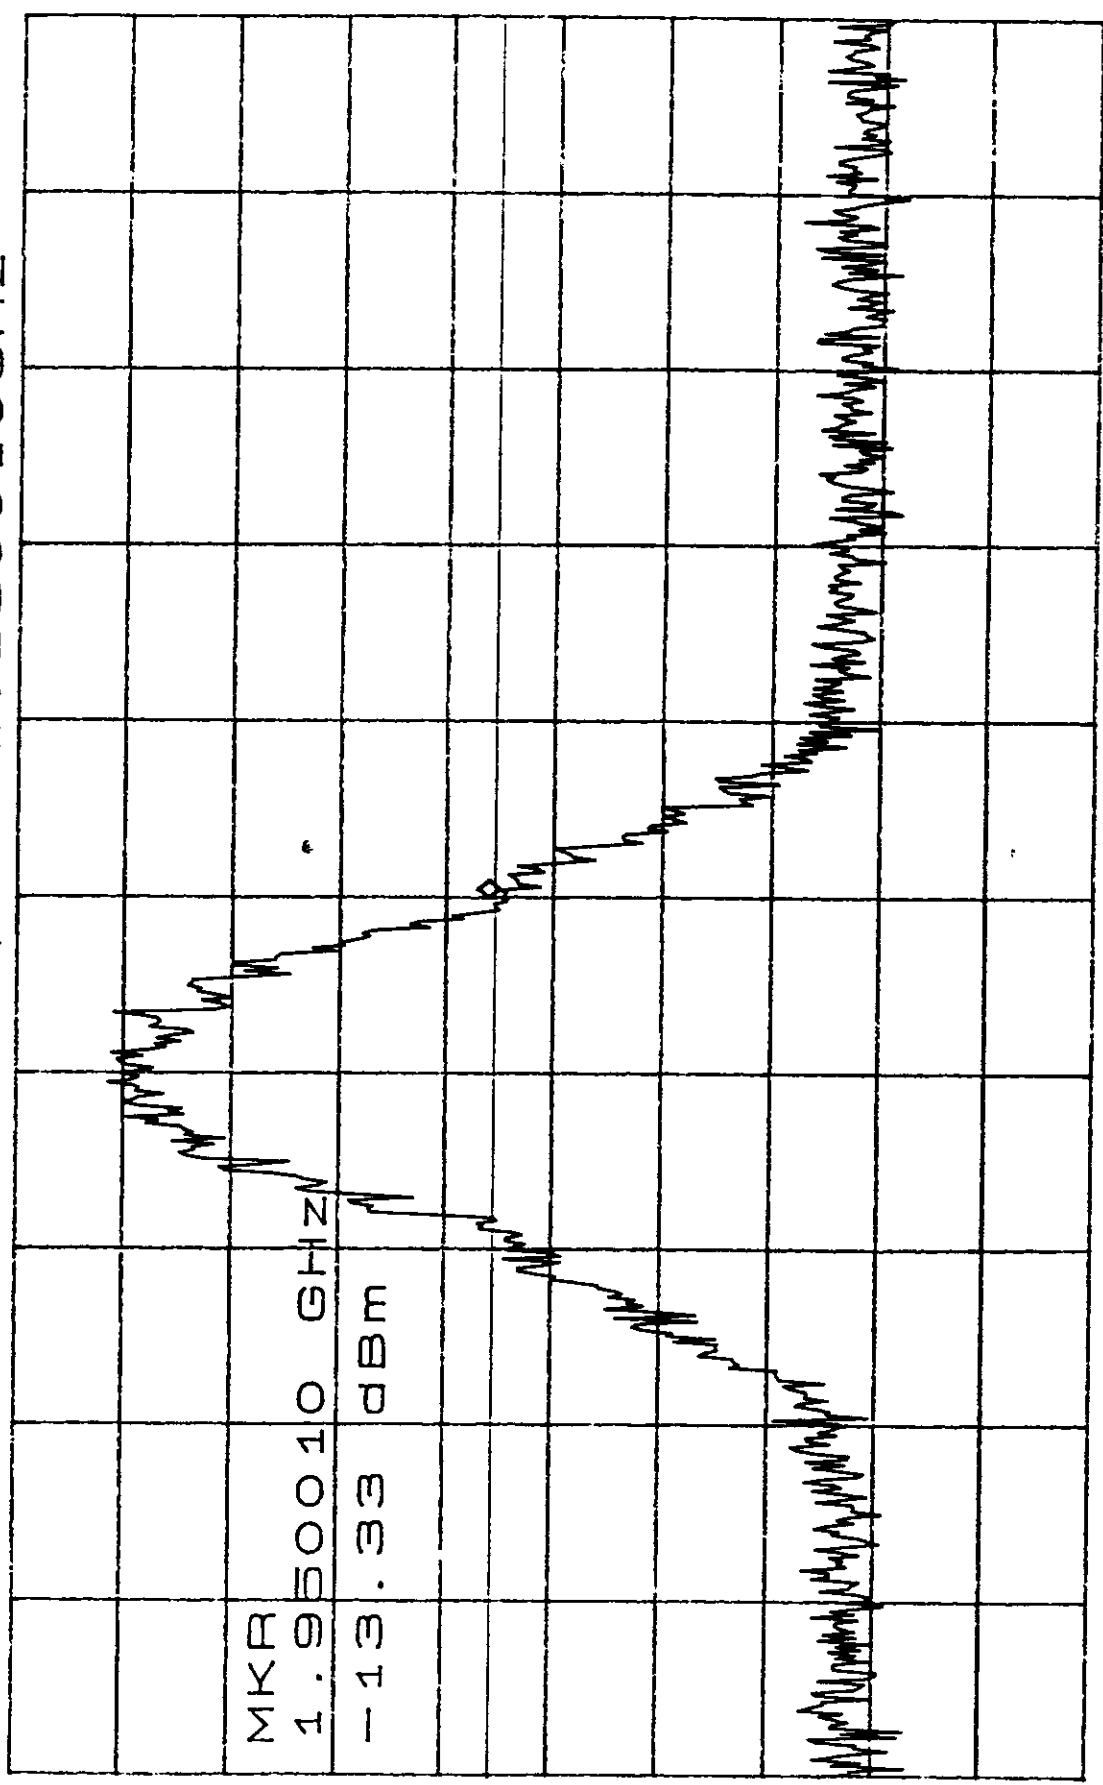

CENTER 1.9500000GHZ

SPAN 2.000MHZ

*RBW 3.0KHZ

VBW 3.0KHZ


SWP 560ms

*ATTEN 30dB

RL 31.5dBm

MKR -15.83dBm

10dB/ 1.950010GHZ

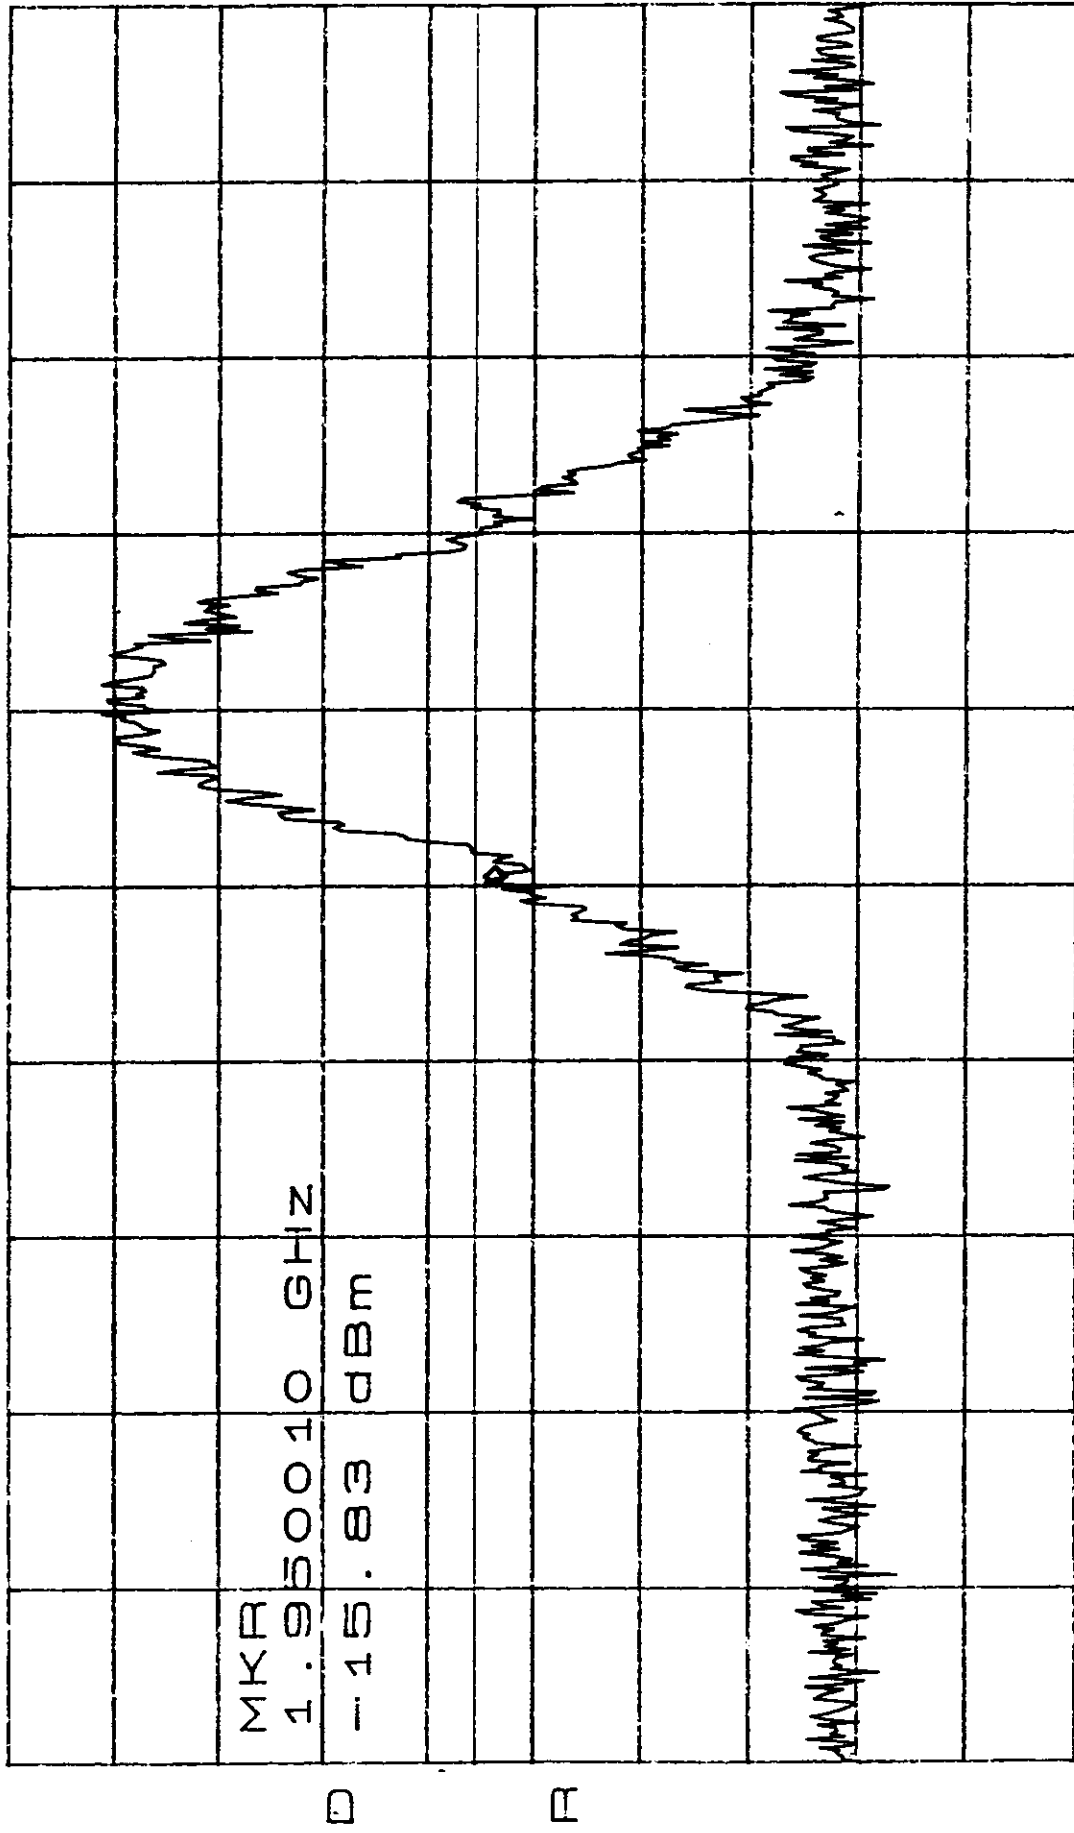

CENTER 1.950000GHZ

SPAN 2.000MHZ

*RBW 3.0KHZ

VBW 3.0KHZ


SWP 560ms

*ATTEN 30dB

RL 31.5dBm

MKR -13.83dBm

10dB/ 1.965030GHz

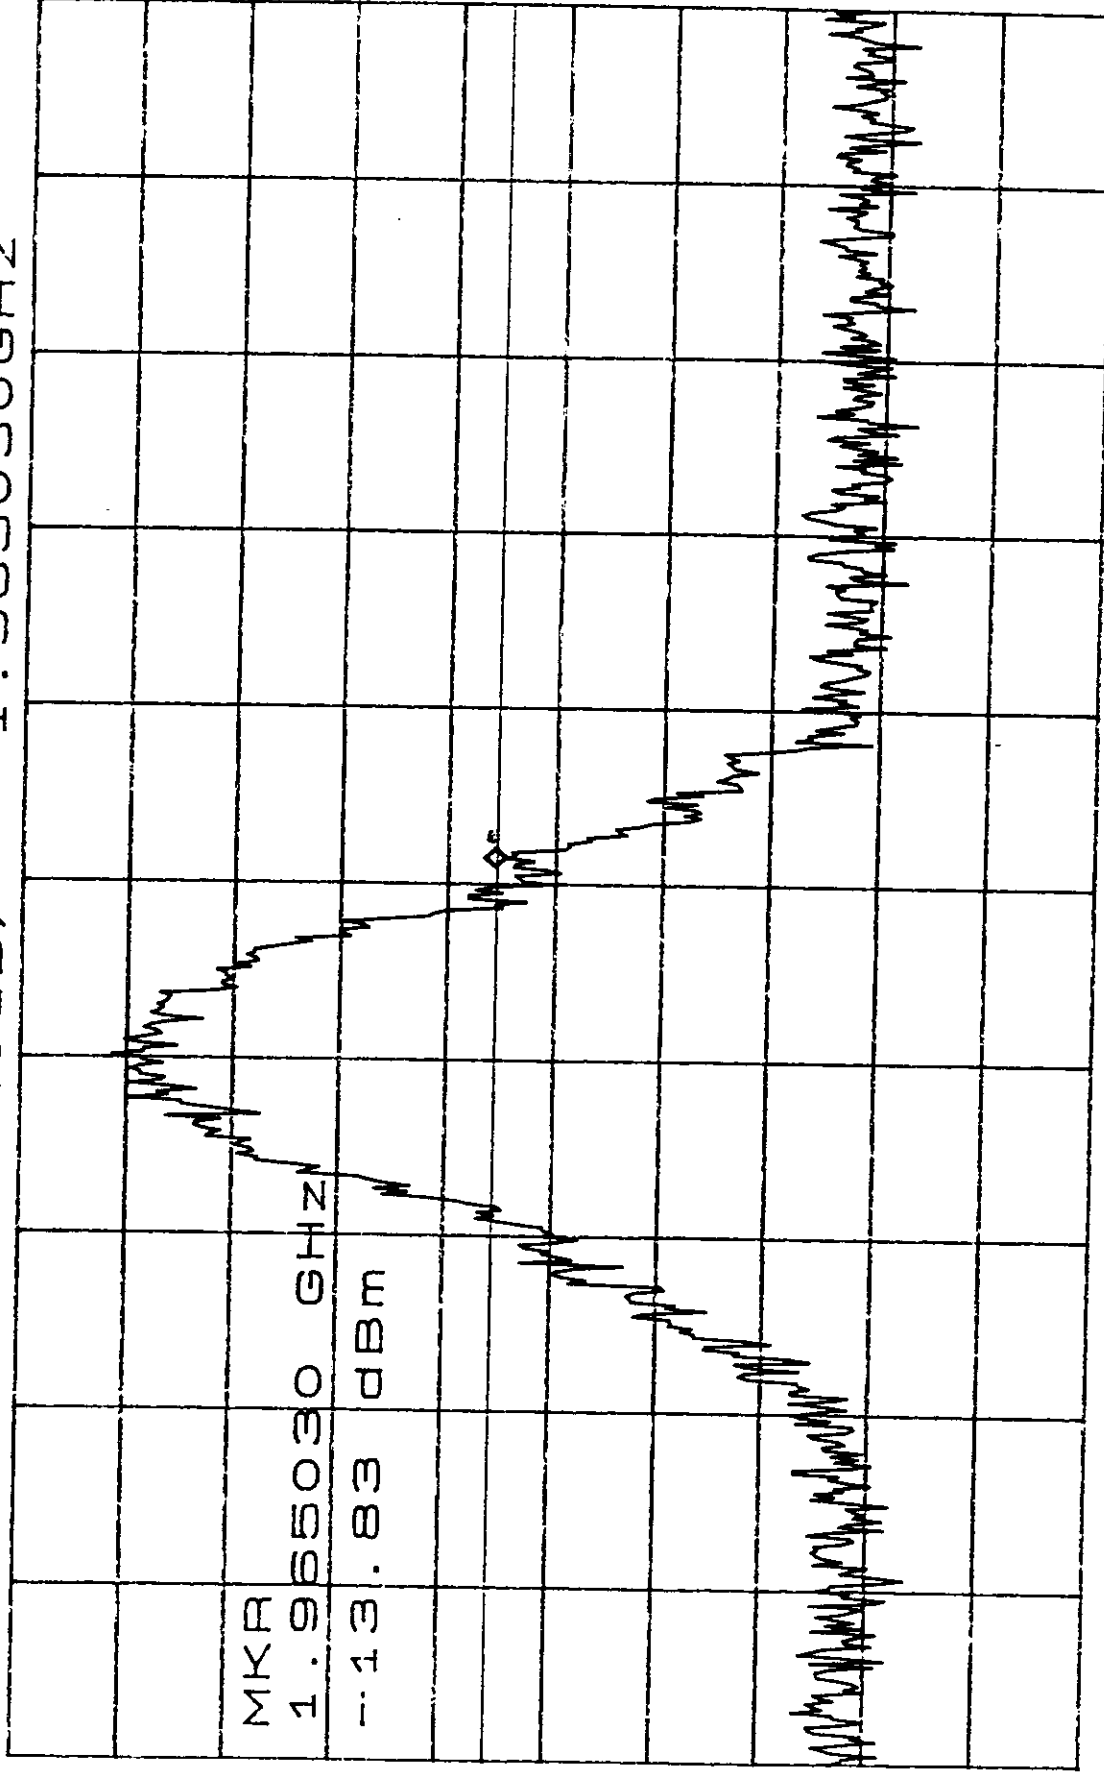

MKR

1.965030 GHz

-13.83 dBm

D

R

CENTER 1.965000GHz

SPAN 2.000MHz

*RBW 3.0KHz

VBW 3.0KHz


SWP 560ms

*ATTEN 30dB

RL 31.5dBm

MKR -14.67dBm

10dB/ 1.965000GHZ

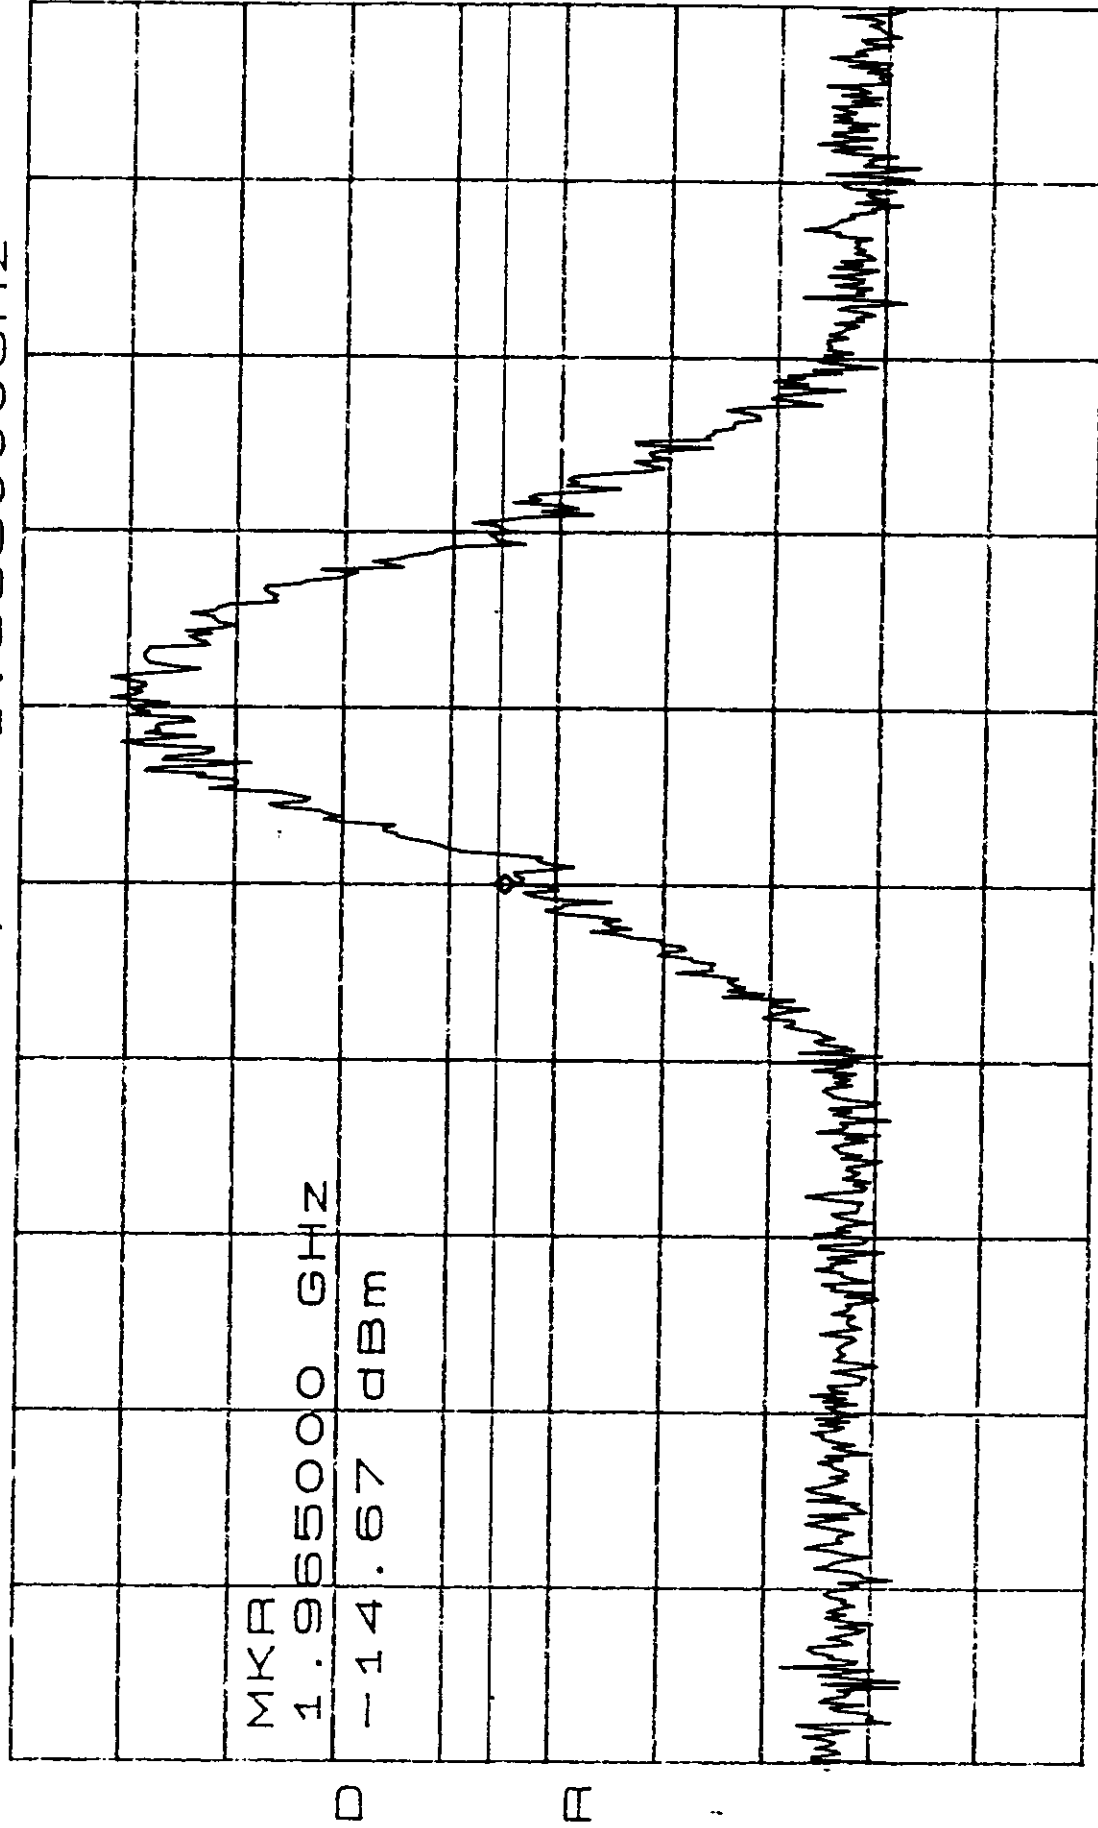

CENTER 1.965000GHZ

SPAN 2.000MHZ

*RBW 3.0KHZ

VBW 3.0KHZ


SWP 560ms

*ATTEN 30dB

RL 31.5dBm

MKR -14.33dBm

10dB/ 1.970000GHZ

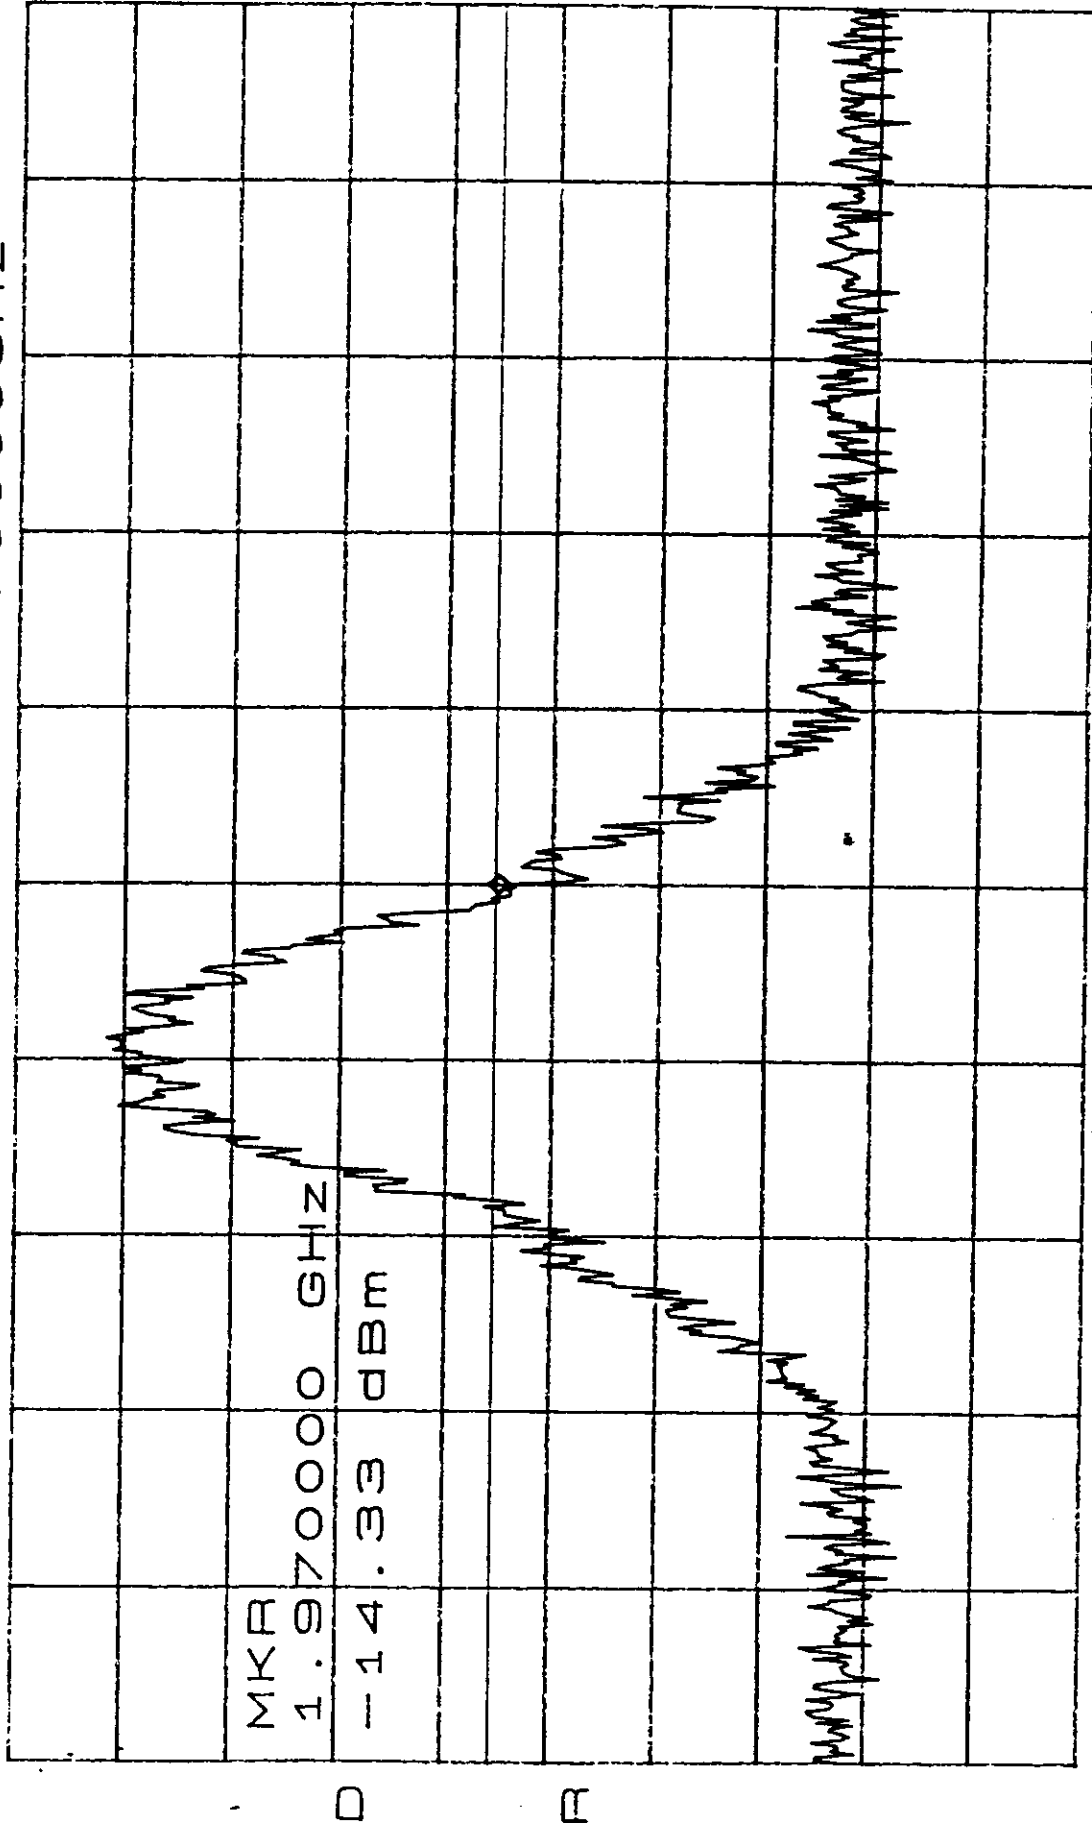

CENTER 1.970000GHZ

SPAN 2.000MHZ

*RBW 3.0KHZ

VBW 3.0KHZ


SWP 560ms

*ATTEN 30dB

RL 31.5dBm

MKR -17.17dBm

10dB/ 1.969993GHz

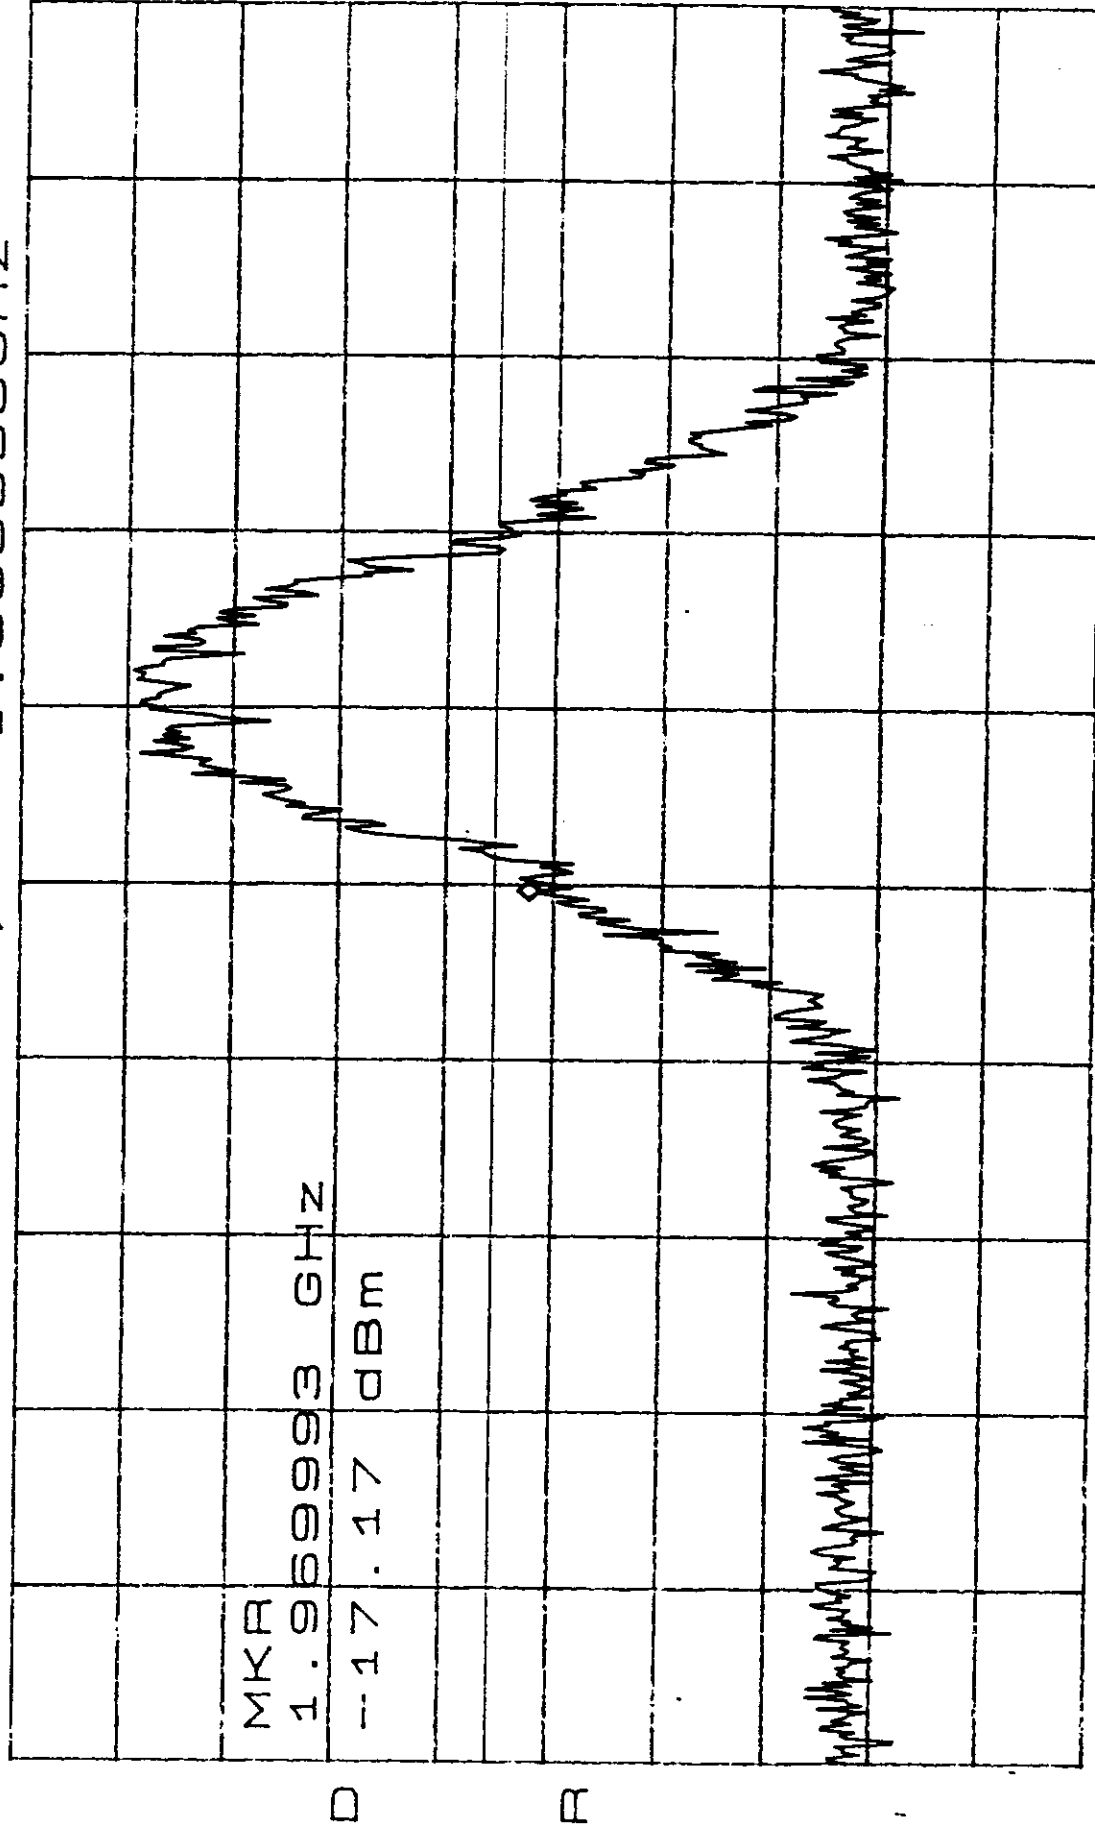

CENTER 1.970000GHz

*RBW 3.0KHz

VBW 3.0KHz

SPAN 2.000MHz


SWP 560ms

*ATTEN 30dB

RL 31.5dBm

MKR -15.33dBm

10dB/ 1.975010GHZ

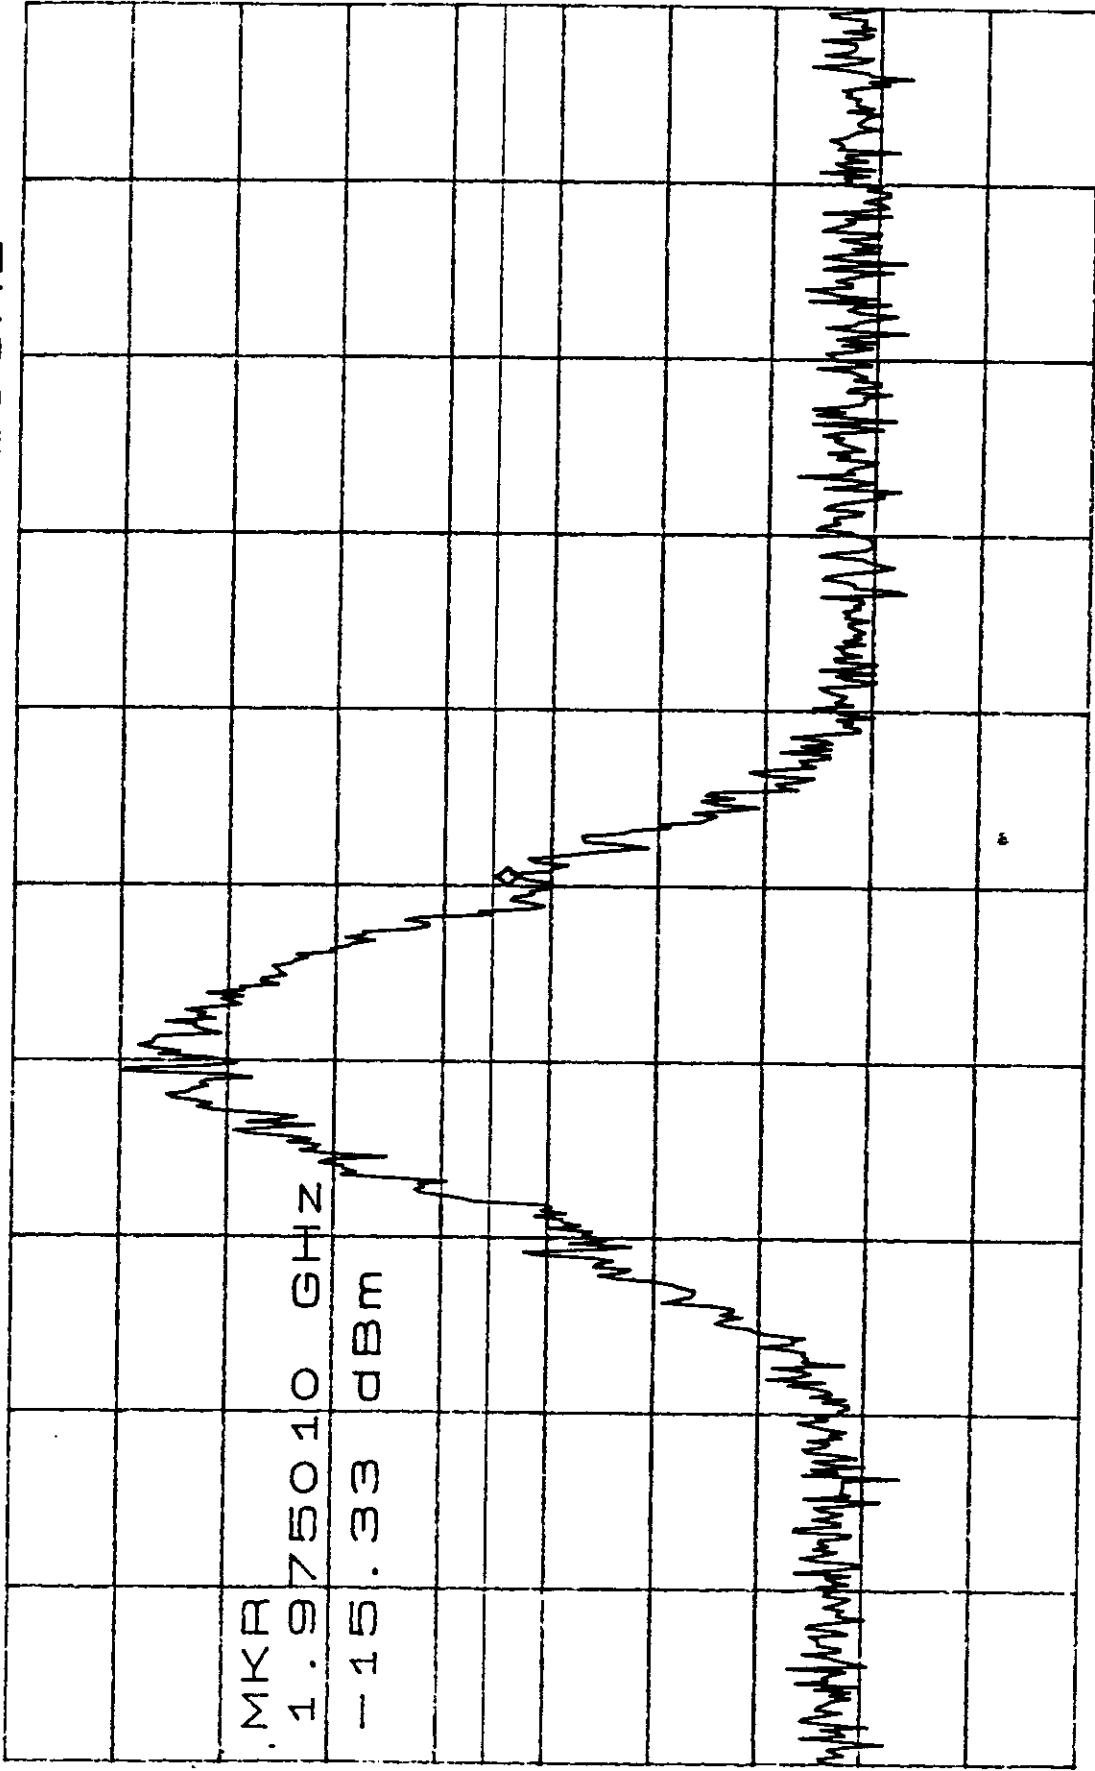

D. R

CENTER 1.975000GHZ

SPAN 2.000MHZ

*RBW 3.0KHZ

VBW 3.0KHZ


SWP 560ms

*ATTEN 30dB

RL 31.5dBm

MKR -16.33dBm

10dB/ 1.9750036GHZ

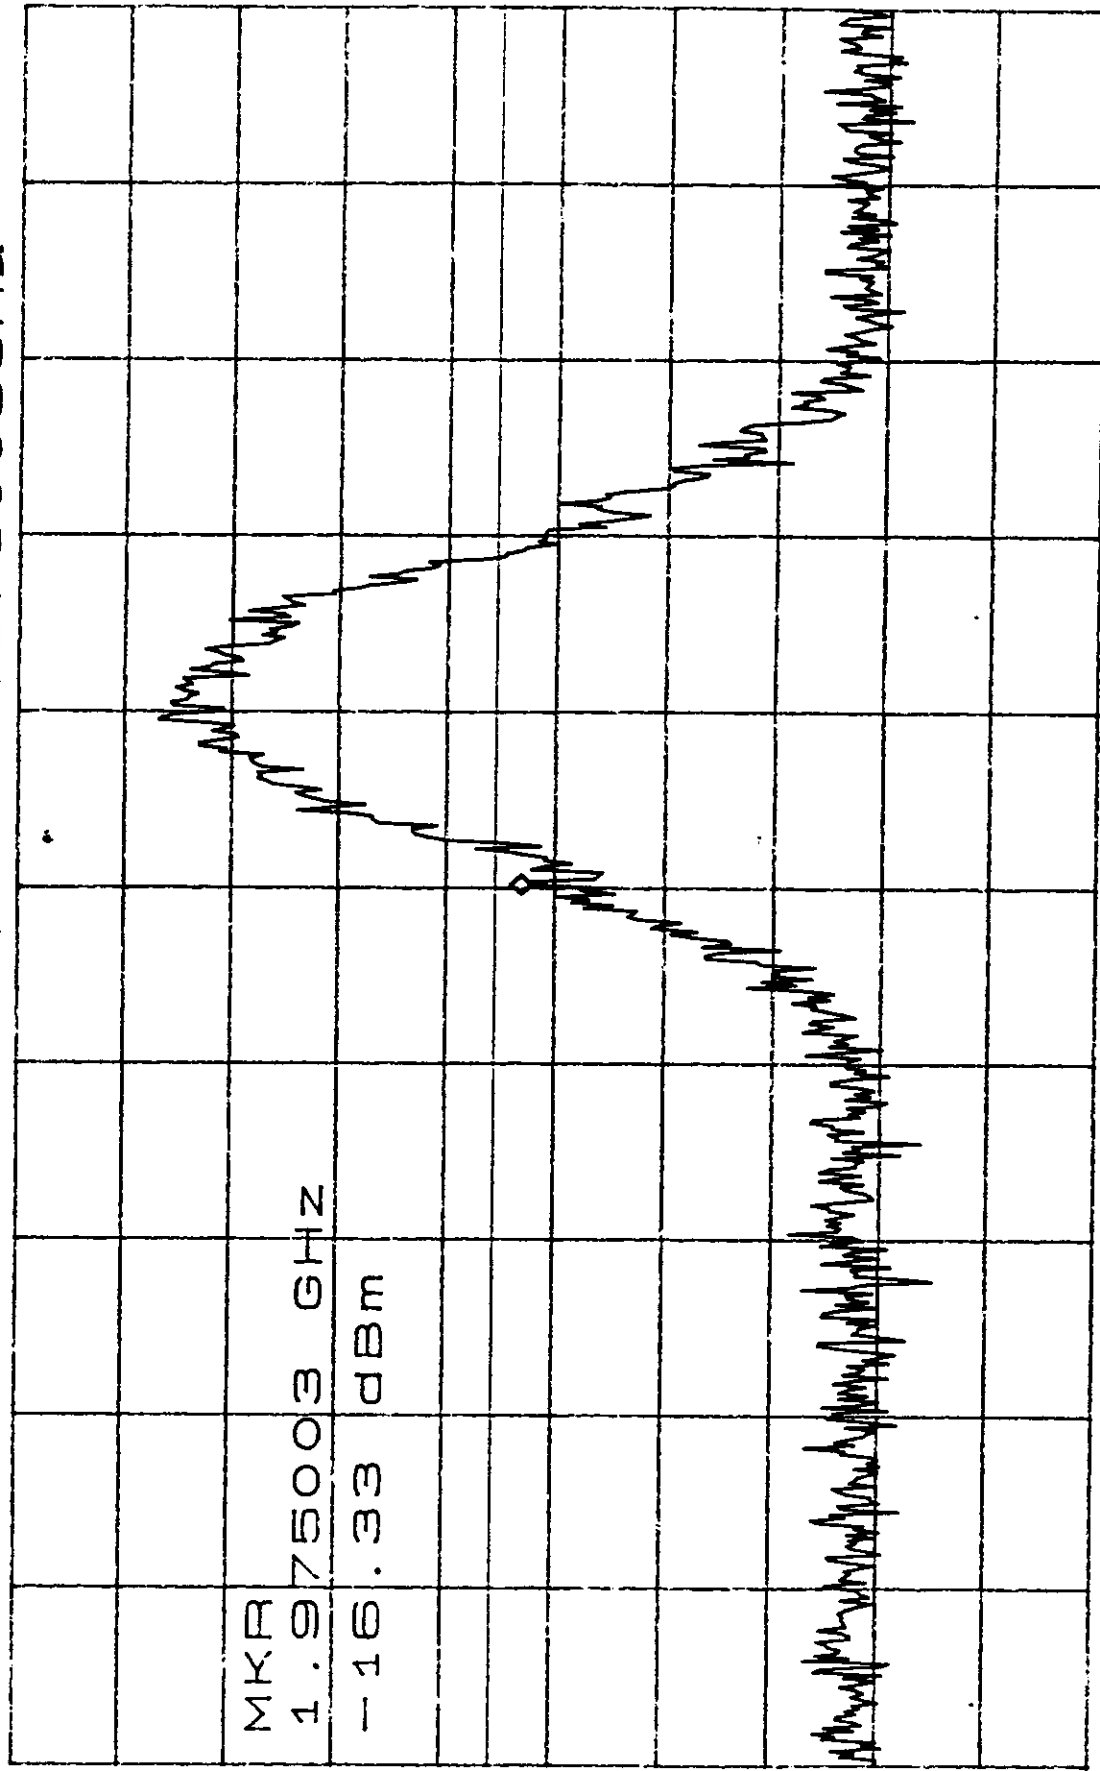

CENTER 1.975000GHZ

SPAN 2.000MHZ

*RBW 3.0KHZ

VBW 3.0KHZ


SWP 560ms

*ATTENTION BROOD

PL 34. 50. 2888

NYR 1-15-33d8m

TOP SECRET

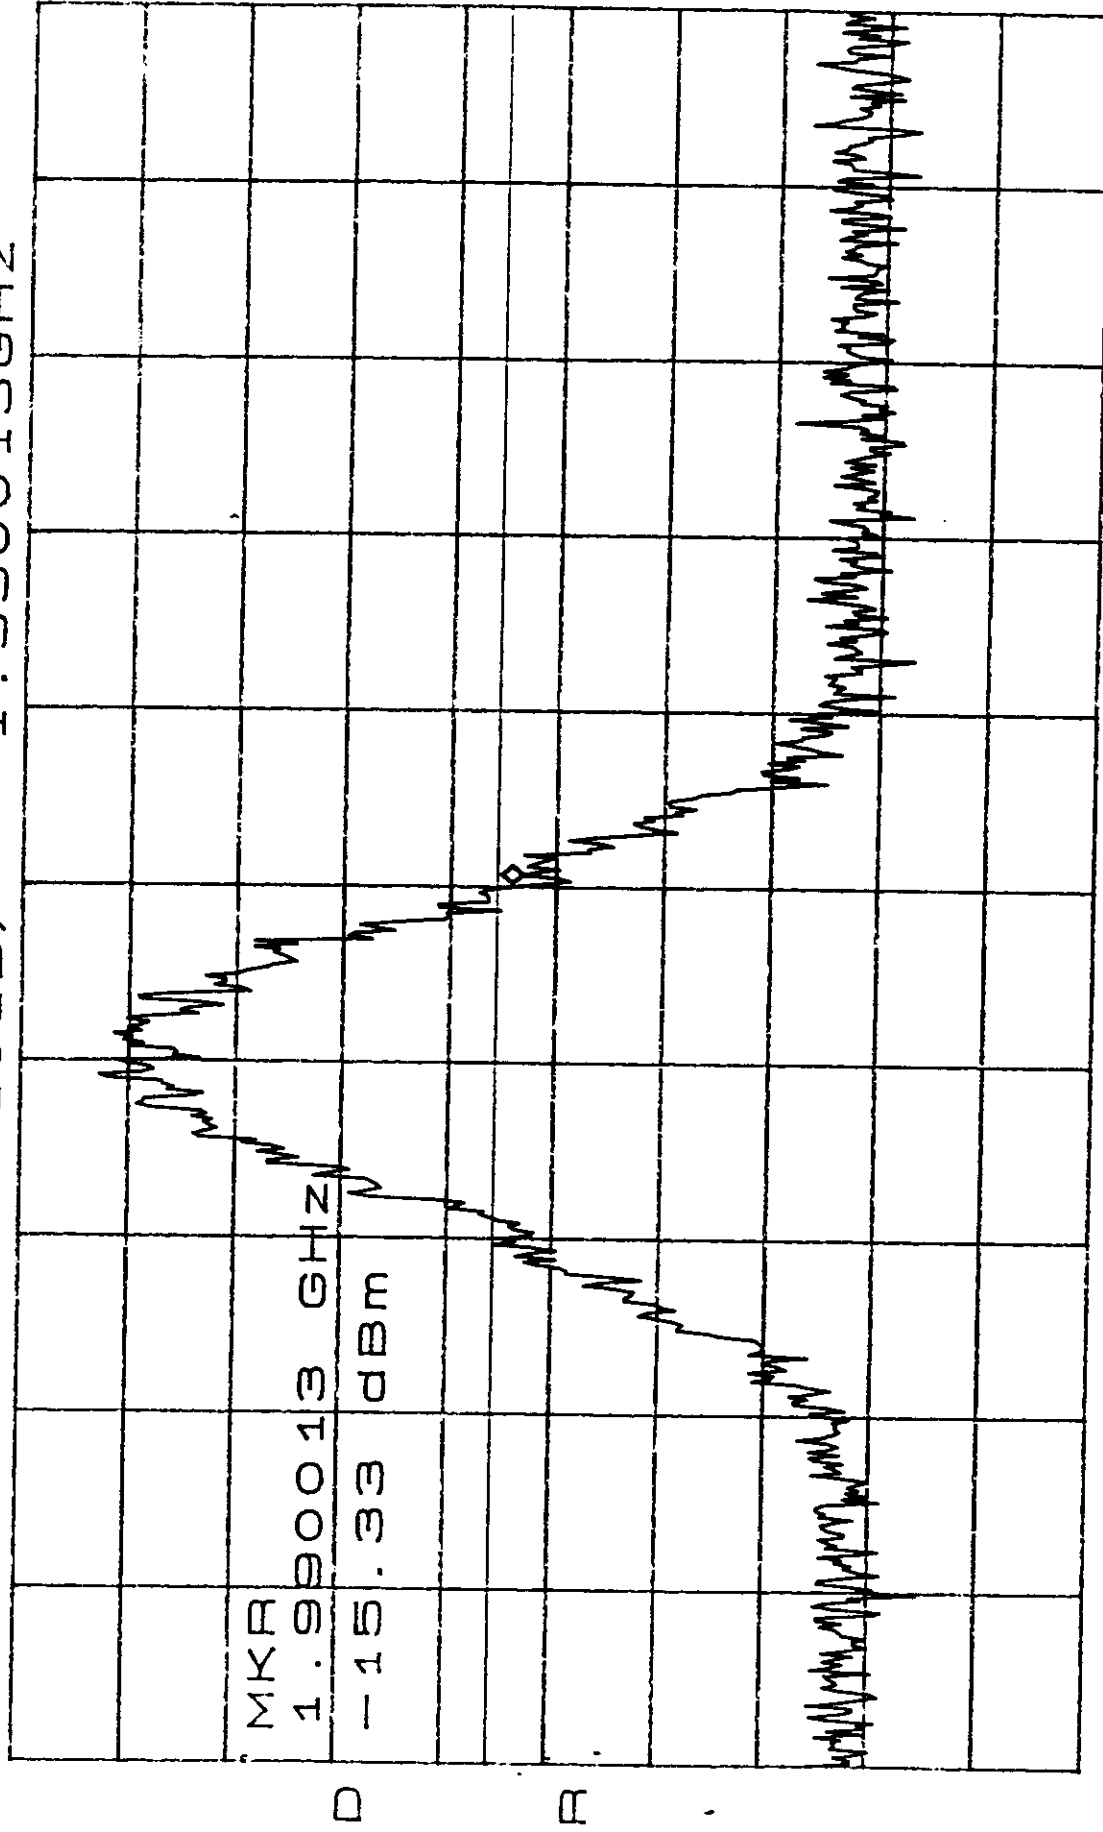

CENTER 1.990000GHZ

S
P
A
S
S
.O.O.N.H.N

NOV 3 1966

VBW 3.0YIN

SWP 560ms