CETECOM ICT Services GmbH

Untertuerkheimer Str. 6-10, 66117 Saarbruecken, Germany Phone: +49 (0) 681 598-0 Fax: -9075
SAR-Laboratory Phone: +49 (0) 681 598-8454 Fax: -8475

Accredited EMC-Test-Laboratory
accredited by:
Regulatory Authority for Telecommunications and Posts (Reg TP)
DAR-No.: TTI-P-G-166/98

Federal Motor Transport Authority (KBA)
DAR registration number: KBA-P 00070-97 from January –19-1999

Listed by
FEDERAL COMMUNICATIONS COMMISSION (FCC)
Registration Number: 90462
FCC Website: WWW.FCC.GOV

Test report no.: 5-3727/01_1_5
Type identification : GIGASET 8800
FCC ID: L82-1408

Table of Content

1 General Information 3

1.1 Notes 3

1.2 Statement of Compliance 3

1.3 Testing laboratory 4

1.4 Details of applicant 4

1.5 Application details 4

1.6 Test item 5

1.7 Test specifications 5

1.7.1 RF exposure limits 5

2 Technical test 6

2.1. Summary of test results 6

2.2 Test environment 6

2.3 Test equipment used 6

2.4 Test results (Head SAR) 7

2.5 Test results (Body SAR) 7

2.6 Tissue dielectric properties 8

2.7 Tissue parameters 8

2.8 Measurement uncertainties 9

2.9 System validation 10

Appendix 1: System performance verification 11

Appendix 2: Measurement results (printout from DASY ™) 12

Appendix 3: Photo documentation 21

Appendix 4: Calibration parameters of E-field probe 28

1 General Information

1.1 Notes

The test results of this test report relate exclusively to the test item specified in 1.6. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

1.2 Statement of Compliance

The SAR values found for the portable phone Siemens GIGASET 8800 are below the maximum recommended levels of 1.6 W/Kg as averaged over any 1 g tissue according the FCC rule §2.1093, the ANSI/IEEE C 95.1:1992 and the NCRP Report Number 86 for uncontrolled environment.

Tester operator:

26.09.2001	Bernd Rebmann	
Date	Name	Signature

Technical responsibility for area of testing:

26.09.2001	Ralf Höhn	
Date	Name	Signature

1.3 Testing laboratory

CETECOM ICT Services GmbH
Untertürkheimer Straße 6-10, D-66117 Saarbrücken
Germany
Telephone: +49 681 598 - 0
Fax: + 49 681 598 - 8475
e-mail: info@ict.cetecom.de
Internet: http://www.cetecom.com
State of accreditation: The Test laboratory SAR is accredited according to DIN EN 45001.
DAR-No.:TTI-P-G-166/98

Test location, if different from CETECOM ICT Services GmbH

Name: ---
Street: ---
Town: ---
Country: ---
Phone: ---
Fax: ---

1.4 Details of applicant

Name: SIEMENS AG
Street: Frankenstrasse 2
Town: 46395 Bocholt
Country: Germany
Phone: +49 2871 91 0
Fax: +48 2871 91 2495

Contact: Mr. Uwe Alt
Phone: +49 2871 2948

1.5 Application details

Date of receipt of application:4th September 01
Date of receipt of test item: 4th September 01
Date of test: 4th September 01
Person who have been present during the test: --

1.6 Test item

Description of test item:

EUT Type:	WDCT –Phone, mobile part
Trade Name:	Siemens
Model:	GIGASET 8800
HW:	step2 + C12,C2,C4,C45
SW:	V009+Markro
Frequency:	2400 – 2483.5 MHz
Modulation:	800KFXD / 79M(FXD (FHSS)
Max RF output power rad.:	195 mW EIRP
Antenna Type:	integral antenna
Used battery:	2 x SAFT RH6 Ni-MH; 1.2V 1300 mAh

1.7 Test specifications

Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97-01)
Draft IEEE Std 1528-200X: Version 6.4:July 2001

1.7.1 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain)	**1.60 mW/g**	8.00 mW/g
Spatial Average SAR** (Whole Body)	0.08 mW/g	0.40 mW/g
Spatial Peak SAR*** (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

Table 1: RF exposure limits

Notes:

* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time

** The Spatial Average value of the SAR averaged over the whole body.

*** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

2 Technical test

2.1. Summary of test results

☒ No deviations from the technical specification(s) were ascertained in the course of the tests performed.

☐ The deviations as specified in 2.4 and 2.5 were ascertained in the course of the tests performed.

2.2 Test environment

Ambient temperature: 21°C – 23°C

Tissue simulating liquid: 21°C – 23°C

2.3 Test equipment used

Manufacturer	Device	Type	Serial number	Date of last calibration
Schmid & Partner Engineering AG	Dosimetric E-Fiel Probe	ET3DV6	1558	February 20, 2001
Schmid & Partner Engineering AG	Dosimetric E-Fiel Probe	ET3DV6	1559	February 20, 2001
Schmid & Partner Engineering AG	900 MHz System Validation Dipole	D900V2	102	February 13, 2001
Schmid & Partner Engineering AG	1800 MHz System Validation Dipol	D1800V2	287	February 13, 2001
Schmid & Partner Engineering AG	Data acquisition electronics	DAE3V1	413	January 15, 2001
Schmid & Partner Engineering AG	Software	DASY 3 V3.1c	---	Calibration isn't necessary
Schmid & Partner Engineering AG	Phantom	Pre SAM	---	Calibration isn't necessary
Rohde & Schwarz	Universal Radio Communication Tester	CMU 200	U-972406/000	August 30, 2001
Hewlett Packard	Network Analyser 300 kHz to 3 GHz	HP 8753C	2936A00872	Mai 11, 1998
Agilent	Dielectric Probe Kit	Agilent 85070C	US99360146	March 8, 2001

2.4 Test results (Head SAR)

The table contain the measured SAR values averaged over a mass of 1 g				
Channel (frequency)	Position	Left hand position	Right hand position	Limit
47 (2441.66 MHz)	Cheek:	**0.211 mW/g**	0.184 mW/g	1.6 W/kg
47 (2441.66 MHz)	tilted 15°:	0.180 mW/g	0.171 mW/g	1.6 W/kg
00 (2401.06 MHz)	Cheek	0.182 mW/g	not necessary	1.6 W/kg
95 (2482.28 MHz)	Cheek	0.189 mW/g	not necessary	1.6 W/kg

Table 2: Test results (Head SAR)

Note: Upper and lower frequencies were measured at the worst position.

2.5 Test results (Body SAR)

The table contain the measured SAR values averaged over a mass of 1 g			
Channel (frequency)	Position	Touch on the flat phantom	Limit
00 (2401.06 MHz)	Worst case	0.0245 mW/g	1.6 W/kg
47 (2441.66 MHz)	Worst case	0.0253 mW/g	1.6 W/kg
95 (2482.28 MHz)	Worst case	**0.0255 mW/g**	1.6 W/kg

Table 3: Test results (Body SAR)

Note: The body measurement were performed only with the mobile phone without ancillary equipment. To simulate the worst case configuration, the EUT were placed directly on the flat phantom.

2.6 Tissue dielectric properties

The dielectric properties have been measured by the contact probe method at 22-24°C. The following materials are used for producing the tissue-equivalent materials:

Ingredients (% by weight)	**Frequency (MHz)**									
Used frequency	☐ 450		☐ 835		☐ 915		☐ 1900		☒ 2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.40	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7

Table 4: Tissue dielectric properties

Salt: 99+% Pure Sodium Chloride
Sugar: 98+% Pure Sucrose
Water: De-ionized, 16M? + resistivity
HEC: Hydroxyethyl Cellulose
DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]
Triton X-100 (ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

2.7 Tissue parameters

Used Target Frequency	**Target Head Tissue**		**Target Body Tissue**		**Measured Head Tissue**		**Measured Body Tissue**		**Measured Date**
[MHz]	?$_r$	? [S/m]	?$_r$	? [S/m]	?$_r$	? [S/m]	?$_r$	? [S/m]	
☐ 450	43.5	0.87	56.7	0.94	---	---	---	---	---
☐ 835	41.5	0.90	55.2	0.97	---	---	---	---	---
☐ 900	41.5	0.97	55.0	1.05	---	---	---	---	---
☐ 915	41.5	0.98	55.0	1.06	---	---	---	---	---
☐ 1800 - 2000	40.0	1.40	53.3	1.52	---	---	---	---	---
☒ 2450	39.2	1.80	52.7	1.95	36.3	1.92	53.0	2.14	30th August 01

Table 5: Parameter of the tissue simulating liquid

2.8 Measurement uncertainties

The overall combined measurement uncertainty of the measurement system is ?12,1% (K=1). The breakdown of the individual uncertainties is as follows:

Calibration Error:				
	Probability Distribution	**Standard Uncertainty**		
		900 MHz	**1500 MHz**	**1800 MHz**
Incident power	Rectangular	+/-1,2 %	+/-1,2 %	+/-1,2 %
Mismatch uncertainty	Rectangular	+/-0,6 %	+/-0,6 %	+/-0,6 %
Exp. fitting error (95% confidence)	Normal	+/-0,4 %	+/-0,2 %	+/-0,2 %
Liquid permittivity	Rectangular	+/-2,3 %	+/-2,8 %	+/-2,9 %
Probe positioning	Normal	+/-0,5 %	+/-0,8 %	+/-1.0 %
Field homogeneity	Rectangular	+/-0,6 %	+/-1,2 %	+/-1,4 %
Combined Standard Uncertainty		**+/-2,8 %**	**+/-3,4 %**	**+/-3,6 %**

E-Field Probe Error:				
Error Description	**Error**	**Probability Distribution**	**Weight**	**Standard Uncertainty**
Isotropy around axis	+/-0,2 dB	U-shape	0,5	+/-2,4 %
Spherical Isotropy	+/-0,4 dB	U-shape	0,5	+/-4,8 %
Isotropy from gradient	+/-0,5 dB	U-shape	0	
Spatial resolution	+/-0,5 %	normal	1	+/-0,5 %
Linearity error	+/-0,2 dB	rectangular	1	+/-2,5 %
Calibration error	+/-3,6 %	normal	1	+/-3,6 %
Combined Standard Uncertainty:				**+/-6,9 %**

Source Uncertainty:				
Error Description	**Error**	**Probability Distribution**	**Weight**	**Standard Uncertainty**
Device positioning	+/-6%	normal	1	+/-6%
Laboratory set-up	+/-3 %	normal	1	+/-3%
Combined Standard Uncertainty:				**+/-6,7 %**

SAR Evaluation Error					
Error Description	**Error**	**Probability Distribution**	**Weight**	**Standard Uncertainty**	**Offset**
Data acquisition error	+/-1%	rectangular	1	+/-0,6 %	
ELF and RF disturbances	+/-0,25 %	normal	1	+/-0,25 %	
Conductivity assessment	+/-10 %	rectangular	1	+/-5,8 %	
Extrapolation and boundary effects	+/-3 %	normal	1	+/-3 %	+ 5 %
Probe positioning	+/-0,1 mm	normal	1	+/-1 %	
Integration and cube orientation	+/-3 %	normal	1	+/-3 %	
Cube shape inaccuracies	+/-2 %	rectangular	1	+/-1.2 %	
Combined Standard Uncertainty:				**+/-7,4 %**	

Combined Uncertainties		
Error Description	**Standard Uncertainty**	**Offset**
E-field probe errors	+/-6.9 %	
SAR evaluation error	+/-7.4 %	+/-5 %
Source uncertainty	+/-6,7 %	
Combined Standard Uncertainty:	**+/-12.1 %**	
Expanded Uncertainty (k=2):	**+/-24,2 %**	

Table 6: Measurement uncertainties

The measurement uncertainties were performed by Schmid & Partner Engineering AG.

2.9 System validation

The system validation is used for verifying the accuracy of the complete measurement system and performance of the software. The system validation is performed with 1800 MHz head tissue equivalent material according IEEE Std 1528-200X: 2001. (graphics plots attached).

Validation Kit	Frequency	Target SAR_{1g}	Target SAR_{10g}	Measured SAR_{1g}	Measured SAR_{10g}	Measured date
D1800V2, S/N:287	1800 MHz	38.1 mW/g	19.8 mW/g	38.2 mW/g	20.1 mW/g	08/31/2001

Table 7: Test results (system validation)

Appendix 1: System performance verification

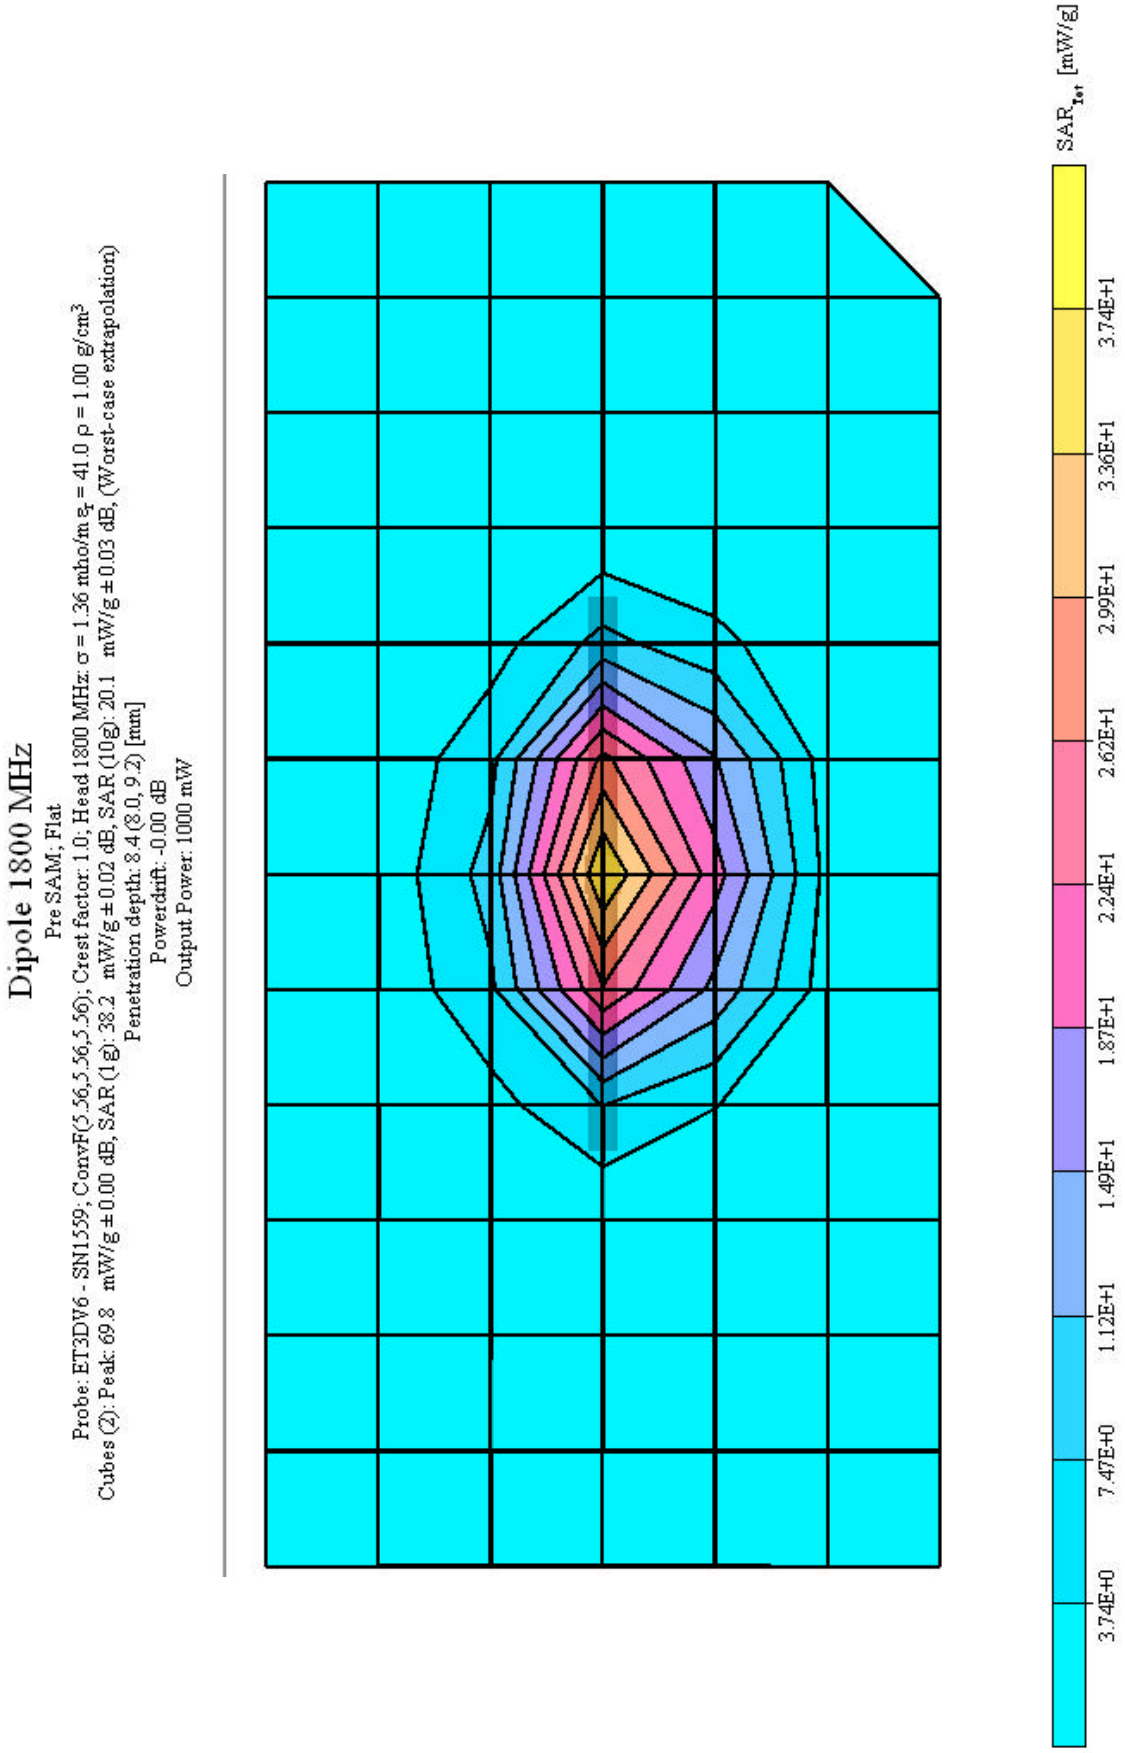

Appendix 2: Measurement results (printout from DASY ™)

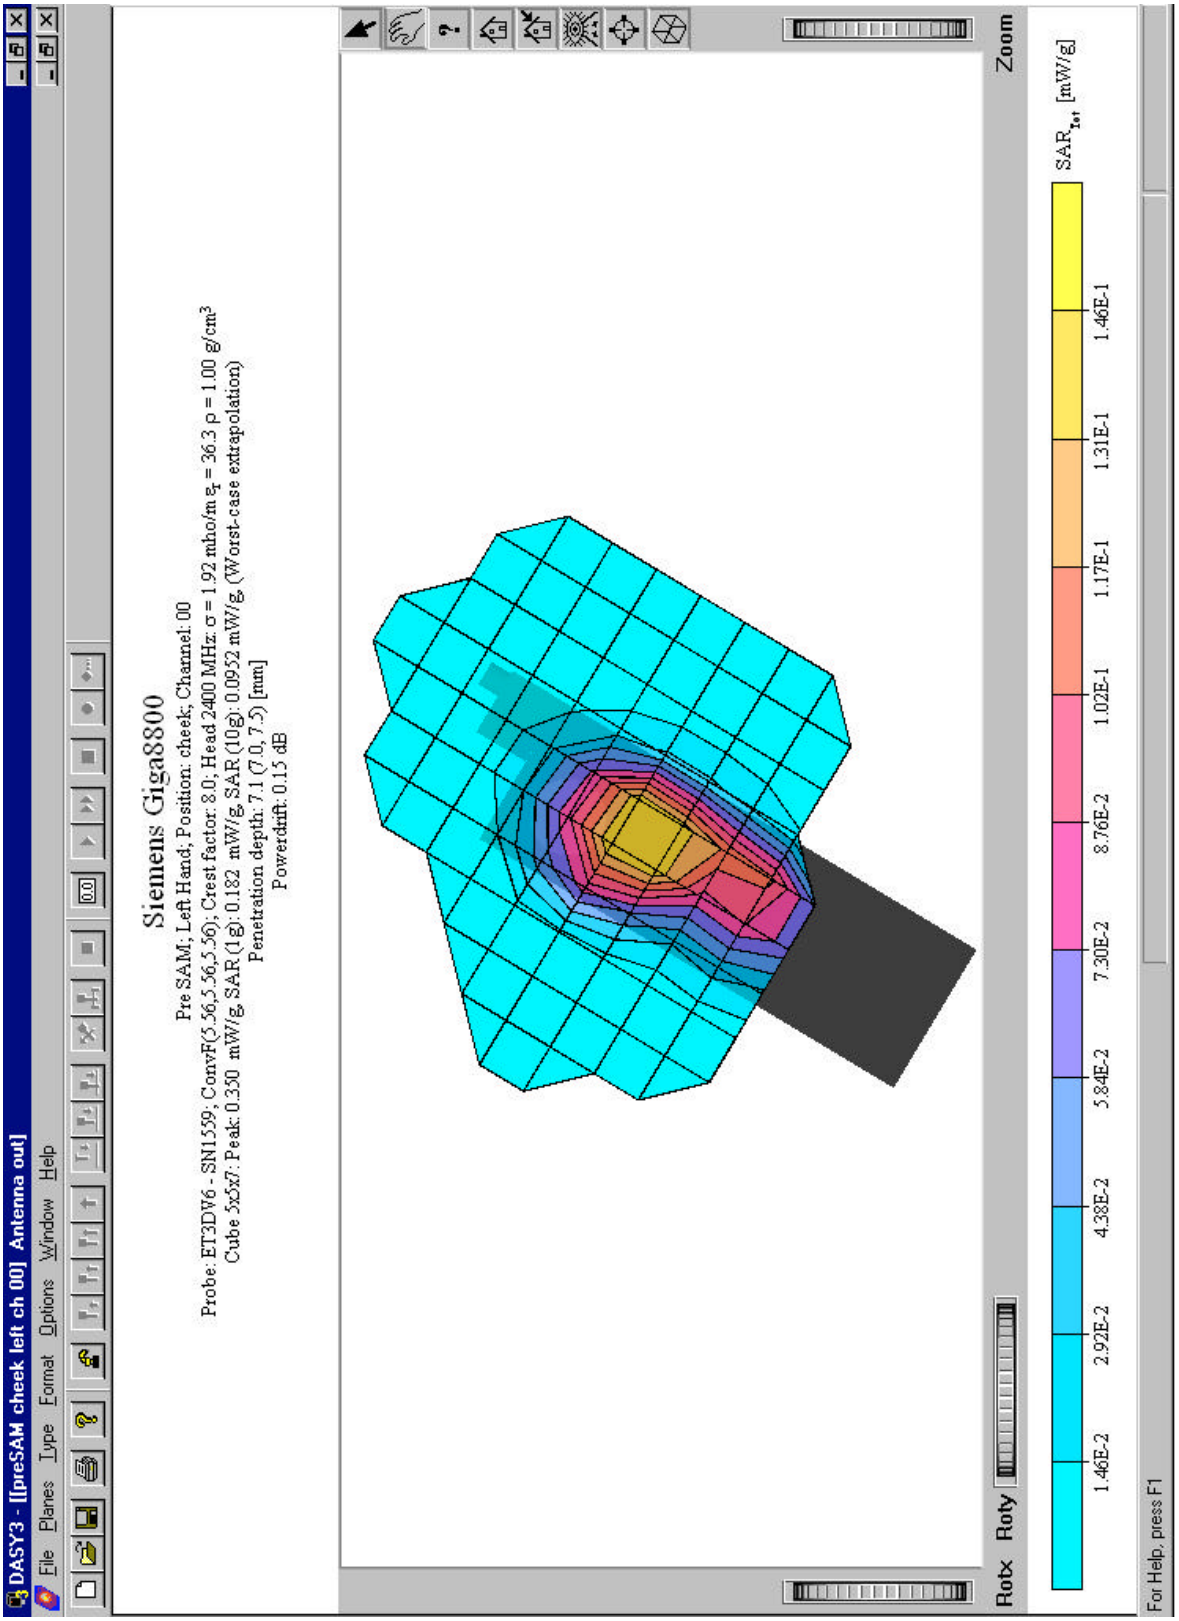

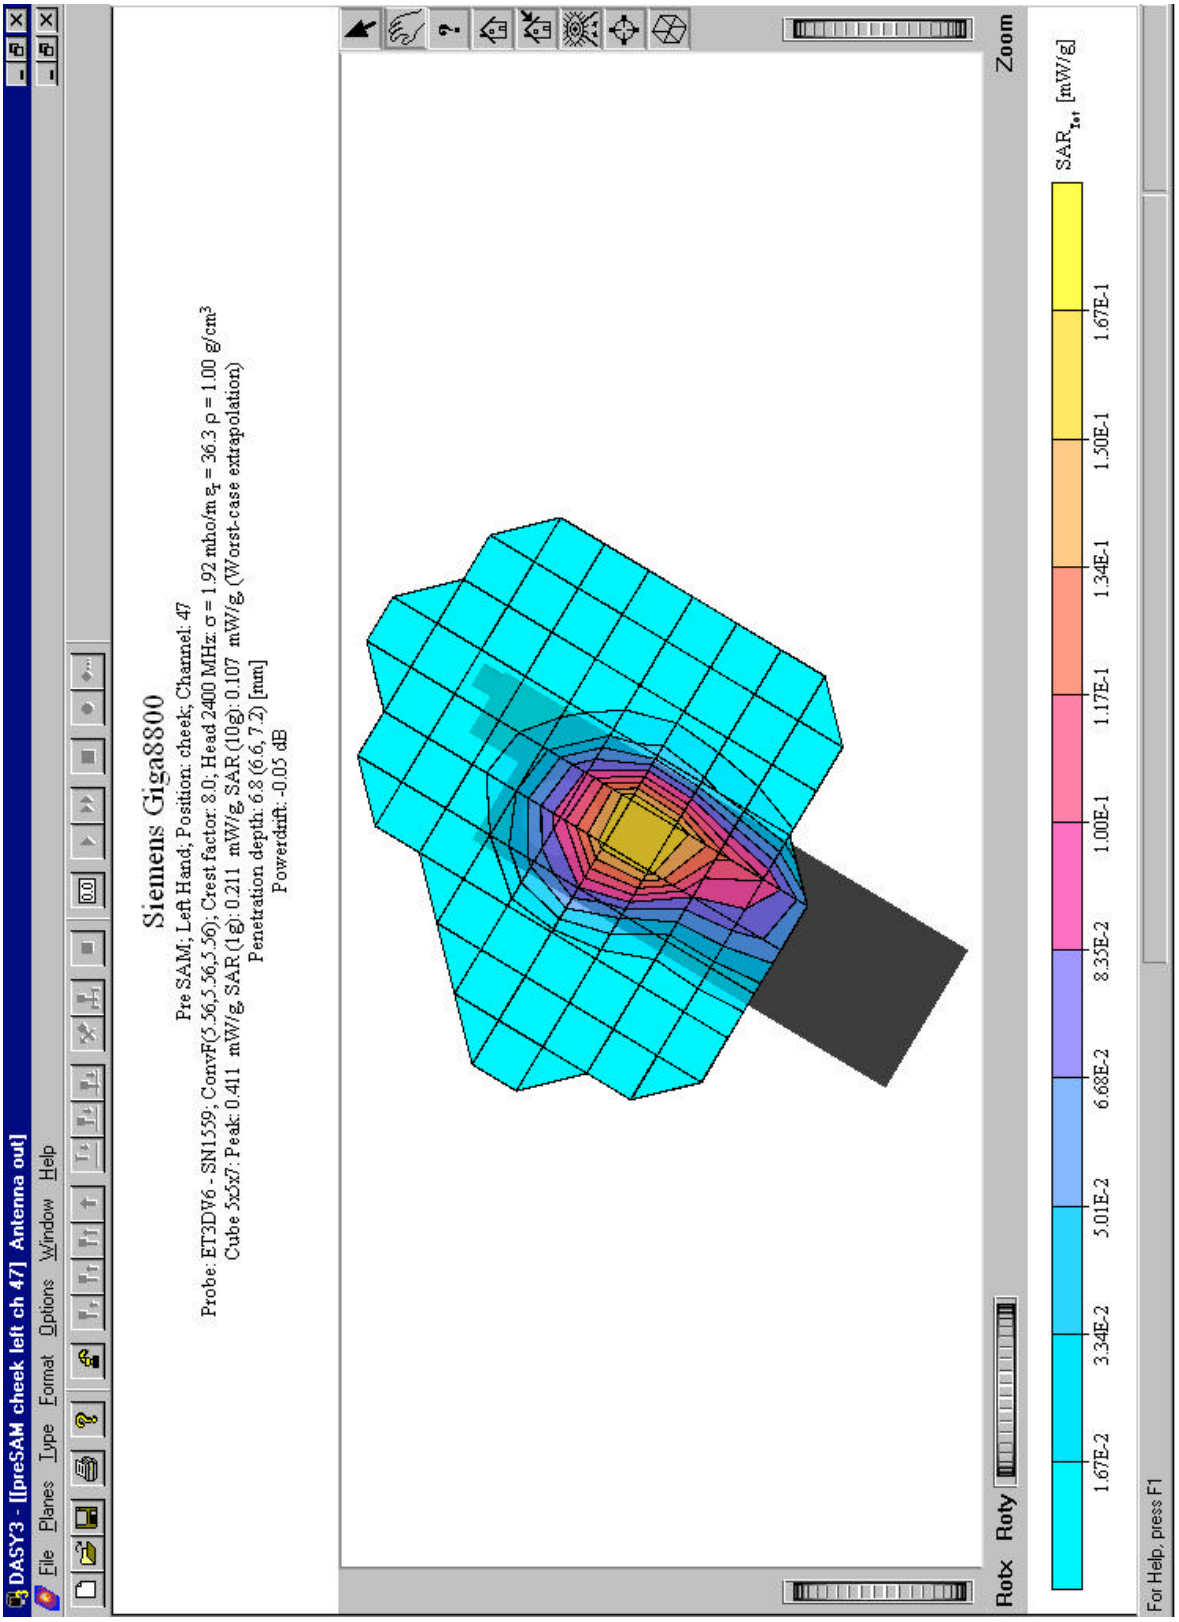
DASY3 - [[preSAM cheek left ch 47] Antenna out]
File Planes Type Format Options Window Help
Siemens Giga800
Pre SAM; Left Hand; Position: cheek; Channel: 47
Probe: ET3DV6 - SN1559; ConvF(5.56,5.56,5.56); Crest factor: 8.0; Head 2400 MHz: σ = 1.92 mho/m ρ = 36.3 ρ = 1.00 g/cm³
Cube 5x5x7: Peak: 0.411 mW/g SAR (1g): 0.211 mW/g SAR (10g): 0.107 mW/g (Worst-case extrapolation)
Penetration depth: 6.8 (6.6, 7.2) [mm]
Powerdrift: -0.05 dB
Zoom
Rotx Roty
SAR [mW/g]
1.67E-2 3.34E-2 5.01E-2 6.68E-2 8.35E-2 1.00E-1 1.17E-1 1.34E-1 1.50E-1 1.67E-1
For Help, press F1

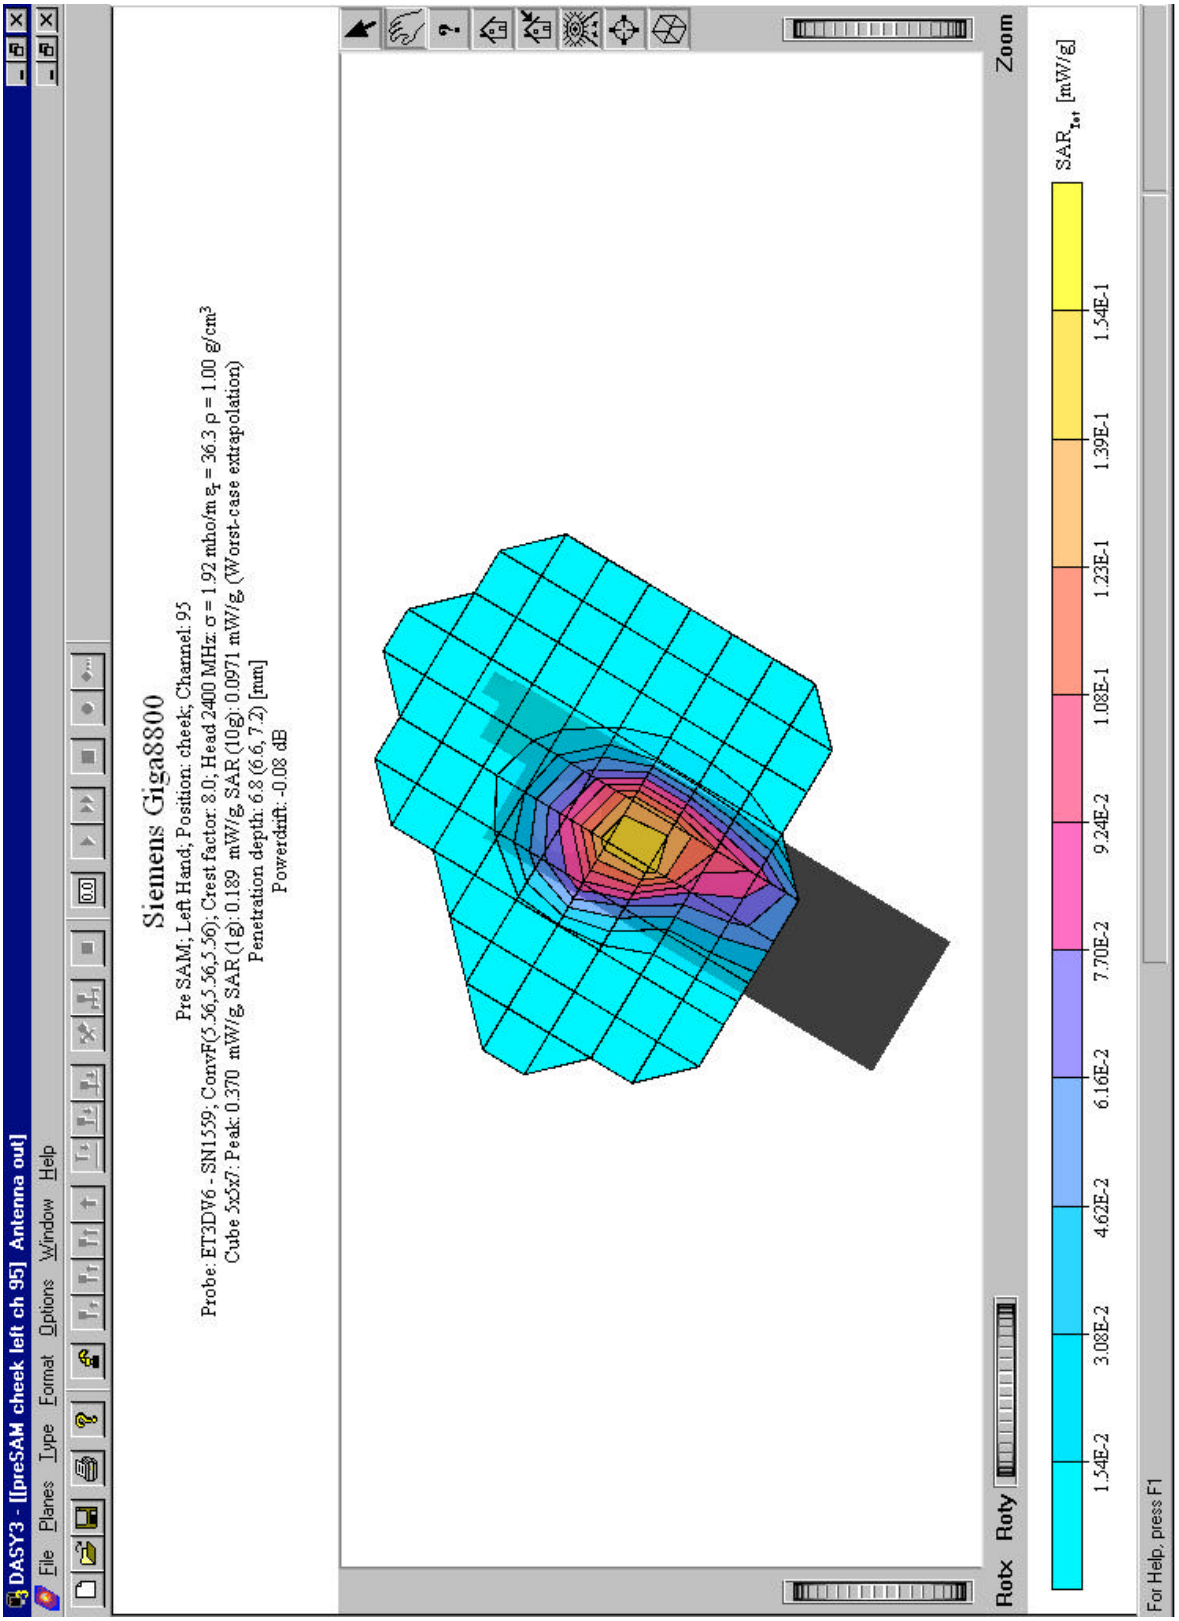
DASY3 - [[preSAM cheek left ch 95] Antenna out]
File Planes Type Format Options Window Help
Siemens Giga800
Pre SAM; Left Hand; Position: cheek; Channel: 95
Probe: ET3DV6 - SN1559; ConvF(5.56,5.56,5.56); Crest factor: 8.0; Head 2400 MHz: σ = 1.92 mho/m εr = 36.3 ρ = 1.00 g/cm³
Cube 5x5x7: Peak: 0.370 mW/g SAR (1g): 0.189 mW/g SAR (10g): 0.0971 mW/g (Worst-case extrapolation)
Penetration depth: 6.8 (6.6, 7.2) [mm]
Powerdrift: -0.08 dB
Zoom
Rotx Roty
SAR [mW/g]
1.54E-2 3.08E-2 4.62E-2 6.16E-2 7.70E-2 9.24E-2 1.08E-1 1.23E-1 1.39E-1 1.54E-1
For Help, press F1

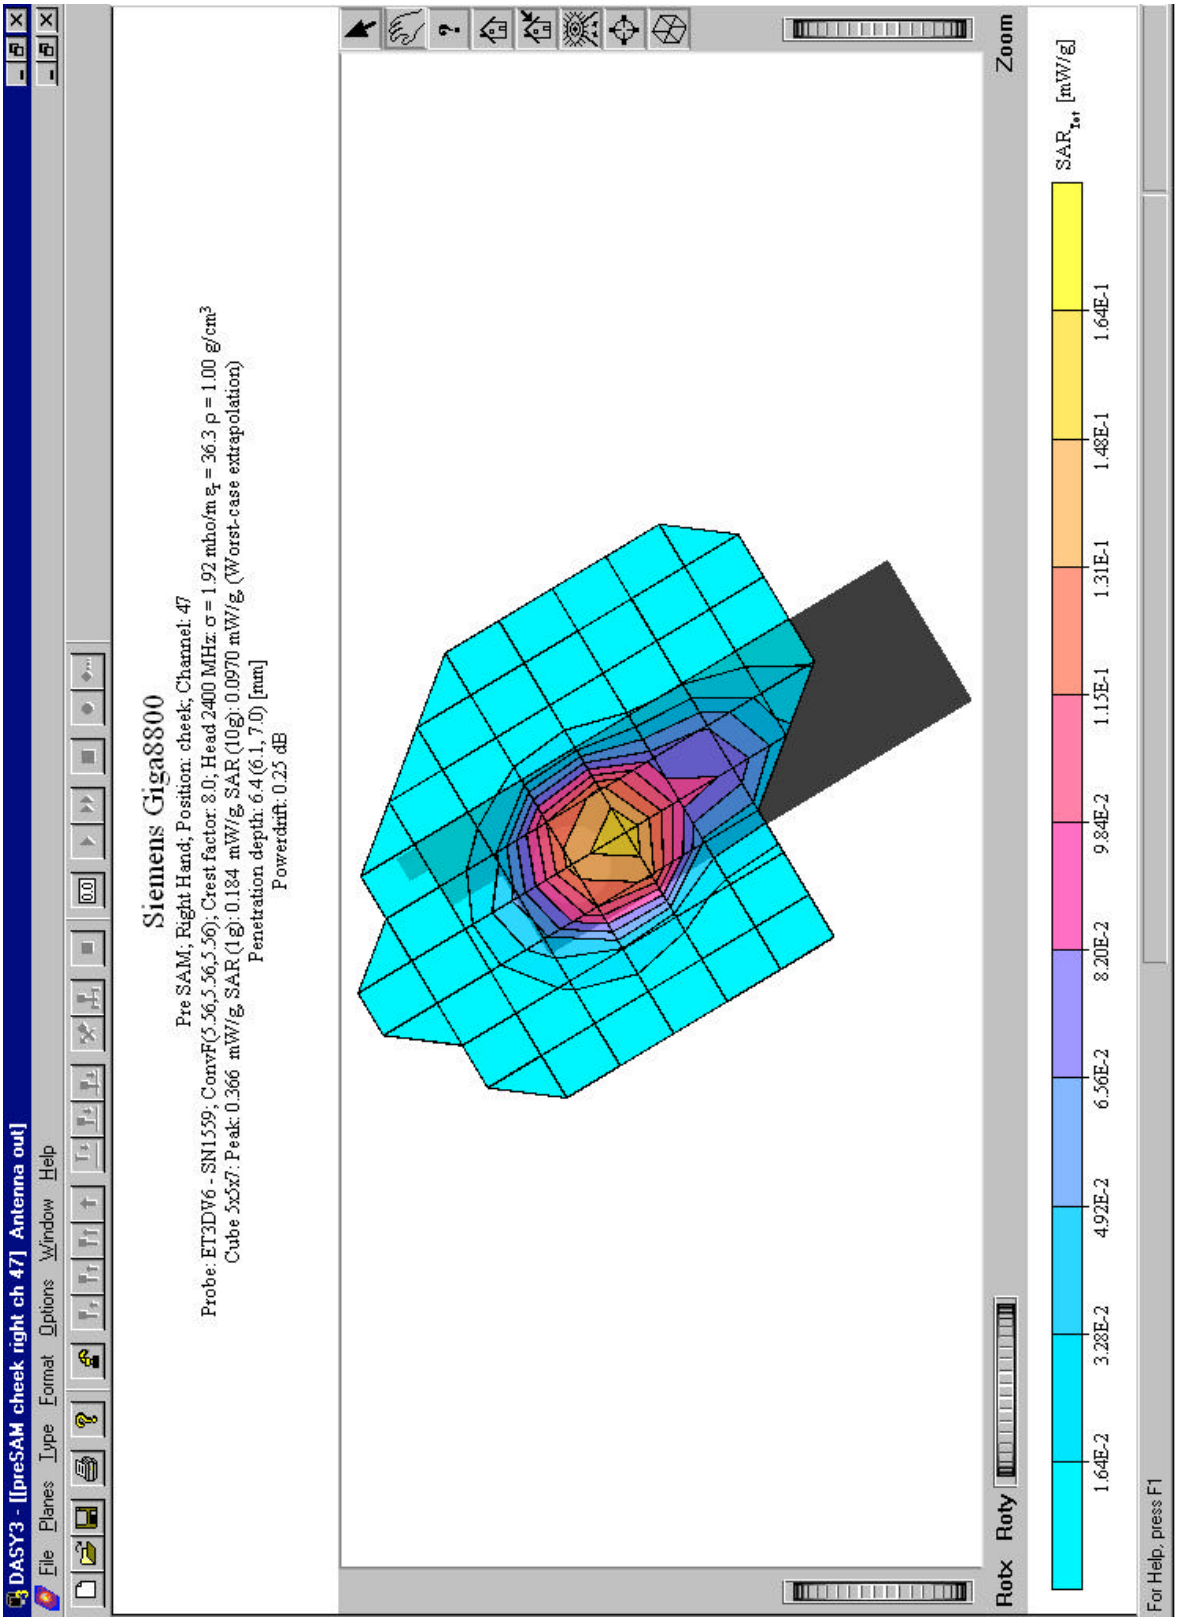
DASY3 - [[preSAM cheek right ch 47] Antenna out]
File Planes Type Format Options Window Help
Siemens Giga800
Pre SAM; Right Hand; Position: cheek; Channel: 47
Probe: ET3DV6 - SN1559; ConvF(5.56,5.56,5.56); Crest factor: 8.0; Head 2400 MHz: σ = 1.92 mho/m εr = 36.3 ρ = 1.00 g/cm³
Cube 5x5x7: Peak: 0.366 mW/g SAR (1g): 0.184 mW/g SAR (10g): 0.0970 mW/g (Worst-case extrapolation)
Penetration depth: 6.4 (6.1, 7.0) [mm]
Powerdrift: 0.25 dB
Zoom
Rotx Roty
SAR [mW/g]
1.64E-2 3.28E-2 4.92E-2 6.56E-2 8.20E-2 9.84E-2 1.15E-1 1.31E-1 1.48E-1 1.64E-1
For Help, press F1

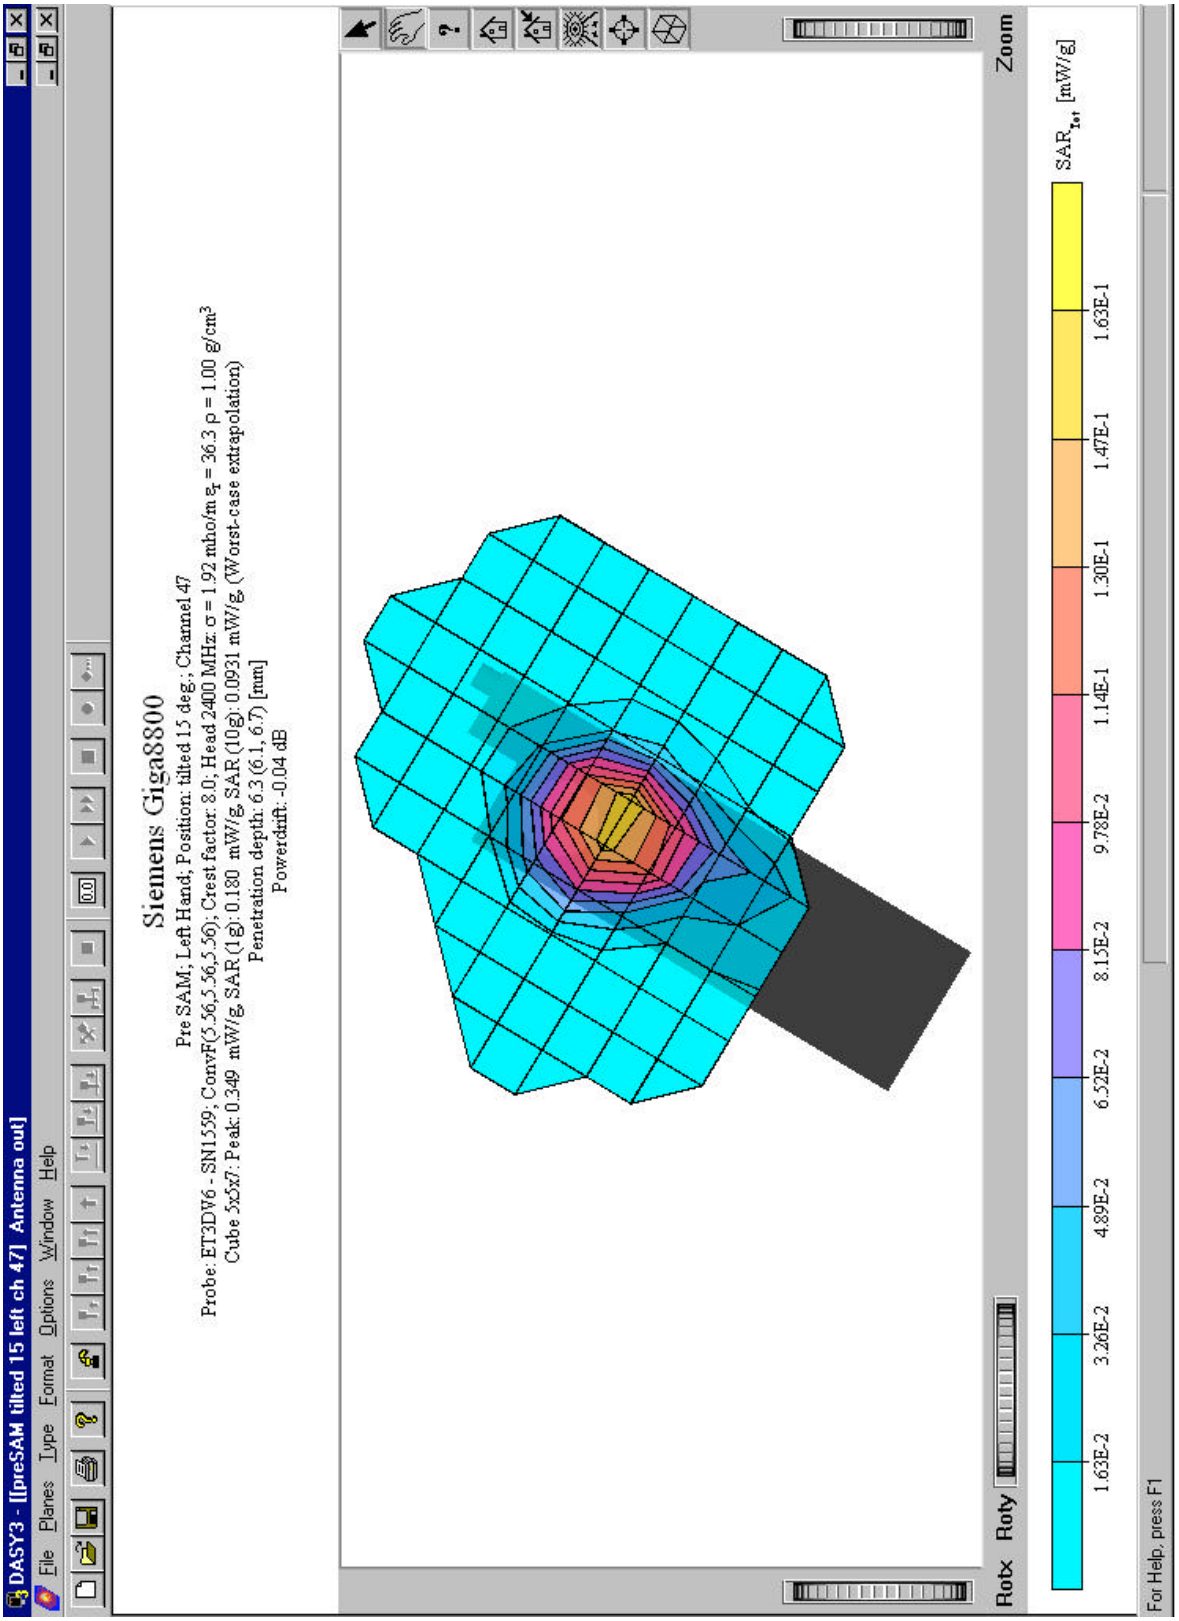
DASY3 - [[preSAM tilted 15 left ch 47] Antenna out]
File Planes Type Format Options Window Help
Siemens Giga800
Pre SAM; Left Hand; Position: tilted 15 deg.; Channel 47
Probe: ET3DV6 - SN1559; ConvF(5.56,5.56,5.56); Crest factor: 8.0; Head 2400 MHz: σ = 1.92 mho/m εr = 36.3 ρ = 1.00 g/cm³
Cube 5x5x7: Peak: 0.349 mW/g SAR (1g): 0.180 mW/g SAR (10g): 0.0931 mW/g (Worst-case extrapolation)
Penetration depth: 6.3 (6.1, 6.7) [mm]
Powerdrift: -0.04 dB
Zoom
Rotx Roty
SAR [mW/g]
1.63E-2 3.26E-2 4.89E-2 6.52E-2 8.15E-2 9.78E-2 1.14E-1 1.30E-1 1.47E-1 1.63E-1
For Help, press F1

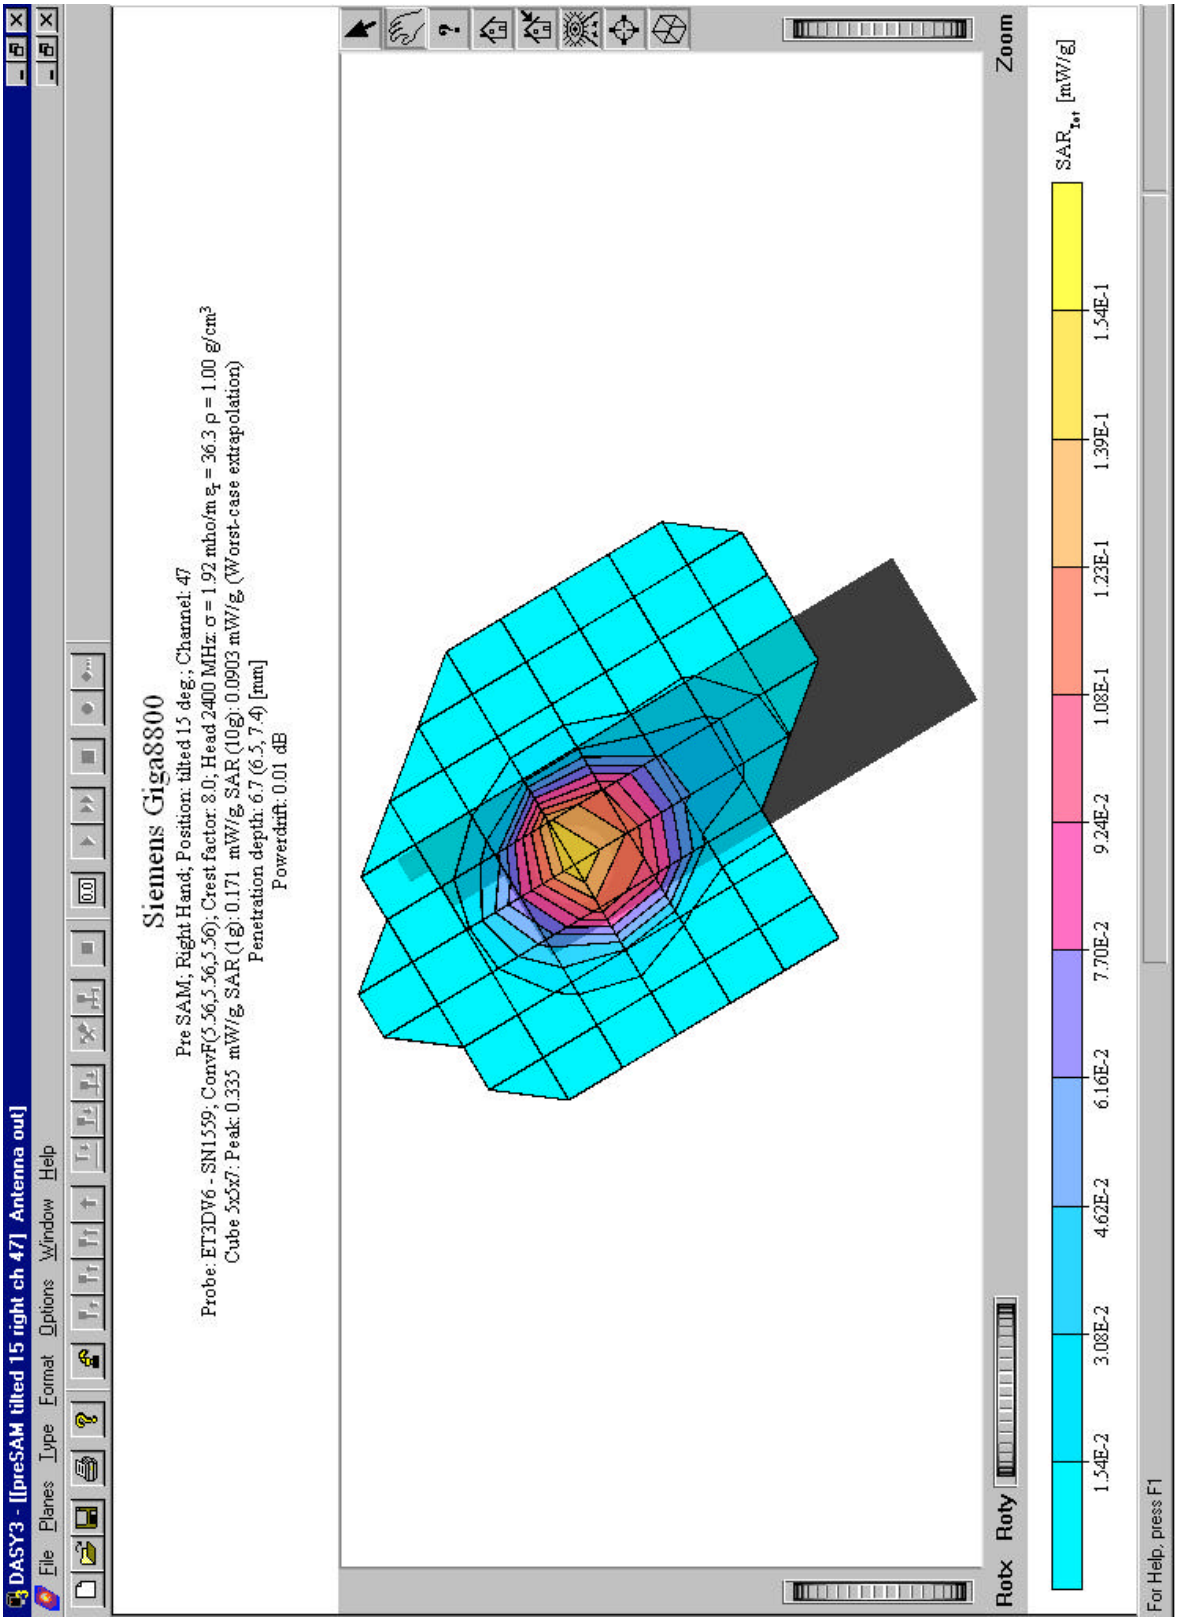
DASY3 - [[preSAM tilted 15 right ch 47] Antenna out]
File Planes Type Format Options Window Help
Siemens Giga8800
Pre SAM; Right Hand; Position: tilted 15 deg.; Channel: 47
Probe: ET3DV6 - SN1559; ConvF(5.56,5.56,5.56); Crest factor: 8.0; Head 2400 MHz: σ = 1.92 mho/m εr = 36.3 ρ = 1.00 g/cm3
Cube 5x5x7: Peak: 0.335 mW/g, SAR (1g): 0.171 mW/g, SAR (10g): 0.0903 mW/g, (Worst-case extrapolation)
Penetration depth: 6.7 (6.5, 7.4) [mm]
Powerdrift: 0.01 dB
Zoom
Rotx Roty
SAR Tot [mW/g]
1.54E-2
3.08E-2
4.62E-2
6.16E-2
7.70E-2
9.24E-2
1.08E-1
1.23E-1
1.39E-1
1.54E-1
For Help, press F1

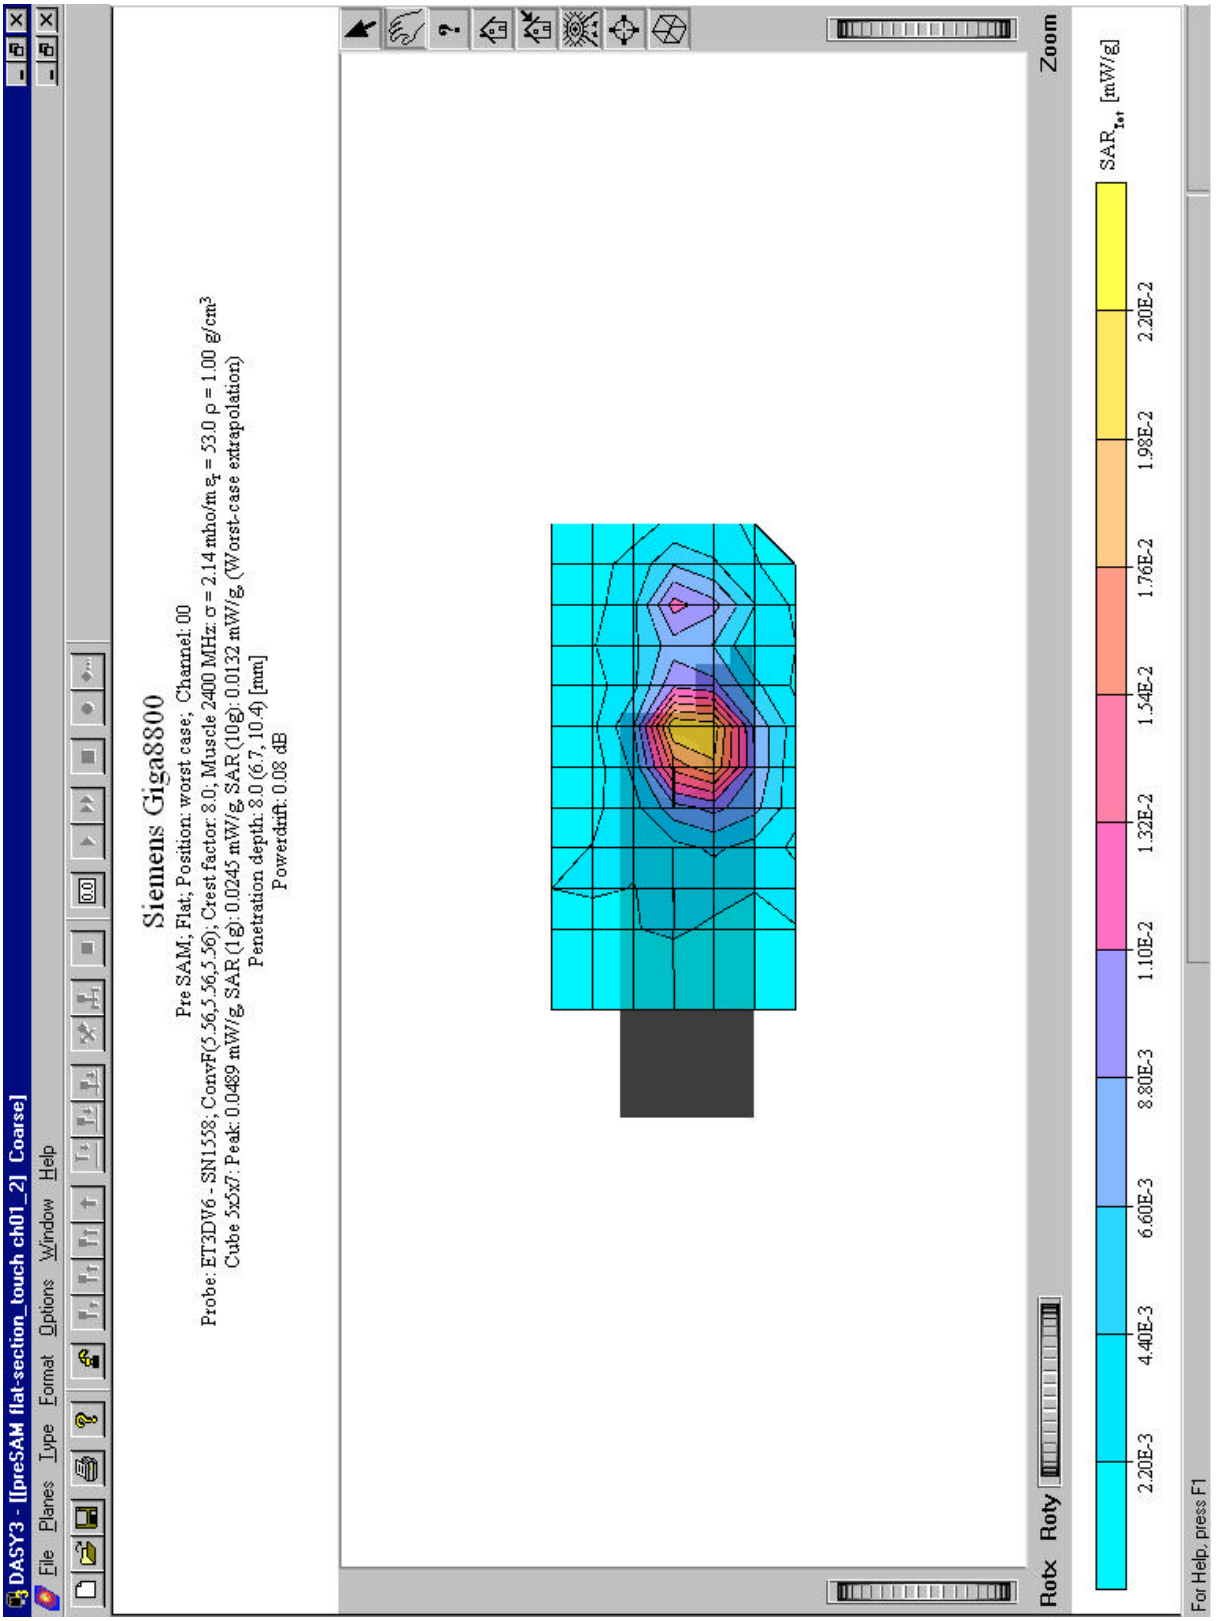
DASY3 - [[preSAM flat-section_touch ch01_2] Coarse]
File Planes Type Format Options Window Help
Siemens Giga800
Pre SAM; Flat; Position: worst case; Channel: 00
Probe: ET3DV6 - SN1558; ConvF(5.56,5.56,5.56); Crest factor: 8.0; Muscle 2400 MHz: σ = 2.14 mho/m εr = 53.0 ρ = 1.00 g/cm³
Cube 5x5x7: Peak: 0.0489 mW/g SAR (1g): 0.0245 mW/g SAR (10g): 0.0132 mW/g (Worst-case extrapolation)
Penetration depth: 8.0 (6.7, 10.4) [mm]
Powerdrift: 0.08 dB
Zoom
Rotx Roty
SAR1st [mW/g]
2.20E-3 4.40E-3 6.60E-3 8.80E-3 1.10E-2 1.32E-2 1.54E-2 1.76E-2 1.98E-2 2.20E-2
For Help, press F1

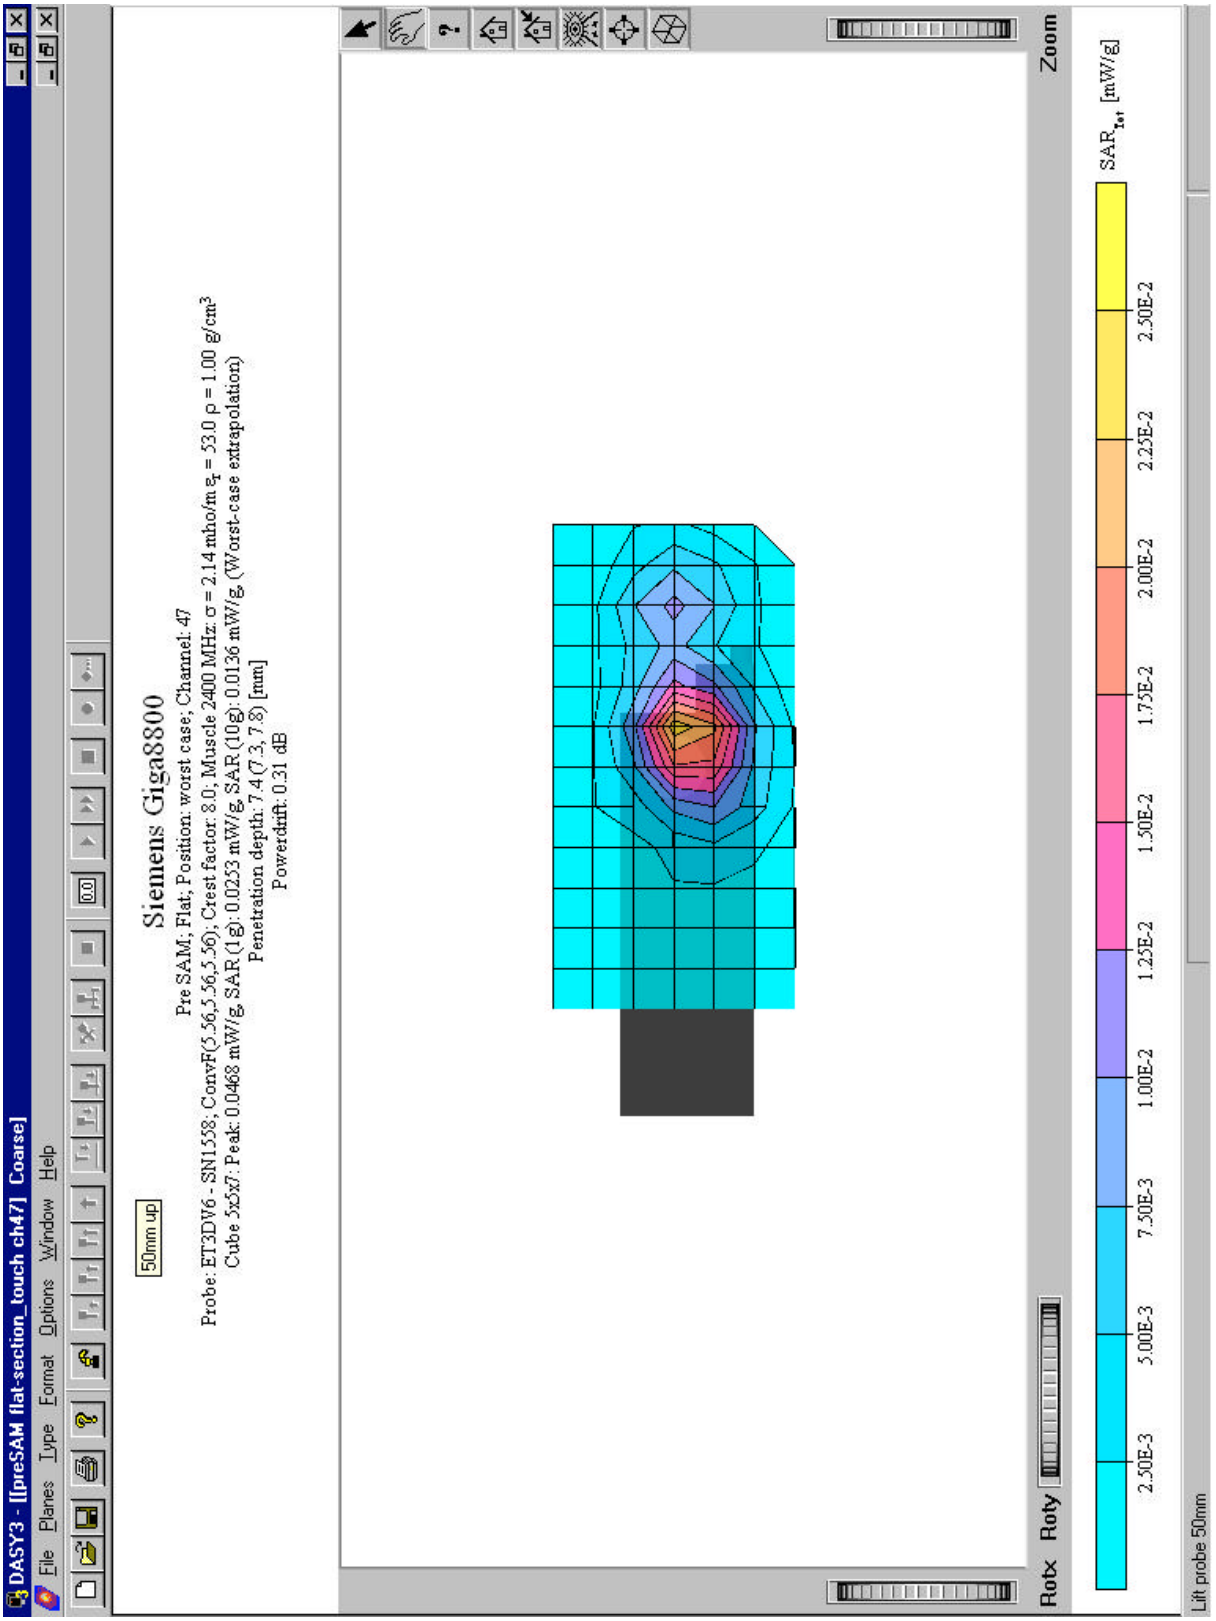
DASY3 - [[preSAM flat-section_touch ch47] Coarse]
File Planes Type Format Options Window Help
50mm up
Siemens Giga800
Pre SAM; Flat; Position: worst case; Channel: 47
Probe: ET3DV6 - SN1558; ConvF(5.56,5.56,5.56); Crest factor: 8.0; Muscle 2400 MHz: σ = 2.14 mho/m εr = 53.0 ρ = 1.00 g/cm³
Cube 5x5x7: Peak: 0.0468 mW/g SAR (1g): 0.0253 mW/g SAR (10g): 0.0136 mW/g (Worst-case extrapolation)
Penetration depth: 7.4 (7.3, 7.8) [mm]
Powerdrift: 0.31 dB
Zoom
Rotx Roty
SAR1st [mW/g]
2.50E-3 5.00E-3 7.50E-3 1.00E-2 1.25E-2 1.50E-2 1.75E-2 2.00E-2 2.25E-2 2.50E-2
Lift probe 50mm

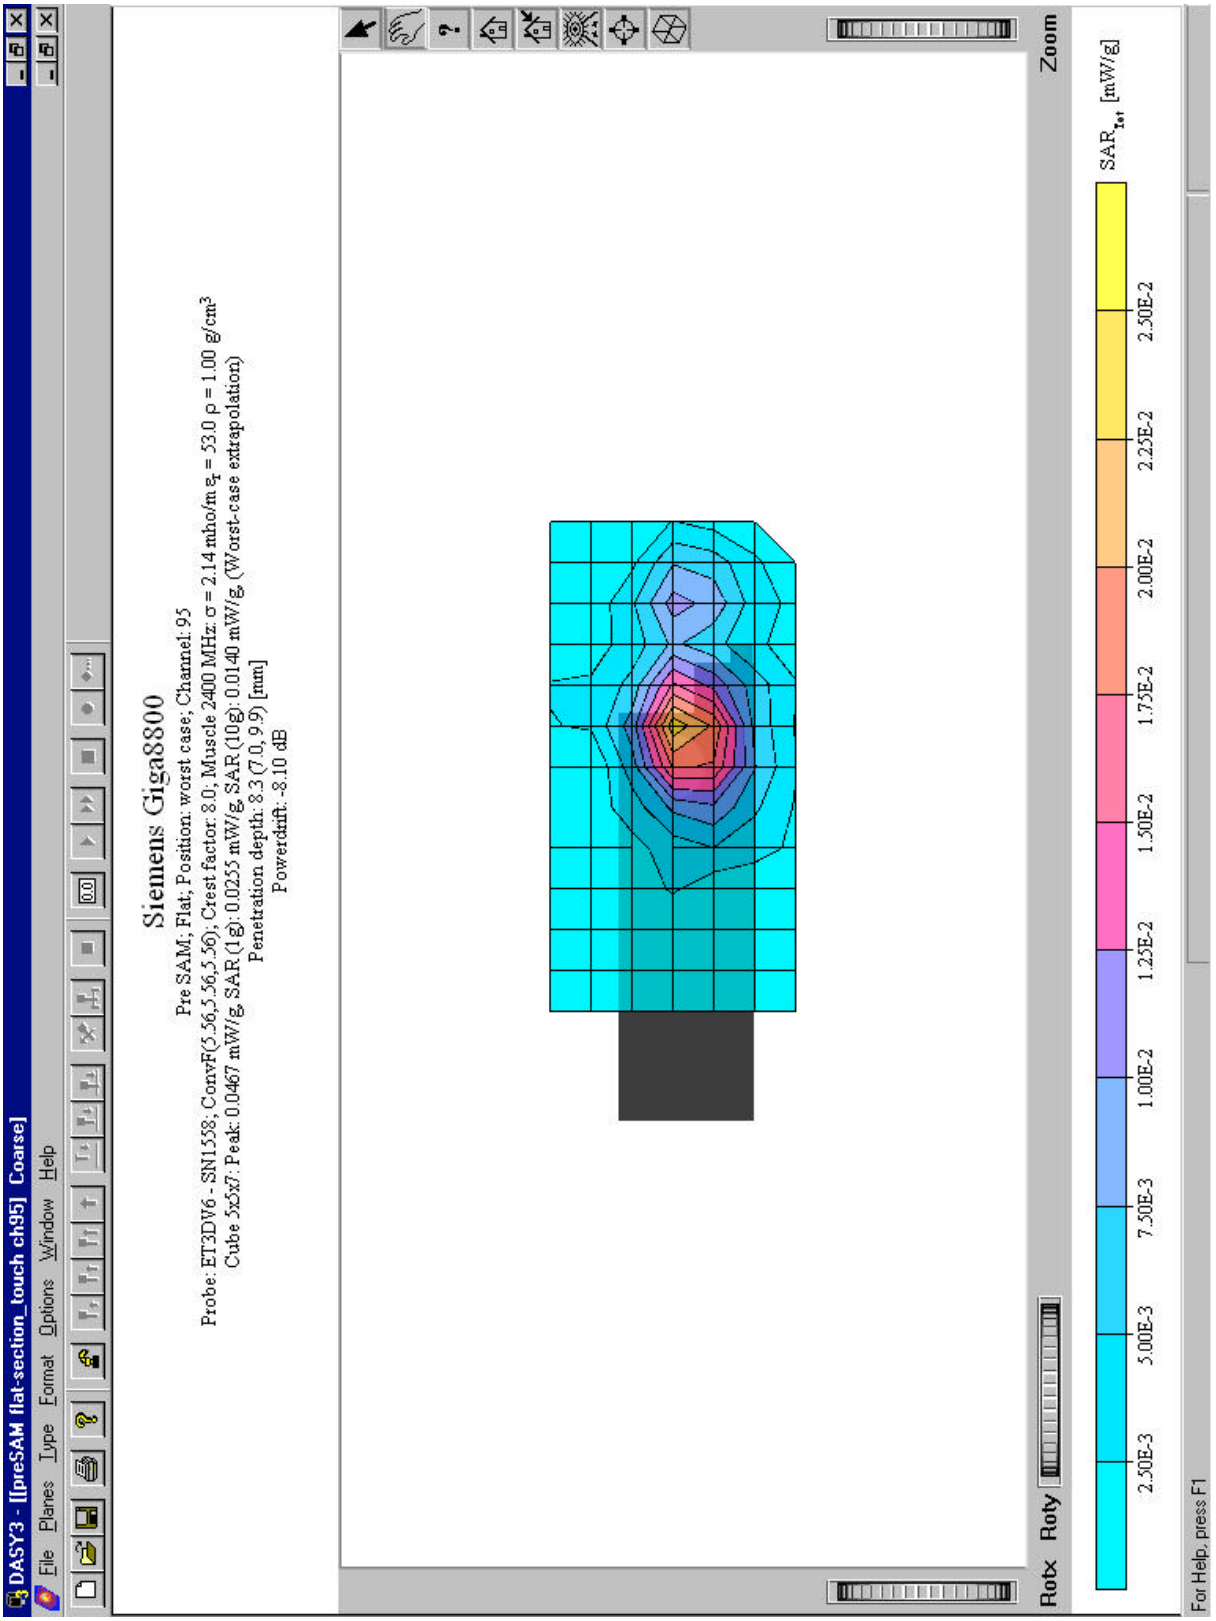
DASY3 - [[preSAM flat-section_touch ch95] Coarse]
File Planes Type Format Options Window Help
Siemens Giga800
Pre SAM; Flat; Position: worst case; Channel: 95
Probe: ET3DV6 - SN1558; ConvF(5.56,5.56,5.56); Crest factor: 8.0; Muscle 2400 MHz: σ = 2.14 mho/m εr = 53.0 ρ = 1.00 g/cm³
Cube 5x5x7: Peak: 0.0467 mW/g SAR (1g): 0.0255 mW/g SAR (10g): 0.0140 mW/g (Worst-case extrapolation)
Penetration depth: 8.3 (7.0, 9.9) [mm]
Powerdrift: -8.10 dB
Zoom
Rotx Roty
SAR1st [mW/g]
2.50E-3
5.00E-3
7.50E-3
1.00E-2
1.25E-2
1.50E-2
1.75E-2
2.00E-2
2.25E-2
2.50E-2
For Help, press F1

Appendix 3: Photo documentation

Photo 1: Measurement System DASY 3

Photo 2: Position tilted 15° (head SAR measurement)

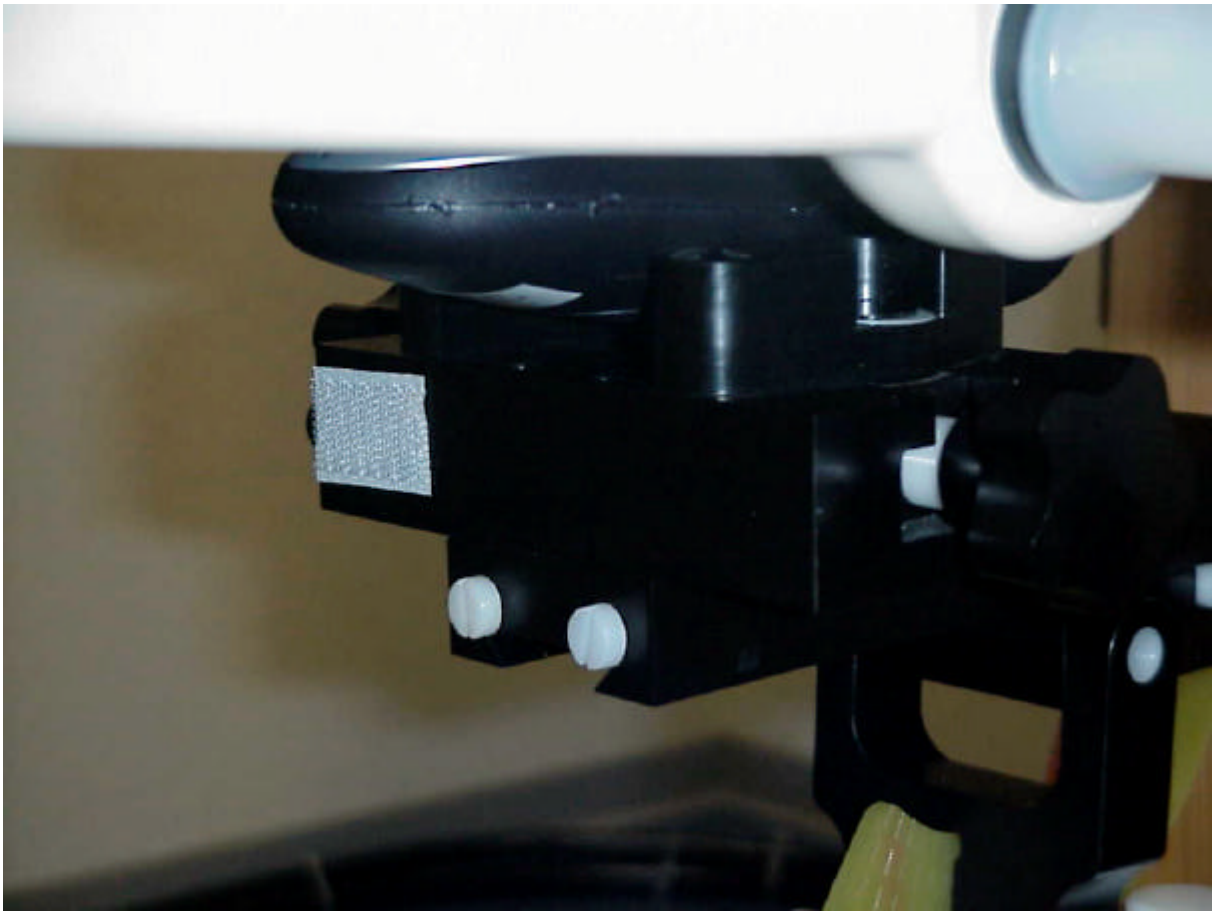

Photo 3: Body measurement (flat phantom)

Photo 4: EUT front side

Photo 5: EUT right side

Photo 6: EUT rear side

Photo 7: Used battery

Appendix 4: Calibration parameters of E-field probe

Schmid & Partner
Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

Calibration Certificate

Dosimetric E-Field Probe

Type:	**ET3DV6**
Serial Number:	**1558**
Place of Calibration:	**Zurich**
Date of Calibration:	**Feb. 20, 2001**
Calibration Interval:	**12 months**

Schmid & Partner Engineering AG hereby certifies, that this device has been calibrated on the date indicated above. The calibration was performed in accordance with specifications and procedures of Schmid & Partner Engineering AG.

Wherever applicable, the standards used in the calibration process are traceable to international standards. In all other cases the standards of the Laboratory for EMF and Microwave Electronics at the Swiss Federal Institute of Technology (ETH) in Zurich, Switzerland have been applied.

Calibrated by:

Approved by:

ET3DV6 SN:1558

DASY3 - Parameters of Probe: ET3DV6 SN:1558

Sensitivity in Free Space

NormX	**1.48**	$\mu V/(V/m)^2$
NormY	**1.35**	$\mu V/(V/m)^2$
NormZ	**1.40**	$\mu V/(V/m)^2$

Diode Compression

DCP X	**100**	mV
DCP Y	**100**	mV
DCP Z	**100**	mV

Sensitivity in Tissue Simulating Liquid

Head 450 MHz ε_r **= 43.5 ± 5%** σ **= 0.87 ± 10% mho/m**

ConvF X	**7.12**	extrapolated	Boundary effect:	
ConvF Y	**7.12**	extrapolated	Alpha	**0.18**
ConvF Z	**7.12**	extrapolated	Depth	**3.71**

Head 900 MHz ε_r **= 42 ± 5%** σ **= 0.97 ± 10% mho/m**

ConvF X	**6.55**	± 7% (k=2)	Boundary effect:	
ConvF Y	**6.55**	± 7% (k=2)	Alpha	**0.27**
ConvF Z	**6.55**	± 7% (k=2)	Depth	**3.26**

Head 1500 MHz ε_r **= 40.4 ± 5%** σ **= 1.23 ± 10% mho/m**

ConvF X	**5.78**	interpolated	Boundary effect:	
ConvF Y	**5.78**	interpolated	Alpha	**0.39**
ConvF Z	**5.78**	interpolated	Depth	**2.65**

Head 1800 MHz ε_r **= 40 ± 5%** σ **= 1.40 ± 10% mho/m**

ConvF X	**5.40**	± 7% (k=2)	Boundary effect:	
ConvF Y	**5.40**	± 7% (k=2)	Alpha	**0.45**
ConvF Z	**5.40**	± 7% (k=2)	Depth	**2.35**

Sensor Offset

Probe Tip to Sensor Center	**2.7**	mm
Optical Surface Detection	**1.9 ± 0.2**	mm