



**國際電器認證中心有限公司 International Electrical Certification Centre Ltd.**

提供電器產品測試國際認證及諮詢服務 Technical Services in Electrical Product Testing, International Certification & Information

Agent of   
Accredited Laboratory

**FCC ID: L9G43910R**

## **Exhibit 1 - Test Report**

### **Head Office**

Unit 602-605, 6/F, 31 Lok Yip Road, On Lok Tsuen, Fanling, NT, Hong Kong Tel (852) 2305 2570 Fax (852) 2756 4480  
香港新界粉嶺安樂村樂業路31號6樓602-605室 電話 (852) 2305 2570 傳真 (852) 2756 4480



INTERNATIONAL ELECTRICAL CERTIFICATION CENTRE LTD.

**F C C -  
TEST REPORT**

REPORT NO.: 18060/8/400F

Units 602-605, 6/F., 31 Lok Yip Road, On Lok Tsuen, Fanling, N.T., Hong Kong  
Tel: [852] 2305-2570 Fax: [852] 2756-4480



INTERNATIONAL ELECTRICAL  
CERTIFICATION CENTRE LTD.

## FCC – Test Report

No. 18060/8/400F

Date: 1999-02-02

Page 2 of 9

FCC listed testlab  
acc. to Section 2.948 of the FCC - Rules  
in compliance with the requirements of  
ANSI C63.4 - 1992

**Product** : R/C Toy Receiver -- 49 MHz  
Receiver

**Model** : 43910R

**Additional Model** : 43920R

**Applicant** : ARTIN INDUSTRIAL CO LTD

**Manufacturer** : ARTIN INDUSTRIAL CO LTD



INTERNATIONAL ELECTRICAL  
CERTIFICATION CENTRE LTD.

## **FCC – Test Report**

**No. 18060/8/400F**

Date: 1999-02-02

Page 3 of 9

### **TABLE OF CONTENTS**

1. Cover sheet
2. Introduction
3. Table of Contents
4. Laboratory Report
5. Summary of Testresults
6. Test Equipment List
7. Radiated Emission Testprocedure
8. Interference Radiation (Datasheet)
9. Notes for Radiation Measurement (acc. to ANSI C63.4 - 1992)



INTERNATIONAL ELECTRICAL  
CERTIFICATION CENTRE LTD.

## FCC – Test Report

No. 18060/8/400F

Date: 1999-02-02

Page 4 of 9

# LABORATORY - REPORT

**APPLICANT:** ARTIN INDUSTRIAL CO LTD  
**ADDRESS:** 2/F, Lee Sum Factory Building  
21-25 Sze Mei Street  
San Po Kong, Kowloon  
HONG KONG

**DATE OF SAMPLE RECEIVED:** 1998-11-26

**DATE OF TESTING:** 1999-02-01

### DESCRIPTION OF SAMPLE:

**Product:** R/C Toy Receiver – 49 MHz Receiver  
**Manufacturer:** ARTIN INDUSTRIAL CO LTD  
**Model number:** 43910R  
**Additional Model number:** 43920R  
**Rating:** DC 6V ('AA' Size Battery x 4)  
**Country of Origin:** P.R. CHINA

**INVESTIGATIONS REQUESTED:** Measurements to the relevant clauses of F.C.C. Rules and Regulations  
Part 15 Subpart B – 'Unintentional Radiators'

**RESULTS:** See the attached test sheets

**CONCLUSIONS** From the measurement data obtained, the tested sample was considered to have **COMPLIED** with the requirements for the relevant clauses of Federal Communications Commission Rules as specified above.



Authorized Signature

**Remark:** Purpose of those tests in this report is to provide the applicant with the necessary test data of their device for the submission to FCC with application for Equipment Authorization under the FCC Equipment Authorization Program. The tests themselves are not Approval Tests



INTERNATIONAL ELECTRICAL  
CERTIFICATION CENTRE LTD.

## FCC – Test Report

No. 18060/8/400F

Date: 1999-02-02

Page 5 of 10

# Summary of Test Results

### Interference Radiation:

Test result: O.K.  
Test data: See attached data sheet

### Interference Voltage:

Test result: N.A.  
Test data: N.A.



INTERNATIONAL ELECTRICAL  
CERTIFICATION CENTRE LTD.

## FCC – Test Report

No. 18060/8/400F

Date: 1999-02-02

Page 6 of 9

### TEST EQUIPMENT LIST

| Equipment                       | Manufacturer    | Model                    | Serial Number           | Remark                            |
|---------------------------------|-----------------|--------------------------|-------------------------|-----------------------------------|
| Test Receiver                   | Rohde & Schwarz | ESH 3                    | 863497/015              | 10KHz – 30MHz                     |
| Test Receiver                   | Rohde & Schwarz | ESVP                     | 860688/022              | 25MHz – 1,300 MHz                 |
| Artificial Mains Network (LISN) | Schwarzbeck     | NSLK 8127                | --                      | 2 x 10A, 50Ω, 50μH<br>10KHz-30MHz |
| Antenna System                  | Schwarzbeck     | BBA 9106 /<br>UHALP 9107 | --                      | 30MHz – 1000MHz                   |
| Antenna Mast System             | Schwarzbeck     | AM9104                   | --                      | Max. 4 meters height              |
| Spectrum Analyzer with Q. Peak  | Tektronix       | 2712                     | B023006                 | 9KHz – 1.8GHz                     |
| Interface for Spectrum 2712     | Tektronix       | TD3F14A                  | --                      |                                   |
| Test Receiver                   | Rohde & Schwarz | ESH 3                    | 892580/006              | 10KHz – 30MHz                     |
| Test Receiver                   | Rohde & Schwarz | ESVP                     | 863512/012              | 25MHz – 1,300 MHz                 |
| Impulse Limiter                 | Rohde & Schwarz | ESH-3-Z2                 | --                      |                                   |
| Artificial Mains Network (LISN) | Schwarzbeck     | NSLK 8127                | --                      | 2 x 10A, 50Ω, 50μH<br>10KHz-30MHz |
| Antenna System                  | Schwarzbeck     | BBA 9106 /<br>UHALP 9107 | --                      | 30MHz – 1000MHz                   |
| Signal Generator                | Rohde & Schwarz | SWS 2                    | 879113/42               | 100KHz – 1040 MHz                 |
| Digital Multimeter              | Tektronix       | DM2510G                  | DM-<br>2510GTW1055<br>5 | 10KHz – 30MHz                     |
| Turntable with Controller       | Drehtisch       | DT312                    | --                      | φ120 cm                           |



INTERNATIONAL ELECTRICAL  
CERTIFICATION CENTRE LTD.


## FCC – Test Report

No. 18060/8/400F

Date: 1999-02-02

Page 7 of 9

### Radiated Emission Test Procedure

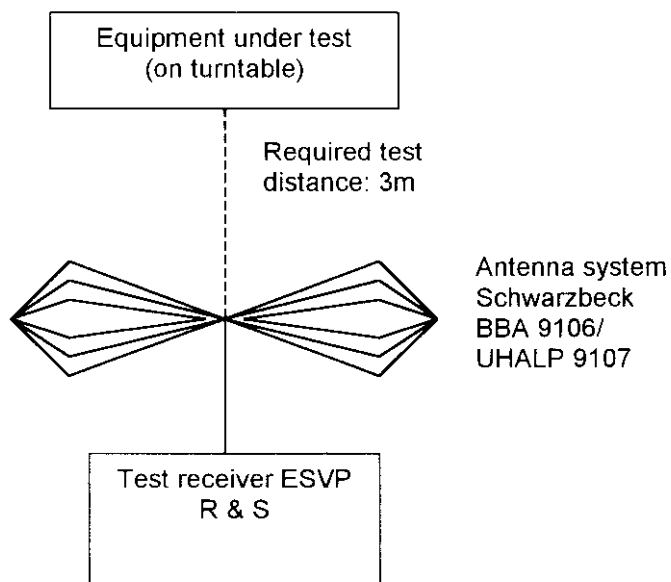



# Unintentional Radiators

International Electrical Certification Centre Ltd.


Measurement of Radiated Emissions (30MHz-1000MHz)

Acc: FCC Part 15 Subpart B

IECC Ref: 18060/8/400F  
 Model: 43910R  
 Applicant: ARTIN INDUSTRIAL CO LTD  
 Ser.Nr.: 1  
 Set under test: R/C toy Receiver  
 Connected sets: -  
 Operating mode: Power "On"

Test Equipment  
 Receiver: ESVP Rohde & Schwarz  
 Antenna: Schwarzbeck BBA 9106  
 and UHALP 9107

| Frequency (MHz) | Horz. Reading dB(μV) | Vert. Reading dB(μV) | Antenna Factor (dB) | Horiz. Test Result (μV/m) | Vert. Test Result (μV/m) | Limit (μV/m) |
|-----------------|----------------------|----------------------|---------------------|---------------------------|--------------------------|--------------|
| 42.8            | 16.5                 | 25                   | 9.4                 | 19.8                      | 52.7                     | 100.0        |
| 47.6            | 16                   | 20.5                 | 7.8                 | 15.4                      | 25.9                     | 100.0        |
| 49.92           | 16                   | 19                   | 7.0                 | 14.2                      | 20.0                     | 100.0        |
| 52.96           | 20                   | 27                   | 6.5                 | 21.2                      | 47.5                     | 100.0        |
| 54.88           | 20.5                 | 29                   | 6.2                 | 21.7                      | 57.8                     | 100.0        |
| 57.1            | 17.5                 | 25                   | 5.9                 | 14.8                      | 35.1                     | 100.0        |
| 70              | < 16                 | < 16                 | 4.0                 | < 10.0                    | < 10.0                   | 100.0        |
| 100             | < 16                 | < 16                 | 8.6                 | < 17.0                    | < 17.0                   | 150.0        |
| 200             | < 16                 | < 16                 | 15.1                | < 35.9                    | < 35.9                   | 150.0        |
| 485             | 20                   | 18                   | 19.5                | 94.4                      | 75.0                     | 200.0        |
| 490             | 22                   | 18                   | 19.6                | 119.8                     | 75.6                     | 200.0        |
| 500             | < 16                 | < 16                 | 19.7                | < 61.0                    | < 61.0                   | 200.0        |
| 1000            | < 16                 | < 16                 | 26.5                | < 133.4                   | < 133.4                  | 500.0        |

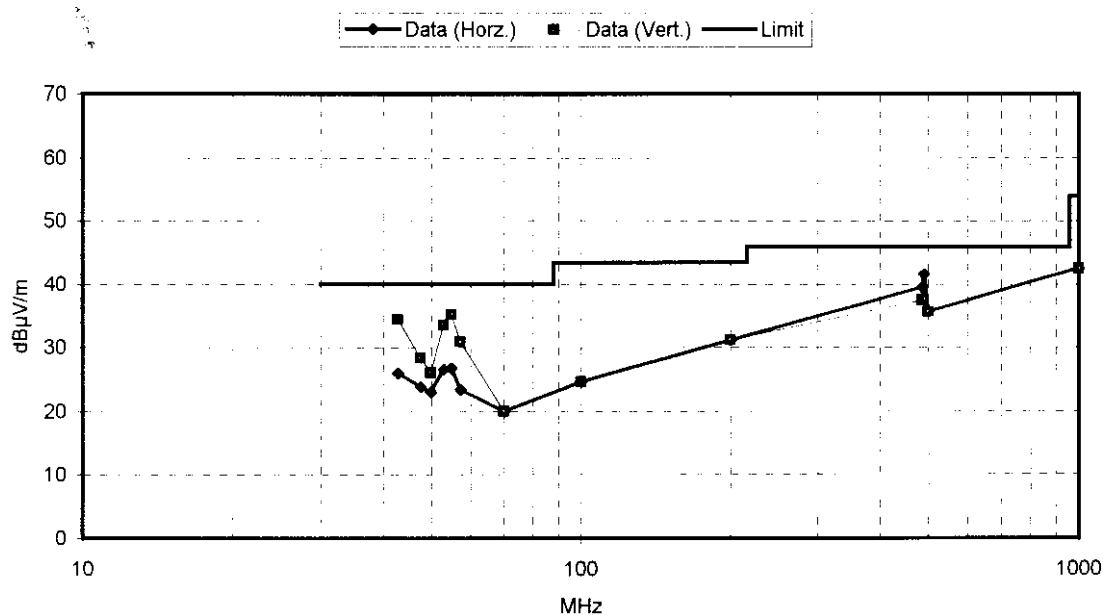

Date: 4 FEB 1999

☒ O.K.



INTERNATIONAL ELECTRICAL  
CERTIFICATION CENTRE LTD.

## FCC – Test Report

No. 18060/8/400F

Date: 1999-02-02

Page 9 of 9

# Notes for Radiation Measurement

**1. Measurement facility:**

Measurement facility located at Fanling (Hong Kong), placed on file with the FCC Pursuant to Section 2.948 of the FCC Rules.

**2. Distance between the EUT and measuring antenna:**

3 meters.

**3. Measuring instrumentations:**

Rohde & Schwarz ESVP Test Receiver ( 20 - 1300 MHz ) with a CISPR weighting QP detector, 6 dB bandwidth set at 120 KHz.

**4. Measuring antenna:**

Broad-band antenna for the frequency range 30 - 300 MHz and frequency range 300 - 1000 MHz, connected with 10 meters coaxial cable. Cable loss of the coaxial cable included in the Antenna Factor for measurement data. The antennas are capable of measuring both horizontal and vertical polarizations.

**5. Frequency range scanned:**

The frequency range 30 - 5000 MHz has been scanned. Readings of the highest emissions relating to the limit were reported as above.

**6. Arrangement of EUT:**

During the test, the sample was operated at rated supply voltage and arranged for maximum emissions.

**7. Measuring Procedure:**

In accordance with the relevant sections of the American National Standards Institute (ANSI) C63.4-1992 'Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9KHz to 40GHz'.