



INTERNATIONAL ELECTRICAL CERTIFICATION CENTRE LTD.

**F C C -
TEST REPORT**

REPORT NO.: 21444/9/400F

Units 602-605, 6/F., 31 Lok Yip Road, On Lok Tsuen, Fanling, N.T., Hong Kong
Tel: [852] 2305-2570 Fax: [852] 2756-4480

	INTERNATIONAL ELECTRICAL CERTIFICATION CENTRE LTD.	FCC – Test Report No. 21444/9/400F	Date: <u>2000-01-03</u> Page 2 of 2
---	---	---	--

FCC listed testlab
acc. to Section 2.948 of the FCC - Rules

in compliance with the requirements of
ANSI C63.4 - 1992

Product : R/C Toy Receiver -- 49 MHz Receiver

Model : 47161R

Importer : ARTIN INDUSTRIAL CO LTD

Manufacturer : ARTIN INDUSTRIAL CO LTD

	INTERNATIONAL ELECTRICAL CERTIFICATION CENTRE LTD.	FCC – Test Report No. 21444/9/400F	Date: <u>2000-01-03</u> Page 3 of 3
---	---	---	--

TABLE OF CONTENTS

1. Cover sheet
2. Introduction
3. Table of Contents
4. Laboratory Report
5. Summary of Testresults
6. Test Equipment List
7. Radiated Emission Testprocedure
8. Interference Radiation (Datasheet)
9. Notes for Radiation Measurement (acc. to ANSI C63.4 - 1992)

	INTERNATIONAL ELECTRICAL CERTIFICATION CENTRE LTD.	FCC – Test Report No. 21444/9/400F	Date: <u>2000-01-03</u> Page 4 of 4
---	---	---	--

LABORATORY - REPORT

APPLICANT: ARTIN INDUSTRIAL CO LTD
ADDRESS: 2/F, Lee Sum Factory Building
21-25 Sze Mei Street
San Po Kong, Kowloon
HONG KONG

DATE OF SAMPLE RECEIVED: 1999-12-24

DATE OF TESTING: 2000-01-03

DESCRIPTION OF SAMPLE:

Product: R/C Toy Receiver -- 49 MHz Receiver
Manufacturer: ARTIN INDUSTRIAL CO LTD
Model number: 47161R
Additional model number: --
Rating: DC 9.6V ('Rechargeable Battery Pack')
Country of Origin: P.R. CHINA

INVESTIGATIONS REQUESTED: Measurements to the relevant clauses of F.C.C. Rules and Regulations Part 15 Subpart B – 'Unintentional Radiators'

RESULTS: See the attached test sheets

CONCLUSIONS From the measurement data obtained, the tested sample was considered to have COMPLIED with the requirements for the relevant clauses of Federal Communications Commission Rules as specified above.

Authorized Signature

Remark: Purpose of those tests in this report is to provide the applicant with the necessary test data of their device for the submission to FCC with application for Equipment Authorization under the FCC Equipment Authorization Program. The tests themselves are not Approval Tests

	INTERNATIONAL ELECTRICAL CERTIFICATION CENTRE LTD.	FCC – Test Report No. 21444/9/400F	Date: <u>2000-01-03</u> Page 5 of 5
---	---	---	--

Summary of Test Results

Interference Radiation:

Test result: O.K.
Test data: See attached data sheet

Interference Voltage:

Test result: N.A.
Test data: N.A.


	INTERNATIONAL ELECTRICAL CERTIFICATION CENTRE LTD.	FCC – Test Report No. 21444/9/400F	Date: <u>2000-01-03</u> Page 6 of 6
---	---	---	--

TEST EQUIPMENT LIST

Equipment	Manufacturer	Model	Serial No.	Remark
Test Receiver	Rohde & Schwarz	ESH 3	863497/015	10KHz – 30MHz
Test Receiver	Rohde & Schwarz	ESVP	860688/022	25MHz – 1,300 MHz
Artificial Mains Network (LISN)	Schwarzbeck	NSLK 8127	--	2 x 10A, 50Ω, 50μH 10KHz-30MHz
Antenna System	Schwarzbeck	BBA 9106 / UHALP 9107	--	30MHz – 1000MHz
Antenna Mast System	Schwarzbeck	AM9104	--	Max. 4 meters height
Spectrum Analyzer with Q. Peak	Tektronix	2712	B023006	9KHz – 1.8GHz
Interface for Spectrum 2712	Tektronix	TD3F14A	--	
Test Receiver	Rohde & Schwarz	ESH 3	892580/006	10KHz – 30MHz
Test Receiver	Rohde & Schwarz	ESVP	863512/012	25MHz – 1,300 MHz
Impulse Limiter	Rohde & Schwarz	ESH-3-Z2	--	
Artificial Mains Network (LISN)	Schwarzbeck	NSLK 8127	--	2 x 10A, 50Ω, 50μH 10KHz-30MHz
Antenna System	Schwarzbeck	BBA 9106 / UHALP 9107	--	30MHz – 1000MHz
Signal Generator	Rohde & Schwarz	SWS 2	879113/42	100KHz – 1040 MHz
Digital Multimeter	Tektronix	DM2510G	DM- 2510GTW105 55	10KHz – 30MHz
Turntable with Controller	Drehtisch	DT312	--	φ120 cm

	INTERNATIONAL ELECTRICAL CERTIFICATION CENTRE LTD.	FCC – Test Report No. 21444/9/400F	Date: <u>2000-01-03</u> Page 7 of 7
---	---	---	--

Radiated Emission Testprocedure

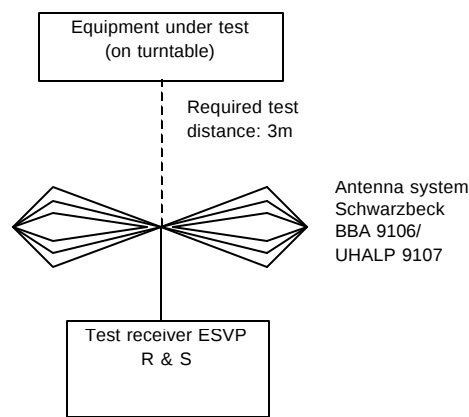



Unintentional Radiators

International Electrotechnical Certification Centre Ltd.


Measurement of Radiated Emissions (30MHz-1000MHz)

Acc: FCC Part 15 Subpart B

IECC Ref: 21444/9/4001
 Model: 471B1R
 Applicant: ARTIN INDUSTRIAL CO LTD
 Ser.Nr.: 1
 Set under test: R/C Toy Receiver
 Connected sets:
 Operating mode: Minor test with backward mode

Test Equipment
 Receiver: BSVP Rohde & Schwarz
 Antenna: Schwarzbeck UBA 91UJ
 and UHA LP 6107

Frequency (MHz)	Horiz. Reading dB(µV)	Vert. Reading dB(µV)	Antenna Factor (dB)	Horiz. Test Result (µV/m)	Vert. Test Result (µV/m)	Limit (µV/m)
47.20	< 16	20	7.9	< 14.6	35.0	100.0
51.48	18	28	8.8	13.7	43.6	100.0
53.82	22	30	9.4	26.3	66.0	100.0
54.82	18	28	9.2	18.3	51.9	100.0
56.3	17	28	8.0	14.2	39.9	100.0
81.98	18	22	5.9	14.6	23.2	100.0
83.5	18	21.6	5.6	15.0	22.6	100.0
85.3	19	20	5.8	17.4	19.5	100.0
107.72	18	25	9.5	26.5	52.8	150.0
222.8	23	< 16	15.5	88.0	< 39.3	200.0
242.12	16.5	16.5	10.5	44.5	44.5	200.0
248	26	< 18	18.6	120.8	< 42.9	200.0
254.94	19.5	20	18.0	65.7	69.6	200.0
256.4	24.5	< 10	16.9	117.4	< 44.1	200.0
284.78	21	19	17.1	80.8	84.2	200.0
1000	< 16	< 16	26.5	< 133.4	< 133.4	500.0

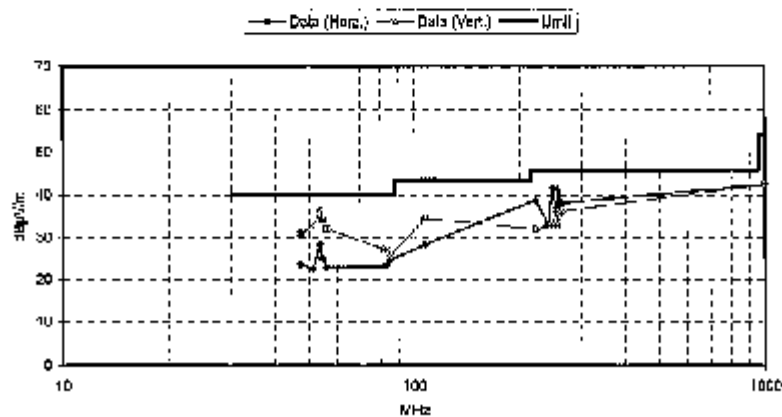

Test result:

☒ O.K.
☐ Not O.K.

Date: 03 JAN 2000

Operator:

L. P.

	INTERNATIONAL ELECTRICAL CERTIFICATION CENTRE LTD.	FCC – Test Report No. 21444/9/400F	Date: <u>2000-01-03</u> Page 9 of 9
---	---	---	--

Notes for Radiation Measurement

1. **Measurement facility:**
Measurement facility located at Fanling (Hong Kong), placed on file with the FCC Pursuant to Section 2.948 of the FCC Rules.
2. **Distance between the EUT and measuring antenna:**
3 meters.
3. **Measuring instrumentations:**
Rohde & Schwarz ESVP Test Receiver (20 - 1300 MHz) with a CISPR weighting QP detector, 6 dB bandwidth set at 120 KHz.
4. **Measuring antenna:**
Broad-band antenna for the frequency range 30 - 300 MHz and frequency range 300 - 1000 MHz, connected with 10 meters coaxial cable. Cable loss of the coaxial cable included in the Antenna Factor for measurement data. The antennas are capable of measuring both horizontal and vertical polarizations.
5. **Frequency range scanned:**
The frequency range 30 - 1000 MHz has been scanned. Readings of the highest emissions relating to the limit were reported as above.
6. **Arrangement of EUT:**
During the test, the sample was operated at rated supply voltage and arranged for maximum emissions.
7. **Measuring Procedure:**
In **accordance** with the relevant sections of the American National Standards Institute (ANSI) C63.4-1992 'Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9KHz to 40GHz'.