



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5755 MHz (U-NII-3)		
Remark:			

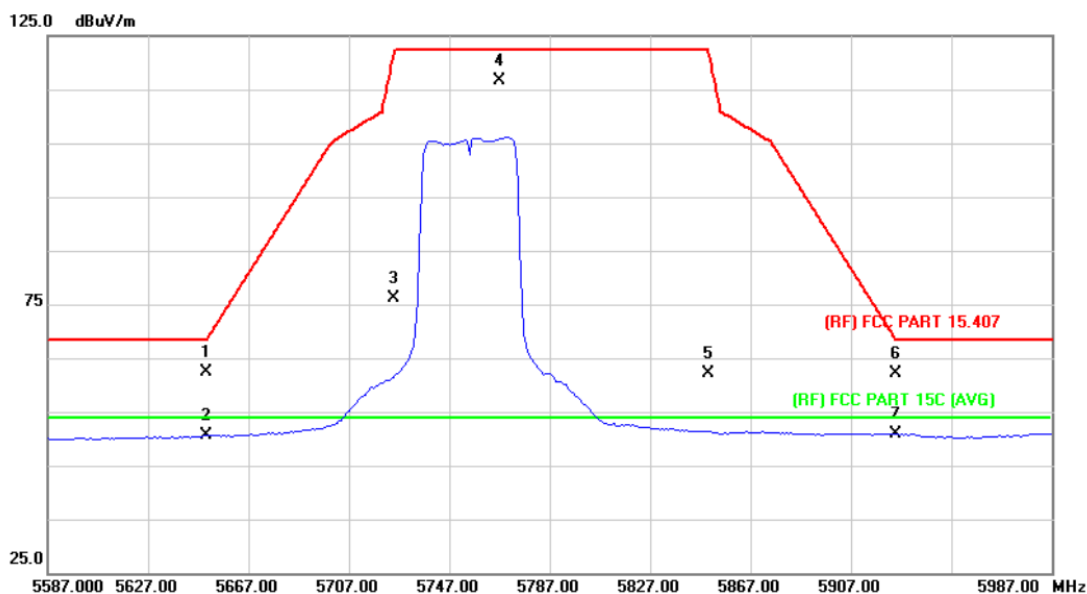

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5650.000	48.72	13.69	62.41	68.30	-5.89	peak
2		5650.000	37.02	13.69	50.71	54.00	-3.29	AVG
3		5725.000	62.17	13.89	76.06	122.30	-46.24	peak
4		5767.000	102.63	14.01	116.64	122.30	-5.66	peak
5		5850.000	47.78	14.23	62.01	122.30	-60.29	peak
6		5925.000	47.76	14.42	62.18	68.30	-6.12	peak
7	*	5925.000	36.40	14.42	50.82	54.00	-3.18	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5755 MHz (U-NII-3)		
Remark:			

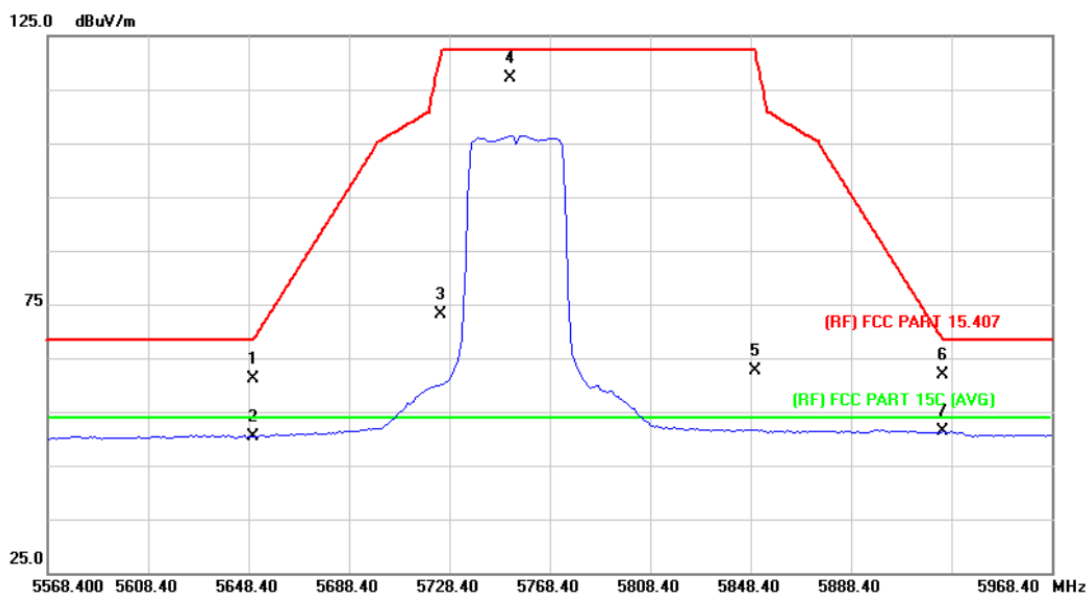

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5650.000	47.45	13.69	61.14	68.30	-7.16	peak
2		5650.000	36.74	13.69	50.43	54.00	-3.57	AVG
3		5725.000	59.31	13.89	73.20	122.30	-49.10	peak
4		5752.400	103.16	13.96	117.12	122.30	-5.18	peak
5		5850.000	48.39	14.23	62.62	122.30	-59.68	peak
6		5925.000	47.50	14.42	61.92	68.30	-6.38	peak
7	*	5925.000	36.85	14.42	51.27	54.00	-2.73	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5795 MHz (U-NII-3)		
Remark:			

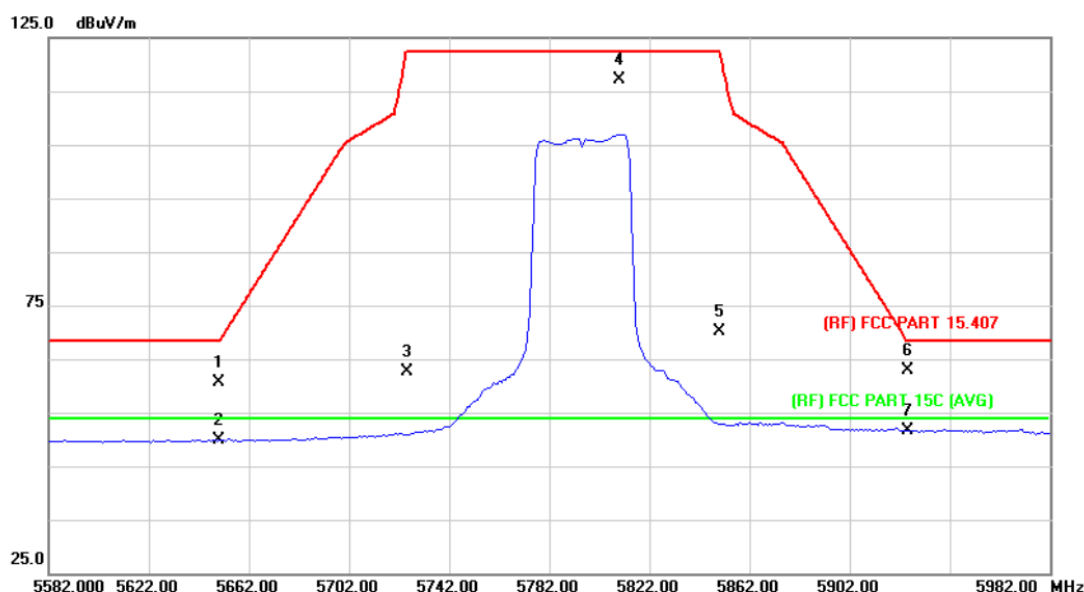

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5650.000	46.97	13.69	60.66	68.30	-7.64	peak
2		5650.000	36.07	13.69	49.76	54.00	-4.24	AVG
3		5725.000	48.66	13.89	62.55	122.30	-59.75	peak
4		5810.000	103.08	14.12	117.20	122.30	-5.10	peak
5		5850.000	55.87	14.23	70.10	122.30	-52.20	peak
6		5925.000	48.36	14.42	62.78	68.30	-5.52	peak
7	*	5925.000	37.11	14.42	51.53	54.00	-2.47	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5795 MHz (U-NII-3)		
Remark:			

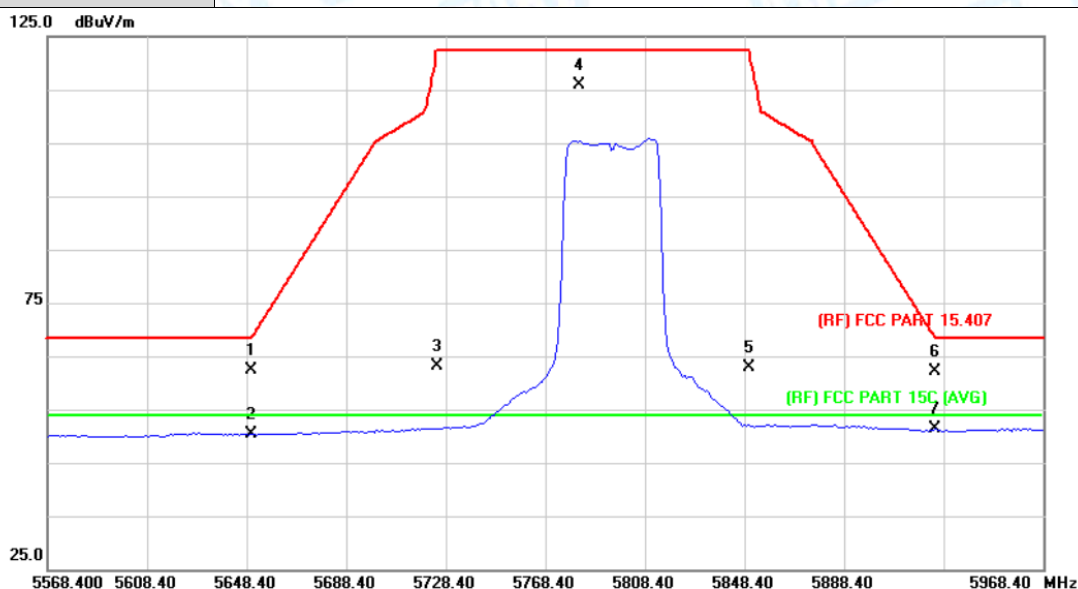

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5650.000	48.65	13.69	62.34	68.30	-5.96	peak
2		5650.000	36.77	13.69	50.46	54.00	-3.54	AVG
3		5725.000	49.21	13.89	63.10	122.30	-59.20	peak
4		5782.000	101.81	14.05	115.86	122.30	-6.44	peak
5		5850.000	48.75	14.23	62.98	122.30	-59.32	peak
6		5925.000	47.82	14.42	62.24	68.30	-6.06	peak
7	*	5925.000	36.91	14.42	51.33	54.00	-2.67	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5755 MHz (U-NII-3)		
Remark:			

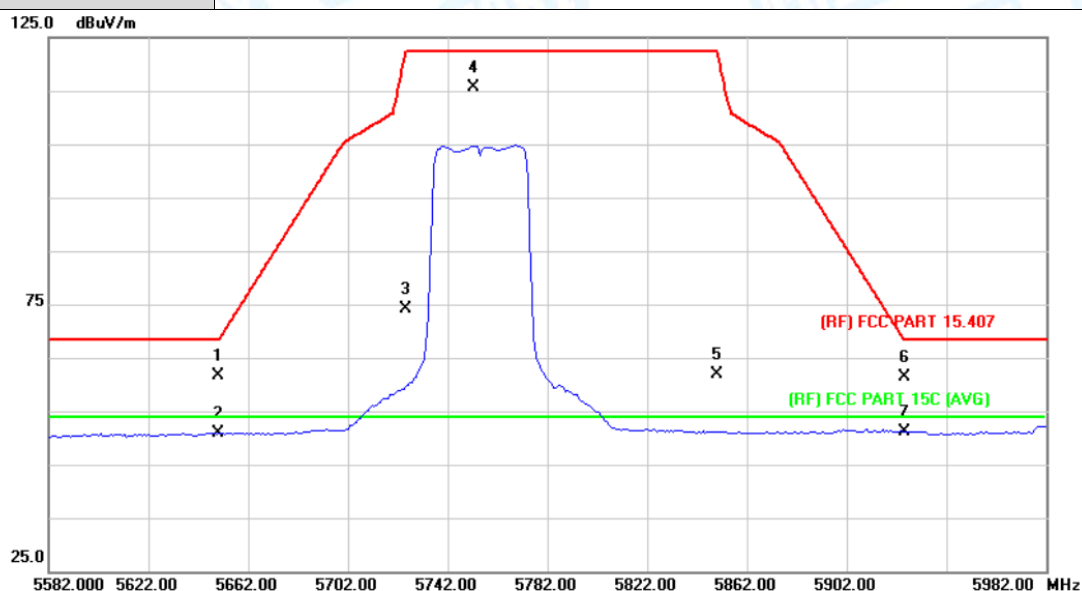

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5650.000	48.06	13.69	61.75	68.30	-6.55	peak
2		5650.000	37.22	13.69	50.91	54.00	-3.09	AVG
3		5725.000	60.33	13.89	74.22	122.30	-48.08	peak
4		5752.400	101.56	13.96	115.52	122.30	-6.78	peak
5		5850.000	47.73	14.23	61.96	122.30	-60.34	peak
6		5925.000	47.03	14.42	61.45	68.30	-6.85	peak
7	*	5925.000	36.66	14.42	51.08	54.00	-2.92	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5755 MHz (U-NII-3)		
Remark:			

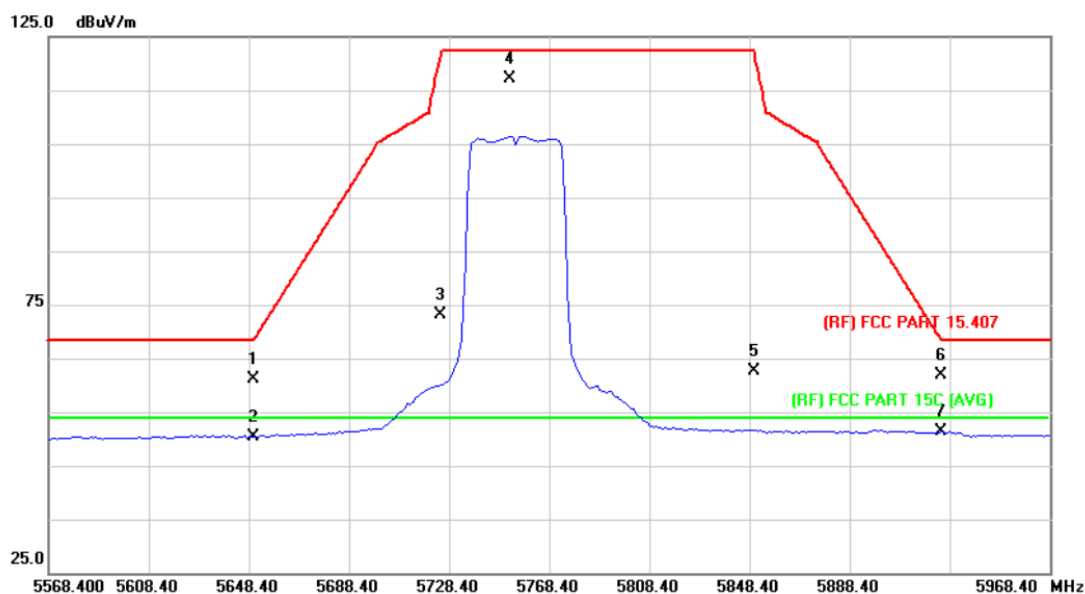

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5650.000	47.45	13.69	61.14	68.30	-7.16	peak
2		5650.000	36.74	13.69	50.43	54.00	-3.57	AVG
3		5725.000	59.31	13.89	73.20	122.30	-49.10	peak
4		5752.400	103.16	13.96	117.12	122.30	-5.18	peak
5		5850.000	48.39	14.23	62.62	122.30	-59.68	peak
6		5925.000	47.50	14.42	61.92	68.30	-6.38	peak
7	*	5925.000	36.85	14.42	51.27	54.00	-2.73	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5795 MHz (U-NII-3)		
Remark:			

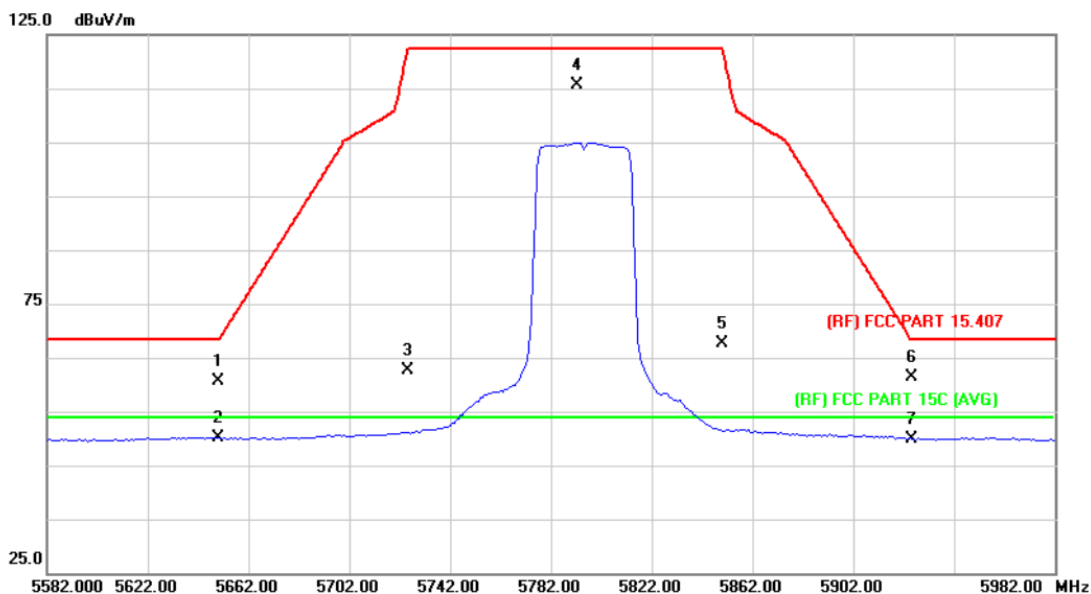

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5650.000	47.05	13.69	60.74	68.30	-7.56	peak
2	*	5650.000	36.44	13.69	50.13	54.00	-3.87	AVG
3		5725.000	48.81	13.89	62.70	122.30	-59.60	peak
4		5792.400	101.61	14.08	115.69	122.30	-6.61	peak
5		5850.000	53.42	14.23	67.65	122.30	-54.65	peak
6		5925.000	47.02	14.42	61.44	68.30	-6.86	peak
7		5925.000	35.57	14.42	49.99	54.00	-4.01	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5795 MHz (U-NII-3)		
Remark:			

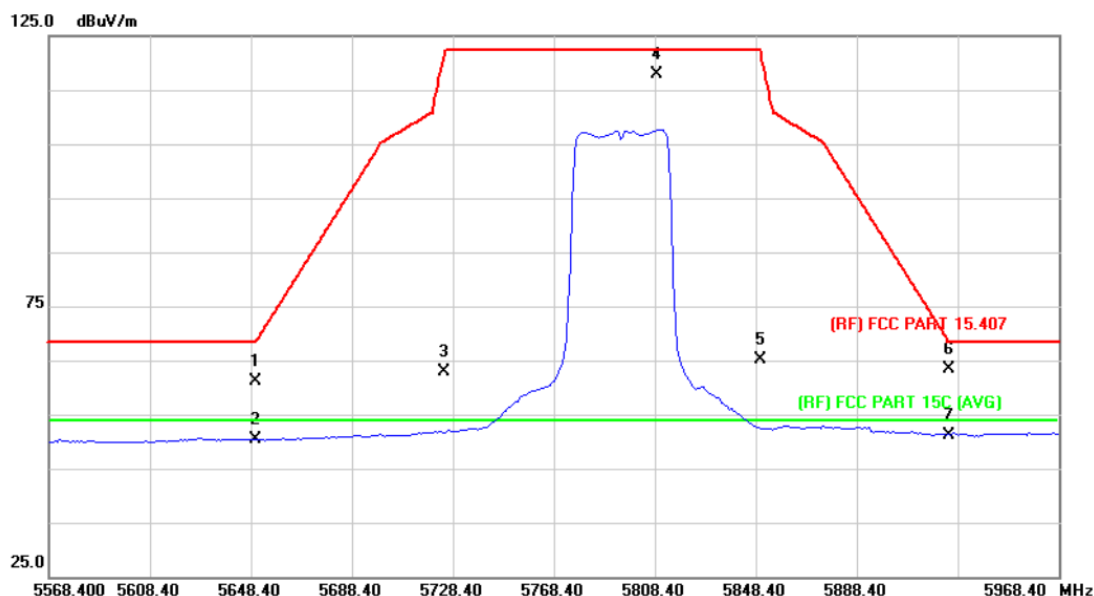

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5650.000	47.40	13.69	61.09	68.30	-7.21	peak
2		5650.000	36.62	13.69	50.31	54.00	-3.69	AVG
3		5725.000	49.10	13.89	62.99	122.30	-59.31	peak
4		5809.200	103.79	14.12	117.91	122.30	-4.39	peak
5		5850.000	50.84	14.23	65.07	122.30	-57.23	peak
6		5925.000	49.04	14.42	63.46	68.30	-4.84	peak
7	*	5925.000	36.81	14.42	51.23	54.00	-2.77	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT80) Mode 5775 MHz (U-NII-3)		
Remark:			

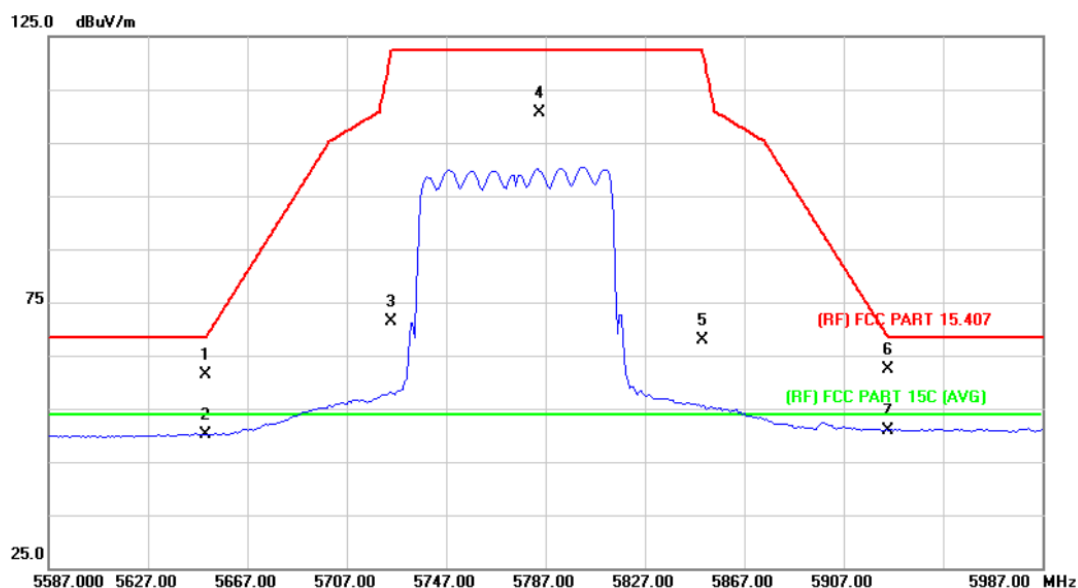

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5650.000	47.66	13.69	61.35	68.30	-6.95	peak
2		5650.000	36.40	13.69	50.09	54.00	-3.91	AVG
3		5725.000	57.57	13.89	71.46	122.30	-50.84	peak
4		5784.600	96.62	14.05	110.67	122.30	-11.63	peak
5		5850.000	53.68	14.23	67.91	122.30	-54.39	peak
6		5925.000	47.92	14.42	62.34	68.30	-5.96	peak
7	*	5925.000	36.55	14.42	50.97	54.00	-3.03	AVG

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT80) Mode 5775 MHz (U-NII-3)		
Remark:			

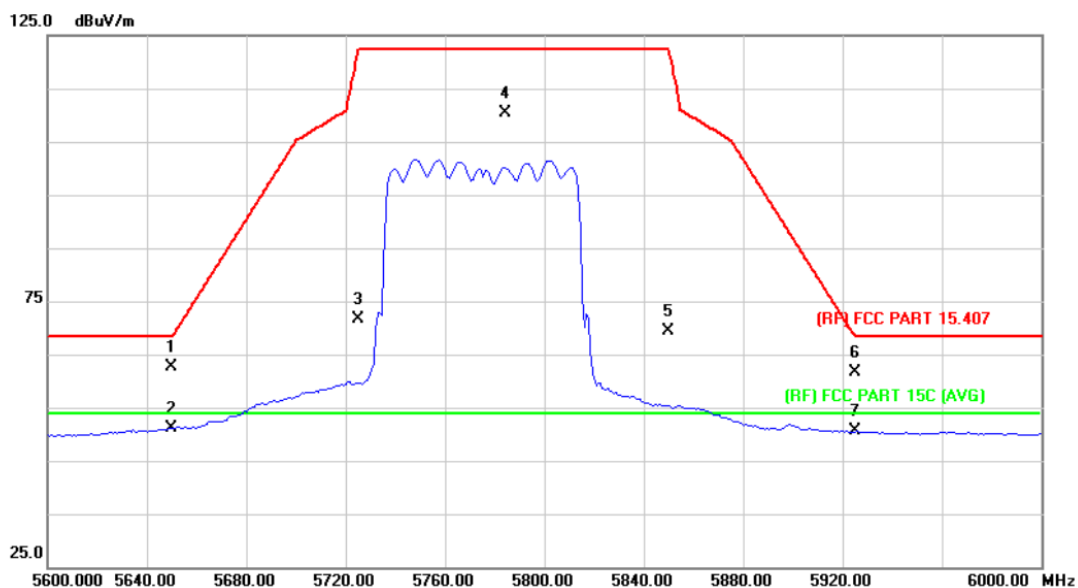

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5650.000	49.06	13.69	62.75	68.30	-5.55	peak
2	*	5650.000	37.37	13.69	51.06	54.00	-2.94	AVG
3		5725.000	57.62	13.89	71.51	122.30	-50.79	peak
4		5784.000	96.43	14.05	110.48	122.30	-11.82	peak
5		5850.000	55.19	14.23	69.42	122.30	-52.88	peak
6		5925.000	47.16	14.42	61.58	68.30	-6.72	peak
7		5925.000	36.12	14.42	50.54	54.00	-3.46	AVG


Emission Level= Read Level+ Correct Factor

Attachment D--Bandwidth Test Data

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11a Mode (U-NII-1) Antenna A		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
36	5180	19.42	16.481
40	5200	19.61	16.415
48	5240	19.66	16.511


802.11a Mode

Antenna A---5180 MHz

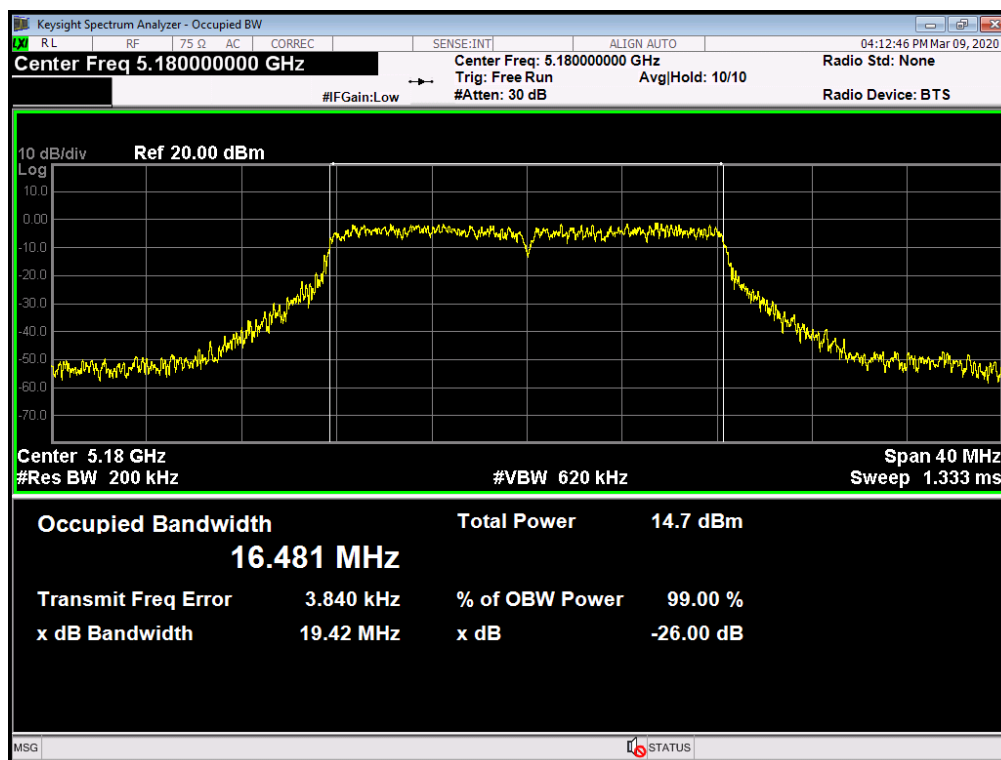


802.11a Mode

Antenna A---5200 MHz

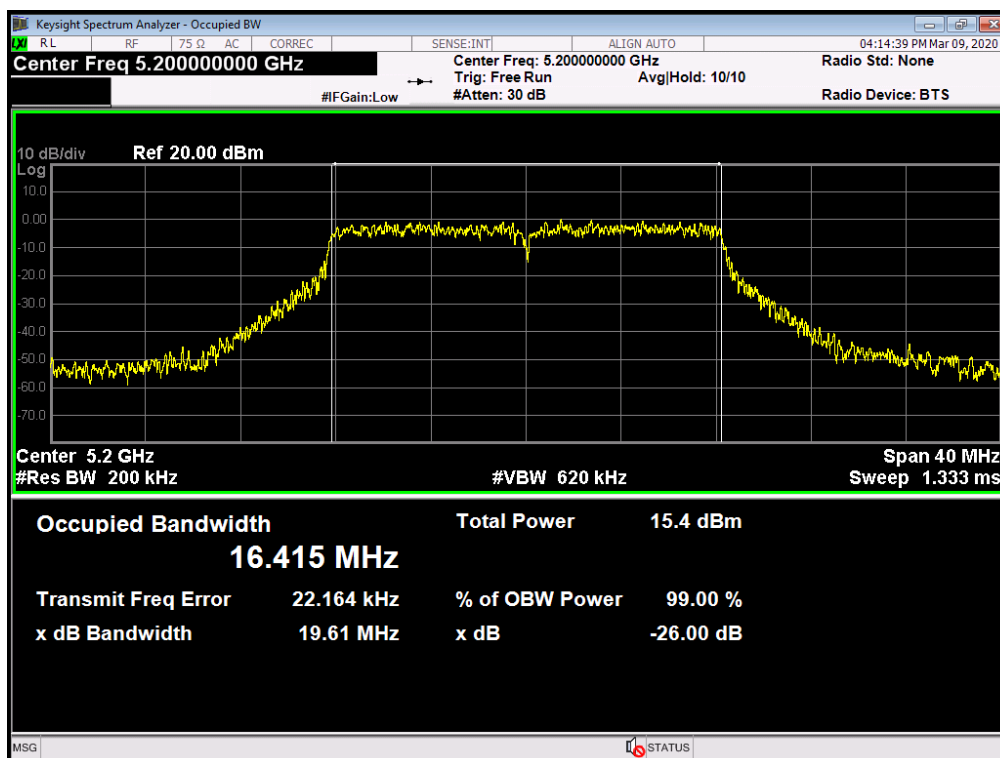

802.11a Mode


Antenna A---5240 MHz

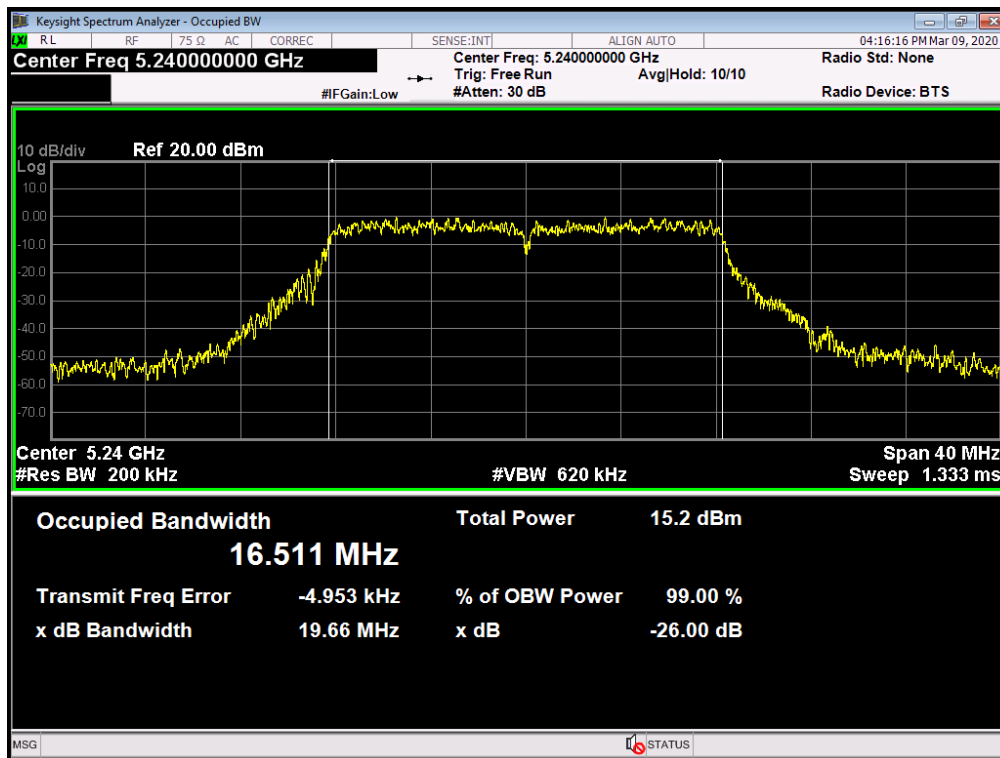

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11a Mode (U-NII-1) Antenna B		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
36	5180	19.97	16.466
40	5200	19.70	16.492
48	5240	19.81	16.515


802.11a Mode

Antenna B---5180 MHz

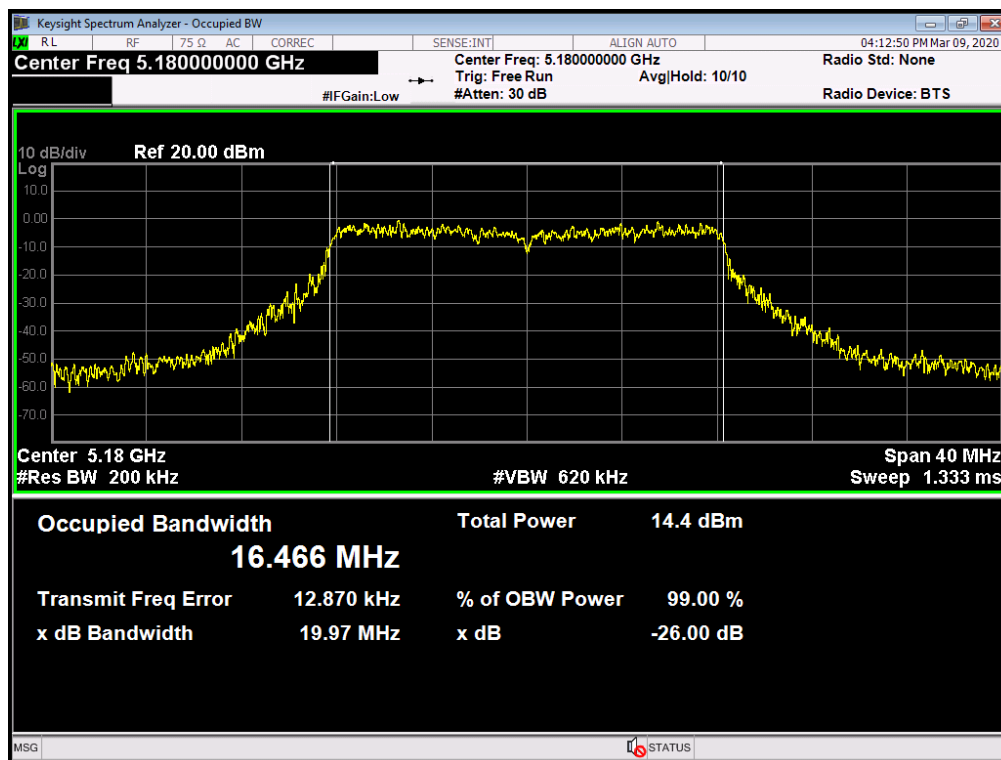


802.11a Mode


Antenna B---5200 MHz

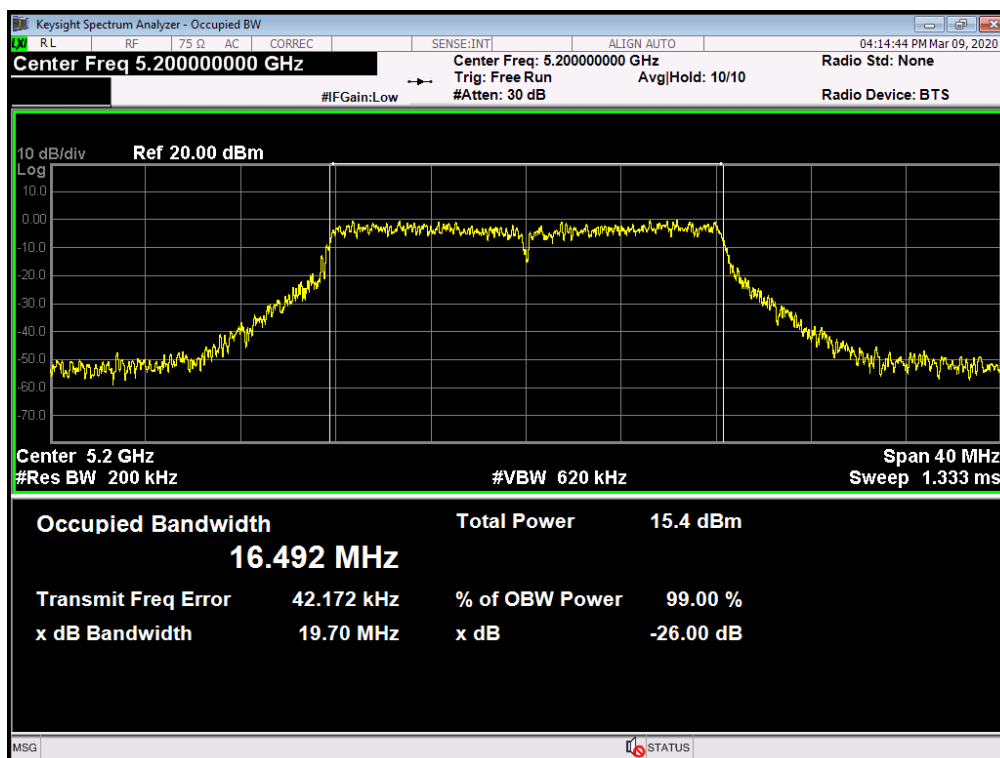

802.11a Mode


Antenna B---5240 MHz

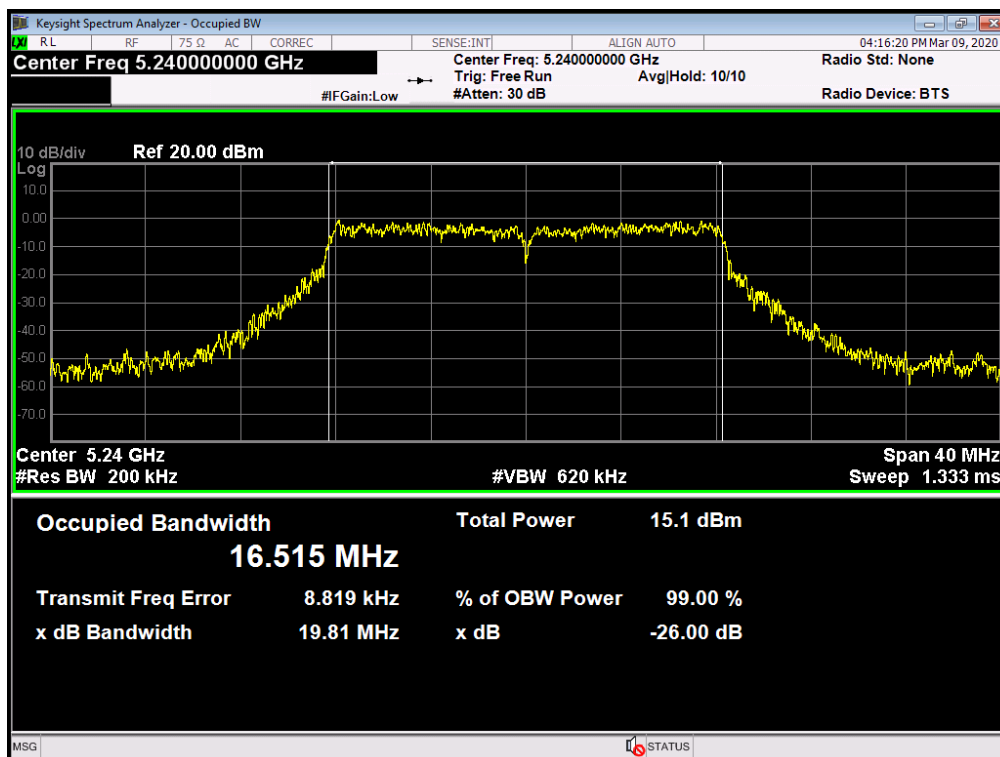

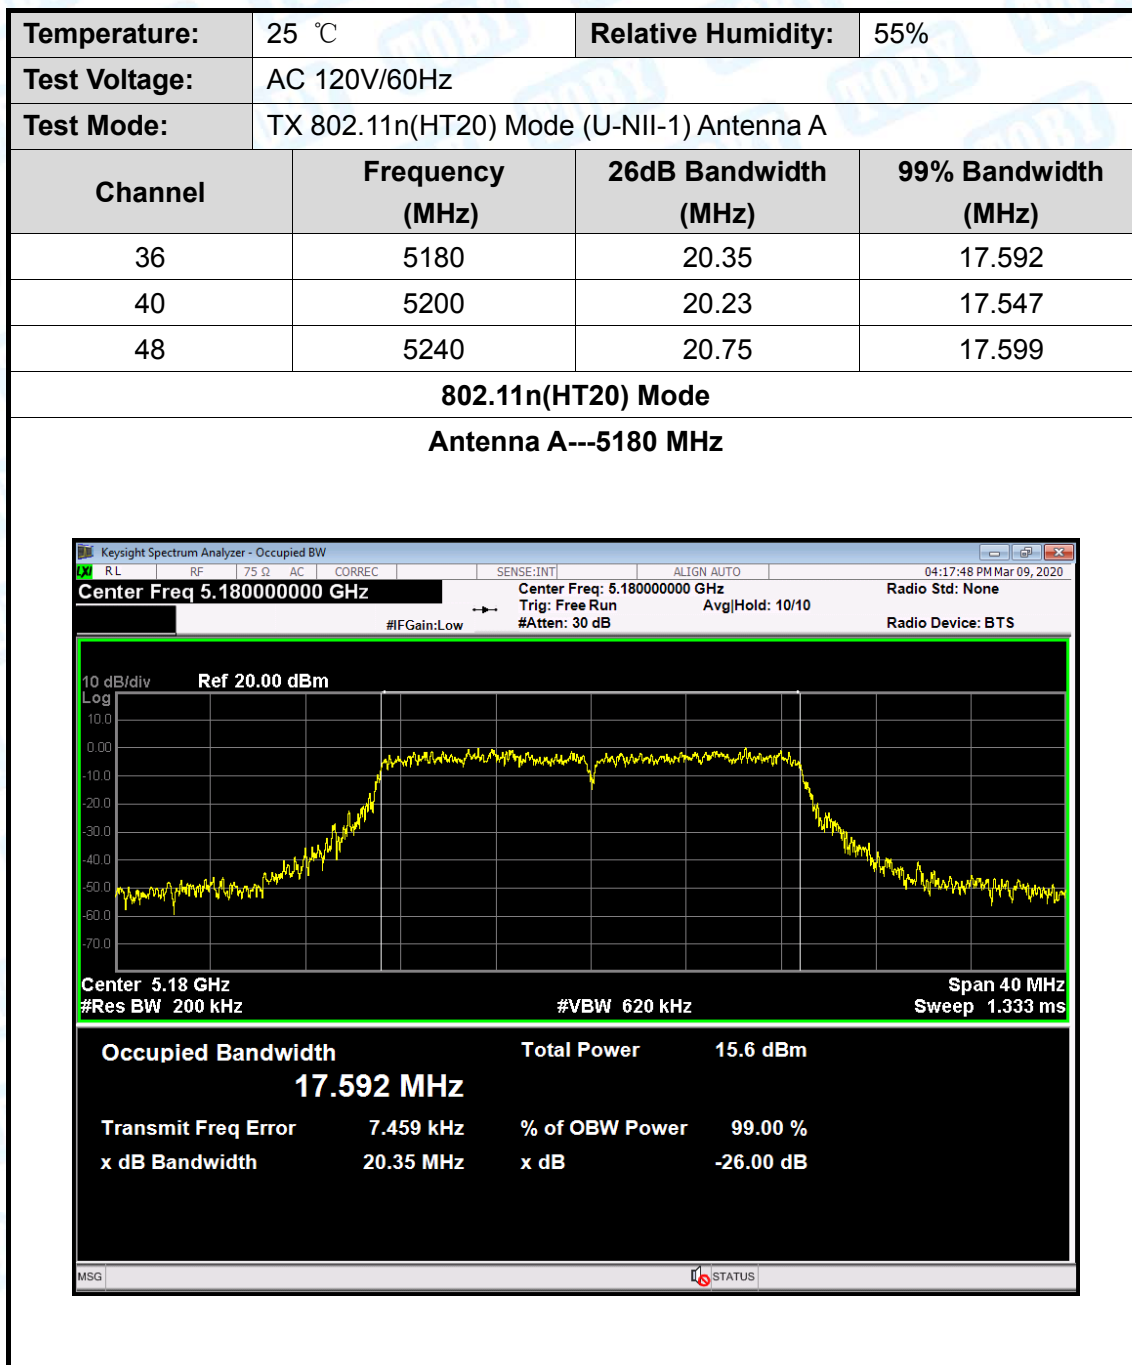


802.11n(HT20) Mode


Antenna A--5200 MHz

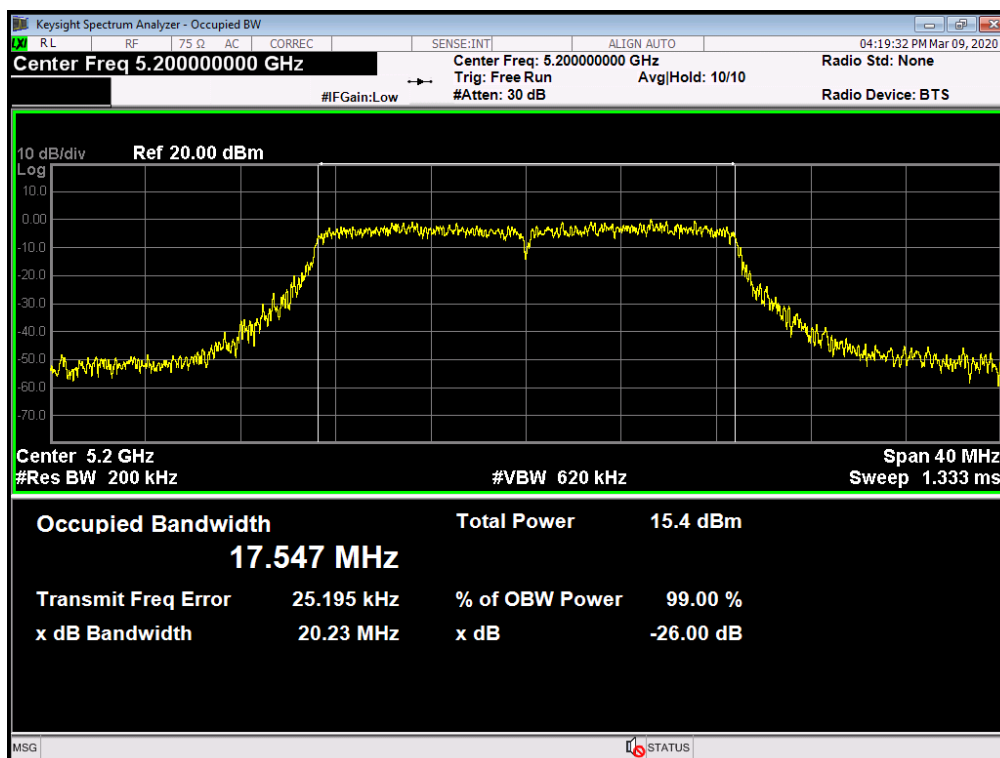

802.11n(HT20) Mode


Antenna A--5240 MHz

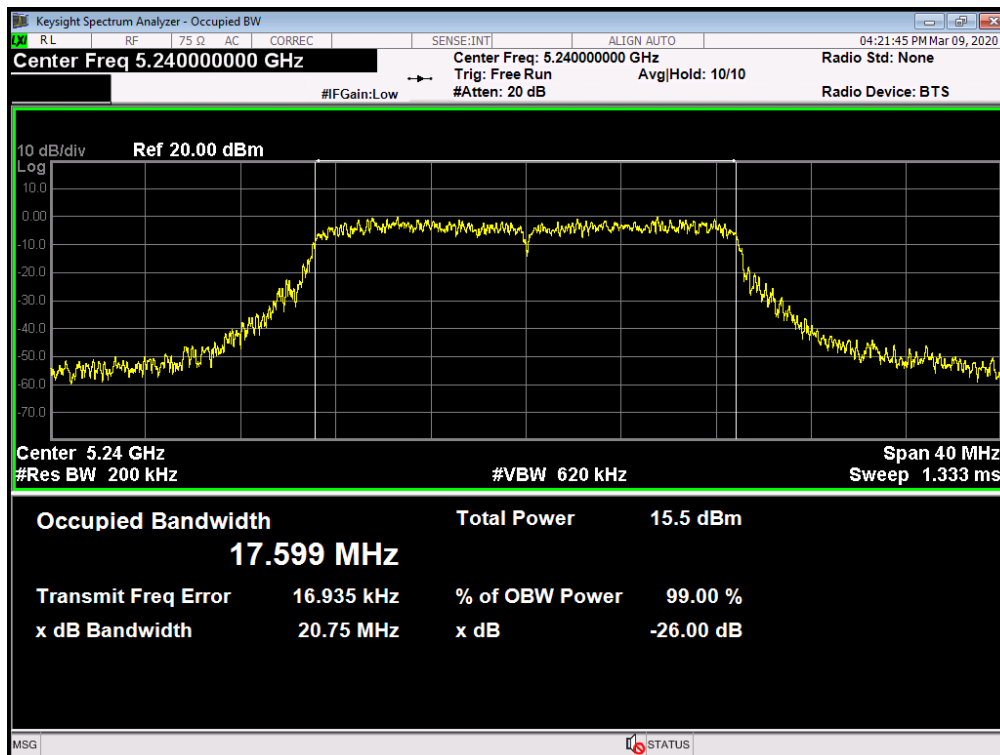

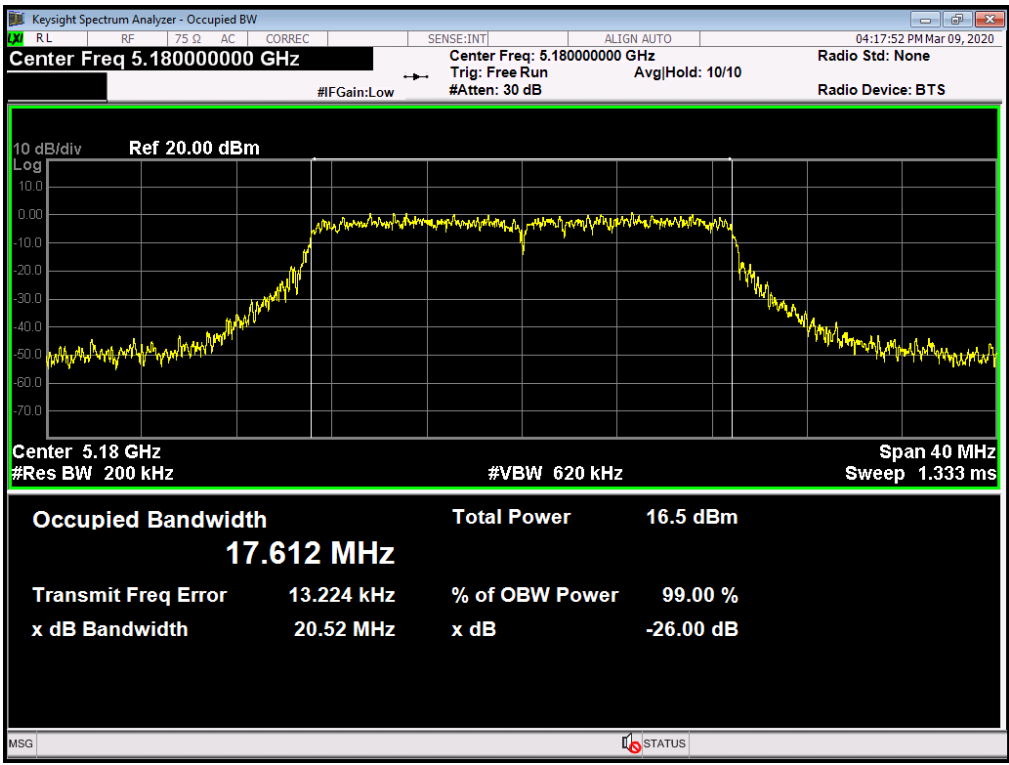Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11n(HT20) Mode (U-NII-1) Antenna B		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
36	5180	20.52	17.612
40	5200	20.62	17.592
48	5240	20.58	17.678
802.11n(HT20) Mode			
Antenna B---5180 MHz			
 Keysight Spectrum Analyzer - Occupied BW Center Freq 5.18000000 GHz Center Freq: 5.18000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 10/10 Radio Std: None Radio Device: BTS 10 dB/div Ref 20.00 dBm Center 5.18 GHz #Res BW 200 kHz #VBW 620 kHz Span 40 MHz Sweep 1.333 ms Occupied Bandwidth 17.612 MHz Total Power 16.5 dBm Transmit Freq Error 13.224 kHz % of OBW Power 99.00 % x dB Bandwidth 20.52 MHz x dB -26.00 dB MSG STATUS			


802.11n(HT20) Mode


Antenna B---5200 MHz

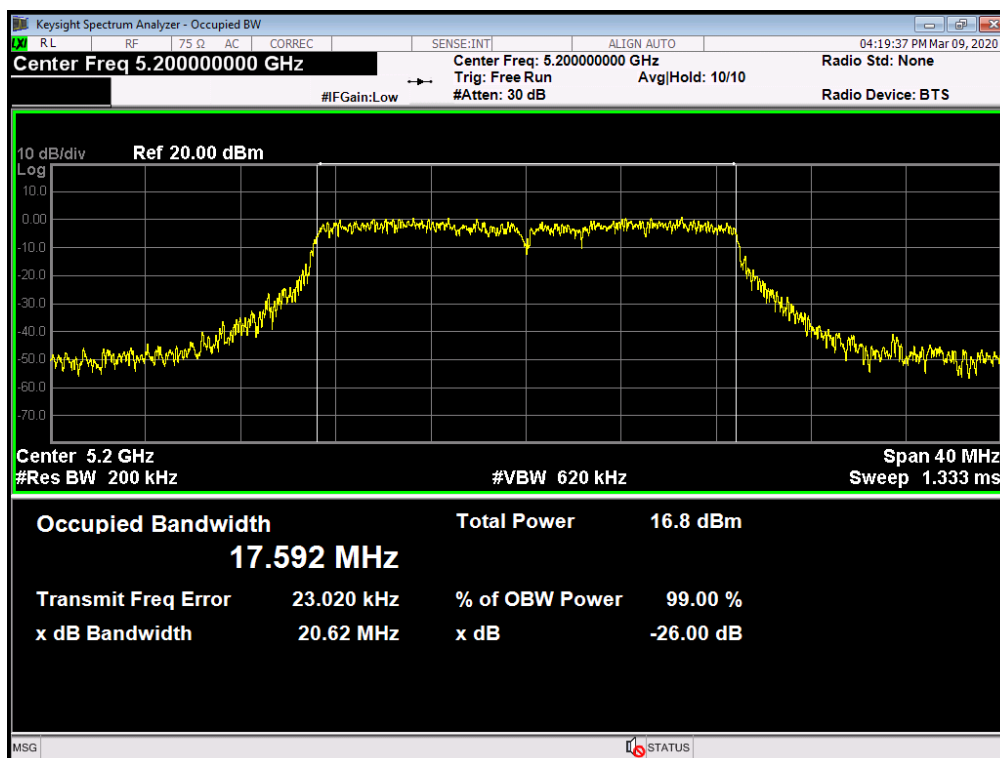

802.11n(HT20) Mode


Antenna B---5240 MHz

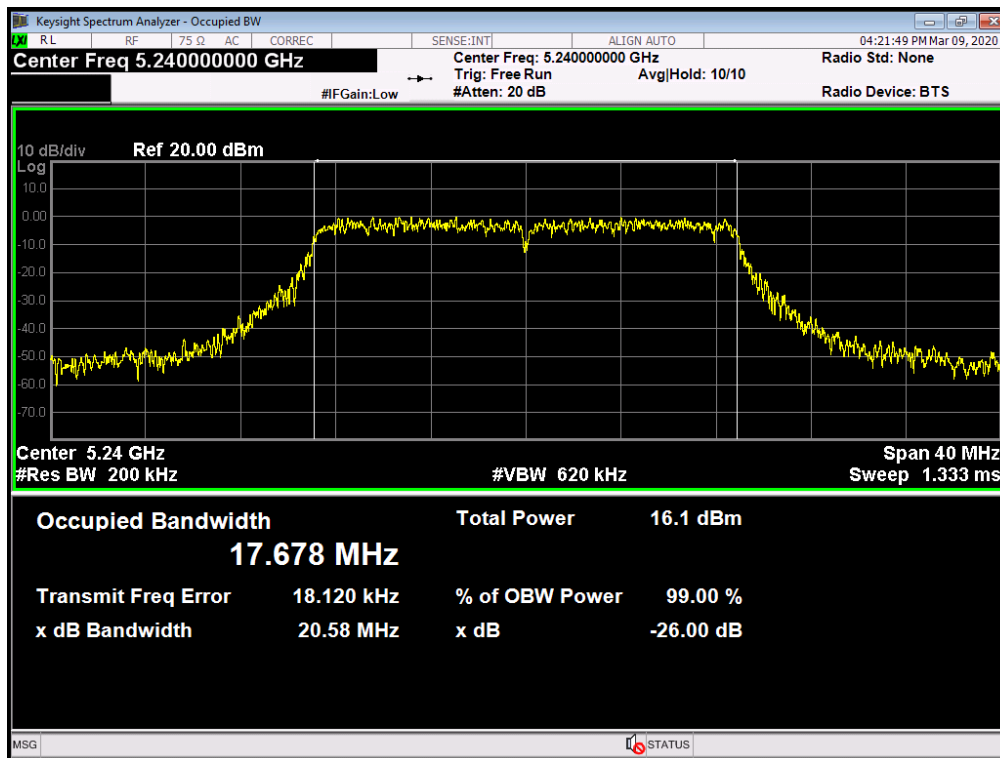

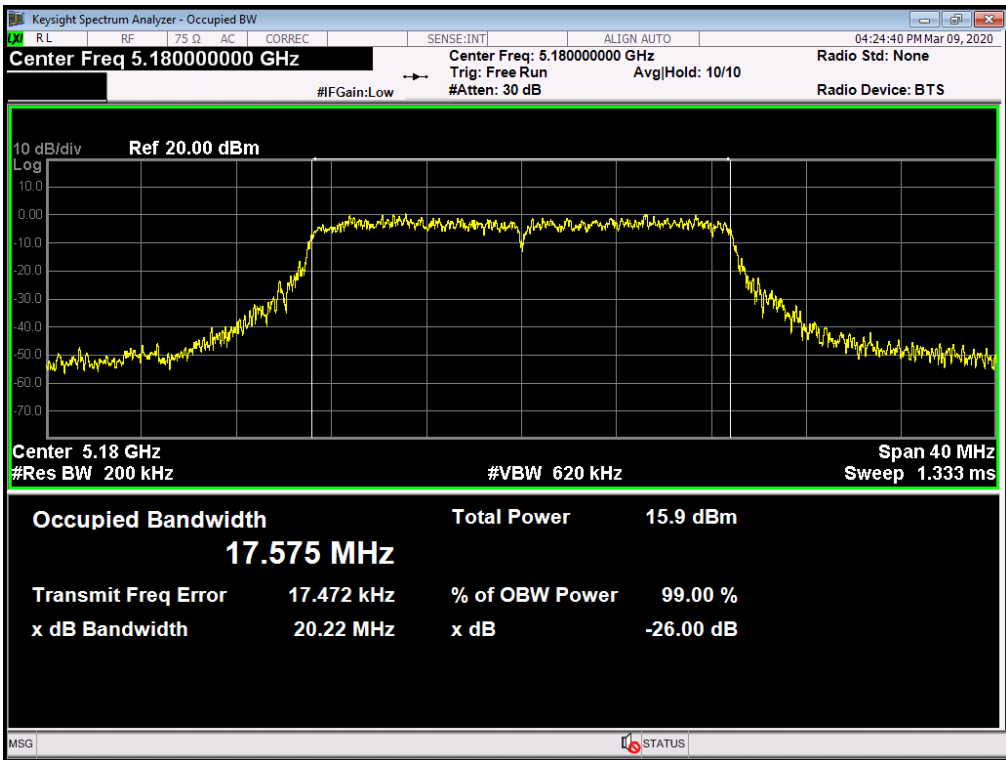Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11ac(VHT20) Mode (U-NII-1) Antenna A		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
36	5180	20.22	17.575
40	5200	19.91	17.588
48	5240	20.59	17.618
802.11ac(VHT20) Mode			
Antenna A---5180 MHz			
 Keysight Spectrum Analyzer - Occupied BW Center Freq 5.18000000 GHz Center Freq: 5.18000000 GHz Trig: Free Run #Attenu: 30 dB Radio Std: None Radio Device: BTS Ref 20.00 dBm Center 5.18 GHz #Res BW 200 kHz #VBW 620 kHz Span 40 MHz Sweep 1.333 ms Occupied Bandwidth 17.575 MHz Total Power 15.9 dBm Transmit Freq Error 17.472 kHz % of OBW Power 99.00 % x dB Bandwidth 20.22 MHz x dB -26.00 dB			


802.11ac(VHT20) Mode


Antenna A---5200 MHz

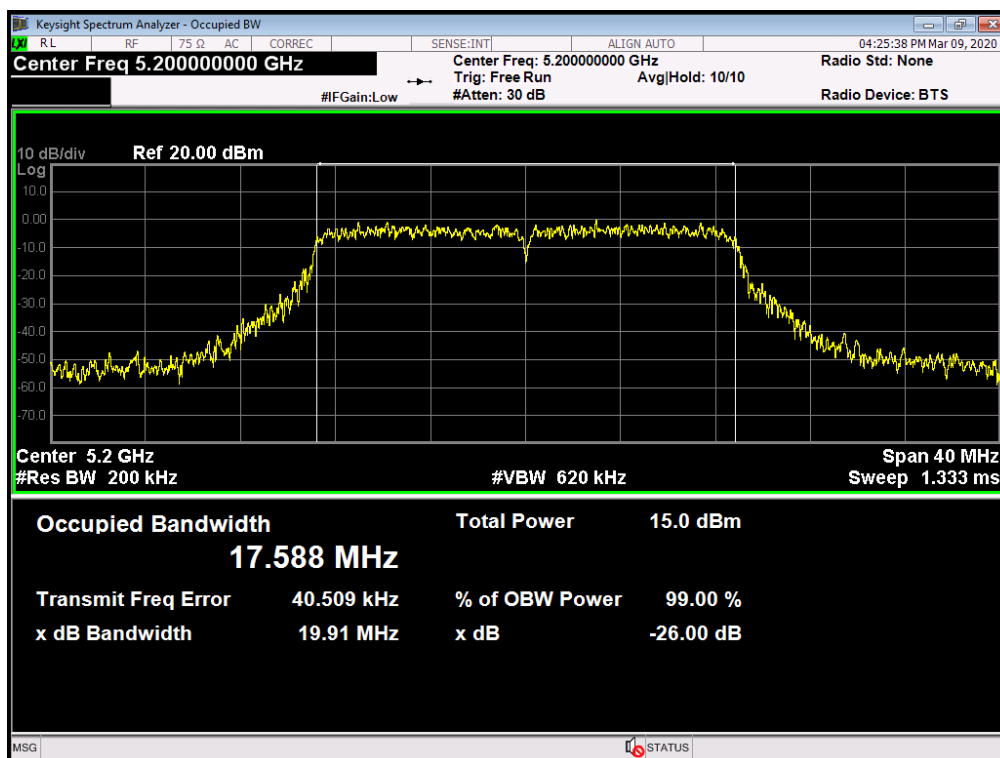

802.11ac(VHT20) Mode


Antenna A---5240 MHz

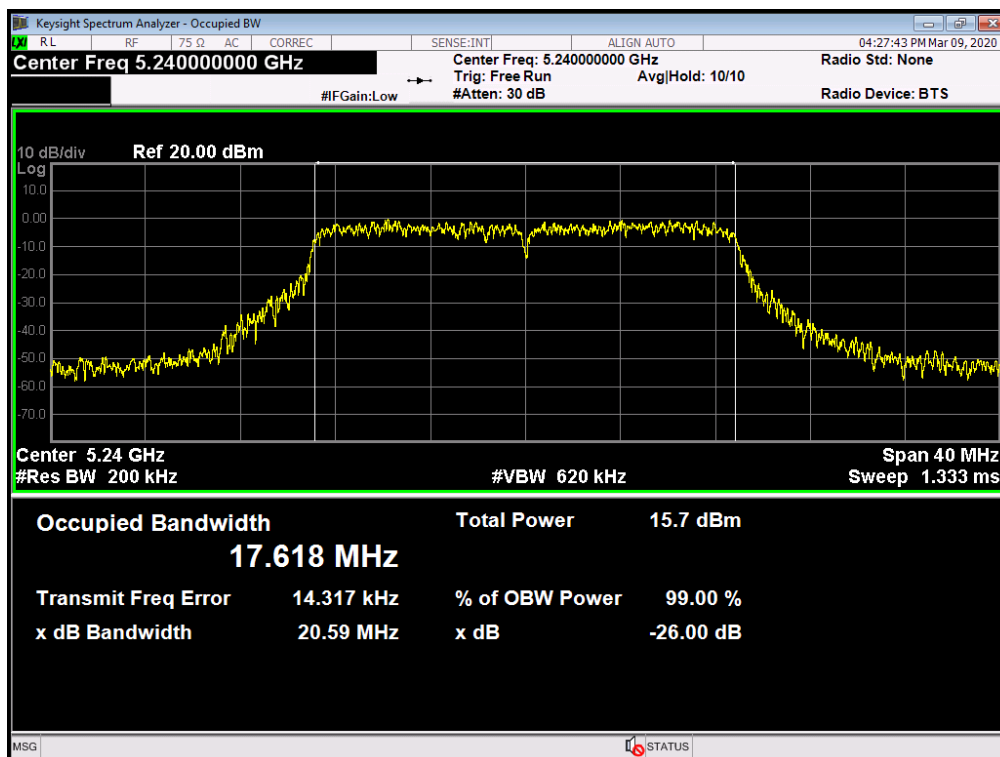

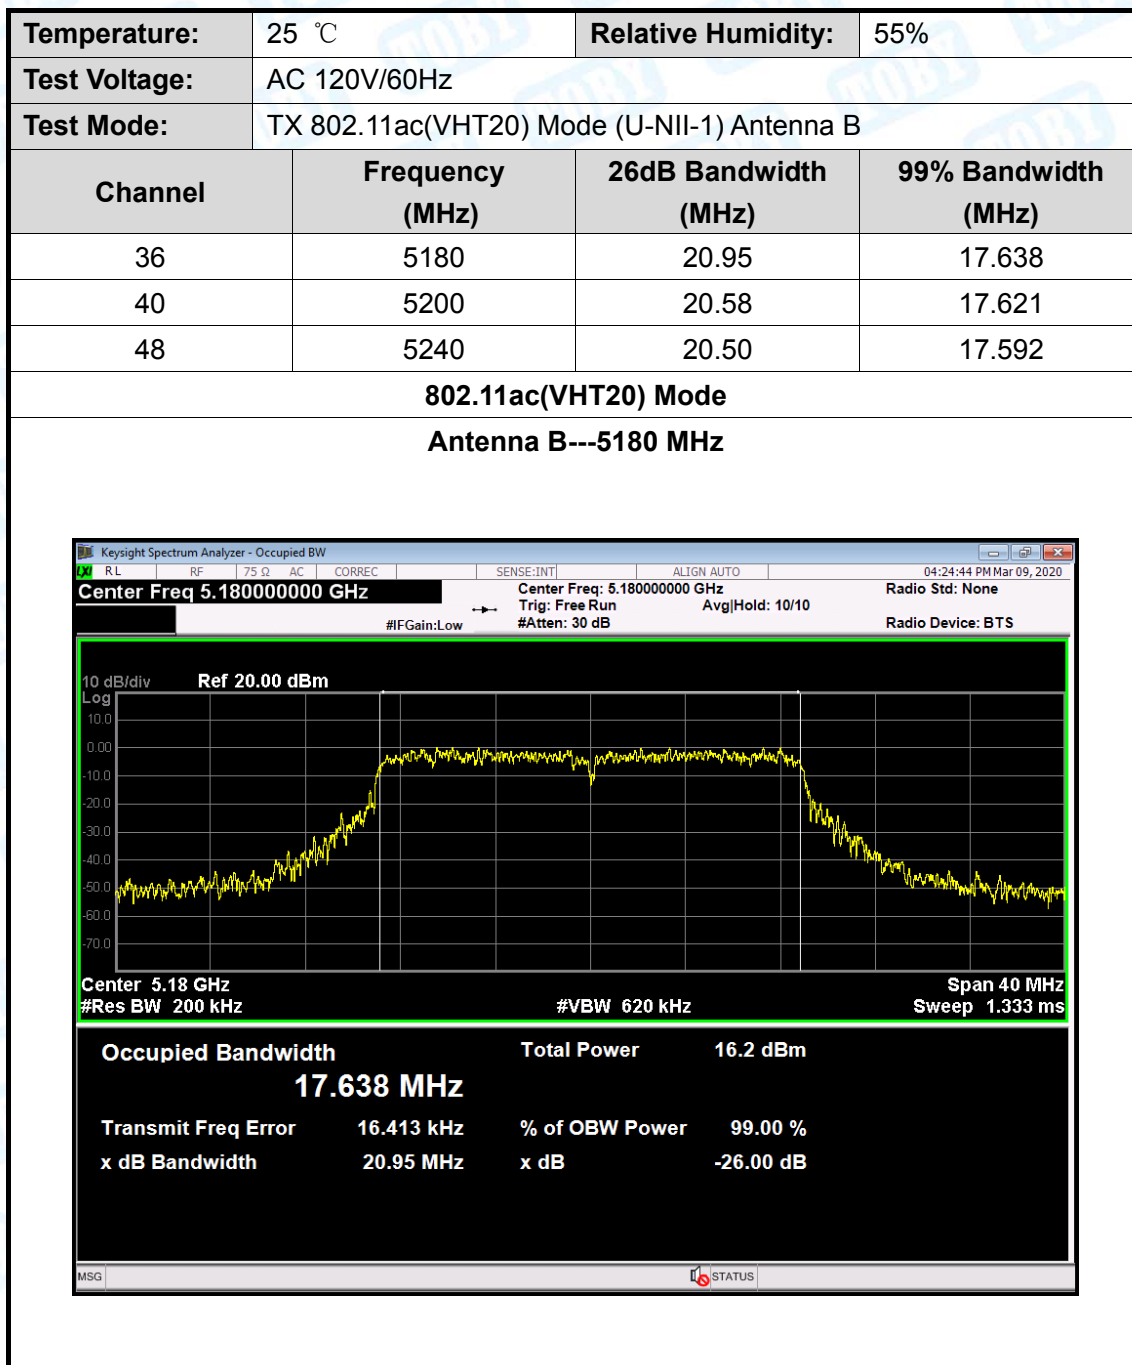


802.11ac(VHT20) Mode

Antenna B---5200 MHz

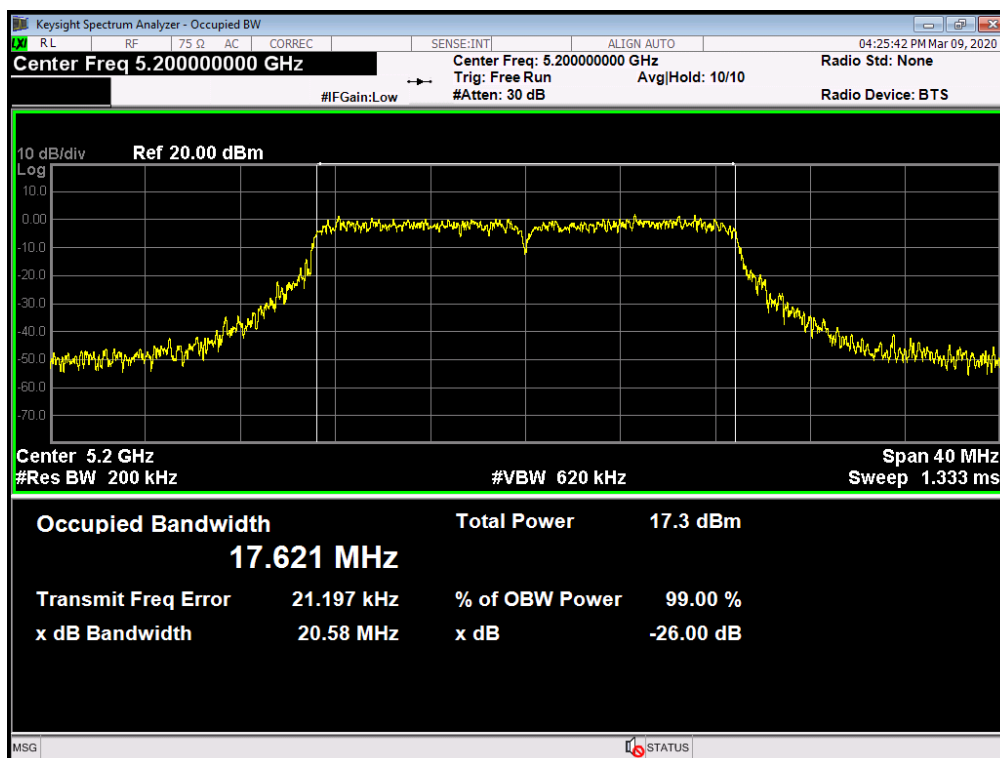

802.11ac(VHT20) Mode


Antenna B---5240 MHz

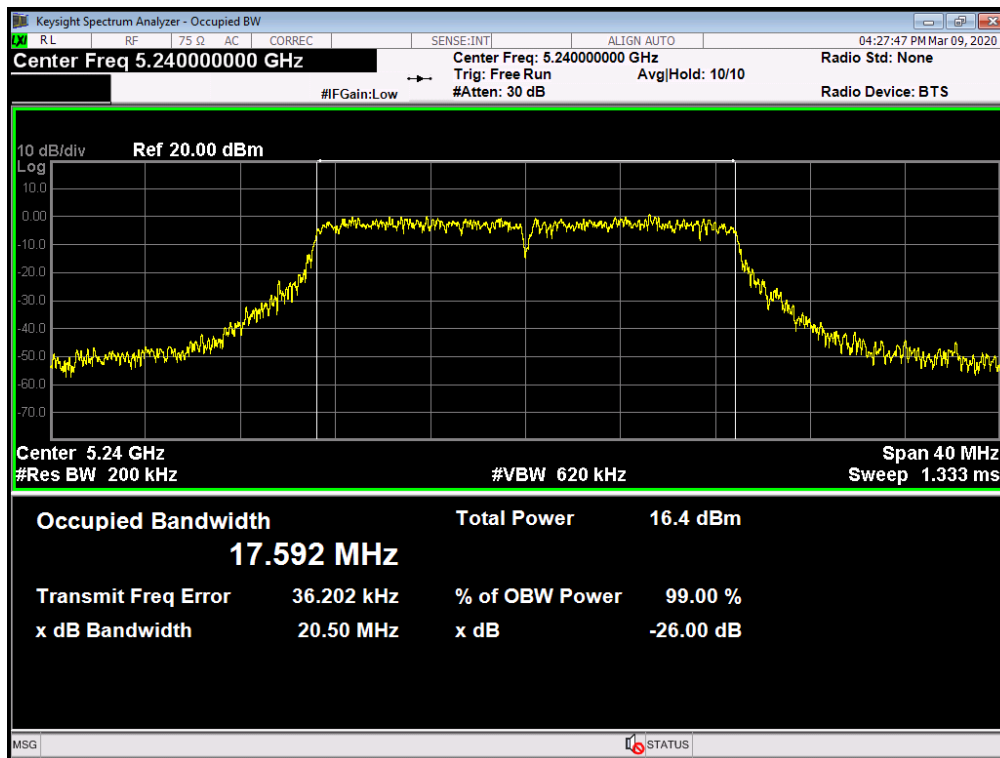


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11n(HT40) Mode (U-NII-1) Antenna A		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
38	5190	41.16	36.200
46	5230	41.51	36.180

802.11N(HT40) Mode

Antenna A---5190 MHz

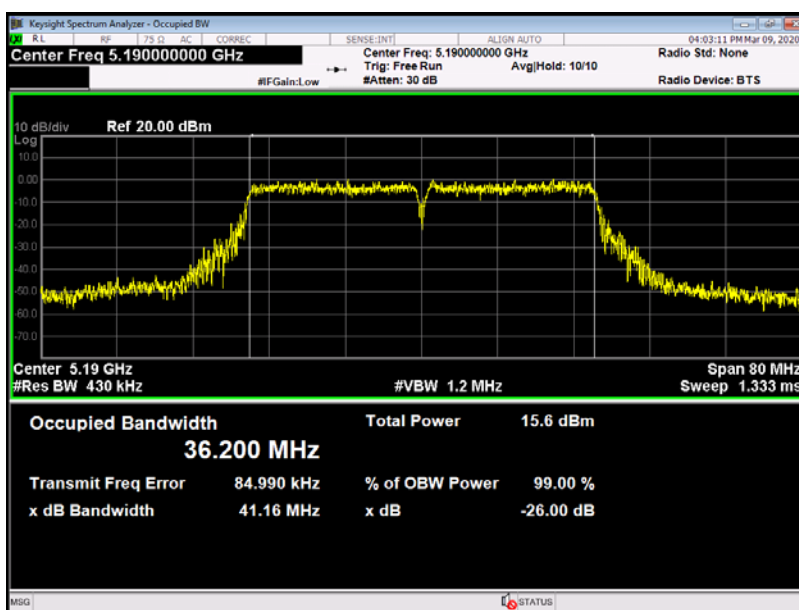


Antenna A---5230 MHz

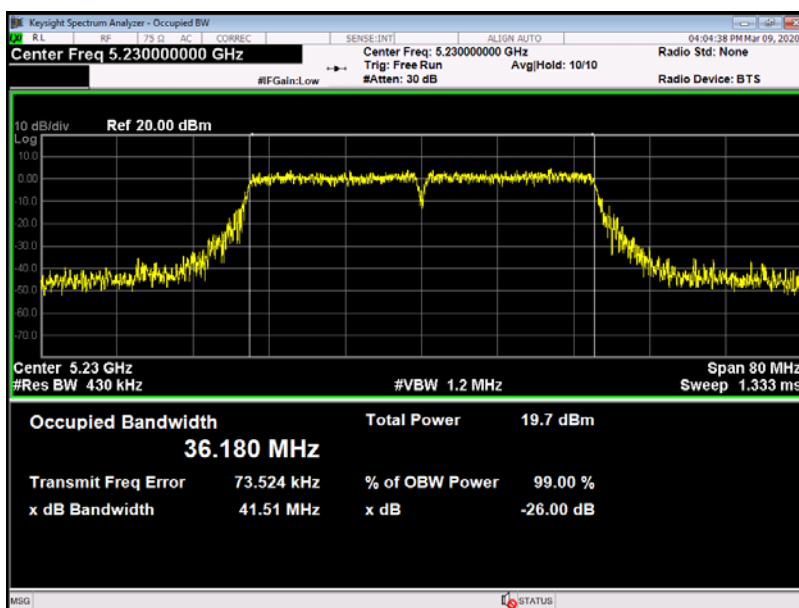


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11n(HT40) Mode (U-NII-1) Antenna B		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
38	5190	42.55	36.190
46	5230	41.33	36.258

802.11N(HT40) Mode

Antenna B---5190 MHz

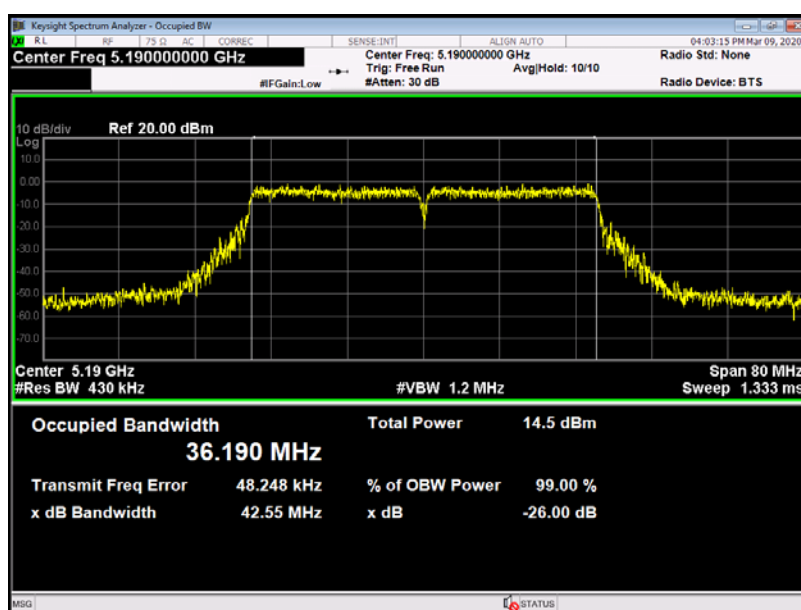


Antenna B---5230 MHz

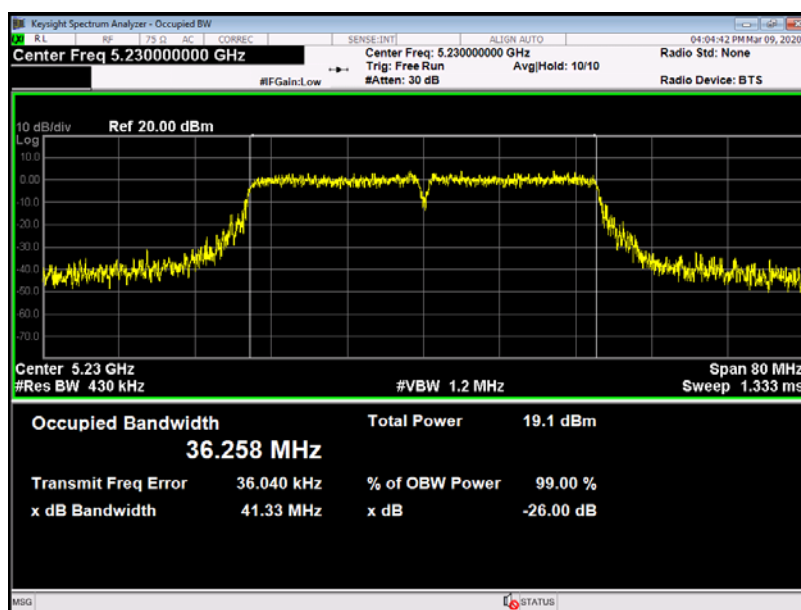


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11ac(VHT40) Mode (U-NII-1) Antenna A		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
38	5190	41.45	36.167
46	5230	41.91	36.182

802.11ac(VHT40) Mode

Antenna A---5190 MHz

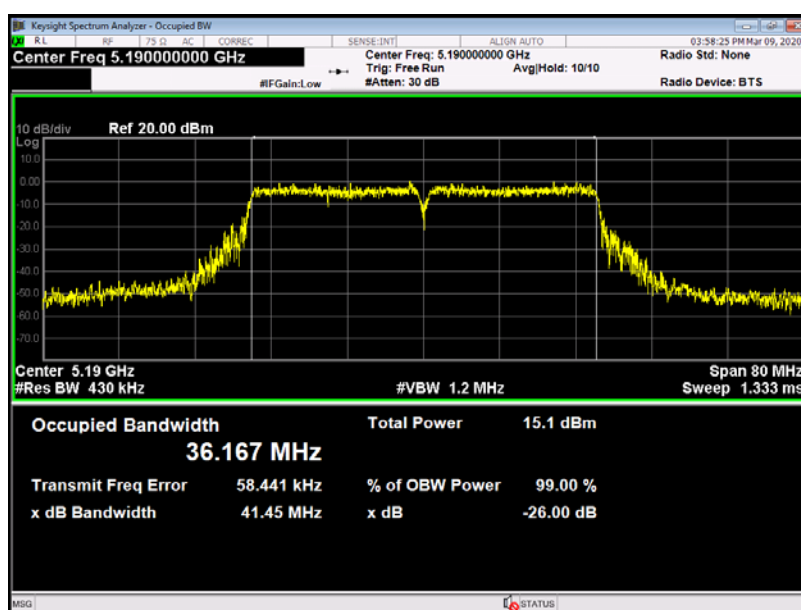


Antenna A---5230 MHz

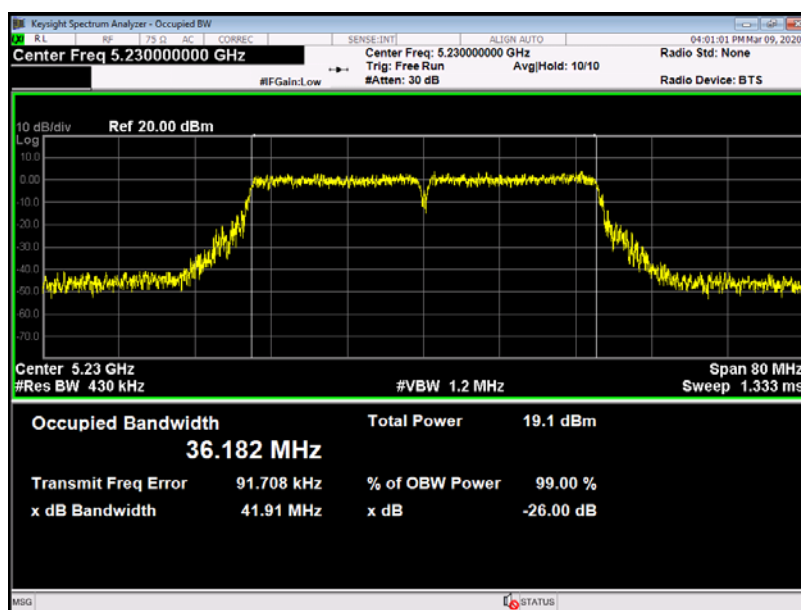


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11ac(VHT40) Mode (U-NII-1) Antenna B		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
38	5190	42.53	36.190
46	5230	41.66	36.168


802.11ac(VHT40) Mode


Antenna B---5190 MHz

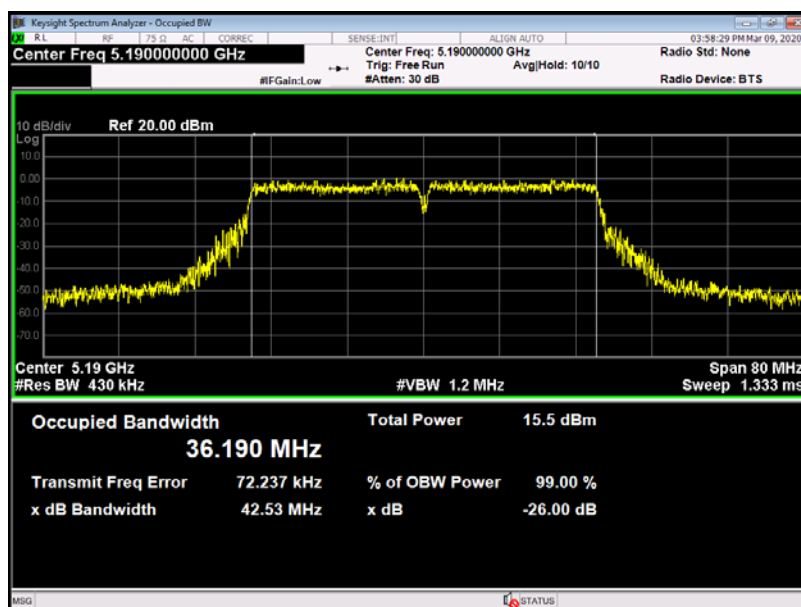


Antenna B---5230 MHz

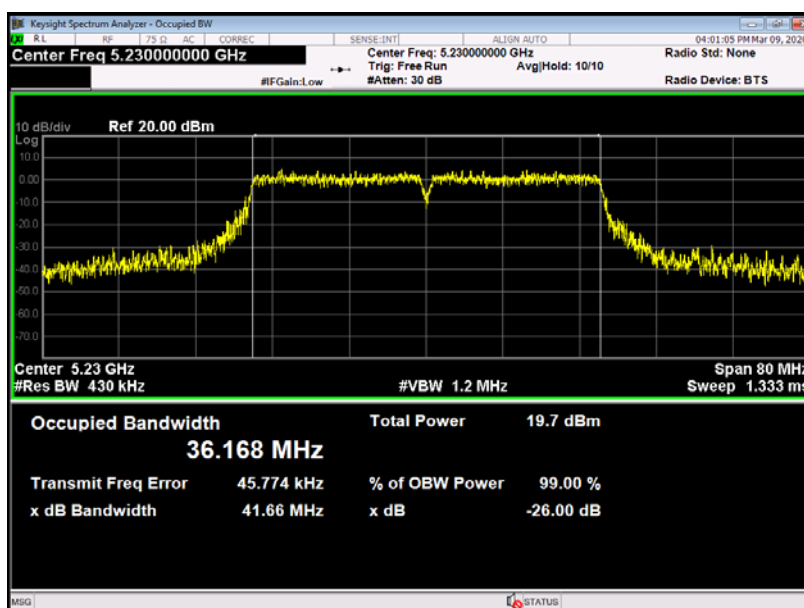

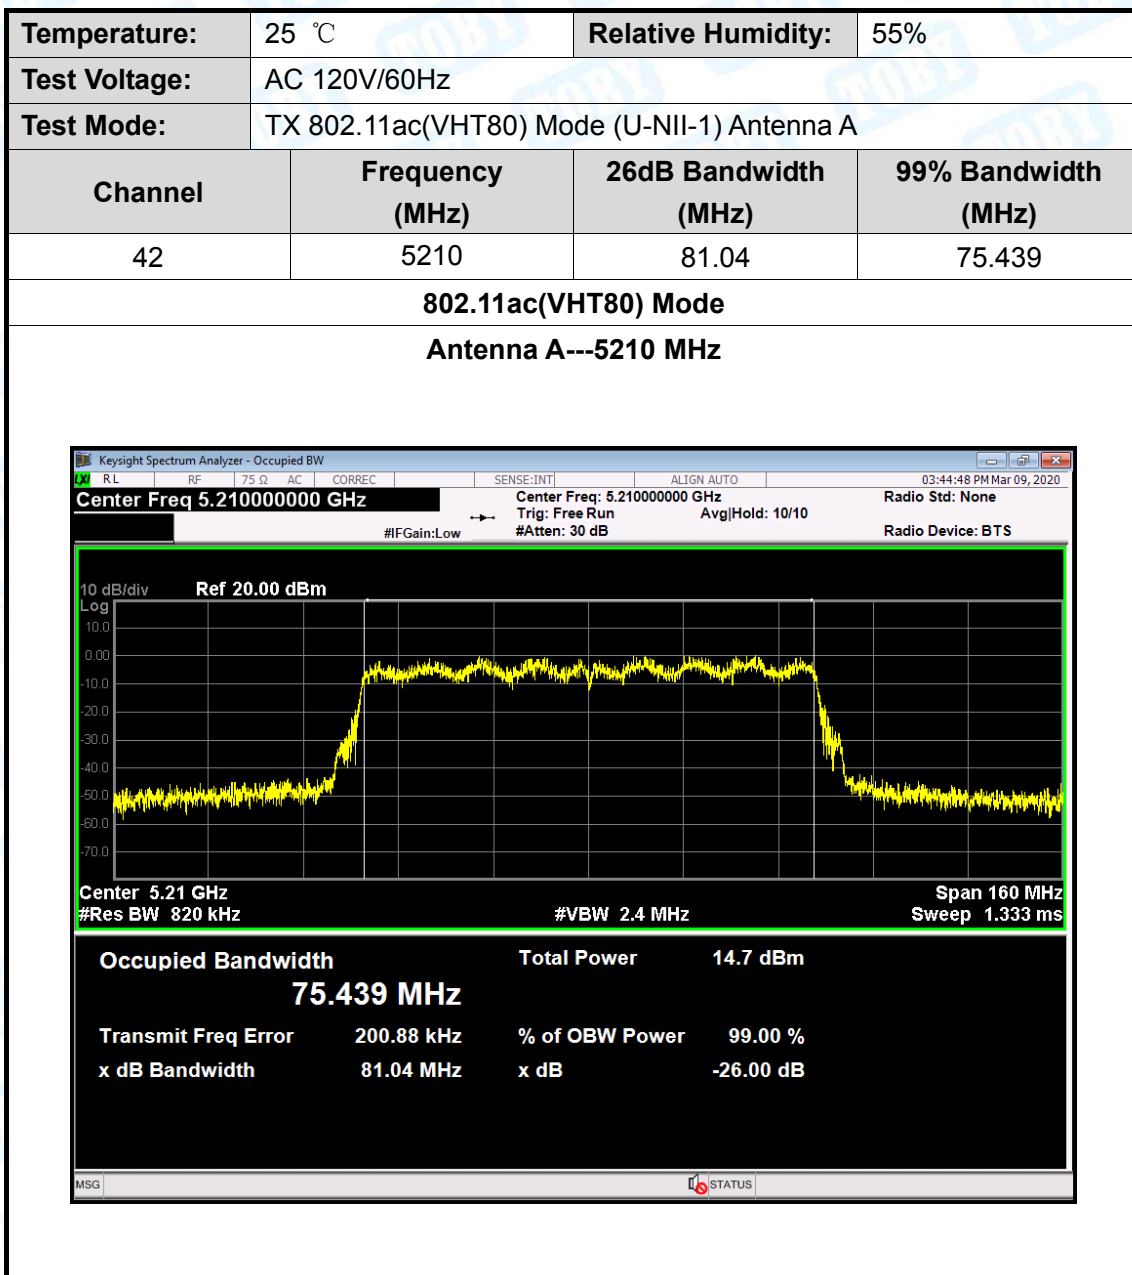


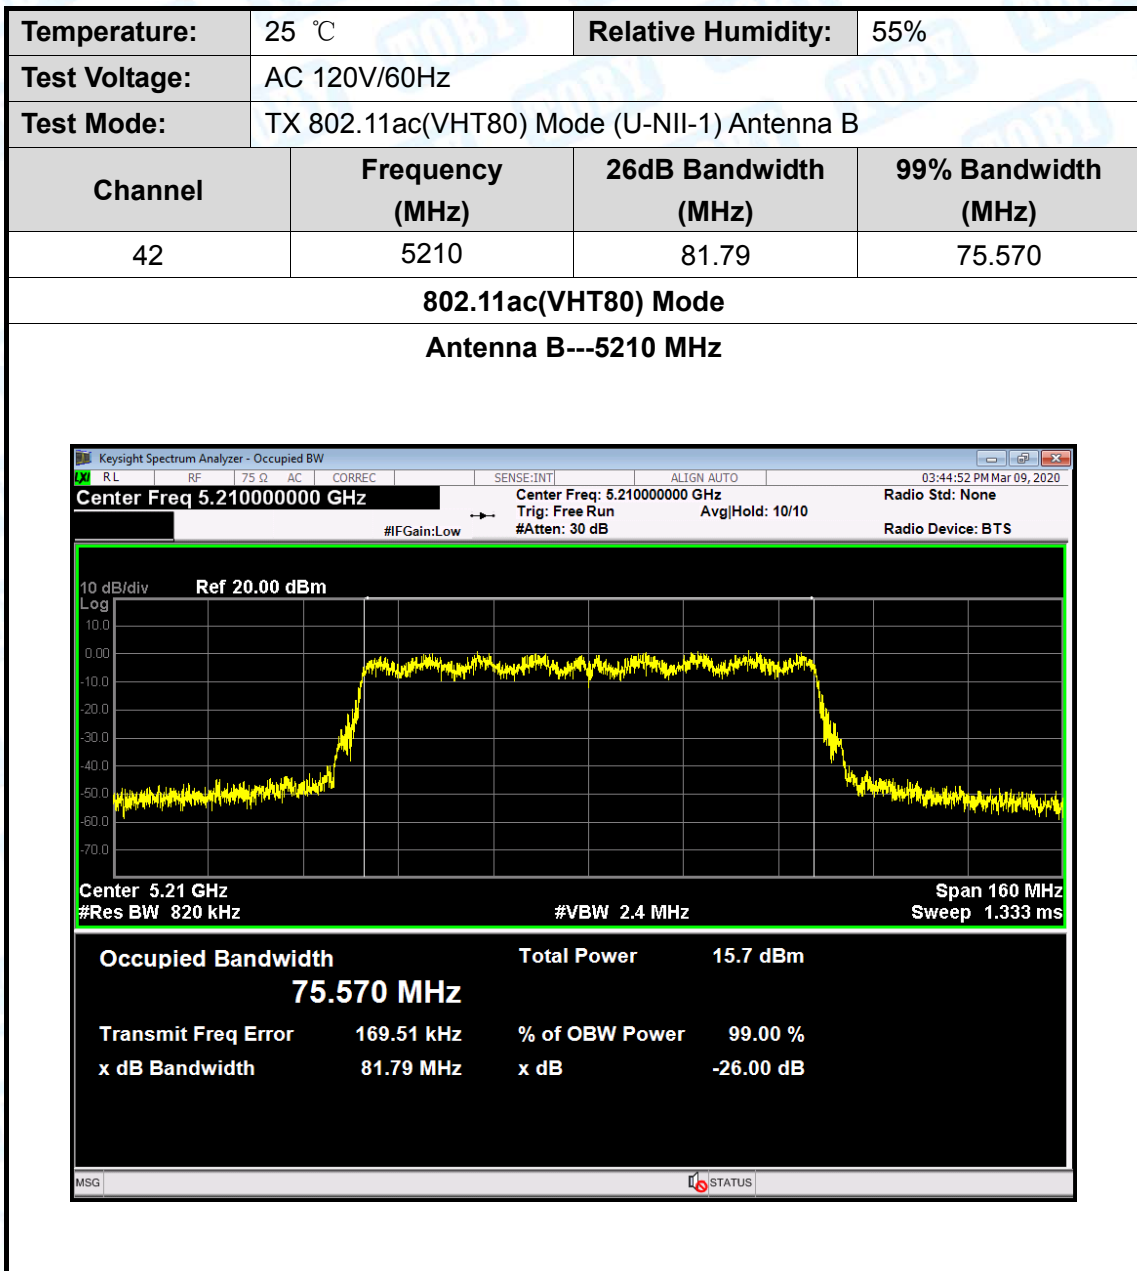

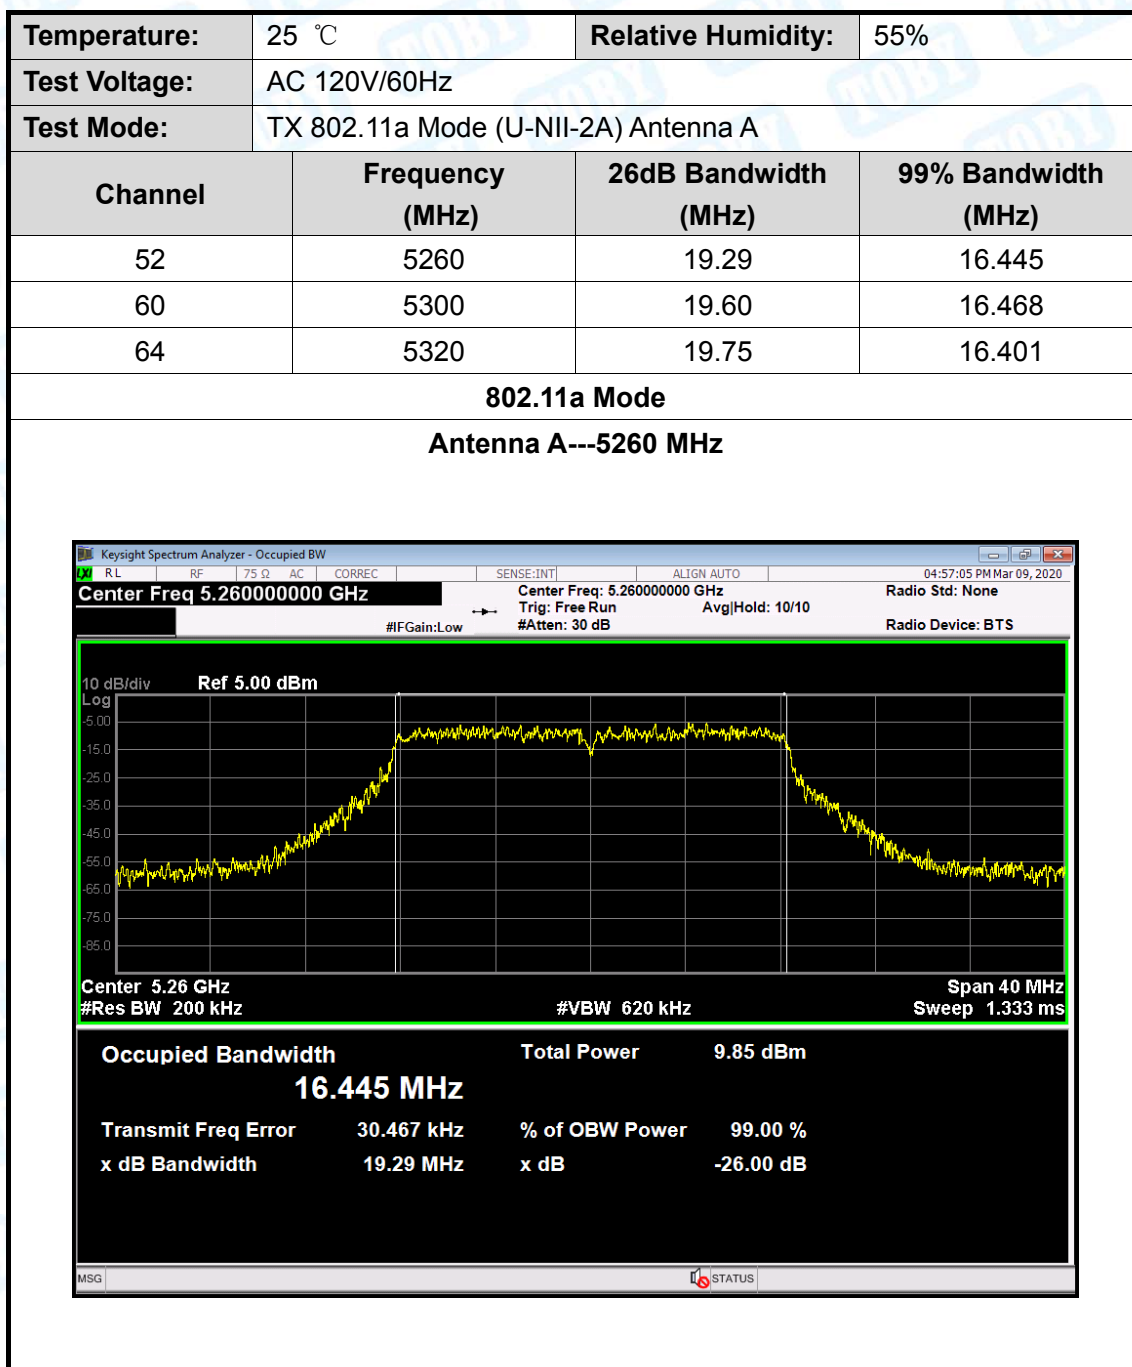


802.11a Mode


Antenna A---5300 MHz

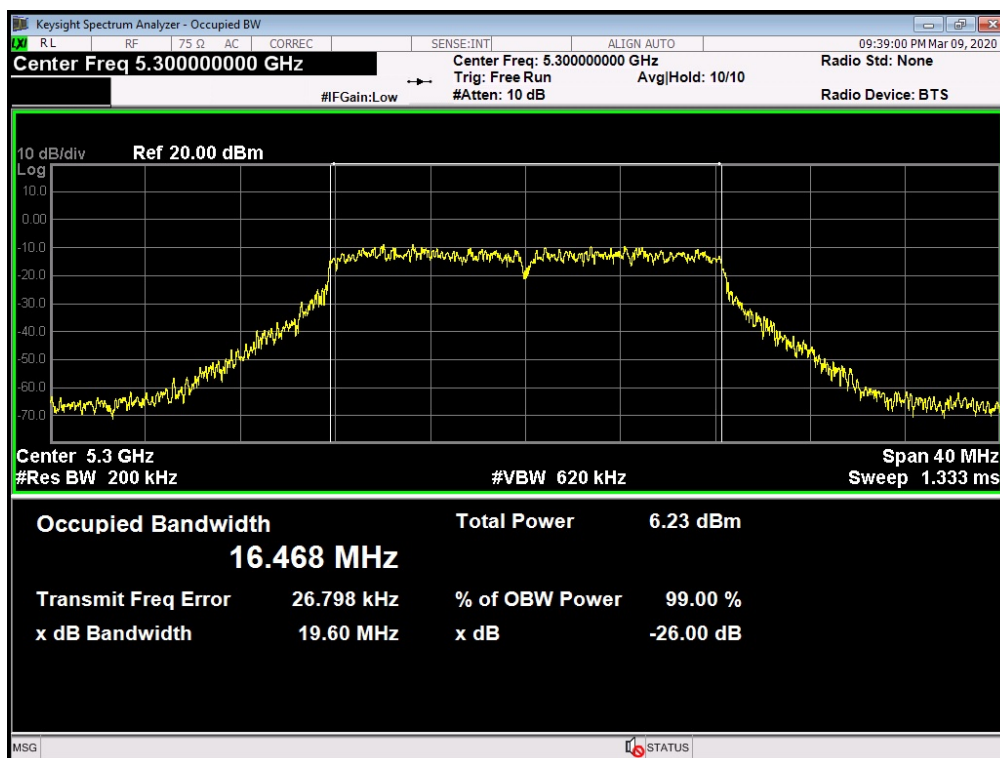

802.11a Mode


Antenna A---5320 MHz

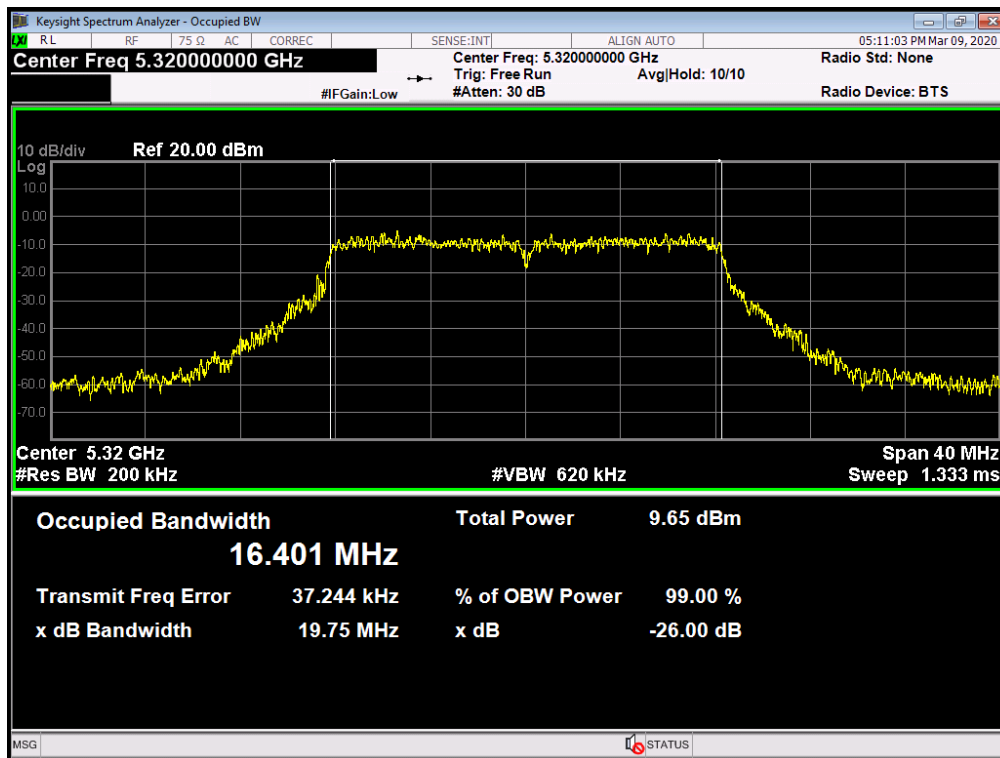

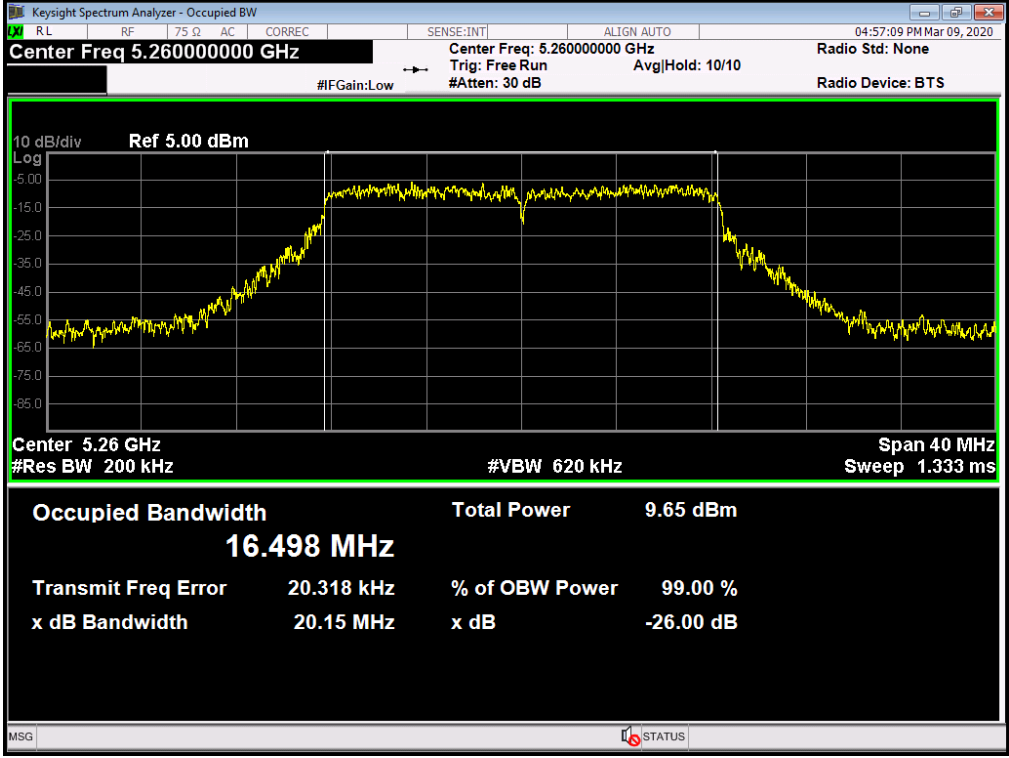Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11a Mode (U-NII-2A) Antenna B		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
52	5260	20.15	16.498
60	5300	19.97	16.447
64	5320	19.19	16.441
802.11a Mode			
Antenna B---5260 MHz			
 Keysight Spectrum Analyzer - Occupied BW Center Freq 5.260000000 GHz Span 40 MHz Res BW 200 kHz Occupied Bandwidth 16.498 MHz Total Power 9.65 dBm Transmit Freq Error 20.318 kHz x dB Bandwidth 20.15 MHz % of OBW Power 99.00 % x dB -26.00 dB			


802.11a Mode


Antenna B---5300 MHz

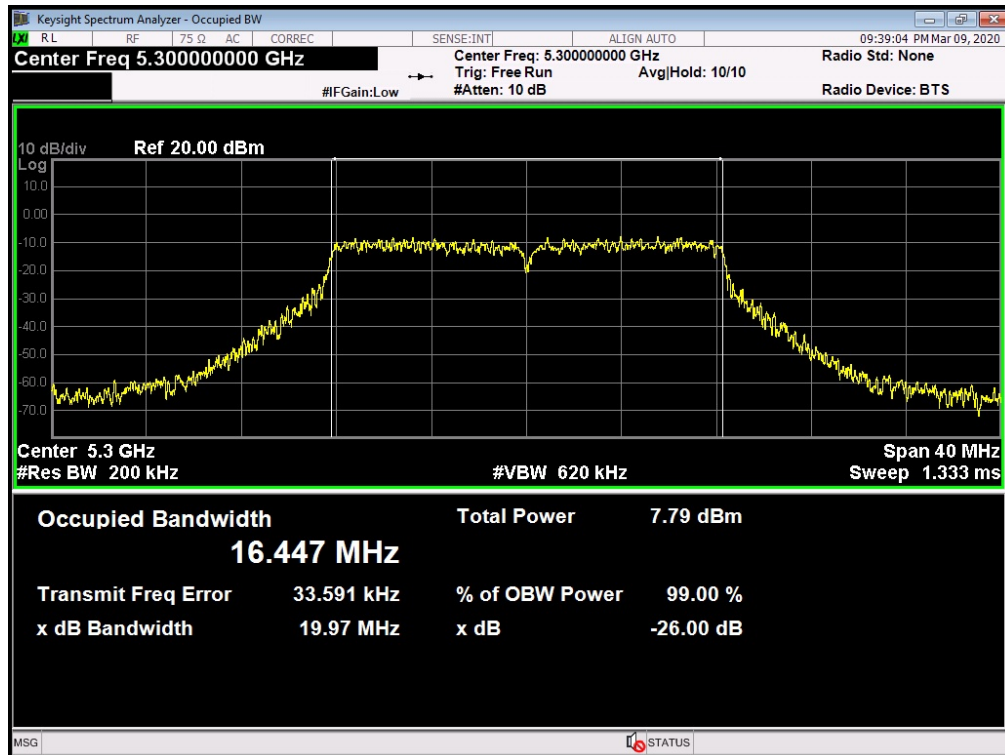

802.11a Mode


Antenna B---5320 MHz

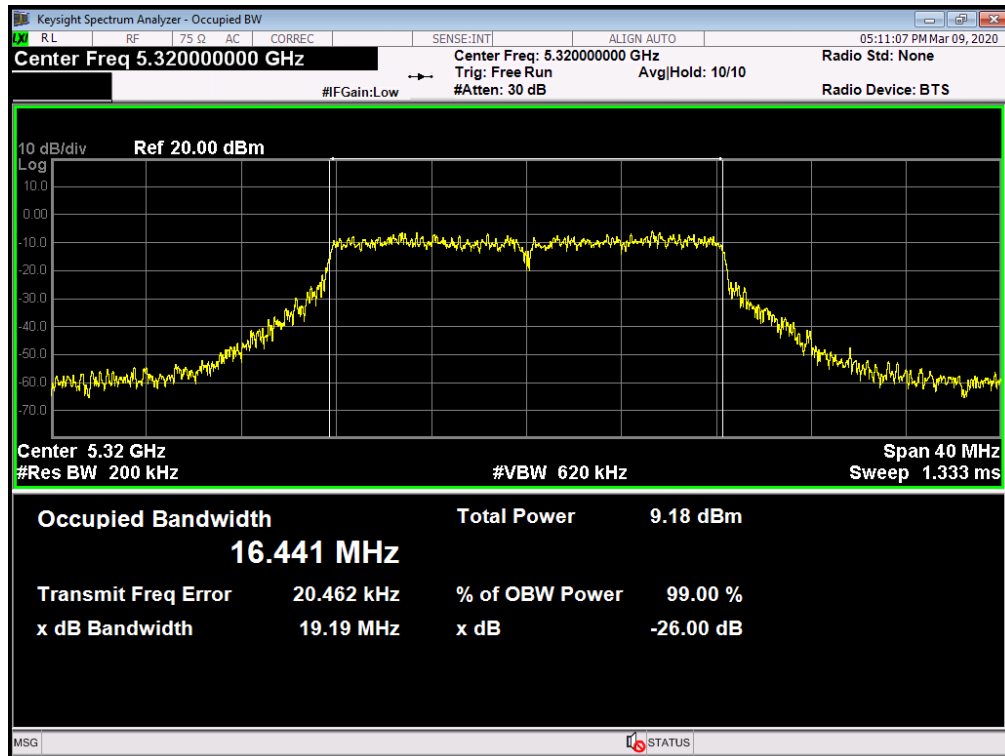

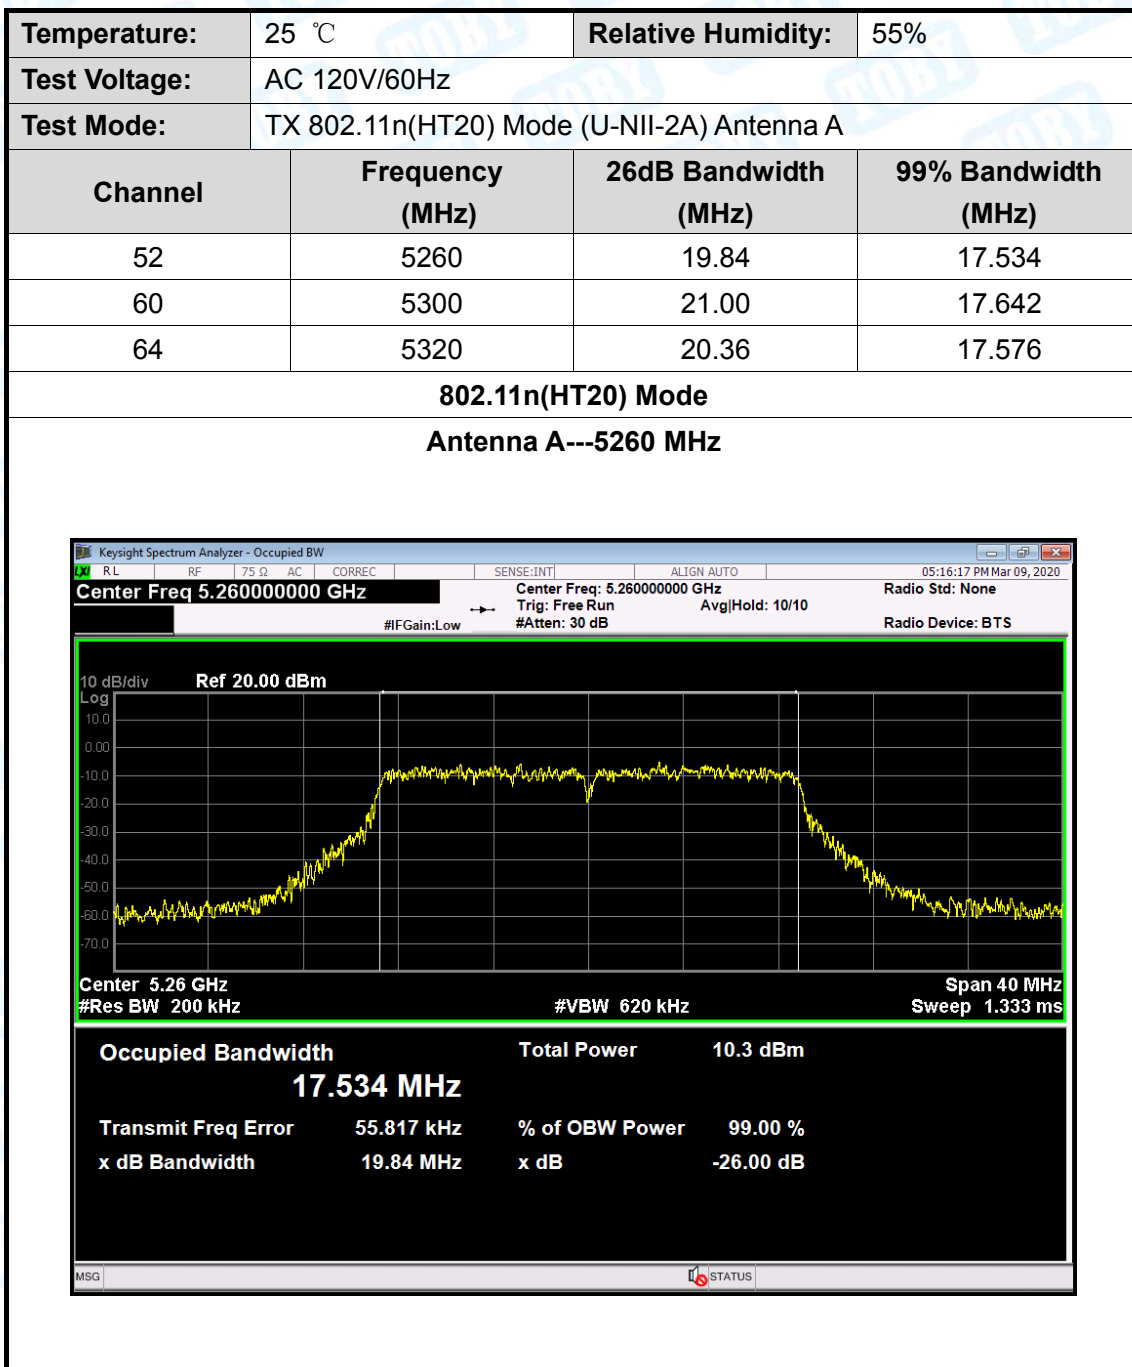


802.11n(HT20) Mode


Antenna A---5300 MHz

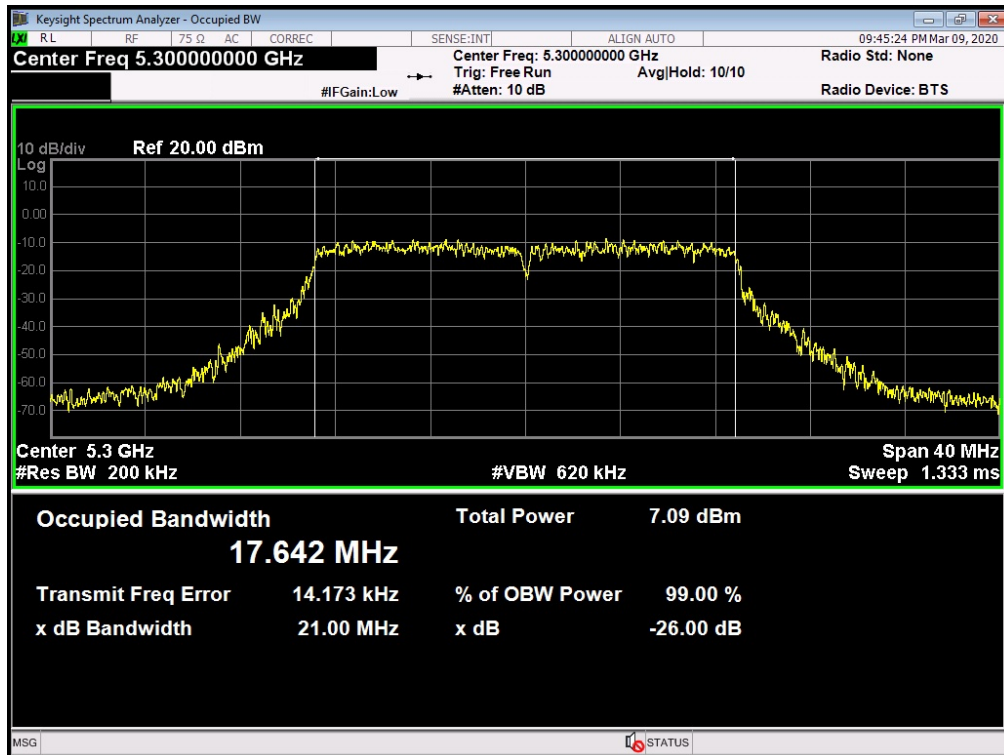

802.11n(HT20) Mode


Antenna A---5320 MHz

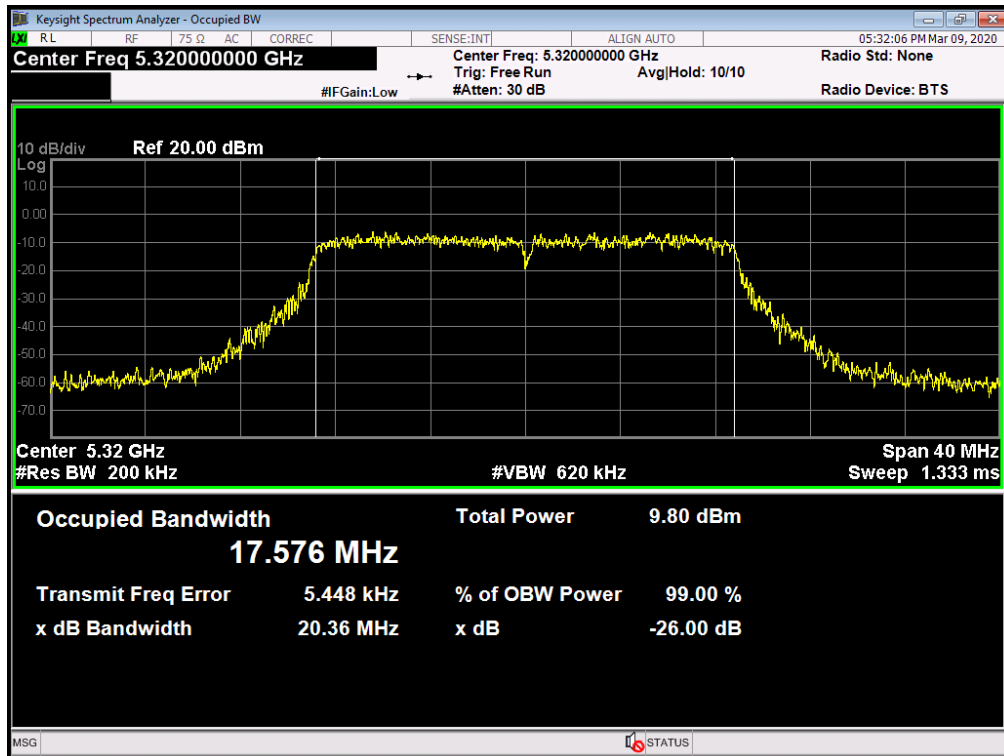

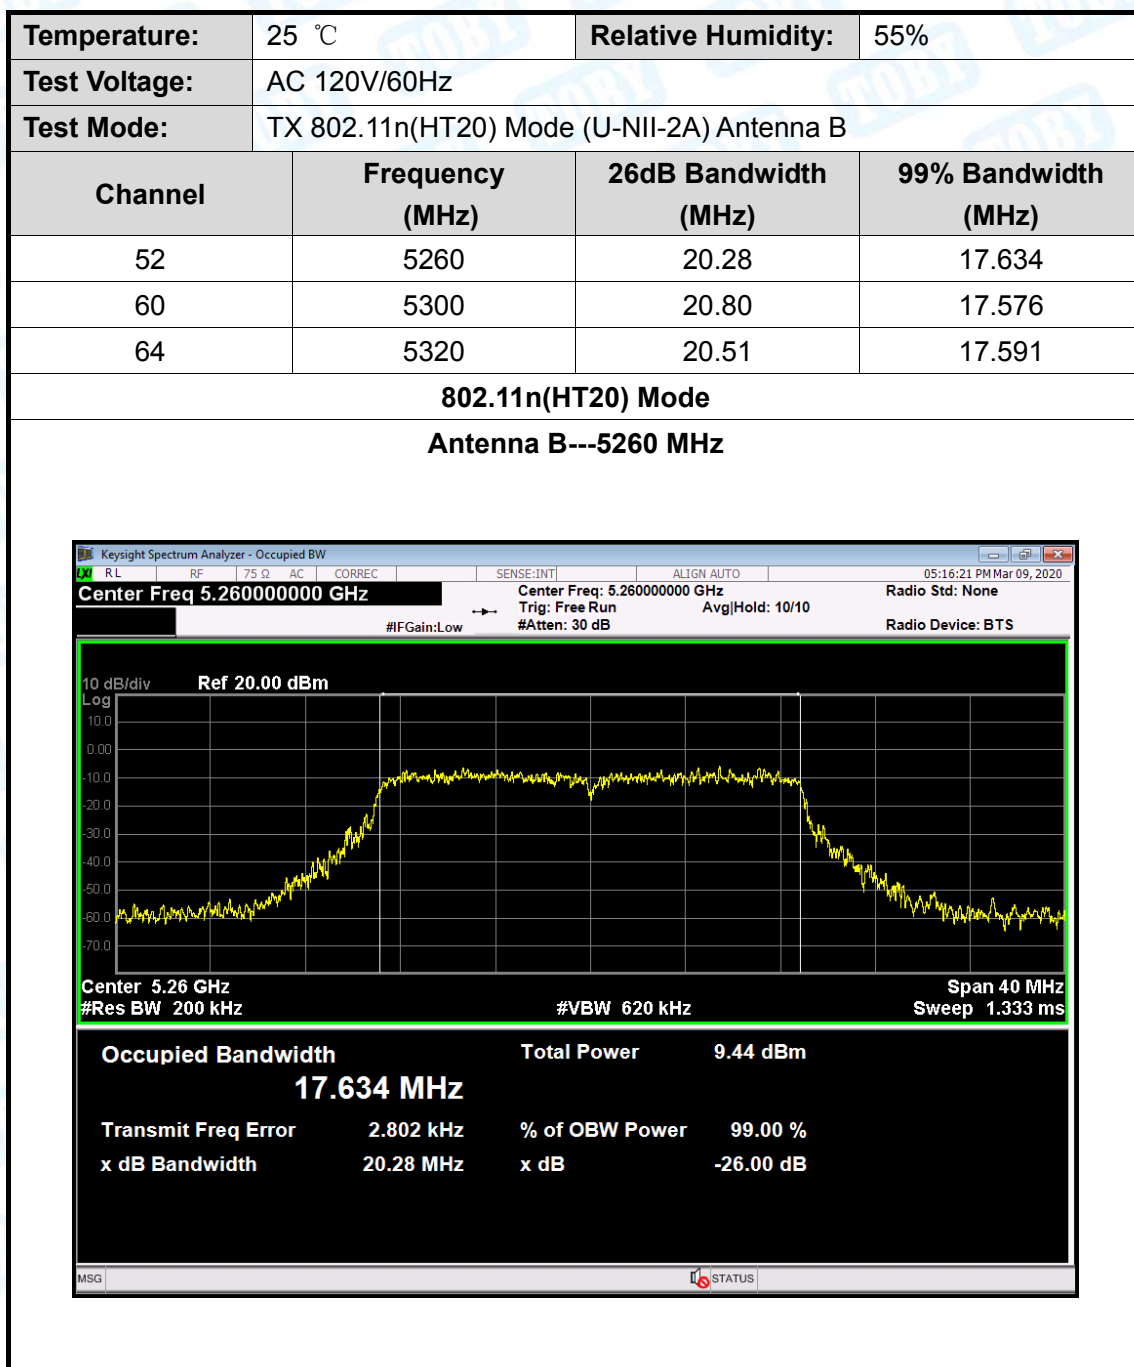


802.11n(HT20) Mode


Antenna B---5300 MHz

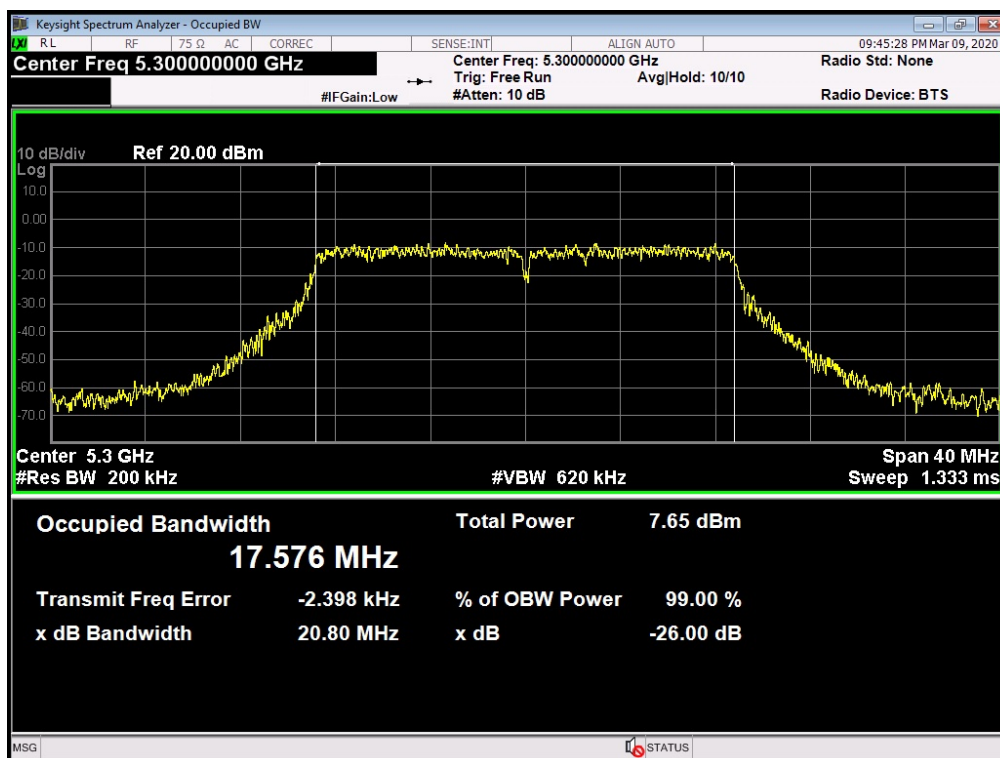

802.11n(HT20) Mode


Antenna B---5320 MHz

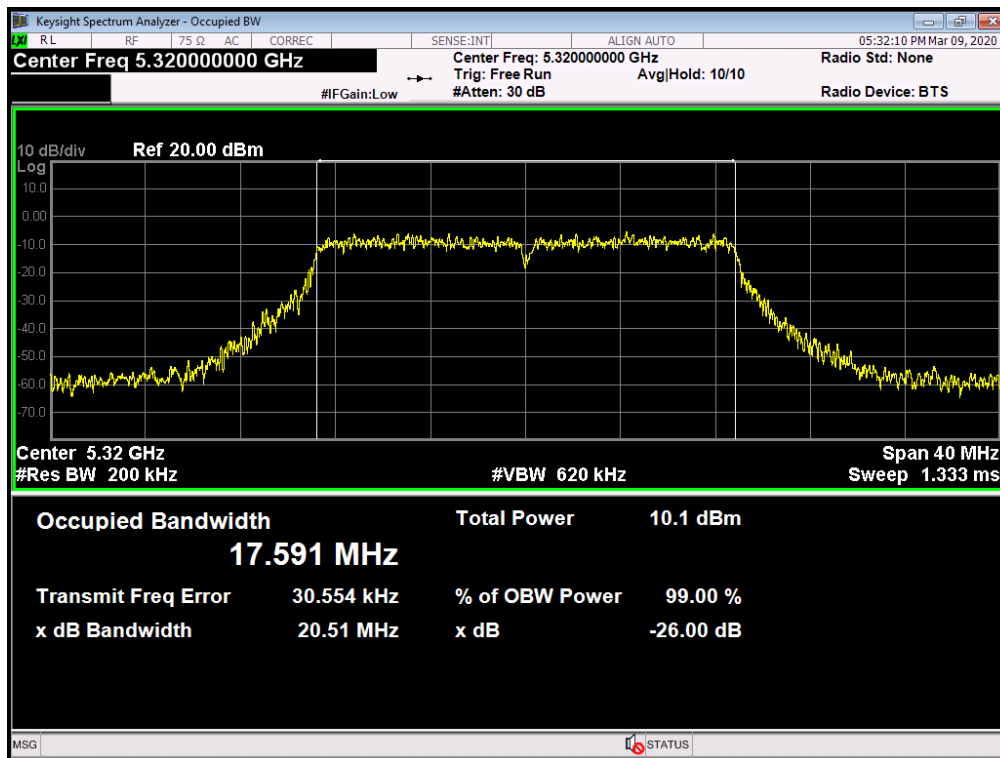

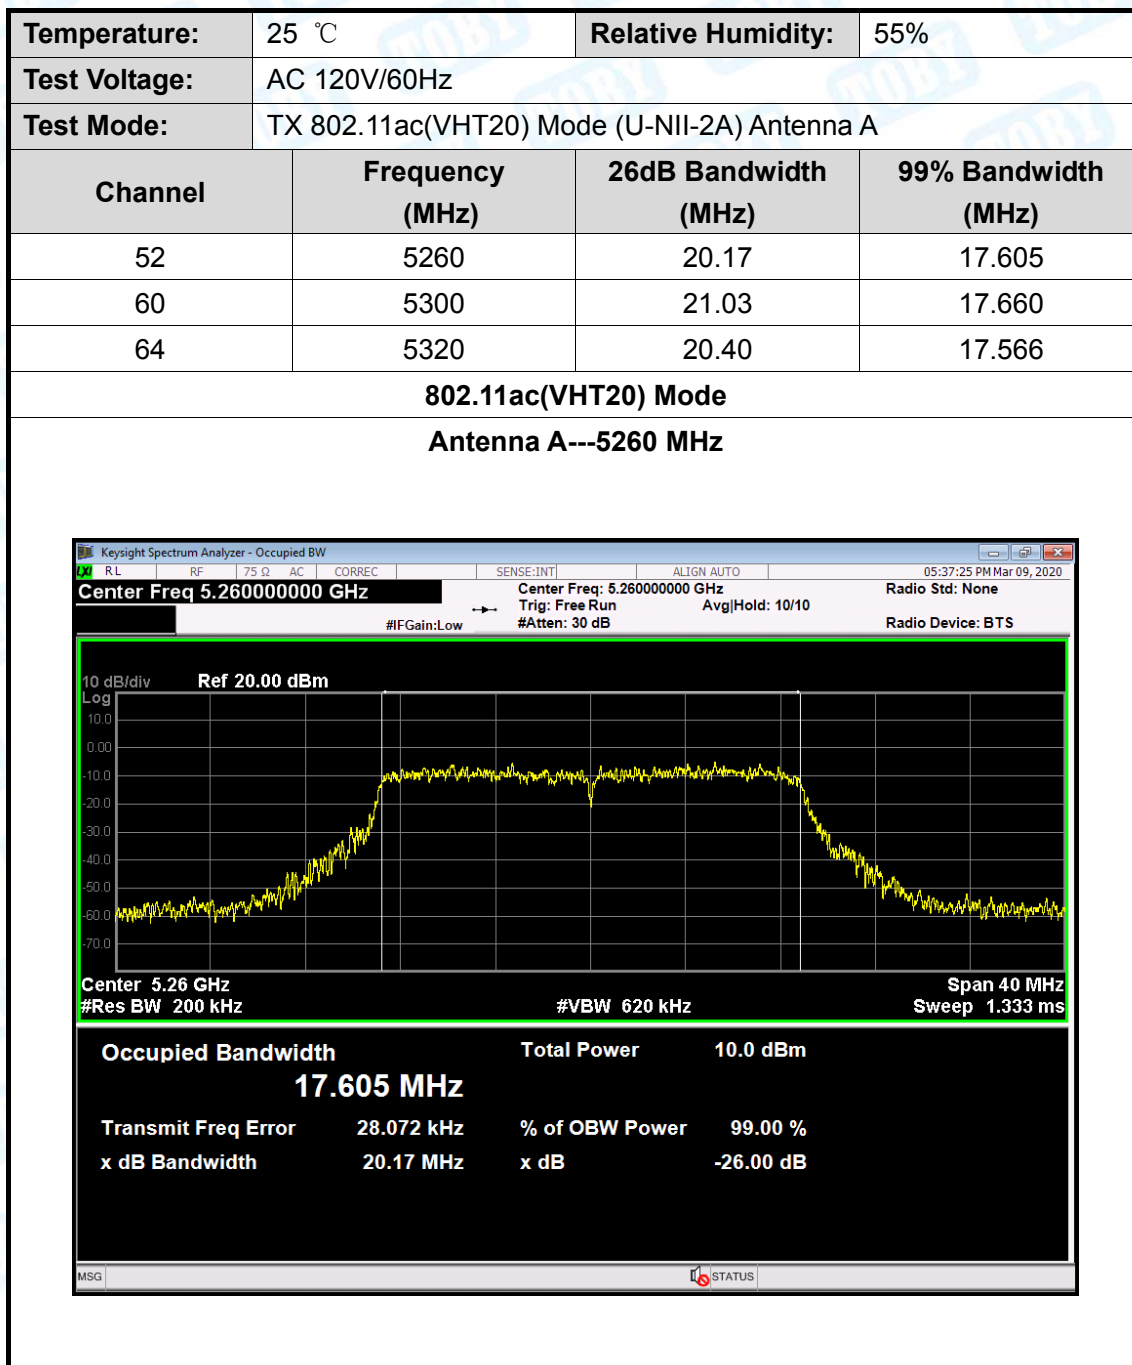


802.11ac(VHT20) Mode


Antenna A---5300 MHz

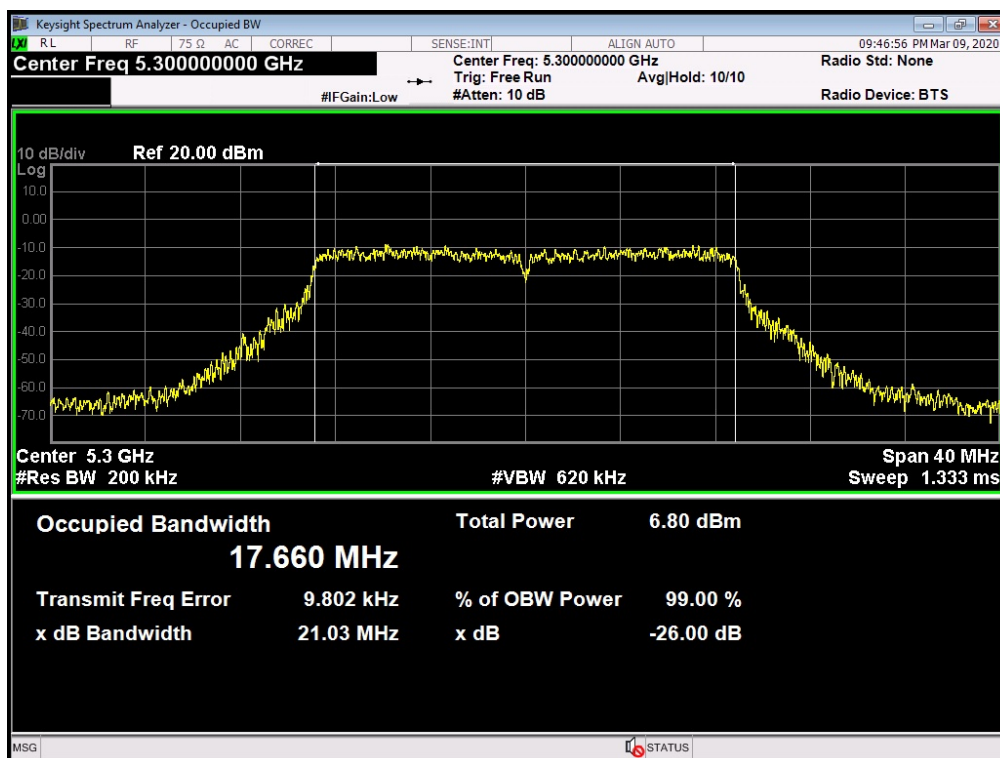

802.11ac(VHT20) Mode


Antenna A---5320 MHz

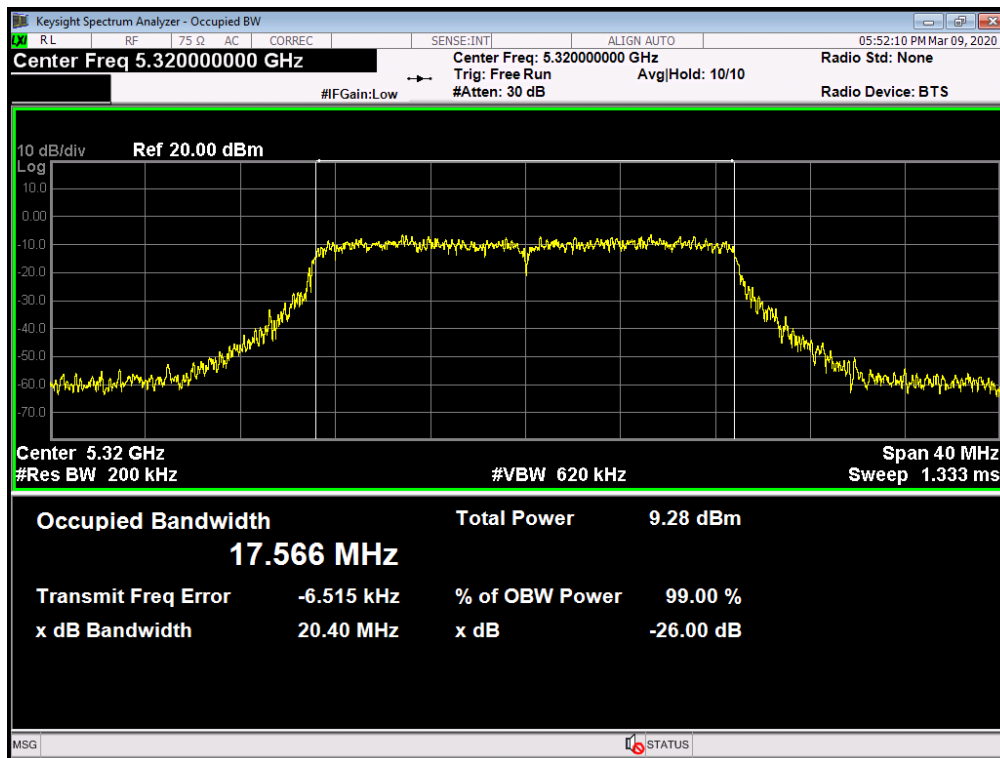

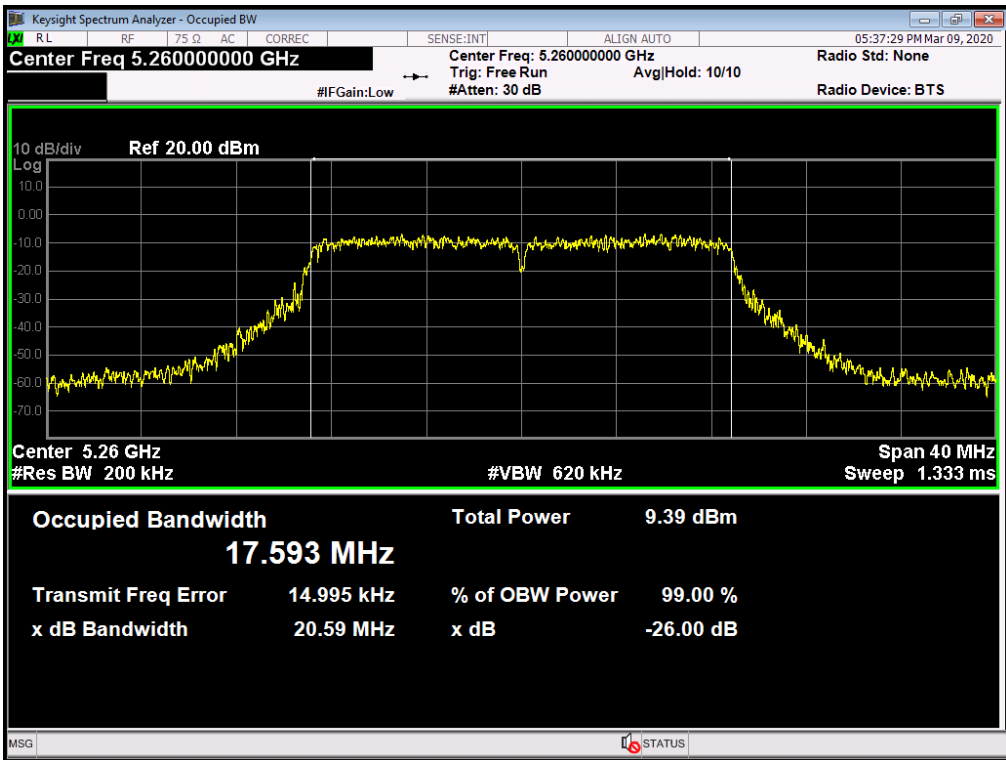Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11ac(VHT20) Mode (U-NII-2A) Antenna B		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
52	5260	20.59	17.593
60	5300	20.70	17.640
64	5320	20.53	17.640
802.11ac(VHT20) Mode			
Antenna B---5260 MHz			
 The screenshot shows a Keysight Spectrum Analyzer interface. The main display is a log-scale plot of power (dBm) versus frequency (MHz). The center frequency is set to 5.26 GHz. The span is 40 MHz. The resolution bandwidth (Res BW) is 200 kHz. The video bandwidth (VBW) is 620 kHz. The sweep time is 1.333 ms. The signal is a narrowband transmission with a peak power of approximately -10 dBm. The occupied bandwidth is 17.593 MHz. The total power is 9.39 dBm. The transmit frequency error is 14.995 kHz. The x dB bandwidth is 20.59 MHz. The % of OBW power is 99.00%. The x dB value is -26.00 dB.			


802.11ac(VHT20) Mode

Antenna B---5300 MHz

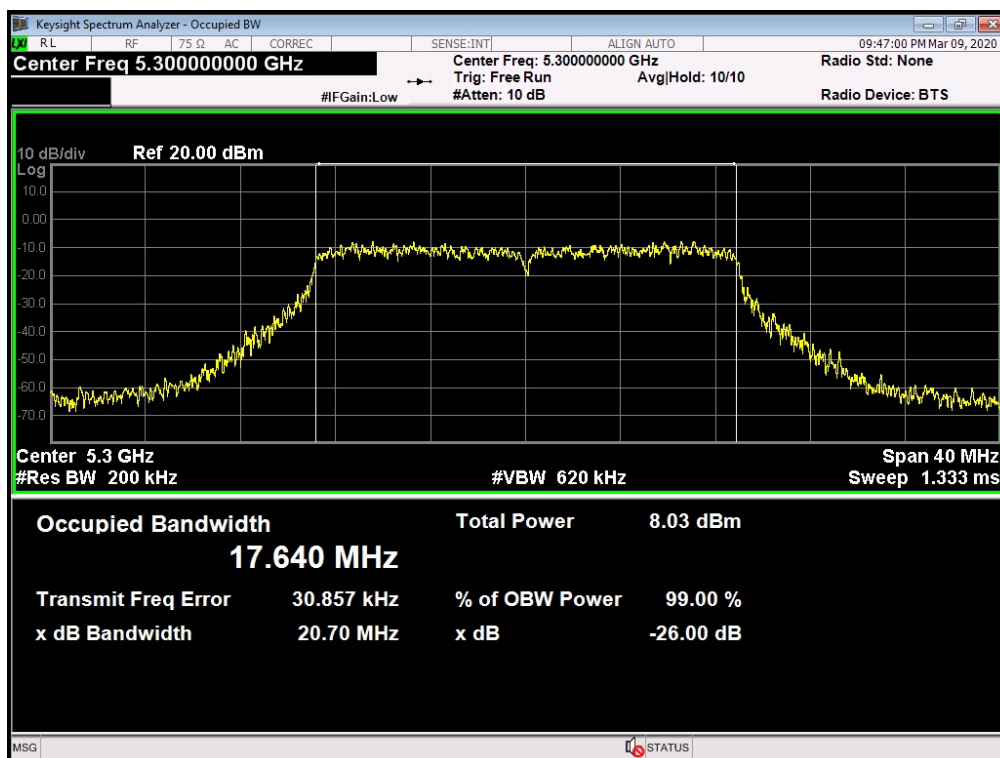

802.11ac(VHT20) Mode


Antenna B---5320 MHz

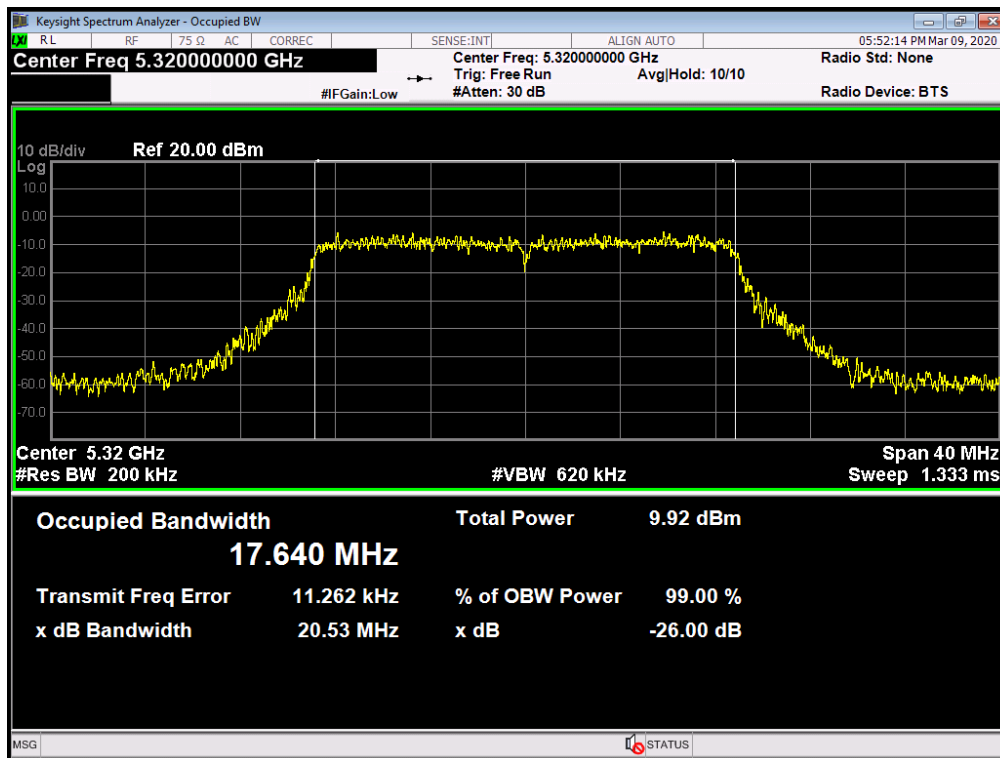


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11N(HT40) Mode (U-NII-2A) Antenna A		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
54	5270	41.52	36.164
62	5310	41.51	36.219

802.11N(HT40) Mode

Antenna A---5270 MHz

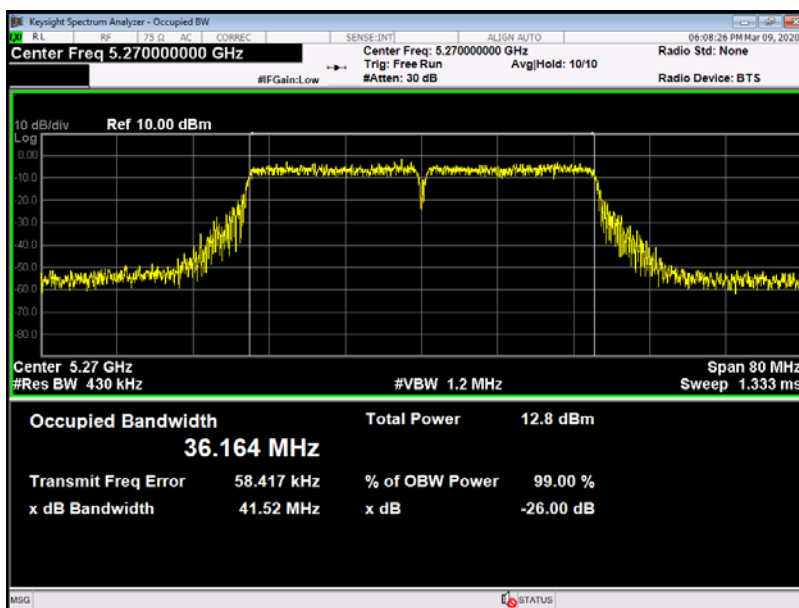


Antenna A---5310 MHz

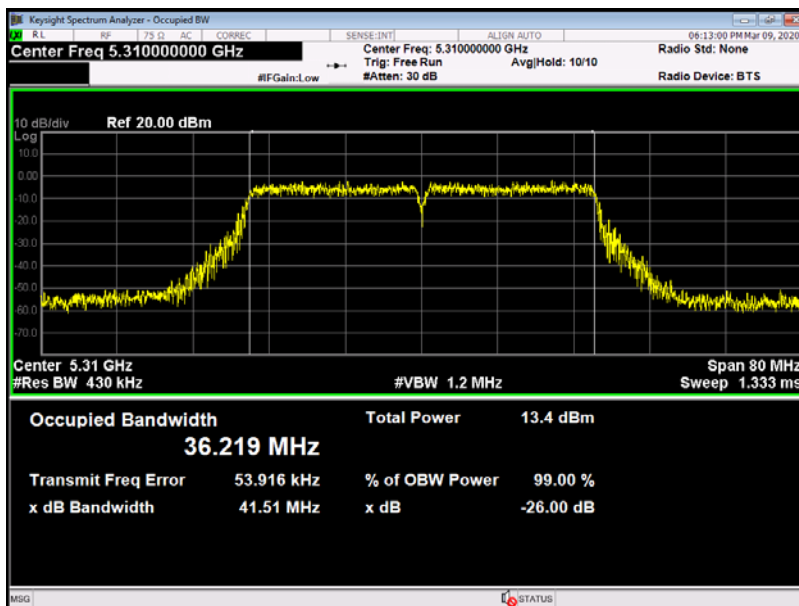


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11n(HT40) Mode (U-NII-2A) Antenna B		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
54	5270	43.17	36.152
62	5310	41.79	36.243

802.11N(HT40) Mode

Antenna B---5270 MHz

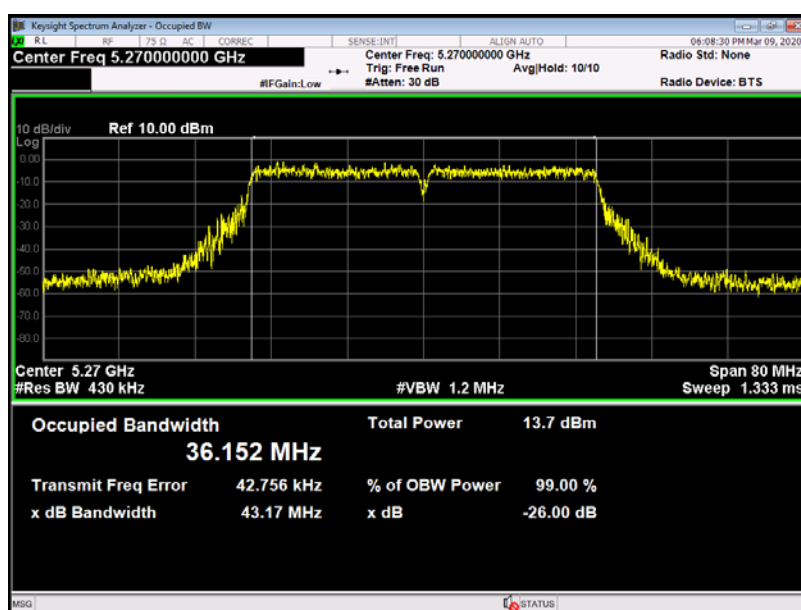


Antenna B---5310 MHz

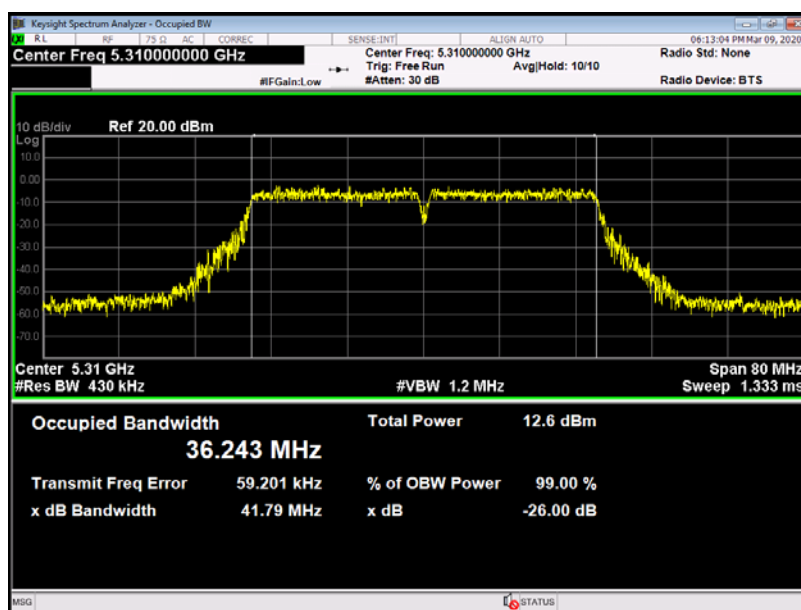


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11ac(VHT40) Mode (U-NII-2A) Antenna A		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
54	5270	41.89	36.186
62	5310	41.13	36.250

802.11ac(VHT40) Mode

Antenna A---5270 MHz

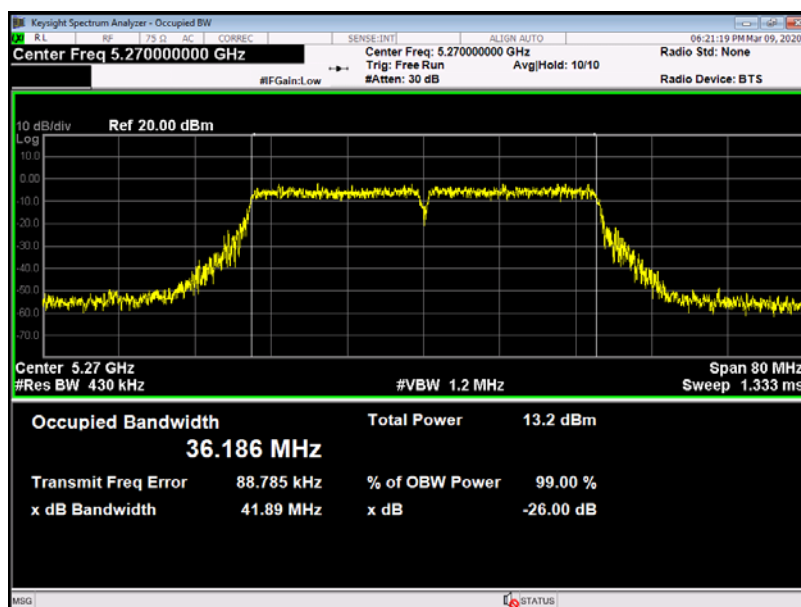


Antenna A---5310 MHz

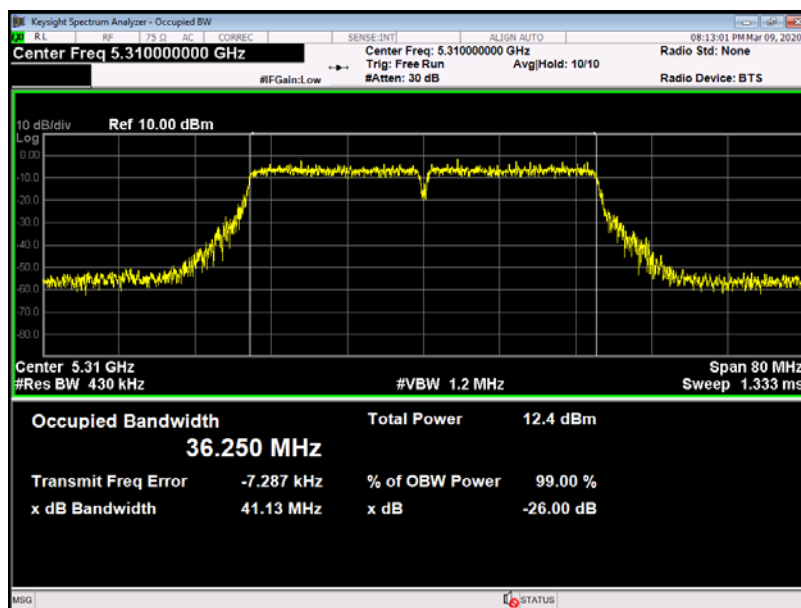


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11ac(VHT40) Mode (U-NII-2A) Antenna B		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
54	5270	42.29	36.239
62	5310	40.25	36.149


802.11ac(VHT40) Mode


Antenna B---5270 MHz

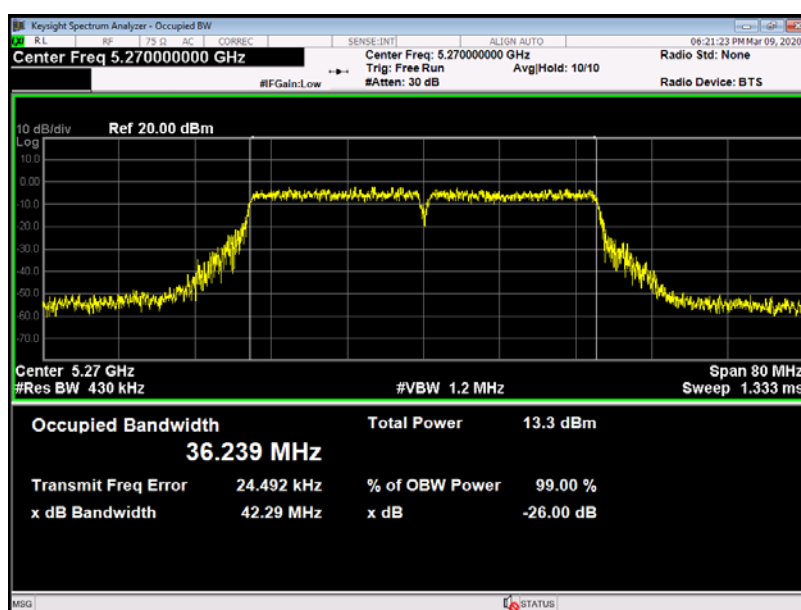


Antenna B---5310 MHz

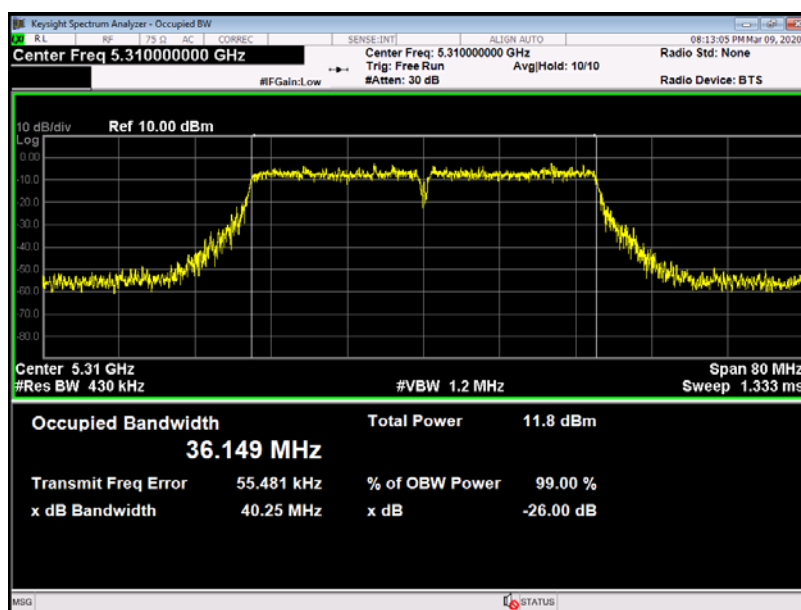

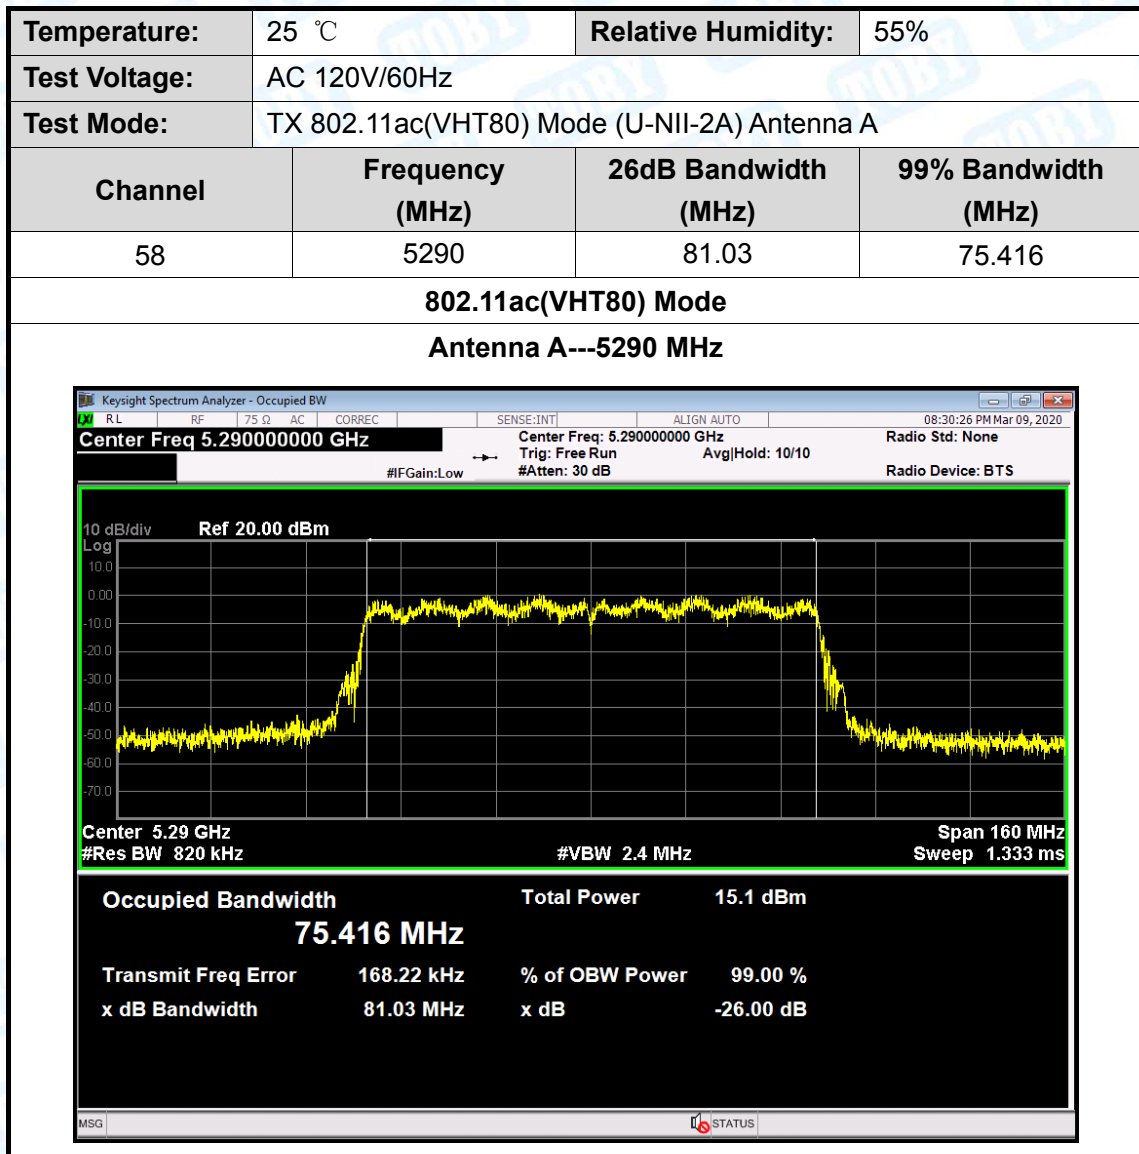


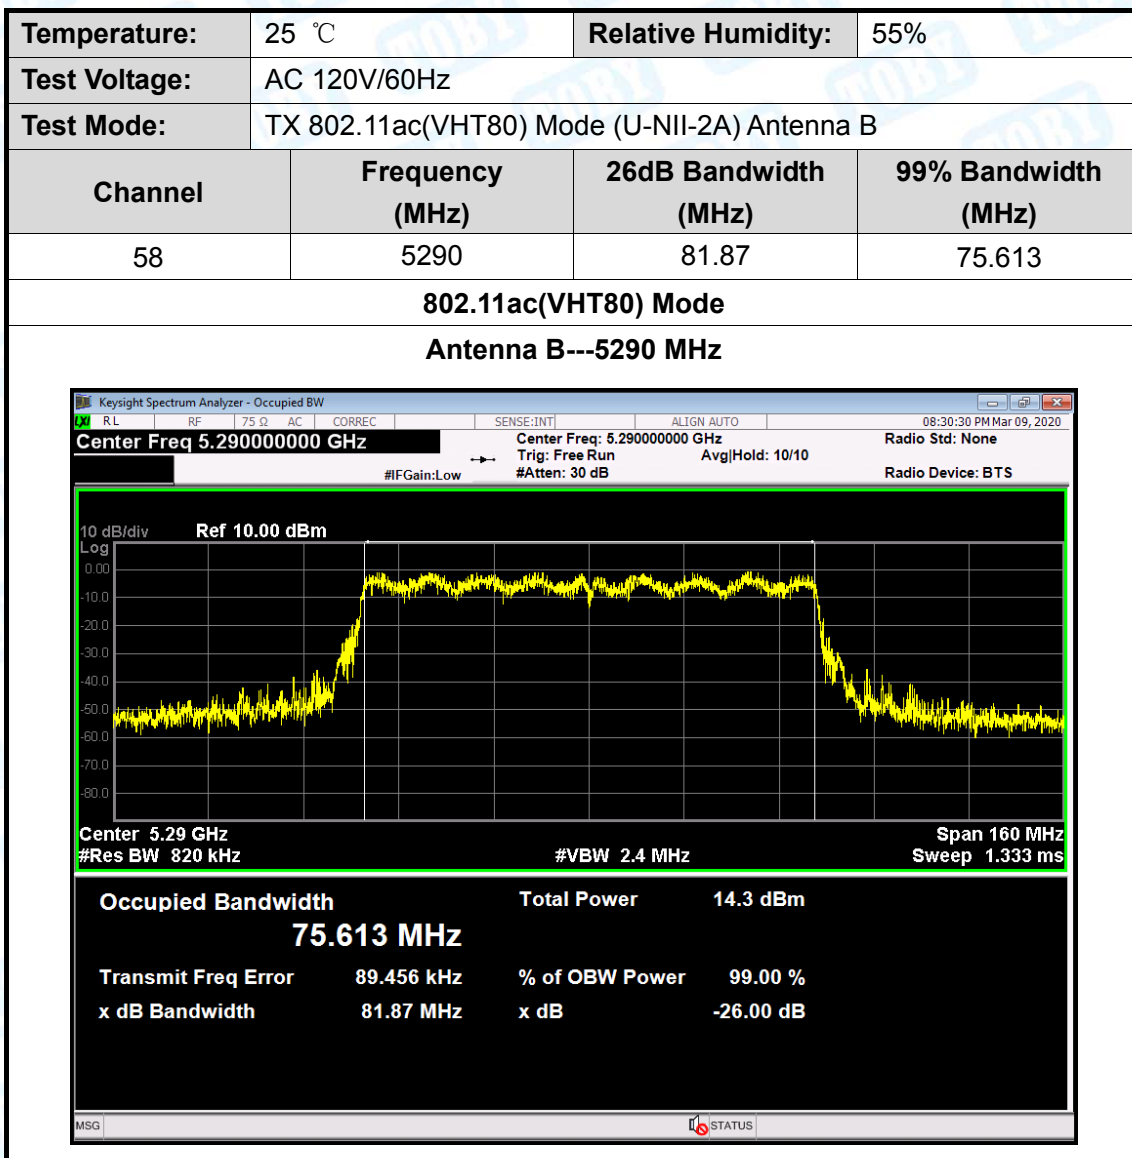

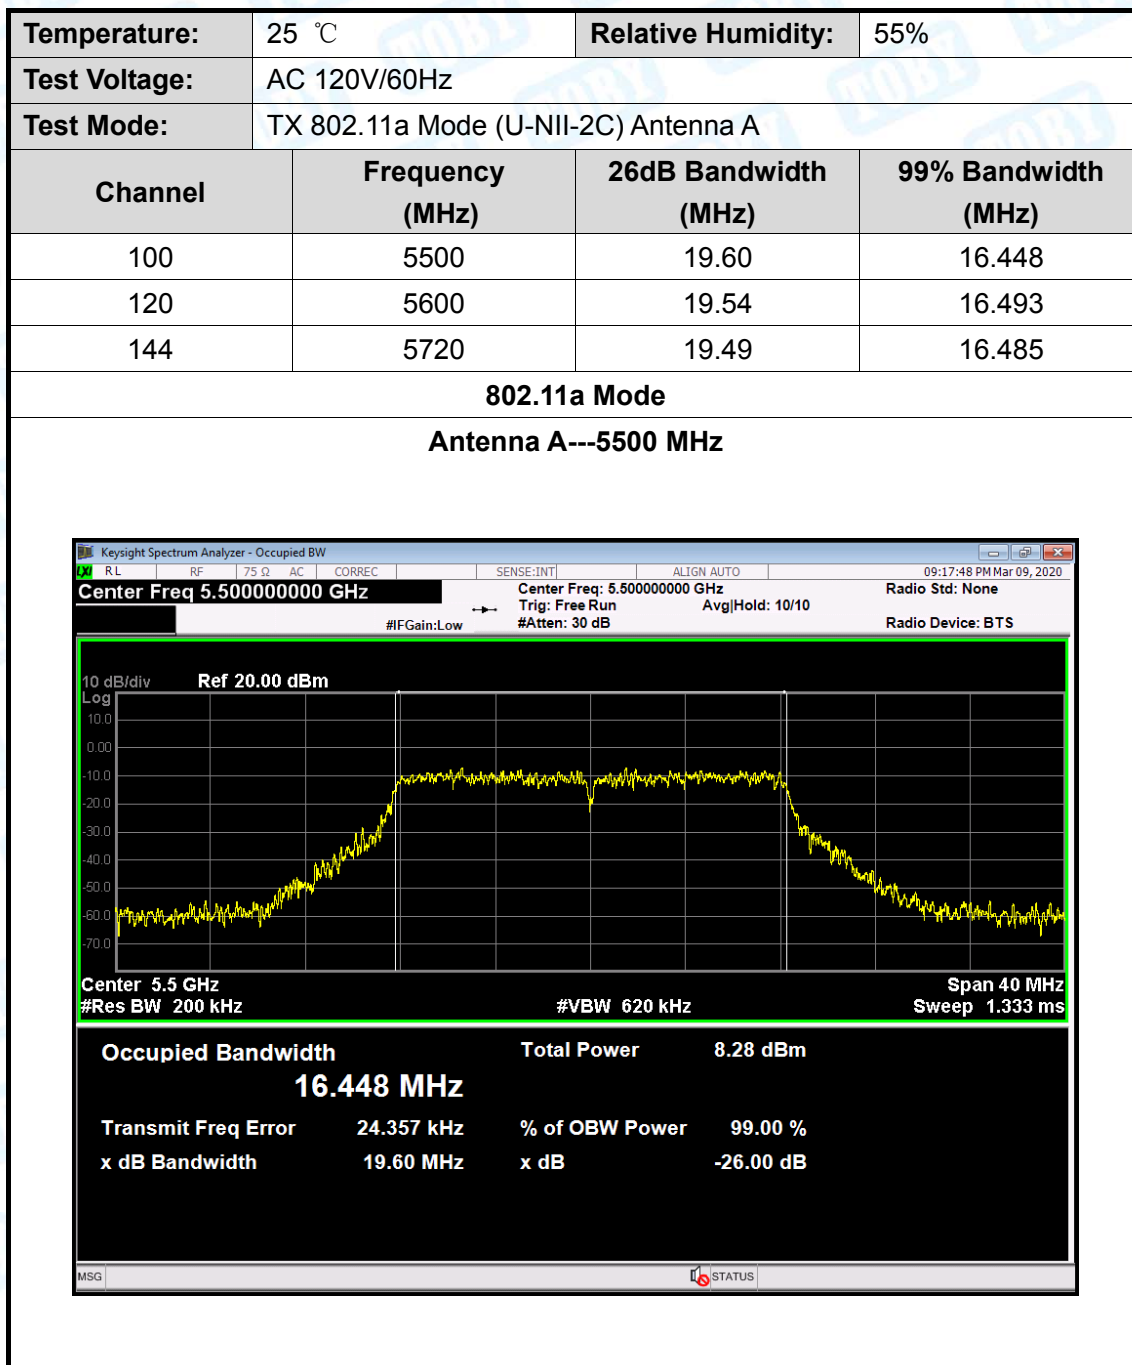


802.11a Mode


Antenna A---5600 MHz

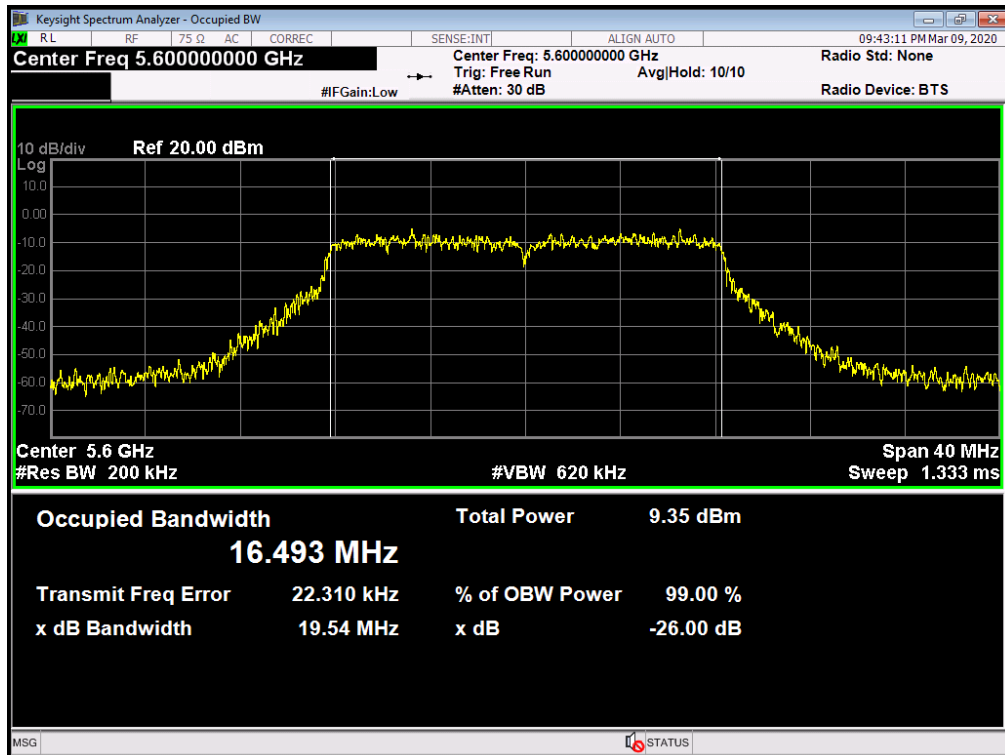

802.11a Mode


Antenna A---5720 MHz

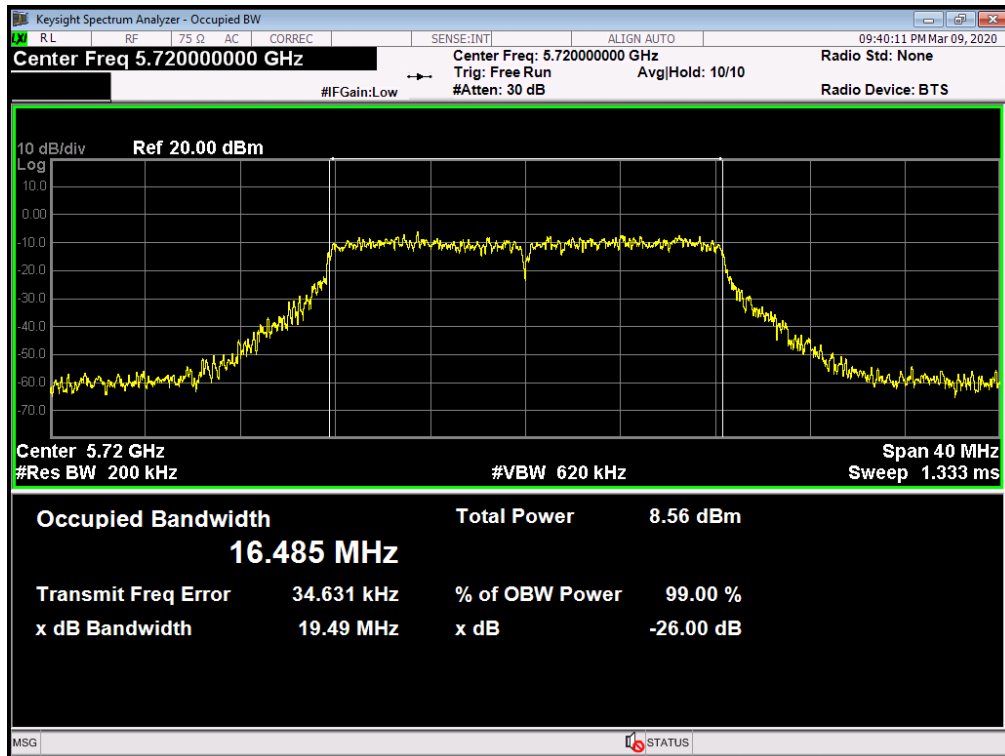

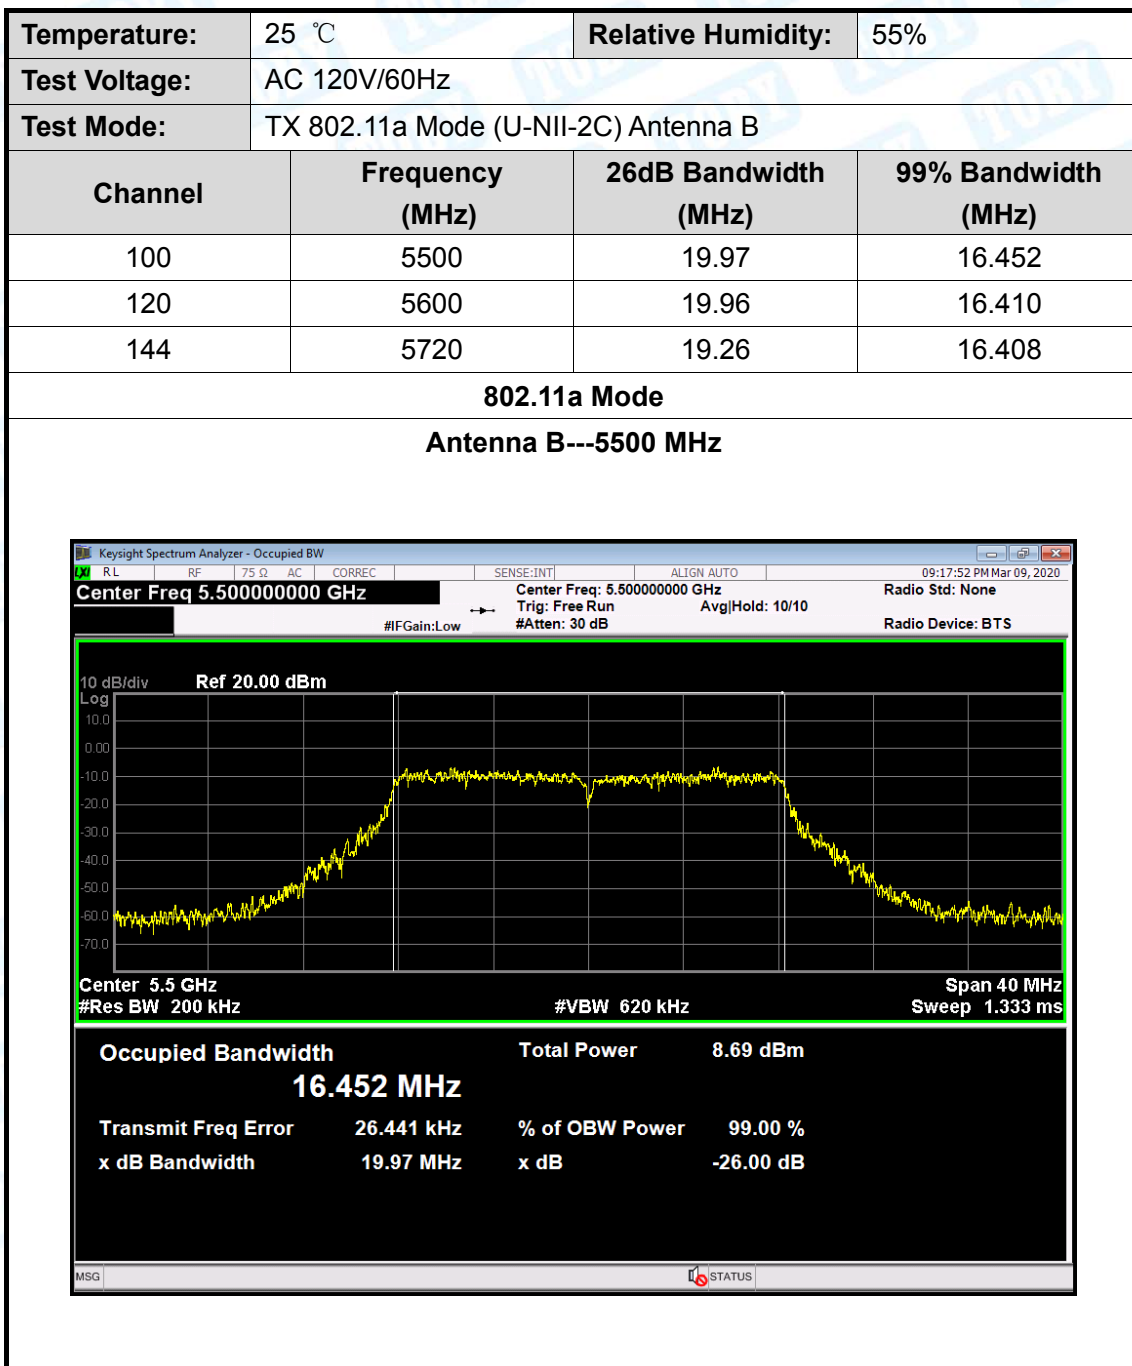


802.11a Mode

Antenna B---5600 MHz

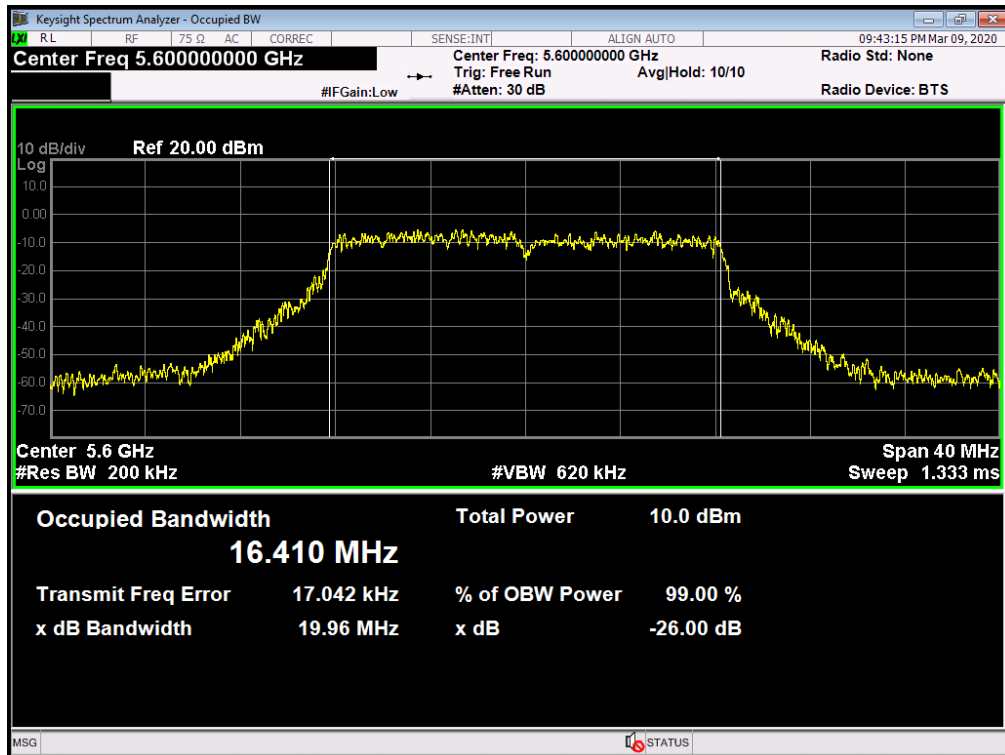

802.11a Mode


Antenna B---5720 MHz

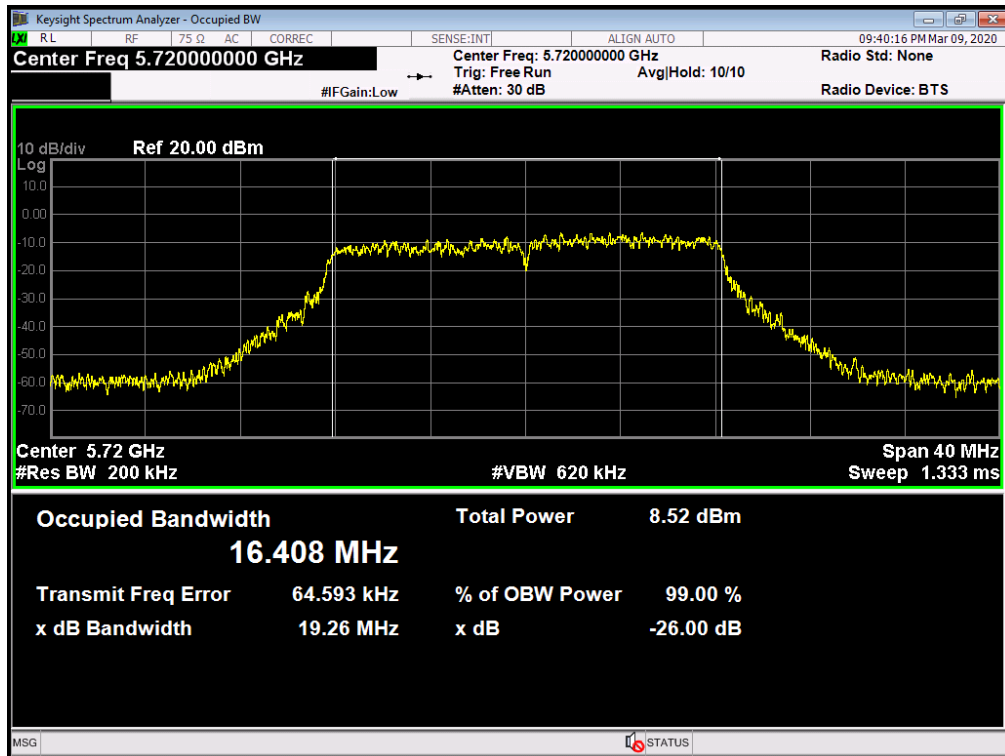


Temperature:	25 °C	Relative Humidity:	55%	
Test Voltage:	AC 120V/60Hz			
Test Mode:	TX 802.11a Mode (U-NII-2C) Antenna A			
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
144	5720	15.15	----	13.279
		----	3.271	3.7397

802.11a Mode

Antenna A---5720 MHz Straddle 5.47-5.725GHz

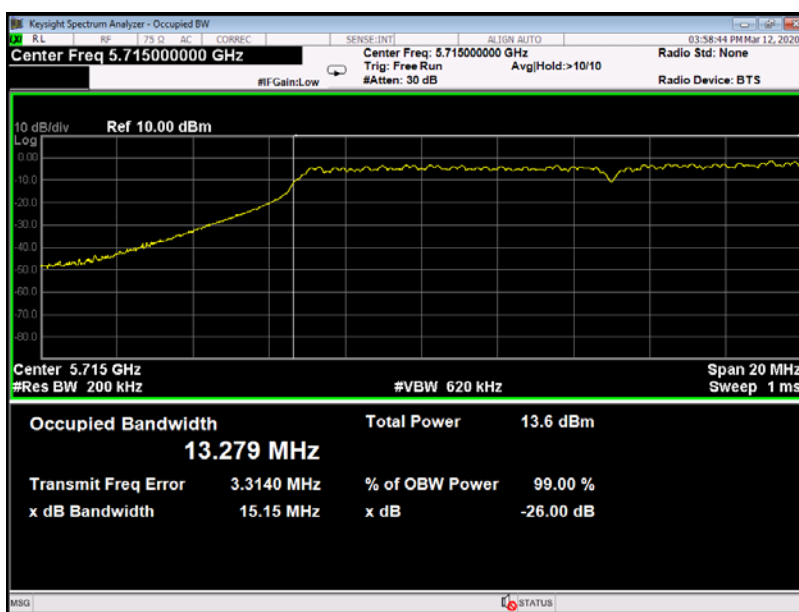


Antenna A---5720 MHz Straddle 5.725-5.85GHz

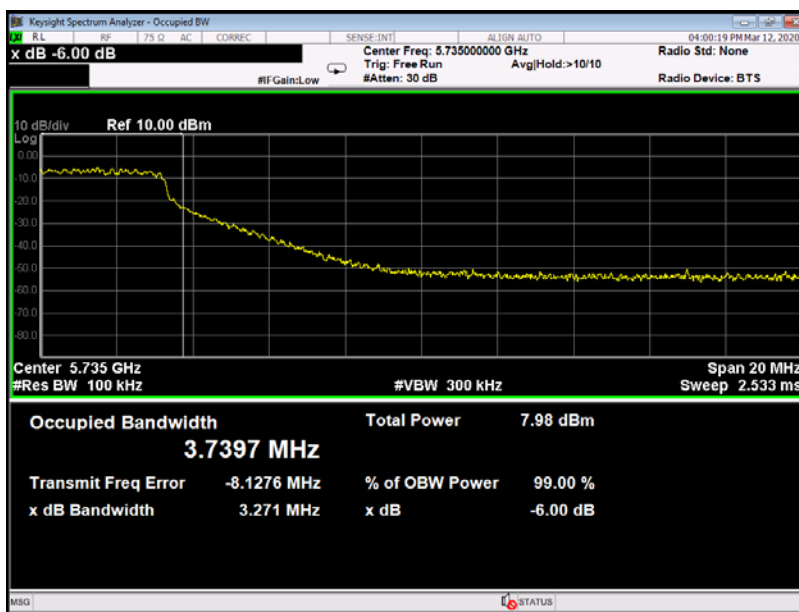


Temperature:	25 °C	Relative Humidity:	55%	
Test Voltage:	AC 120V/60Hz			
Test Mode:	TX 802.11a Mode (U-NII-2C) Antenna B			
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
144	5720	15.02	----	13.254
		----	3.286	3.7083

802.11a Mode

Antenna B---5720 MHz Straddle 5.47-5.725GHz

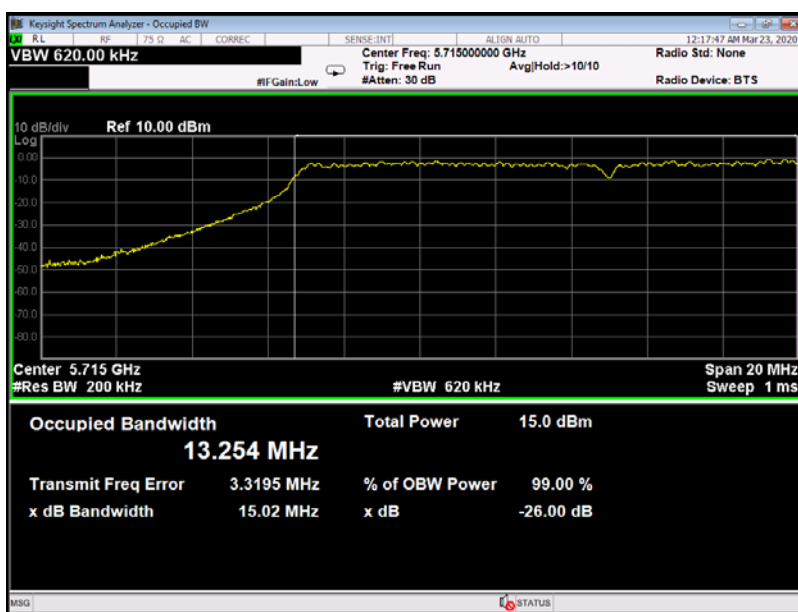


Antenna B---5720 MHz Straddle 5.725-5.85GHz

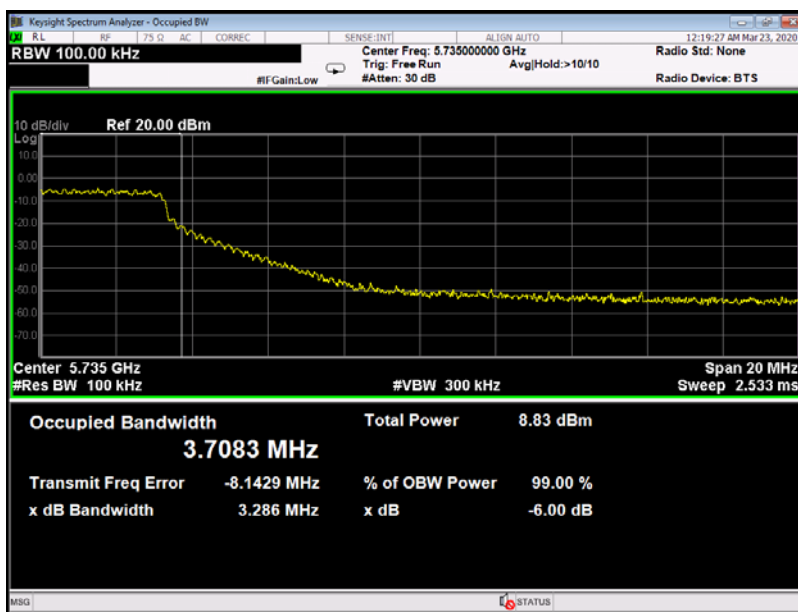

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11n(HT20) Mode (U-NII-2C) Antenna A		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
100	5500	20.00	17.556
120	5600	20.38	17.578
144	5720	20.46	17.594

Antenna A---802.11n(HT20) Mode

5500 MHz

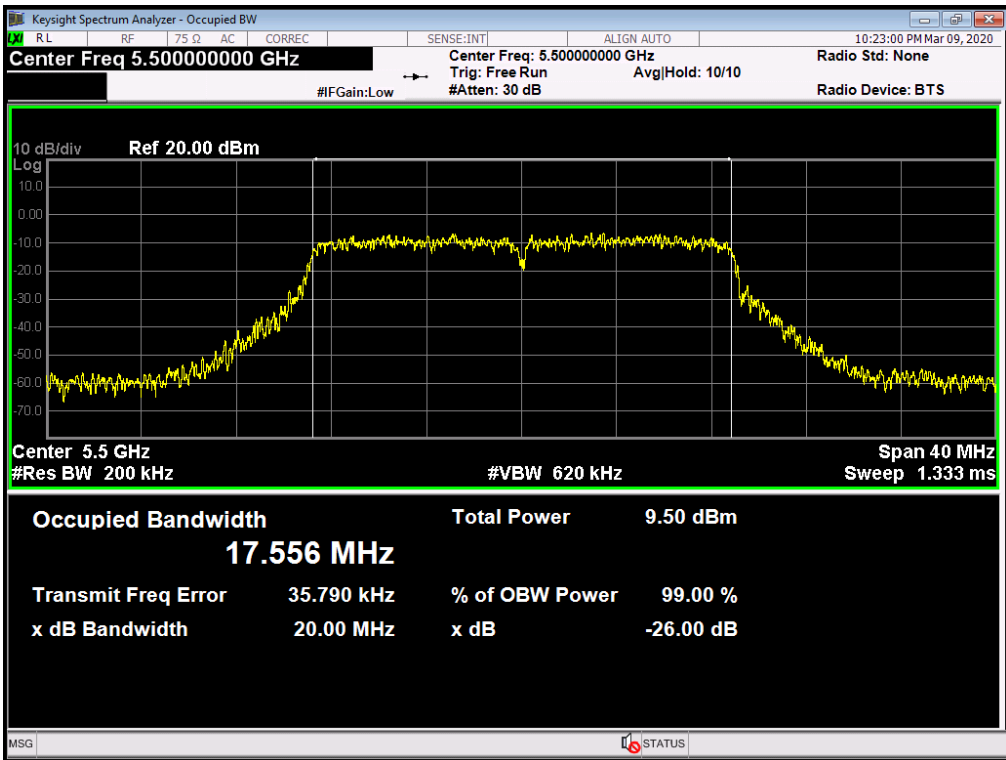

Occupied Bandwidth
17.556 MHz


Total Power 9.50 dBm

Transmit Freq Error 35.790 kHz **% of OBW Power** 99.00 %

x dB Bandwidth 20.00 MHz **x dB** -26.00 dB


802.11n(HT20) Mode


Antenna A---5600 MHz

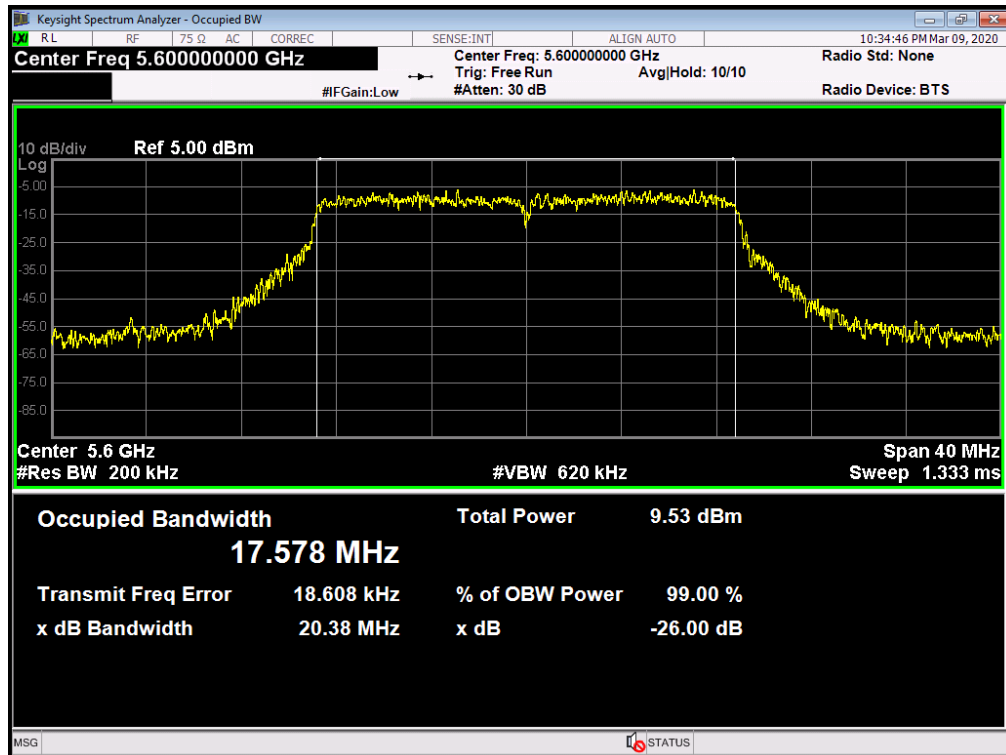

802.11n(HT20) Mode


Antenna A---5720 MHz

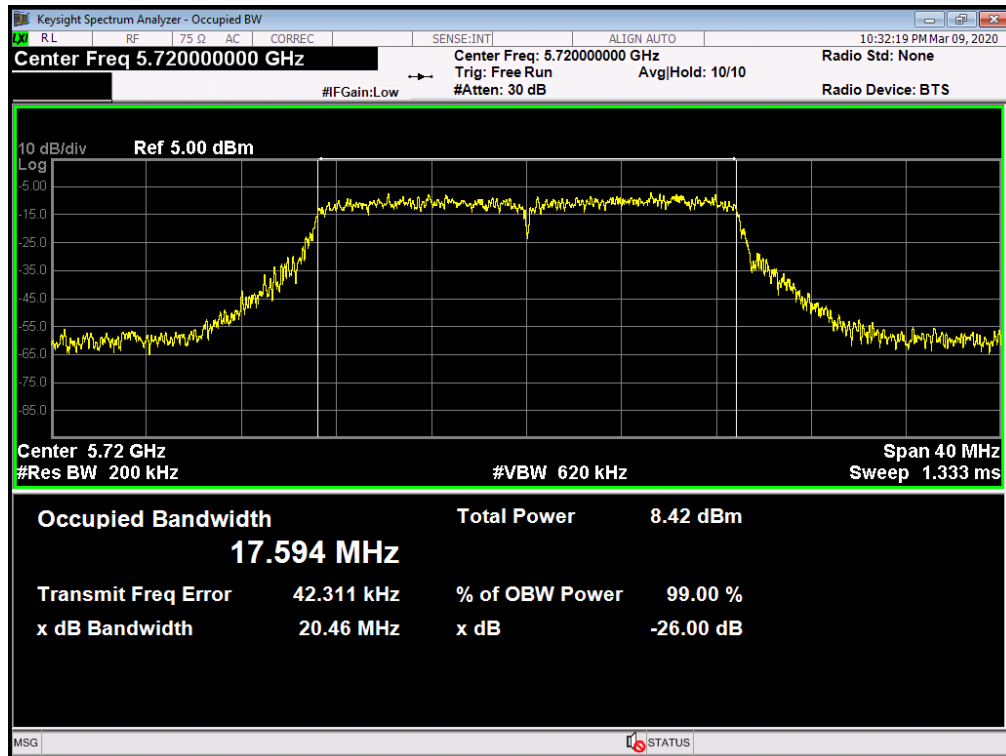

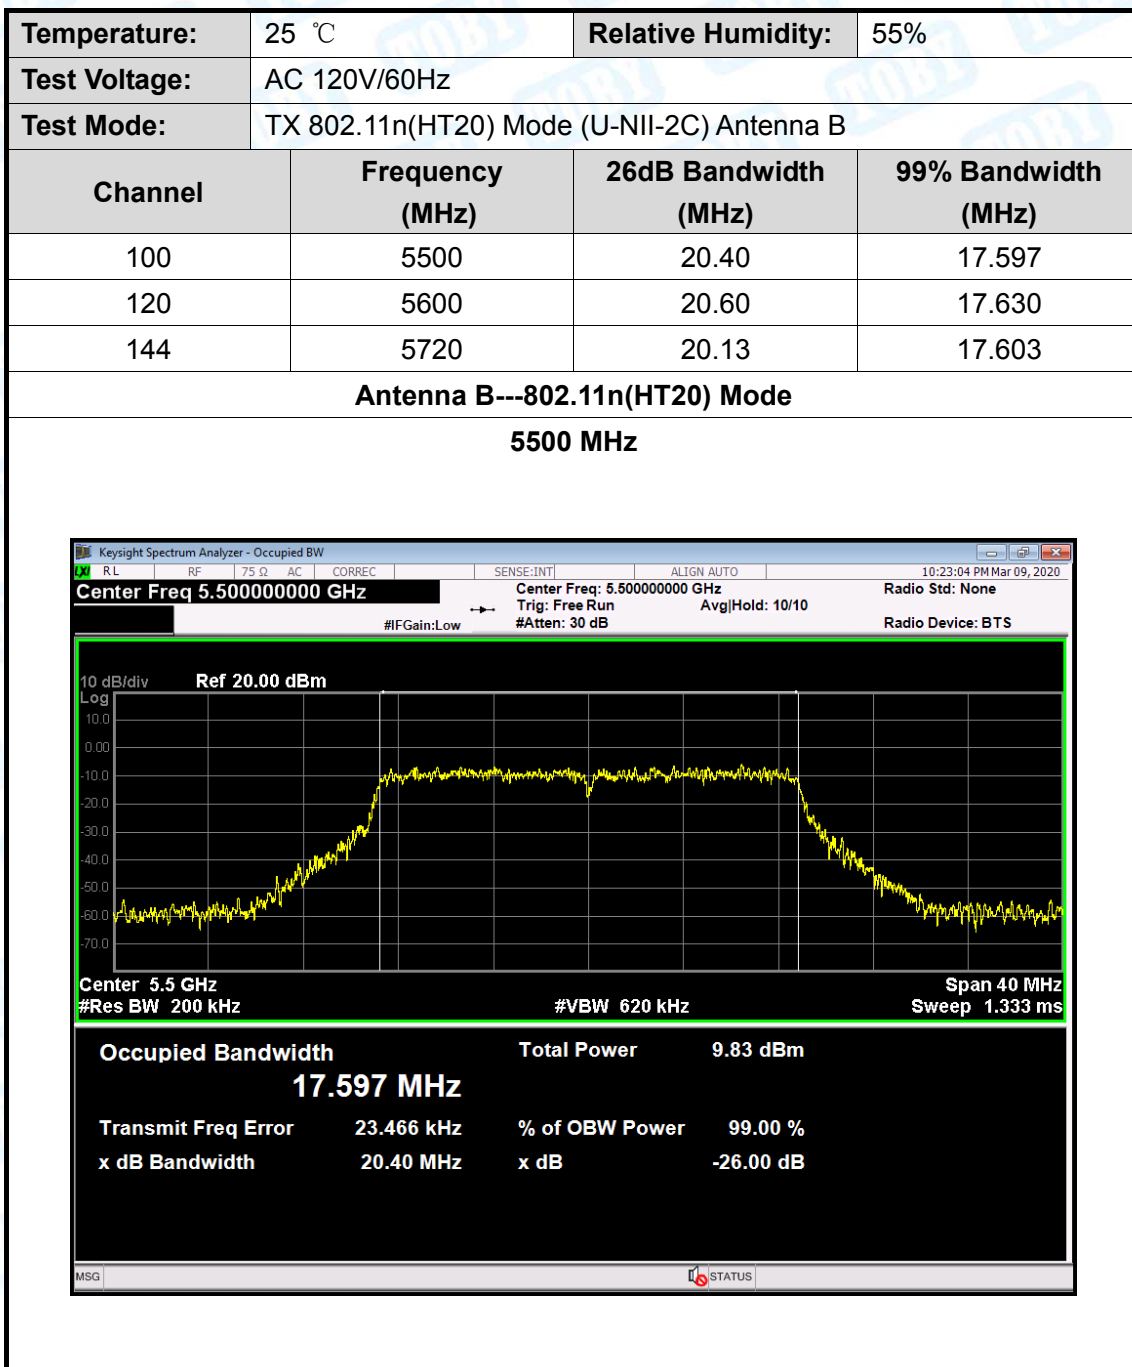


802.11n(HT20) Mode

Antenna B---5600 MHz

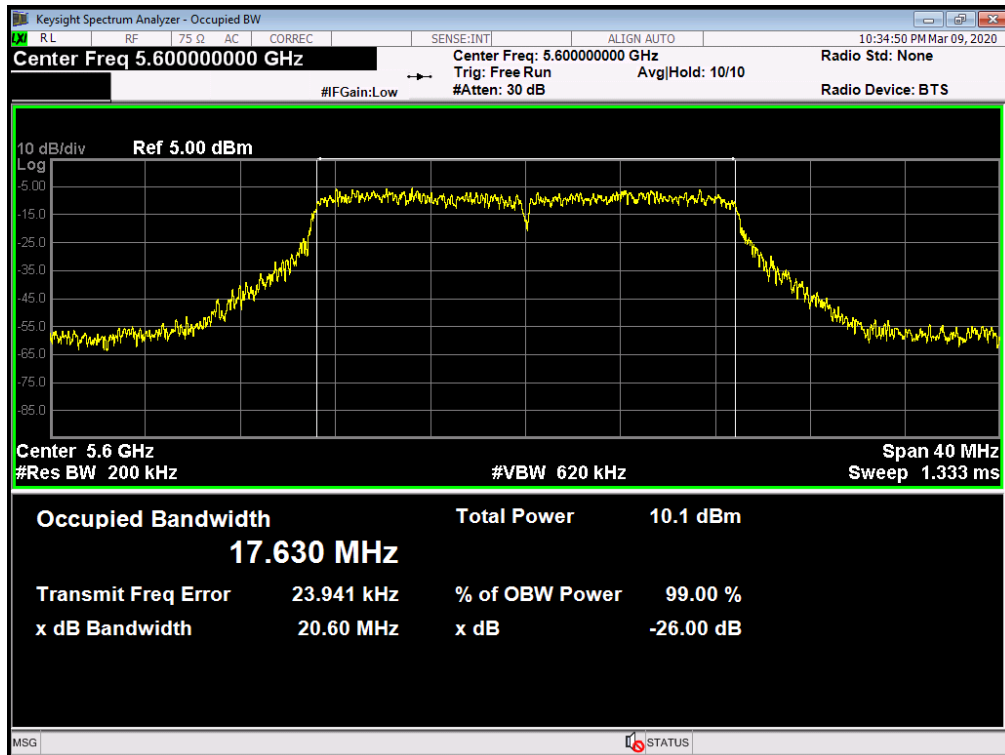

802.11n(HT20) Mode


Antenna B---5720 MHz

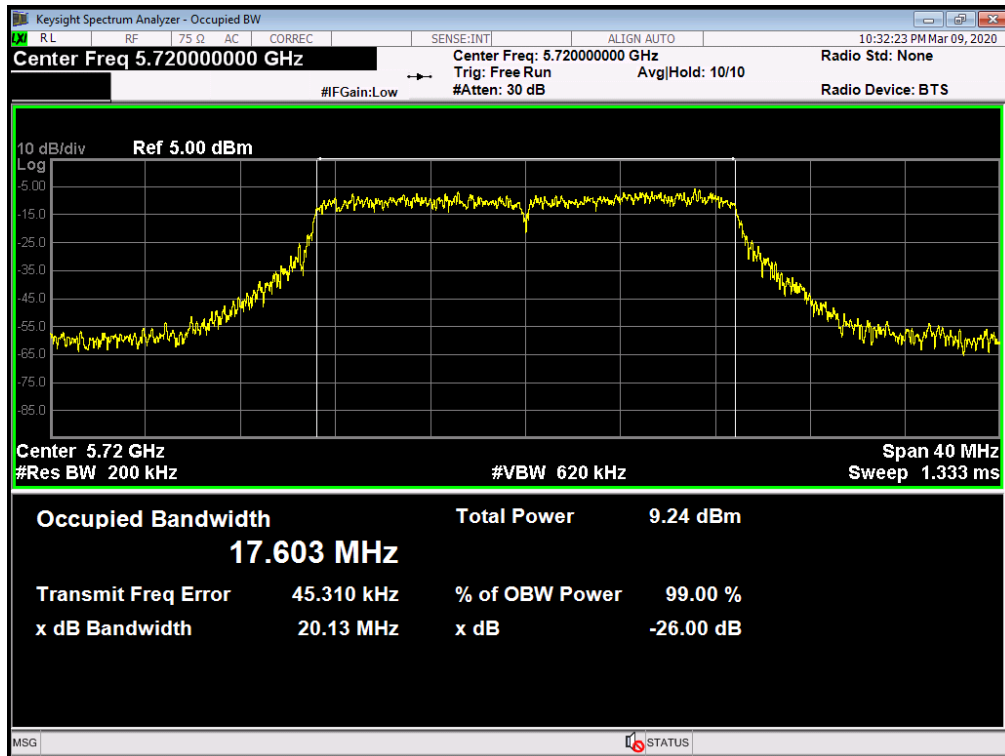


Temperature:	25 °C	Relative Humidity:	55%	
Test Voltage:	AC 120V/60Hz			
Test Mode:	TX 802.11n(HT20) Mode (U-NII-2C) Antenna A			
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
144	5720	15.67	----	13.853
		----	3.894	4.1224

802.11n(HT20) Mode

Antenna A---5720 MHz Straddle 5.47-5.725GHz

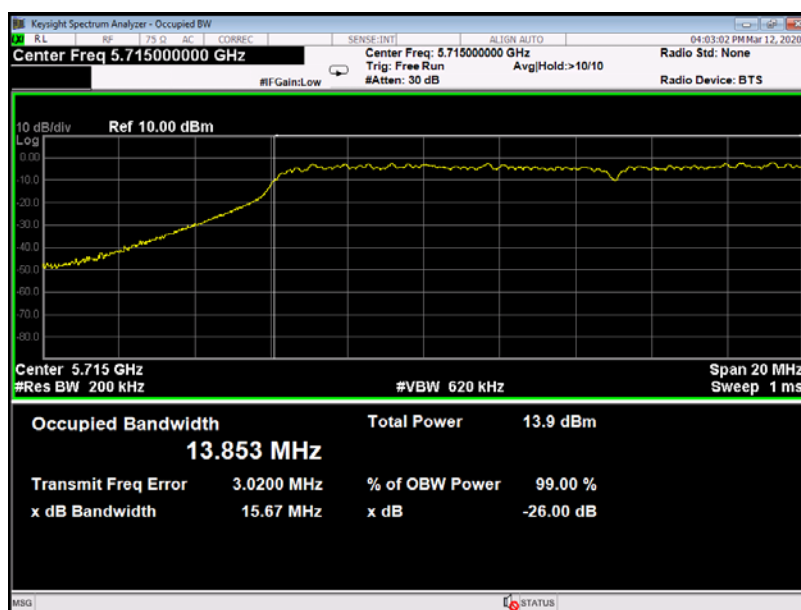


Antenna A---5720 MHz Straddle 5.725-5.85GHz

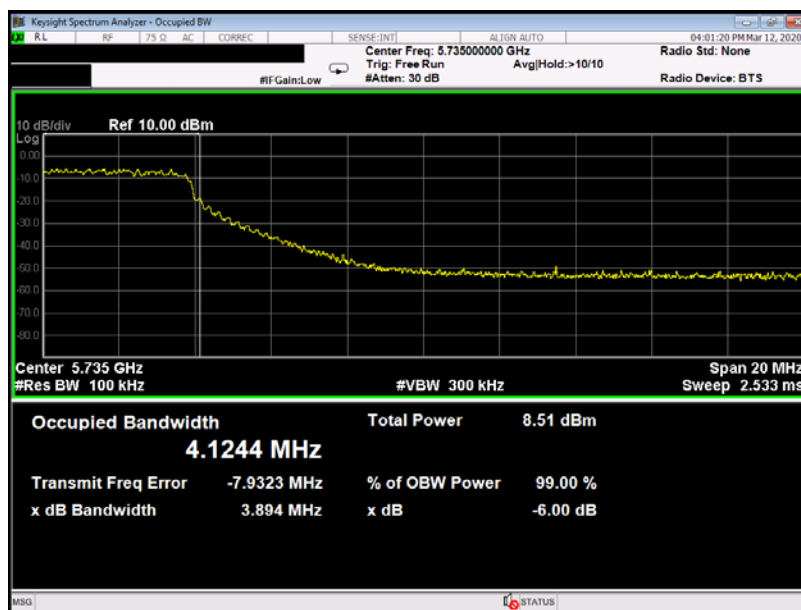


Temperature:	25 °C	Relative Humidity:	55%	
Test Voltage:	AC 120V/60Hz			
Test Mode:	TX 802.11n(HT20) Mode (U-NII-2C) Antenna B			
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
144	5720	15.61	----	13.844
		----	3.894	4.1052


802.11n(HT20) Mode

Antenna B---5720 MHz Straddle 5.47-5.725GHz

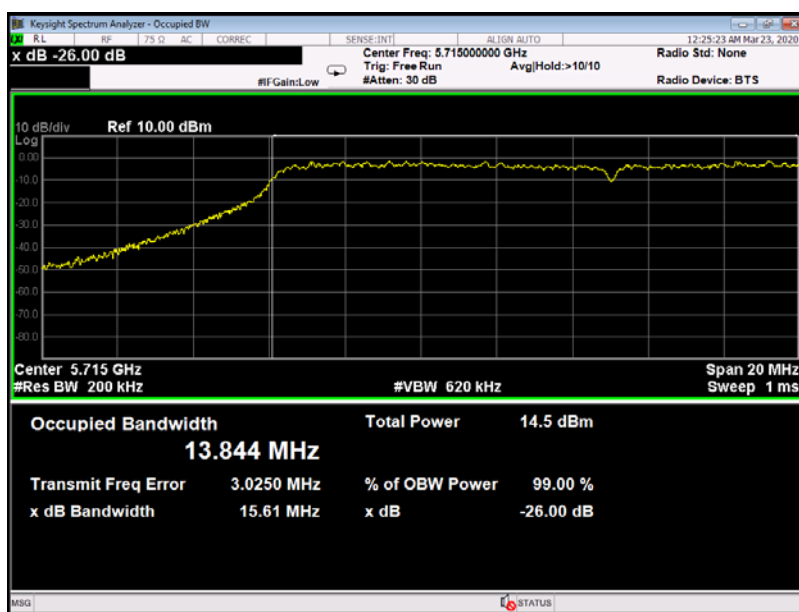


Antenna B---5720 MHz Straddle 5.725-5.85GHz

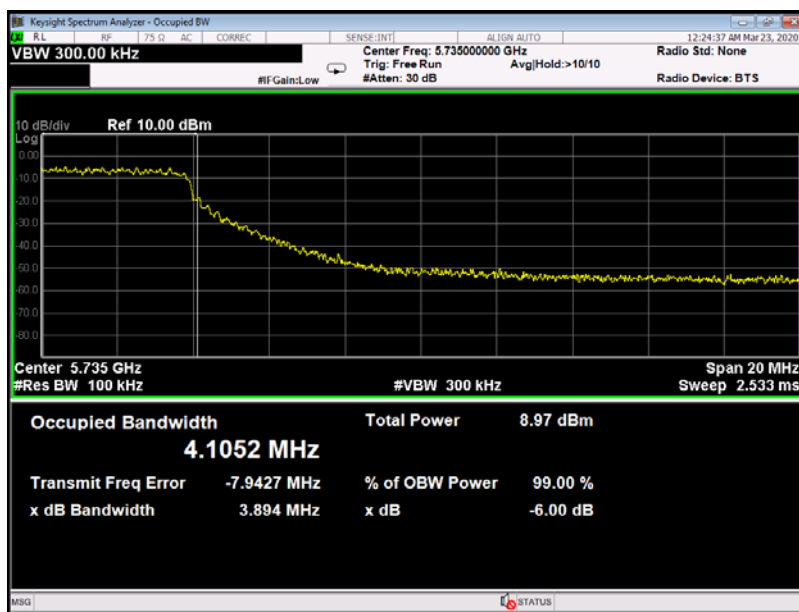

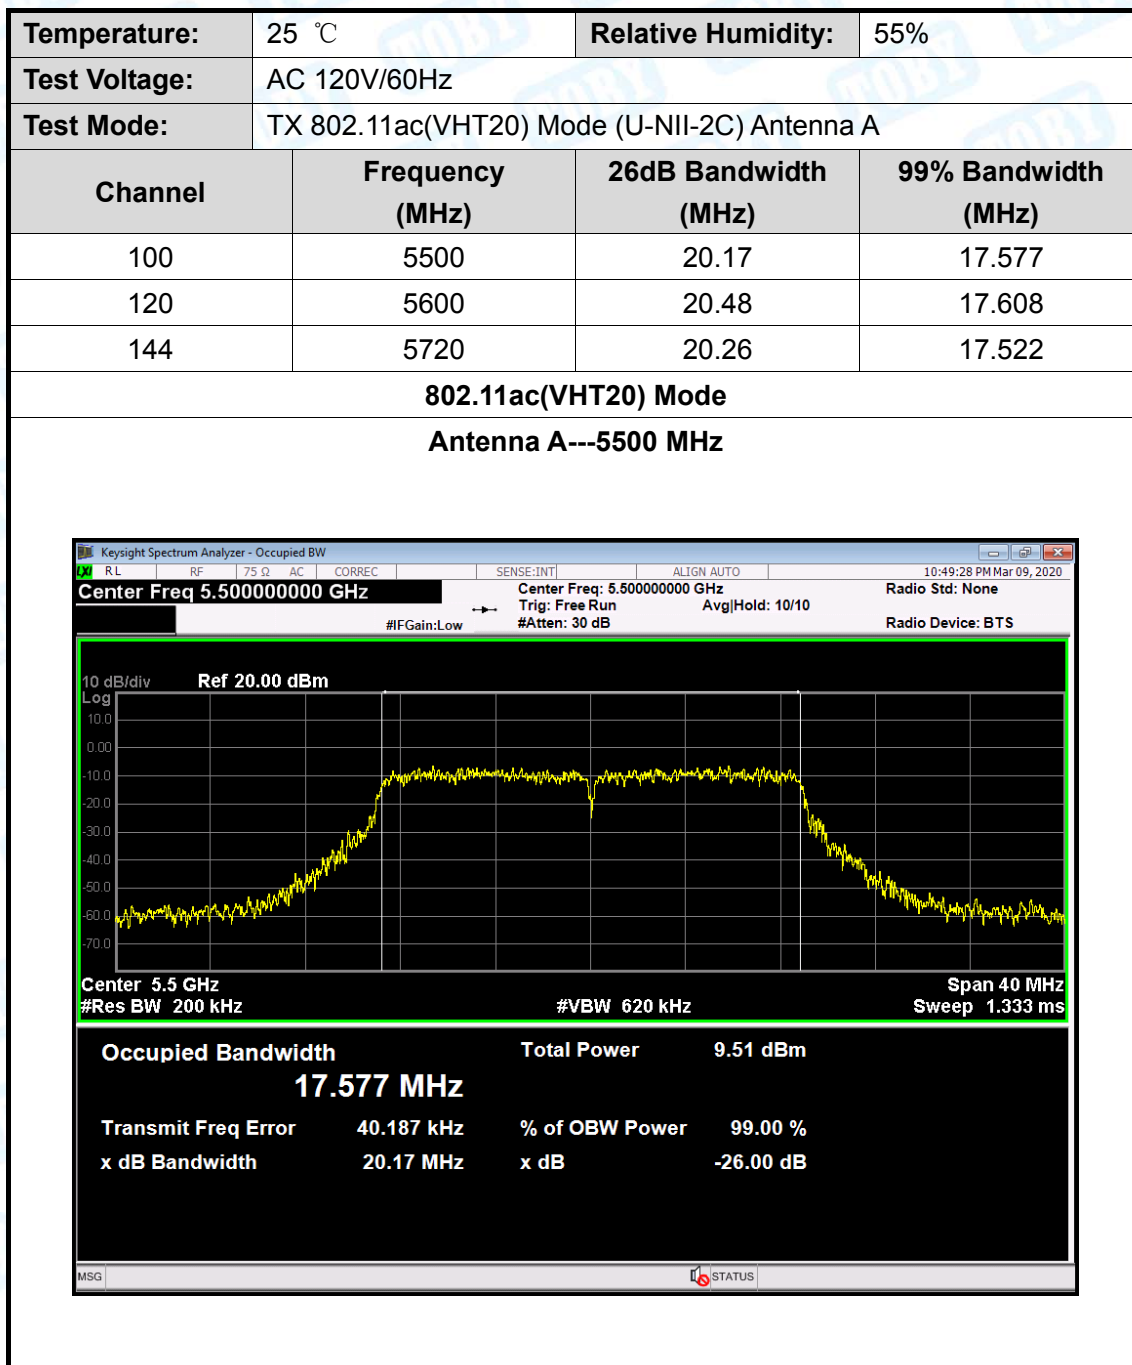

802.11ac(VHT20) Mode

Antenna A---5600 MHz

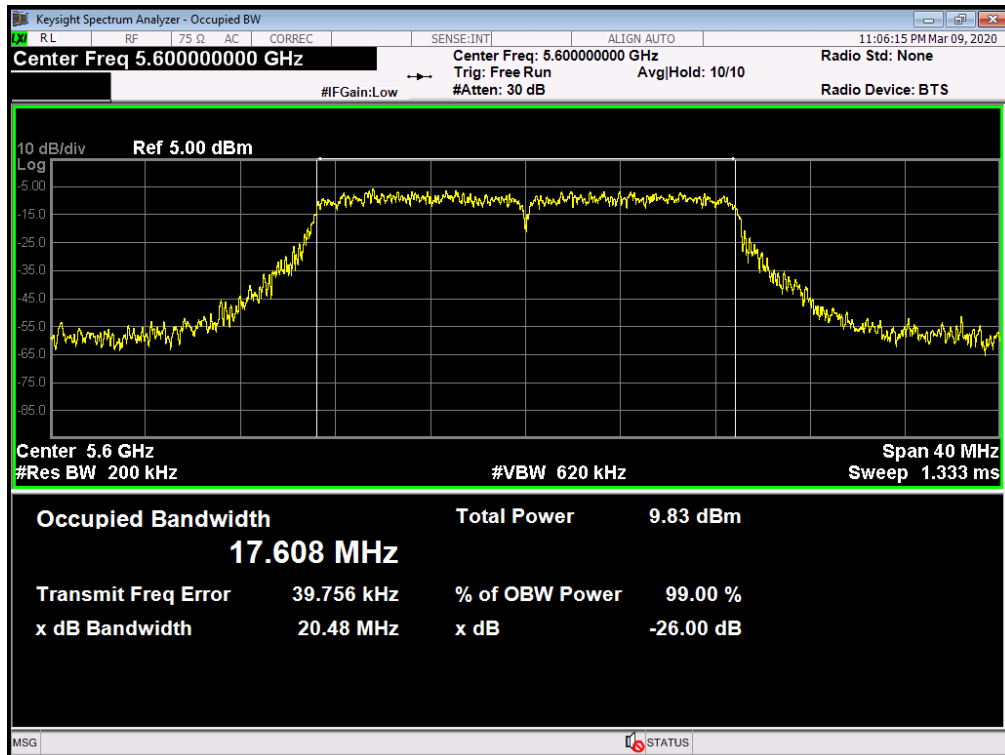

802.11ac(VHT20) Mode

Antenna A---5720 MHz

