

Report No.: 9900139


Mode = TX

Tested By: Hong, Report No.: 9900139

Scan Settings (J Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
450k	30M	5k	10k	PK	20ms	AUTO	LN OFF	60dB

Final Measurement: X QP		Transducer No.	Start	Stop	Name
Meas Time:	1 s	3	9k	30M	EI078
Subranges:	16				
Acc Margin:	20dB				

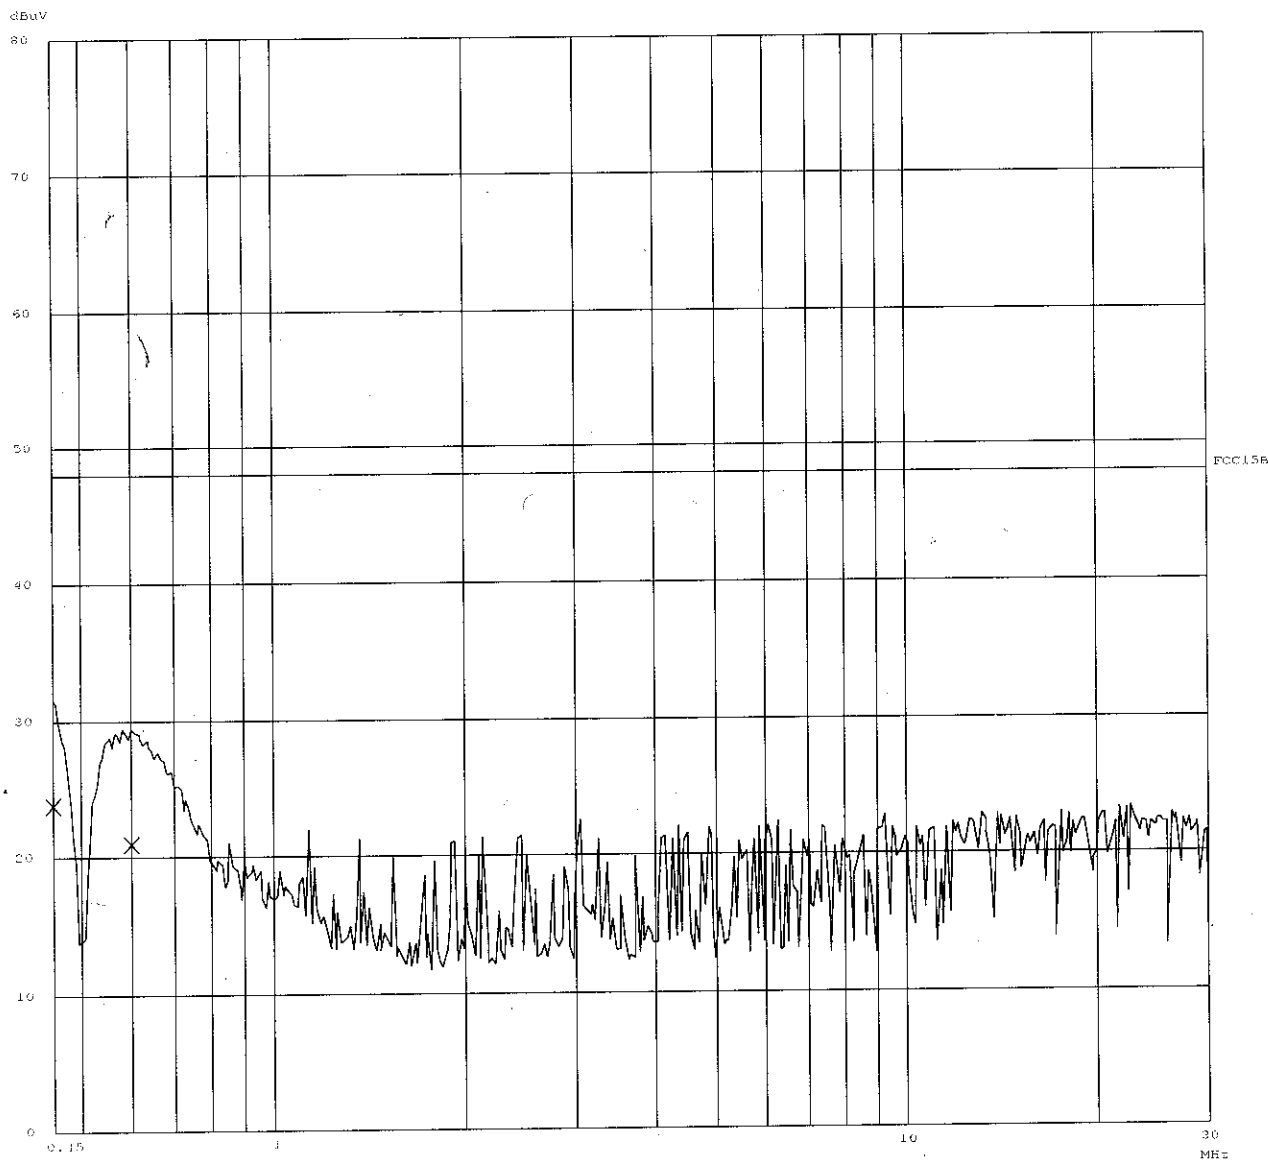

Ctrl. No.: N/A

Mode = TX

Report No.: 9900139

Tested By: Hong, Report No.: 9900139

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
450k	30M	5k	10k	PK	20ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency MHz	QP Level dBuV	QP Limit dBuV
0.45000	23.7	48.0
0.60000	20.9	48.0

* limit exceeded

Ctrl. No.: N/A

Mode = Stand by

Report No.: 9900139


Tested By: Hong, Report No.: 9900139

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamplifier
450k	30M	5k	10k	PK	20ms	AUTO	LN OFF 60dB

Transducer No.	Start	Stop	Name
3	9k	30M	EI078

Final Measurement: X QF
 Meas Time: 1 s
 Subranges: 16
 Acc Margin: 20dB

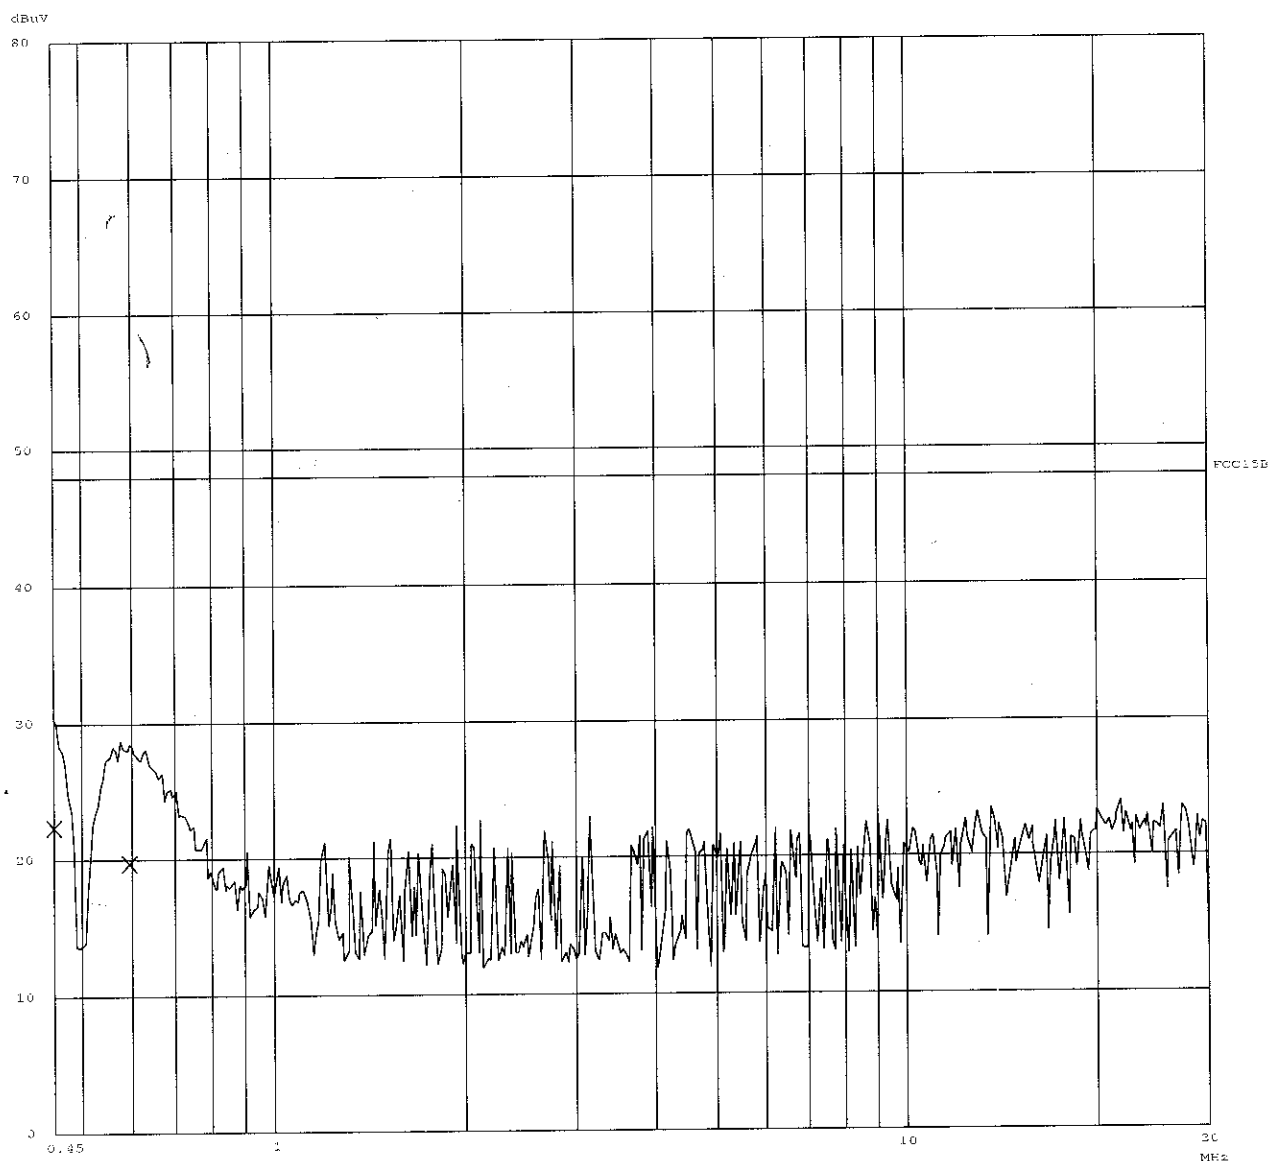

Ctrl. No.: N/A

ITS Intertek Testing Services

ETL Testing Laboratories

Mode = Stand by

Report No.: 9900139

Tested By: Hong, Report No.: 9900139

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
450k	30M	5k	10k	PK	20ms	AUTO	LN	OFF 60dB

Final Measurement Results:

Frequency MHz	QP Level dBuV	QP Limit dBuV
0.45000	22.3	48.0
0.59500	19.7	48.0

* limit exceeded

Ctrl. No.: N/A

Mode = Charging


Report No.: 9900139

Tested By: Hong, Report No.: 9900139

Scan Settings (1 Range)

Frequencies				Receiver Settings			
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
450k	30M	5k	10k	PK	20ms	AUTO	LN OFF

Final Measurement: X QP		Transducer No.	Start	Stop	Name
Meas Time:	1 s	3	9k	30M	EI078
Subranges:	16				
Acc Margin:	20dB				

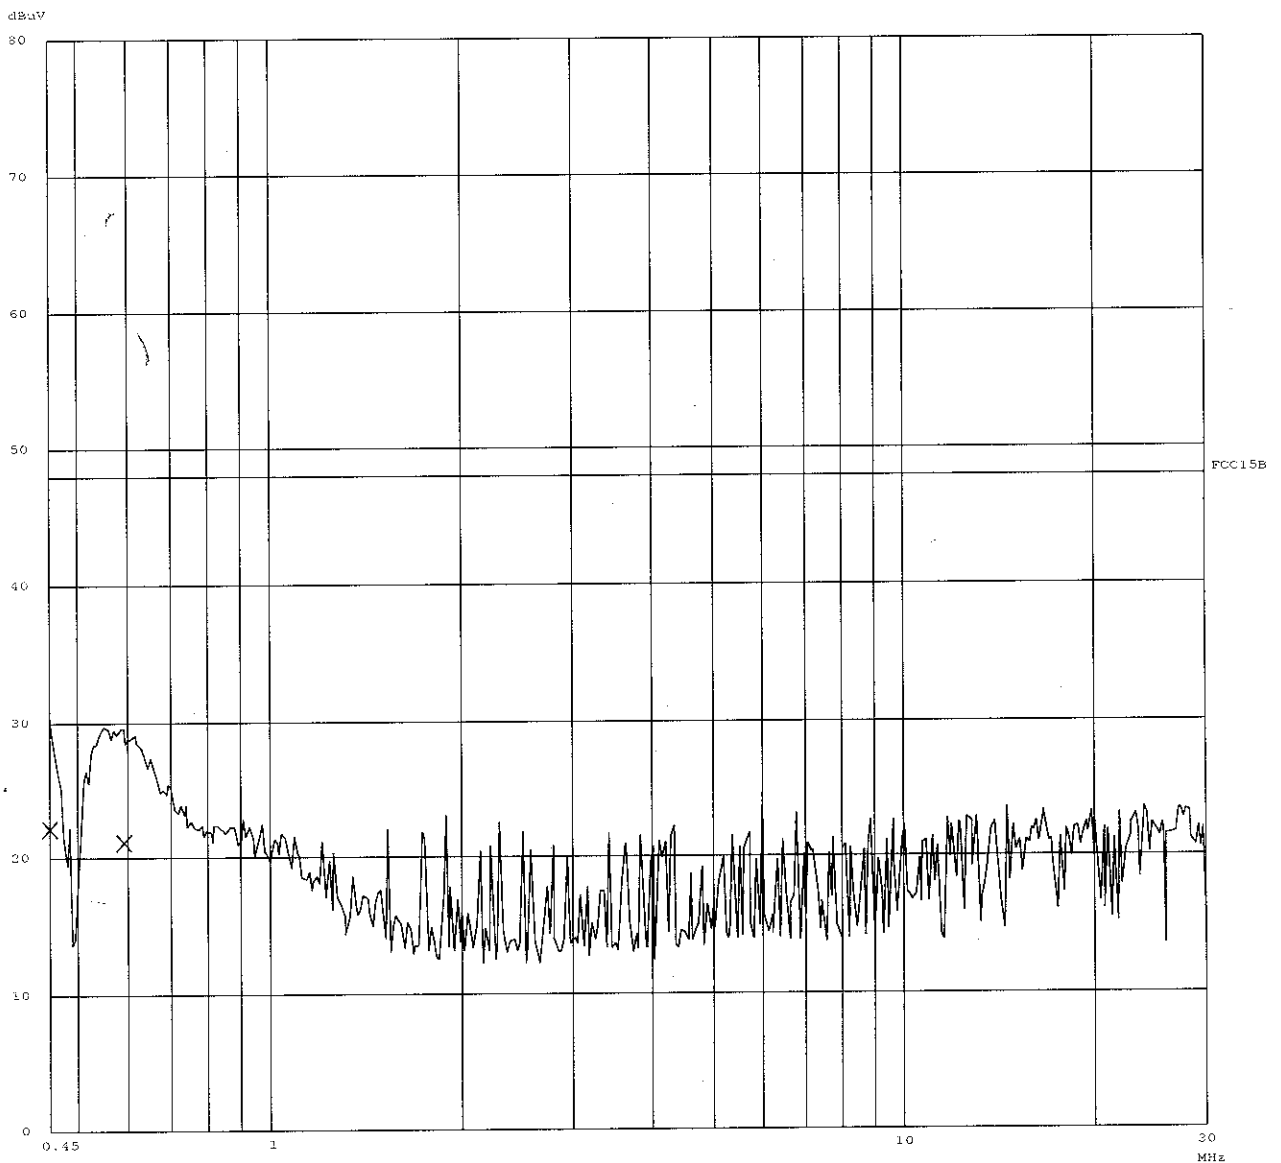

Ctrl. No.: N/A

Mode = Charging

Report No.: 9900139

Tested By: Hong, Report No.: 9900139

Scan Settings (1 Range)

Frequencies			Receiver Settings						
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge	
450k	30M	5k	10k	PK	20ms	AUTO	LN OFF	60dB	

Final Measurement Results:

Frequency MHz	QP Level dBuV	QP Limit dBuV
0.45000	22.1	48.0
0.59000	21.1	48.0

* limit exceeded

Ctrl. No.: NA