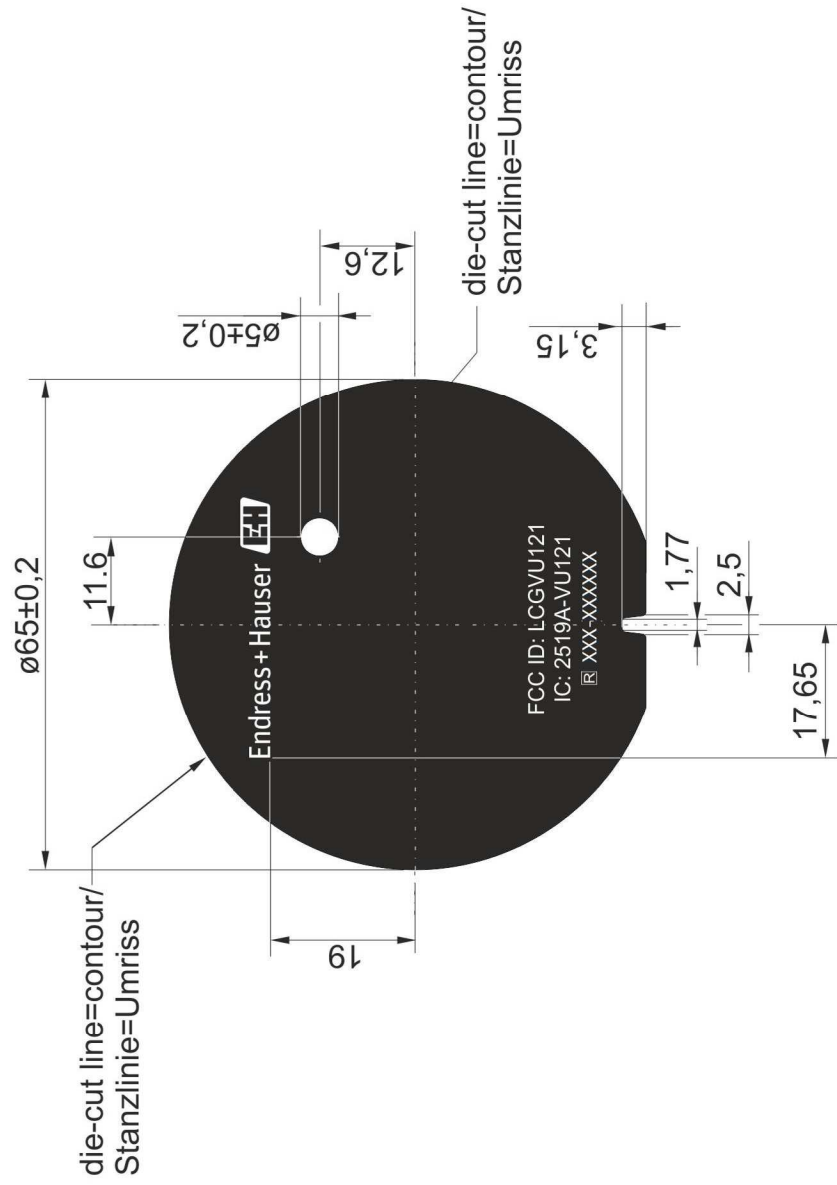




Material:

Polyimid or Polyester foil, white mat,
self-adhesive at ambient temperature -40°C...+100°C/
Polyimid oder Polyester Folie, weiss matt,
selbstklebend bei Umgebungstemperatur -40°C...+100°C

printing/Beschriftung:

anthracite gray, mat/anthrazit grau, matt RAL7016
lettering negativ (white)/Schrift negativ (weiss)
wiping resistant according to/wischfest nach
DIN EN 61010-1, paragraph/Abschnitt 5.3



Layout:

250003755 / 71407674(CoreIDRAW X7)

execution/Ausführung:

tape reel, label outside/ auf Rolle, Schild aussen

The current versions are valid/
Es gelten die aktuell gültigen Versionen

 Endress+Hauser D-79689 Maulburg Germany Endress+Hauser SE+Co. KG	Refer to protection notice ISO 16016 Classification internal			Scale 1:1	Tolerance ±0.2
	label BTM ”Logo/FCC ID“ Schild BTM “Logo/FCC ID“			Title	Designed 05.06.2018 ScheffsA
				0	Drawing chng. 06.07.2018 RingatJ
				Number of changes - 	Welding contr. - Approval contr. -
				Status In Work	Pressure contr. - Released 16.08.2018 ScheffsA
		No. of document 211009649	Version A		Doc. part 000
			Weight 211009649		Volume cm³
Material see above / -		SAP material no. 71407642		Format DIN A4	Sheet 1/1