



RADIO TEST REPORT

FCC ID : LDK-RUSS9105AXI
Equipment : Catalyst 9105AX 802.11ax Access Point
Brand Name : Cisco
Model Name : C9105AXI-B, C9105AXI-C, C9105AXI-D, C9105AXI-F,
C9105AXI-N, C9105AXI-S, C9105AXI-K, C9105AXI-x
(Refer to section 1.1.5 for more details)
Applicant : Cisco Systems, Inc.
125 West Tasman Drive, San Jose, California, United
States, 95134-1706
Manufacturer : Cisco Systems, Inc.
125 West Tasman Drive, San Jose, California, United
States, 95134-1706
Standard : 47 CFR FCC Part 15.247

The product was received on Apr. 20, 2020, and testing was started from May 28, 2020 and completed on Jul. 08, 2022. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.



Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	9
1.3 Testing Location Information	9
1.4 Measurement Uncertainty	10
2 Test Configuration of EUT	11
2.1 Test Channel Mode	11
2.2 The Worst Case Measurement Configuration.....	12
2.3 EUT Operation during Test	14
2.4 Accessories	14
2.5 Support Equipment.....	14
2.6 Test Setup Diagram	15
3 Transmitter Test Result	18
3.1 AC Power-line Conducted Emissions	18
3.2 DTS Bandwidth.....	20
3.3 Maximum Conducted Output Power	21
3.4 Power Spectral Density	24
3.5 Emissions in Non-restricted Frequency Bands	26
3.6 Emissions in Restricted Frequency Bands.....	27
4 Test Equipment and Calibration Data	32
Appendix A. Test Results of AC Power-line Conducted Emissions	
Appendix B. Test Results of DTS Bandwidth	
Appendix C. Test Results of Maximum Conducted Output Power	
Appendix D. Test Results of Power Spectral Density	
Appendix E. Test Results of Emissions in Non-restricted Frequency Bands	
Appendix F. Test Results of Emissions in Restricted Frequency Bands	
Appendix G. Test Photos	
Photographs of EUT v01	



TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A10_6 Ver1.3



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.247(a)	DTS Bandwidth	PASS	-
3.3	15.247(b)	Maximum Conducted Output Power	PASS	-
3.4	15.247(e)	Power Spectral Density	PASS	-
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	PASS	-
3.6	15.247(d)	Emissions in Restricted Frequency Bands	PASS	-

Note: Reference to Sporton Project No.: FR992016-02

Declaration of Conformity:

1. The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers. It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
2. The measurement uncertainty please refer to report "Measurement Uncertainty".

Comments and Explanations:

1. The test configuration, test mode and test software were written in this test report are declared by the manufacturer.
2. The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Sam Chen**Report Producer: Vicky Huang**



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number
2400-2483.5	LE	2402-2480	0-39 [40]

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	BT-LE(1Mbps)	1	1TX
2.4-2.4835GHz	BT-LE(500Kb/s)	1	1TX
2.4-2.4835GHz	BT-LE(125Kb/s)	1	1TX
2.4-2.4835GHz	BT-LE(2Mbps)	2	1TX

Note:

- ♦ Bluetooth LE uses a GFSK modulation.
- ♦ BWch is the nominal channel bandwidth.

1.1.2 Antenna Information

Ant.	Port	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	1	PEGATRON	WIFI_1 ANT	IFA (Inverted-F antenna)	I-PEX	Note 1
2	2	PEGATRON	WIFI_2 ANT	IFA (Inverted-F antenna)	I-PEX	
3	1	PEGATRON	BLE ANT	IFA (Inverted-F antenna)	I-PEX	

Note 1:

Ant.	Port	Gain (dBi)										
		WLAN 2.4GHz			WLAN 5GHz					Bluetooth		
		2400 MHz	2450 MHz	2500 MHz	5150 MHz	5300 MHz	5500 MHz	5700 MHz	5850 MHz	2400 MHz	2450 MHz	2500 MHz
1	1	3.03	3.43	3.02	4.28	4.48	4.63	4.89	4.52	-	-	-
2	2	2.92	3.41	3.11	4.68	4.52	4.49	4.66	4.72	-	-	-
3	1	-	-	-	-	-	-	-	-	2.08	2.30	2.18

Note 2: The above information was declared by manufacturer.

Note 3: Directional gain information

Type	Maximum Output Power	Power Spectral Density
Non-BF	Directional gain = Max.gain + array gain. For power measurements on IEEE 802.11 devices Array Gain = 0 dB (i.e., no array gain) for N ANT ≤ 4	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left[\sum_{k=1}^{N_{SS}} g_{j,k} \right]^2}{N_{ANT}} \right]$
BF	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left[\sum_{k=1}^{N_{SS}} g_{j,k} \right]^2}{N_{ANT}} \right]$	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left[\sum_{k=1}^{N_{SS}} g_{j,k} \right]^2}{N_{ANT}} \right]$

Ex.

Directional Gain (NSS1) formula :

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left[\sum_{k=1}^{N_{SS}} g_{j,k} \right]^2}{N_{ANT}} \right]$$

$$NSS1(g1,1) = 10^{G1/20} ; NSS1(g1,2) = 10^{G2/20} ;$$

$$g_{j,k} = (NSS1(g1,1) + NSS1(g1,2))$$

$$DG = 10 \log[(NSS1(g1,1) + NSS1(g1,2) / N_{ANT}] \Rightarrow 10 \log[(10^{G1/20} + 10^{G2/20})^2 / N_{ANT}]$$

Where ;

$$G1 = 10 ; G2 = 10 ; G3 = 10 ; G4 = 10 ;$$

**2.4G**

2412MHz G1 = 3.03dBi ; G2 = 2.92 dBi ;2T1S DG=5.99 dBi 2T2S DG=2.98 dBi

2437MHz G1 = 3.43dBi ; G2 = 3.41 dBi ; 2T1S DG=6.43 dBi 2T2S DG=3.42 dBi

2462MHz G1 = 3.43dBi ; G2 = 3.41 dBi ; 2T1S DG=6.43 dBi 2T2S DG=3.42 dBi

5G

5180MHz G1 = 4.28dBi ; G2 = 4.68 dBi ;2T1S DG=7.49 dBi 2T2S DG=4.48 dBi

5200MHz G1 = 4.28dBi ; G2 = 4.68 dBi ;2T1S DG=7.49 dBi 2T2S DG=4.48 dBi

5240MHz G1 = 4.48dBi ; G2 = 4.52 dBi ;2T1S DG=7.51 dBi 2T2S DG=4.5 dBi

5260MHz G1 = 4.48dBi ; G2 = 4.52 dBi ;2T1S DG=7.51 dBi 2T2S DG=4.5 dBi

5300MHz G1 = 4.48dBi ; G2 = 4.52 dBi ;2T1S DG=7.51 dBi 2T2S DG=4.5 dBi

5320MHz G1 = 4.48dBi ; G2 = 4.52 dBi ;2T1S DG=7.51 dBi 2T2S DG=4.5 dBi

5500MHz G1 = 4.63dBi ; G2 = 4.49 dBi ;2T1S DG=7.57 dBi 2T2S DG=4.56 dBi

5580MHz G1 = 4.63dBi ; G2 = 4.49 dBi ;2T1S DG=7.57 dBi 2T2S DG=4.56 dBi

5700MHz G1 = 4.89dBi ; G2 = 4.66 dBi ;2T1S DG=7.79 dBi 2T2S DG=4.78 dBi

5720MHz G1 = 4.89dBi ; G2 = 4.66 dBi ;2T1S DG=7.79 dBi 2T2S DG=4.78 dBi

5745MHz G1 = 4.89dBi ; G2 = 4.66 dBi ;2T1S DG=7.79 dBi 2T2S DG=4.78 dBi

5785MHz G1 = 4.52dBi ; G2 = 4.72 dBi ;2T1S DG=7.63 dBi 2T2S DG=4.62 dBi

5825MHz G1 = 4.52dBi ; G2 = 4.72 dBi ;2T1S DG=7.63 dBi 2T2S DG=4.62 dBi

5190MHz G1 = 4.28dBi ; G2 = 4.68 dBi ;2T1S DG=7.49 dBi 2T2S DG=4.48 dBi

5230MHz G1 = 4.48dBi ; G2 = 4.52 dBi ;2T1S DG=7.51 dBi 2T2S DG=4.5 dBi

5270MHz G1 = 4.48dBi ; G2 = 4.52 dBi ;2T1S DG=7.51 dBi 2T2S DG=4.5 dBi

5310MHz G1 = 4.48dBi ; G2 = 4.52 dBi ;2T1S DG=7.51 dBi 2T2S DG=4.5 dBi

5510MHz G1 = 4.63dBi ; G2 = 4.49 dBi ;2T1S DG=7.57 dBi 2T2S DG=4.56 dBi

5550MHz G1 = 4.63dBi ; G2 = 4.49 dBi ;2T1S DG=7.57 dBi 2T2S DG=4.56 dBi

5670MHz G1 = 4.89dBi ; G2 = 4.66 dBi ;2T1S DG=7.79 dBi 2T2S DG=4.78 dBi

5710MHz G1 = 4.89dBi ; G2 = 4.66 dBi ;2T1S DG=7.79 dBi 2T2S DG=4.78 dBi

5755MHz G1 = 4.89dBi ; G2 = 4.66 dBi ;2T1S DG=7.79 dBi 2T2S DG=4.78 dBi

5795MHz G1 = 4.52dBi ; G2 = 4.72 dBi ;2T1S DG=7.63 dBi 2T2S DG=4.62 dBi

5210MHz G1 = 4.28dBi ; G2 = 4.68 dBi ;2T1S DG=7.49 dBi 2T2S DG=4.48 dBi

5290MHz G1 = 4.48dBi ; G2 = 4.52 dBi ;2T1S DG=7.51 dBi 2T2S DG=4.5 dBi

5530MHz G1 = 4.63dBi ; G2 = 4.49 dBi ;2T1S DG=7.57 dBi 2T2S DG=4.56 dBi

5610MHz G1 = 4.89dBi ; G2 = 4.66 dBi ;2T1S DG=7.79 dBi 2T2S DG=4.78 dBi

5690MHz G1 = 4.89dBi ; G2 = 4.66 dBi ;2T1S DG=7.79 dBi 2T2S DG=4.78 dBi

5775MHz G1 = 4.89dBi ; G2 = 4.66 dBi ;2T1S DG=7.79 dBi 2T2S DG=4.78 dBi

Note 4:**For 2.4GHz function:****For IEEE 802.11 b/g/n/ax (1TX/1RX):**

Only Port 1 can be used as transmitting/receiving antenna.

For IEEE 802.11 b/g/n/ax (2TX/2RX):

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For 5GHz function:**For IEEE 802.11a/n/ac/ax (1TX/1RX):**

Only Port 1 can be used as transmitting/receiving antenna.

**For IEEE 802.11a/n/ac/ax (2TX/2RX):**

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For Bluetooth function:

Only Port 1 can be used as transmitting/receiving antenna.

1.1.3 Mode Test Duty Cycle

Mode	DC	DCF(dB)	T(s)	VBW(Hz) $\geq 1/T$
BT-LE(1Mbps)	0.868	0.61	2.17m	1k
BT-LE(2Mbps)	0.619	2.08	1.114m	1k

Note:

- ♦ DC is Duty Cycle.
- ♦ DCF is Duty Cycle Factor.

1.1.4 EUT Operational Condition

EUT Power Type	From PoE		
Test Software Version	TeraTerm V4.75		
Support Mode	☒	LE 1M PHY: 1 Mb/s	
	☒	LE Coded PHY (S=2): 500 Kb/s	
	☒	LE Coded PHY (S=8): 125 Kb/s	
	☒	LE 2M PHY: 2 Mb/s	

Note: The above information was declared by manufacturer.

1.1.5 Table for Multiple Listing

The equipment names/model names in the following table are all refer to the identical product.

Equipment Name	Model Name	Description
Catalyst 9105AX 802.11ax Access Point	C9105AXI-B	All the models are identical, the difference equipment names/model names for difference marketing strategy.
	C9105AXI-C	
	C9105AXI-D	
	C9105AXI-F	
	C9105AXI-N	
	C9105AXI-S	
	C9105AXI-K	
	C9105AXI-x (x can be A-Z, regional country code)	

Note 1: From the above models, model: C9105AXI-B was selected as representative model for the test and its data was recorded in this report.

Note 2: The above information was declared by manufacturer.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15.247
- ♦ ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 558074 D01 v05r02
- ♦ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu (TAF: 3787)	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.) TEL: 886-3-656-9065 FAX: 886-3-656-9085 Test site Designation No. TW3787 with FCC. Conformity Assessment Body Identifier (CABID) TW3787 with ISED.

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted	TH03-CB	Owen Hsu	24.5-24.8 / 66-69	Jun. 23, 2022
Radiated (Cabinet-Above 1GHz)	03CH03-CB	Gino Huang	23.8-24.9 / 55-58	Jun. 22, 2022~ Jul. 08, 2022
Radiated (Below 1GHz)	03CH05-CB	Gino Huang	24.2-26.1 / 55-58	Jun. 22, 2022~ Jul. 08, 2022
AC Conduction (Mode 1~2)	CO02-CB	GN Hou	22~24 / 65~68	May 28, 2020
AC Conduction (Mode 3)	CO02-CB	Dean Chang	22~23 / 53~54	Jul. 07, 2022

Note:

The tested sample of the test item (All test items except AC power-line conducted emissions-Mode 1~2) was received on Jun. 13, 2022.



1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

For AC Conduction (Mode 1~2)

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.0 dB	Confidence levels of 95%

For others test:

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.4 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	3.4 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	5.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	5.2 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.7 dB	Confidence levels of 95%
Conducted Emission	3.2 dB	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Mode	Power Setting
BT-LE(1Mbps)	-
2402MHz	5
2440MHz	5
2480MHz	5
BT-LE(2Mbps)	-
2402MHz	5
2440MHz	5
2480MHz	5



2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral
Operating Mode	CTX
1	EUT_2.4GHz + PoE
2	EUT_5GHz + PoE
3	EUT_Bluetooth LE + PoE
For operating mode 2 is the worst case and it was record in this test report.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands
Test Condition	Conducted measurement at transmit chains



The Worst Case Mode for Following Conformance Tests	
Tests Item	Emissions in Restricted Frequency Bands
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	CTX
	The EUT was performed at X axis, Y axis and Z axis position for Emissions in Restricted Frequency Bands above 1GHz. The worst case was found at Z axis in 2.4GHz, at X axis in 5GHz and at Y axis in Bluetooth LE, thus the measurement will follow this same test configuration.
1	EUT in Y axis_Bluetooth LE + PoE
2	EUT in Z axis_2.4GHz + PoE
3	EUT in X axis_5GHz + PoE
For operating mode 1 is the worst case and it was record in this test report.	
Operating Mode > 1GHz	CTX (Cabinet)
	The EUT was performed at X axis, Y axis and Z axis position. The worst case was found at Y axis, thus the measurement will follow this same test configuration.
1	EUT in Y axis_Bluetooth LE

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	WLAN 2.4GHz + WLAN 5GHz + Bluetooth LE
Refer to Sporton Test Report No.: FA992016-11 for Co-location RF Exposure Evaluation.	

Note: It was supplied power by PoE for EUT, and the PoE is for measurement only, would not be marketed.

Equipment	Brand Name	Model Name	FCC ID
PoE	PHIHONG	POE29U-1AT(PL)	N/A



2.3 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

2.4 Accessories

Accessories				
No.	Equipment Name	Brand Name	Model Name	Remark
1	Mounting bracket*1	Cisco	AIR-AP-BRACKET-8	-

2.5 Support Equipment

For AC Conduction and Radiated (below 1GHz):


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PoE	PHIHONG	POE29U-1AT(PL)	N/A

For Radiated(Cabinet-Above 1GHz) and RF Conducted:


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A
B	PoE	PHIHONG	POE29U-1AT(PL)	N/A

2.6 Test Setup Diagram


Test Setup Diagram – AC Line Conducted Emission Test

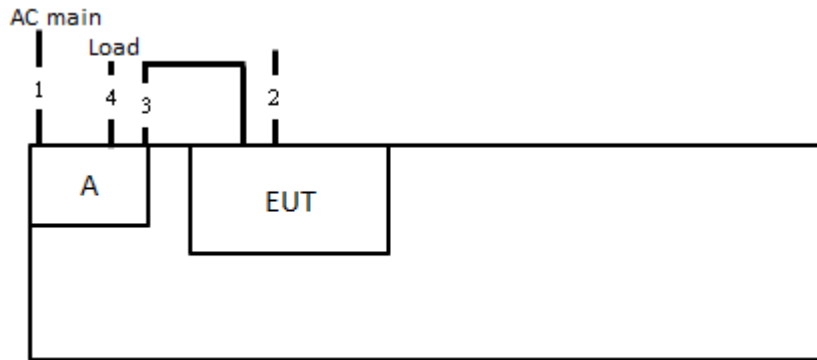

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RS232 to RJ-45 console cable	No	1.9m
3	RJ-45 cable	No	1.5m
4	RJ-45 cable	No	1.5m

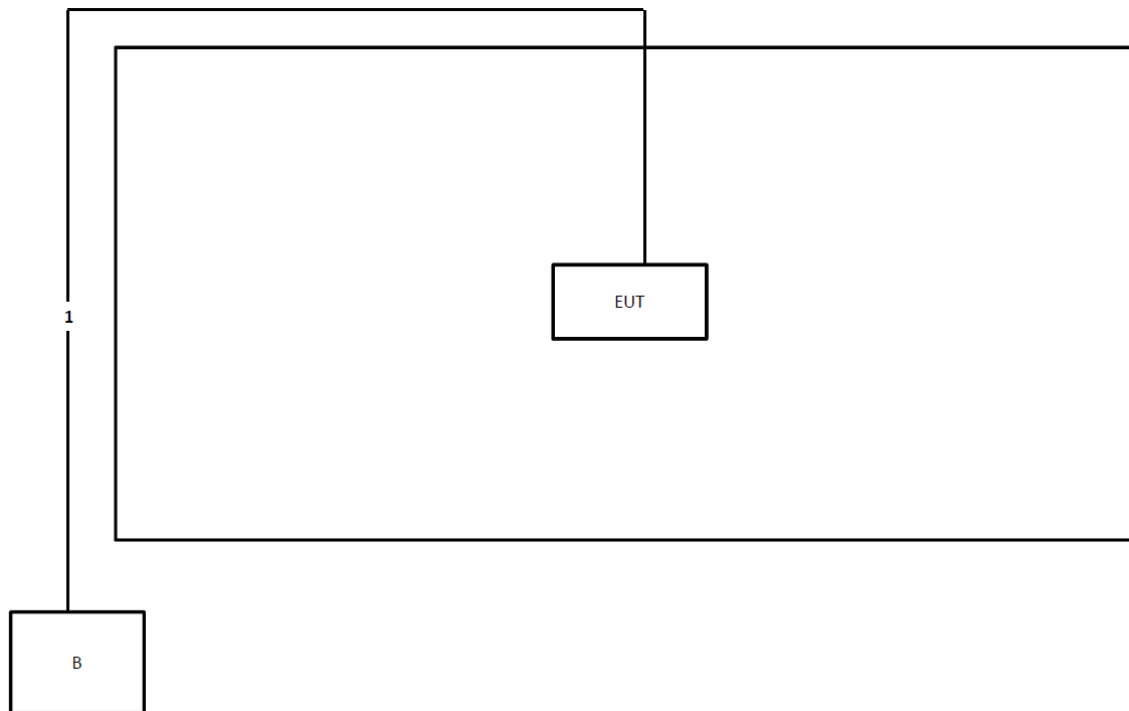Test Setup Diagram - Radiated Test < 1GHz


Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m

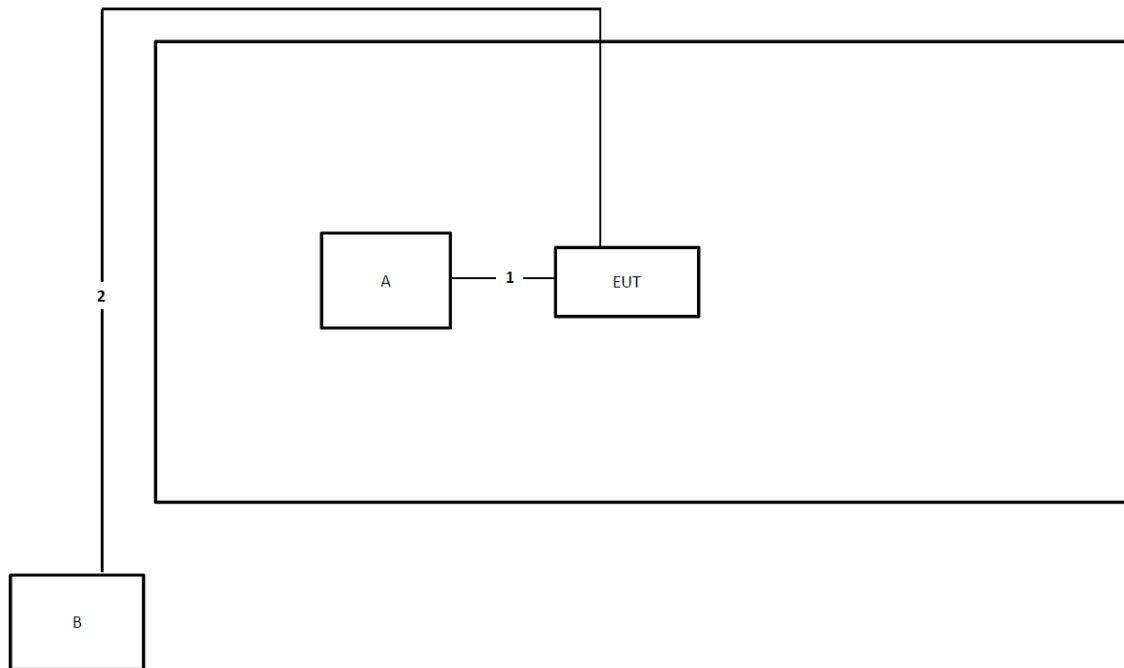Test Setup Diagram - Radiated Test > 1GHz


Item	Connection	Shielded	Length
1	RS232 to RJ-45 console cable	No	3.2m
2	RJ-45 cable	No	10m



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50
Note 1: * Decreases with the logarithm of the frequency.		


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
▪ Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

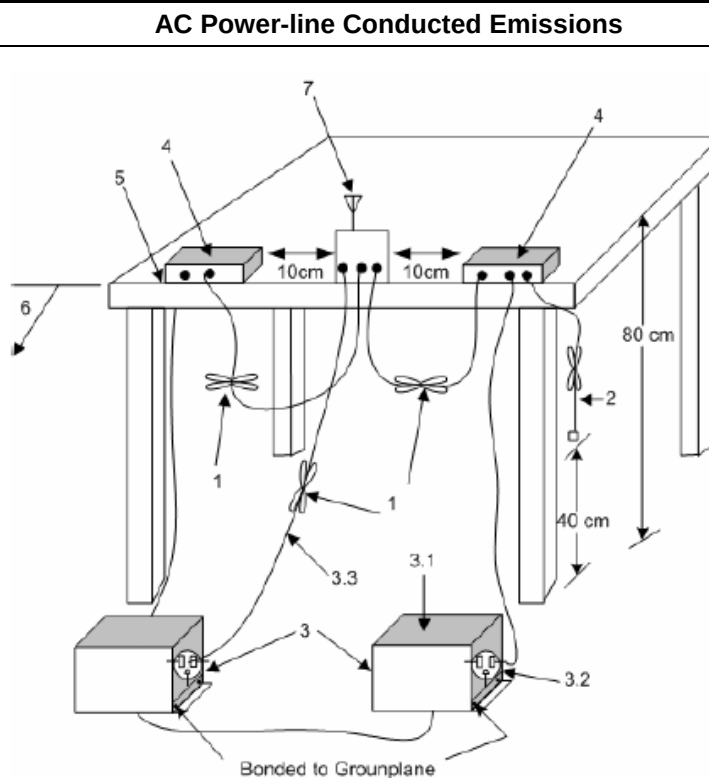

1—Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long.

2—The I/O cables that are not connected to an accessory shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

3—EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω loads. LISN may be placed on top of, or immediately beneath, reference ground plane.

3.1—All other equipment powered from additional LISN(s).

3.2—A multiple-outlet strip may be used for multiple power cords of non-EUT equipment.

3.3—LISN at least 80 cm from nearest part of EUT chassis.

4—Non-EUT components of EUT system being tested.

5—Rear of EUT, including peripherals, shall all be aligned and flush with edge of tabletop.

6—Edge of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

7—Antenna can be integral or detachable. If detachable, then the antenna shall be attached for this test.

3.1.5 Measurement Results Calculation

The measured Level is calculated using:

- a. Corrected Reading: LISN Factor (LISN) + Attenuator (AT/AUX) + Cable Loss (CL) + Read Level (Raw) = Level
- b. Margin = -Limit + Level

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 DTS Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit
Systems using digital modulation techniques:
6 dB bandwidth $\geq$ 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method
For the emission bandwidth shall be measured using one of the options below:
☒ Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.1 Option 1 for 6 dB bandwidth measurement.
☐ Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.2 Option 2 for 6 dB bandwidth measurement.
☐ Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.

3.2.4 Test Setup

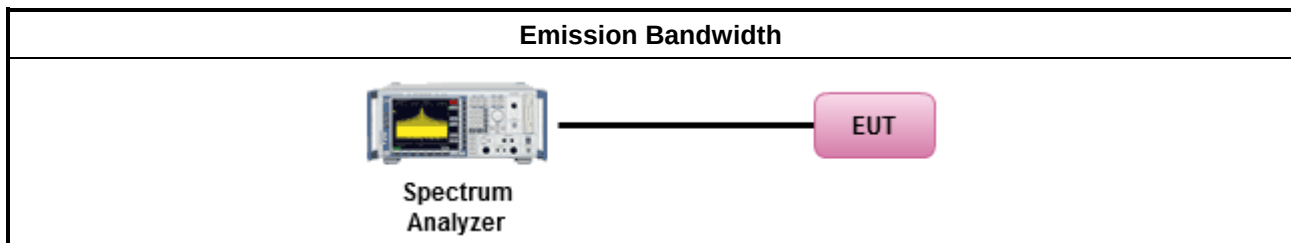

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit						
	▪ If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)					
	▪ If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm					
	▪ Smart antenna system (SAS):					
	<table> <tr> <td>-</td><td>Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm</td></tr> <tr> <td>-</td><td>Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm</td></tr> <tr> <td>-</td><td>Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm</td></tr> </table>	-	Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm	-	Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm	-
-	Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm					
-	Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm					
-	Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm					
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.						


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
Maximum Peak Conducted Output Power	
☐	Refer as FCC KDB 558074, clause 8.3.1.1 & C63.10 clause 11.9.1.1 (RBW ≥ EBW method).
☐	Refer as FCC KDB 558074, clause 8.3.1.3 & C63.10 clause 11.9.1.3 (peak power meter).
Maximum Conducted Output Power	
[duty cycle ≥ 98% or external video / power trigger]	
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.2 Method AVGSA-1.
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.3 Method AVGSA-1A. (alternative)
duty cycle < 98% and average over on/off periods with duty factor	
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.4 Method AVGSA-2.
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.5 Method AVGSA-2A (alternative)
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.6 Method AVGSA-3
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.7 Method AVGSA-3A (alternative)
Measurement using a power meter (PM)	
☐	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.1 Method AVGPM (using an RF average power meter).
☒	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.2 Method AVGPM-G (using an gate RF average power meter).
For conducted measurement.	
If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.	
If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$	

3.3.4 Test Setup

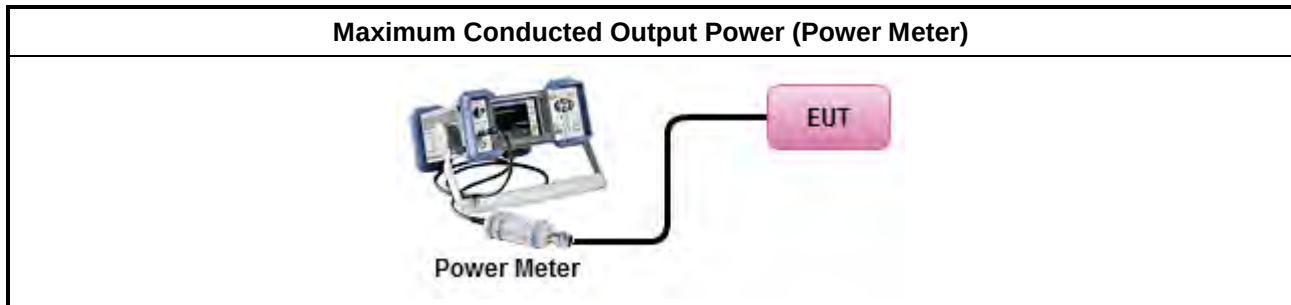

3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C



3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
▪ Power Spectral Density (PSD) ≤ 8 dBm/3kHz


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
▪ Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).	
☒	Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10 Method Max. PSD. [duty cycle $\geq 98\%$ or external video / power trigger]
▪ For conducted measurement.	
▪ If The EUT supports multiple transmit chains using options given below:	
☐	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
☐	Option 3: Measure and add $10 \log(N)$ dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with $10 \log(N)$. Or each transmit chains shall be add $10 \log(N)$ to compared with the limit.

3.4.4 Test Setup

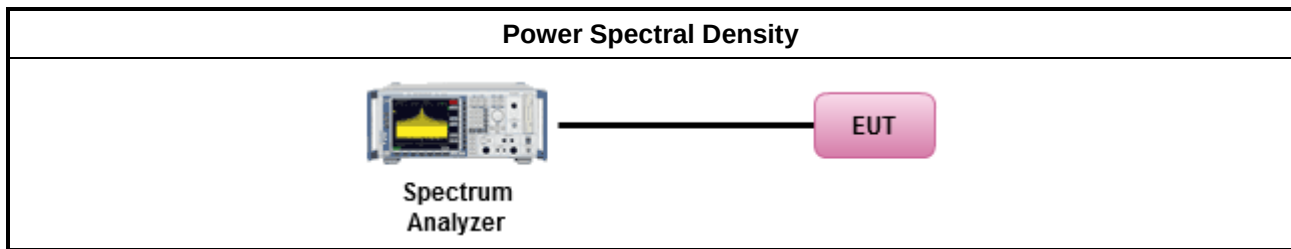

3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

3.5 Emissions in Non-restricted Frequency Bands

3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dBc)
Peak output power procedure	20
Average output power procedure	30
Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level. Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.	


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method
Refer as FCC KDB 558074, clause 8.5 for unwanted emissions into non-restricted bands.

3.5.4 Test Setup

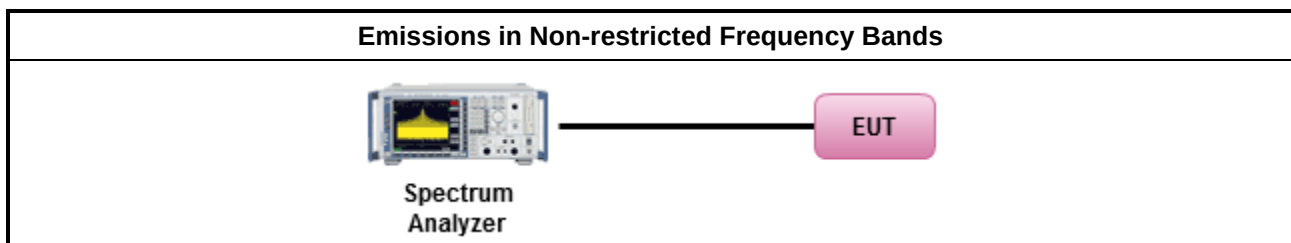

3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E

3.6 Emissions in Restricted Frequency Bands

3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB / decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.




3.6.3 Test Procedures



Test Method	
The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].	
Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 558074, clause 8.6 for unwanted emissions into restricted bands.
	☐ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.1(trace averaging for duty cycle $\geq 98\%$).
	☐ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.2(trace averaging + duty factor).
	☒ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.3(Reduced VBW $\geq 1/T$).
	☐ Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq 1/T$, where T is pulse time.
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.4 measurement procedure peak limit.
For the transmitter band-edge emissions shall be measured using following options below:	
	Refer as FCC KDB 558074 clause 8.7 & c63.10 clause 11.13.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.
	Refer as FCC KDB 558074, clause 8.7 (ANSI C63.10, clause 6.10.6) for marker-delta method for band-edge measurements.
	Refer as FCC KDB 558074, clause 8.7 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
	For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB
	For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.



Test Method	
	▪ For conducted and cabinet radiation measurement, refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.2.
	▪ For conducted unwanted emissions into non-restricted bands (relative emission limits). Devices with multiple transmit chains: Refer as FCC KDB 662911, when testing out-of-band and spurious emissions against relative emission limits, tests may be performed on each output individually without summing or adding 10 log(N) if the measurements are made relative to the in-band emissions on the individual outputs.
	▪ For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB
	▪ For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.

3.6.4 Test Setup

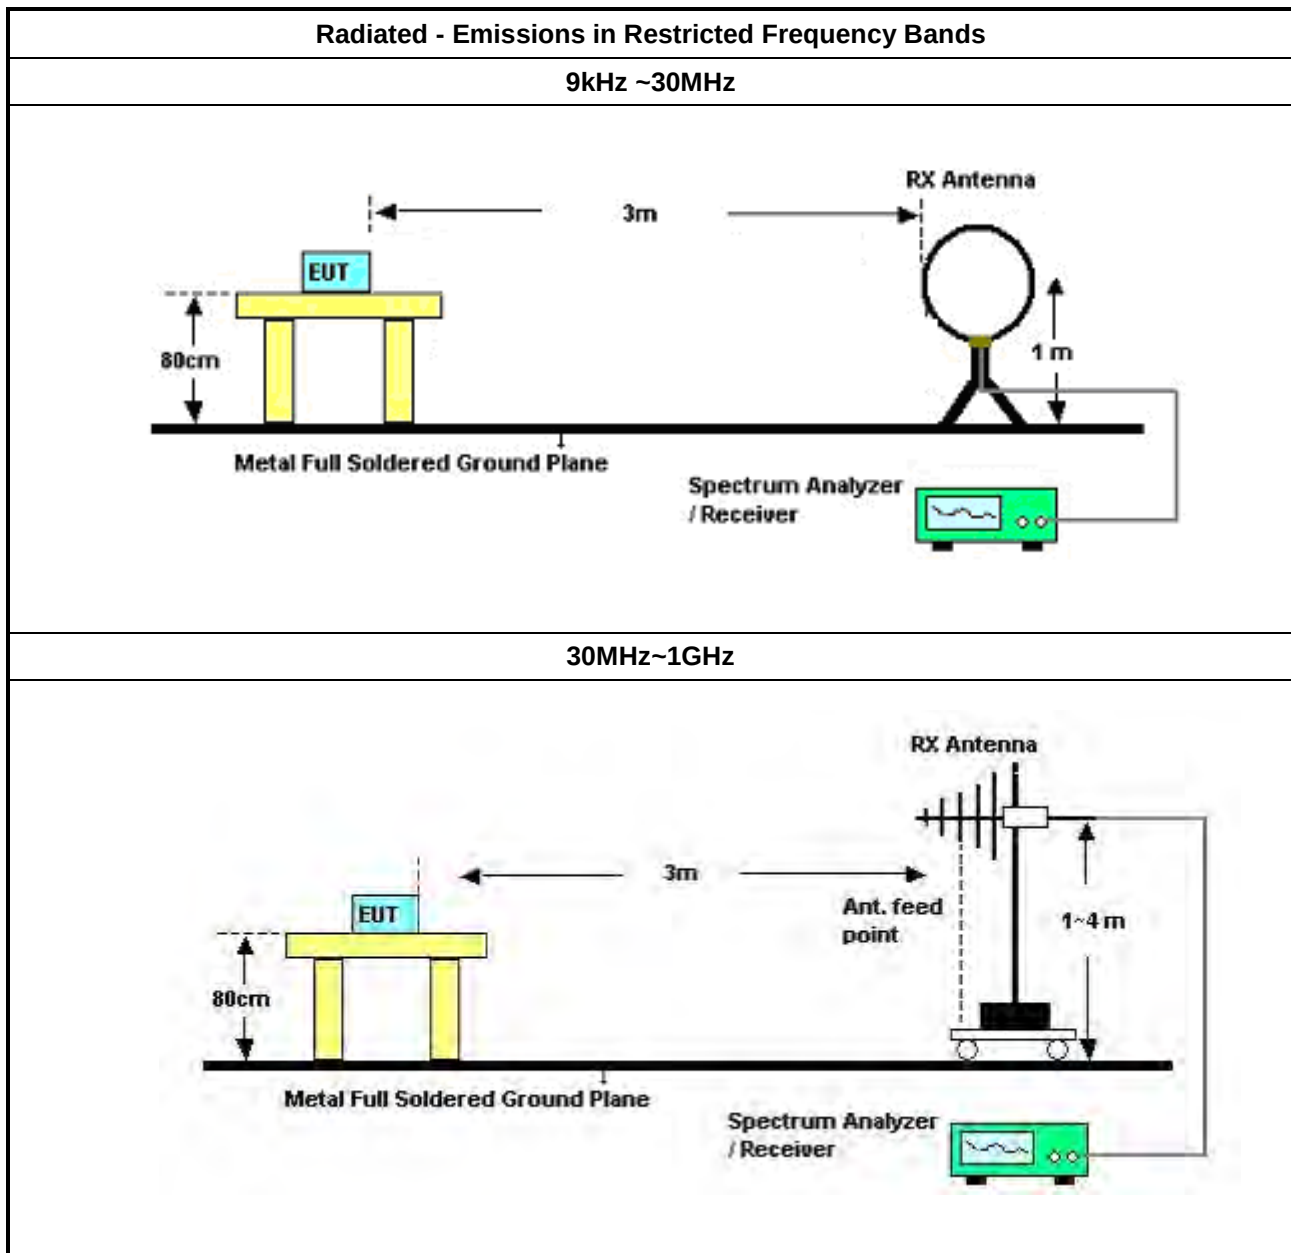

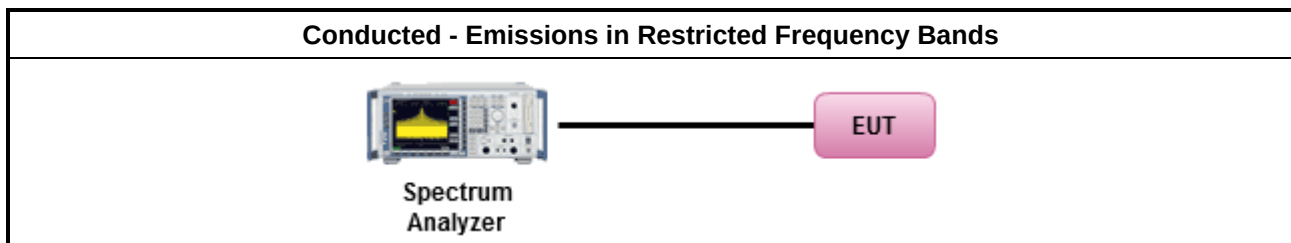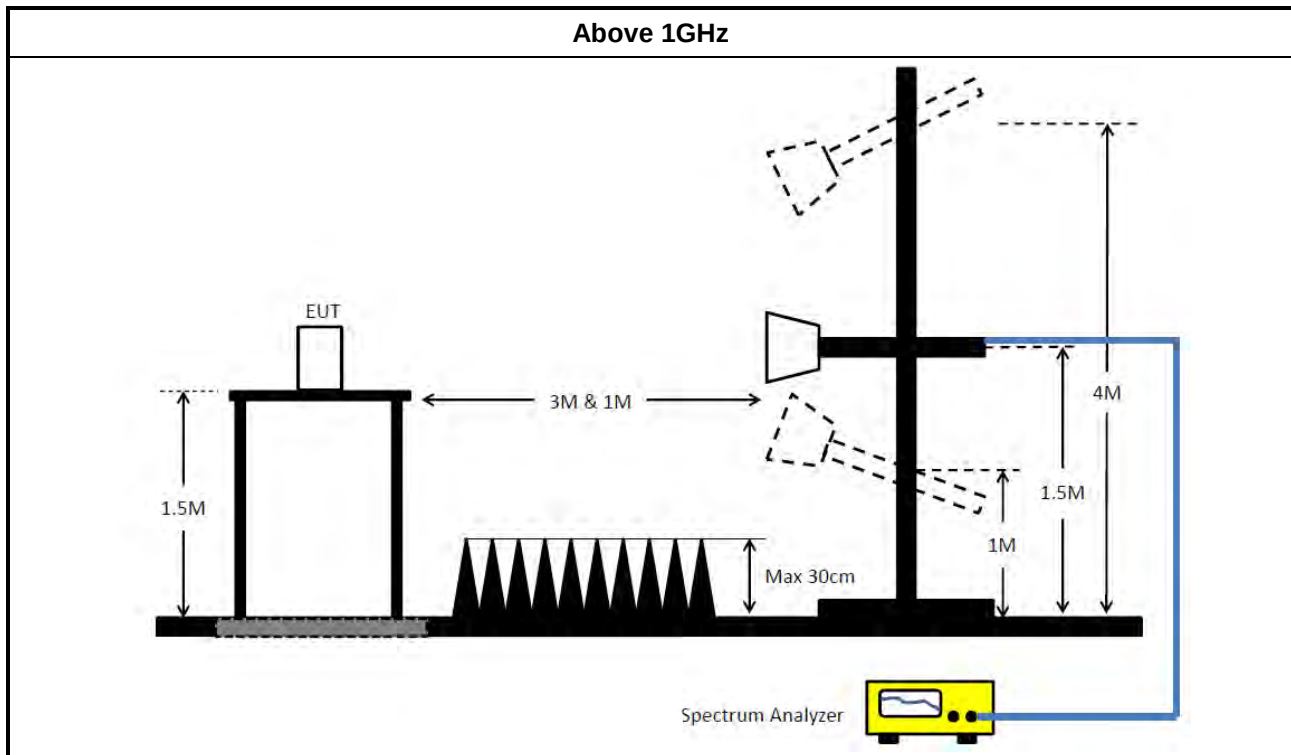

3.6.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable) = Level.

3.6.6 Emissions in Restricted Frequency Bands (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10 harmonic or 40 GHz, whichever is appropriate.

3.6.7 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix F



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
LISN	Schwarzbeck	NSLK 8127	8127650	9kHz ~ 30MHz	Nov. 21, 2019	Nov. 20, 2020	Conduction (CO02-CB)
LISN	Schwarzbeck	NSLK 8127	8127650	9kHz ~ 30MHz	Jan. 07, 2022	Jan. 06, 2023	Conduction (CO02-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Oct. 30, 2019	Oct. 29, 2020	Conduction (CO02-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Dec. 22, 2021	Dec. 21, 2022	Conduction (CO02-CB)
EMI Receiver	Agilent	N9038A	MY52260140	9kHz ~ 8.4GHz	Mar. 10, 2020	Mar. 09, 2021	Conduction (CO02-CB)
EMI Receiver	Agilent	N9038A	MY52260140	9kHz ~ 8.4GHz	May 06, 2022	May 05, 2023	Conduction (CO02-CB)
COND Cable	Woken	Cable	2	0.15MHz ~ 30MHz	Oct. 21, 2019	Oct. 20, 2020	Conduction (CO02-CB)
COND Cable	Woken	Cable	2	0.15MHz ~ 30MHz	Oct. 19, 2021	Oct. 18, 2022	Conduction (CO02-CB)
Pulse Limiter	Schwarzbeck	VTSD 9561F-N	00378	9kHz ~ 30MHz	Mar. 19, 2020	Mar. 18, 2021	Conduction (CO02-CB)
Pulse Limiter	Schwarzbeck	VTSD 9561F-N	00378	9kHz ~ 30MHz	Mar. 18, 2022	Mar. 17, 2023	Conduction (CO02-CB)
Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Conduction (CO02-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH03-CB	1GHz ~ 18GHz 3m	May 05, 2022	May 04, 2023	Radiation (03CH03-CB)
Horn Antenna	ETS • Lindgren	3115	6821	750MHz~18GHz	Jan. 21, 2022	Jan. 20, 2023	Radiation (03CH03-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Aug. 05, 2021	Aug. 04, 2022	Radiation (03CH03-CB)
Pre-Amplifier	Agilent	8449B	3008A02097	1GHz ~ 26.5GHz	Jul. 02, 2021	Jul. 01, 2022	Radiation (03CH03-CB)
Pre-Amplifier	Agilent	8449B	3008A02097	1GHz ~ 26.5GHz	Jul. 01, 2022	Jun. 30, 2023	Radiation (03CH03-CB)
Spectrum Analyzer	R&S	FSP40	100019	9kHz ~ 40GHz	Jun. 10, 2022	Jun. 09, 2023	Radiation (03CH03-CB)
RF Cable-high	Woken	RG402	High Cable-20+29	1GHz ~ 18GHz	Oct. 04, 2021	Oct. 03, 2022	Radiation (03CH03-CB)
RF Cable-high	Woken	RG402	High Cable-29	1GHz ~ 18GHz	Oct. 04, 2021	Oct. 03, 2022	Radiation (03CH03-CB)
High Cable	Woken	WCA0929M	40G#5+7	1GHz ~ 40 GHz	Dec. 14, 2021	Dec. 13, 2022	Radiation (03CH03-CB)
High Cable	Woken	WCA0929M	40G#5	1GHz ~ 40 GHz	Dec. 08, 2021	Dec. 07, 2022	Radiation (03CH03-CB)



High Cable	Woken	WCA0929M	40G#7	1GHz ~ 40 GHz	Dec. 14, 2021	Dec. 13, 2022	Radiation (03CH03-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (03CH03-CB)
3m Semi Anechoic Chamber NSA	TDK	SAC-3M	03CH05-CB	30 MHz ~ 1 GHz	Aug. 09, 2021	Aug. 08, 2022	Radiation (03CH05-CB)
Bilog Antenna with 6dB Attenuator	TESEQ & EMCI	CBL 6112D & N-6-06	35236 & AT-N0610	30MHz ~ 2GHz	Mar. 25, 2022	Mar. 24, 2023	Radiation (03CH05-CB)
Pre-Amplifier	EMCI	EMC330N	980331	20MHz ~ 3GHz	Apr. 26, 2022	Apr. 25, 2023	Radiation (03CH05-CB)
Spectrum Analyzer	R&S	FSP40	100304	9kHz ~ 40GHz	Mar. 14, 2022	Mar. 13, 2023	Radiation (03CH05-CB)
EMI Test Receiver	R&S	ESCS	826547/017	9kHz ~ 2.75GHz	Jun. 17, 2022	Jun. 16, 2023	Radiation (03CH05-CB)
RF Cable-low	Woken	RG402	Low Cable-04+23	30MHz~1GHz	Oct. 13, 2021	Oct. 12, 2022	Radiation (03CH05-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	May 14, 2022	May 13, 2023	Radiation (03CH05-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (03CH05-CB)
Spectrum analyzer	R&S	FSV40	101028	9kHz~40GHz	Jan. 07, 2022	Jan. 06, 2023	Conducted (TH03-CB)
Power Sensor	Anritsu	MA2411B	1726195	300MHz~40GHz	Aug. 22, 2021	Aug. 21, 2022	Conducted (TH03-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Aug. 22, 2021	Aug. 21, 2022	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-11	1 GHz ~18 GHz	Oct. 04, 2021	Oct. 03, 2022	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-12	1 GHz ~18 GHz	Oct. 04, 2021	Oct. 03, 2022	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-13	1 GHz ~18 GHz	Oct. 04, 2021	Oct. 03, 2022	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-14	1 GHz ~18 GHz	Oct. 04, 2021	Oct. 03, 2022	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-15	1 GHz ~18 GHz	Oct. 04, 2021	Oct. 03, 2022	Conducted (TH03-CB)
Switch	SPTCB	SP-SWI	SWI-03	1 GHz ~26.5 GHz	Dec. 13, 2021	Dec. 12, 2022	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	SWI-03-P1	1 GHz ~26.5 GHz	Dec. 13, 2021	Dec. 12, 2022	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	SWI-03-P2	1 GHz ~26.5 GHz	Dec. 13, 2021	Dec. 12, 2022	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	SWI-03-P3	1 GHz ~26.5 GHz	Dec. 13, 2021	Dec. 12, 2022	Conducted (TH03-CB)



RADIO TEST REPORT

Report No. : FR992016-11AD

RF Cable-high	Woken	RG402	SWI-03-P4	1 GHz –26.5 GHz	Dec. 13, 2021	Dec. 12, 2022	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	SWI-03-P5	1 GHz –26.5 GHz	Dec. 13, 2021	Dec. 12, 2022	Conducted (TH03-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Conducted (TH03-CB)

Note: Calibration Interval of instruments listed above is one year.

NCR means Non-Calibration required.




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition
Mode 2	Pass	AV	25.337M	43.53	50.00	-6.47	10.88	Line

Mode 2


28/05/2020

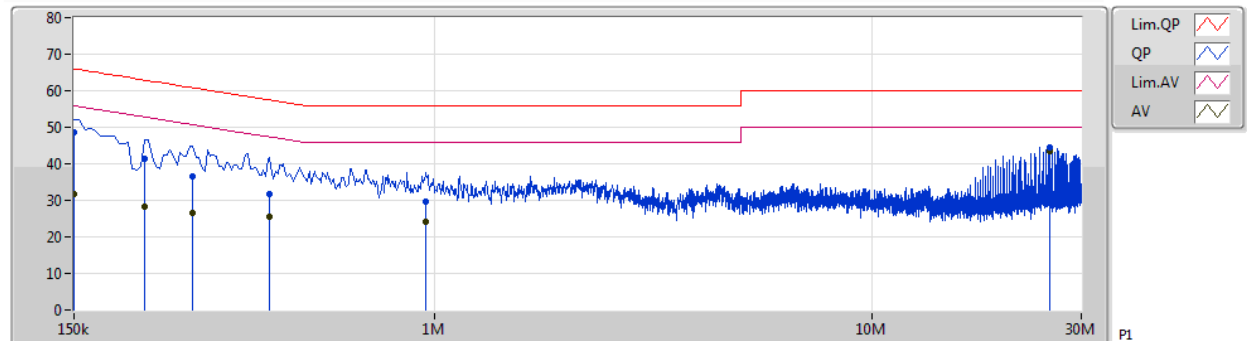

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor	Condition	Comment	Raw (dBuV)	AF (dB)	CL (dB)	AT (dB)			
QP	150k	48.48	66.00	-17.52	10.20	Line	-	38.28	0.05	0.05	10.10			
AV	150k	31.87	56.00	-24.13	10.20	Line	-	21.67	0.05	0.05	10.10			
QP	217.5k	41.40	62.92	-21.52	10.22	Line	-	31.18	0.05	0.07	10.10			
AV	217.5k	28.36	52.92	-24.56	10.22	Line	-	18.14	0.05	0.07	10.10			
QP	280.5k	36.39	60.80	-24.41	10.22	Line	-	26.17	0.05	0.07	10.10			
AV	280.5k	26.62	50.80	-24.18	10.22	Line	-	16.40	0.05	0.07	10.10			
QP	420k	31.76	57.45	-25.69	10.23	Line	-	21.53	0.05	0.08	10.10			
AV	420k	25.68	47.45	-21.77	10.23	Line	-	15.45	0.05	0.08	10.10			
QP	955.5k	29.54	56.00	-26.46	10.28	Line	-	19.26	0.06	0.12	10.10			
AV	955.5k	24.20	46.00	-21.80	10.28	Line	-	13.92	0.06	0.12	10.10			
QP	25.337M	44.40	60.00	-15.60	10.88	Line	-	33.52	0.53	0.23	10.12			
AV	25.337M	43.53	50.00	-6.47	10.88	Line	"Worst"	32.65	0.53	0.23	10.12			

Mode 2

28/05/2020

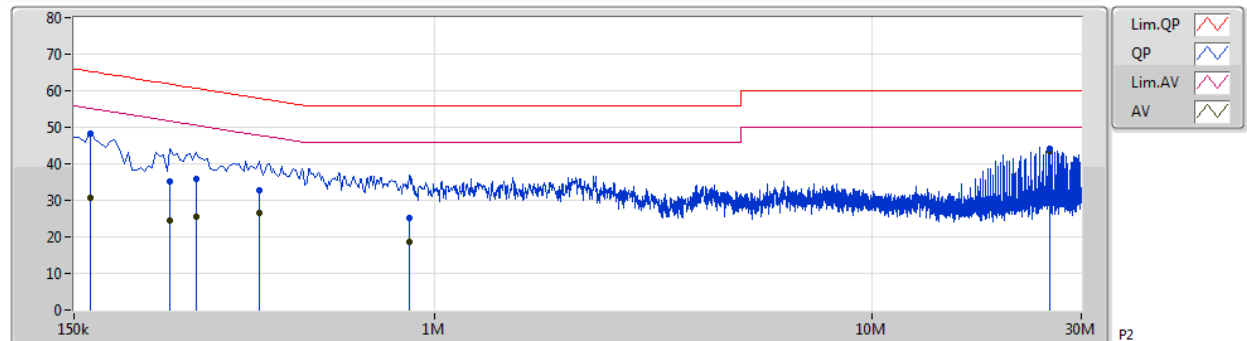

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor	Condition	Comment	Raw (dBuV)	AF (dB)	CL (dB)	AT (dB)			
QP	163.5k	48.19	65.27	-17.08	10.21	Neutral	-	37.98	0.05	0.06	10.10			
AV	163.5k	30.63	55.27	-24.64	10.21	Neutral	-	20.42	0.05	0.06	10.10			
QP	249k	35.34	61.79	-26.45	10.22	Neutral	-	25.12	0.05	0.07	10.10			
AV	249k	24.44	51.79	-27.35	10.22	Neutral	-	14.22	0.05	0.07	10.10			
QP	285k	35.80	60.67	-24.87	10.23	Neutral	-	25.57	0.05	0.08	10.10			
AV	285k	25.62	50.67	-25.05	10.23	Neutral	-	15.39	0.05	0.08	10.10			
QP	397.5k	32.68	57.91	-25.23	10.23	Neutral	-	22.45	0.05	0.08	10.10			
AV	397.5k	26.68	47.91	-21.23	10.23	Neutral	-	16.45	0.05	0.08	10.10			
QP	874.5k	25.28	56.00	-30.72	10.27	Neutral	-	15.01	0.06	0.11	10.10			
AV	874.5k	18.49	46.00	-27.51	10.27	Neutral	-	8.22	0.06	0.11	10.10			
QP	25.337M	44.22	60.00	-15.78	10.67	Neutral	-	33.55	0.32	0.23	10.12			
AV	25.337M	43.44	50.00	-6.56	10.67	Neutral	"Worst"	32.77	0.32	0.23	10.12			

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(1Mbps)	638.75k	1.038M	1M04F1D	635k	1.033M
BT-LE(2Mbps)	1.085M	2.089M	2M09F1D	1.085M	2.081M

Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth


Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	635k	1.033M
2440MHz	Pass	500k	637.5k	1.038M
2480MHz	Pass	500k	638.75k	1.037M
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	500k	1.085M	2.084M
2440MHz	Pass	500k	1.085M	2.089M
2480MHz	Pass	500k	1.085M	2.081M


Port X-N dB = Port X 6dB down bandwidth;
Port X-OBW = Port X 99% occupied bandwidth

BT-LE(1Mbps)
2402MHz
EBW-DTS

23/06/2022

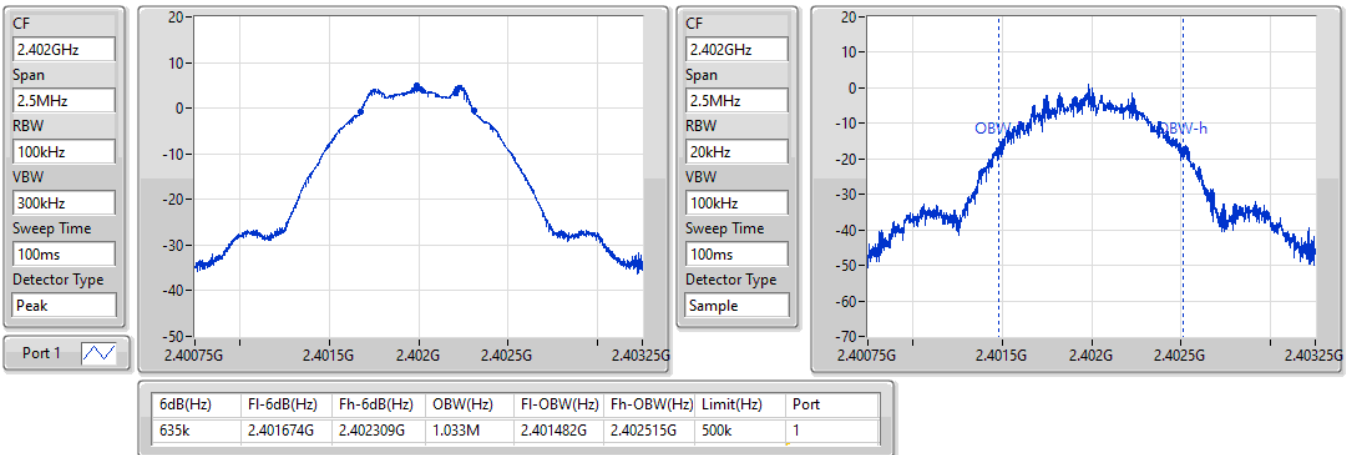

BT-LE(1Mbps)
2440MHz
EBW-DTS

23/06/2022

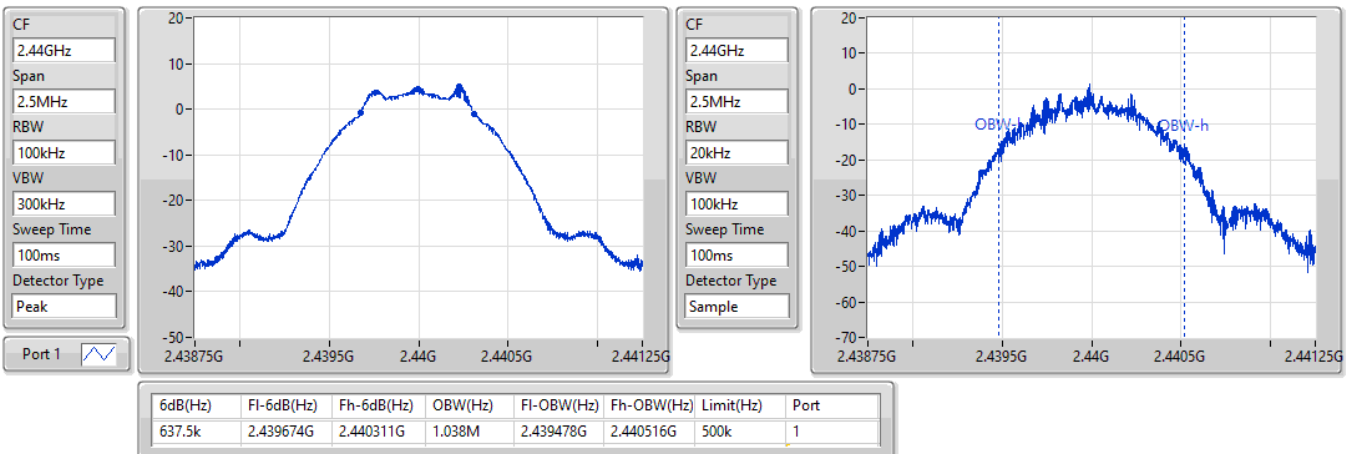


BT-LE(1Mbps)
EBW-DTS
2480MHz

23/06/2022

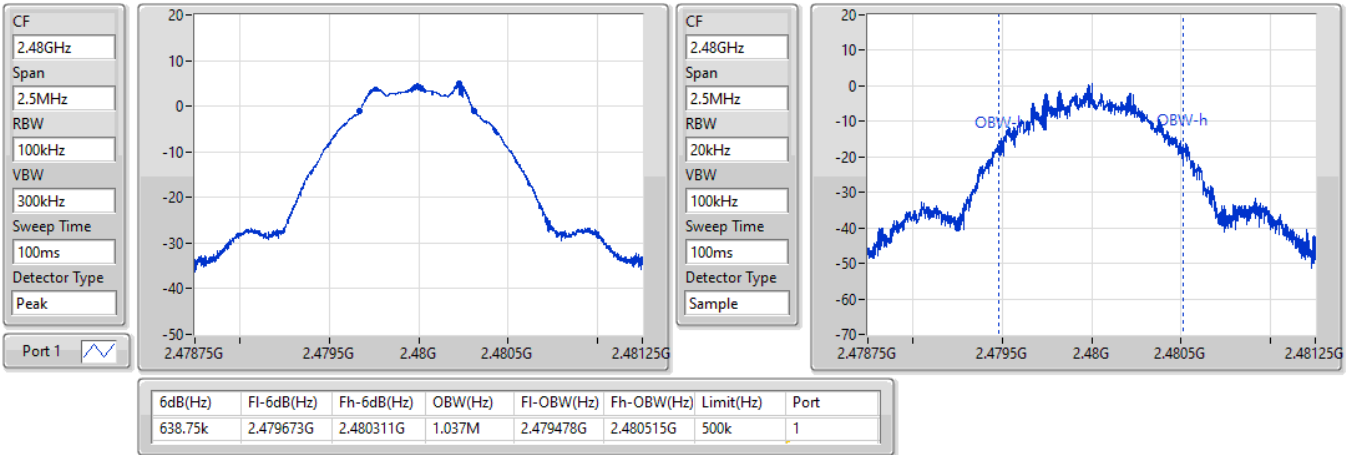

BT-LE(2Mbps)
EBW-DTS
2402MHz

23/06/2022

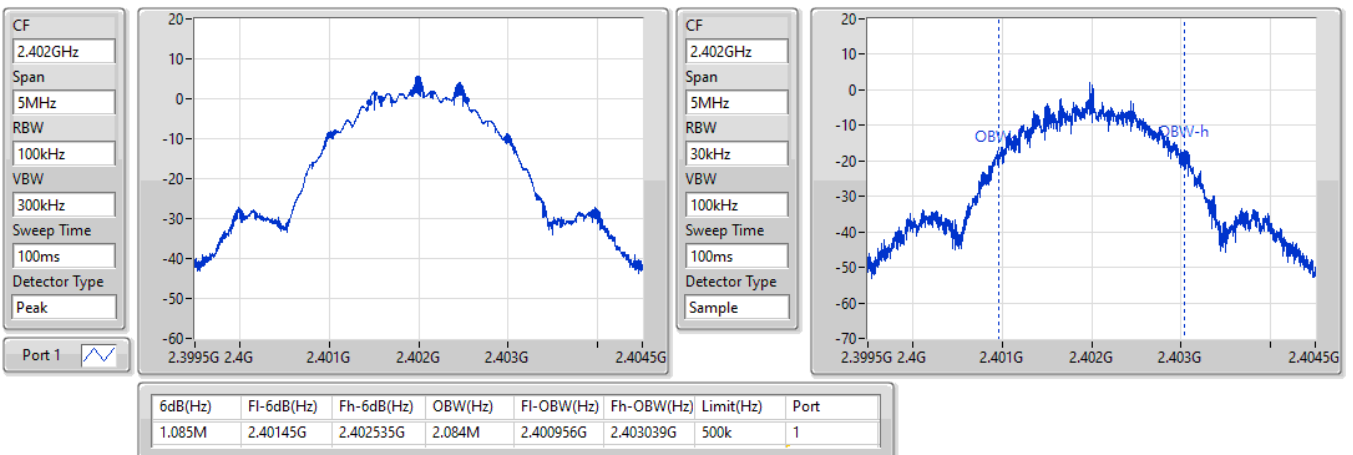


BT-LE(2Mbps)
EBW-DTS
2440MHz

23/06/2022

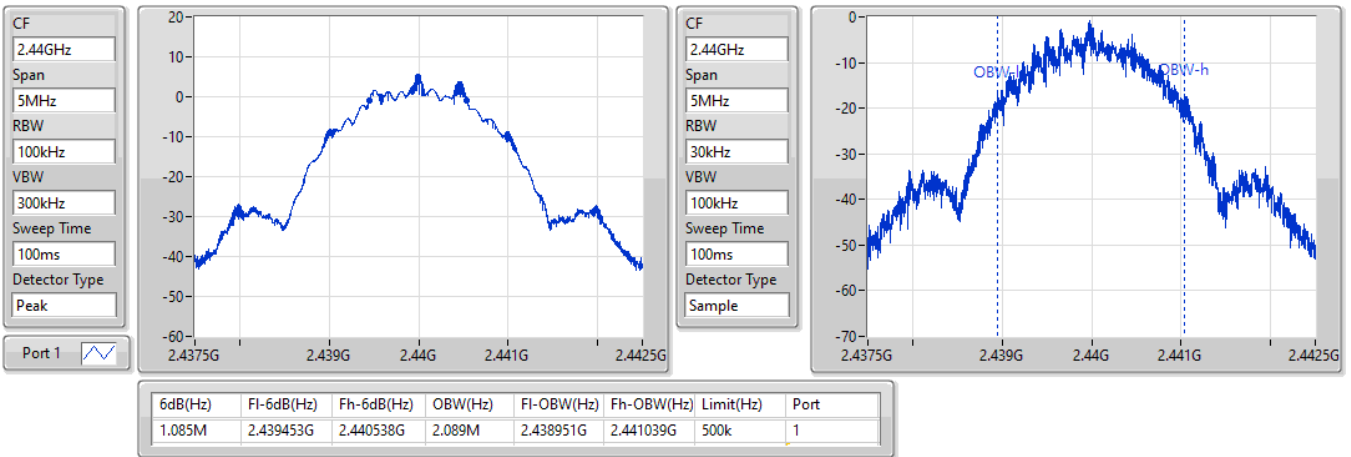
BT-LE(2Mbps)
EBW-DTS
2480MHz

23/06/2022

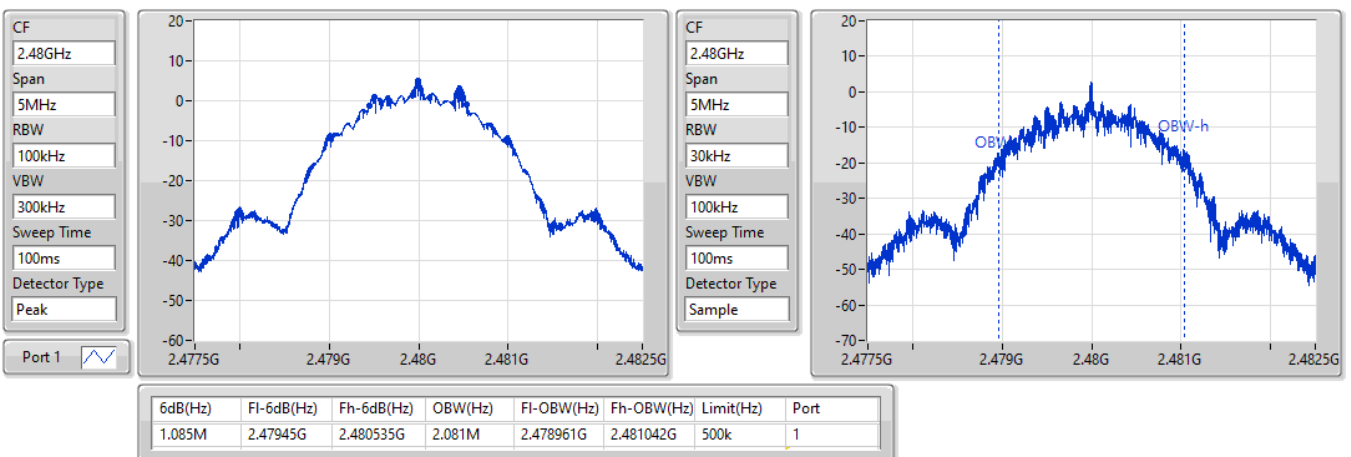



Summary

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	5.32	0.00340
BT-LE(2Mbps)	5.25	0.00335

Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	2.08	5.32	30.00
2440MHz	Pass	2.30	5.15	30.00
2480MHz	Pass	2.18	5.20	30.00
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	2.08	5.25	30.00
2440MHz	Pass	2.30	5.12	30.00
2480MHz	Pass	2.18	5.14	30.00

DG = Directional Gain; Port X = Port X output power



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
BT-LF(1Mbps)	-10.58
BT-LF(2Mbps)	-12.43

RBW = 3kHz;

Result


Mode	Result	Gain (dBi)	PD (dBm/RBW)	PD Limit (dBm/RBW)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	2.08	-10.86	8.00
2440MHz	Pass	2.30	-10.58	8.00
2480MHz	Pass	2.18	-10.96	8.00
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	2.08	-12.84	8.00
2440MHz	Pass	2.30	-12.97	8.00
2480MHz	Pass	2.18	-12.43	8.00

DG = Directional Gain; RBW = 3kHz;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

BT-LE(1Mbps)

2402MHz


23/06/2022

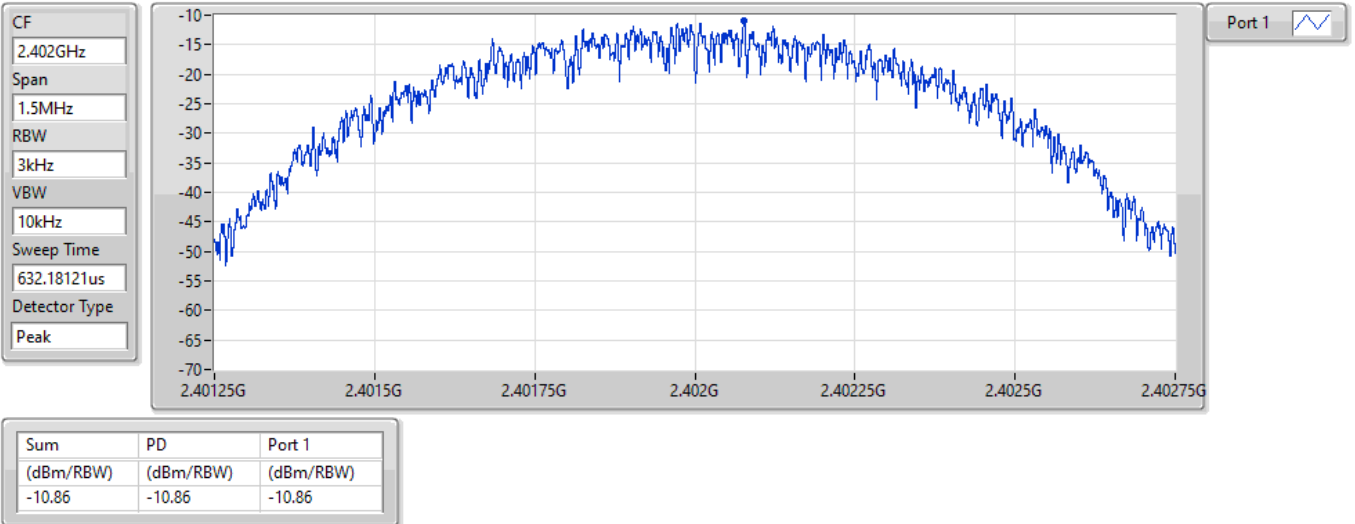

BT-LE(1Mbps)

2440MHz


23/06/2022

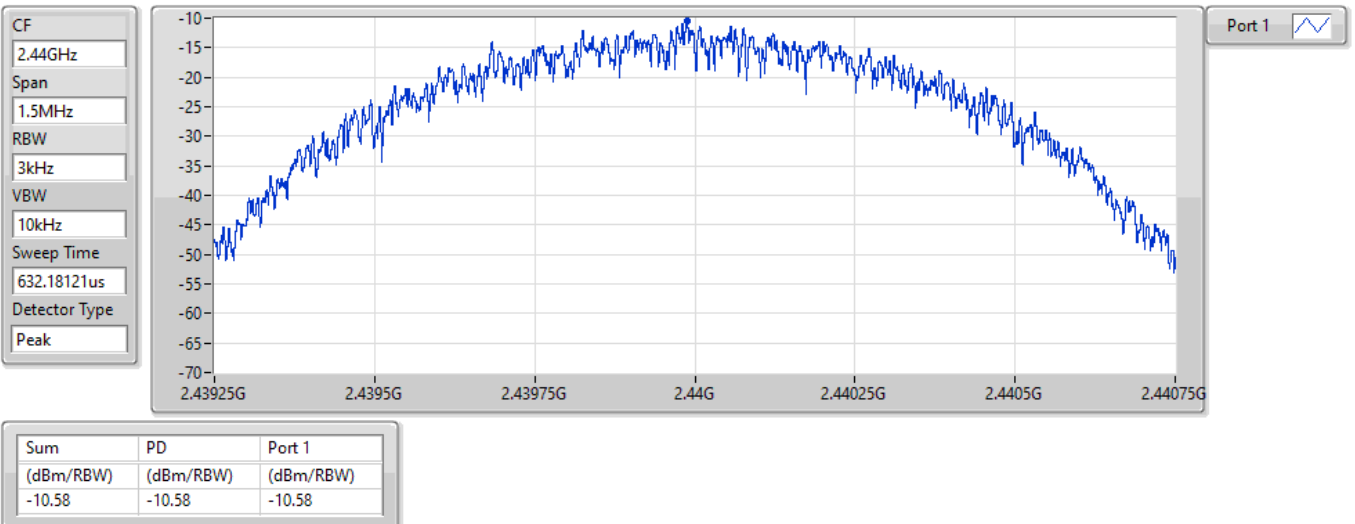

BT-LE(1Mbps)

2480MHz


23/06/2022

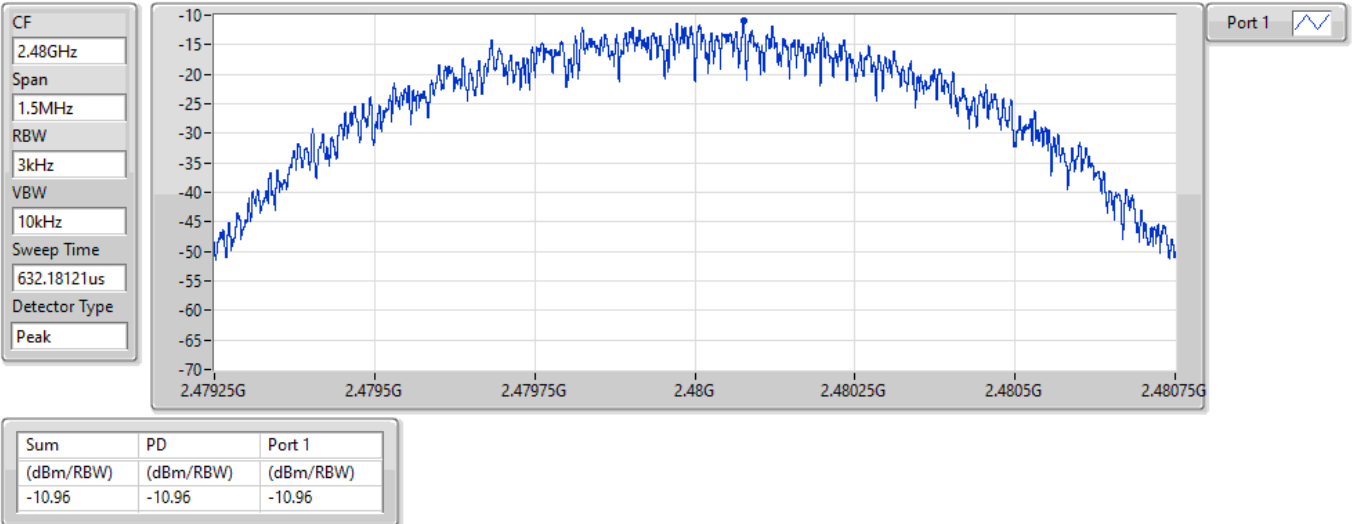

BT-LE(2Mbps)

2402MHz

23/06/2022

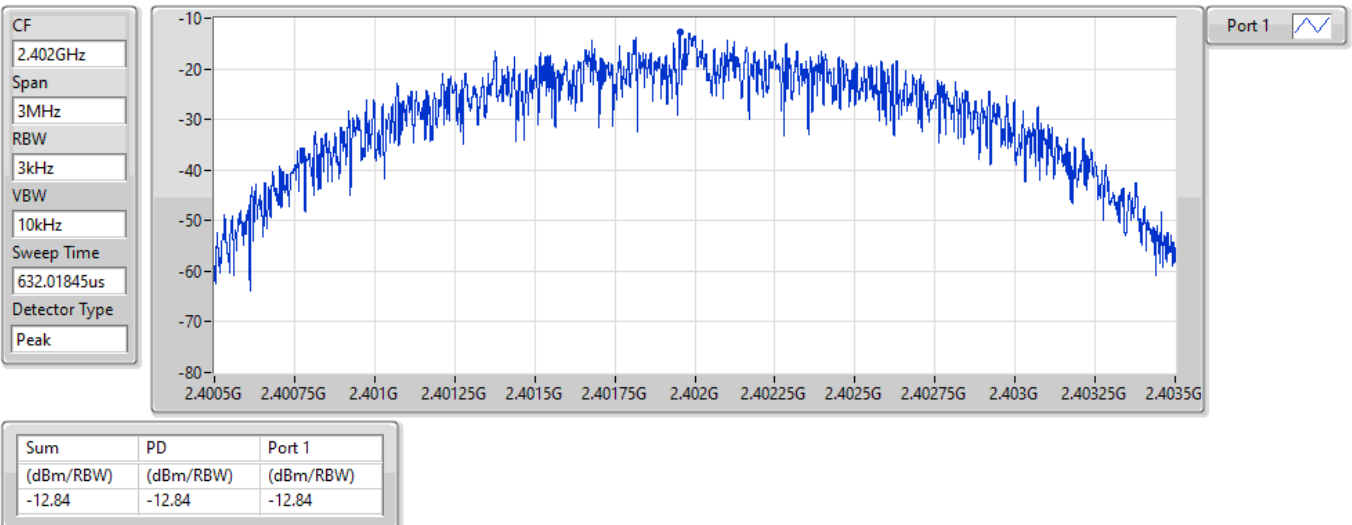


BT-LE(2Mbps)

PSD

2440MHz

23/06/2022

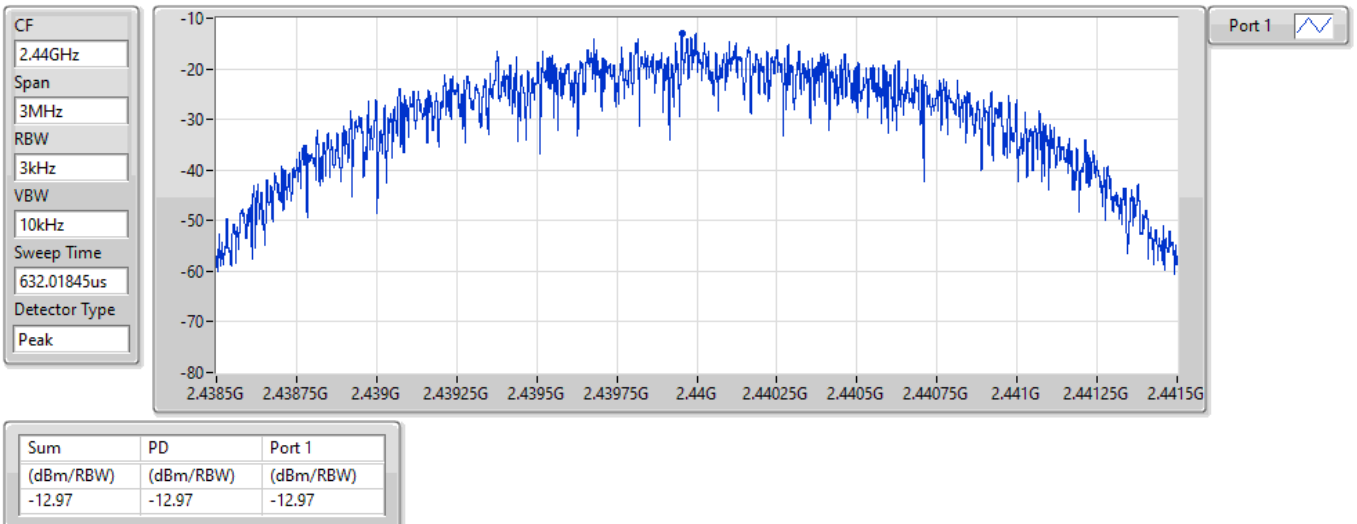


BT-LE(2Mbps)

PSD

2480MHz

23/06/2022

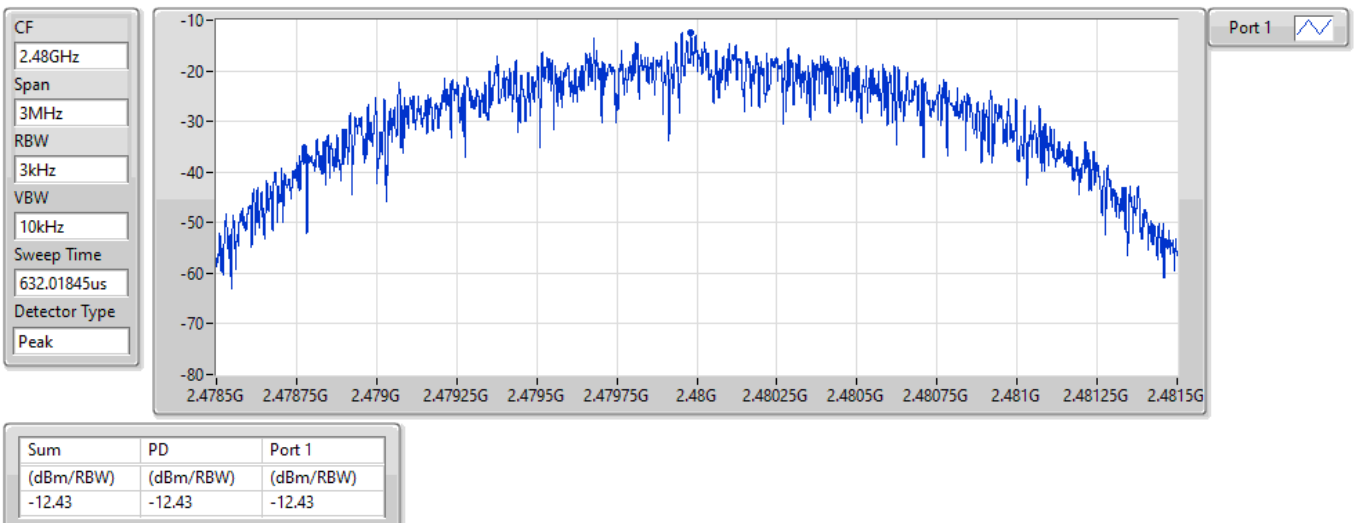



Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	2.40221G	4.22	-25.78	2.11592G	-52.79	2.39979G	-46.66	2.4G	-47.22	2.48468G	-51.73	16.40352G	-47.48	1
BT-LE(2Mbps)	Pass	2.40196G	5.06	-24.94	2.17584G	-53.01	2.39998G	-27.14	2.4G	-27.79	2.48728G	-51.59	16.34728G	-47.29	1

Result


Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	2.40221G	4.22	-25.78	2.11592G	-52.79	2.39979G	-46.66	2.4G	-47.22	2.48468G	-51.73	16.40352G	-47.48	1
2440MHz	Pass	2.40221G	4.22	-25.78	2.30333G	-53.28	2.39858G	-52.75	2.4835G	-54.89	2.4886G	-52.03	23.49836G	-47.77	1
2480MHz	Pass	2.40221G	4.22	-25.78	1.64798G	-53.38	2.39229G	-52.98	2.4835G	-51.37	2.48351G	-51.23	24.67661G	-47.32	1
BT-LE(2Mbps)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	2.40196G	5.06	-24.94	2.17584G	-53.01	2.39998G	-27.14	2.4G	-27.79	2.48728G	-51.59	16.34728G	-47.29	1
2440MHz	Pass	2.40196G	5.06	-24.94	1.7925G	-53.25	2.39598G	-53.05	2.4G	-54.52	2.48982G	-52.02	21.58053G	-47.95	1
2480MHz	Pass	2.40196G	5.06	-24.94	579.9M	-53.87	2.39896G	-52.63	2.4835G	-48.96	2.48365G	-48.18	24.14795G	-47.39	1

BT-LE(1Mbps)


CSEndB-DTS

2402MHz

23/06/2022

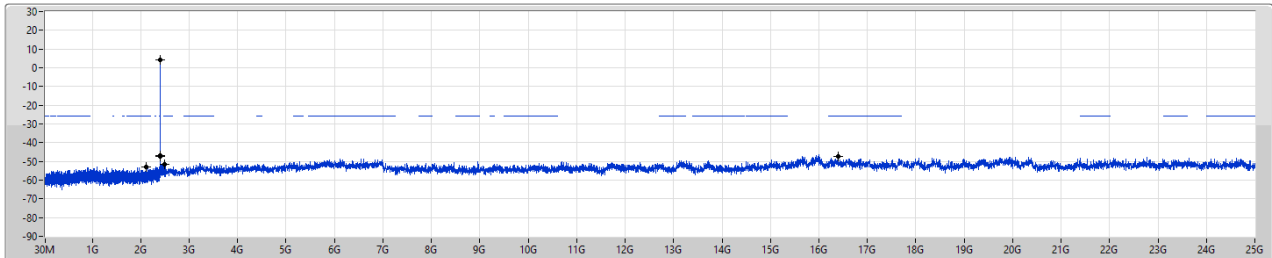

Port 1

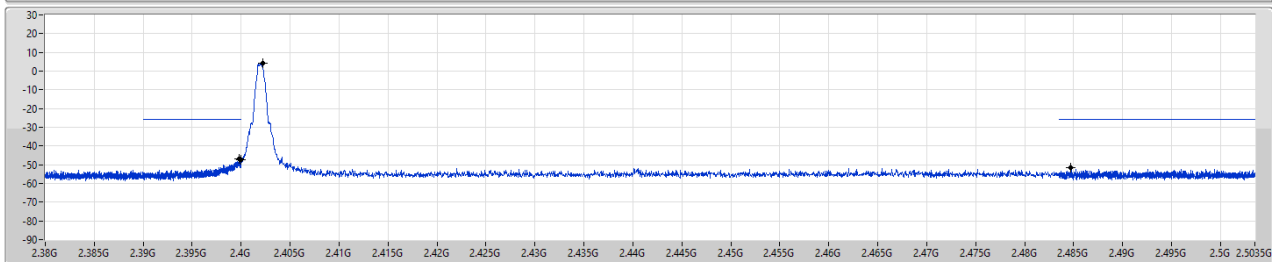

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.40221G	4.22	-25.78	2.11592G	-52.79	2.39979G	-46.66	2.4G	-47.22	2.48468G	-51.73	16.40332G	-47.48	1

BT-LE(1Mbps)


CSEndB-DTS

2440MHz

23/06/2022

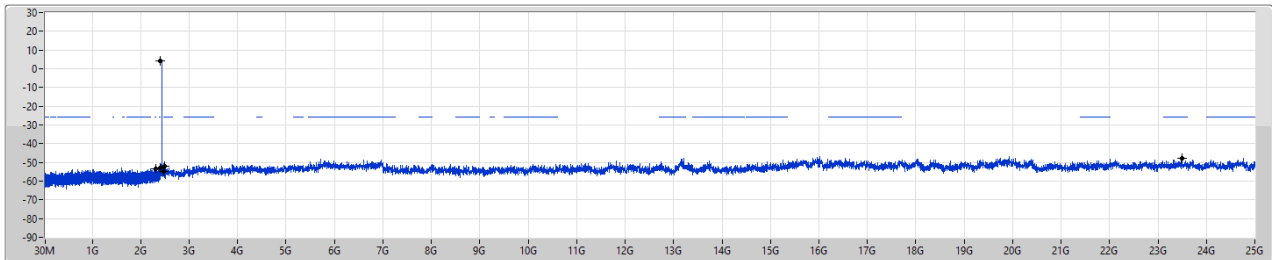

Port 1

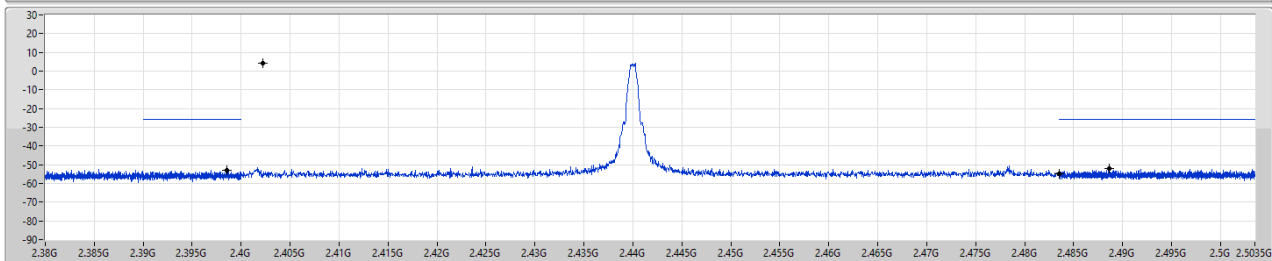


RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.40221G	4.22	-25.78	2.30333G	-53.28	2.39858G	-52.75	2.4835G	-54.89	2.4886G	-52.03	23.49836G	-47.77	1

BT-LE(1Mbps)

CSEndB-DTS


2480MHz

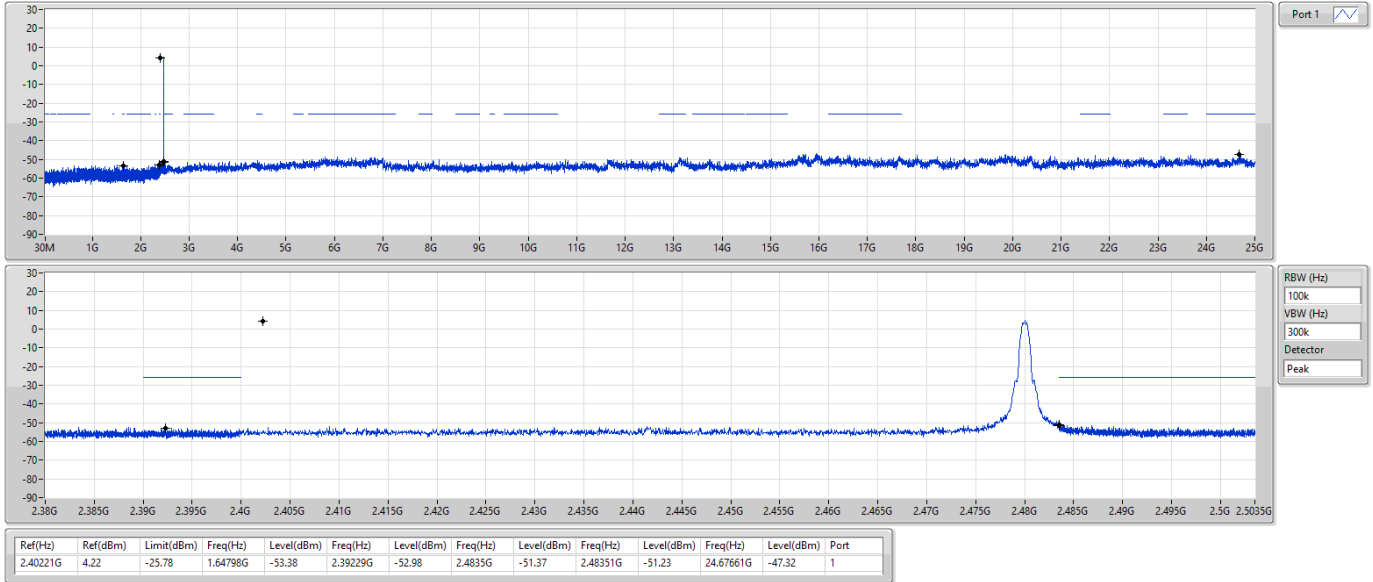

BT-LE(2Mbps)

CSEndB-DTS

2402MHz

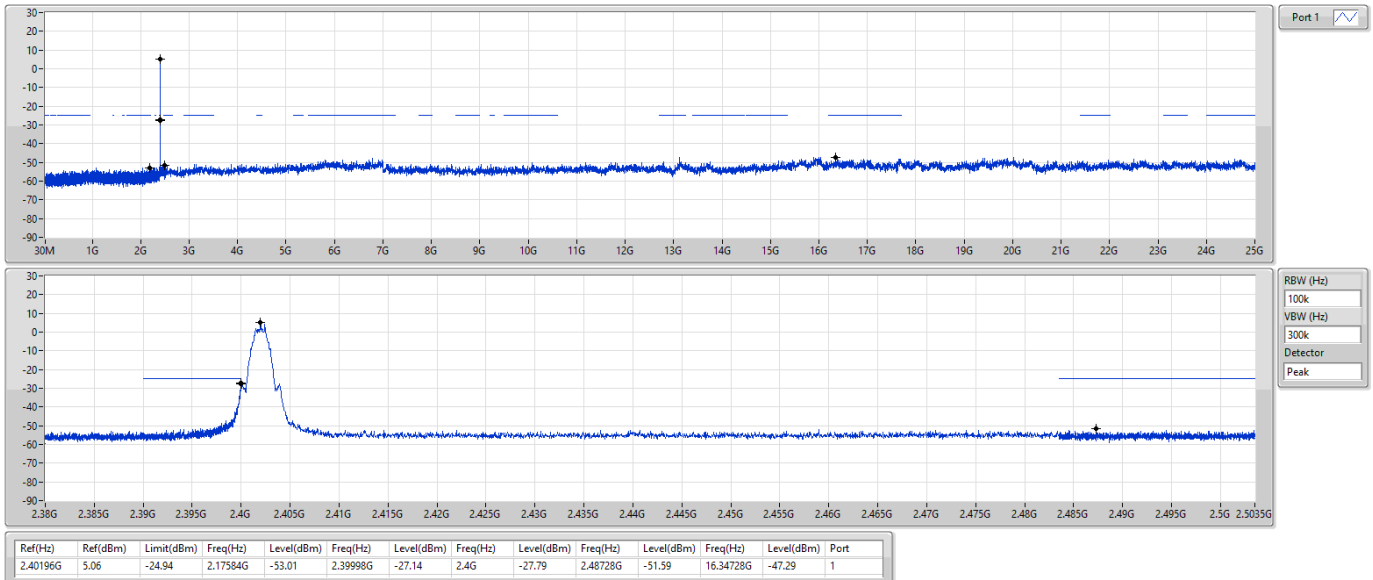


BT-LE(2Mbps)

CSEndB-DTS

2440MHz

23/06/2022

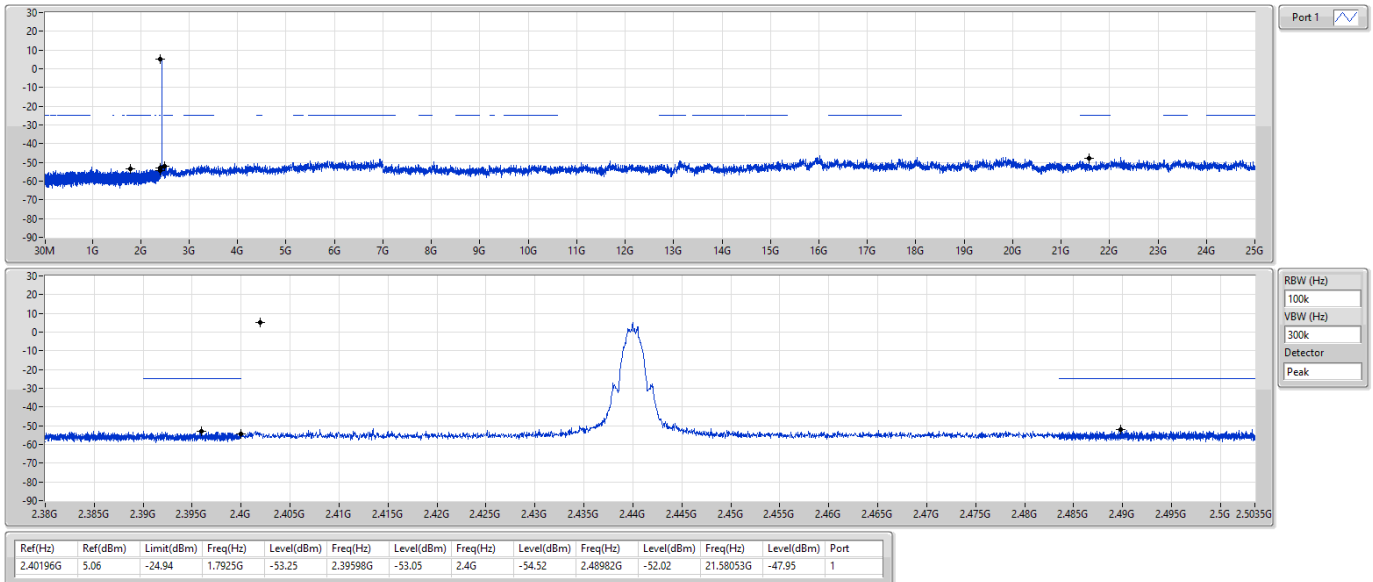


BT-LE(2Mbps)

CSEndB-DTS

2480MHz

23/06/2022

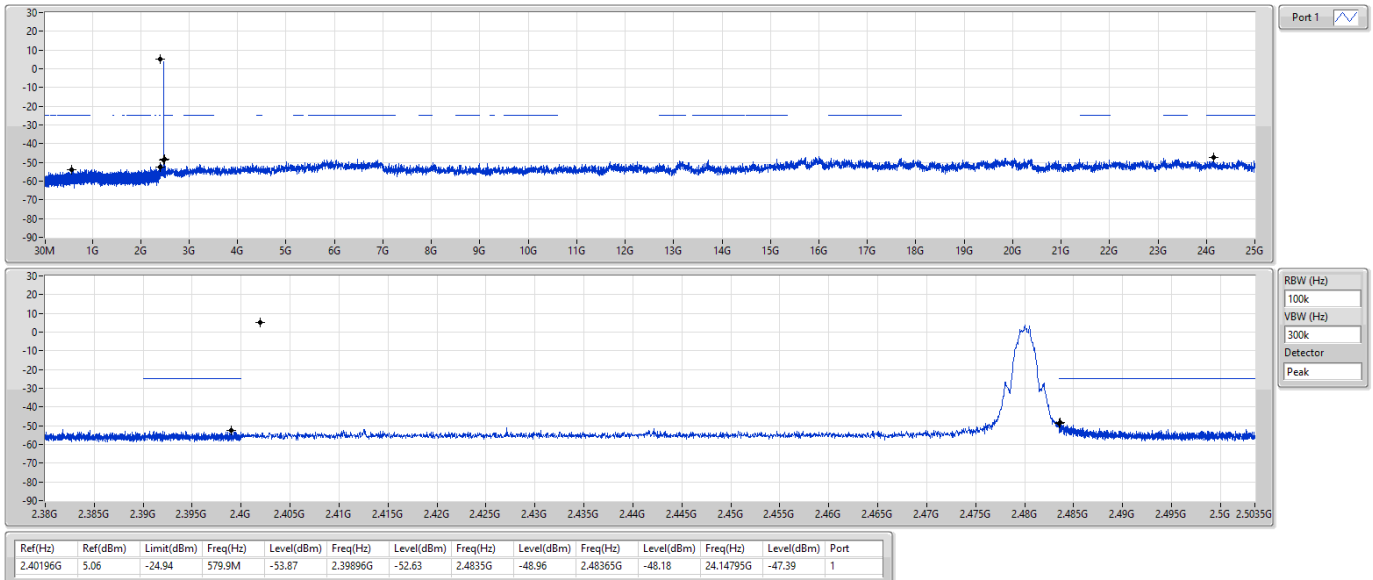




Radiated Emissions below 1GHz

Appendix F.1

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	PK	250.19M	39.65	46.00	-6.35	Horizontal

Mode 1

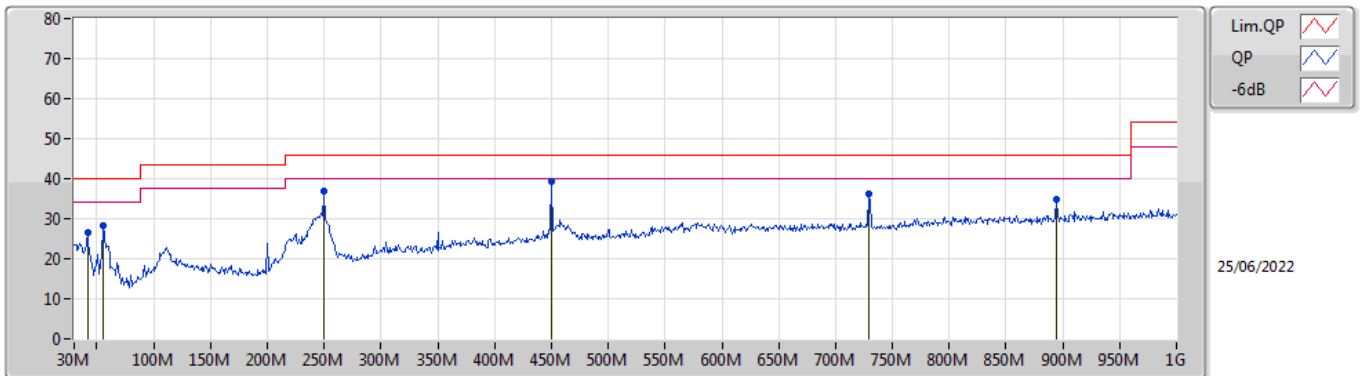

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)
PK	41.64M	26.47	40.00	-13.53	-13.14	3	Vertical	280	1.00	-	39.61	17.71	0.93	31.78
PK	55.22M	28.31	40.00	-11.69	-18.10	3	Vertical	351	1.00	-	46.41	12.69	1.10	31.89
PK	250.19M	36.84	46.00	-9.16	-11.28	3	Vertical	6	1.00	-	48.12	18.22	2.50	32.00
PK	450.01M	39.32	46.00	-6.68	-6.19	3	Vertical	74	1.25	"Worst"	45.51	22.57	3.50	32.26
PK	729.37M	36.27	46.00	-9.73	-3.02	3	Vertical	194	2.00	-	39.29	24.95	4.62	32.59
PK	894.27M	34.78	46.00	-11.22	-1.03	3	Vertical	315	2.00	-	35.81	26.18	5.28	32.49

Mode 1

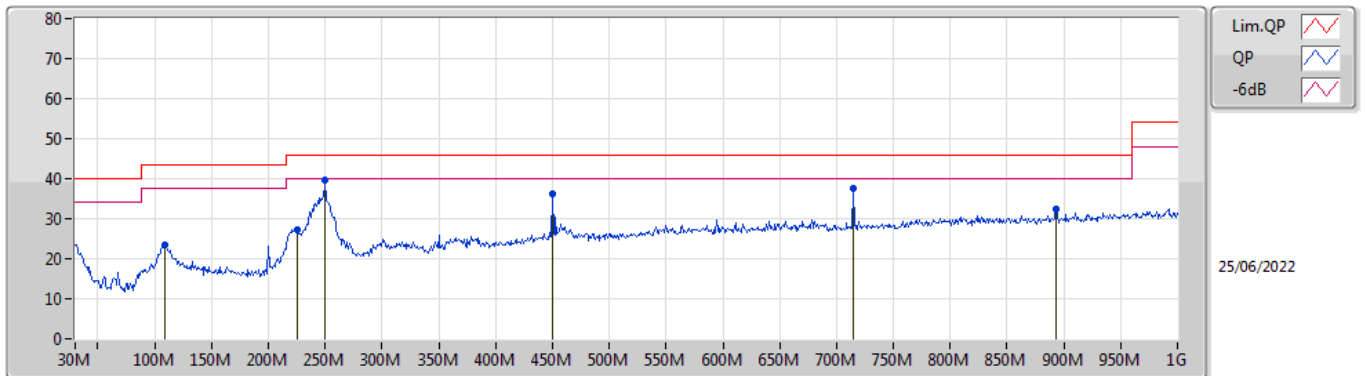

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)
PK	108.57M	23.45	43.50	-20.05	-12.88	3	Horizontal	253	1.50	-	36.33	17.55	1.54	31.97
PK	224.97M	27.40	46.00	-18.60	-14.31	3	Horizontal	112	1.50	-	41.71	15.35	2.35	32.01
PK	250.19M	39.65	46.00	-6.35	-11.28	3	Horizontal	111	1.00	"Worst"	50.93	18.22	2.50	32.00
PK	450.01M	36.13	46.00	-9.87	-6.19	3	Horizontal	206	1.00	-	42.32	22.57	3.50	32.26
PK	714.82M	37.45	46.00	-8.55	-3.36	3	Horizontal	264	1.50	-	40.81	24.65	4.56	32.57
PK	893.3M	32.47	46.00	-13.53	-1.05	3	Horizontal	105	1.50	-	33.52	26.17	5.27	32.49




For Radiated Cabinet:

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	AV	4.789G	32.62	54.00	-21.38	3	Horizontal	276	1.04	-

BT-LE(1Mbps)

2402MHz_TX

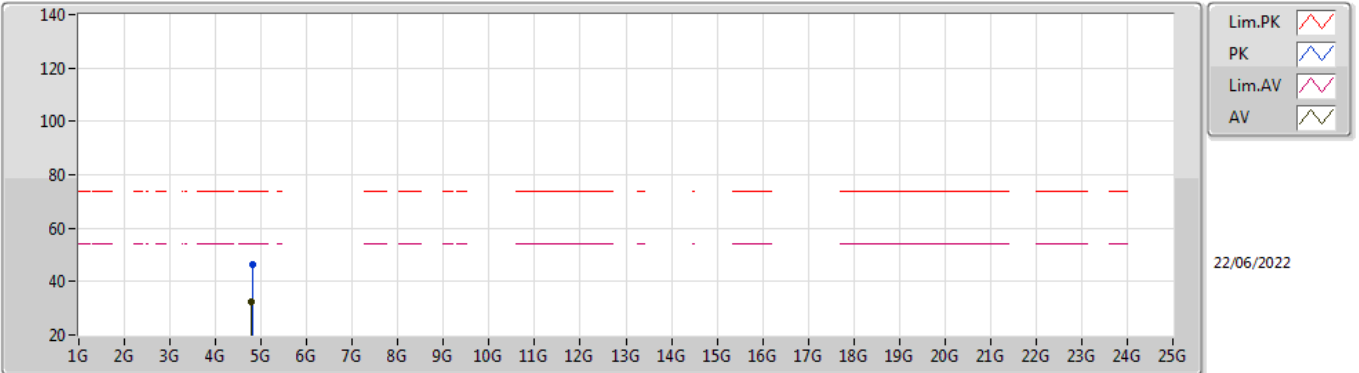


EUT V_1TX
Setting 20
03-D-G-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)	
PK	4.8076G	46.49	74.00	-27.51	41.57	3	Vertical	166	1.11	-	33.25	7.10	35.43	
AV	4.78906G	32.60	54.00	-21.40	27.74	3	Vertical	166	1.11	-	33.22	7.08	35.44	

BT-LE(1Mbps)

2402MHz_TX

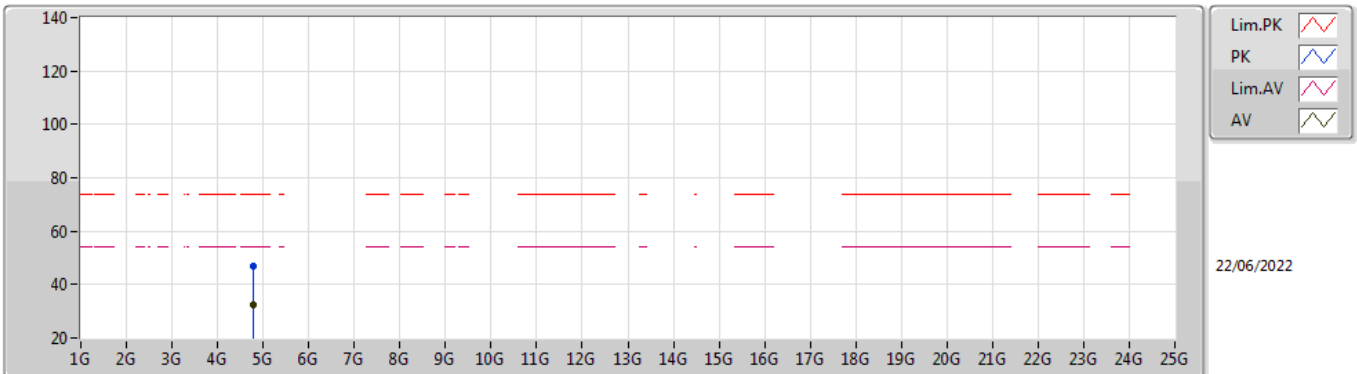

EUT V_1TX
Setting 20
03-D-G-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)	
PK	4.79236G	47.14	74.00	-26.86	42.28	3	Horizontal	276	1.04	-	33.22	7.08	35.44	
AV	4.789G	32.62	54.00	-21.38	27.76	3	Horizontal	276	1.04	-	33.22	7.08	35.44	



For Conducted Harmonic (1~3GHz):

Summary

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	1G	2.38G	AV	2.36361G	2.30	-58.48	-56.18	-41.20	-14.98
BT-LE(2Mbps)	Pass	1G	2.38G	AV	2.36361G	2.30	-60.05	-57.75	-41.20	-16.55

DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX

Result

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	1G	2.38G	AV	2.36361G	2.30	-58.48	-56.18	-41.20	-14.98
2402MHz	Pass	2.38G	2.4G	AV	2.38496G	2.30	-68.03	-65.73	-41.20	-24.53
2402MHz	Pass	2.4G	2.4835G	AV	2.4835G	2.30	-69.39	-67.09	-41.20	-25.89
2402MHz	Pass	2.4835G	2.5035G	AV	2.50234G	2.30	-68.27	-65.97	-41.20	-24.77
2402MHz	Pass	2.5035G	3G	AV	2.58828G	2.30	-68.09	-65.79	-41.20	-24.59
2402MHz	Pass	1G	2.38G	PK	2.36361G	2.30	-54.64	-52.34	-21.20	-31.14
2402MHz	Pass	2.38G	2.4G	PK	2.38084G	2.30	-57.33	-55.03	-21.20	-33.83
2402MHz	Pass	2.4G	2.4835G	PK	2.4835G	2.30	-59.98	-57.68	-21.20	-36.48
2402MHz	Pass	2.4835G	2.5035G	PK	2.49678G	2.30	-57.04	-54.74	-21.20	-33.54
2402MHz	Pass	2.5035G	3G	PK	2.54682G	2.30	-57.51	-55.21	-21.20	-34.01
2440MHz	Pass	1G	2.38G	AV	2.12022G	2.30	-68.98	-66.68	-41.20	-25.48
2440MHz	Pass	2.38G	2.4G	AV	2.38288G	2.30	-68.39	-66.09	-41.20	-24.89
2440MHz	Pass	2.4G	2.4835G	AV	2.4835G	2.30	-69.51	-67.21	-41.20	-26.01
2440MHz	Pass	2.4835G	2.5035G	AV	2.48938G	2.30	-68.11	-65.81	-41.20	-24.61
2440MHz	Pass	2.5035G	3G	AV	2.60714G	2.30	-68.12	-65.82	-41.20	-24.62
2440MHz	Pass	1G	2.38G	PK	1.06728G	2.30	-55.19	-52.89	-21.20	-31.69
2440MHz	Pass	2.38G	2.4G	PK	2.3826G	2.30	-58.28	-55.98	-21.20	-34.78
2440MHz	Pass	2.4G	2.4835G	PK	2.4835G	2.30	-59.00	-56.70	-21.20	-35.50
2440MHz	Pass	2.4835G	2.5035G	PK	2.48938G	2.30	-56.96	-54.66	-21.20	-33.46
2440MHz	Pass	2.5035G	3G	PK	2.62763G	2.30	-56.41	-54.11	-21.20	-32.91
2480MHz	Pass	1G	2.38G	AV	2.20388G	2.30	-68.79	-66.49	-41.20	-25.29
2480MHz	Pass	2.38G	2.4G	AV	2.38144G	2.30	-68.58	-66.28	-41.20	-25.08
2480MHz	Pass	2.4G	2.4835G	AV	2.4835G	2.30	-69.29	-66.99	-41.20	-25.79
2480MHz	Pass	2.4835G	2.5035G	AV	2.4971G	2.30	-67.86	-65.56	-41.20	-24.36
2480MHz	Pass	2.5035G	3G	AV	2.51827G	2.30	-59.76	-57.46	-41.20	-16.26
2480MHz	Pass	1G	2.38G	PK	1.02639G	2.30	-55.88	-53.58	-21.20	-32.38
2480MHz	Pass	2.38G	2.4G	PK	2.38244G	2.30	-57.69	-55.39	-21.20	-34.19
2480MHz	Pass	2.4G	2.4835G	PK	2.4835G	2.30	-58.57	-56.27	-21.20	-35.07
2480MHz	Pass	2.4835G	2.5035G	PK	2.49582G	2.30	-56.78	-54.48	-21.20	-33.28
2480MHz	Pass	2.5035G	3G	PK	2.51815G	2.30	-53.58	-51.28	-21.20	-30.08
BT-LE(2Mbps)	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	1G	2.38G	AV	2.36361G	2.30	-60.05	-57.75	-41.20	-16.55
2402MHz	Pass	2.38G	2.4G	AV	2.38368G	2.30	-68.08	-65.78	-41.20	-24.58
2402MHz	Pass	2.4G	2.4835G	AV	2.4835G	2.30	-68.96	-66.66	-41.20	-25.46
2402MHz	Pass	2.4835G	2.5035G	AV	2.50314G	2.30	-67.97	-65.67	-41.20	-24.47
2402MHz	Pass	2.5035G	3G	AV	2.59361G	2.30	-68.25	-65.95	-41.20	-24.75
2402MHz	Pass	1G	2.38G	PK	2.36344G	2.30	-54.77	-52.47	-21.20	-31.27
2402MHz	Pass	2.38G	2.4G	PK	2.38792G	2.30	-57.77	-55.47	-21.20	-34.27
2402MHz	Pass	2.4G	2.4835G	PK	2.4835G	2.30	-60.18	-57.88	-21.20	-36.68
2402MHz	Pass	2.4835G	2.5035G	PK	2.49726G	2.30	-56.62	-54.32	-21.20	-33.12
2402MHz	Pass	2.5035G	3G	PK	2.55923G	2.30	-57.68	-55.38	-21.20	-34.18
2440MHz	Pass	1G	2.38G	AV	2.20146G	2.30	-68.86	-66.56	-41.20	-25.36
2440MHz	Pass	2.38G	2.4G	AV	2.38164G	2.30	-68.74	-66.44	-41.20	-25.24
2440MHz	Pass	2.4G	2.4835G	AV	2.4835G	2.30	-68.74	-66.44	-41.20	-25.24
2440MHz	Pass	2.4835G	2.5035G	AV	2.49506G	2.30	-68.29	-65.99	-41.20	-24.79
2440MHz	Pass	2.5035G	3G	AV	2.63793G	2.30	-68.30	-66.00	-41.20	-24.80
2440MHz	Pass	1G	2.38G	PK	1.04209G	2.30	-54.98	-52.68	-21.20	-31.48
2440MHz	Pass	2.38G	2.4G	PK	2.38088G	2.30	-57.02	-54.72	-21.20	-33.52
2440MHz	Pass	2.4G	2.4835G	PK	2.4835G	2.30	-60.00	-57.70	-21.20	-36.50
2440MHz	Pass	2.4835G	2.5035G	PK	2.4975G	2.30	-57.63	-55.33	-21.20	-34.13
2440MHz	Pass	2.5035G	3G	PK	2.61323G	2.30	-57.39	-55.09	-21.20	-33.89
2480MHz	Pass	1G	2.38G	AV	2.3179G	2.30	-68.45	-66.15	-41.20	-24.95
2480MHz	Pass	2.38G	2.4G	AV	2.38748G	2.30	-68.55	-66.25	-41.20	-25.05
2480MHz	Pass	2.4G	2.4835G	AV	2.4835G	2.30	-69.40	-67.10	-41.20	-25.90
2480MHz	Pass	2.4835G	2.5035G	AV	2.49926G	2.30	-67.63	-65.33	-41.20	-24.13
2480MHz	Pass	2.5035G	3G	AV	2.5184G	2.30	-61.75	-59.45	-41.20	-18.25
2480MHz	Pass	1G	2.38G	PK	1.04675G	2.30	-55.45	-53.15	-21.20	-31.95
2480MHz	Pass	2.38G	2.4G	PK	2.3836G	2.30	-57.77	-55.47	-21.20	-34.27
2480MHz	Pass	2.4G	2.4835G	PK	2.4835G	2.30	-59.36	-57.06	-21.20	-35.86
2480MHz	Pass	2.4835G	2.5035G	PK	2.49466G	2.30	-57.06	-54.76	-21.20	-33.56
2480MHz	Pass	2.5035G	3G	PK	2.51827G	2.30	-54.88	-52.58	-21.20	-31.38


DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX

BT-LE(1Mbps)

2402MHz

CSE-DTS [PK]

23/06/2022

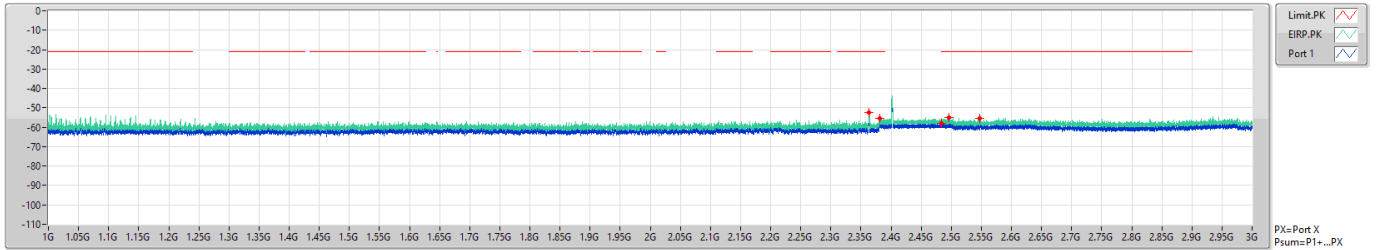


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)
1G	2.38G	1M	PK	2.36361G	-52.56	-21.20	-31.36	2.08	0.00	-54.64	-54.64
2.38G	2.4G	1M	PK	2.38084G	-55.25	-21.20	-34.05	2.08	0.00	-57.33	-57.33
2.4G	2.4835G	1M	PK	2.4835G	-57.90	-21.20	-36.70	2.08	0.00	-59.98	-59.98
2.4835G	2.5035G	1M	PK	2.49678G	-54.96	-21.20	-33.76	2.08	0.00	-57.04	-57.04
2.5035G	3G	1M	PK	2.54682G	-55.43	-21.20	-34.23	2.08	0.00	-57.51	-57.51

BT-LE(1Mbps)

2402MHz

CSE-DTS [AV]

23/06/2022

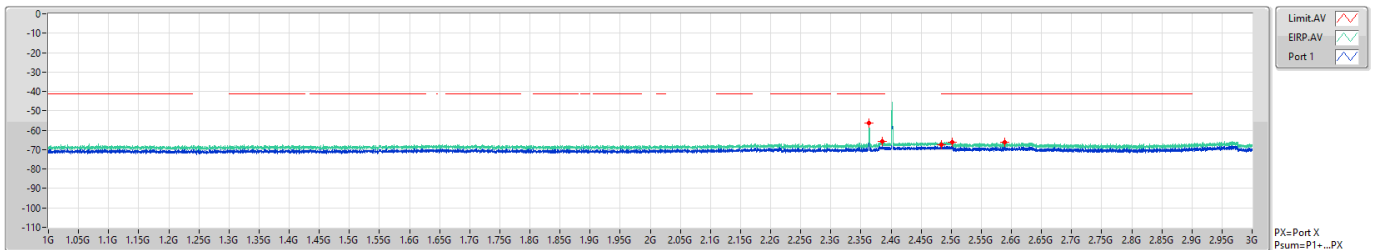


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)
1G	2.38G	1M	AV	2.36361G	-56.40	-41.20	-15.20	2.08	0.00	-58.48	-58.48
2.38G	2.4G	1M	AV	2.38496G	-65.95	-41.20	-24.75	2.08	0.00	-68.03	-68.03
2.4G	2.4835G	1M	AV	2.4835G	-67.31	-41.20	-26.11	2.08	0.00	-69.39	-69.39
2.4835G	2.5035G	1M	AV	2.50234G	-66.19	-41.20	-24.99	2.08	0.00	-68.27	-68.27
2.5035G	3G	1M	AV	2.58828G	-66.01	-41.20	-24.81	2.08	0.00	-68.09	-68.09

BT-LE(1Mbps)

2440MHz

CSE-DTS [PK]

23/06/2022

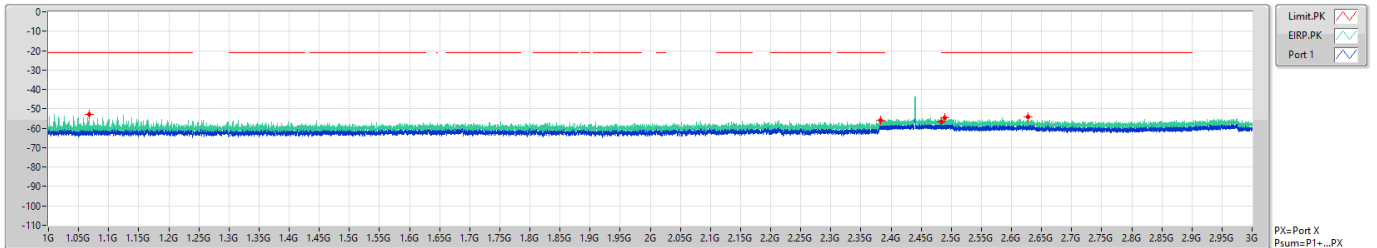


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)
1G	2.38G	1M	PK	1.06728G	-52.89	-21.20	-31.69	2.30	0.00	-55.19	-55.19
2.38G	2.4G	1M	PK	2.3828G	-55.98	-21.20	-34.78	2.30	0.00	-58.28	-58.28
2.4G	2.4835G	1M	PK	2.4835G	-56.70	-21.20	-35.50	2.30	0.00	-59.00	-59.00
2.4835G	2.5035G	1M	PK	2.48938G	-54.66	-21.20	-33.46	2.30	0.00	-56.96	-56.96
2.5035G	3G	1M	PK	2.62763G	-54.11	-21.20	-32.91	2.30	0.00	-56.41	-56.41

BT-LE(1Mbps)

2440MHz

CSE-DTS [AV]

23/06/2022

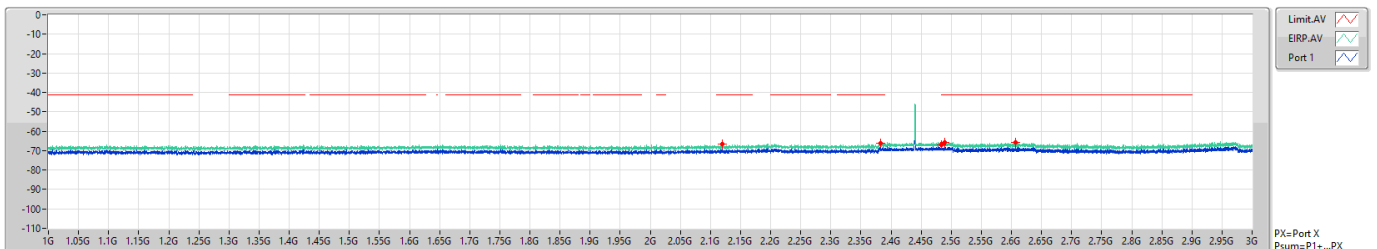


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)
1G	2.38G	1M	AV	2.12022G	-66.68	-41.20	-25.48	2.30	0.00	-68.98	-68.98
2.38G	2.4G	1M	AV	2.38288G	-66.09	-41.20	-24.89	2.30	0.00	-68.39	-68.39
2.4G	2.4835G	1M	AV	2.4835G	-67.21	-41.20	-26.01	2.30	0.00	-69.51	-69.51
2.4835G	2.5035G	1M	AV	2.48938G	-65.81	-41.20	-24.61	2.30	0.00	-68.11	-68.11
2.5035G	3G	1M	AV	2.60714G	-65.82	-41.20	-24.62	2.30	0.00	-68.12	-68.12

BT-LE(1Mbps)

2480MHz

CSE-DTS [PK]

23/06/2022

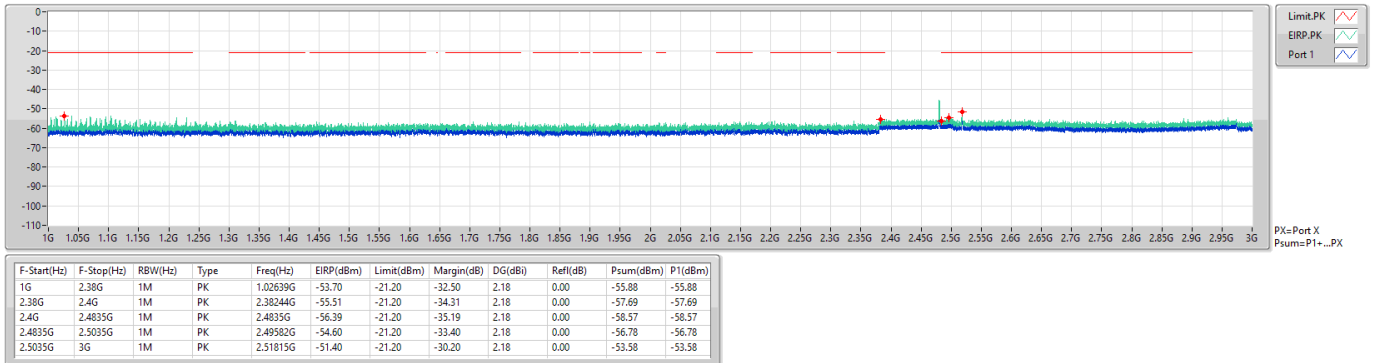


BT-LE(1Mbps)

2480MHz

CSE-DTS [AV]

23/06/2022

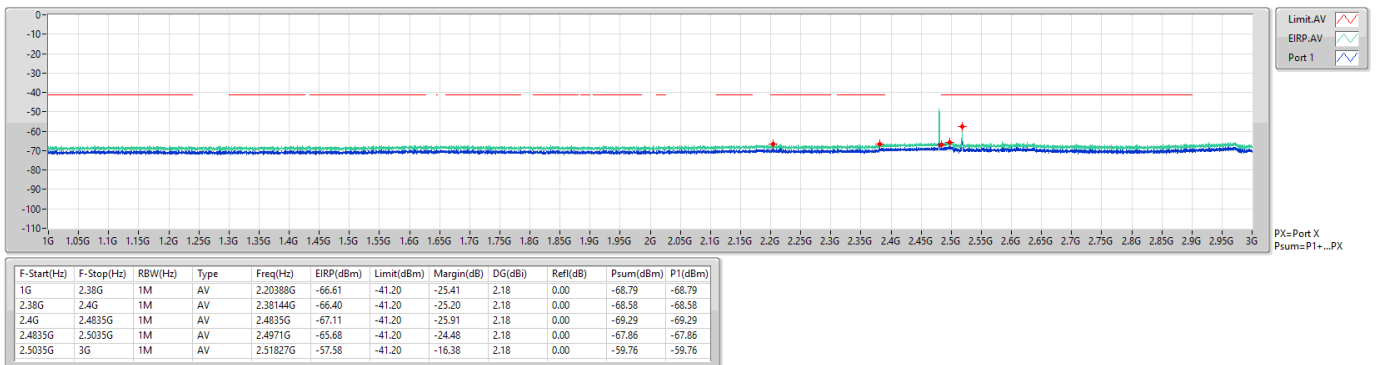

BT-LE(2Mbps)

2402MHz

CSE-DTS [PK]

23/06/2022




BT-LE(2Mbps)

2402MHz

CSE-DTS [AV]

23/06/2022

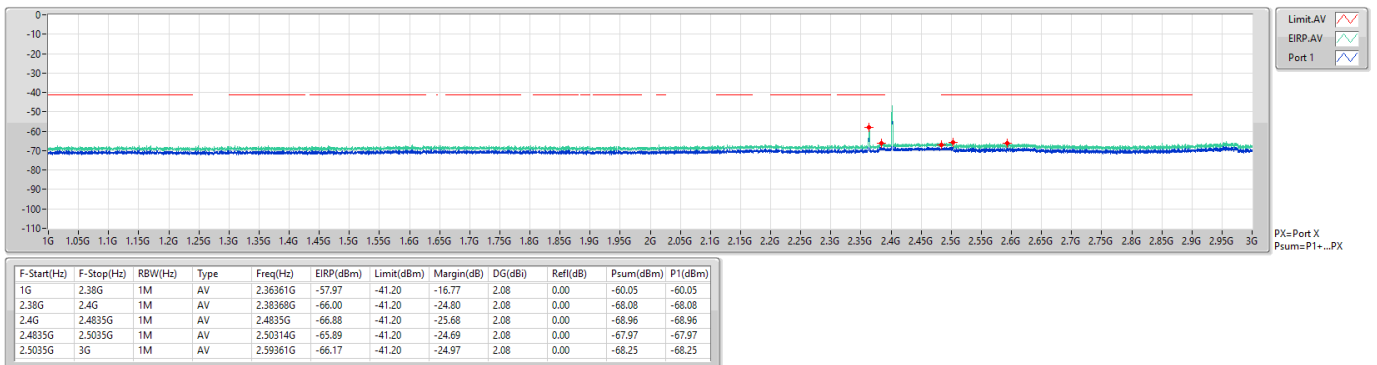


BT-LE(2Mbps)

2440MHz

CSE-DTS [PK]

23/06/2022

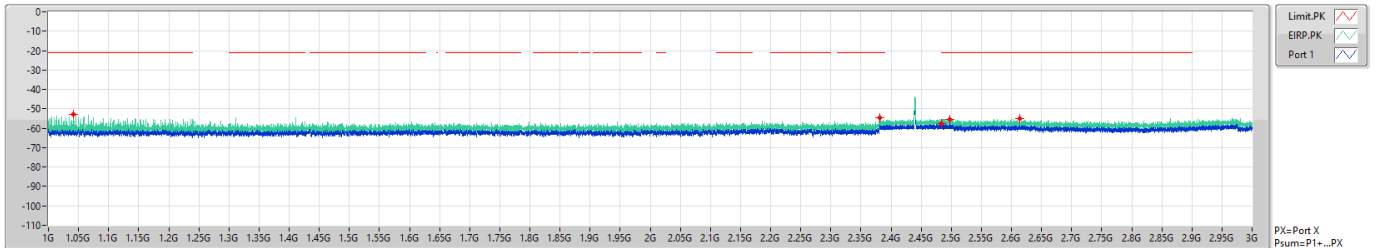


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)
1G	2.38G	1M	PK	1.04209G	-52.68	-21.20	-31.48	2.30	0.00	-54.98	-54.98
2.38G	2.4G	1M	PK	2.38088G	-54.72	-21.20	-33.52	2.30	0.00	-57.02	-57.02
2.4G	2.4835G	1M	PK	2.4835G	-57.70	-21.20	-36.50	2.30	0.00	-60.00	-60.00
2.4835G	2.5035G	1M	PK	2.4975G	-55.33	-21.20	-34.13	2.30	0.00	-57.63	-57.63
2.5035G	3G	1M	PK	2.61323G	-55.09	-21.20	-33.89	2.30	0.00	-57.39	-57.39

BT-LE(2Mbps)

2440MHz

CSE-DTS [AV]

23/06/2022

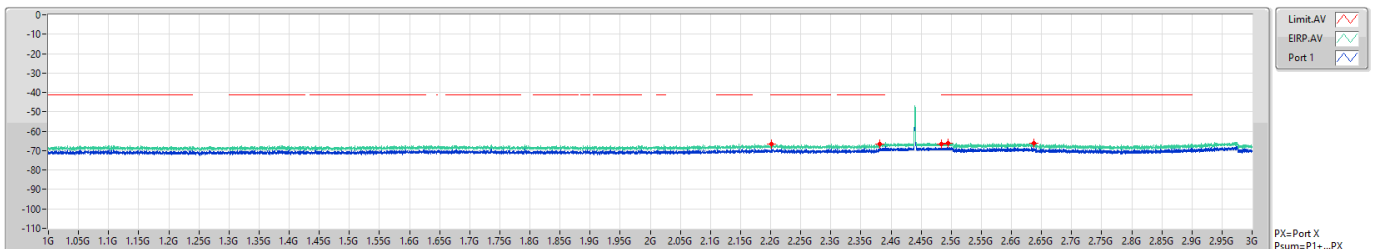


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)
1G	2.38G	1M	AV	2.20146G	-66.56	-41.20	-25.36	2.30	0.00	-68.86	-68.86
2.38G	2.4G	1M	AV	2.38164G	-66.44	-41.20	-25.24	2.30	0.00	-68.74	-68.74
2.4G	2.4835G	1M	AV	2.4835G	-66.44	-41.20	-25.24	2.30	0.00	-68.74	-68.74
2.4835G	2.5035G	1M	AV	2.49506G	-65.99	-41.20	-24.79	2.30	0.00	-68.29	-68.29
2.5035G	3G	1M	AV	2.63793G	-66.00	-41.20	-24.80	2.30	0.00	-68.30	-68.30

BT-LE(2Mbps)

2480MHz

CSE-DTS [PK]

23/06/2022

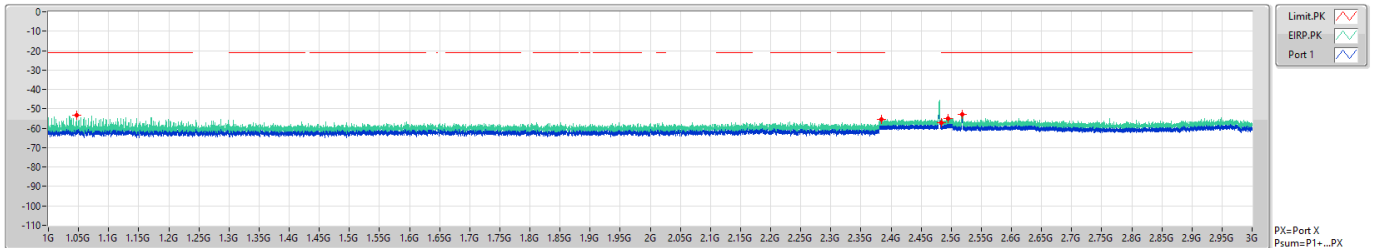


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)
1G	2.38G	1M	PK	1.04675G	-53.27	-21.20	-32.07	2.18	0.00	-55.45	-55.45
2.38G	2.4G	1M	PK	2.3836G	-55.59	-21.20	-34.39	2.18	0.00	-57.77	-57.77
2.4G	2.4835G	1M	PK	2.4835G	-57.18	-21.20	-35.98	2.18	0.00	-59.36	-59.36
2.4835G	2.5035G	1M	PK	2.49466G	-54.88	-21.20	-33.68	2.18	0.00	-57.06	-57.06
2.5035G	3G	1M	PK	2.51827G	-52.70	-21.20	-31.50	2.18	0.00	-54.88	-54.88

BT-LE(2Mbps)

2480MHz

CSE-DTS [AV]

23/06/2022

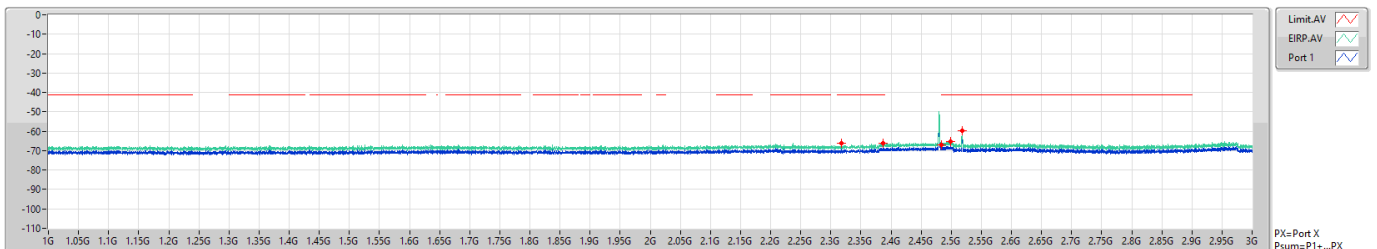

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)
1G	2.38G	1M	AV	2.3179G	-66.27	-41.20	-25.07	2.18	0.00	-68.45	-68.45
2.38G	2.4G	1M	AV	2.38748G	-66.37	-41.20	-25.17	2.18	0.00	-68.55	-68.55
2.4G	2.4835G	1M	AV	2.4835G	-67.22	-41.20	-26.02	2.18	0.00	-69.40	-69.40
2.4835G	2.5035G	1M	AV	2.49926G	-65.45	-41.20	-24.25	2.18	0.00	-67.63	-67.63
2.5035G	3G	1M	AV	2.5184G	-59.57	-41.20	-18.37	2.18	0.00	-61.75	-61.75



For Conducted Harmonic (3~25GHz):

Summary

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	3G	7.5G	AV	5.18644G	2.18	-59.47	-57.29	-41.20	-16.09
BT-LE(2Mbps)	Pass	7.5G	25G	AV	16.02688G	2.18	-66.99	-64.81	-41.20	-23.61

DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX

Result

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	3G	7.5G	AV	4.80394G	2.18	-70.12	-67.94	-41.20	-26.74
2402MHz	Pass	7.5G	25G	AV	20.39094G	2.18	-67.40	-65.22	-41.20	-24.02
2402MHz	Pass	3G	7.5G	PK	4.80394G	2.18	-61.73	-59.55	-21.20	-38.35
2402MHz	Pass	3G	7.5G	PK	5.44406G	2.18	-61.10	-58.92	-21.20	-37.72
2402MHz	Pass	7.5G	25G	PK	20.39531G	2.18	-58.30	-56.12	-21.20	-34.92
2440MHz	Pass	3G	7.5G	AV	4.87988G	2.18	-71.56	-69.38	-41.20	-28.18
2440MHz	Pass	3G	7.5G	AV	5.18644G	2.18	-59.47	-57.29	-41.20	-16.09
2440MHz	Pass	7.5G	25G	AV	20.39531G	2.18	-67.35	-65.17	-41.20	-23.97
2440MHz	Pass	3G	7.5G	PK	4.87988G	2.18	-63.22	-61.04	-21.20	-39.84
2440MHz	Pass	3G	7.5G	PK	7.31944G	2.18	-60.11	-57.93	-21.20	-36.73
2440MHz	Pass	7.5G	25G	PK	19.91625G	2.18	-58.14	-55.96	-21.20	-34.76
2480MHz	Pass	3G	7.5G	AV	4.95975G	2.18	-71.53	-69.35	-41.20	-28.15
2480MHz	Pass	3G	7.5G	AV	7.44094G	2.18	-69.82	-67.64	-41.20	-26.44
2480MHz	Pass	7.5G	25G	AV	20.39094G	2.18	-67.57	-65.39	-41.20	-24.19
2480MHz	Pass	3G	7.5G	PK	4.95975G	2.18	-62.71	-60.53	-21.20	-39.33
2480MHz	Pass	3G	7.5G	PK	7.44094G	2.18	-61.11	-58.93	-21.20	-37.73
2480MHz	Pass	7.5G	25G	PK	20.3975G	2.18	-56.66	-54.48	-21.20	-33.28
BT-LE(2Mbps)	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	3G	7.5G	AV	4.80394G	2.18	-72.12	-69.94	-41.20	-28.74
2402MHz	Pass	3G	7.5G	AV	5.45138G	2.18	-71.09	-68.91	-41.20	-27.71
2402MHz	Pass	7.5G	25G	AV	16.02688G	2.18	-66.99	-64.81	-41.20	-23.61
2402MHz	Pass	3G	7.5G	PK	4.2195G	2.18	-60.83	-58.65	-21.20	-37.45
2402MHz	Pass	3G	7.5G	PK	4.80506G	2.18	-63.27	-61.09	-21.20	-39.89
2402MHz	Pass	7.5G	25G	PK	20.37125G	2.18	-57.42	-55.24	-21.20	-34.04
2440MHz	Pass	3G	7.5G	AV	4.881G	2.18	-71.60	-69.42	-41.20	-28.22
2440MHz	Pass	3G	7.5G	AV	7.31888G	2.18	-67.98	-65.80	-41.20	-24.60
2440MHz	Pass	7.5G	25G	AV	20.39094G	2.18	-67.06	-64.88	-41.20	-23.68
2440MHz	Pass	3G	7.5G	PK	4.881G	2.18	-63.36	-61.18	-21.20	-39.98
2440MHz	Pass	3G	7.5G	PK	7.32169G	2.18	-59.26	-57.08	-21.20	-35.88
2440MHz	Pass	7.5G	25G	PK	15.94375G	2.18	-58.08	-55.90	-21.20	-34.70
2480MHz	Pass	3G	7.5G	AV	4.95975G	2.18	-71.69	-69.51	-41.20	-28.31
2480MHz	Pass	3G	7.5G	AV	7.4415G	2.18	-71.11	-68.93	-41.20	-27.73
2480MHz	Pass	7.5G	25G	AV	16.0063G	2.18	-67.49	-65.31	-41.20	-24.11
2480MHz	Pass	3G	7.5G	PK	4.95919G	2.18	-63.28	-61.10	-21.20	-39.90
2480MHz	Pass	3G	7.5G	PK	5.45363G	2.18	-60.55	-58.37	-21.20	-37.17
2480MHz	Pass	7.5G	25G	PK	16.04438G	2.18	-58.24	-56.06	-21.20	-34.86


DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX

BT-LE(1Mbps)

2402MHz

CSE-DTS [PK]

23/06/2022

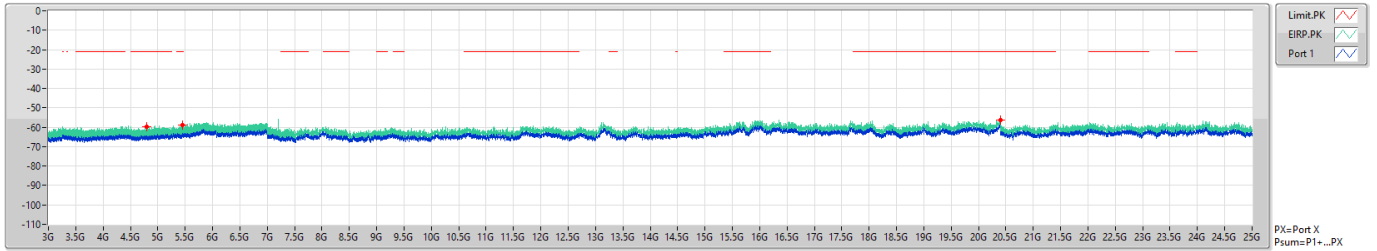


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)
3G	7.5G	1M	PK	4.80394G	-59.65	-21.20	-38.45	2.08	0.00	-61.73	-61.73
3G	7.5G	1M	PK	5.44406G	-59.02	-21.20	-37.82	2.08	0.00	-61.10	-61.10
7.5G	25G	1M	PK	20.39531G	-56.22	-21.20	-35.02	2.08	0.00	-58.30	-58.30

BT-LE(1Mbps)

2402MHz

CSE-DTS [AV]

23/06/2022

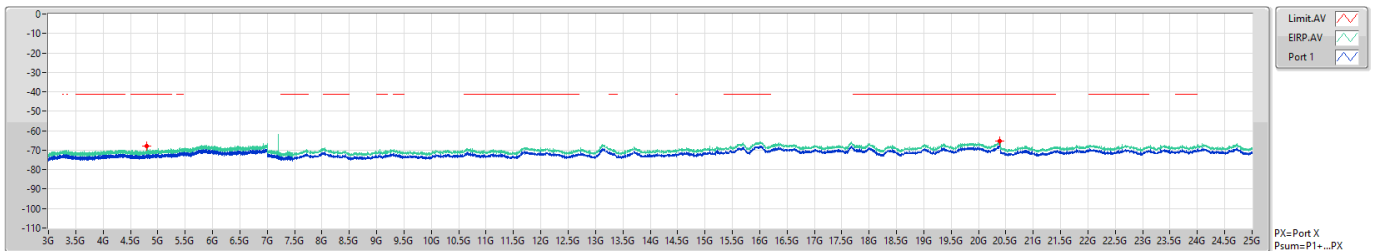


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)
3G	7.5G	1M	AV	4.80394G	-68.04	-41.20	-26.84	2.08	0.00	-70.12	-70.12
7.5G	25G	1M	AV	20.39094G	-65.32	-41.20	-24.12	2.08	0.00	-67.40	-67.40

BT-LE(1Mbps)

2440MHz

CSE-DTS [PK]

23/06/2022

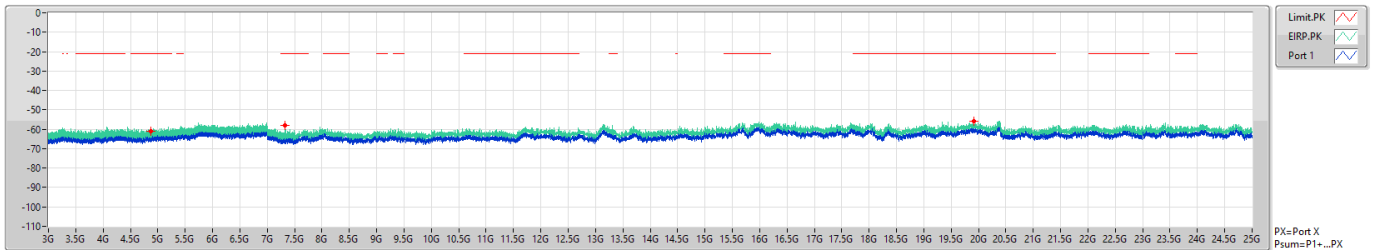


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dBi)	Ref(dB)	Psum(dBm)	P1(dBm)
3G	7.5G	1M	PK	4.87988G	-60.92	-21.20	-39.72	2.30	0.00	-63.22	-63.22
3G	7.5G	1M	PK	7.31944G	-57.81	-21.20	-36.61	2.30	0.00	-60.11	-60.11
7.5G	25G	1M	PK	19.91625G	-55.84	-21.20	-34.64	2.30	0.00	-58.14	-58.14

BT-LE(1Mbps)

2440MHz

CSE-DTS [AV]

23/06/2022

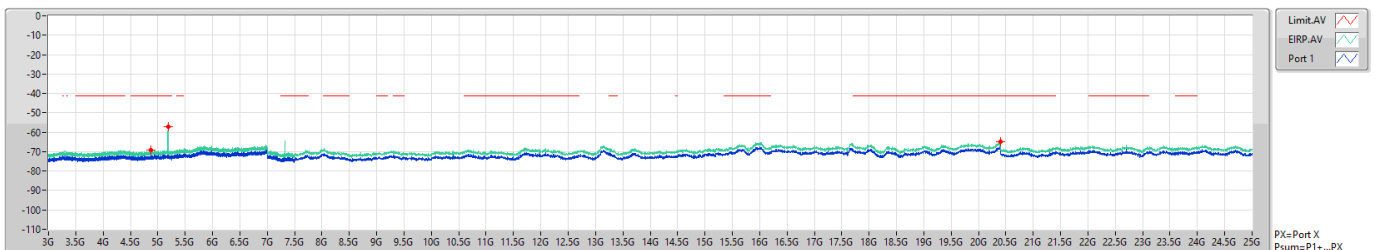


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dBi)	Ref(dB)	Psum(dBm)	P1(dBm)
3G	7.5G	1M	AV	4.87988G	-69.26	-41.20	-28.06	2.30	0.00	-71.56	-71.56
3G	7.5G	1M	AV	5.18644G	-57.17	-41.20	-15.97	2.30	0.00	-59.47	-59.47
7.5G	25G	1M	AV	20.39331G	-65.05	-41.20	-23.85	2.30	0.00	-67.35	-67.35

BT-LE(1Mbps)

2480MHz

CSE-DTS [PK]

23/06/2022

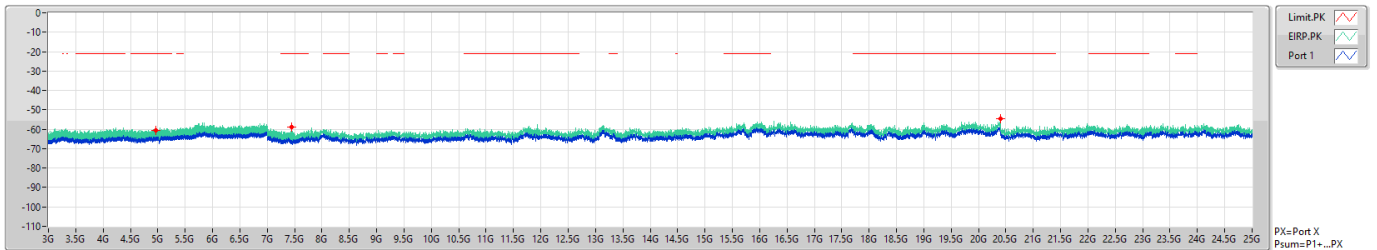


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)
3G	7.5G	1M	PK	4.95975G	-60.53	-21.20	-39.33	2.18	0.00	-62.71	-62.71
3G	7.5G	1M	PK	7.44094G	-58.93	-21.20	-37.73	2.18	0.00	-61.11	-61.11
7.5G	25G	1M	PK	20.3975G	-54.48	-21.20	-33.28	2.18	0.00	-56.66	-56.66

BT-LE(1Mbps)

2480MHz

CSE-DTS [AV]

23/06/2022

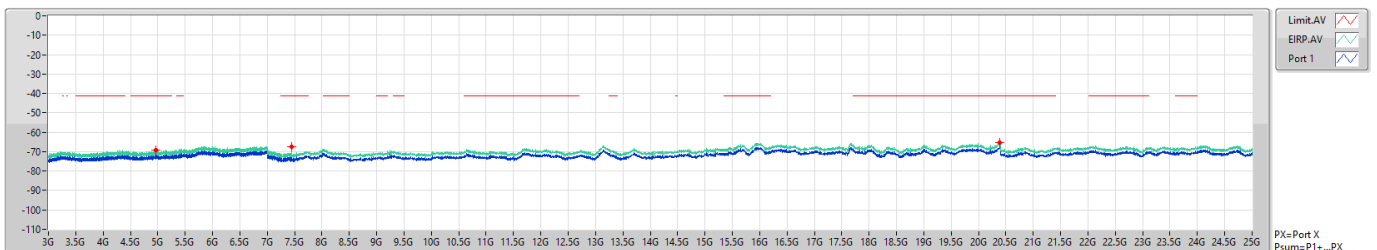


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)
3G	7.5G	1M	AV	4.95975G	-69.35	-41.20	-28.15	2.18	0.00	-71.53	-71.53
3G	7.5G	1M	AV	7.44094G	-67.64	-41.20	-26.44	2.18	0.00	-69.82	-69.82
7.5G	25G	1M	AV	20.39094G	-65.39	-41.20	-24.19	2.18	0.00	-67.57	-67.57

BT-LE(2Mbps)

2402MHz

CSE-DTS [PK]

23/06/2022

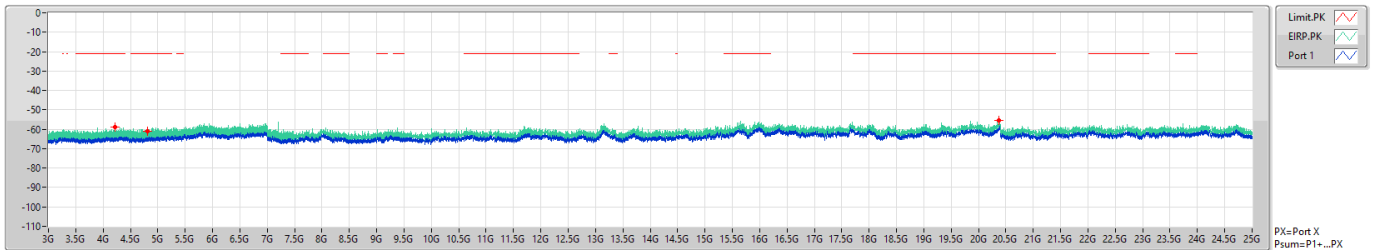


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dBi)	Ref(dB)	Psum(dBm)	P1(dBm)
3G	7.5G	1M	PK	4.2195G	-58.75	-21.20	-37.55	2.08	0.00	-60.83	-60.83
3G	7.5G	1M	PK	4.80506G	-61.19	-21.20	-39.99	2.08	0.00	-63.27	-63.27
7.5G	25G	1M	PK	20.37125G	-55.34	-21.20	-34.14	2.08	0.00	-57.42	-57.42

BT-LE(2Mbps)

2402MHz

CSE-DTS [AV]

23/06/2022

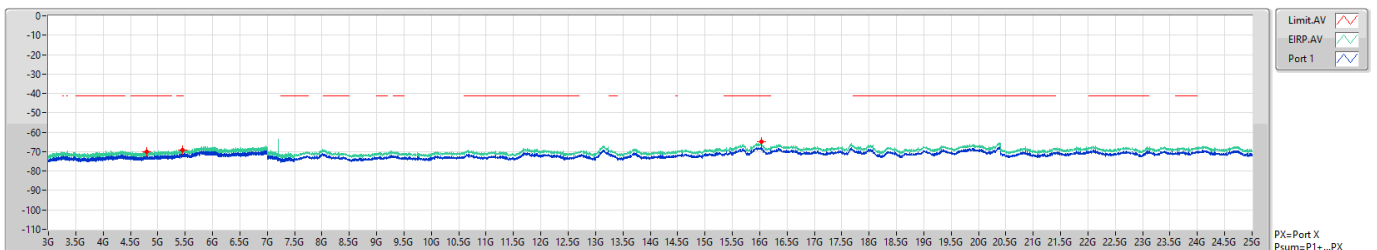


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dBi)	Ref(dB)	Psum(dBm)	P1(dBm)
3G	7.5G	1M	AV	4.80394G	-70.04	-41.20	-28.84	2.08	0.00	-72.12	-72.12
3G	7.5G	1M	AV	5.45138G	-69.01	-41.20	-27.81	2.08	0.00	-71.09	-71.09
7.5G	25G	1M	AV	16.02688G	-64.91	-41.20	-23.71	2.08	0.00	-66.99	-66.99

BT-LE(2Mbps)

2440MHz

CSE-DTS [PK]

23/06/2022

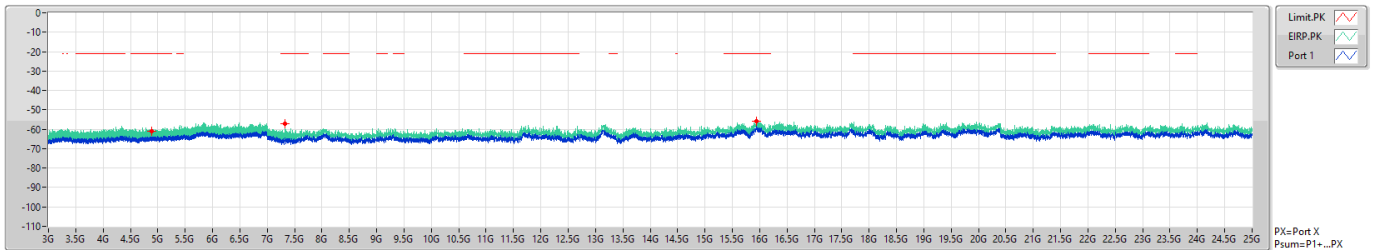


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dBi)	Ref(dB)	Psum(dBm)	P1(dBm)
3G	7.5G	1M	PK	4.881G	-61.06	-21.20	-39.86	2.30	0.00	-63.36	-63.36
3G	7.5G	1M	PK	7.32169G	-56.96	-21.20	-35.76	2.30	0.00	-59.26	-59.26
7.5G	25G	1M	PK	15.94375G	-55.78	-21.20	-34.58	2.30	0.00	-58.08	-58.08

BT-LE(2Mbps)

2440MHz

CSE-DTS [AV]

23/06/2022

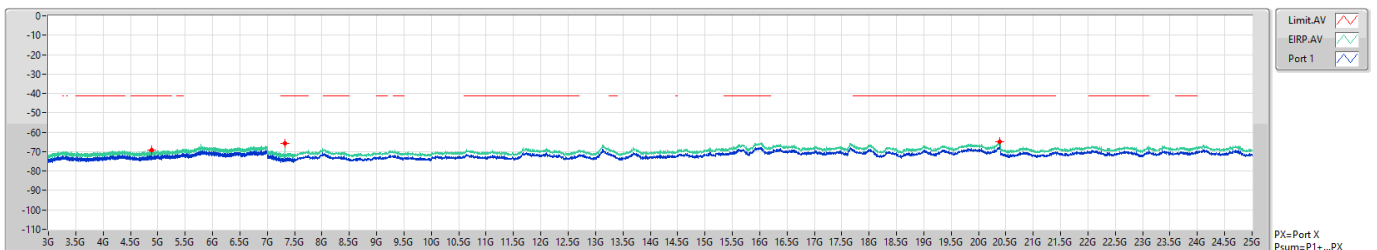


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dBi)	Ref(dB)	Psum(dBm)	P1(dBm)
3G	7.5G	1M	AV	4.881G	-69.30	-41.20	-28.10	2.30	0.00	-71.60	-71.60
3G	7.5G	1M	AV	7.31888G	-65.68	-41.20	-24.48	2.30	0.00	-67.98	-67.98
7.5G	25G	1M	AV	20.39094G	-64.76	-41.20	-23.56	2.30	0.00	-67.06	-67.06

BT-LE(2Mbps)

2480MHz

CSE-DTS [PK]

23/06/2022

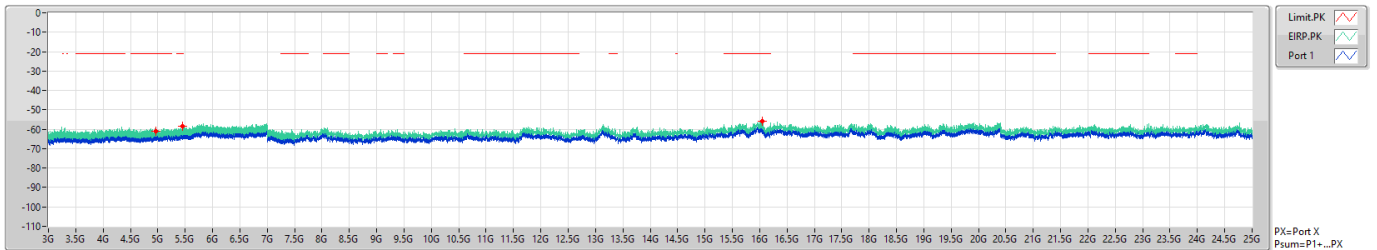


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)
3G	7.5G	1M	PK	4.95919G	-61.10	-21.20	-39.90	2.18	0.00	-63.28	-63.28
3G	7.5G	1M	PK	5.45363G	-58.37	-21.20	-37.17	2.18	0.00	-60.55	-60.55
7.5G	25G	1M	PK	16.04438G	-56.06	-21.20	-34.86	2.18	0.00	-58.24	-58.24

BT-LE(2Mbps)

2480MHz

CSE-DTS [AV]

23/06/2022

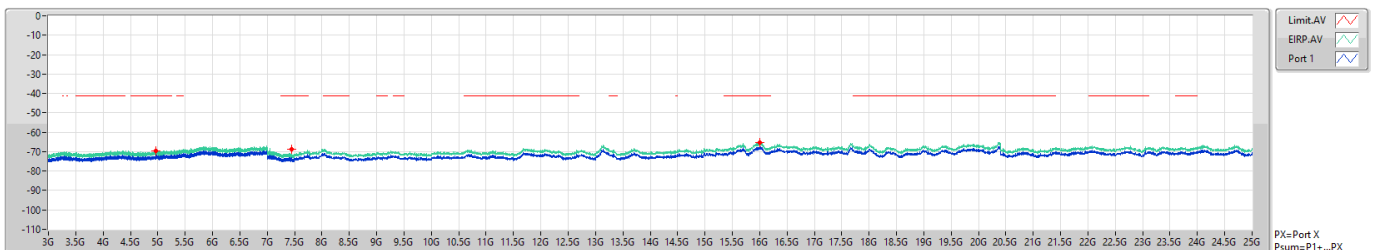

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)
3G	7.5G	1M	AV	4.95975G	-69.51	-41.20	-28.31	2.18	0.00	-71.69	-71.69
3G	7.5G	1M	AV	7.4415G	-68.93	-41.20	-27.73	2.18	0.00	-71.11	-71.11
7.5G	25G	1M	AV	16.00063G	-65.31	-41.20	-24.11	2.18	0.00	-67.49	-67.49

**For Conducted Bandedge:****Summary**

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	2.4835G	2.5035G	AV	2.48366G	2.18	-54.02	-51.84	-41.20	-10.64
BT-LE(2Mbps)	Pass	2.4G	2.4835G	AV	2.4835G	2.18	-49.71	-47.53	-41.20	-6.33

DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX

Result

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	1G	2.38G	AV	2.36361G	2.18	-57.82	-55.64	-41.20	-14.44
2402MHz	Pass	2.38G	2.4G	AV	2.38992G	2.18	-66.87	-64.69	-41.20	-23.49
2402MHz	Pass	2.4G	2.4835G	AV	2.4835G	2.18	-69.53	-67.35	-41.20	-26.15
2402MHz	Pass	2.4835G	2.5035G	AV	2.49758G	2.18	-68.07	-65.89	-41.20	-24.69
2402MHz	Pass	2.5035G	2.9G	AV	2.8997G	2.18	-68.24	-66.06	-41.20	-24.86
2402MHz	Pass	1G	2.38G	PK	2.36379G	2.18	-54.04	-51.86	-21.20	-30.66
2402MHz	Pass	2.38G	2.4G	PK	2.38972G	2.18	-56.55	-54.37	-21.20	-33.17
2402MHz	Pass	2.4G	2.4835G	PK	2.4835G	2.18	-60.39	-58.21	-21.20	-37.01
2402MHz	Pass	2.4835G	2.5035G	PK	2.49894G	2.18	-57.12	-54.94	-21.20	-33.74
2402MHz	Pass	2.5035G	2.9G	PK	2.6172G	2.18	-56.78	-54.60	-21.20	-33.40
2440MHz	Pass	1G	2.38G	AV	2.27512G	2.18	-68.97	-66.79	-41.20	-25.59
2440MHz	Pass	2.38G	2.4G	AV	2.387G	2.18	-68.64	-66.46	-41.20	-25.26
2440MHz	Pass	2.4G	2.4835G	AV	2.4835G	2.18	-69.50	-67.32	-41.20	-26.12
2440MHz	Pass	2.4835G	2.5035G	AV	2.48638G	2.18	-68.13	-65.95	-41.20	-24.75
2440MHz	Pass	2.5035G	2.9G	AV	2.59668G	2.18	-68.20	-66.02	-41.20	-24.82
2440MHz	Pass	1G	2.38G	PK	1.0119G	2.18	-55.53	-53.35	-21.20	-32.15
2440MHz	Pass	2.38G	2.4G	PK	2.3846G	2.18	-57.72	-55.54	-21.20	-34.34
2440MHz	Pass	2.4G	2.4835G	PK	2.4835G	2.18	-60.19	-58.01	-21.20	-36.81
2440MHz	Pass	2.4835G	2.5035G	PK	2.50038G	2.18	-56.94	-54.76	-21.20	-33.56
2440MHz	Pass	2.5035G	2.9G	PK	2.60907G	2.18	-57.56	-55.38	-21.20	-34.18
2480MHz	Pass	1G	2.38G	AV	1.96738G	2.18	-69.26	-67.08	-41.20	-25.88
2480MHz	Pass	2.38G	2.4G	AV	2.38936G	2.18	-68.81	-66.63	-41.20	-25.43
2480MHz	Pass	2.4G	2.4835G	AV	2.4835G	2.18	-54.08	-51.90	-41.20	-10.70
2480MHz	Pass	2.4835G	2.5035G	AV	2.48366G	2.18	-54.02	-51.84	-41.20	-10.64
2480MHz	Pass	2.5035G	2.9G	AV	2.51847G	2.18	-57.77	-55.59	-41.20	-14.39
2480MHz	Pass	1G	2.38G	PK	1.02657G	2.18	-56.46	-54.28	-21.20	-33.08
2480MHz	Pass	2.38G	2.4G	PK	2.38252G	2.18	-57.60	-55.42	-21.20	-34.22
2480MHz	Pass	2.4G	2.4835G	PK	2.4835G	2.18	-44.47	-42.29	-21.20	-21.09
2480MHz	Pass	2.4835G	2.5035G	PK	2.48354G	2.18	-43.84	-41.66	-21.20	-20.46
2480MHz	Pass	2.5035G	2.9G	PK	2.51807G	2.18	-53.53	-51.35	-21.20	-30.15
BT-LE(2Mbps)	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	1G	2.38G	AV	2.36361G	2.18	-59.21	-57.03	-41.20	-15.83
2402MHz	Pass	2.38G	2.4G	AV	2.38992G	2.18	-65.77	-63.59	-41.20	-22.39
2402MHz	Pass	2.4G	2.4835G	AV	2.4835G	2.18	-69.70	-67.52	-41.20	-26.32
2402MHz	Pass	2.4835G	2.5035G	AV	2.48434G	2.18	-68.35	-66.17	-41.20	-24.97
2402MHz	Pass	2.5035G	2.9G	AV	2.58805G	2.18	-68.37	-66.19	-41.20	-24.99
2402MHz	Pass	1G	2.38G	PK	2.36396G	2.18	-53.73	-51.55	-21.20	-30.35
2402MHz	Pass	2.38G	2.4G	PK	2.38968G	2.18	-55.21	-53.03	-21.20	-31.83
2402MHz	Pass	2.4G	2.4835G	PK	2.4835G	2.18	-60.57	-58.39	-21.20	-37.19
2402MHz	Pass	2.4835G	2.5035G	PK	2.49026G	2.18	-57.19	-55.01	-21.20	-33.81
2402MHz	Pass	2.5035G	2.9G	PK	2.6167G	2.18	-57.62	-55.44	-21.20	-34.24
2440MHz	Pass	1G	2.38G	AV	2.21181G	2.18	-68.81	-66.63	-41.20	-25.43
2440MHz	Pass	2.38G	2.4G	AV	2.38488G	2.18	-68.45	-66.27	-41.20	-25.07
2440MHz	Pass	2.4G	2.4835G	AV	2.4835G	2.18	-69.62	-67.44	-41.20	-26.24
2440MHz	Pass	2.4835G	2.5035G	AV	2.48514G	2.18	-67.70	-65.52	-41.20	-24.32
2440MHz	Pass	2.5035G	2.9G	AV	2.53383G	2.18	-68.41	-66.23	-41.20	-25.03
2440MHz	Pass	1G	2.38G	PK	1.02208G	2.18	-55.82	-53.64	-21.20	-32.44
2440MHz	Pass	2.38G	2.4G	PK	2.38004G	2.18	-56.97	-54.79	-21.20	-33.59
2440MHz	Pass	2.4G	2.4835G	PK	2.4835G	2.18	-60.29	-58.11	-21.20	-36.91
2440MHz	Pass	2.4835G	2.5035G	PK	2.49106G	2.18	-57.50	-55.32	-21.20	-34.12
2440MHz	Pass	2.5035G	2.9G	PK	2.60649G	2.18	-57.83	-55.65	-21.20	-34.45
2480MHz	Pass	1G	2.38G	AV	1.7659G	2.18	-69.04	-66.86	-41.20	-25.66
2480MHz	Pass	2.38G	2.4G	AV	2.38744G	2.18	-68.89	-66.71	-41.20	-25.51
2480MHz	Pass	2.4G	2.4835G	AV	2.4835G	2.18	-49.71	-47.53	-41.20	-6.33
2480MHz	Pass	2.4835G	2.5035G	AV	2.4835G	2.18	-50.29	-48.11	-41.20	-6.91
2480MHz	Pass	2.5035G	2.9G	AV	2.51827G	2.18	-60.18	-58.00	-41.20	-16.80
2480MHz	Pass	1G	2.38G	PK	1.06314G	2.18	-55.64	-53.46	-21.20	-32.26
2480MHz	Pass	2.38G	2.4G	PK	2.38632G	2.18	-57.38	-55.20	-21.20	-34.00
2480MHz	Pass	2.4G	2.4835G	PK	2.4835G	2.18	-39.98	-37.80	-21.20	-16.60
2480MHz	Pass	2.4835G	2.5035G	PK	2.48374G	2.18	-39.00	-36.82	-21.20	-15.62
2480MHz	Pass	2.5035G	2.9G	PK	2.51777G	2.18	-54.34	-52.16	-21.20	-30.96


DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX

BT-LE(1Mbps)

2402MHz

CSE-DTS [PK]

23/06/2022

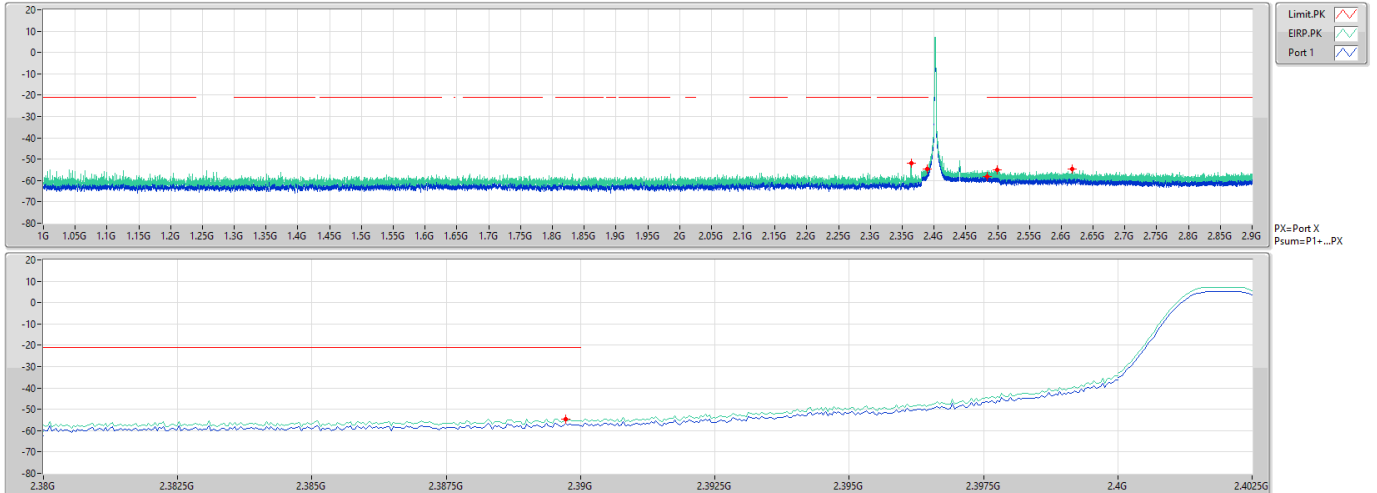


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	ERP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)
1G	2.38G	1M	PK	2.36379G	-51.96	-21.20	-30.76	2.08	0.00	-54.04	-54.04
2.38G	2.4G	1M	PK	2.38972G	-54.47	-21.20	-33.27	2.08	0.00	-56.55	-56.55
2.4G	2.4835G	1M	PK	2.4835G	-58.31	-21.20	-37.11	2.08	0.00	-60.39	-60.39
2.4835G	2.5035G	1M	PK	2.49894G	-55.04	-21.20	-33.84	2.08	0.00	-57.12	-57.12
2.5035G	2.9G	1M	PK	2.6172G	-54.70	-21.20	-33.50	2.08	0.00	-56.78	-56.78

BT-LE(1Mbps)

2402MHz

CSE-DTS [AV]

23/06/2022

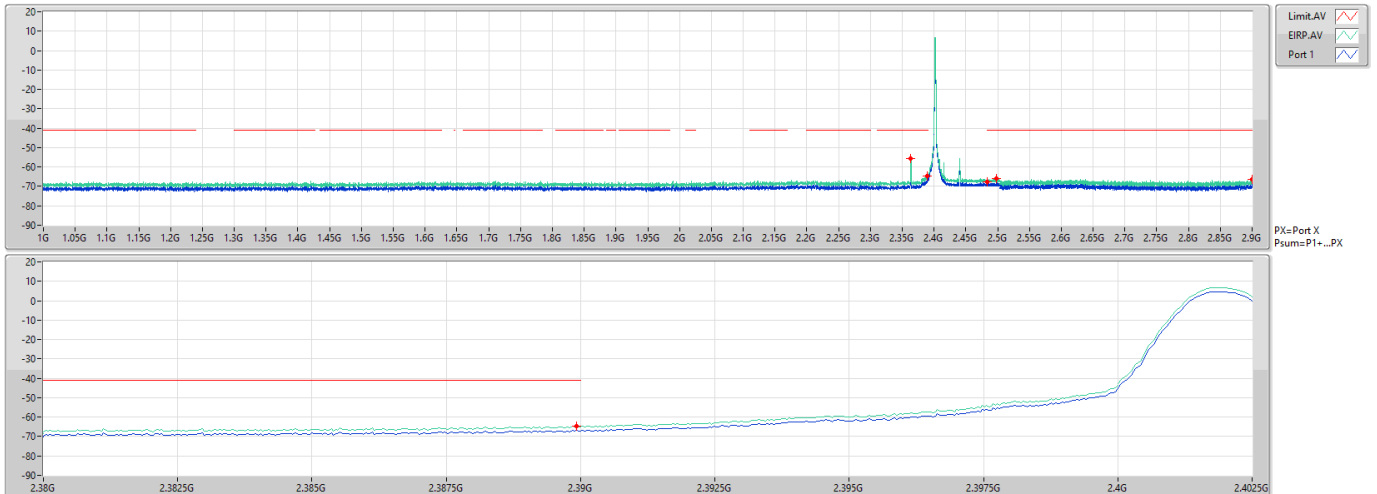


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	ERP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)
1G	2.38G	1M	AV	2.36361G	-55.74	-41.20	-14.54	2.08	0.00	-57.82	-57.82
2.38G	2.4G	1M	AV	2.38992G	-64.79	-41.20	-23.59	2.08	0.00	-66.87	-66.87
2.4G	2.4835G	1M	AV	2.4835G	-67.45	-41.20	-26.25	2.08	0.00	-69.53	-69.53
2.4835G	2.5035G	1M	AV	2.49758G	-65.99	-41.20	-24.79	2.08	0.00	-68.07	-68.07
2.5035G	2.9G	1M	AV	2.8997G	-66.16	-41.20	-24.96	2.08	0.00	-68.24	-68.24

BT-LE(1Mbps)

CSE-DTS [PK]


2440MHz

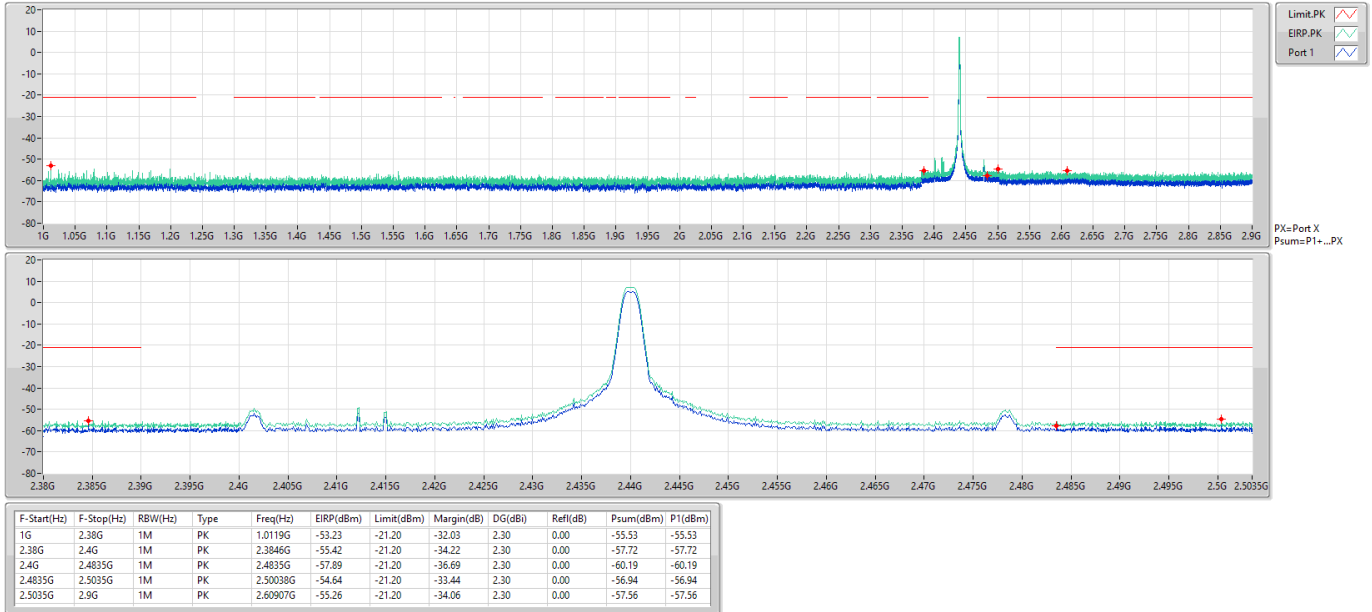

BT-LE(1Mbps)

CSE-DTS [AV]


2440MHz

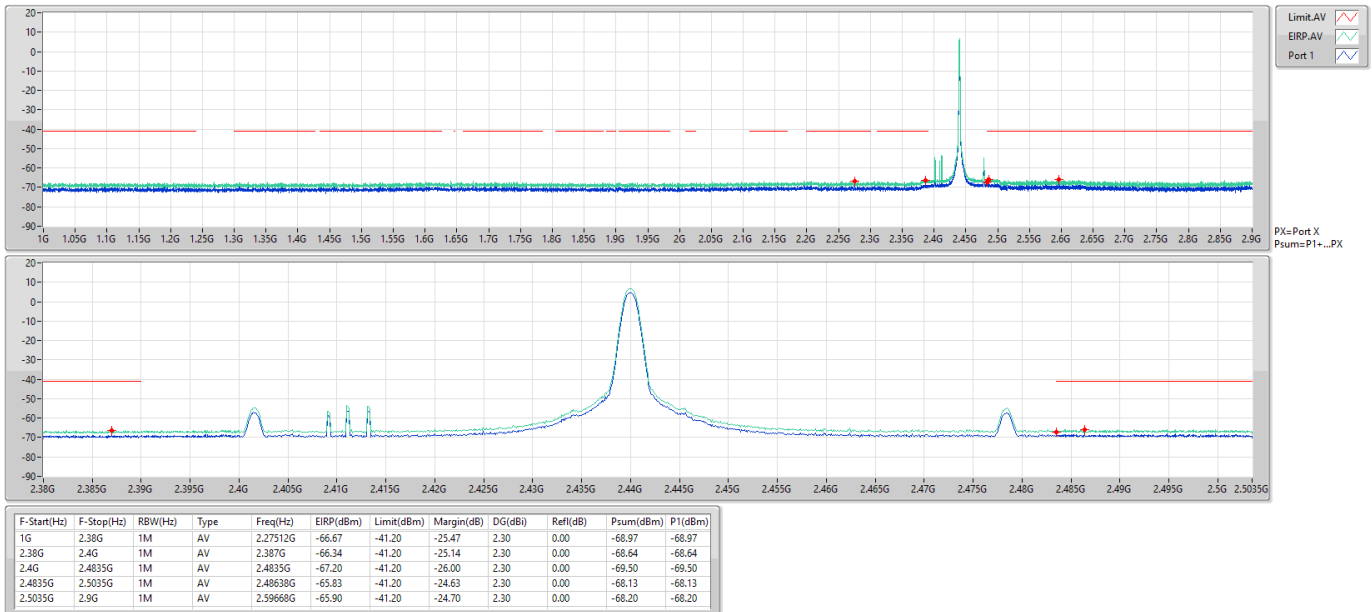

BT-LE(1Mbps)

CSE-DTS [PK]


2480MHz

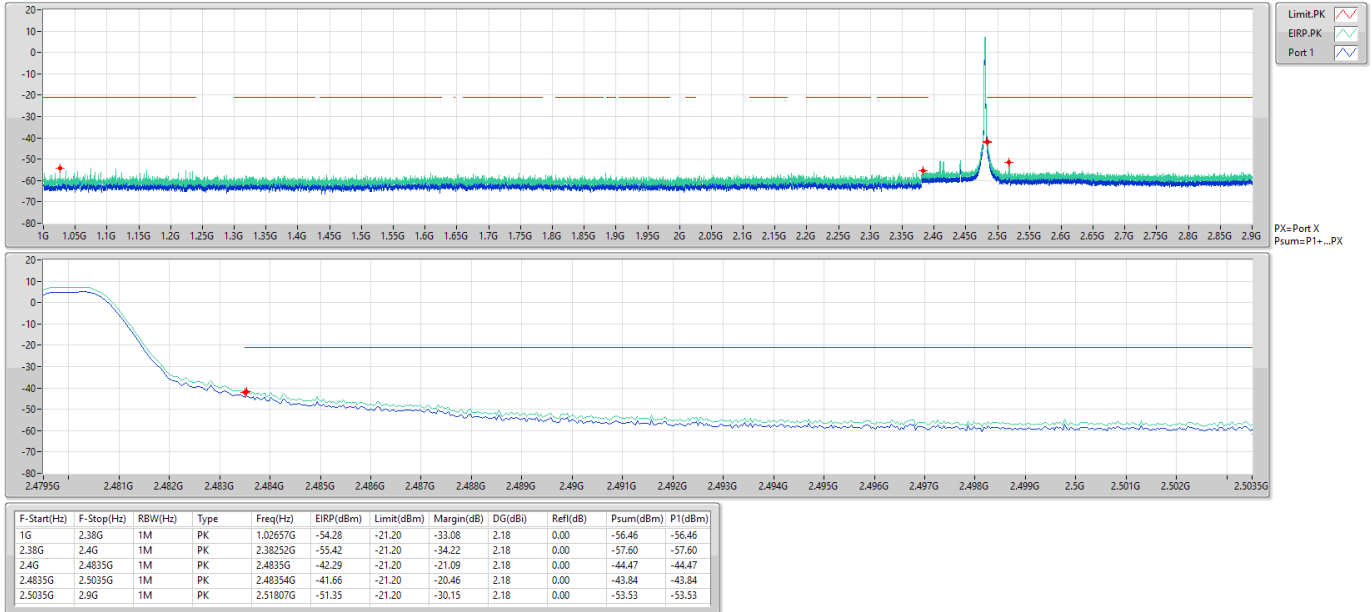

BT-LE(1Mbps)

CSE-DTS [AV]

2480MHz

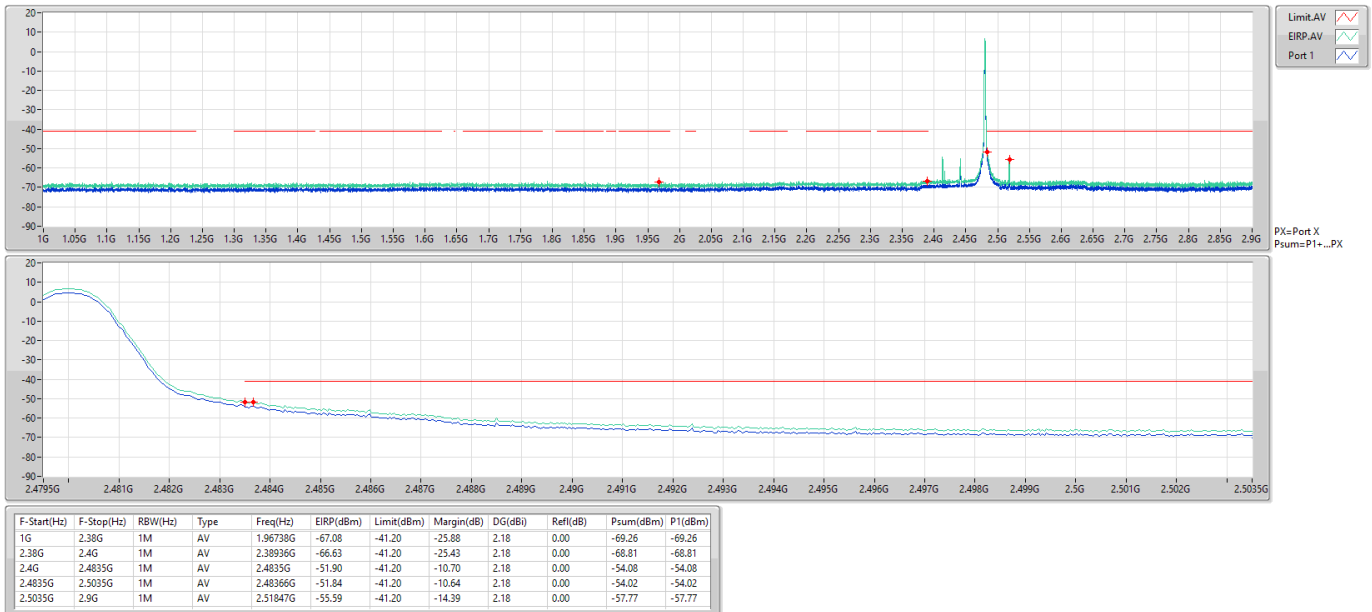

BT-LE(2Mbps)

CSE-DTS [PK]


2402MHz



BT-LE(2Mbps)

CSE-DTS [AV]


2402MHz

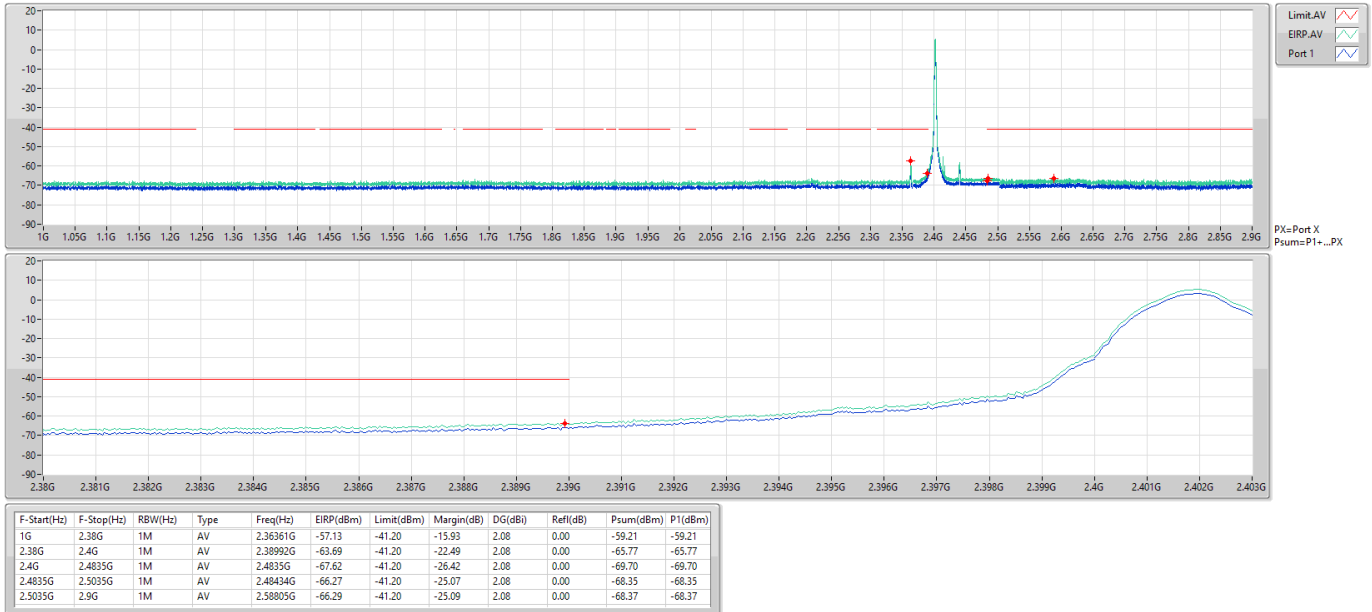

BT-LE(2Mbps)

CSE-DTS [PK]


2440MHz

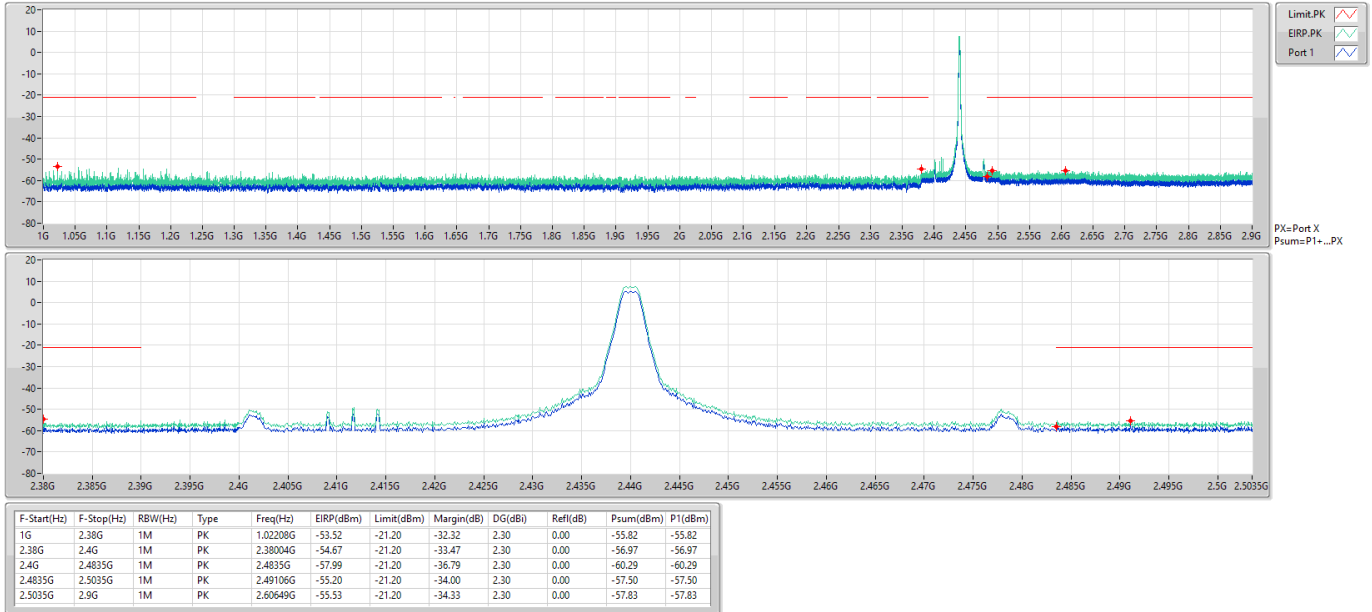

BT-LE(2Mbps)

CSE-DTS [AV]


2440MHz

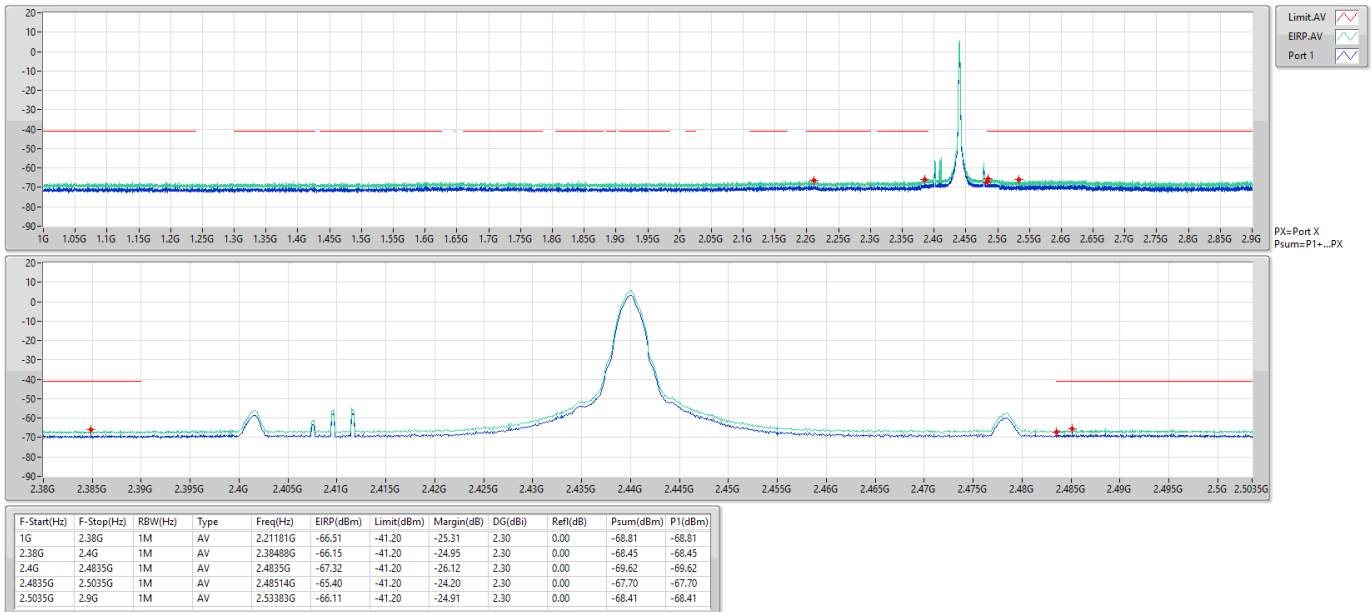

BT-LE(2Mbps)

CSE-DTS [PK]

2480MHz

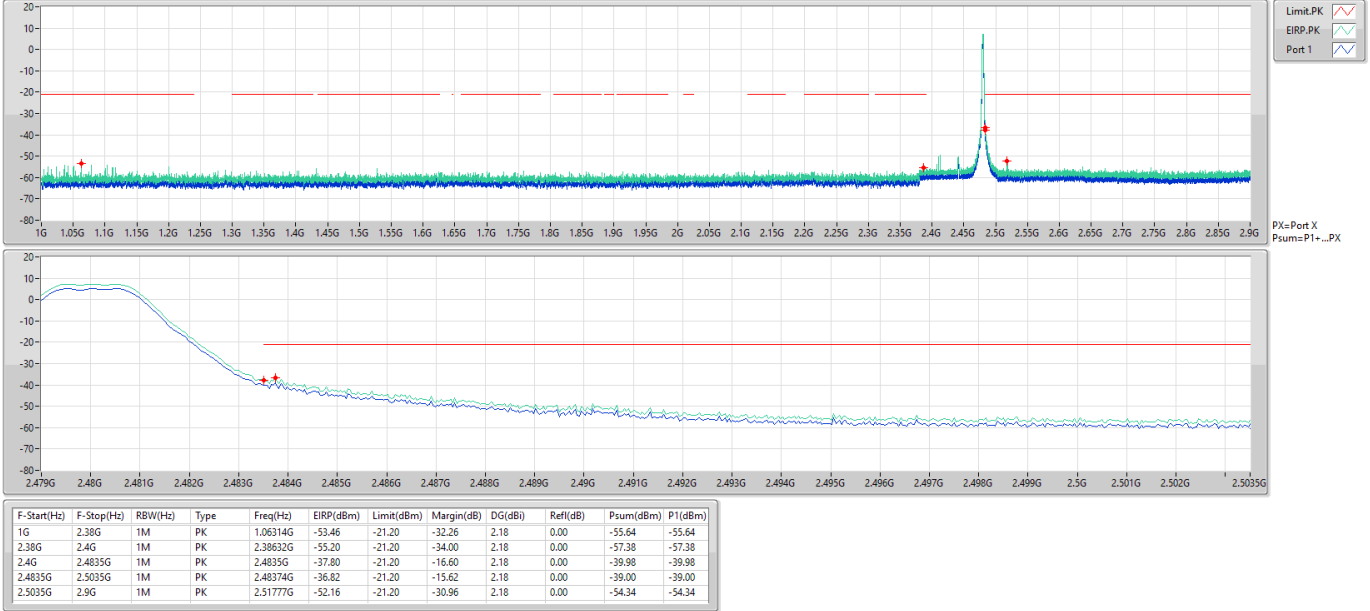

BT-LE(2Mbps)

CSE-DTS [AV]

2480MHz

