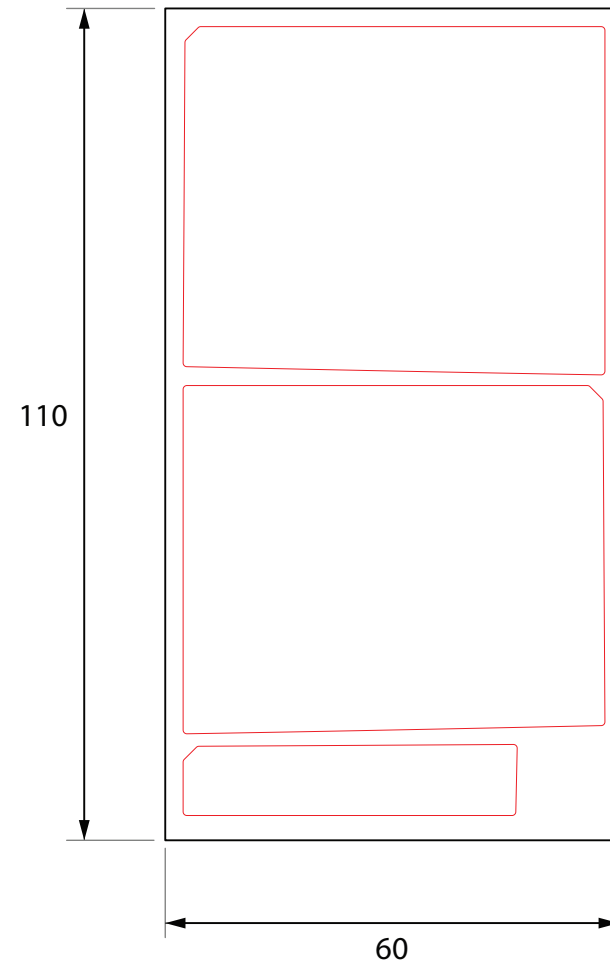
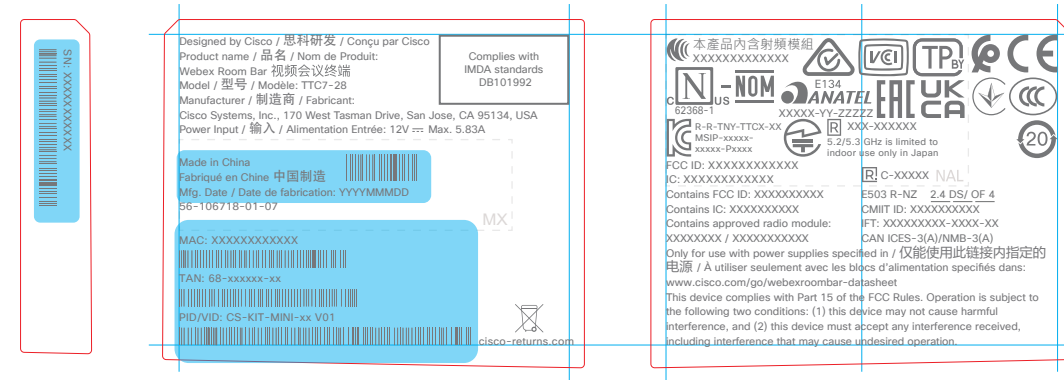


Blank roll layout




Physical appearance on unit

Complete label




Notes

1. This page is NOT for printing.
Only for Bartender setup and POD supplier.
2. Label color:  Cisco First Light (Custom - Colour sample sent to CCL)
3. Print color:  Pantone PQ Cool Gray 9C
4. Dynamic fields:
 -  Red boxes: The content of the red boxes must be dynamic (on/off).
 -  Green boxes: The text inside the green boxes must be dynamic text strings (editable).
 -  Unit IDs

NOTE: Absence of PID and TAN barcode will not be fully compatible with Cisco requirementst. Deviation is to accommodate the limited space.

Work in progress

07	19.10.2021	RPK		update content
06	08.09.2021	CA		update content and page order
05	23.08.2021	RPK		update content
04	12.07.2021	RPK		Rearrange layout according to CCL input
03	05.07.2021	RPK		Prepared for prototype
02	02.07.2021	RPK		
	28.06.2021	RPK		Initial Version
Ver-Rev	Date	Prep.	Checked	Change


 56-106718-01-07 ATWK, LBL-POD, DaVinci	Sheet 1 of 3		Processes	Tolerances	Specification:	Material	Surface treatment
	European projection		Printing Punching/Cutting	+/- 0.25 mm	Type: Manufacturer: Type number: Thickness: Color:	Polyester matt / acrylic glue CCL Design UK 338T-J1a - Reference in drawing	Thermal transfer ribbon CCL Design UK DPG6000 - - - - -
	Unit:	mm	Dimensions without paint or finish		Surface:		
	Sheet size:	A3	All materials, finishes, and processes must comply with the RoHS directives		Adhesive:		
	Scale:	1:1			Flame class:		
	3D CAD model file -Amp- Design Master is master	Part weight:	g	Flame class requirement: UL969	UL reference:	UL969 MH16584	

Work in progress

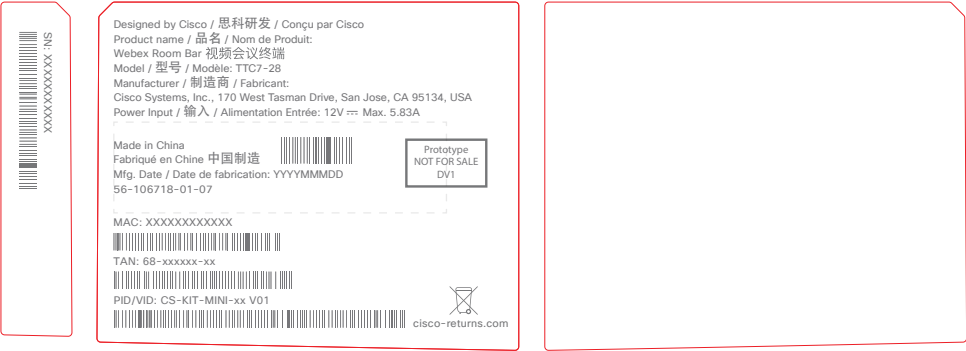



Notes

- 1. This page is NOT for printing.
Only for Bartender setup check with testprint from factory.

 56-106718-01-07 ATWK, LBL-POD, DaVinci	Sheet 2 of 3	Processes	Tolerances	Specification:	Material	Surface treatment
	European projection 	Printing Punching/Cutting	+/- 0.25 mm	Type: Manufacturer: Type number: Thickness: Color:	Polyester matt / acrylic glue CCL Design UK 338T-J1a - Reference in drawing -	Thermal transfer ribbon CCL Design UK DPG6000 - -
	Unit: mm	Dimensions without paint or finish		Surface: Adhesive:	-	-
	Sheet size: A3	All materials, finishes, and proccesses must comply with the RoHS directives		Flame class:	UL969	-
	Scale: 1:1	Flame class requirement: UL969		UL reference:	MH16584	-
3D CAD model file -Amp- Design Master is master	Part weight: g					

Prototype label



Ver-Rev	Date	Prep.	Checked	Change							
 56-106718-01-07 ATWK, LBL-POD, DaVinci					Sheet 3 of 3	Processes	Tolerances	Specification:	Material	Surface treatment	
					European projection 	Printing Punching/Cutting	+/- 0.25 mm	Type: Manufacturer: Type number: Thickness:	Polyester matt / acrylic glue CCL Design UK 338T-J1a -	Thermal transfer ribbon CCL Design UK DPG6000 -	
					Unit: mm	Dimensions without paint or finish		Color:	Reference in drawing	-	
					Sheet size: A3	All materials, finishes, and proccesses must comply with the RoHS directives		Surface:	-	-	
					Scale: 1:1			Adhesive:	-	-	
								Flame class:	UL969	-	
3D CAD model file -Amp- Design Master is master					Part weight: g	Flame class requirement: UL969	UL reference:	MH16584	-		