FCC CFR47 PART 15 SUBPART C
CERTIFICATION
TEST REPORT

FOR

802.11b/g MINI-PCI RADIO MODULE

MODEL NUMBER: AIR-MP21G-A-K9

FCC ID: LDK102049

REPORT NUMBER: 03U2181-1

ISSUE DATE: AUGUST 29, 2003

Prepared for
CISCO SYSTEMS, INC.
170 WEST TASMAN
SAN JOSE, CA 95134
USA

Prepared by
COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD,
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888

LAB CODE:200065-0

TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION 3

2. EUT DESCRIPTION 4

3. TEST METHODOLOGY 5

4. FACILITIES AND ACCREDITATION 5

5. CALIBRATION AND UNCERTAINTY 5

5.1. MEASURING INSTRUMENT CALIBRATION 5

5.2. MEASUREMENT UNCERTAINTY 5

5.3. TEST AND MEASUREMENT EQUIPMENT 6

6. SETUP OF EQUIPMENT UNDER TEST 7

7. APPLICABLE LIMITS AND TEST RESULTS 11

7.1. 6 dB BANDWIDTH 11

7.2. 99% BANDWIDTH 18

7.3. PEAK OUTPUT POWER 25

7.4. MAXIMUM PERMISSIBLE EXPOSURE 33

7.5. AVERAGE POWER 35

7.6. PEAK POWER SPECTRAL DENSITY 36

7.7. CONDUCTED SPURIOUS EMISSIONS 43

7.8. RADIATED EMISSIONS 56

7.8.1. RADIATED EMISSIONS WITH 10 dBi YAGI ANTENNA 59

7.8.2. RADIATED EMISSIONS WITH 8.5 dBi PATCH ANTENNA 79

7.8.3. RADIATED EMISSIONS WITH 5 dBi OMNI ANTENNA 99

7.8.4. RADIATED EMISSIONS WITH 2.2 dBi DIPOLE ANTENNA 119

7.8.5. RADIATED EMISSIONS WITH TWO 2.2 dBi DIPOLES (DIVERSITY OPERATION) AND CO-LOCATED RADIATED EMISSIONS 139

7.9. RADIATED EMISSIONS BELOW 1 GHZ 159

7.10. POWERLINE CONDUCTED EMISSIONS 161

8. SETUP PHOTOS 165

COMPLIANCE CERTIFICATION SERVICES DOCUMENT NO: CCSUP4031A
561F MONTEREY ROAD, MORGAN HILL, CA 95037 USA TEL: (408) 463-0885 FAX: (408) 463-0888
This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

1. TEST RESULT CERTIFICATION

COMPANY NAME: CISCO SYSTEMS, INC.
170 WEST TASMAN
SAN JOSE, CA 95134, USA

EUT DESCRIPTION: 802.11B/G MINI PCI RADIO MODULE

MODEL: AIR-MP21G-A-K9

DATE TESTED: AUGUST 7 – AUGUST 28, 2003

APPLICABLE STANDARDS	
STANDARD	**TEST RESULTS**
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document.

Approved & Released For CCS By:

MIKE HECKROTTE
CHIEF ENGINEER
COMPLIANCE CERTIFICATION SERVICES

Tested By:

WILLIAM ZHUANG
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

2. EUT DESCRIPTION

The EUT is an 802.11b/g radio module with a MiniPCI interface. It operates in the 2400 – 2483.5 MHz band. The peak power output is 22.93 dBm (196 mW) in the 802.11b mode and 18.7 dBm (74 mW) in the 802.11g mode.

This module was tested with four antenna types, plus two dipole antennas configured for diversity operation, using the highest gain version of each type, as follows:

Antenna Type	**Model Number as Tested**	**Max Gain as Tested dBi**	**MPE cm**	**Mode of Operation**
Yagi	AIR-ANT2410Y-R	10	12.5	Point to Multipoint
Patch	AIR-ANT3549	8.5	10.5	Point to Multipoint
Omni	AIR-ANT2506	5	7.0	Omnidirectional
Dipole	AIR-ANT4941	2.2	5.1	Omnidirectional
Two Dipoles (Diversity Operation)	Two AIR-ANT4941	2.2	5.1	Omnidirectional

This module was tested for co-location with the Cisco AIR-RM20A-A-K9 5 GHz radio, FCC ID: LDK102045 using the two dipole diversity antenna configuration.

This module may also be used with the following antennas, each of which has the same or less gain than the corresponding antenna type that was tested.

Antenna Type	**Model Number as Tested**	**Max Gain as Tested dBi**	**MPE cm**	**Mode of Operation**
Patch	AIR-ANT2012	6.5	8.4	Point to Multipoint
Patch	AIR-ANT1729	6.0	7.9	Point to Multipoint
Omni	AIR-ANT3213	5	7.0	Omnidirectional
Omni	AIR-ANT1728	5	7.0	Omnidirectional
Omni	Maxrad MUF24005	5	7.0	Omnidirectional
Omni	Maxrad MAXC24005	5	7.0	Omnidirectional
Omni	AIR-ANT3551	2.2	5.1	Omnidirectional
Omni	AIR-ANT5959	2.0	5.0	Omnidirectional

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4/1992, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

4. FACILITIES AND ACCREDITATION

The open area test sites and conducted measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at http://www.ccsemc.com.

No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government.

5. CALIBRATION AND UNCERTAINTY

5.1. MEASURING INSTRUMENT CALIBRATION

The measurement instruments utilized to perform the tests documented in this report have been calibrated in accordance with the manufacturer's recommendations, and are traceable to national standards.

5.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

5.3. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST AND MEASUREMENT EQUIPMENT LIST				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due Date
Quasi-Peak Adapter	HP	85650A	2521A01038	7/16/2004
SA Display Section	HP	85662A	2314A04793	7/16/2004
SA RF Section	HP	85680A	2314A02604	7/16/2004
Preamplifier	HP	8447D	2944A06833	8/22/2003
Antenna, Biconical	Eaton	94455-1	1214	3/6/04
Antenna, Log Periodic	EMCO	3146	9107-3163	3/06/04
EMI Test Receiver	R & S	ESHS 20	827129/006	7/17/2004
LISN, 10 kHz ~ 30 MHz	FCC	50/250-25-2	114	9/6/2003
Spectrum Analyzer	AGILENT	E4446A	US42070220	1/13/04
Pre-amplifier	MITEQ	NSP2600-SP	924341	4/25/04
Horn Antenna	EMCO	3115	6717	2/4/04
Power Meter	AGILENT	E4416A	0841291160	11/7/04
Power Sensor	Agilent	E9327A	US40440755	08/09/03
Antenna, Biconical	Eaton	94455-1	1214	3/6/04
Antenna, Log Periodic	EMCO	3146	9107-3163	3/06/04
Preamplifier	Miteq	NSP10023988	646456	4/26/04
High Pass Filter (4.57GHz)	FSY Microwave	FM-4570-9SS	003	N.C.R.

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

6. SETUP OF EQUIPMENT UNDER TEST

SUPPORT EQUIPMENT

Device Type	Manufacturer	Model Number	Serial Number	FCC ID
Laptop	IBM	2647	78-B3952	Doc
Power Adapter	IBM	02K6665	11502K66657A2U81385RR	Doc
Power Supply	KRM	AEEC-350	9712154746	N/A

I/O CABLES

Cable No	I/O Port	# of I/O Port	Connector Type	Type of Cable	Cable Length	Data Traffic	Bundled	Remark
1	AC	1	US 115V	Un-shielded	2m	No	No	Integrated with Adapter
2	DC	1	DC	Un-shielded	1m	No	No	N/A
3	AC	1	US115	Un-shielded	1m	No	No	N/A

TEST SETUP

The EUT is 802.11b/g mini PCI radio. It was connected to a laptop via a cardbus-to-miniPCI adapter / extension board during the tests. Power was furnished by an external power supply set to 3.3 VDC. Test software exercised the radio card.

COMPLIANCE CERTIFICATION SERVICES DOCUMENT NO: CCSUP4031A
561F MONTEREY ROAD, MORGAN HILL, CA 95037 USA TEL: (408) 463-0885 FAX: (408) 463-0888
This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

SETUP DIAGRAM

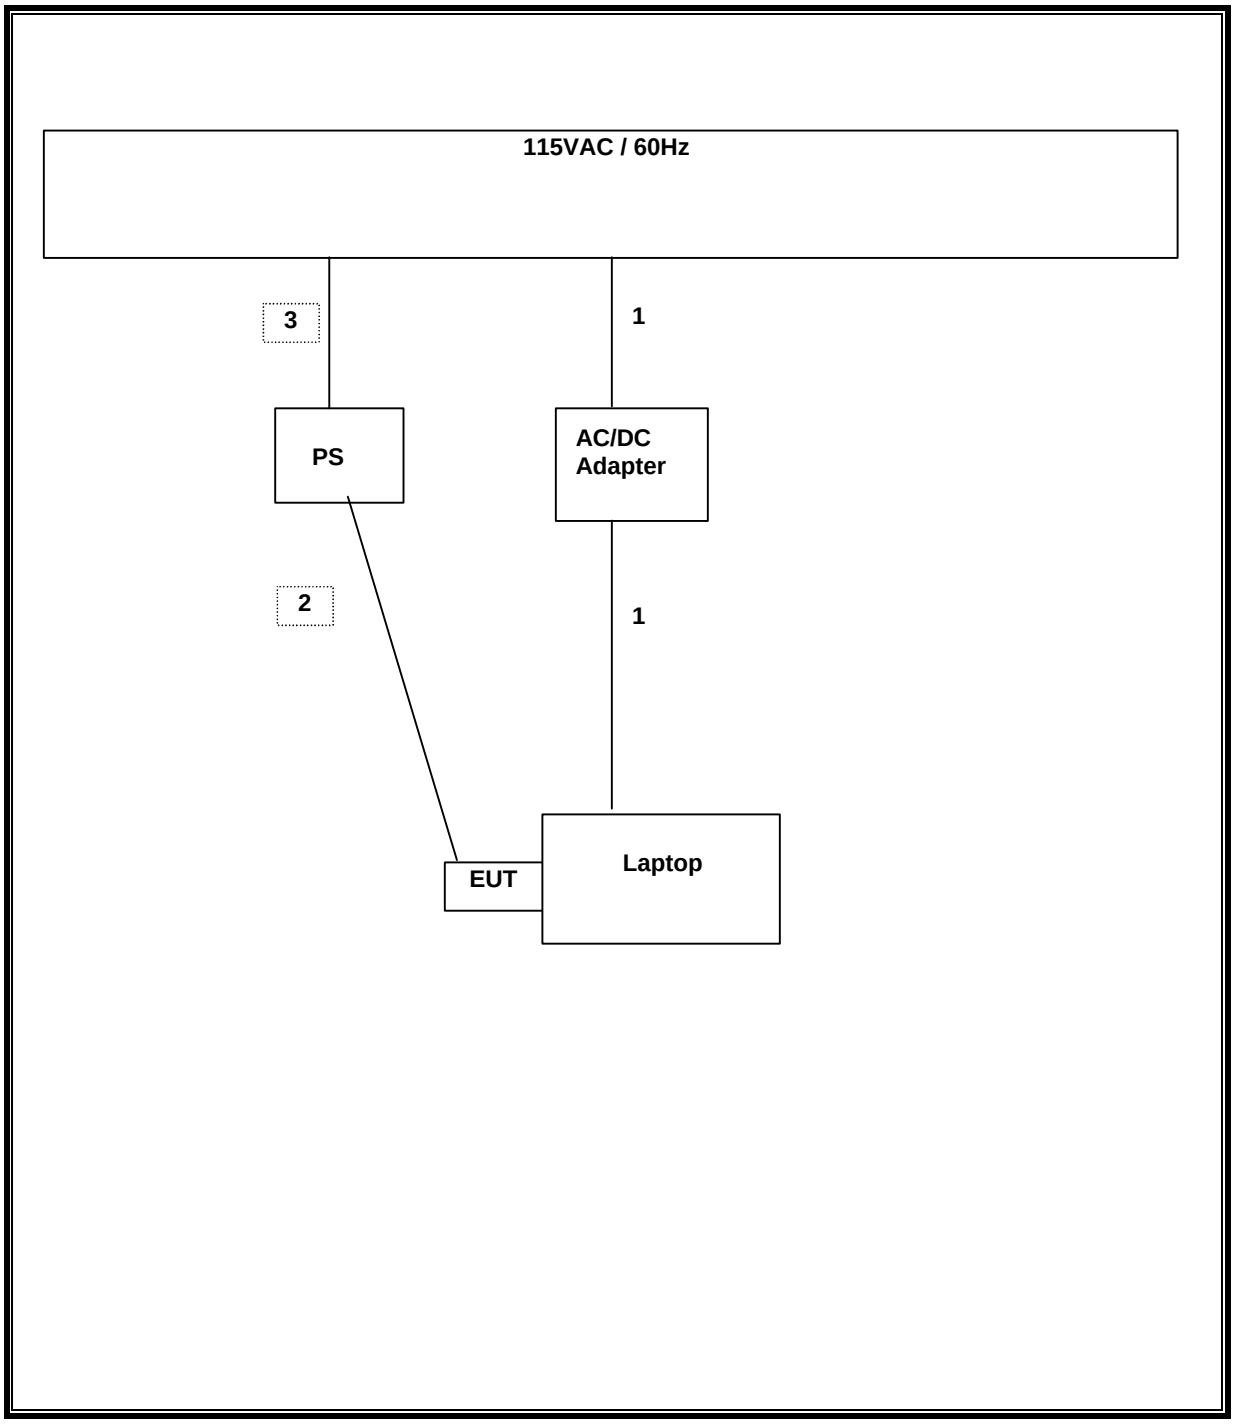

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

SETUP FOR COLOCATION TESTS

SUPPORT EQUIPMENT

Device Type	Manufacturer	Model Number	Serial Number	FCC ID
Laptop	IBM	2647	78-B3952	Doc
Power Adapter	IBM	02K6665	11502K66657A2U81385RR	Doc
Access Point	CISCO	AIR-AP1210	FHK0721J06P	DoC
Power Adapter	CISCO	PSA18U-480C	131210148A2	DoC

I/O CABLES

Cable No	I/O Port	# of I/O Port	Connector Type	Type of Cable	Cable Length	Data Traffic	Bundled	Remark
1	AC	1	US 115V	Un-shielded	2m	No	No	Integrated with Adapter
2	AC	1	US 115V	Un-shielded	2m	No	No	Integrated with Adapter
3	Ethernet	1	RJ45	Un-shielded	2m	Yes	No	N/A

TEST SETUP

The EUT is 802.11b/g mini PCI radio. For collocation testing, the EUT was installed in an access point that was also equipped with a 5 GHz radio module. The access point was controlled by a laptop via Ethernet. Test software exercised both radio cards.

COMPLIANCE CERTIFICATION SERVICES DOCUMENT NO: CCSUP4031A
561F MONTEREY ROAD, MORGAN HILL, CA 95037 USA TEL: (408) 463-0885 FAX: (408) 463-0888
This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

SETUP DIAGRAM

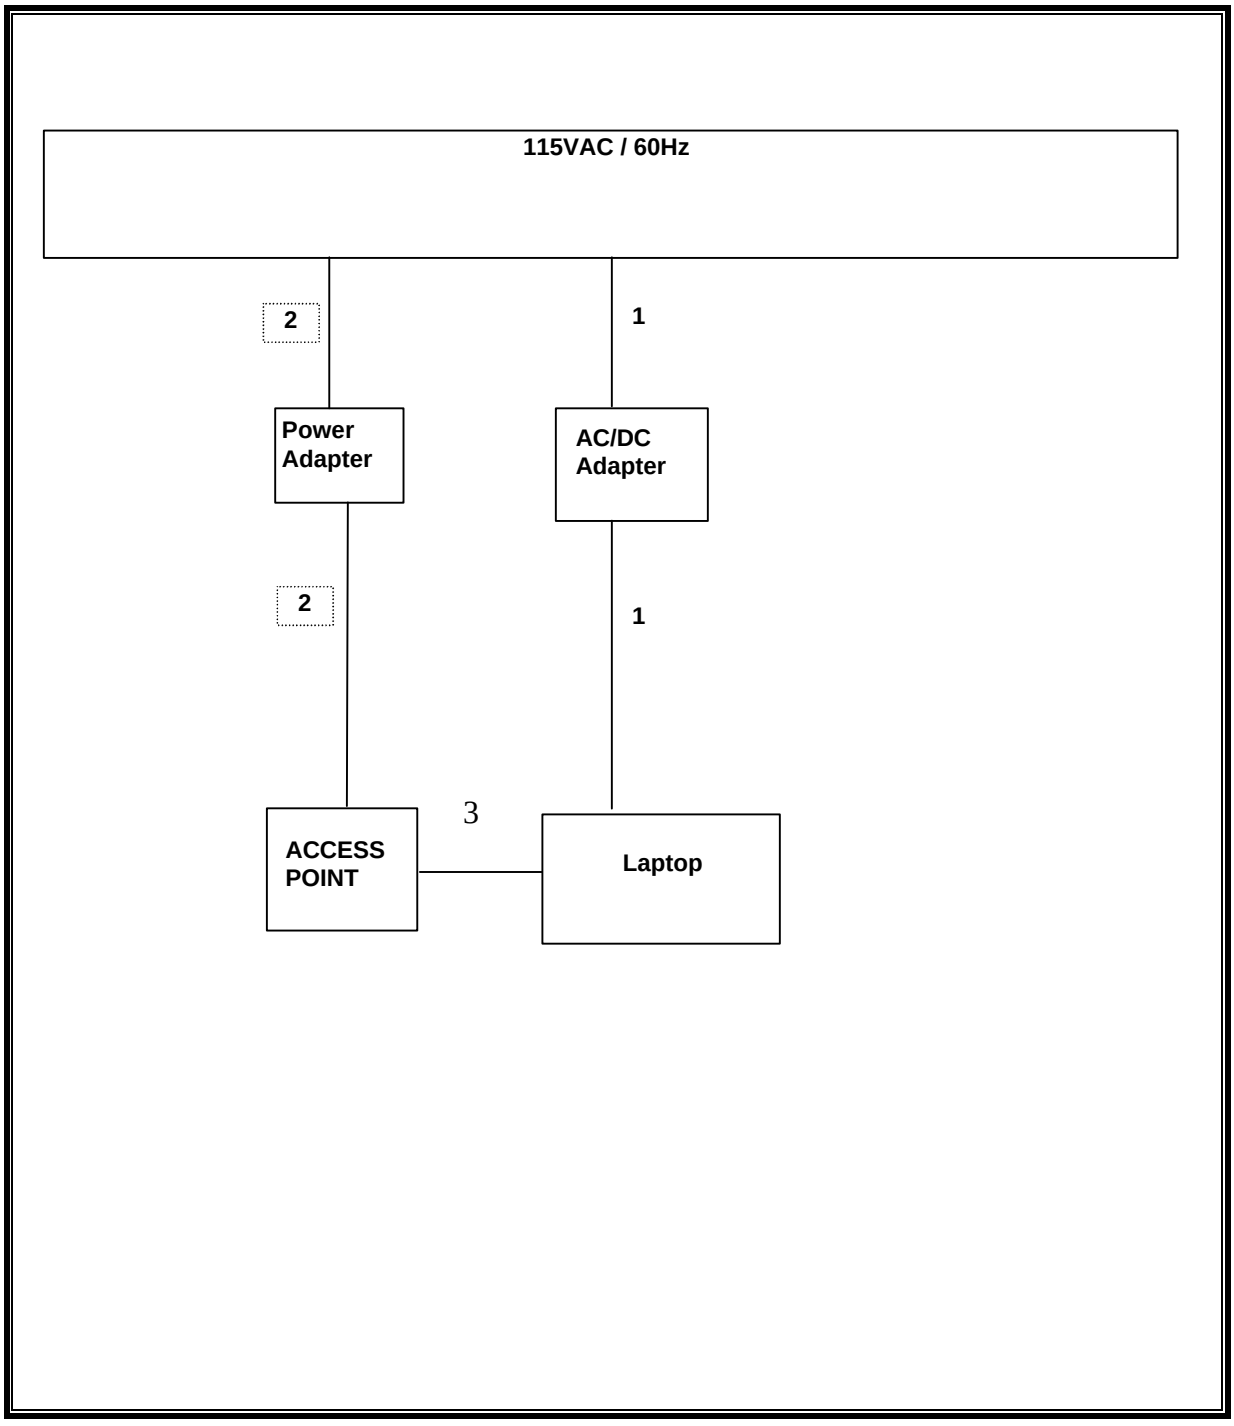

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

7. APPLICABLE LIMITS AND TEST RESULTS

7.1. 6 dB BANDWIDTH

LIMIT

§15.247 (a) (2) For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled.

RESULTS

No non-compliance noted:

802.11b Mode

Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	11300	500	10800
Middle	2437	11300	500	10800
High	2462	11100	500	10600

802.11g Normal Mode

Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	16100	500	15600
Middle	2437	16400	500	15900
High	2462	16400	500	15900

COMPLIANCE CERTIFICATION SERVICES DOCUMENT NO: CCSUP4031A
561F MONTEREY ROAD, MORGAN HILL, CA 95037 USA TEL: (408) 463-0885 FAX: (408) 463-0888
This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

6 DB BANDWIDTH (802.11b MODE)

6 DB BANDWIDTH LOW CH (802.11b mode)

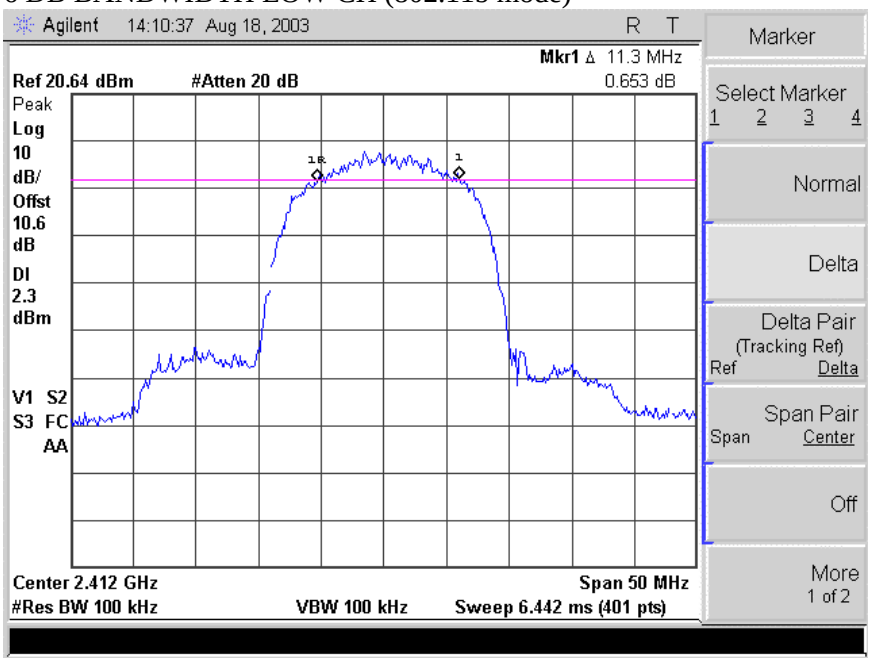

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

6 DB BANDWIDTH MID CH (802.11b mode)

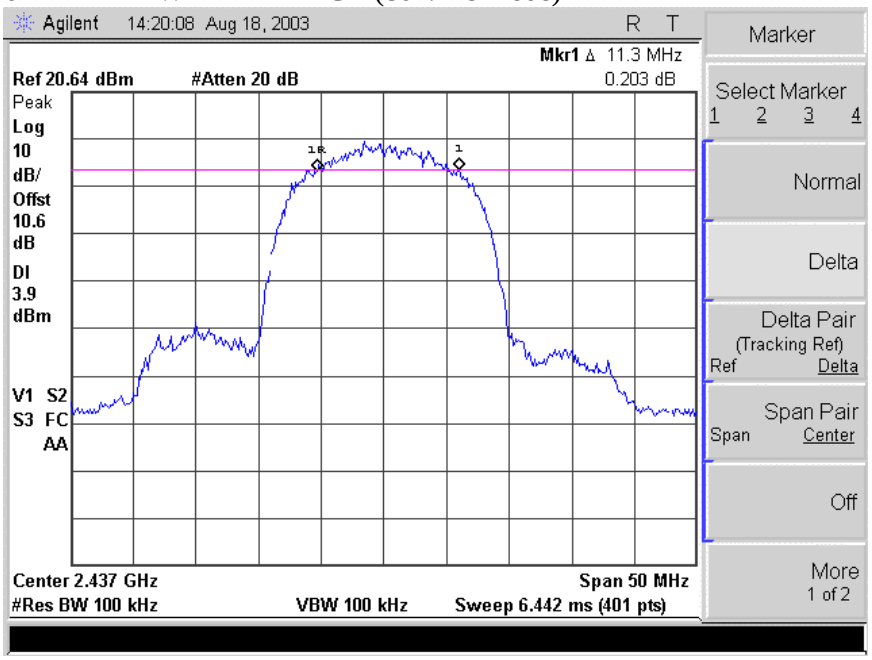

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

6 DB BANDWIDTH HIGH CH (802.11b mode)

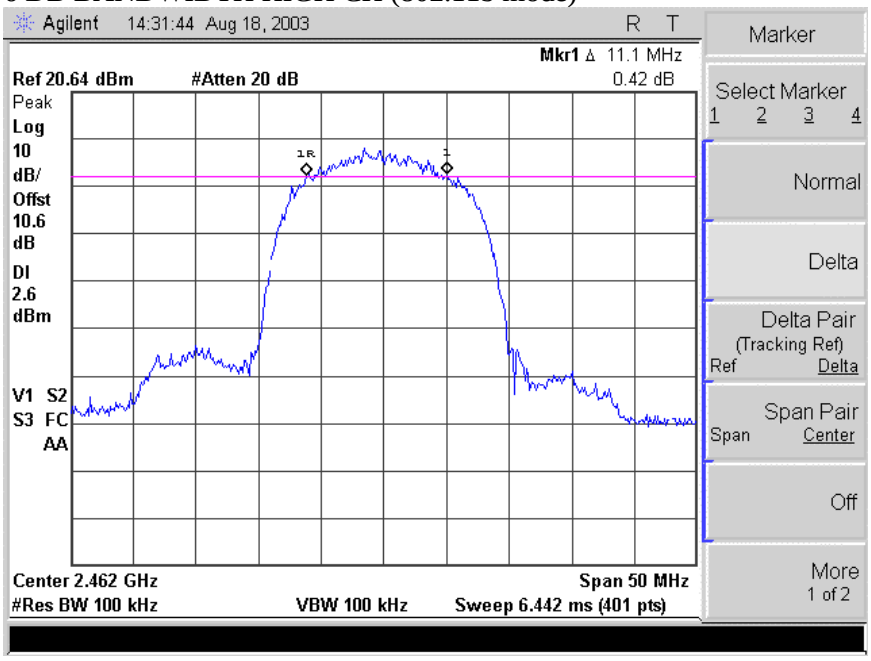

COMPLIANCE CERTIFICATION SERVICES DOCUMENT NO: CCSUP4031A
561F MONTEREY ROAD, MORGAN HILL, CA 95037 USA TEL: (408) 463-0885 FAX: (408) 463-0888
This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

6 DB BANDWIDTH (802.11g NORMAL MODE)

6 DB BANDWIDTH LOW CH (802.11g Normal mode)

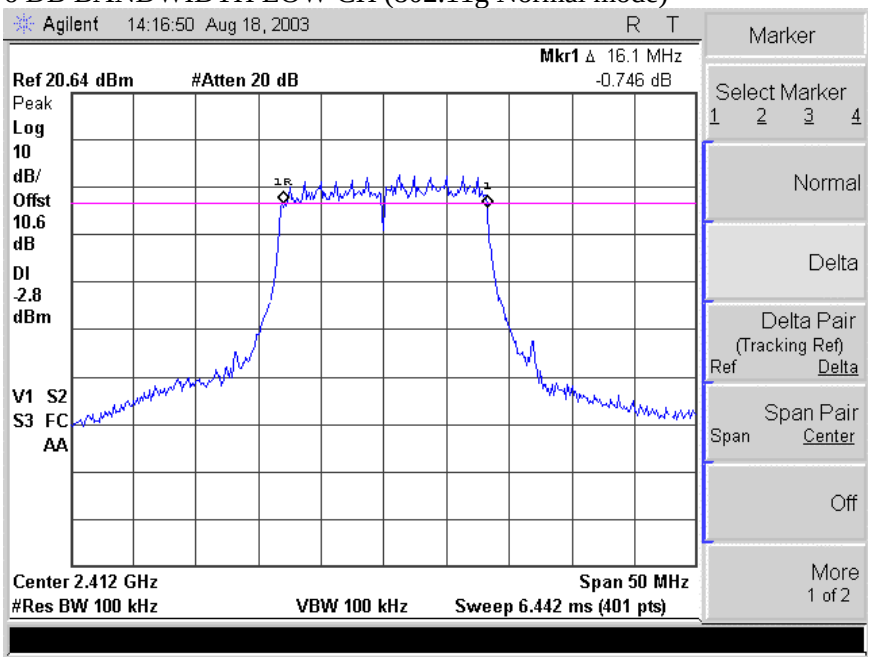

COMPLIANCE CERTIFICATION SERVICES DOCUMENT NO: CCSUP4031A
561F MONTEREY ROAD, MORGAN HILL, CA 95037 USA TEL: (408) 463-0885 FAX: (408) 463-0888
This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

6 DB BANDWIDTH MID CH (802.11g Normal mode)

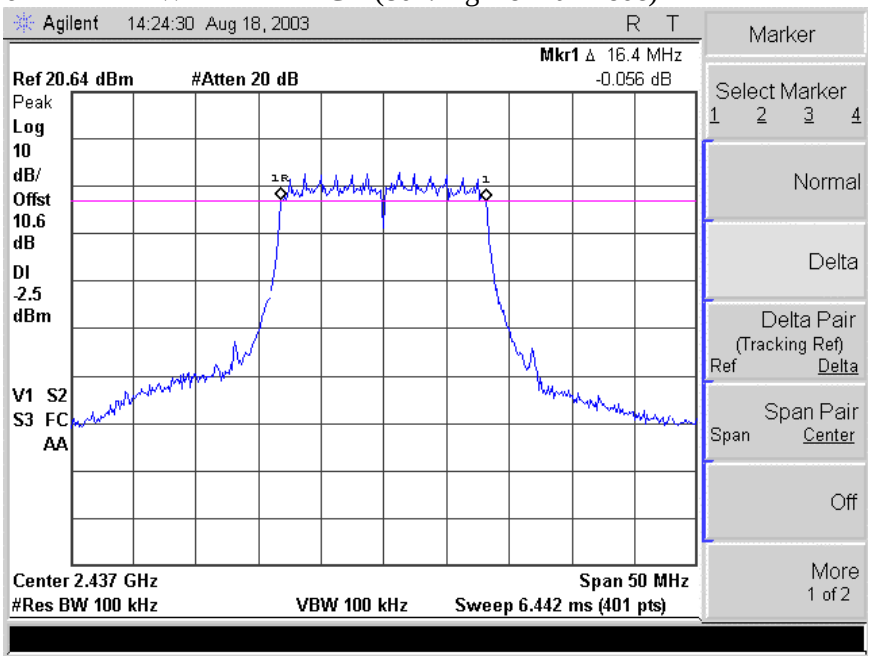

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

6 DB BANDWIDTH HIGH CH (802.11g Normal mode)

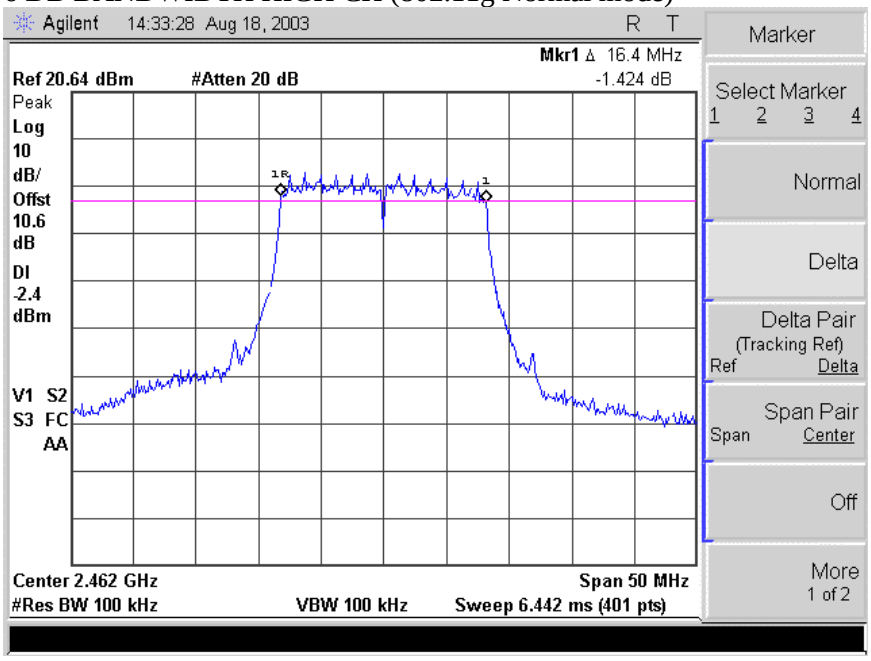

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

7.2. 99% BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

No non-compliance noted:

802.11b Mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	15.25
Middle	2437	15.33
High	2462	15.29

802.11g Normal Mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	16.45
Middle	2437	16.43
High	2462	16.10

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

99% BANDWIDTH (802.11b MODE)

99% BANDWIDTH LOW CH (802.11b mode)

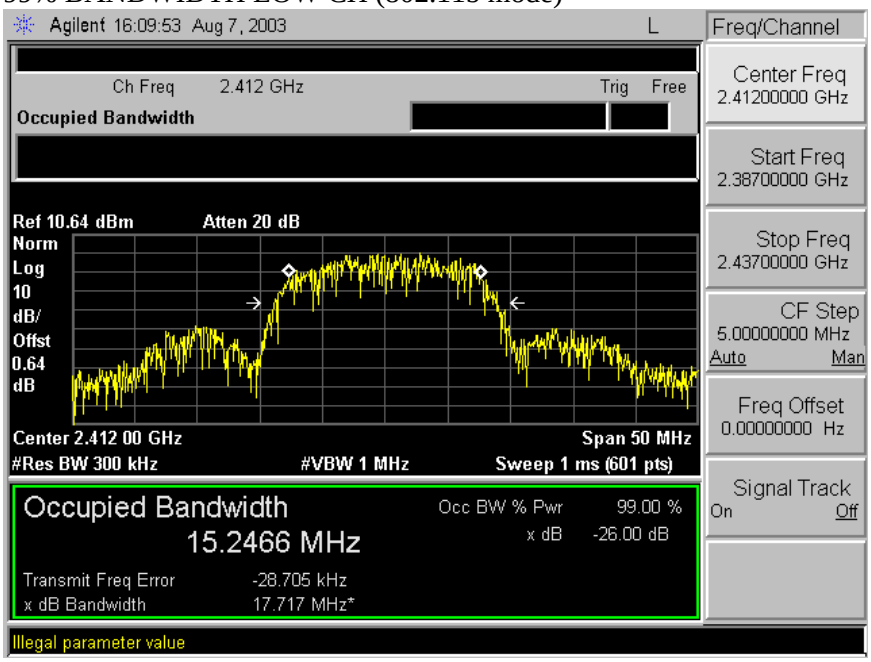

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

99% BANDWIDTH MID CH (802.11b mode)

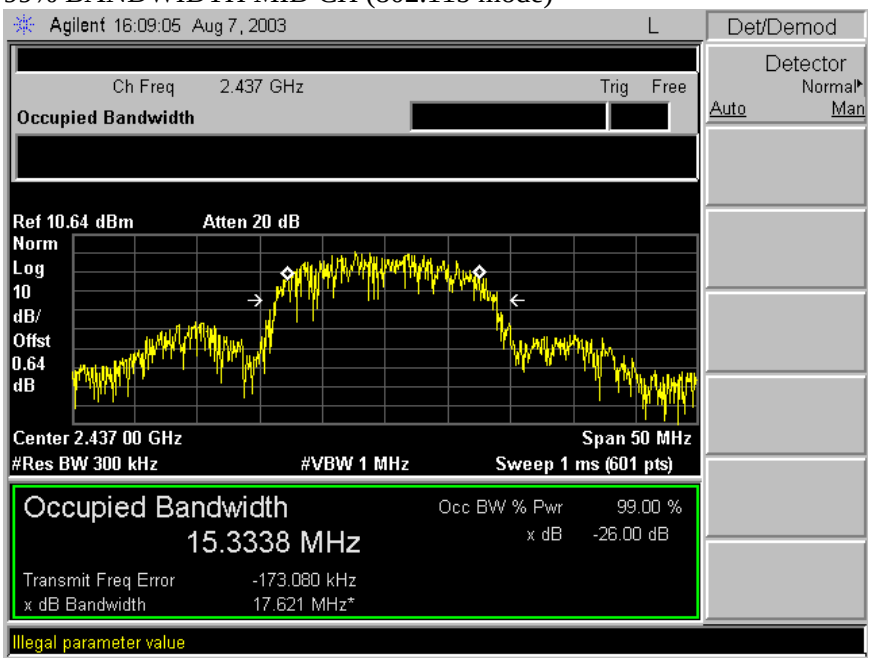

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

99% BANDWIDTH HIGH CH (802.11b mode)

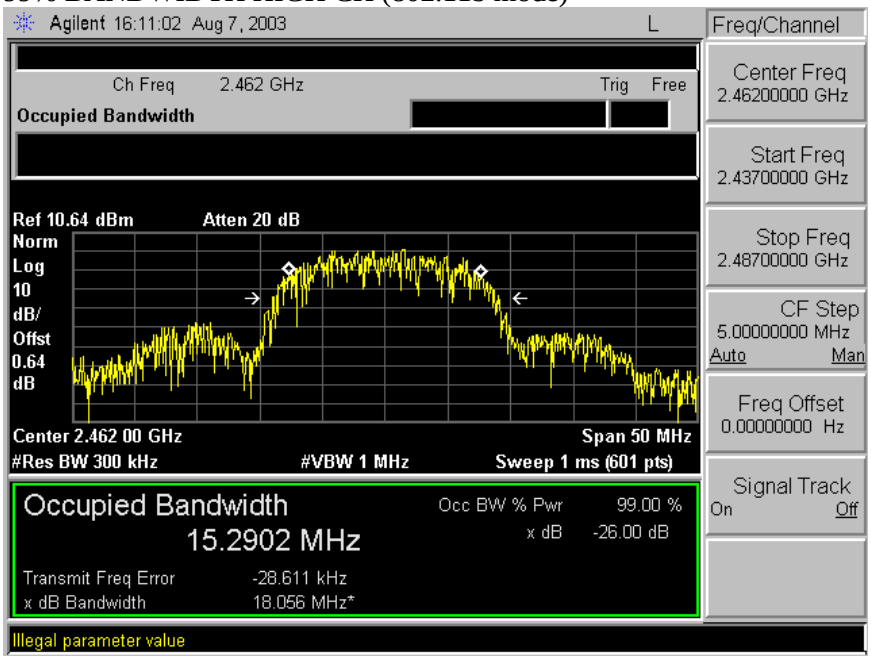

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

99% BANDWIDTH (802.11g NORMAL MODE)

99% BANDWIDTH LOW CH (802.11g Normal mode)

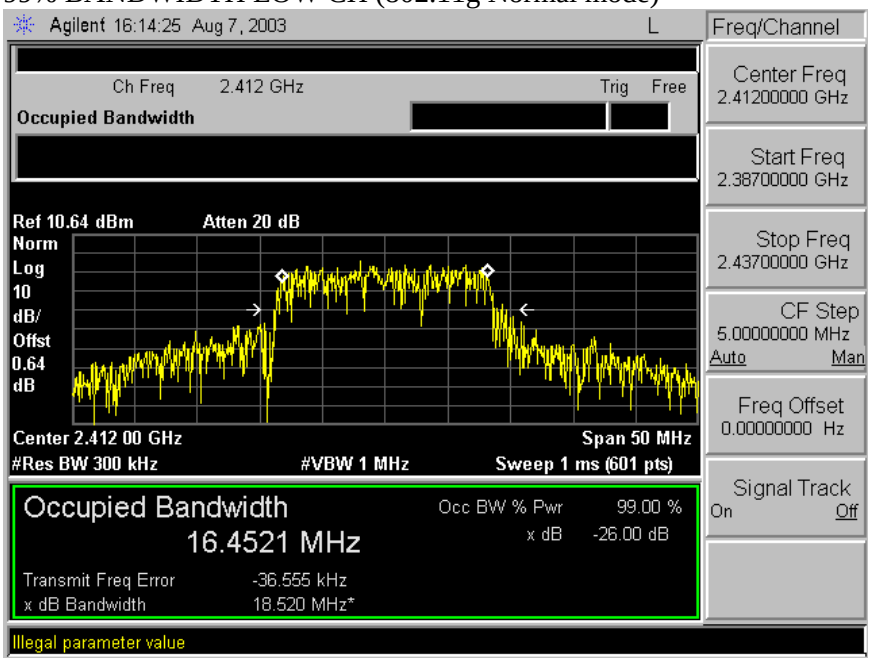

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

99% BANDWIDTH MID CH (802.11g Normal mode)

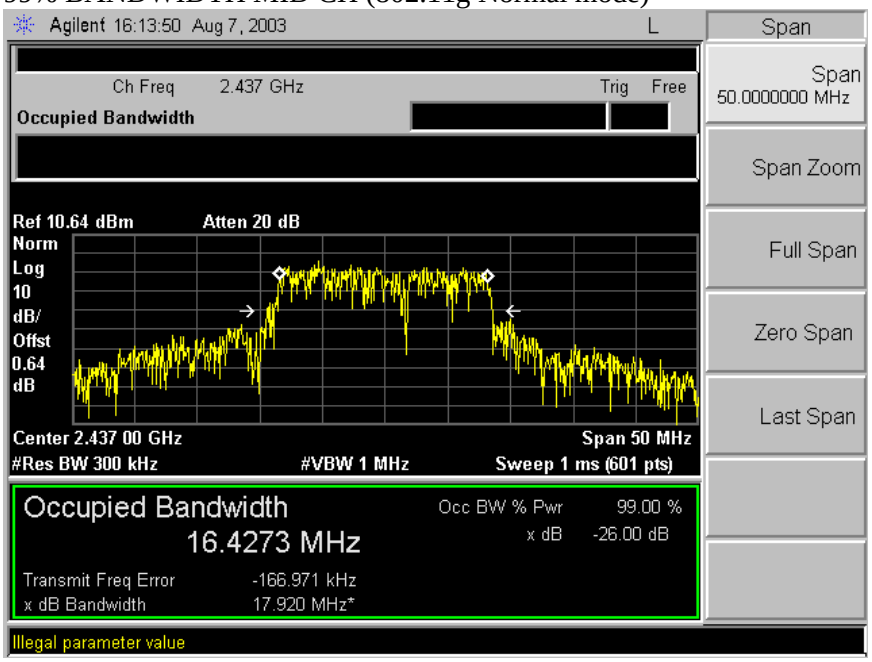

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

99% BANDWIDTH HIGH CH (802.11g Normal mode)

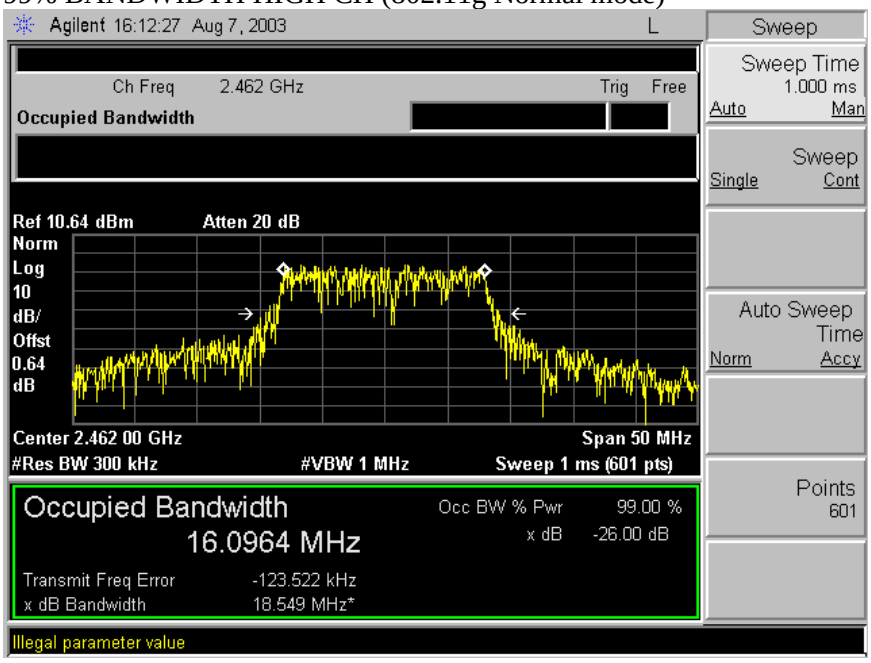

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

7.3. PEAK OUTPUT POWER

PEAK POWER LIMIT

§15.247 (b) The maximum peak output power of the intentional radiator shall not exceed the following:

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz , and 5725-5850 MHz bands: 1 watt.

§15.247 (b) (4) Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The maximum antenna gain is 10 dBi, therefore the limit is 26 dBm.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESULTS

No non-compliance noted:

802.11b Mode

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	22.54	26	-3.46
Middle	2437	22.67	26	-3.33
High	2462	22.93	26	-3.07

802.11g Normal Mode

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	18.57	26	-7.43
Middle	2437	18.41	26	-7.59
High	2462	18.70	26	-7.30

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

OUTPUT POWER (802.11b MODE)

PEAK POWER LOW CH (b mode)

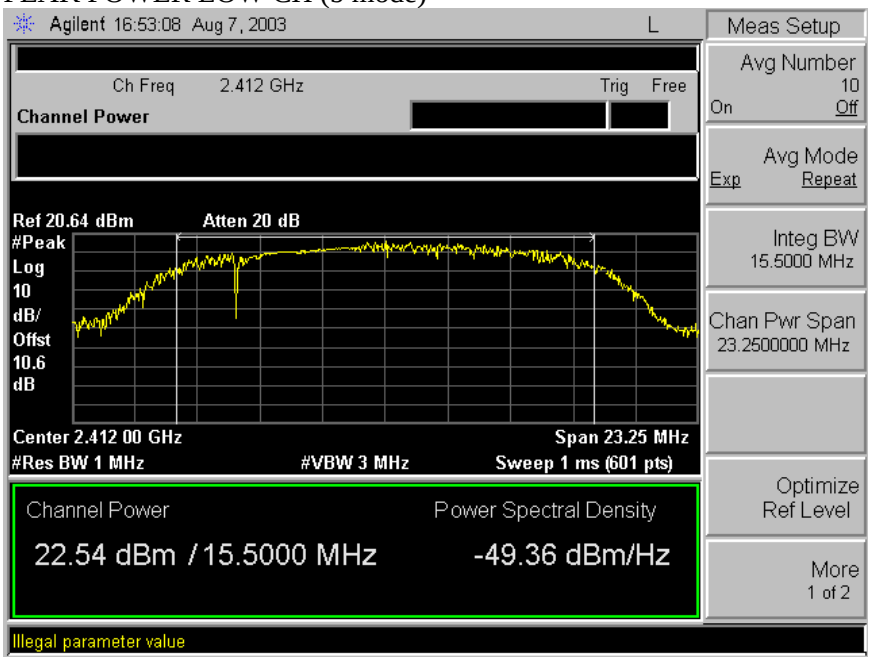

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

PEAK POWER MID CH (b mode)

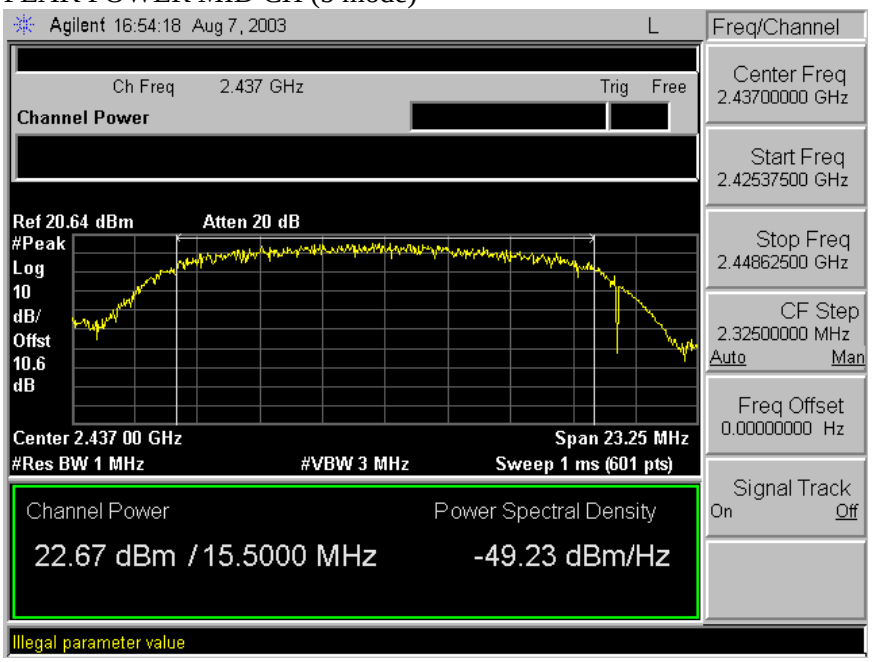

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

PEAK POWER HIGH CH (b mode)

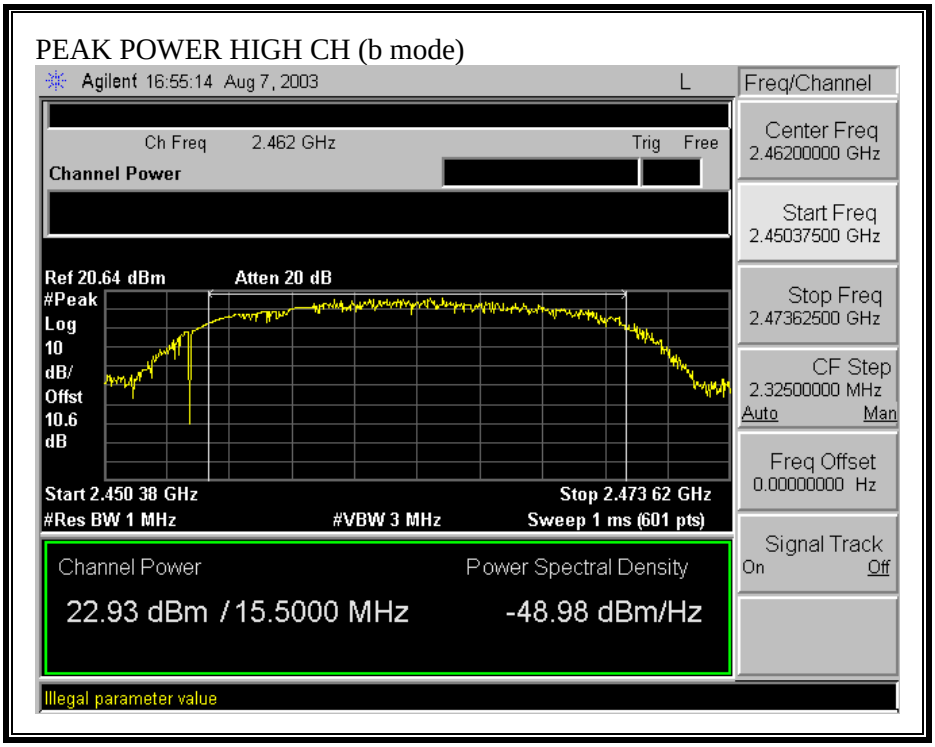

COMPLIANCE CERTIFICATION SERVICES DOCUMENT NO: CCSUP4031A
561F MONTEREY ROAD, MORGAN HILL, CA 95037 USA TEL: (408) 463-0885 FAX: (408) 463-0888
This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

OUTPUT POWER (802.11g NORMAL MODE)

PEAK POWER LOW CH (g Normal mode)

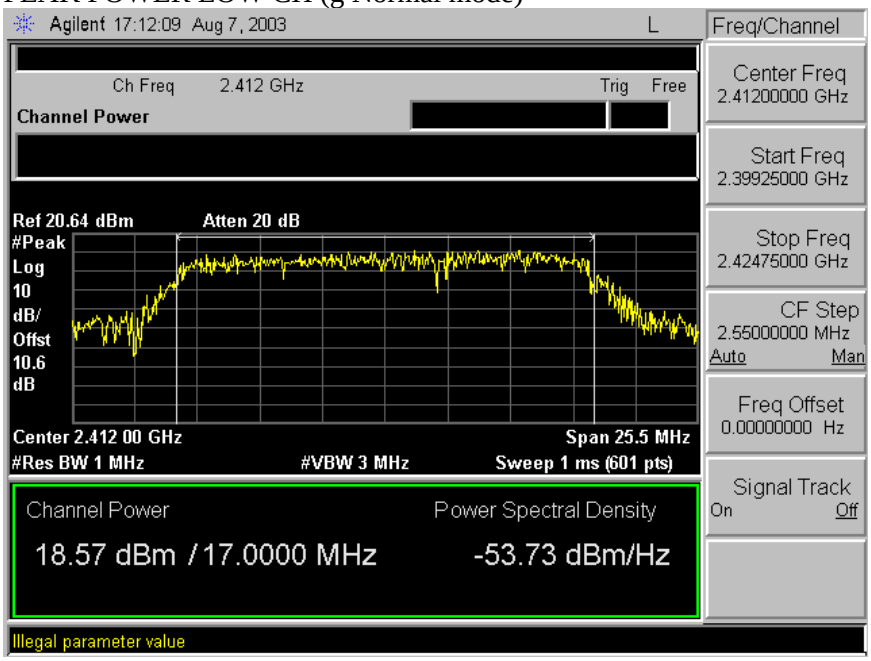

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

PEAK POWER MID CH (g Normal mode)

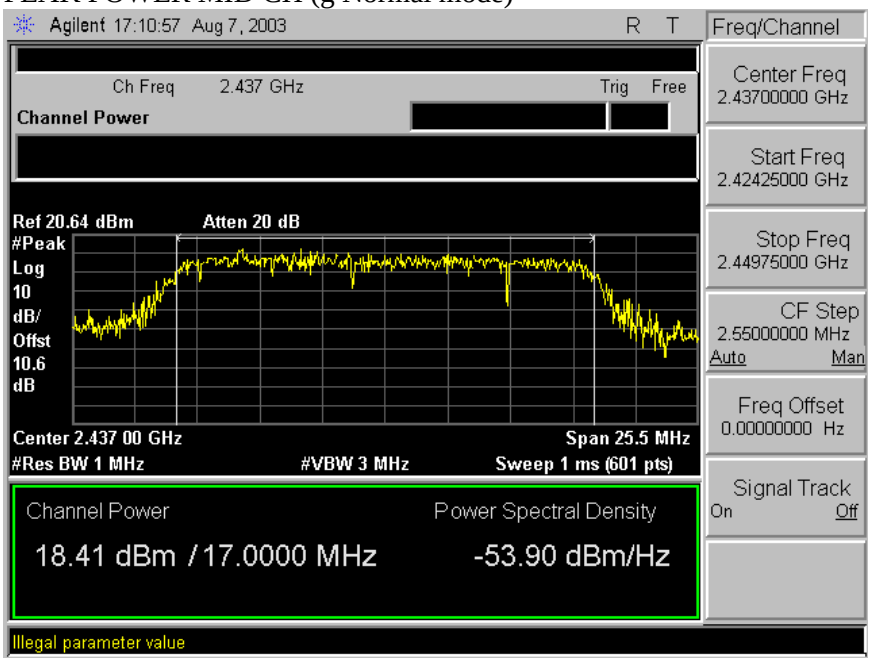

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

PEAK POWER HIGH CH (g Normal mode)

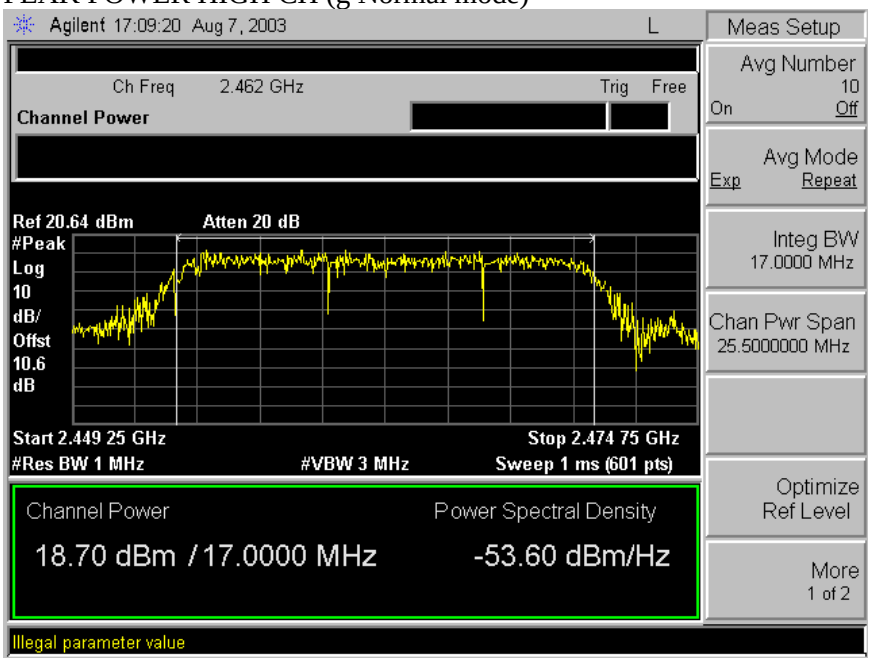

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

7.4. MAXIMUM PERMISSIBLE EXPOSURE

LIMITS

§15.247 (b) (5) Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See §1.1307(b)(1) of this chapter.

CALCULATIONS

Given

$E = \sqrt{(30 * P * G)} / d$

and

$S = E \wedge 2 / 3770$

where

E = Field Strength in Volts / meter
P = Power in Watts
G = Numeric antenna gain
d = distance in meters
S = Power Density in milliwatts / square centimeter

Combining equations and rearranging the terms to express the distance as a function of the remaining variables yields:

$d = \sqrt{((30 * P * G) / (3770 * S))}$

Changing to units of mW and cm, using:

P (mW) = P (W) / 1000 and
d (cm) =100 * d (m)

yields

$d = 100 * \sqrt{((30 * (P / 1000) * G) / (3770 * S))}$

$d = 0.282 * \sqrt{(P * G / S)}$

where

d = distance in cm
P = Power in mW
G = Numeric antenna gain
S = Power Density in mW / cm^2

COMPLIANCE CERTIFICATION SERVICES DOCUMENT NO: CCSUP4031A
561F MONTEREY ROAD, MORGAN HILL, CA 95037 USA TEL: (408) 463-0885 FAX: (408) 463-0888
This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

Substituting the logarithmic form of power and gain using:

P (mW) = 10 ^ (P (dBm) / 10) and
G (numeric) = 10 ^ (G (dBi) / 10)

yields

$$d = 0.282 * 10 ^ ((P + G) / 20) / \sqrt{S} \qquad \text{Equation (1)}$$

where

d = MPE distance in cm
P = Power in dBm
G = Antenna Gain in dBi
S = Power Density Limit in mW / cm^2

Equation (1) and the measured peak power is used to calculate the MPE distance.

LIMITS

S = 1.0 mW / cm^2 from 1.1310 Table 1

RESULTS

No non-compliance noted:

Mode	Power Density Limit (mW/cm^2)	Output Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)
802.11b	1.0	22.93	10.00	12.50
802.11g Normal	1.0	18.70	10.00	7.68

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

COMPLIANCE CERTIFICATION SERVICES DOCUMENT NO: CCSUP4031A
561F MONTEREY ROAD, MORGAN HILL, CA 95037 USA TEL: (408) 463-0885 FAX: (408) 463-0888
This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

7.5. AVERAGE POWER

AVERAGE POWER LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

No non-compliance noted:

The cable assembly insertion loss of 10.64 dB (including 10 dB pad and 0.64 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

802.11b Mode

Channel	Frequency (MHz)	Average Power (dBm)
Low	2412	19.47
Middle	2437	19.74
High	2462	20.13

802.11g Normal Mode

Channel	Frequency (MHz)	Average Power (dBm)
Low	2412	14.86
Middle	2437	14.61
High	2462	14.70

COMPLIANCE CERTIFICATION SERVICES DOCUMENT NO: CCSUP4031A
561F MONTEREY ROAD, MORGAN HILL, CA 95037 USA TEL: (408) 463-0885 FAX: (408) 463-0888
This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

7.6. PEAK POWER SPECTRAL DENSITY

LIMIT

§15.247 (d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer, the maximum level in a 3 kHz bandwidth is measured with the spectrum analyzer using RBW = 3 kHz and VBW > 3 kHz, sweep time = span / 3 kHz, and video averaging is turned off. The PPSD is the highest level found across the emission in any 3 kHz band.

RESULTS

No non-compliance noted:

802.11b Mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-4.69	8	-12.69
Middle	2437	-3.46	8	-11.46
High	2462	-5.15	8	-13.15

802.11g Normal Mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-10.57	8	-18.57
Middle	2437	-10.46	8	-18.46
High	2462	-9.70	8	-17.70

COMPLIANCE CERTIFICATION SERVICES DOCUMENT NO: CCSUP4031A
561F MONTEREY ROAD, MORGAN HILL, CA 95037 USA TEL: (408) 463-0885 FAX: (408) 463-0888
This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

PEAK POWER SPECTRAL DENSITY (802.11b MODE)

PPSD LOW CH (802.11b mode)

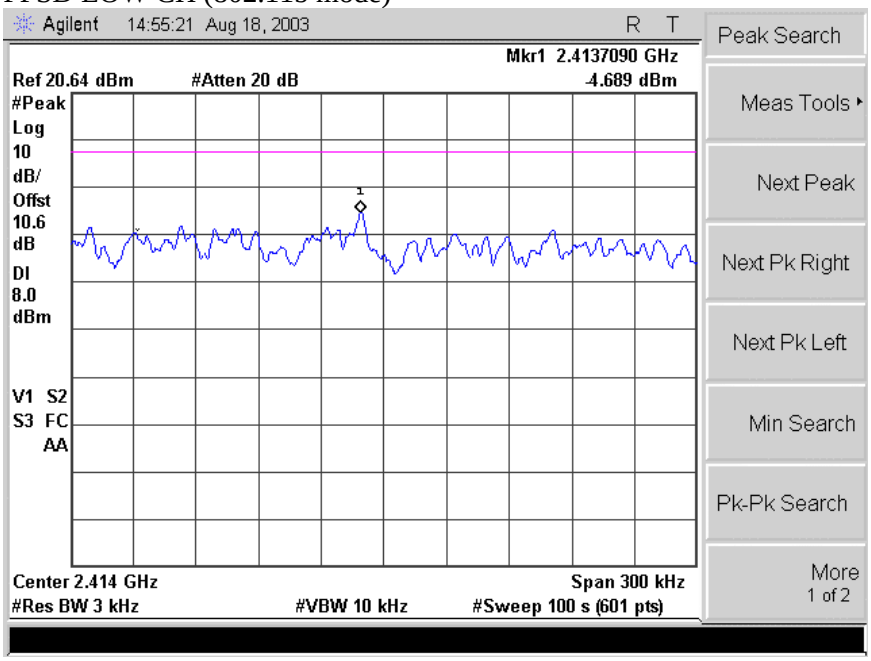

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

PPSD MID CH (802.11b mode)

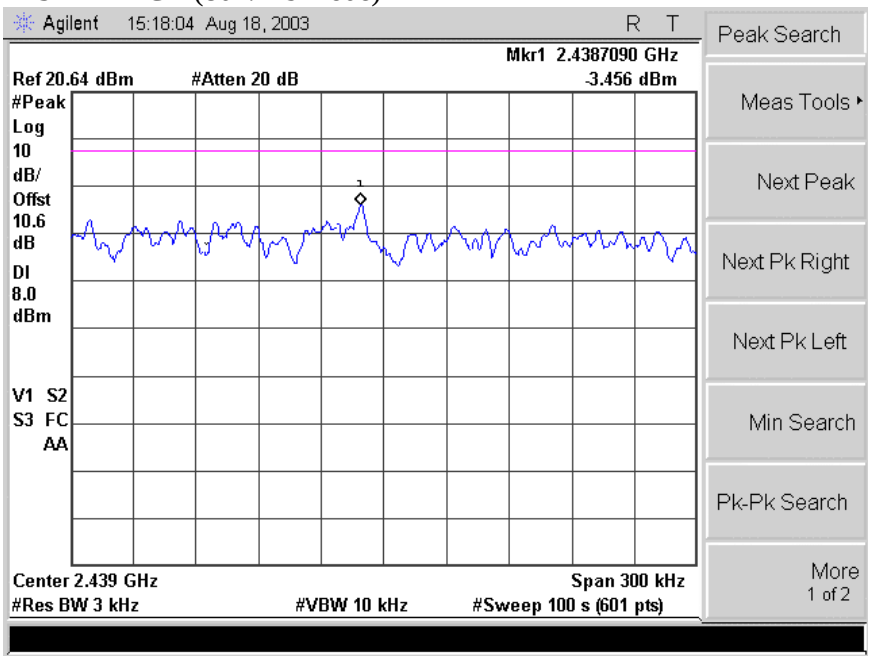

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

PPSD HIGH CH (802.11b mode)

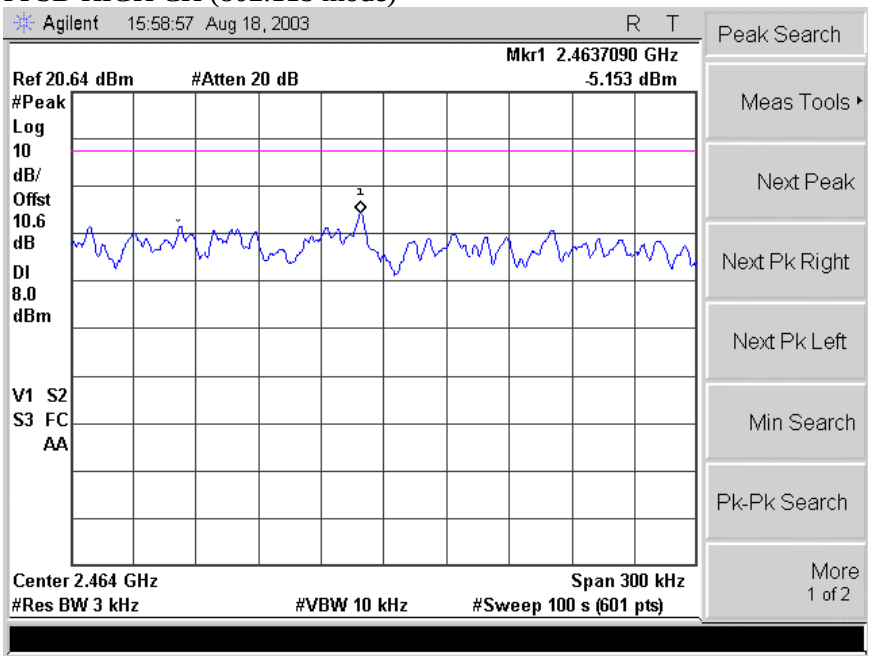

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

PEAK POWER SPECTRAL DENSITY (802.11g NORMAL MODE)

PPSD LOW CH (802.11g Normal mode)

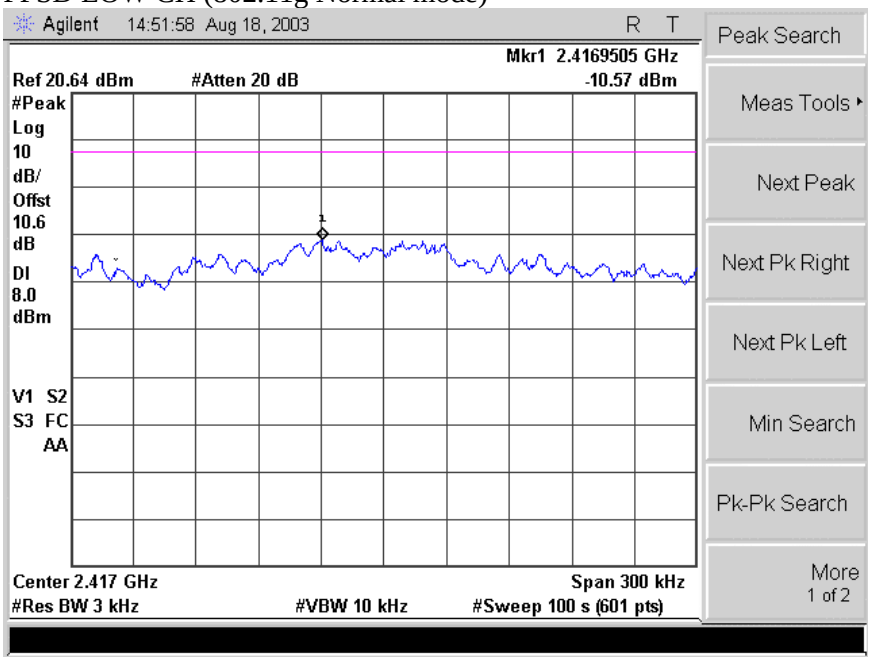

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

PPSD MID CH (802.11g Normal mode)

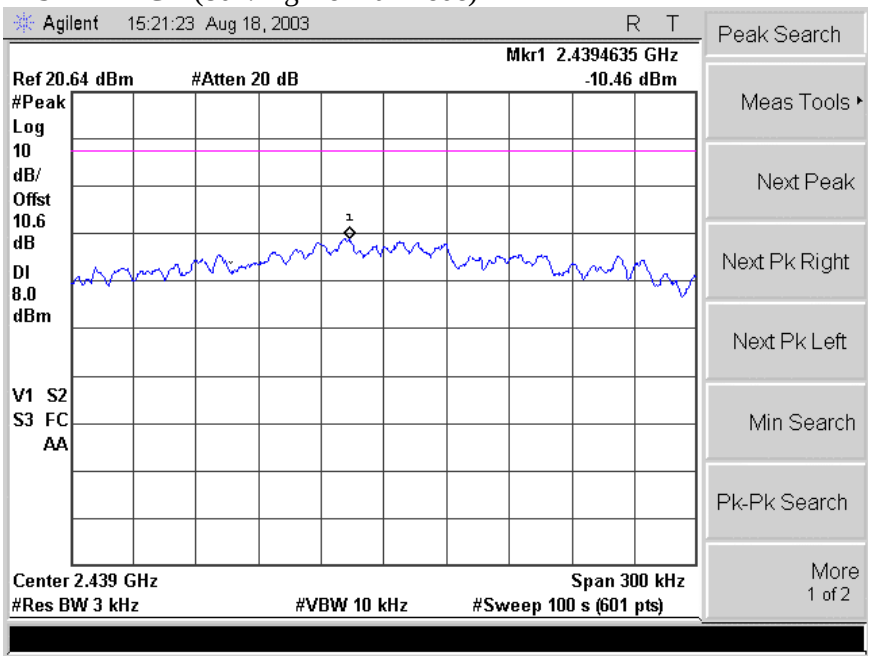

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

PPSD HIGH CH (802.11g Normal mode)

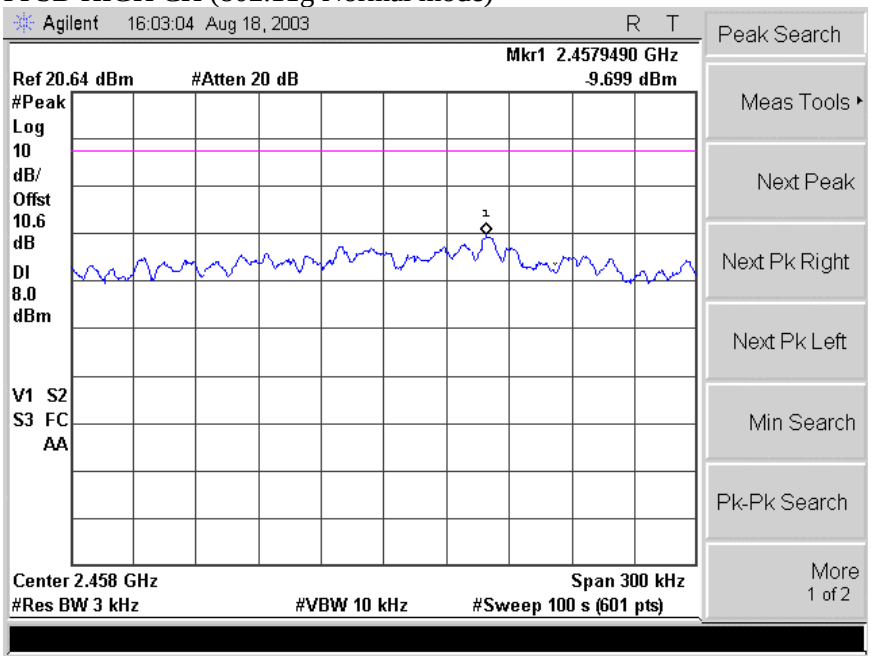

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

7.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

§15.247 (c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in§15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

RESULTS

No non-compliance noted:

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

SPURIOUS EMISSIONS, LOW CHANNEL (802.11b MODE)

LOW CH BANDEDGE (802.11b mode)

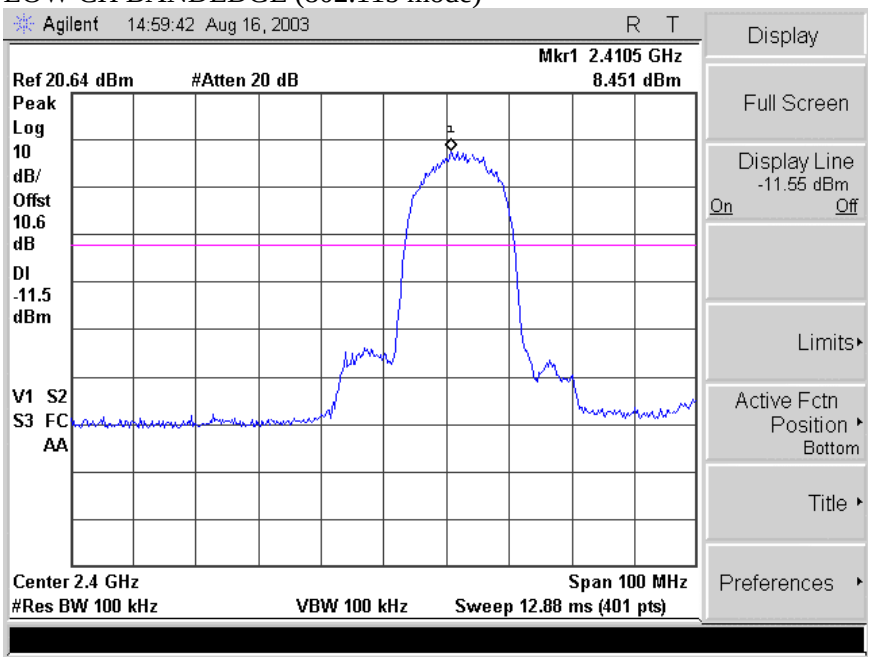

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

LOW CH SPURIOUS (802.11b mode)

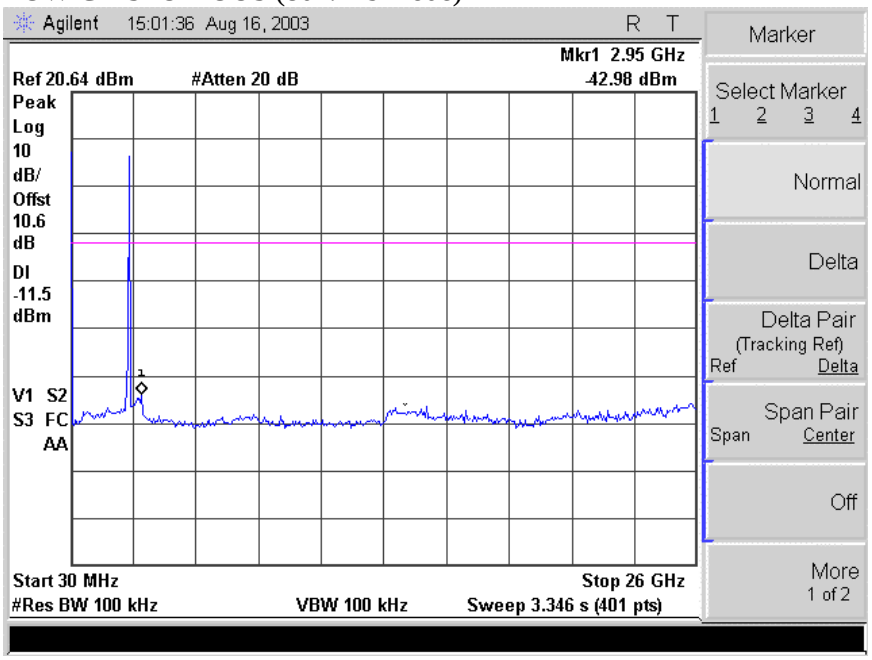

COMPLIANCE CERTIFICATION SERVICES DOCUMENT NO: CCSUP4031A
561F MONTEREY ROAD, MORGAN HILL, CA 95037 USA TEL: (408) 463-0885 FAX: (408) 463-0888
This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

SPURIOUS EMISSIONS, MID CHANNEL (802.11b MODE)

MID CH REFERENCE (802.11b mode)

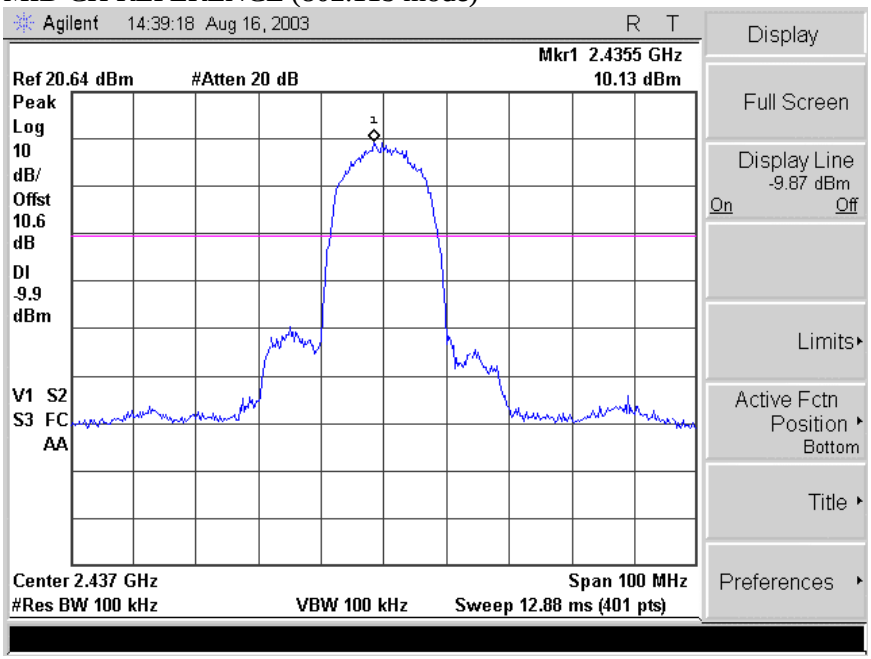

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

MID CH SPURIOUS (802.11b mode)

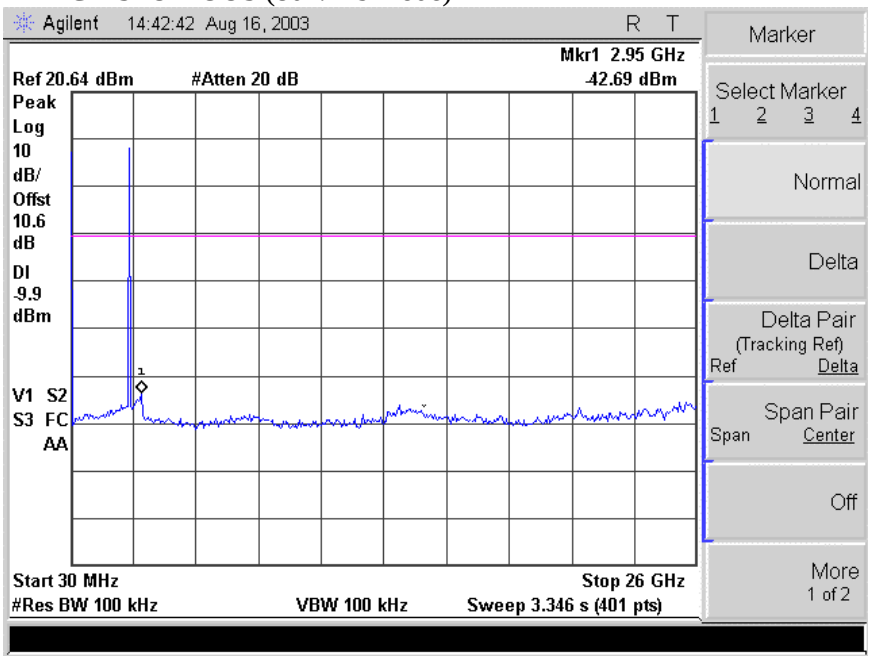

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

SPURIOUS EMISSIONS, HIGH CHANNEL (802.11b MODE)

HIGH CH BANDEDGE (802.11b mode)

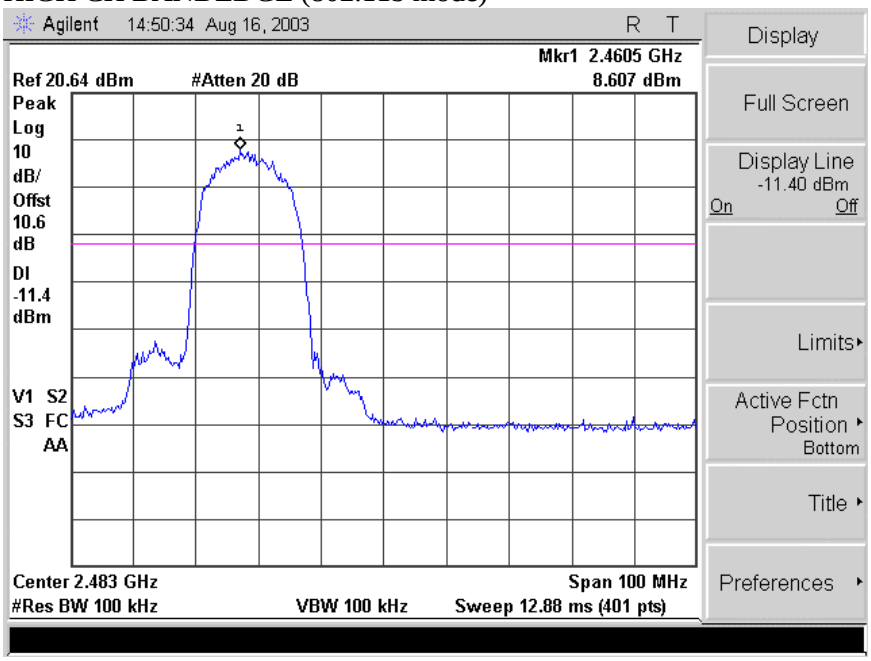

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HIGH CH SPURIOUS (802.11b mode)

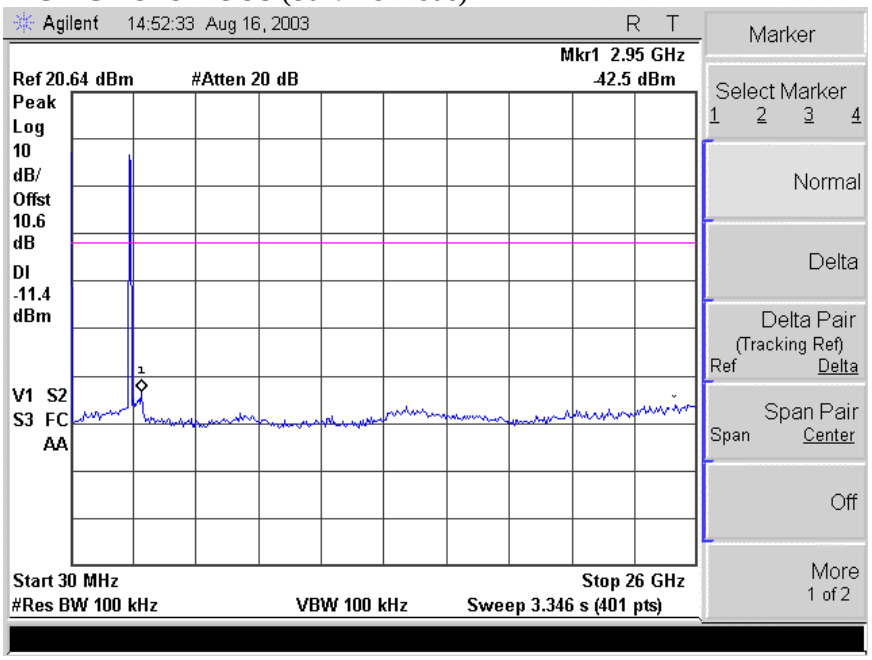

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

SPURIOUS EMISSIONS, LOW CHANNEL (802.11g NORMAL MODE)

LOW CH BANDEDGE (802.11g Normal mode)

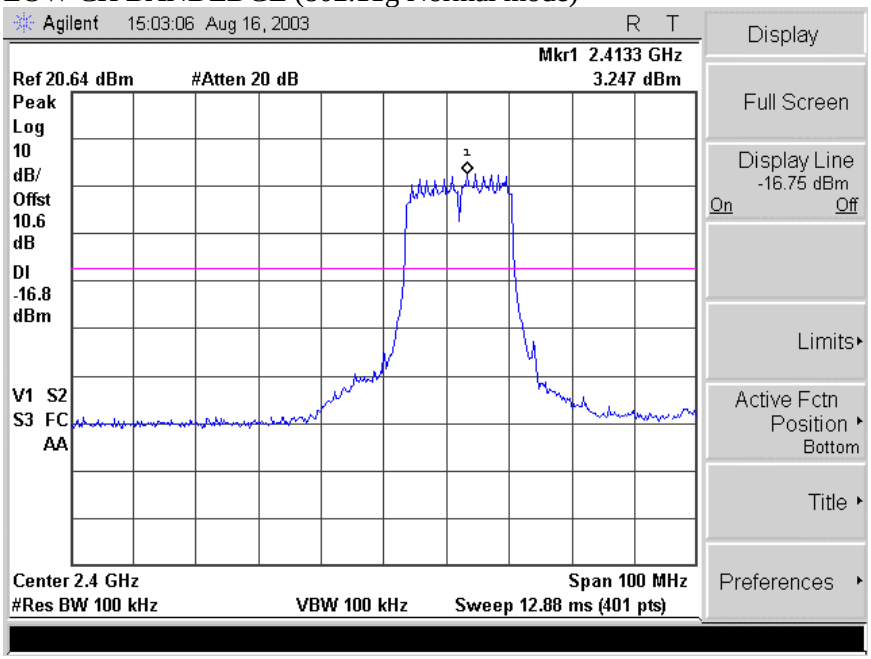

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

LOW CH SPURIOUS (802.11g Normal mode)

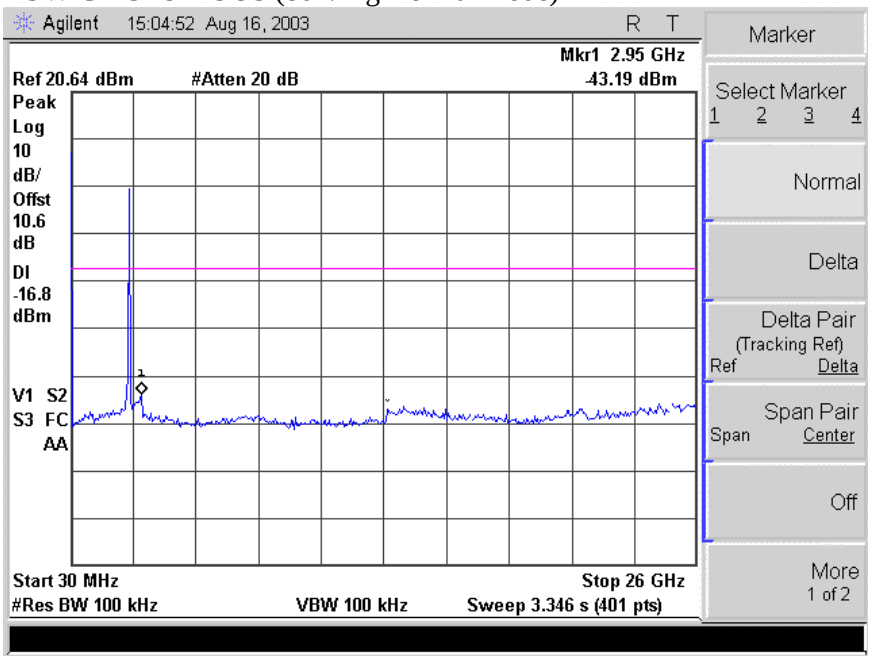

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

SPURIOUS EMISSIONS, MID CHANNEL (802.11g NORMAL MODE)

MID CH REFERENCE (802.11g Normal mode)

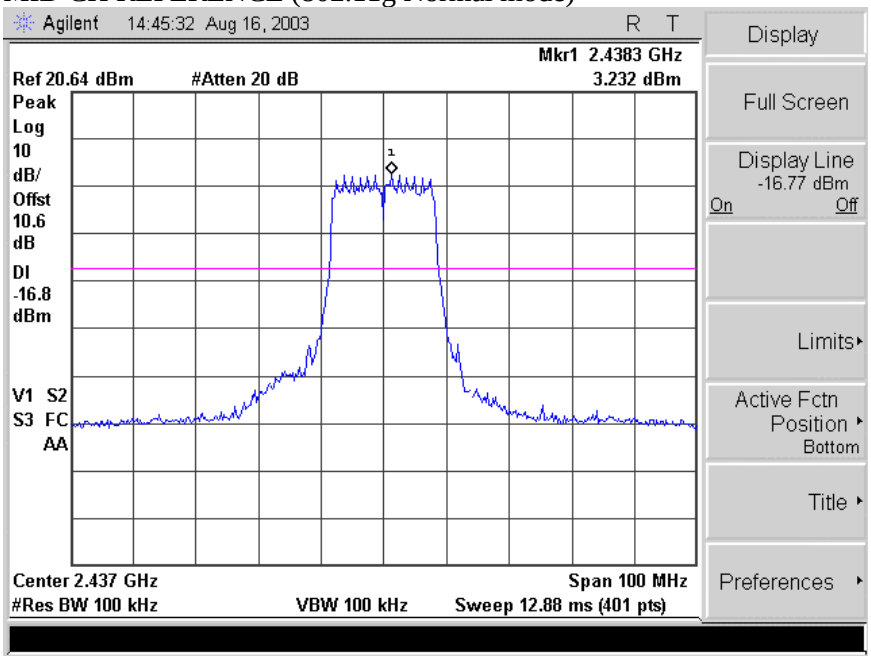

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

MID CH SPURIOUS (802.11g Normal mode)

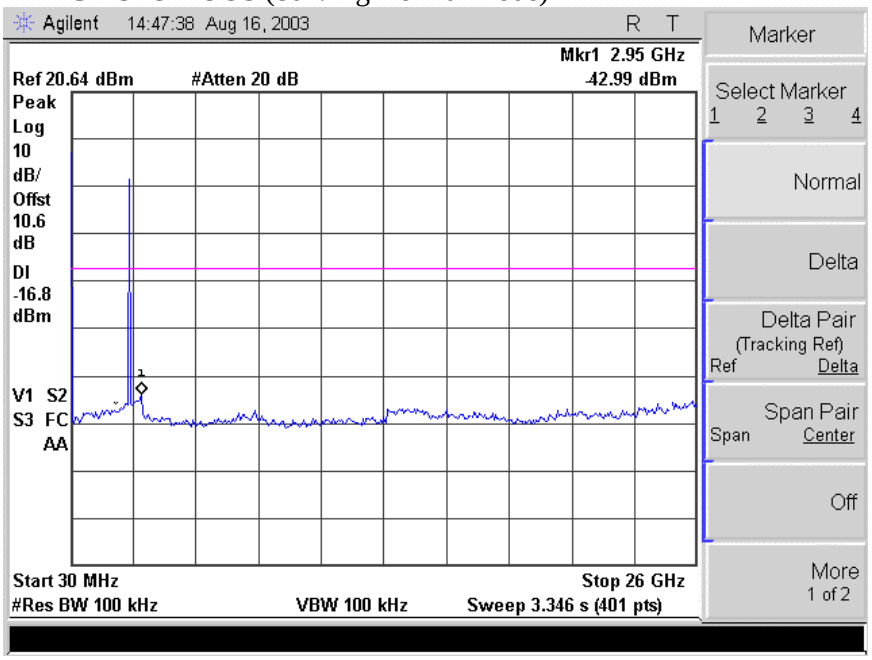

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

SPURIOUS EMISSIONS, HIGH CHANNEL (802.11g NORMAL MODE)

HIGH CH BANDEDGE (802.11g Normal mode)

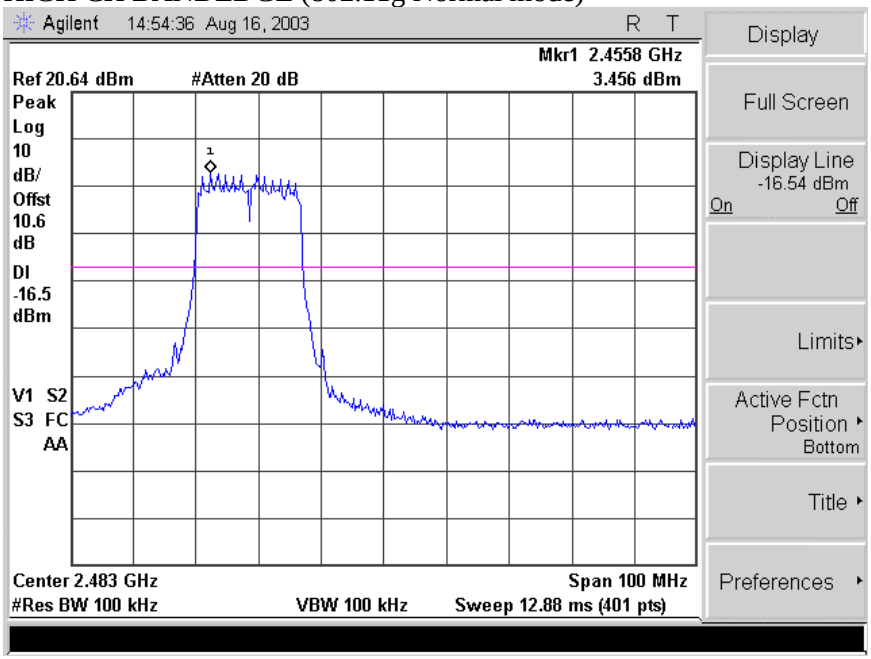

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HIGH CH SPURIOUS (802.11g Normal mode)

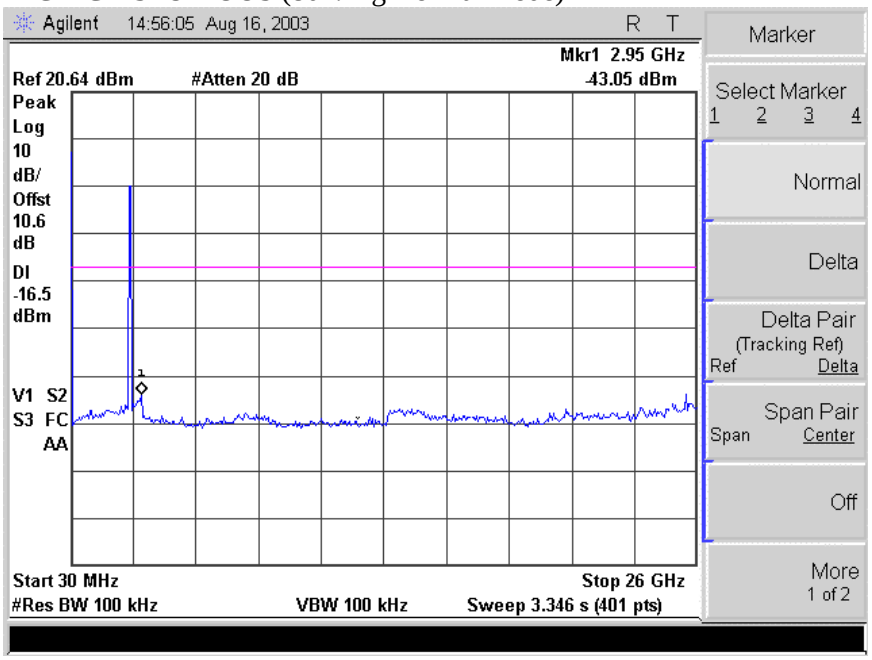

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

7.8. RADIATED EMISSIONS

LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
[1]0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	([2])
13.36 - 13.41			

[1] Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.
[2] Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

COMPLIANCE CERTIFICATION SERVICES DOCUMENT NO: CCSUP4031A
561F MONTEREY ROAD, MORGAN HILL, CA 95037 USA TEL: (408) 463-0885 FAX: (408) 463-0888
This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

RESULTS

No non-compliance noted:

COMPLIANCE CERTIFICATION SERVICES DOCUMENT NO: CCSUP4031A
561F MONTEREY ROAD, MORGAN HILL, CA 95037 USA TEL: (408) 463-0885 FAX: (408) 463-0888
This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

7.8.1. RADIATED EMISSIONS WITH 10 dBi YAGI ANTENNA

RADIATED RF MEASUREMENT SETUP

RADIATED FRONT PHOTO

COMPLIANCE CERTIFICATION SERVICES DOCUMENT NO: CCSUP4031A
561F MONTEREY ROAD, MORGAN HILL, CA 95037 USA TEL: (408) 463-0885 FAX: (408) 463-0888
This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RADIATED BACK PHOTO

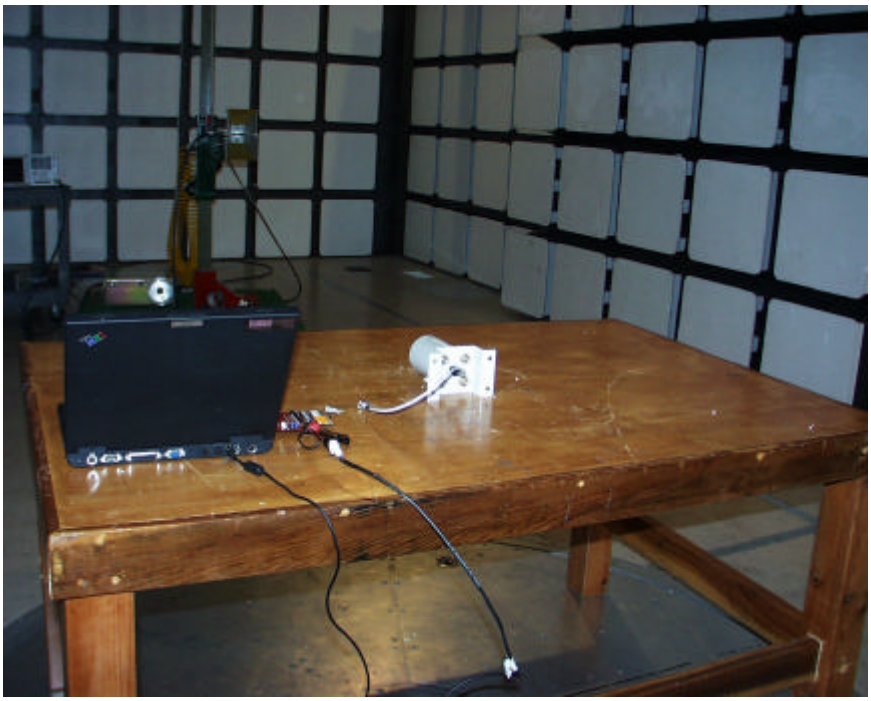

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

LOW CH RESTRICTED, PEAK (802.11b mode, Horizontal)

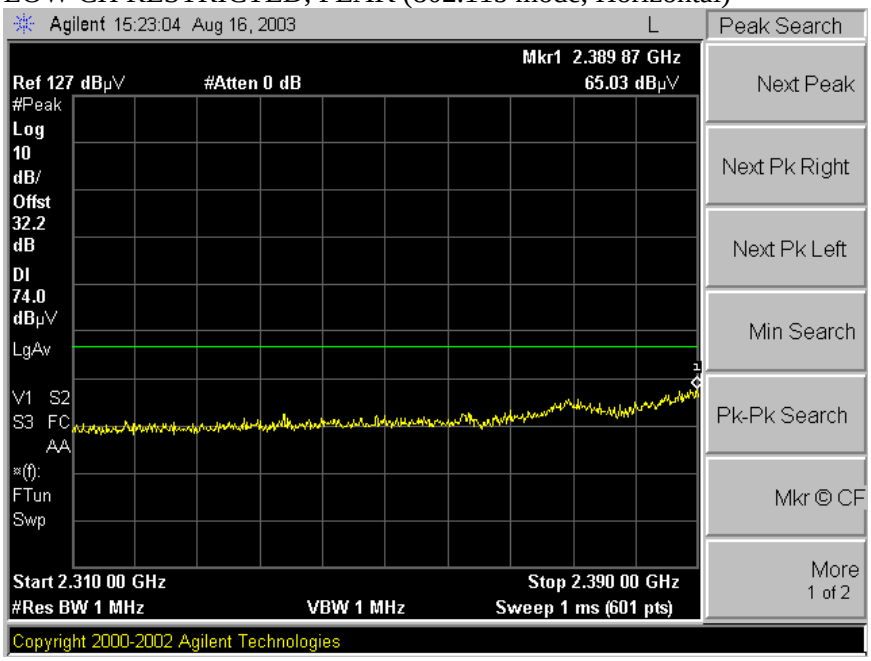

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

LOW CH RESTRICTED, AVG (802.11b mode, Horizontal)

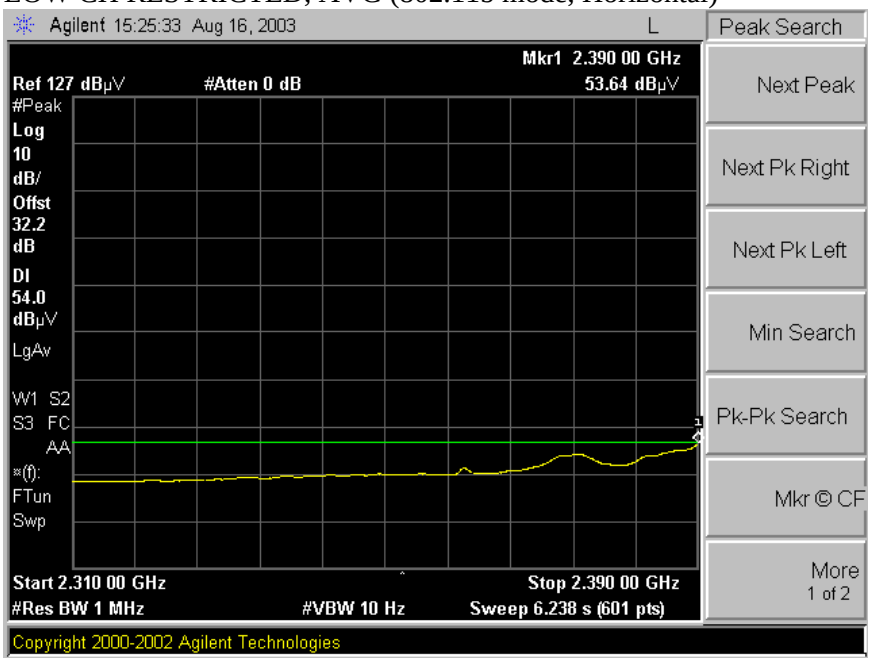

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

LOW CH RESTRICTED, PEAK (802.11b mode, Vertical)

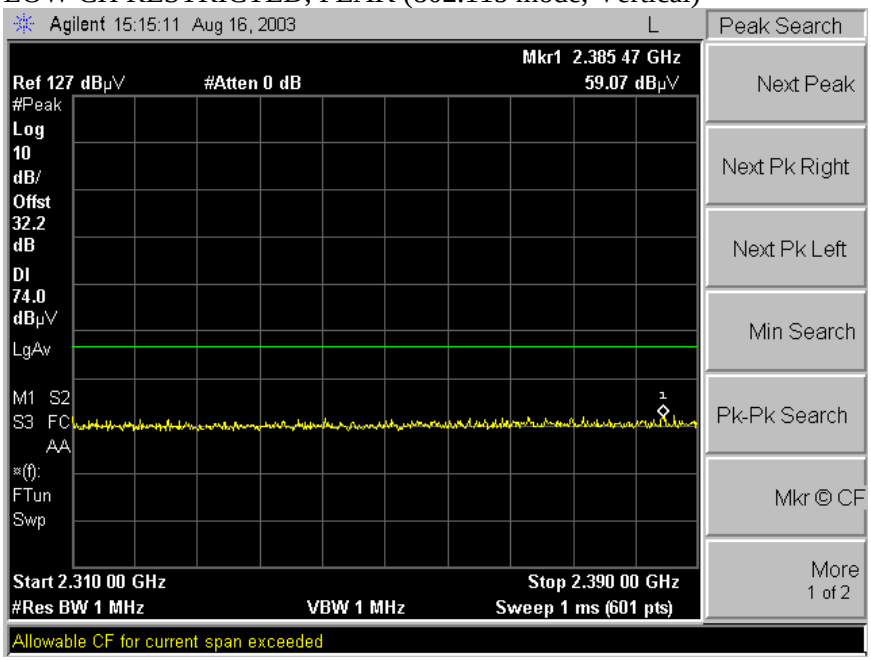

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

LOW CH RESTRICTED, AVG (802.11b mode, Vertical)

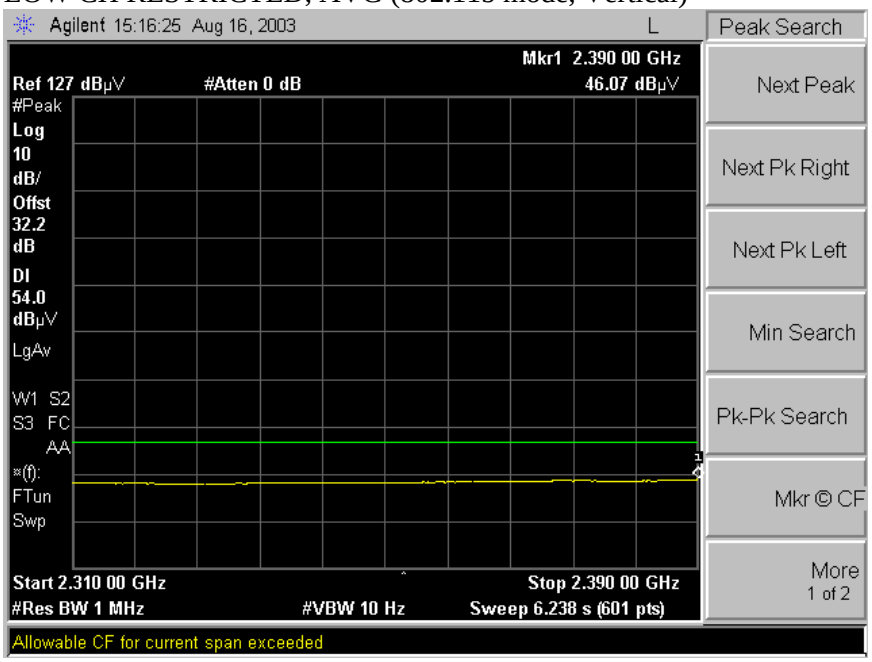

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)

HIGH CH RESTRICTED, PEAK (802.11b mode, Horizontal)

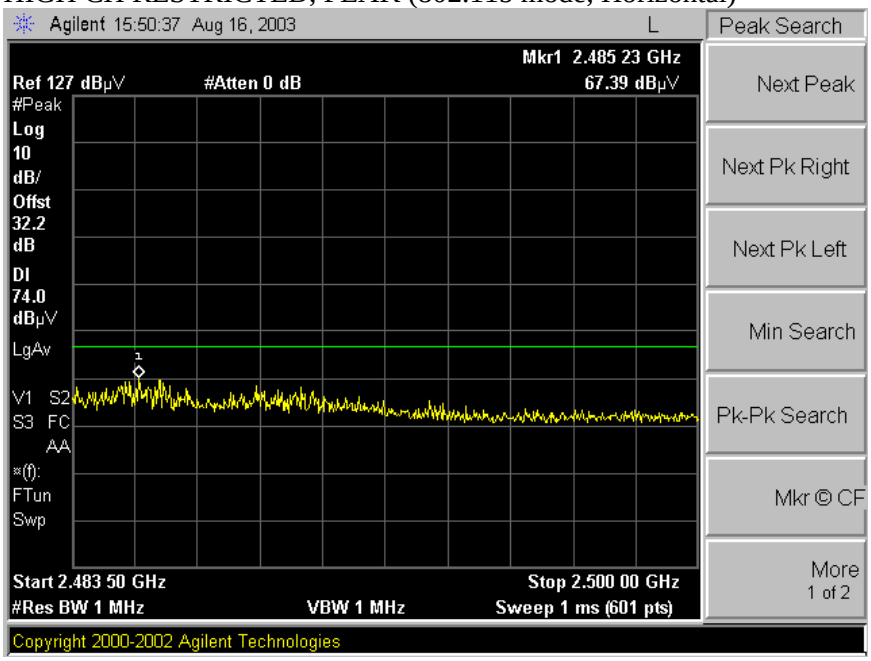

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HIGH CH RESTRICTED, AVG (802.11b mode, Horizontal)

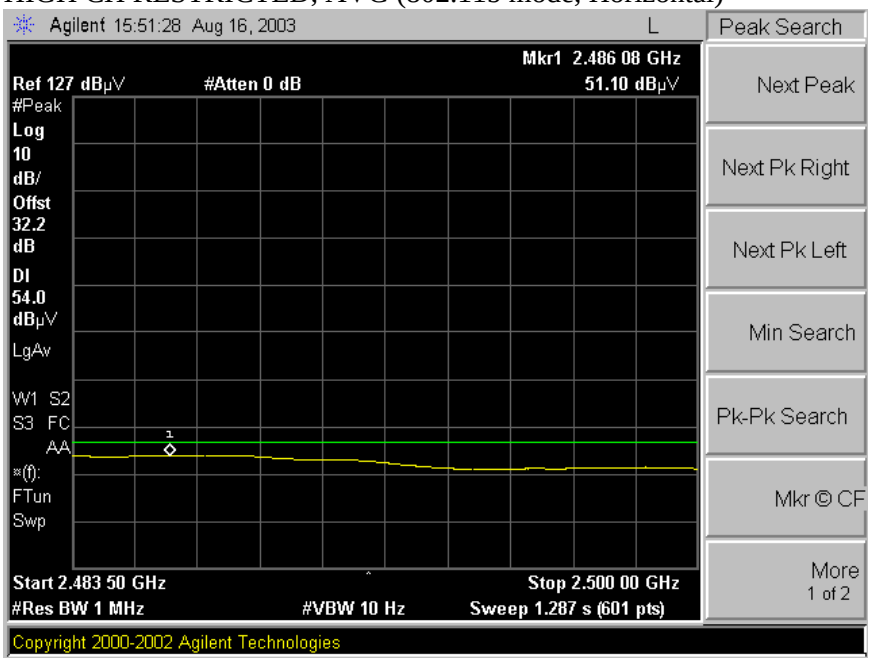

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

HIGH CH RESTRICTED, PEAK (802.11b mode, Vertical)

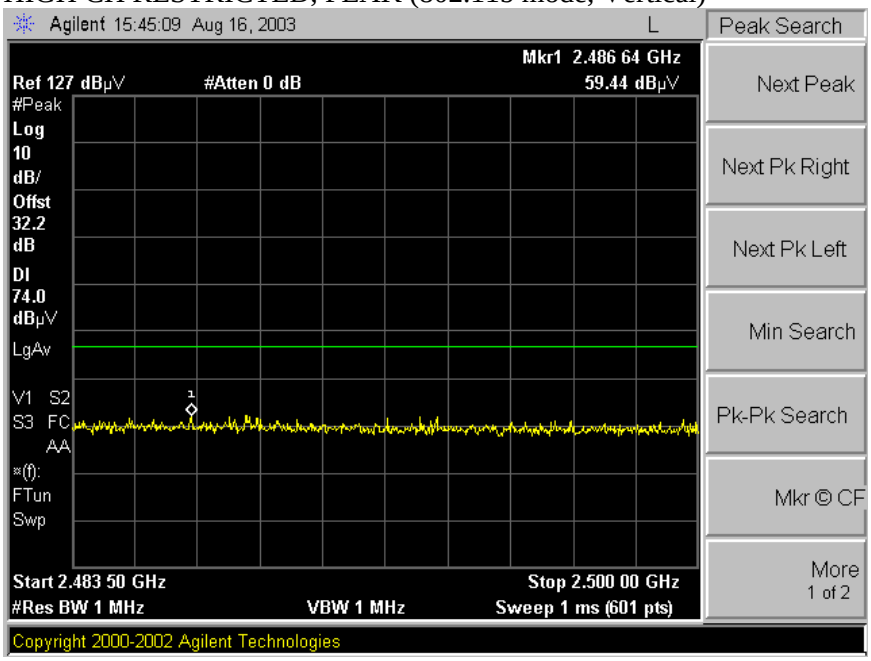

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HIGH CH RESTRICTED, AVG (802.11b mode, Vertical)

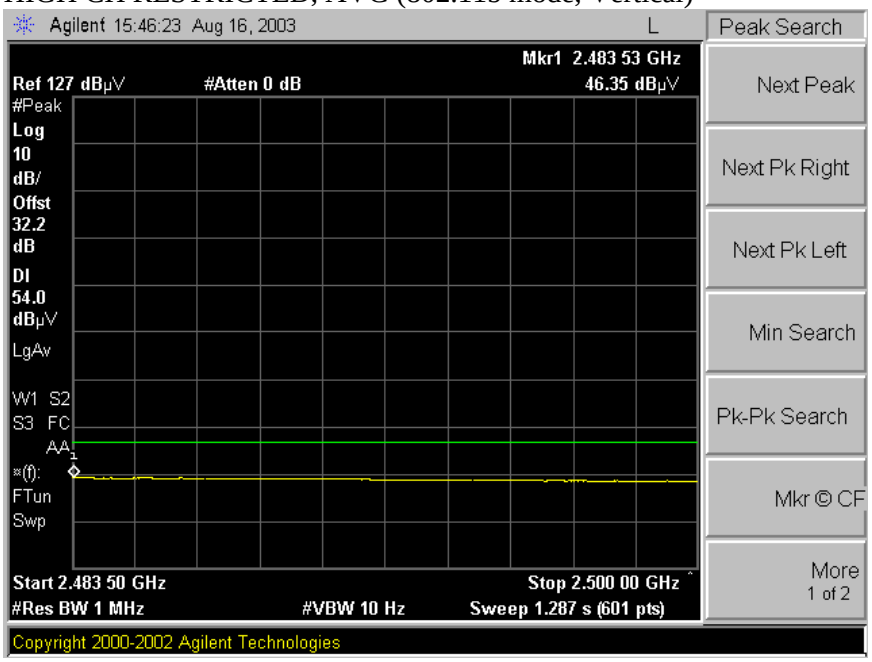

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HARMONICS AND SPURIOUS EMISSIONS (b MODE)

08/19/03 **High Frequency Measurement**
Compliance Certification Services, Morgan Hill Open Field Site

Test Engr:William Zhuang
Project #:03U2181-1
Company Name:Cisco Systems, Akron
EUT Descrip.:802.11b/g mini-PCI Card
EUT M/N:Orion 1200 D
Test Target:FCC 15.247
Mode Oper:Transmit with Yagi Antenna

Test Equipment:

EMCO Horn 1-18GHz	Pre-amplifer 1-26GHz	Spectrum Analyzer	Horn > 18GHz
T59; S/N: 3245 @1m	T86 Miteq 924341	Agilent E4446A Analyzer	

Hi Frequency Cables: ☑ (2 ft) ☐ (2 ~ 3 ft) ☐ (4 ~ 6 ft) ☑ (12 ft)

Peak Measurements:
1 MHz Resolution Bandwidth
1MHz Video Bandwidth

Average Measurements:
1 MHz Resolution Bandwidth
10Hz Video Bandwidth

f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
4.824	9.8	60.3	49.9	33.8	3.9	-45.6	0.0	1.0	53.3	42.9	74.0	54.0	-20.7	-11.1	b mode, Low ch, V
4.824	9.8	58.2	46.2	33.8	3.9	-45.6	0.0	1.0	51.2	39.2	74.0	54.0	-22.8	-14.8	b mode, Low ch, H
7.236	9.8	53.6	45.8	36.9	4.9	-46.6	0.0	1.0	49.7	41.9	74.0	54.0	-24.3	-12.1	b mode, Low ch, V
7.236	9.8	48.9	38.2	36.9	4.9	-46.6	0.0	1.0	45.0	34.3	74.0	54.0	-29.0	-19.7	b mode, Low ch, H
9.648	9.8	47.1	38.0	38.6	5.8	-45.2	0.0	1.0	47.2	38.1	74.0	54.0	-26.8	-15.9	b mode, Low ch, V
9.648	9.8	49.2	38.0	38.6	5.8	-45.2	0.0	1.0	49.3	38.1	74.0	54.0	-24.7	-15.9	b mode, Low ch, H
4.874	9.8	63.9	50.2	33.8	3.9	-45.6	0.0	1.0	56.9	43.2	74.0	54.0	-17.1	-10.8	b mode, Mid ch, V
4.874	9.8	50.3	41.2	33.8	3.9	-45.6	0.0	1.0	43.3	34.2	74.0	54.0	-30.7	-19.8	b mode, Mid ch, H
7.311	9.8	57.6	48.9	37.0	4.9	-46.6	0.0	1.0	53.9	45.2	74.0	54.0	-20.1	-8.8	b mode, Mid ch, V
7.311	9.8	55.9	44.6	37.0	4.9	-46.6	0.0	1.0	52.2	40.9	74.0	54.0	-21.8	-13.1	b mode, Mid ch, H
9.748	9.8	49.3	41.9	38.5	5.8	-45.1	0.0	1.0	49.5	42.1	74.0	54.0	-24.5	-11.9	b mode, Mid ch, V
9.748	9.8	48.5	40.7	38.5	5.8	-45.1	0.0	1.0	48.7	40.9	74.0	54.0	-25.3	-13.1	b mode, Mid ch, H
4.924	9.8	61.2	49.2	33.8	3.9	-45.7	0.0	1.0	54.2	42.2	74.0	54.0	-19.8	-11.8	b mode, High ch, V
4.924	9.8	55.4	45.1	33.8	3.9	-45.7	0.0	1.0	48.4	38.1	74.0	54.0	-25.6	-15.9	b mode, High ch, H
7.386	9.8	57.9	44.5	37.1	5.0	-46.5	0.0	1.0	54.3	40.9	74.0	54.0	-19.7	-13.1	b mode, High ch, V
7.386	9.8	50.4	39.2	37.1	5.0	-46.5	0.0	1.0	46.8	35.6	74.0	54.0	-27.2	-18.4	b mode, High ch, H
9.848	9.8	50.6	46.0	38.5	5.8	-45.0	0.0	1.0	50.9	46.3	74.0	54.0	-23.1	-7.7	b mode, High ch, V
9.848	9.8	51.2	42.2	38.5	5.8	-45.0	0.0	1.0	51.5	42.5	74.0	54.0	-22.5	-11.5	b mode, High ch, H
								1.0							

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)

LOW CH RESTRICTED, PEAK (802.11g mode, Horizontal)

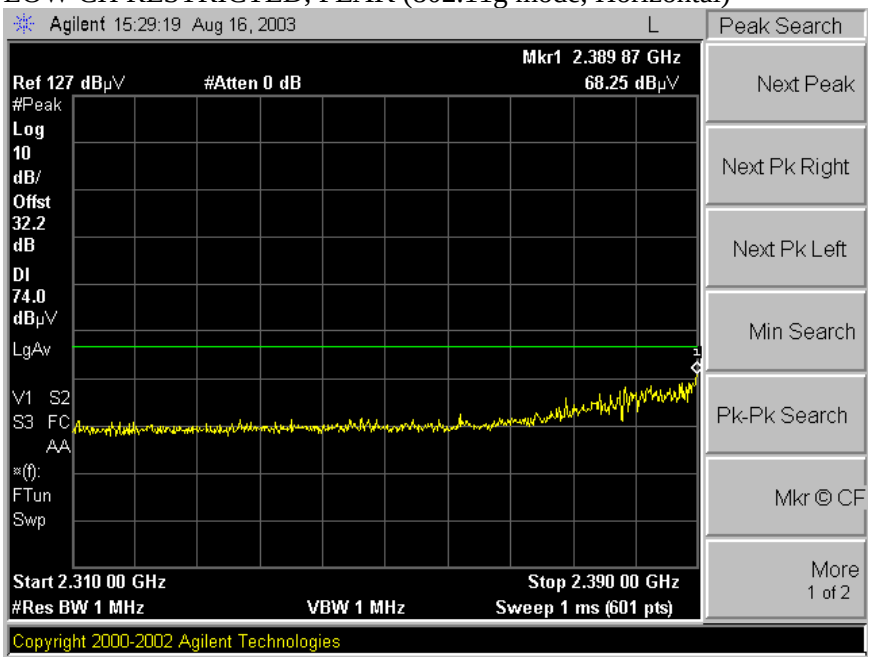

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

LOW CH RESTRICTED, AVG (802.11g mode, Horizontal)

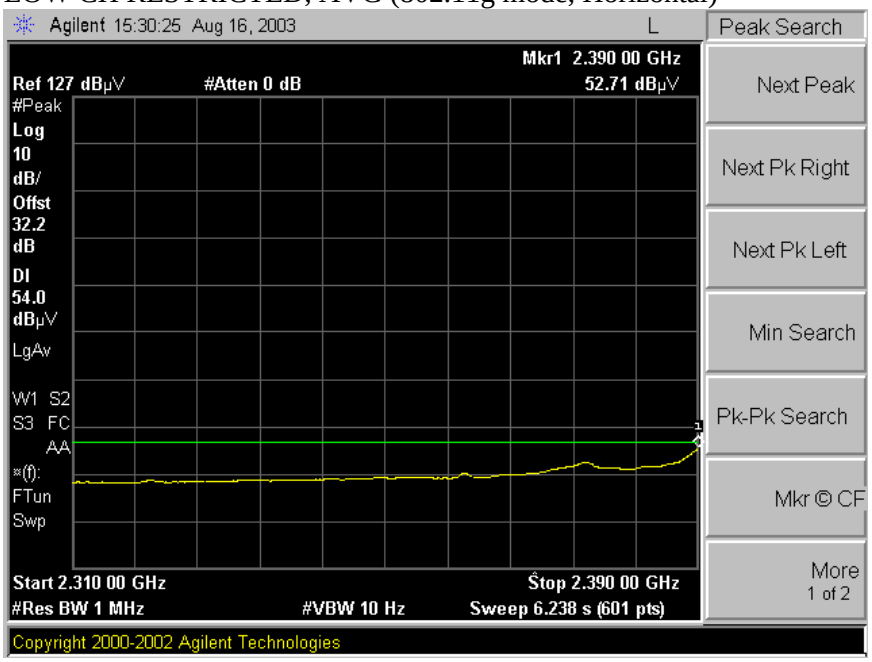

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)

LOW CH RESTRICTED, PEAK (802.11g mode, Vertical)

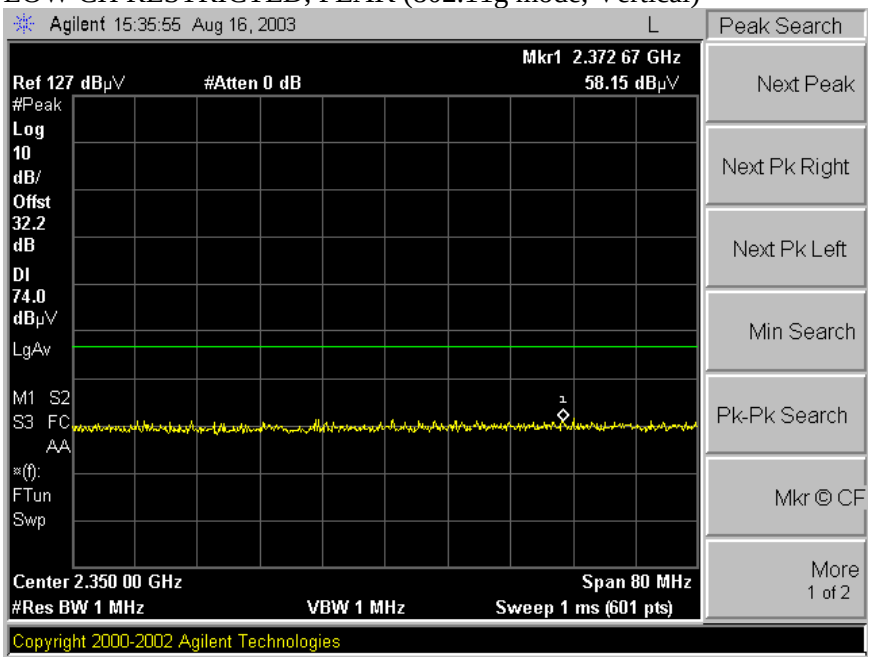

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

LOW CH RESTRICTED, AVG (802.11g mode, Vertical)

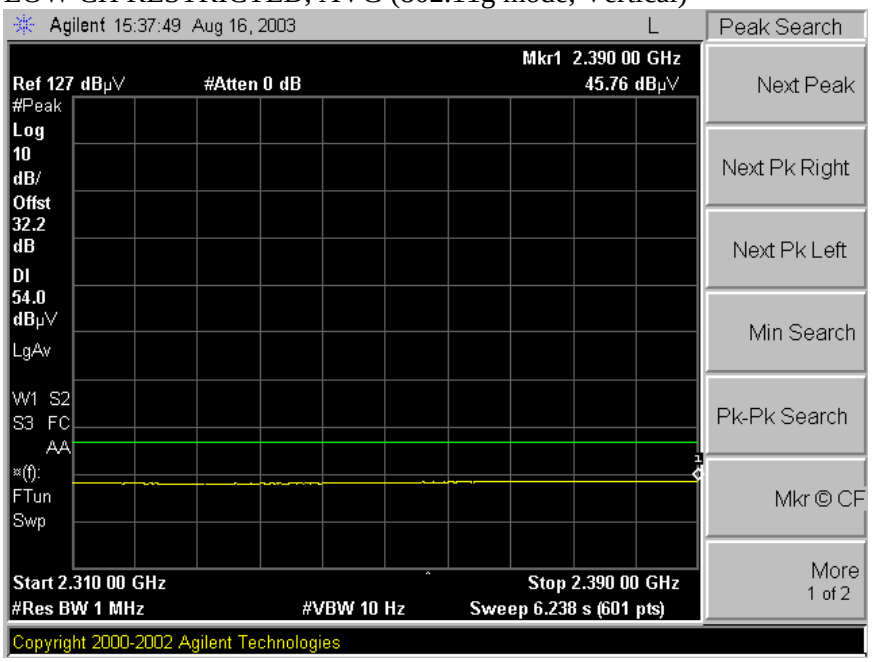

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)

HIGH CH RESTRICTED, PEAK (802.11g mode, Horizontal)

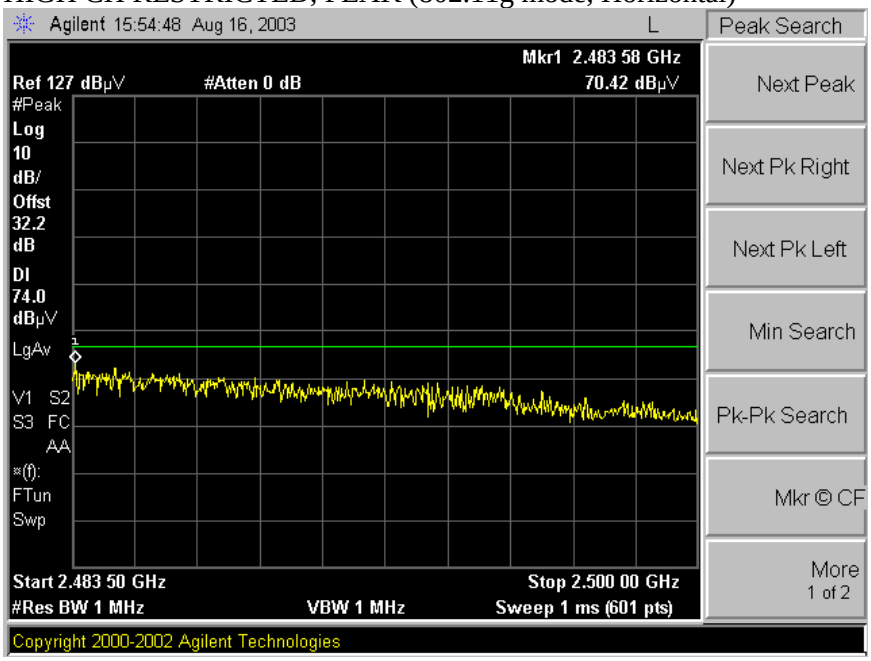

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HIGH CH RESTRICTED, AVG (802.11g mode, Horizontal)

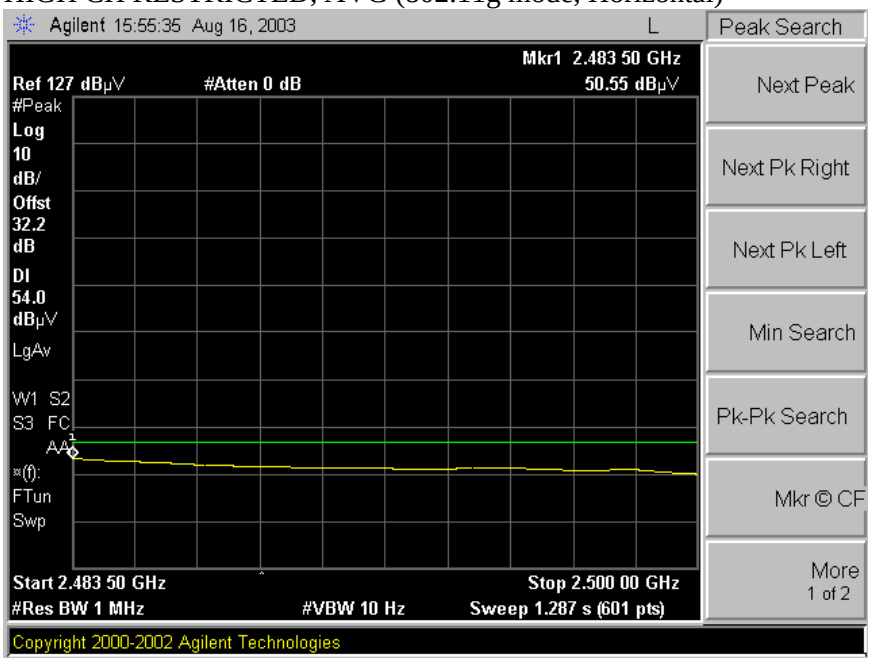

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)

HIGH CH RESTRICTED, PEAK (802.11g mode, Vertical)

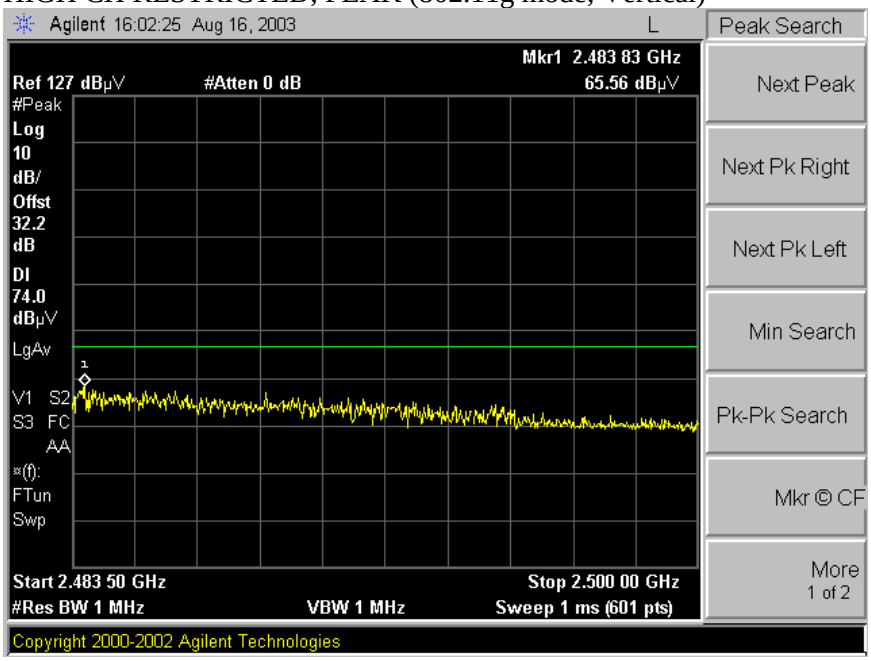

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HIGH CH RESTRICTED, AVG (802.11g mode, Vertical)

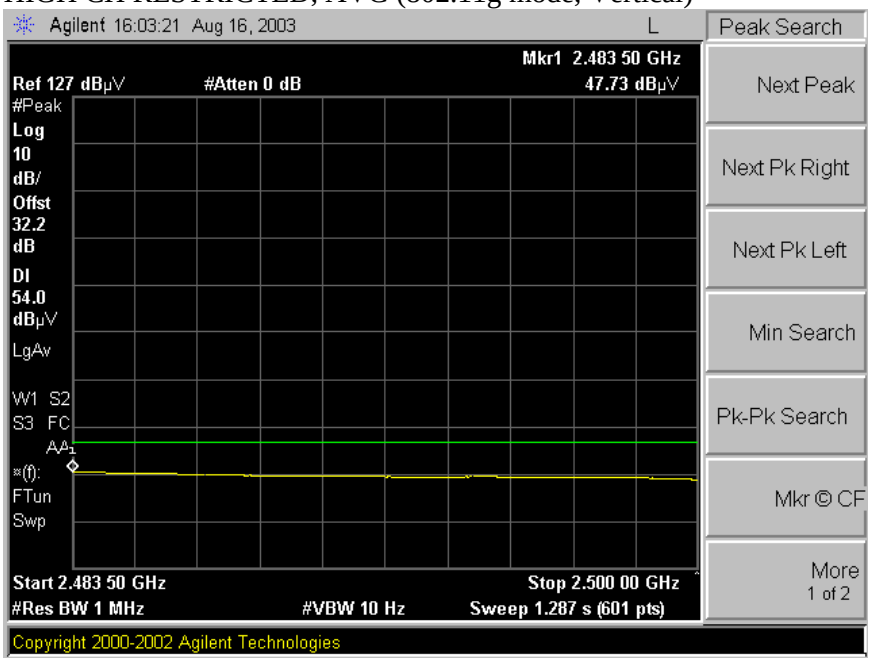

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HARMONICS AND SPURIOUS EMISSIONS (g NORMAL MODE)

08/19/03 **High Frequency Measurement**
Compliance Certification Services, Morgan Hill Open Field Site

Test Engr:William Zhuang
Project #:03U2181-1
Company Name:Cisco Systems, Akron
EUT Descrip.:802.11b/g mini-PCI Card
EUT M/N:Orion 1200 D
Test Target:FCC 15.247
Mode Oper:Transmit with Yagi Antenna

Test Equipment:

EMCO Horn 1-18GHz	Pre-amplifer 1-26GHz	Spectrum Analyzer	Horn > 18GHz
T59; S/N: 3245 @1m	T86 Miteq 924341	Agilent E4446A Analyzer	

Hi Frequency Cables: ☑ (2 ft) ☐ (2 ~ 3 ft) ☐ (4 ~ 6 ft) ☑ (12 ft)

Peak Measurements:
1 MHz Resolution Bandwidth
1MHz Video Bandwidth

Average Measurements:
1 MHz Resolution Bandwidth
10Hz Video Bandwidth

f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
4.824	9.8	52.8	44.5	33.8	3.9	-45.6	0.0	1.0	45.8	37.5	74.0	54.0	-28.2	-16.5	g mode, Low ch, V
4.824	9.8	51.2	40.6	33.8	3.9	-45.6	0.0	1.0	44.2	33.6	74.0	54.0	-29.8	-20.4	g mode, Low ch, H
7.236	9.8	51.6	41.0	36.9	4.9	-46.6	0.0	1.0	47.7	37.1	74.0	54.0	-26.3	-16.9	g mode, Low ch, V
7.236	9.8	47.4	38.2	36.9	4.9	-46.6	0.0	1.0	43.5	34.3	74.0	54.0	-30.5	-19.7	g mode, Low ch, H
9.648	9.8	46.9	37.5	38.6	5.8	-45.2	0.0	1.0	47.0	37.6	74.0	54.0	-27.0	-16.4	g mode, Low ch, V
9.648	9.8	48.2	35.5	38.6	5.8	-45.2	0.0	1.0	48.3	35.6	74.0	54.0	-25.7	-18.4	g mode, Low ch, H
4.874	9.8	58.6	47.1	33.8	3.9	-45.6	0.0	1.0	51.6	40.1	74.0	54.0	-22.4	-13.9	g mode, Mid ch, V
4.874	9.8	47.9	40.1	33.8	3.9	-45.6	0.0	1.0	40.9	33.1	74.0	54.0	-33.1	-20.9	g mode, Mid ch, H
7.311	9.8	53.6	42.1	37.0	4.9	-46.6	0.0	1.0	49.9	38.4	74.0	54.0	-24.1	-15.6	g mode, Mid ch, V
7.311	9.8	50.7	38.8	37.0	4.9	-46.6	0.0	1.0	47.0	35.1	74.0	54.0	-27.0	-18.9	g mode, Mid ch, H
9.748	9.8	49.5	39.2	38.5	5.8	-45.1	0.0	1.0	49.7	39.4	74.0	54.0	-24.3	-14.6	g mode, Mid ch, V
9.748	9.8	48.8	38.5	38.5	5.8	-45.1	0.0	1.0	49.0	38.7	74.0	54.0	-25.0	-15.3	g mode, Mid ch, H
4.924	9.8	55.6	46.4	33.8	3.9	-45.7	0.0	1.0	48.6	39.4	74.0	54.0	-25.4	-14.6	g mode, High ch, V
4.924	9.8	49.1	42.1	33.8	3.9	-45.7	0.0	1.0	42.1	35.1	74.0	54.0	-31.9	-18.9	g mode, High ch, H
7.386	9.8	54.5	38.5	37.1	5.0	-46.5	0.0	1.0	50.9	34.9	74.0	54.0	-23.1	-19.1	g mode, High ch, V
7.386	9.8	51.4	38.8	37.1	5.0	-46.5	0.0	1.0	47.8	35.2	74.0	54.0	-26.2	-18.8	g mode, High ch, H
9.848	9.8	48.4	41.2	38.5	5.8	-45.0	0.0	1.0	48.7	41.5	74.0	54.0	-25.3	-12.5	g mode, High ch, V
9.848	9.8	51.7	41.2	38.5	5.8	-45.0	0.0	1.0	52.0	41.5	74.0	54.0	-22.0	-12.5	g mode, High ch, H
								1.0							

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

7.8.2. RADIATED EMISSIONS WITH 8.5 dBi PATCH ANTENNA

RADIATED RF MEASUREMENT SETUP

RADIATED FRONT PHOTO

COMPLIANCE CERTIFICATION SERVICES DOCUMENT NO: CCSUP4031A
561F MONTEREY ROAD, MORGAN HILL, CA 95037 USA TEL: (408) 463-0885 FAX: (408) 463-0888
This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RADIATED BACK PHOTO

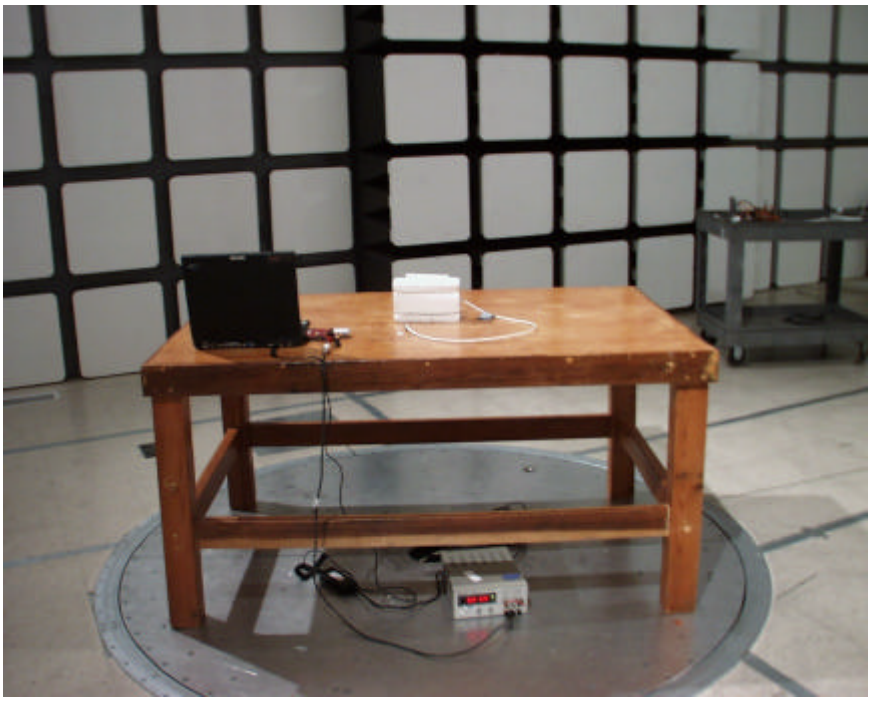

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

LOW CH RESTRICTED, PEAK (802.11b mode, Horizontal)

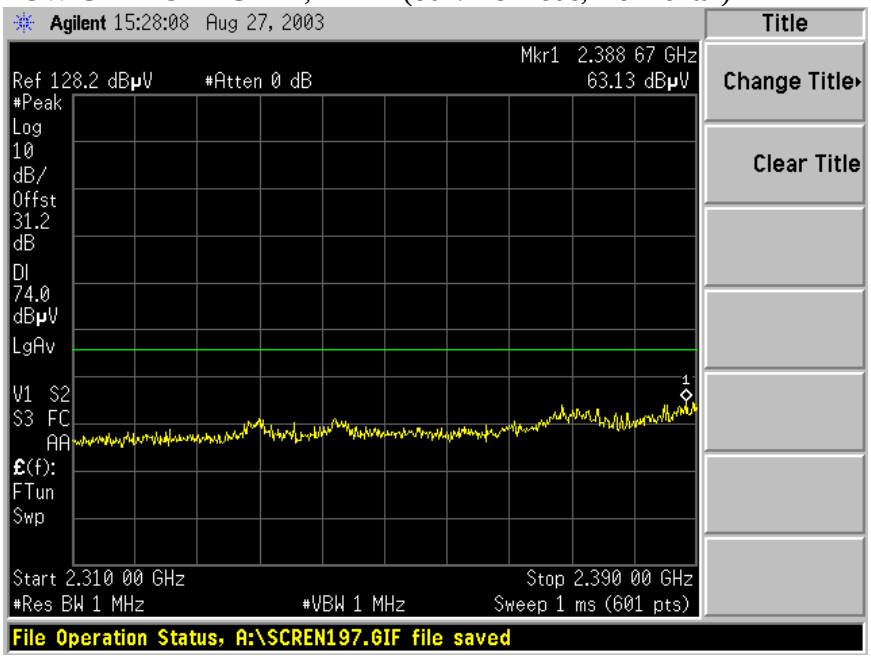

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

LOW CH RESTRICTED, AVG (802.11b mode, Horizontal)

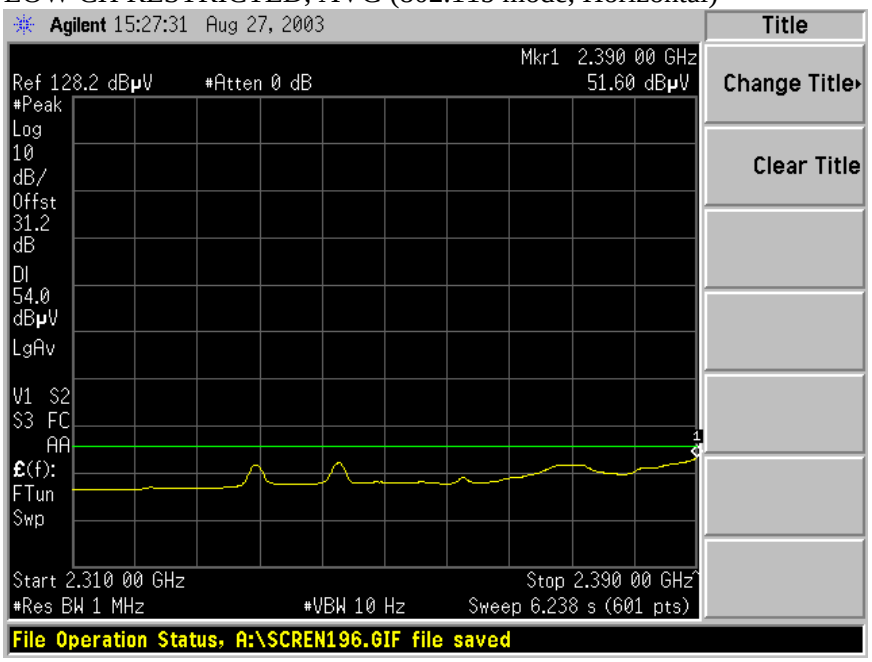

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

LOW CH RESTRICTED, PEAK (802.11b mode, Vertical)

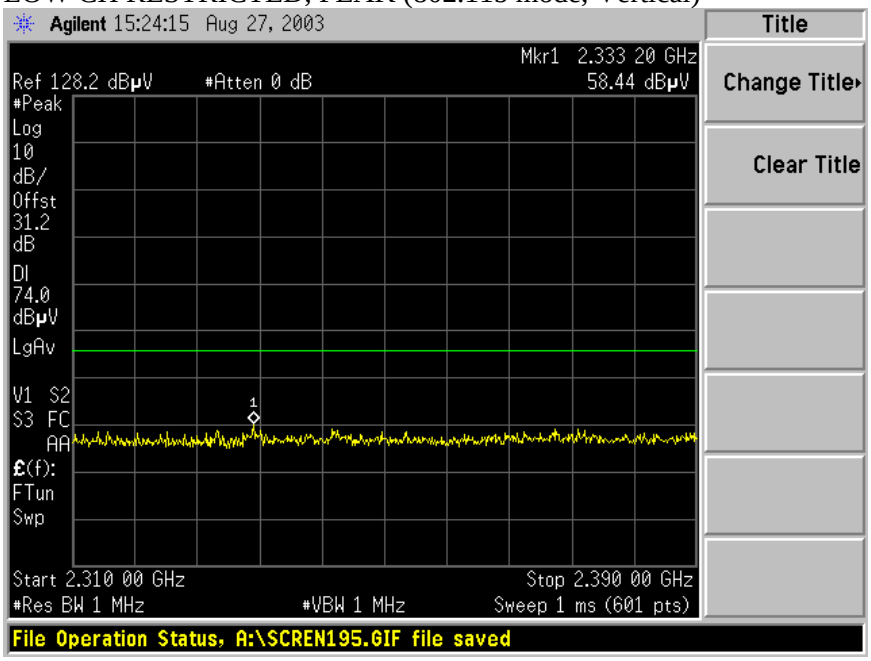

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

LOW CH RESTRICTED, AVG (802.11b mode, Vertical)

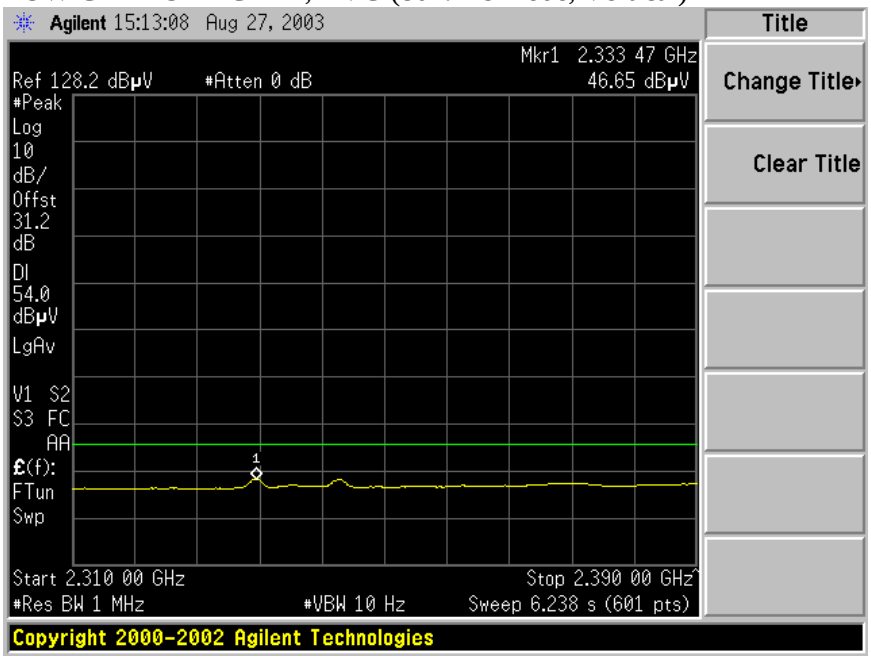

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)

HIGH CH RESTRICTED, PEAK (802.11b mode, Horizontal)

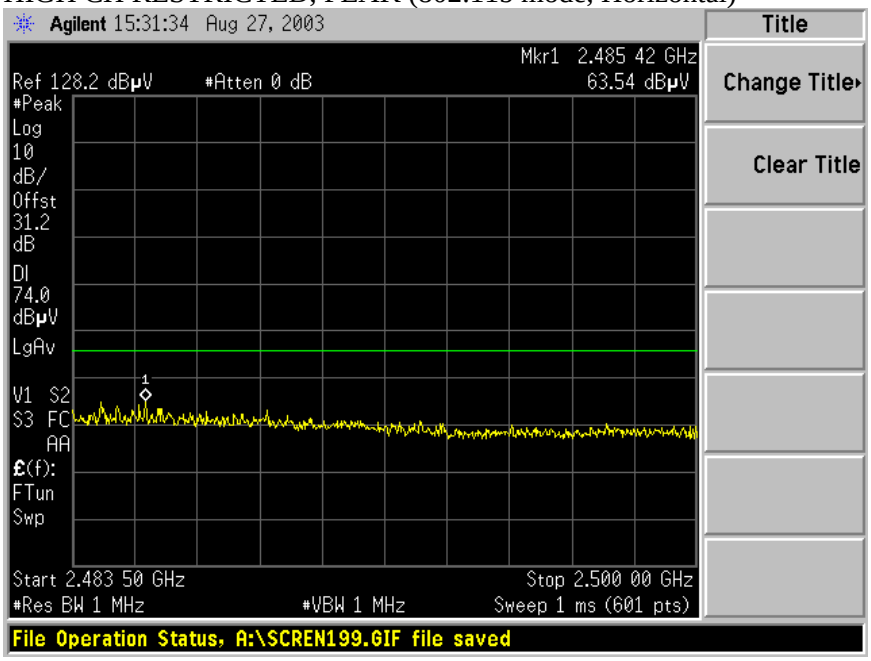

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HIGH CH RESTRICTED, AVG (802.11b mode, Horizontal)

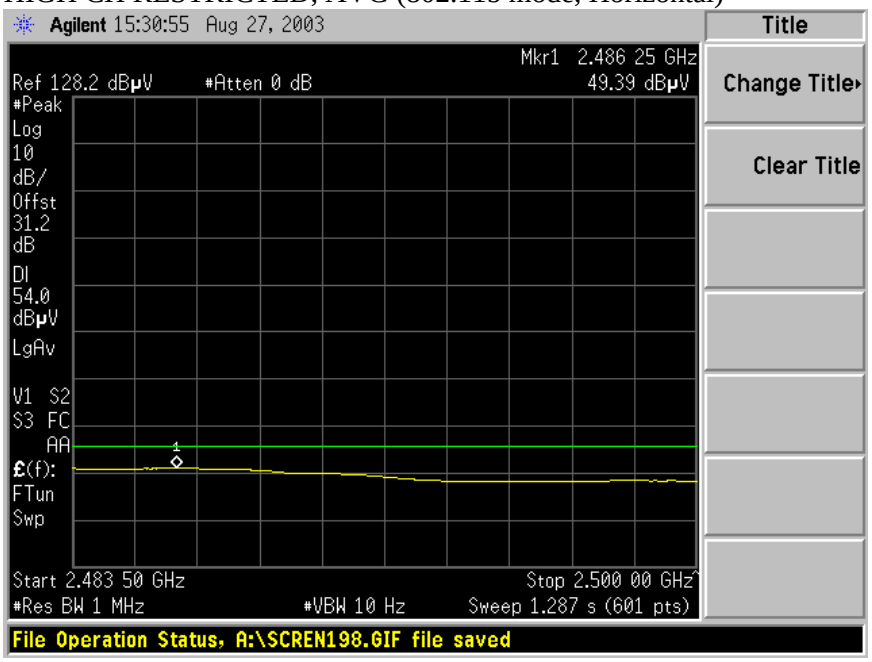

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

HIGH CH RESTRICTED, PEAK (802.11b mode, Vertical)

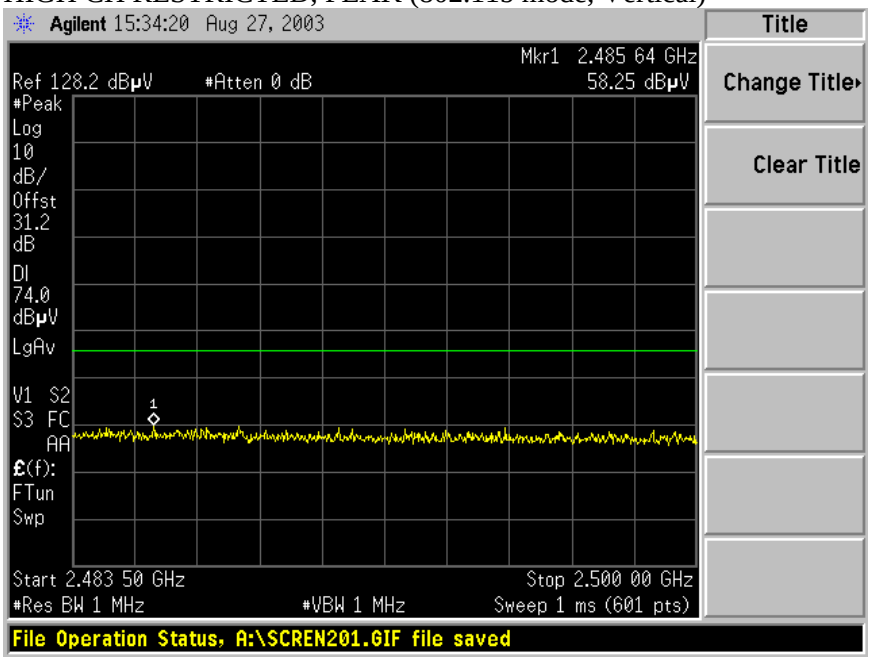

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HIGH CH RESTRICTED, AVG (802.11b mode, Vertical)

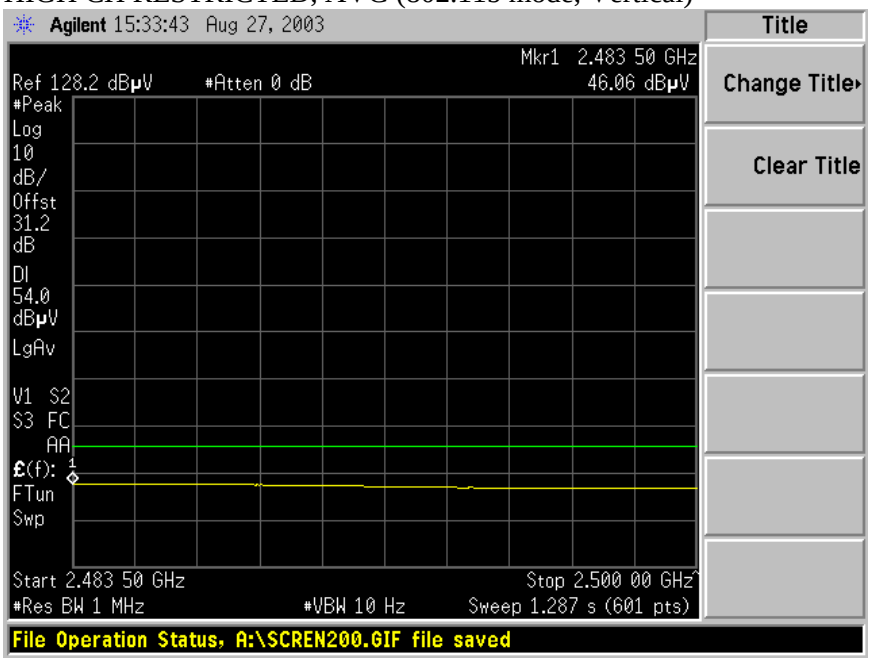

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HARMONICS AND SPURIOUS EMISSIONS (b MODE)

08/27/03 **High Frequency Measurement**
Compliance Certification Services, Morgan Hill Open Field Site

Test Engr:William Zhuang
Project #:03U2181-1
Company Name:Cisco Systems, Akron
EUT Descrip.:802.11b/g mini-PCI Card
EUT M/N:Orion 1200 D
Test Target:FCC 15.247
Mode Oper:Transmit with Patch Antenna

Test Equipment:

EMCO Horn 1-18GHz	Pre-amplifer 1-26GHz	Spectrum Analyzer	Horn > 18GHz
T59; S/N: 3245 @1m	T86 Miteq 924341	Agilent E4446A Analyzer	

Hi Frequency Cables: ☑ (2 ft) ☐ (2 ~ 3 ft) ☐ (4 ~ 6 ft) ☑ (12 ft)

Peak Measurements:
1 MHz Resolution Bandwidth
1MHz Video Bandwidth

Average Measurements:
1 MHz Resolution Bandwidth
10Hz Video Bandwidth

f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
4.824	9.8	63.3	49.6	33.8	3.9	-45.6	0.0	1.0	56.3	42.6	74.0	54.0	-17.7	-11.4	b mode, Low ch, V
4.824	9.8	52.9	41.0	33.8	3.9	-45.6	0.0	1.0	45.9	34.0	74.0	54.0	-28.1	-20.0	b mode, Low ch, H
7.236	9.8	58.1	48.4	36.9	4.9	-46.6	0.0	1.0	54.2	44.5	74.0	54.0	-19.8	-9.5	b mode, Low ch, V
7.236	9.8	54.9	43.4	36.9	4.9	-46.6	0.0	1.0	51.1	39.5	74.0	54.0	-22.9	-14.5	b mode, Low ch, H
9.648	9.8	51.1	43.1	38.6	5.8	-45.2	0.0	1.0	51.2	43.2	74.0	54.0	-22.8	-10.8	b mode, Low ch, V
9.648	9.8	49.8	41.3	38.6	5.8	-45.2	0.0	1.0	49.9	41.4	74.0	54.0	-24.1	-12.6	b mode, Low ch, H
4.874	9.8	64.5	52.2	33.8	3.9	-45.6	0.0	1.0	57.5	45.2	74.0	54.0	-16.5	-8.8	b mode, Mid ch, V
4.874	9.8	56.2	45.8	33.8	3.9	-45.6	0.0	1.0	49.3	38.8	74.0	54.0	-24.7	-15.2	b mode, Mid ch, H
7.311	9.8	56.5	47.5	37.0	4.9	-46.6	0.0	1.0	52.7	43.8	74.0	54.0	-21.3	-10.2	b mode, Mid ch, V
7.311	9.8	59.3	45.8	37.0	4.9	-46.6	0.0	1.0	55.6	42.1	74.0	54.0	-18.4	-11.9	b mode, Mid ch, H
9.748	9.8	52.1	41.6	38.5	5.8	-45.1	0.0	1.0	52.3	41.8	74.0	54.0	-21.7	-12.2	b mode, Mid ch, V
9.748	9.8	52.9	42.3	38.5	5.8	-45.1	0.0	1.0	53.0	42.4	74.0	54.0	-21.0	-11.6	b mode, Mid ch, H
4.924	9.8	60.4	47.5	33.8	3.9	-45.7	0.0	1.0	53.4	40.6	74.0	54.0	-20.6	-13.4	b mode, High ch, V
4.924	9.8	56.9	45.3	33.8	3.9	-45.7	0.0	1.0	49.9	38.3	74.0	54.0	-24.1	-15.7	b mode, High ch, H
7.386	9.8	51.4	40.9	37.1	5.0	-46.5	0.0	1.0	47.9	37.3	74.0	54.0	-26.1	-16.7	b mode, High ch, V
7.386	9.8	50.5	39.4	37.1	5.0	-46.5	0.0	1.0	46.9	35.9	74.0	54.0	-27.1	-18.1	b mode, High ch, H
9.848	9.8	47.0	35.7	38.5	5.8	-45.0	0.0	1.0	47.2	36.0	74.0	54.0	-26.8	-18.0	b mode, High ch, V
9.848	9.8	48.0	36.7	38.5	5.8	-45.0	0.0	1.0	48.3	37.0	74.0	54.0	-25.7	-17.0	b mode, High ch, H
								1.0							

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)

LOW CH RESTRICTED, PEAK (802.11g mode, Horizontal)

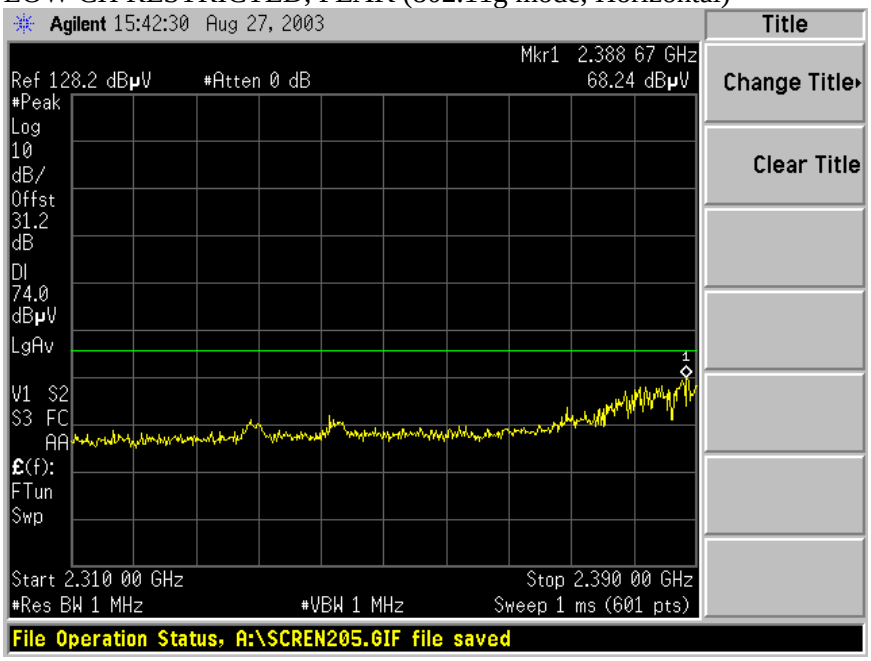

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

LOW CH RESTRICTED, AVG (802.11g mode, Horizontal)

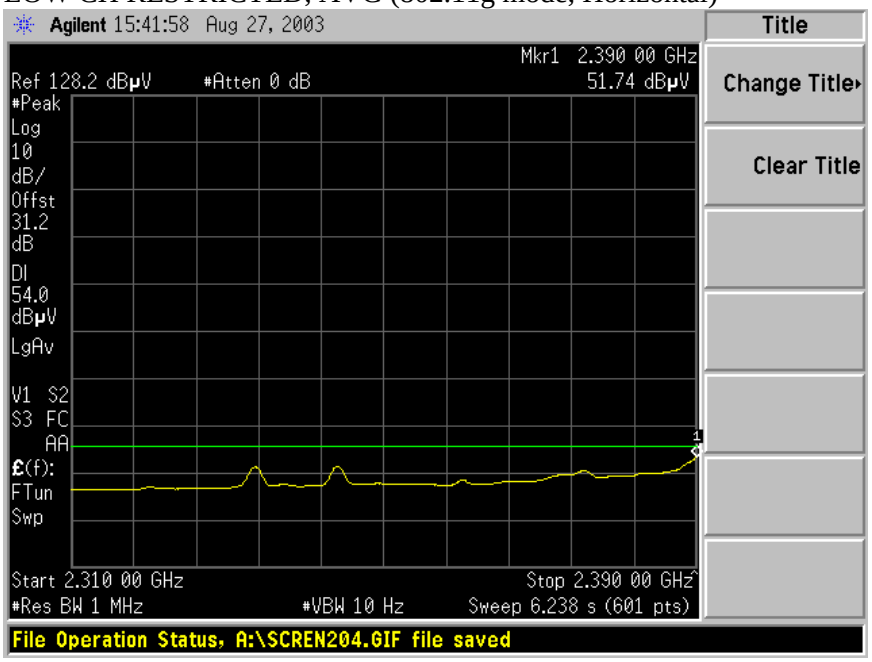

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)

LOW CH RESTRICTED, PEAK (802.11g mode, Vertical)

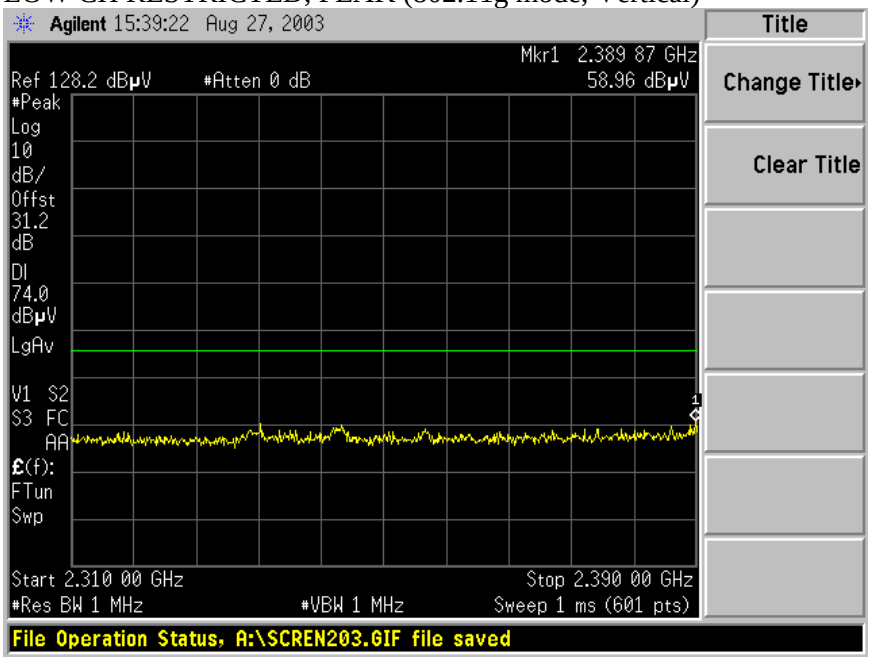

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

LOW CH RESTRICTED, AVG (802.11g mode, Vertical)

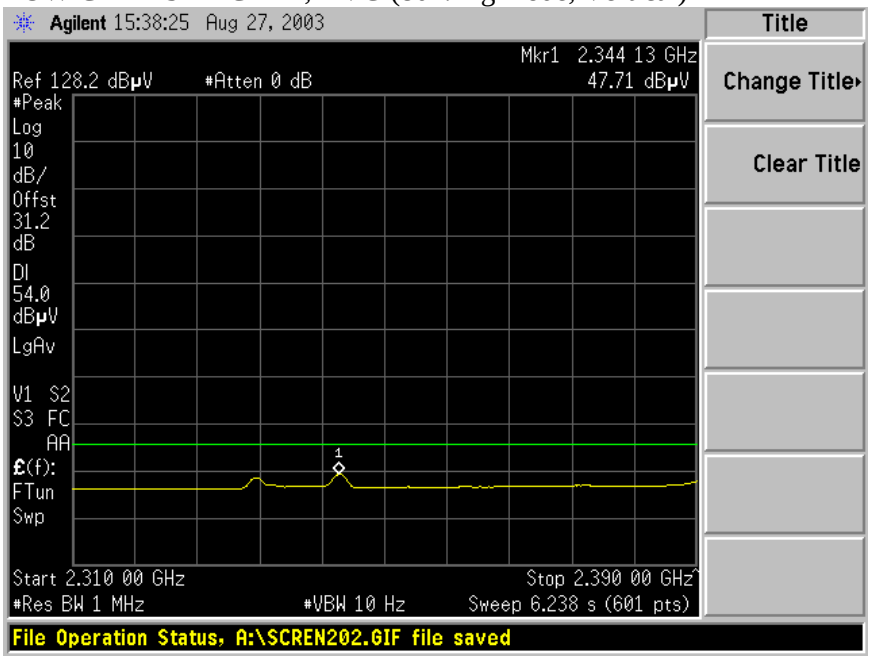

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)

HIGH CH RESTRICTED, PEAK (802.11g mode, Horizontal)

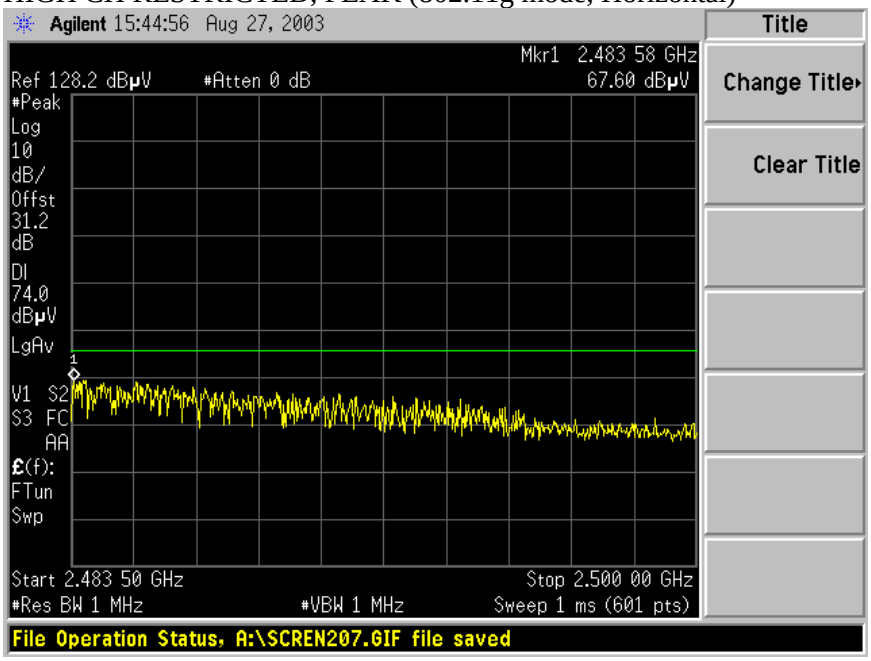

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HIGH CH RESTRICTED, AVG (802.11g mode, Horizontal)

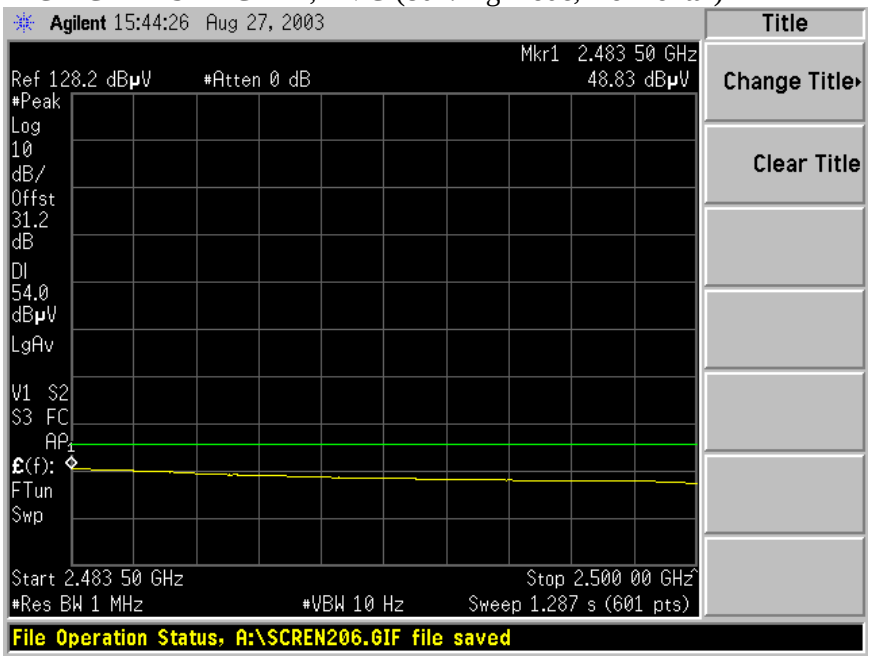

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)

HIGH CH RESTRICTED, PEAK (802.11g mode, Vertical)

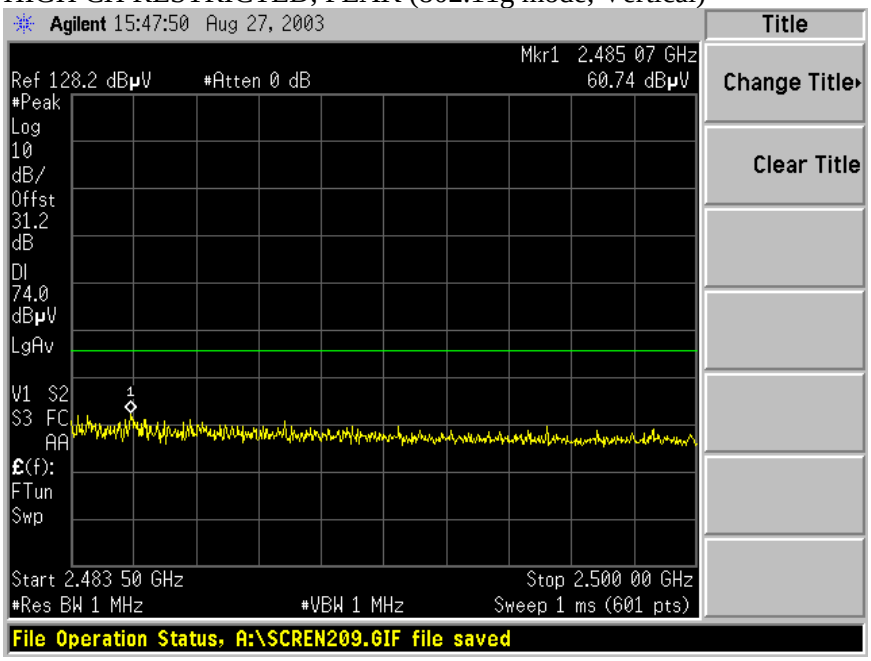

COMPLIANCE CERTIFICATION SERVICES DOCUMENT NO: CCSUP4031A
561F MONTEREY ROAD, MORGAN HILL, CA 95037 USA TEL: (408) 463-0885 FAX: (408) 463-0888
This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HIGH CH RESTRICTED, AVG (802.11g mode, Vertical)

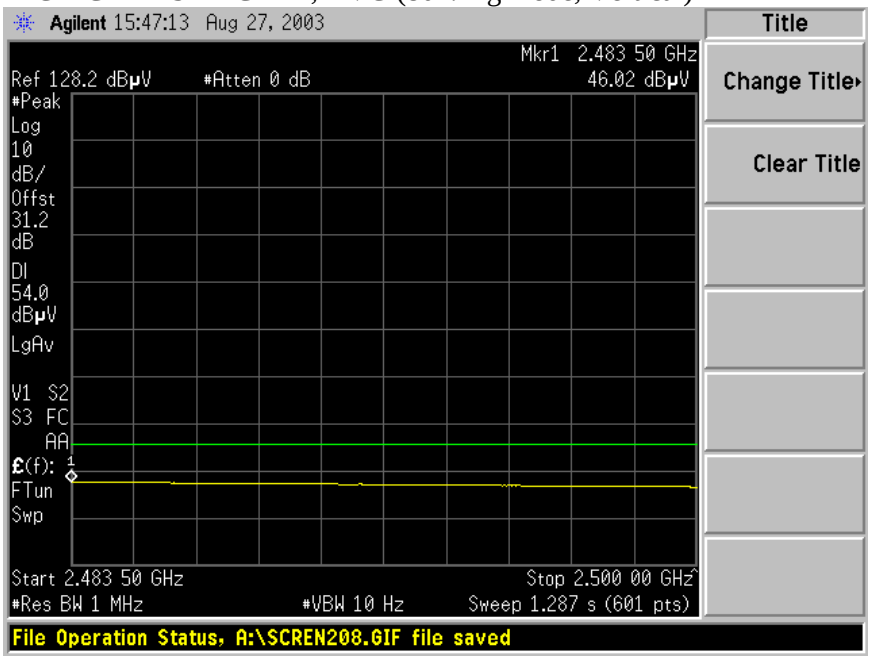

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HARMONICS AND SPURIOUS EMISSIONS (g NORMAL MODE)

08/27/03 **High Frequency Measurement**
Compliance Certification Services, Morgan Hill Open Field Site

Test Engr:William Zhuang
Project #:03U2181-1
Company Name:Cisco Systems, Akron
EUT Descrip.:802.11b/g mini-PCI Card
EUT M/N:Orion 1200 D
Test Target:FCC 15.247
Mode Oper:Transmit with Patch Antenna

Test Equipment:

EMCO Horn 1-18GHz	Pre-amplifer 1-26GHz	Spectrum Analyzer	Horn > 18GHz
T59; S/N: 3245 @1m	T86 Miteq 924341	Agilent E4446A Analyzer	

Hi Frequency Cables: ☑ (2 ft) ☐ (2 ~ 3 ft) ☐ (4 ~ 6 ft) ☑ (12 ft)

Peak Measurements:
1 MHz Resolution Bandwidth
1MHz Video Bandwidth

Average Measurements:
1 MHz Resolution Bandwidth
10Hz Video Bandwidth

f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
4.824	9.8	54.8	49.7	33.8	3.9	-45.6	0.0	1.0	47.8	42.7	74.0	54.0	-26.2	-11.3	g mode, Low ch, V
4.824	9.8	47.9	40.5	33.8	3.9	-45.6	0.0	1.0	40.9	33.5	74.0	54.0	-33.1	-20.5	g mode, Low ch, H
7.236	9.8	52.1	45.2	36.9	4.9	-46.6	0.0	1.0	48.2	41.3	74.0	54.0	-25.8	-12.7	g mode, Low ch, V
7.236	9.8	50.7	42.6	36.9	4.9	-46.6	0.0	1.0	46.9	38.7	74.0	54.0	-27.1	-15.3	g mode, Low ch, H
9.648	9.8	49.7	42.6	38.6	5.8	-45.2	0.0	1.0	49.8	42.7	74.0	54.0	-24.2	-11.3	g mode, Low ch, V
9.648	9.8	50.0	42.5	38.6	5.8	-45.2	0.0	1.0	50.1	42.6	74.0	54.0	-23.9	-11.4	g mode, Low ch, H
4.874	9.8	56.5	44.7	33.8	3.9	-45.6	0.0	1.0	49.5	37.7	74.0	54.0	-24.5	-16.3	g mode, Mid ch, V
4.874	9.8	50.0	48.3	33.8	3.9	-45.6	0.0	1.0	43.1	41.3	74.0	54.0	-30.9	-12.7	g mode, Mid ch, H
7.311	9.8	51.1	38.9	37.0	4.9	-46.6	0.0	1.0	47.3	35.2	74.0	54.0	-26.7	-18.8	g mode, Mid ch, V
7.311	9.8	54.5	45.1	37.0	4.9	-46.6	0.0	1.0	50.8	41.4	74.0	54.0	-23.2	-12.6	g mode, Mid ch, H
9.748	9.8	54.4	41.4	38.5	5.8	-45.1	0.0	1.0	54.6	41.6	74.0	54.0	-19.4	-12.4	g mode, Mid ch, V
9.748	9.8	52.1	46.1	38.5	5.8	-45.1	0.0	1.0	52.2	46.2	74.0	54.0	-21.8	-7.8	g mode, Mid ch, H
4.924	9.8	65.7	52.2	33.8	3.9	-45.7	0.0	1.0	58.7	45.3	74.0	54.0	-15.3	-8.7	g mode, High ch, V
4.924	9.8	57.6	47.5	33.8	3.9	-45.7	0.0	1.0	50.6	40.5	74.0	54.0	-23.4	-13.5	g mode, High ch, H
7.386	9.8	50.6	42.0	37.1	5.0	-46.5	0.0	1.0	47.1	38.4	74.0	54.0	-26.9	-15.6	g mode, High ch, V
7.386	9.8	47.5	36.9	37.1	5.0	-46.5	0.0	1.0	43.9	33.4	74.0	54.0	-30.1	-20.6	g mode, High ch, H
9.848	9.8	40.2	40.2	38.5	5.8	-45.0	0.0	1.0	40.4	40.5	74.0	54.0	-33.6	-13.5	g mode, High ch, V
9.848	9.8	46.0	36.2	38.5	5.8	-45.0	0.0	1.0	46.3	36.5	74.0	54.0	-27.7	-17.5	g mode, High ch, H
								1.0							

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

7.8.3. RADIATED EMISSIONS WITH 5 dBi OMNI ANTENNA

RADIATED RF MEASUREMENT SETUP

RADIATED FRONT PHOTO

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RADIATED BACK PHOTO

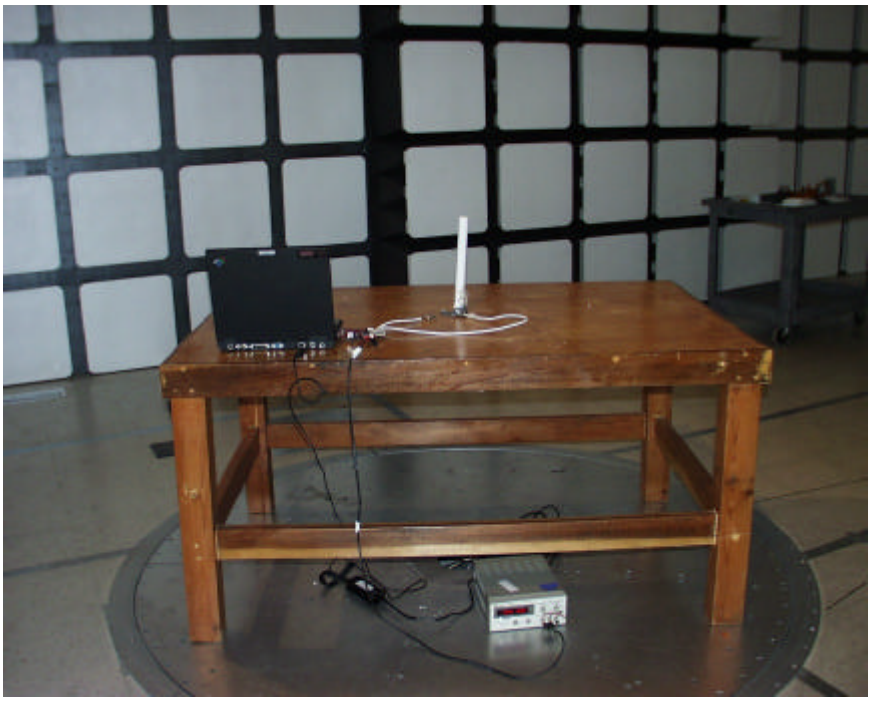

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

LOW CH RESTRICTED, PEAK (802.11b mode, Horizontal)

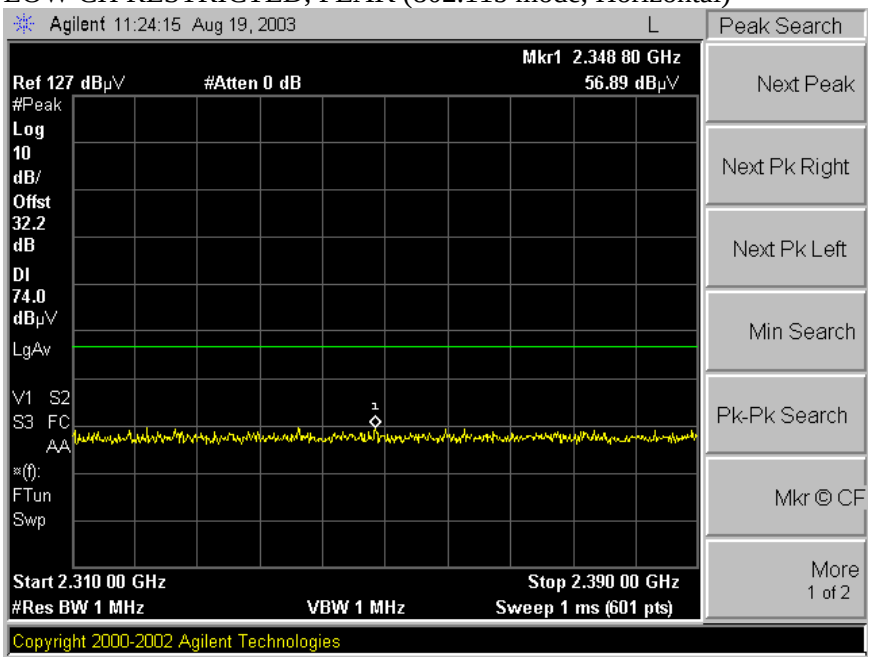

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

LOW CH RESTRICTED, AVG (802.11b mode, Horizontal)

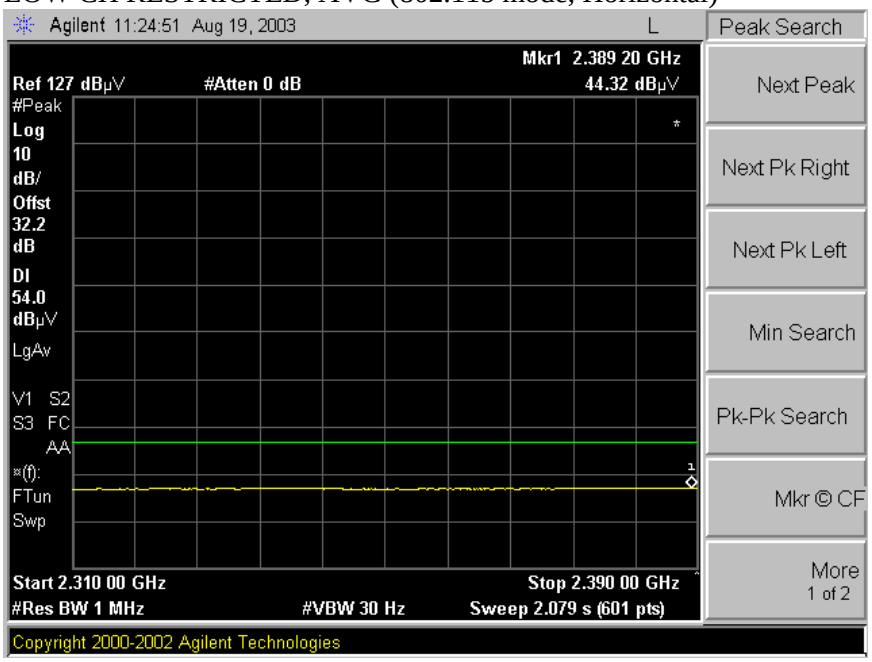

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

LOW CH RESTRICTED, PEAK (802.11b mode, Vertical)

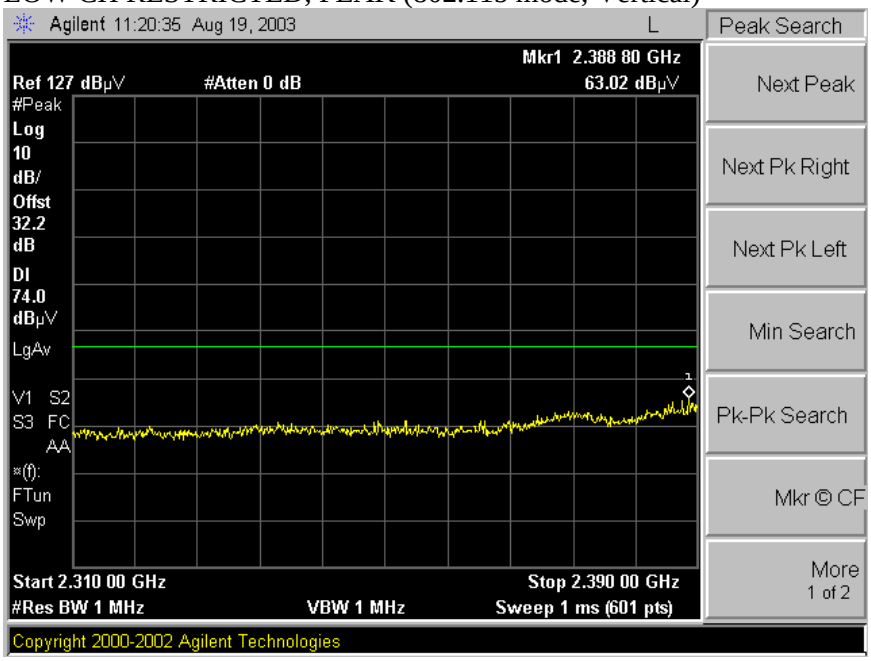

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

LOW CH RESTRICTED, AVG (802.11b mode, Vertical)

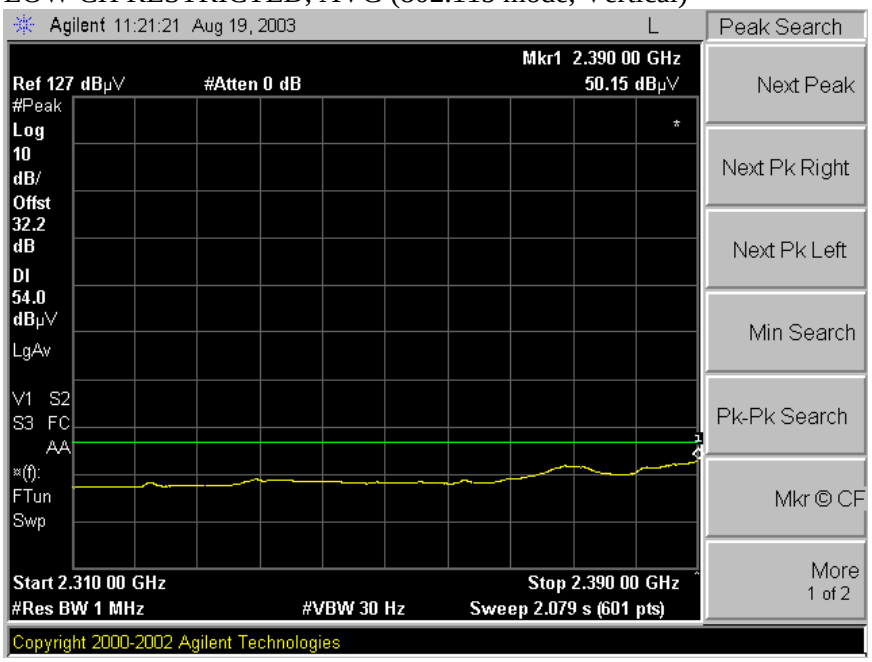

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)

HIGH CH RESTRICTED, PEAK (802.11b mode, Horizontal)

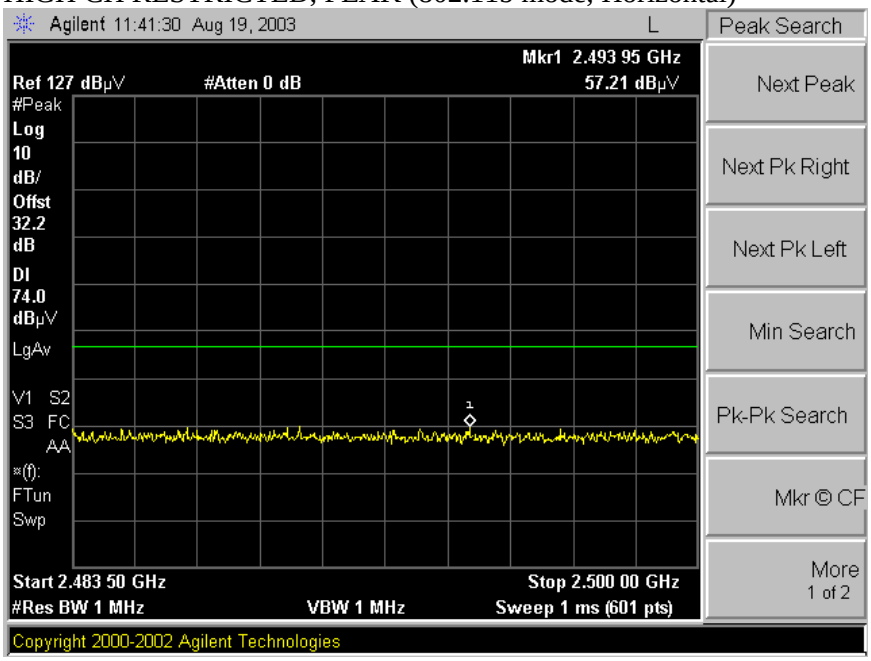

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HIGH CH RESTRICTED, AVG (802.11b mode, Horizontal)

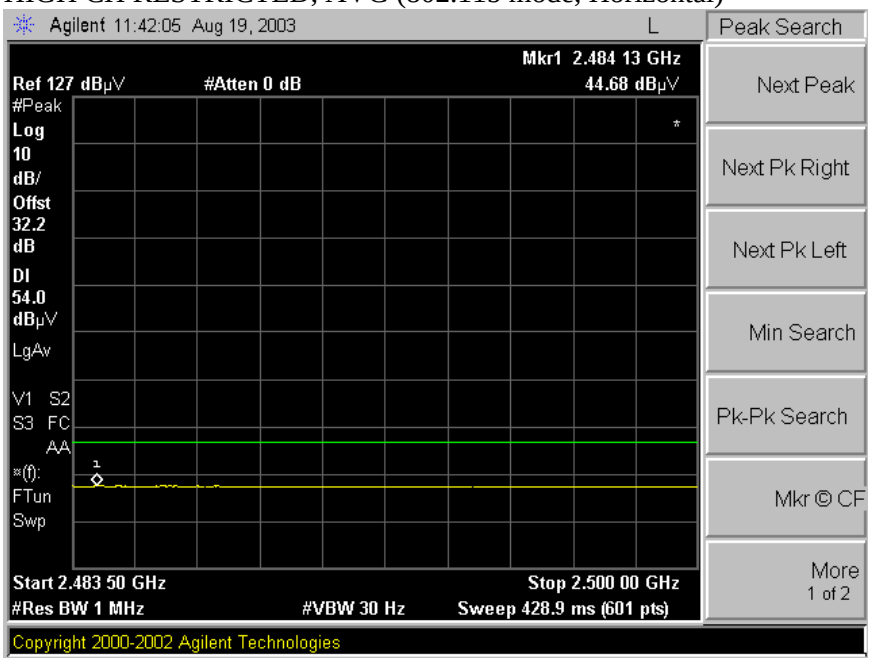

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

HIGH CH RESTRICTED, PEAK (802.11b mode, Vertical)

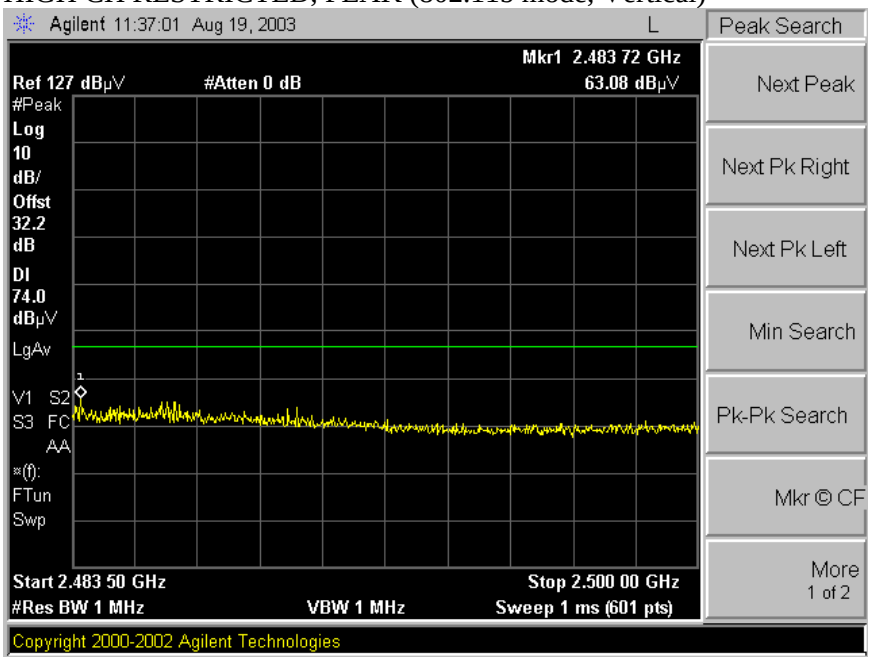

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HIGH CH RESTRICTED, AVG (802.11b mode, Vertical)

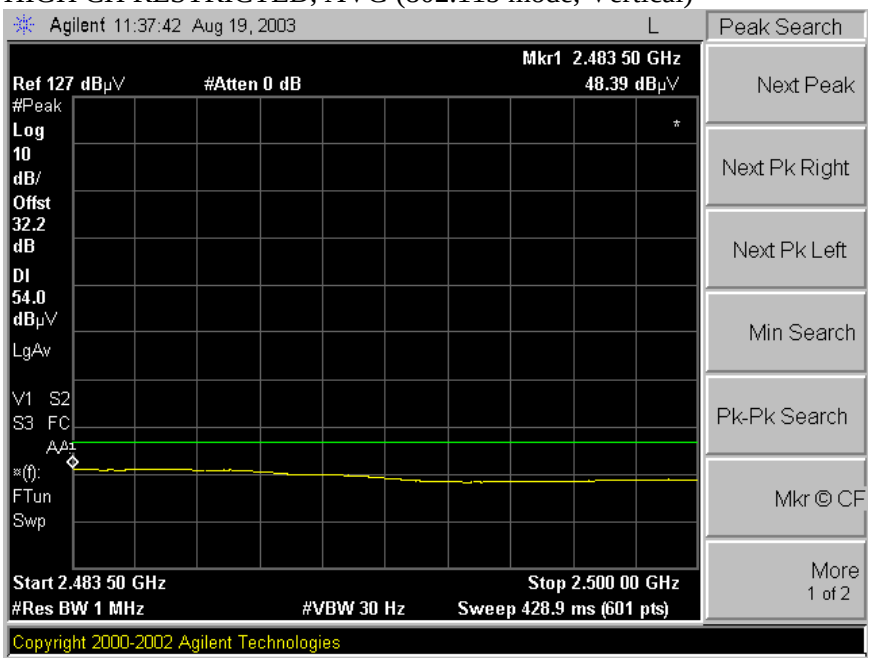

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HARMONICS AND SPURIOUS EMISSIONS (b MODE)

08/19/03 **High Frequency Measurement**
Compliance Certification Services, Morgan Hill Open Field Site

Test Engr:William Zhuang
Project #:03U2181-1
Company Name:Cisco Systems, Akron
EUT Descrip.:802.11b/g mini-PCI Card
EUT M/N:Orion 1200 D
Test Target:FCC 15.247
Mode Oper:Transmit with Omni Antenna

Test Equipment:

EMCO Horn 1-18GHz	Pre-amplifer 1-26GHz	Spectrum Analyzer	Horn > 18GHz
T59; S/N: 3245 @1m	T86 Miteq 924341	Agilent E4446A Analyzer	

Hi Frequency Cables: ☑ (2 ft) ☐ (2 ~ 3 ft) ☐ (4 ~ 6 ft) ☑ (12 ft)

Peak Measurements:
1 MHz Resolution Bandwidth
1MHz Video Bandwidth

Average Measurements:
1 MHz Resolution Bandwidth
10Hz Video Bandwidth

f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
4.824	9.8	62.2	48.8	33.8	3.9	-45.6	0.0	1.0	55.2	41.8	74.0	54.0	-18.8	-12.2	b mode, Low ch, V
4.824	9.8	54.9	43.2	33.8	3.9	-45.6	0.0	1.0	47.9	36.2	74.0	54.0	-26.1	-17.8	b mode, Low ch, H
7.236	9.8	56.9	46.9	36.9	4.9	-46.6	0.0	1.0	53.0	43.0	74.0	54.0	-21.0	-11.0	b mode, Low ch, V
7.236	9.8	55.2	43.5	36.9	4.9	-46.6	0.0	1.0	51.4	39.6	74.0	54.0	-22.6	-14.4	b mode, Low ch, H
9.648	9.8	52.0	44.4	38.6	5.8	-45.2	0.0	1.0	52.1	44.5	74.0	54.0	-21.9	-9.5	b mode, Low ch, V
9.648	9.8	49.9	41.1	38.6	5.8	-45.2	0.0	1.0	50.0	41.2	74.0	54.0	-24.0	-12.8	b mode, Low ch, H
4.874	9.8	64.2	51.8	33.8	3.9	-45.6	0.0	1.0	57.2	44.8	74.0	54.0	-16.8	-9.2	b mode, Mid ch, V
4.874	9.8	56.7	45.9	33.8	3.9	-45.6	0.0	1.0	49.8	38.9	74.0	54.0	-24.2	-15.1	b mode, Mid ch, H
7.311	9.8	57.3	48.7	37.0	4.9	-46.6	0.0	1.0	53.5	45.0	74.0	54.0	-20.5	-9.0	b mode, Mid ch, V
7.311	9.8	55.3	44.9	37.0	4.9	-46.6	0.0	1.0	51.6	41.2	74.0	54.0	-22.4	-12.8	b mode, Mid ch, H
9.748	9.8	49.4	39.5	38.5	5.8	-45.1	0.0	1.0	49.6	39.7	74.0	54.0	-24.4	-14.3	b mode, Mid ch, V
9.748	9.8	50.8	41.5	38.5	5.8	-45.1	0.0	1.0	50.9	41.6	74.0	54.0	-23.1	-12.4	b mode, Mid ch, H
4.924	9.8	59.1	47.0	33.8	3.9	-45.7	0.0	1.0	52.1	40.1	74.0	54.0	-21.9	-13.9	b mode, High ch, V
4.924	9.8	55.3	43.3	33.8	3.9	-45.7	0.0	1.0	48.3	36.3	74.0	54.0	-25.7	-17.7	b mode, High ch, H
7.386	9.8	51.8	40.8	37.1	5.0	-46.5	0.0	1.0	48.3	37.2	74.0	54.0	-25.7	-16.8	b mode, High ch, V
7.386	9.8	52.2	41.9	37.1	5.0	-46.5	0.0	1.0	48.6	38.4	74.0	54.0	-25.4	-15.6	b mode, High ch, H
9.848	9.8	49.0	37.1	38.5	5.8	-45.0	0.0	1.0	49.2	37.4	74.0	54.0	-24.8	-16.6	b mode, High ch, V
9.848	9.8	50.2	38.5	38.5	5.8	-45.0	0.0	1.0	50.5	38.8	74.0	54.0	-23.5	-15.2	b mode, High ch, H
								1.0							

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)

LOW CH RESTRICTED, PEAK (802.11g mode, Horizontal)

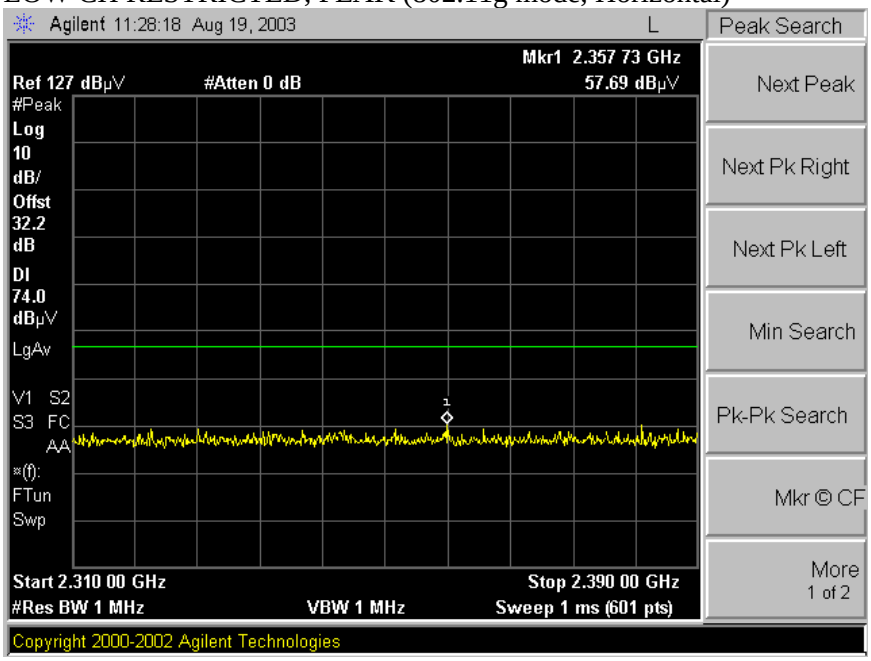

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

LOW CH RESTRICTED, AVG (802.11g mode, Horizontal)

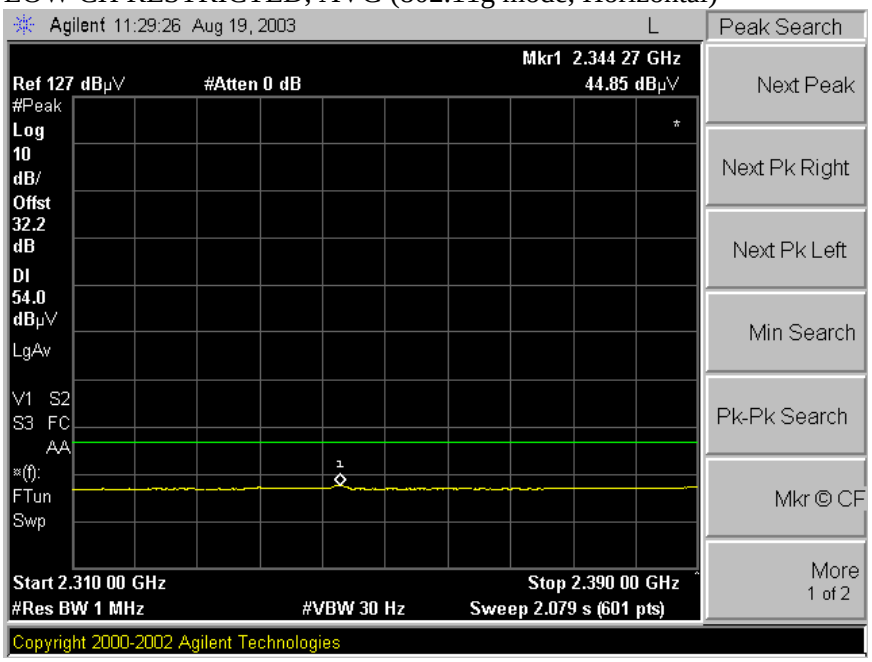

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)

LOW CH RESTRICTED, PEAK (802.11g mode, Vertical)

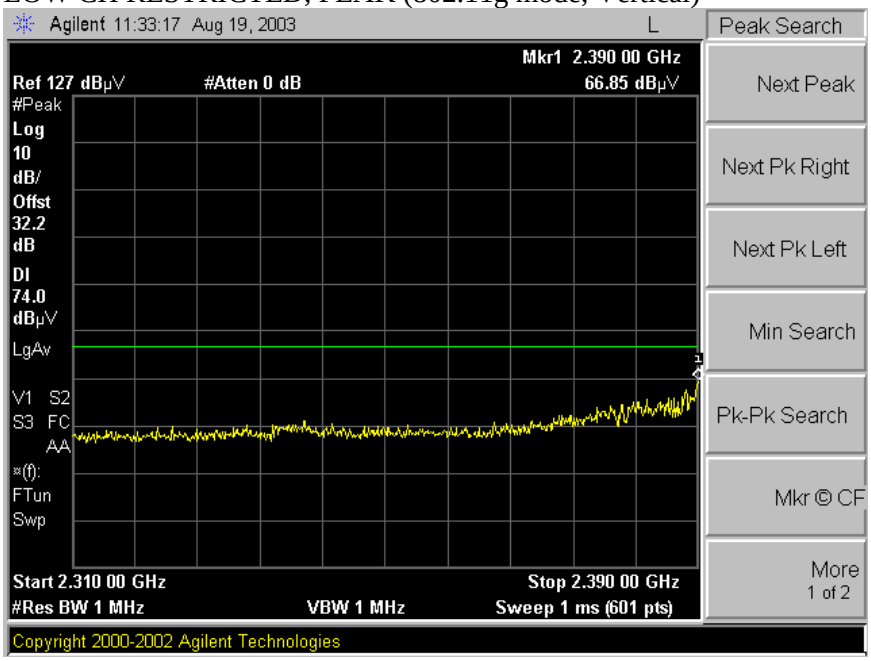

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

LOW CH RESTRICTED, AVG (802.11g mode, Vertical)

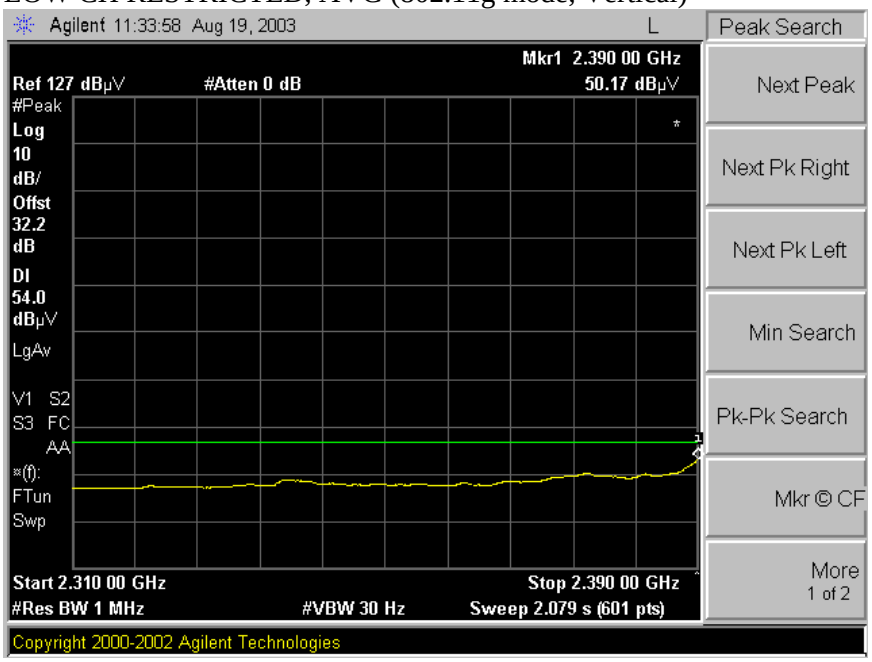

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)

HIGH CH RESTRICTED, PEAK (802.11g mode, Horizontal)

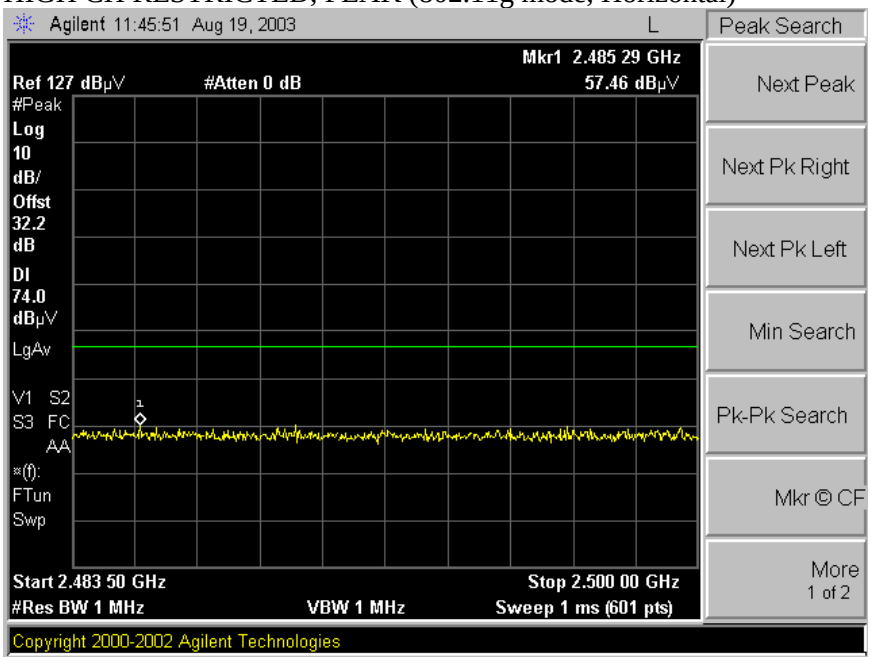

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HIGH CH RESTRICTED, AVG (802.11g mode, Horizontal)

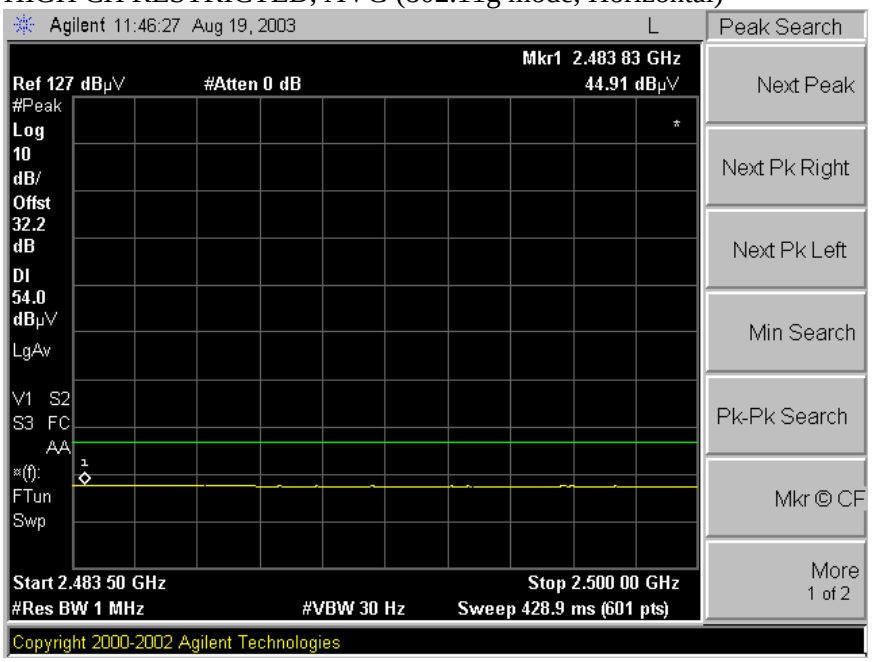

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)

HIGH CH RESTRICTED, PEAK (802.11g mode, Vertical)

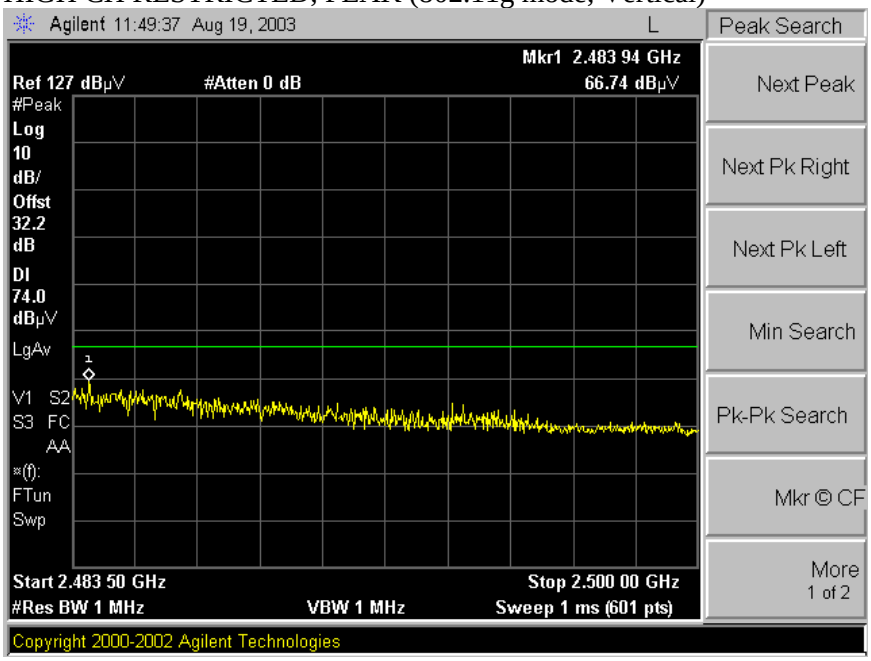

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HIGH CH RESTRICTED, AVG (802.11g mode, Vertical)

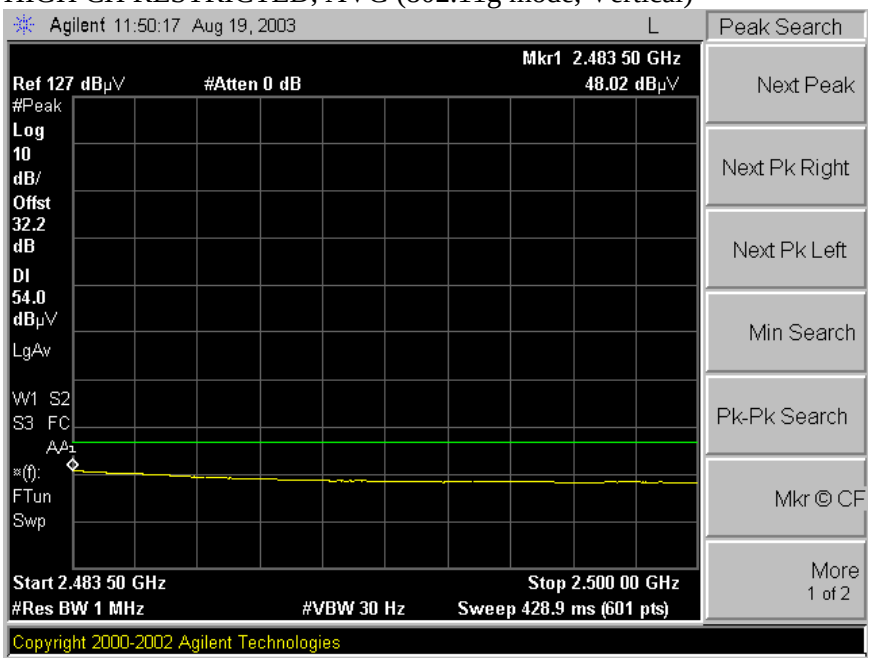

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HARMONICS AND SPURIOUS EMISSIONS (g NORMAL MODE)

08/19/03 **High Frequency Measurement**
Compliance Certification Services, Morgan Hill Open Field Site

Test Engr:William Zhuang
Project #:03U2181-1
Company Name:Cisco Systems, Akron
EUT Descrip.:802.11b/g mini-PCI Card
EUT M/N:Orion 1200 D
Test Target:FCC 15.247
Mode Oper:Transmit with Omni Antenna

Test Equipment:

EMCO Horn 1-18GHz	Pre-amplifer 1-26GHz	Spectrum Analyzer	Horn > 18GHz
T59; S/N: 3245 @1m	T86 Miteq 924341	Agilent E4446A Analyzer	

Hi Frequency Cables: ☑ (2 ft) ☐ (2 ~ 3 ft) ☐ (4 ~ 6 ft) ☑ (12 ft)

Peak Measurements:
1 MHz Resolution Bandwidth
1MHz Video Bandwidth

Average Measurements:
1 MHz Resolution Bandwidth
10Hz Video Bandwidth

f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
4.824	9.8	51.4	45.8	33.8	3.9	-45.6	0.0	1.0	44.4	38.8	74.0	54.0	-29.6	-15.2	g mode, Low ch, V
4.824	9.8	50.2	42.5	33.8	3.9	-45.6	0.0	1.0	43.2	35.5	74.0	54.0	-30.8	-18.5	g mode, Low ch, H
7.236	9.8	51.5	39.6	36.9	4.9	-46.6	0.0	1.0	47.6	35.8	74.0	54.0	-26.4	-18.2	g mode, Low ch, V
7.236	9.8	51.8	39.6	36.9	4.9	-46.6	0.0	1.0	47.9	35.7	74.0	54.0	-26.1	-18.3	g mode, Low ch, H
9.648	9.8	52.0	45.9	38.6	5.8	-45.2	0.0	1.0	52.1	46.0	74.0	54.0	-21.9	-8.0	g mode, Low ch, V
9.648	9.8	50.6	40.5	38.6	5.8	-45.2	0.0	1.0	50.7	40.6	74.0	54.0	-23.3	-13.4	g mode, Low ch, H
4.874	9.8	52.5	46.7	33.8	3.9	-45.6	0.0	1.0	45.5	39.8	74.0	54.0	-28.5	-14.2	g mode, Mid ch, V
4.874	9.8	52.1	45.5	33.8	3.9	-45.6	0.0	1.0	45.1	38.5	74.0	54.0	-28.9	-15.5	g mode, Mid ch, H
7.311	9.8	50.5	39.1	37.0	4.9	-46.6	0.0	1.0	46.8	35.4	74.0	54.0	-27.2	-18.6	g mode, Mid ch, V
7.311	9.8	51.0	39.1	37.0	4.9	-46.6	0.0	1.0	47.3	35.3	74.0	54.0	-26.7	-18.7	g mode, Mid ch, H
9.748	9.8	51.7	45.9	38.5	5.8	-45.1	0.0	1.0	51.9	46.1	74.0	54.0	-22.1	-7.9	g mode, Mid ch, V
9.748	9.8	49.9	40.5	38.5	5.8	-45.1	0.0	1.0	50.1	40.7	74.0	54.0	-23.9	-13.3	g mode, Mid ch, H
4.924	9.8	54.5	46.7	33.8	3.9	-45.7	0.0	1.0	47.6	39.7	74.0	54.0	-26.4	-14.3	g mode, High ch, V
4.924	9.8	53.2	46.6	33.8	3.9	-45.7	0.0	1.0	46.3	39.6	74.0	54.0	-27.7	-14.4	g mode, High ch, H
7.386	9.8	50.6	39.0	37.1	5.0	-46.5	0.0	1.0	47.0	35.4	74.0	54.0	-27.0	-18.6	g mode, High ch, V
7.386	9.8	52.0	39.5	37.1	5.0	-46.5	0.0	1.0	48.4	36.0	74.0	54.0	-25.6	-18.0	g mode, High ch, H
9.848	9.8	47.7	39.7	38.5	5.8	-45.0	0.0	1.0	47.9	40.0	74.0	54.0	-26.1	-14.0	g mode, High ch, V
9.848	9.8	48.5	39.6	38.5	5.8	-45.0	0.0	1.0	48.8	39.9	74.0	54.0	-25.2	-14.1	g mode, High ch, H
								1.0							

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

7.8.4. RADIATED EMISSIONS WITH 2.2 dBi DIPOLE ANTENNA

RADIATED RF MEASUREMENT SETUP

RADIATED FRONT PHOTO

COMPLIANCE CERTIFICATION SERVICES DOCUMENT NO: CCSUP4031A
561F MONTEREY ROAD, MORGAN HILL, CA 95037 USA TEL: (408) 463-0885 FAX: (408) 463-0888
This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RADIATED BACK PHOTO

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

LOW CH RESTRICTED, PEAK (802.11b mode, Horizontal)

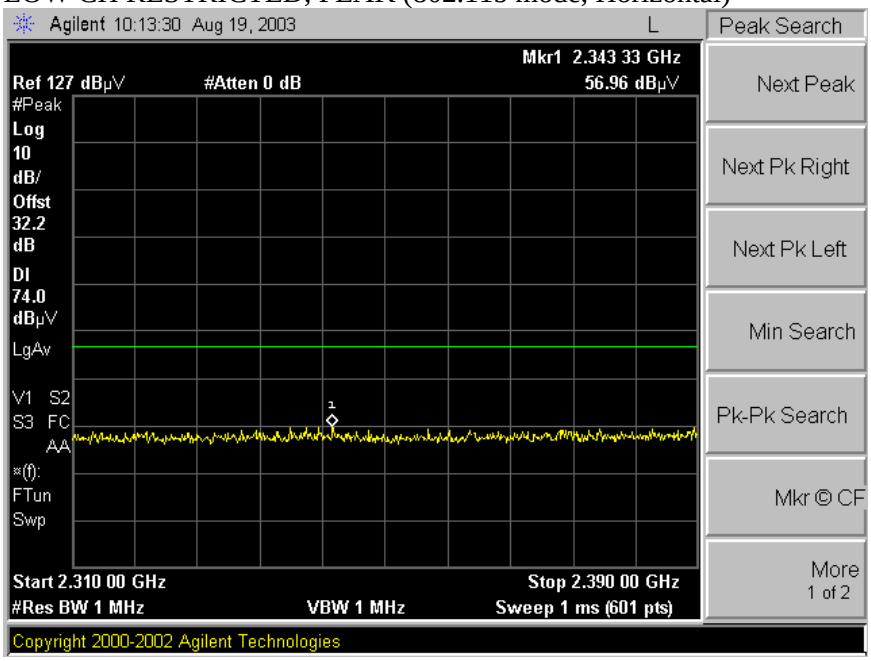

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

LOW CH RESTRICTED, AVG (802.11b mode, Horizontal)

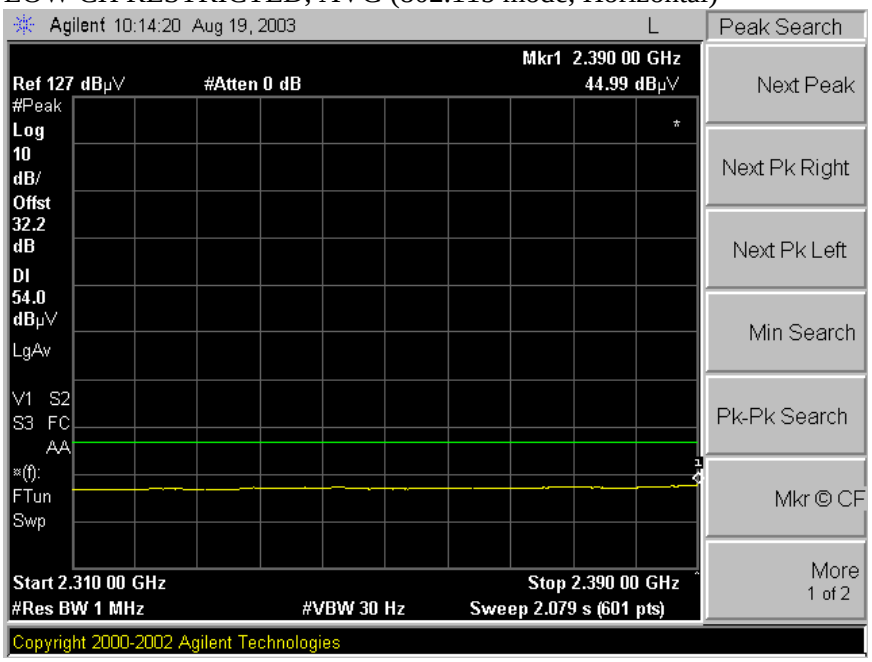

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

LOW CH RESTRICTED, PEAK (802.11b mode, Vertical)

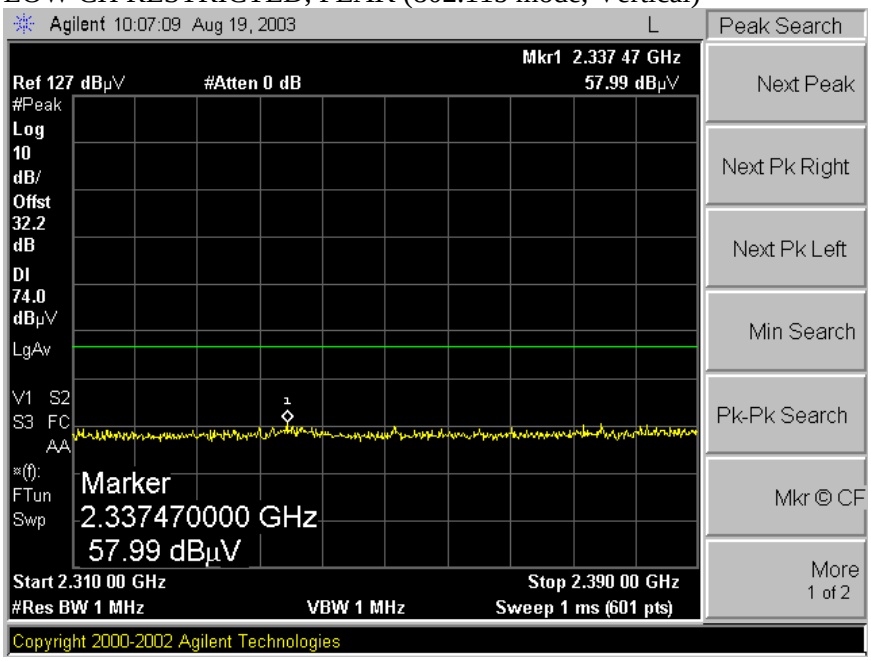

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

LOW CH RESTRICTED, AVG (802.11b mode, Vertical)

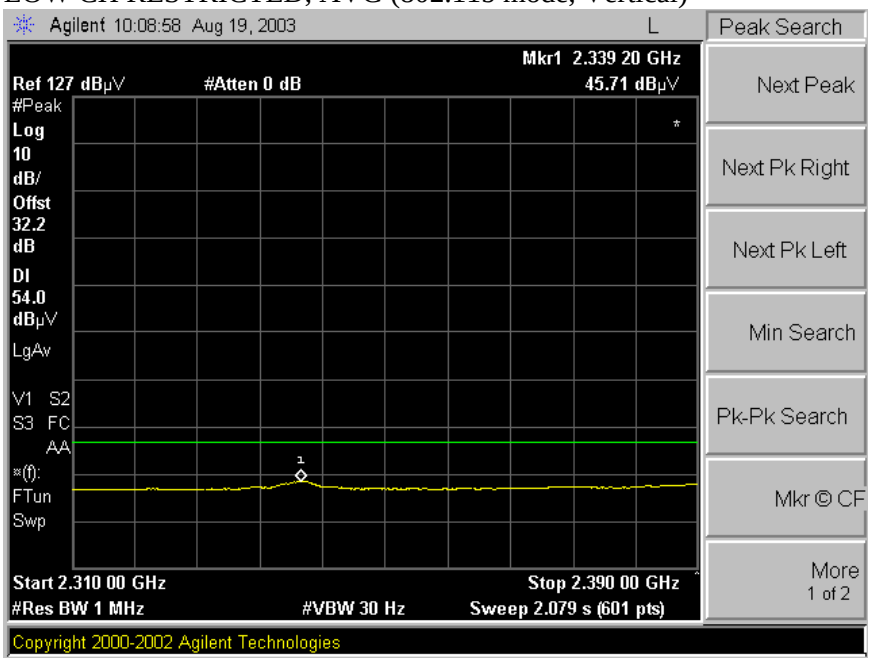

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)

HIGH CH RESTRICTED, PEAK (802.11b mode, Horizontal)

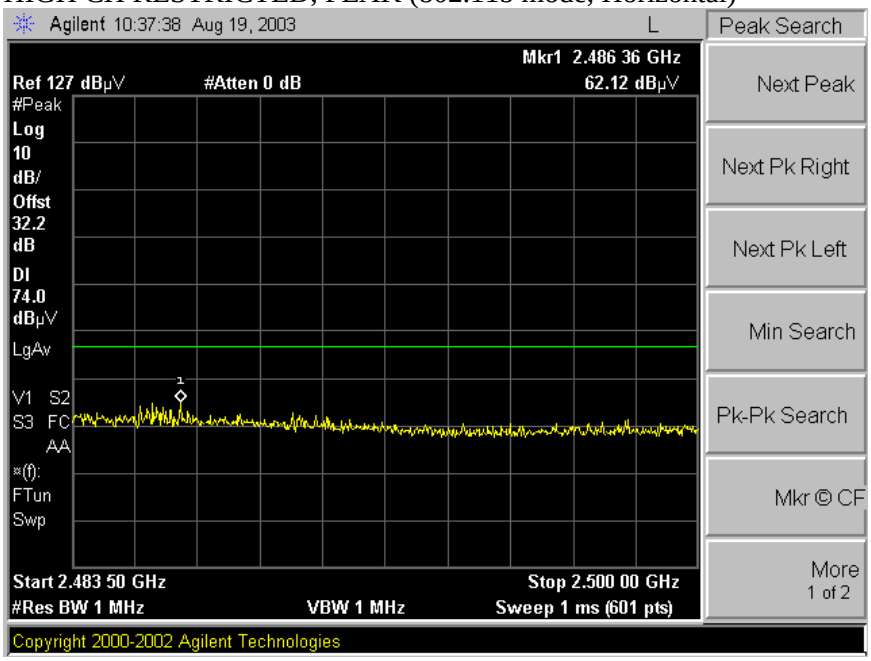

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HIGH CH RESTRICTED, AVG (802.11b mode, Horizontal)

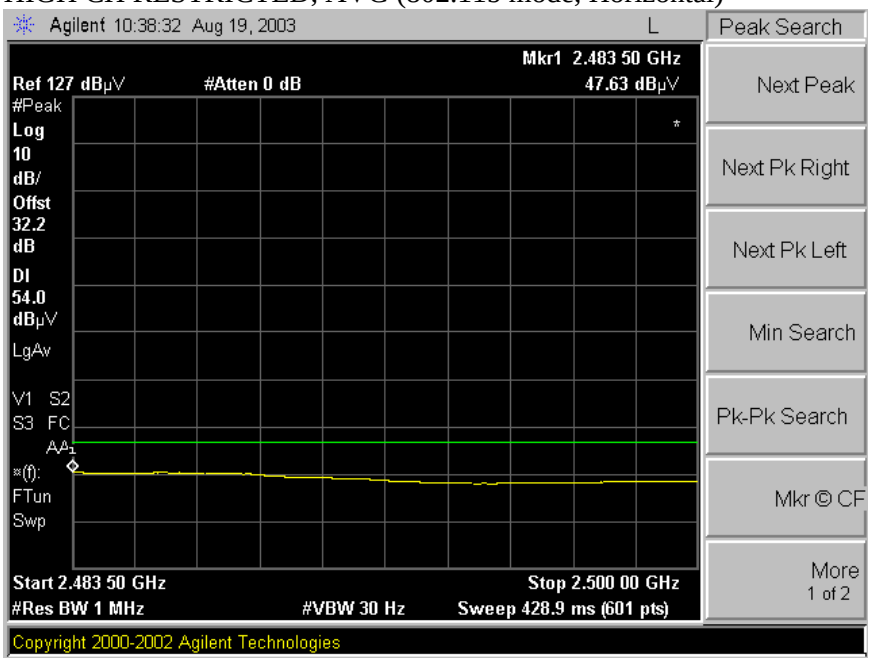

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

HIGH CH RESTRICTED, PEAK (802.11b mode, Vertical)

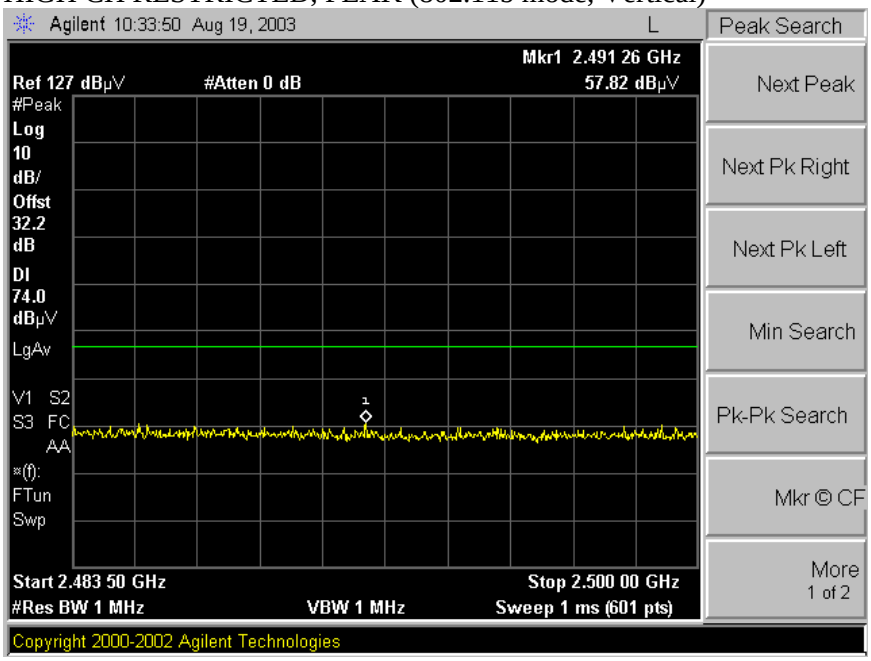

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HIGH CH RESTRICTED, AVG (802.11b mode, Vertical)

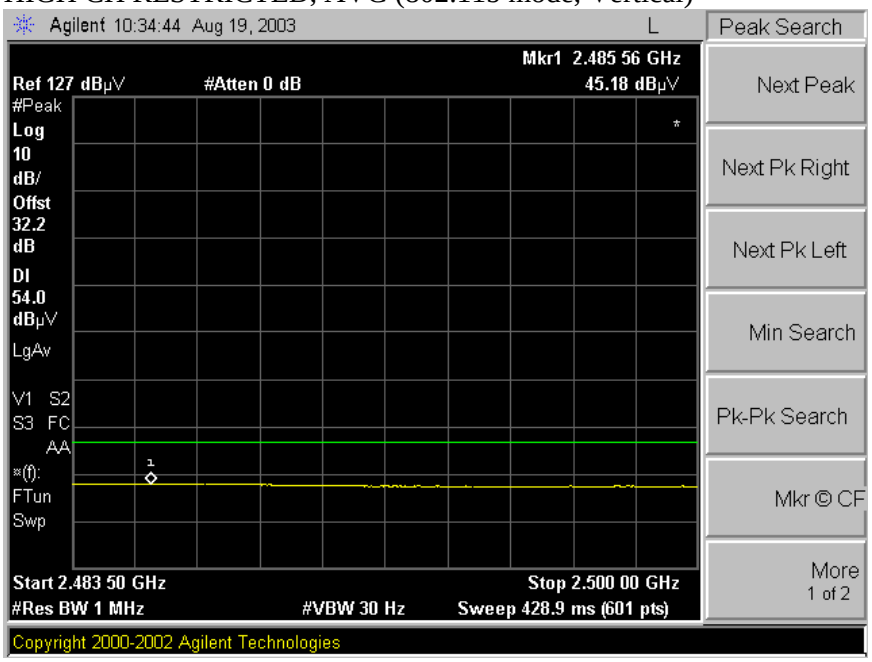

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HARMONICS AND SPURIOUS EMISSIONS (b MODE)

08/19/03 **High Frequency Measurement**
Compliance Certification Services, Morgan Hill Open Field Site

Test Engr:William Zhuang
Project #:03U2181-1
Company Name:Cisco Systems, Akron
EUT Descrip.:802.11b/g mini-PCI Card
EUT M/N:Orion 1200 D
Test Target:FCC 15.247
Mode Oper:Transmit with Dipole Antenna

Test Equipment:

EMCO Horn 1-18GHz	Pre-amplifer 1-26GHz	Spectrum Analyzer	Horn > 18GHz
T59; S/N: 3245 @1m	T86 Miteq 924341	Agilent E4446A Analyzer	

Hi Frequency Cables: ☑ (2 ft) ☐ (2 ~ 3 ft) ☐ (4 ~ 6 ft) ☑ (12 ft)

Peak Measurements:
1 MHz Resolution Bandwidth
1MHz Video Bandwidth

Average Measurements:
1 MHz Resolution Bandwidth
10Hz Video Bandwidth

f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
4.824	9.8	59.4	49.1	33.8	3.9	-45.6	0.0	1.0	52.4	42.1	74.0	54.0	-21.6	-11.9	b mode, Low ch, V
4.824	9.8	56.5	45.3	33.8	3.9	-45.6	0.0	1.0	49.5	38.4	74.0	54.0	-24.5	-15.6	b mode, Low ch, H
7.236	9.8	54.6	45.3	36.9	4.9	-46.6	0.0	1.0	50.7	41.5	74.0	54.0	-23.3	-12.5	b mode, Low ch, V
7.236	9.8	53.1	38.8	36.9	4.9	-46.6	0.0	1.0	49.2	34.9	74.0	54.0	-24.8	-19.1	b mode, Low ch, H
9.648	9.8	49.9	38.1	38.6	5.8	-45.2	0.0	1.0	50.0	38.2	74.0	54.0	-24.0	-15.8	b mode, Low ch, V
9.648	9.8	48.0	38.1	38.6	5.8	-45.2	0.0	1.0	48.1	38.2	74.0	54.0	-25.9	-15.8	b mode, Low ch, H
4.874	9.8	64.2	51.9	33.8	3.9	-45.6	0.0	1.0	57.2	44.9	74.0	54.0	-16.8	-9.1	b mode, Mid ch, V
4.874	9.8	53.8	43.5	33.8	3.9	-45.6	0.0	1.0	46.8	36.5	74.0	54.0	-27.2	-17.5	b mode, Mid ch, H
7.311	9.8	58.0	48.5	37.0	4.9	-46.6	0.0	1.0	54.3	44.7	74.0	54.0	-19.7	-9.3	b mode, Mid ch, V
7.311	9.8	56.1	45.5	37.0	4.9	-46.6	0.0	1.0	52.3	41.8	74.0	54.0	-21.7	-12.2	b mode, Mid ch, H
9.748	9.8	51.6	43.6	38.5	5.8	-45.1	0.0	1.0	51.8	43.8	74.0	54.0	-22.2	-10.2	b mode, Mid ch, V
9.748	9.8	51.3	42.6	38.5	5.8	-45.1	0.0	1.0	51.5	42.8	74.0	54.0	-22.5	-11.2	b mode, Mid ch, H
4.924	9.8	61.8	49.8	33.8	3.9	-45.7	0.0	1.0	54.8	42.8	74.0	54.0	-19.2	-11.2	b mode, High ch, V
4.924	9.8	56.7	44.2	33.8	3.9	-45.7	0.0	1.0	49.7	37.3	74.0	54.0	-24.3	-16.7	b mode, High ch, H
7.386	9.8	56.1	45.6	37.1	5.0	-46.5	0.0	1.0	52.6	42.0	74.0	54.0	-21.4	-12.0	b mode, High ch, V
7.386	9.8	53.1	41.3	37.1	5.0	-46.5	0.0	1.0	49.5	37.7	74.0	54.0	-24.5	-16.3	b mode, High ch, H
9.848	9.8	51.9	45.7	38.5	5.8	-45.0	0.0	1.0	52.1	45.9	74.0	54.0	-21.9	-8.1	b mode, High ch, V
9.848	9.8	48.1	40.9	38.5	5.8	-45.0	0.0	1.0	48.3	41.1	74.0	54.0	-25.7	-12.9	b mode, High ch, H
								1.0							

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)

LOW CH RESTRICTED, PEAK (802.11g mode, Horizontal)

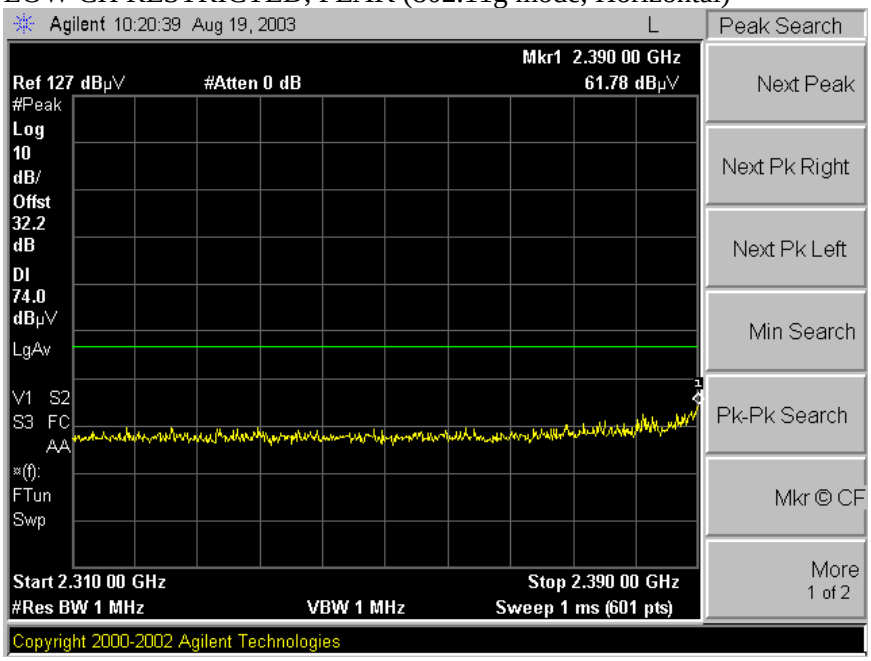

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

LOW CH RESTRICTED, AVG (802.11g mode, Horizontal)

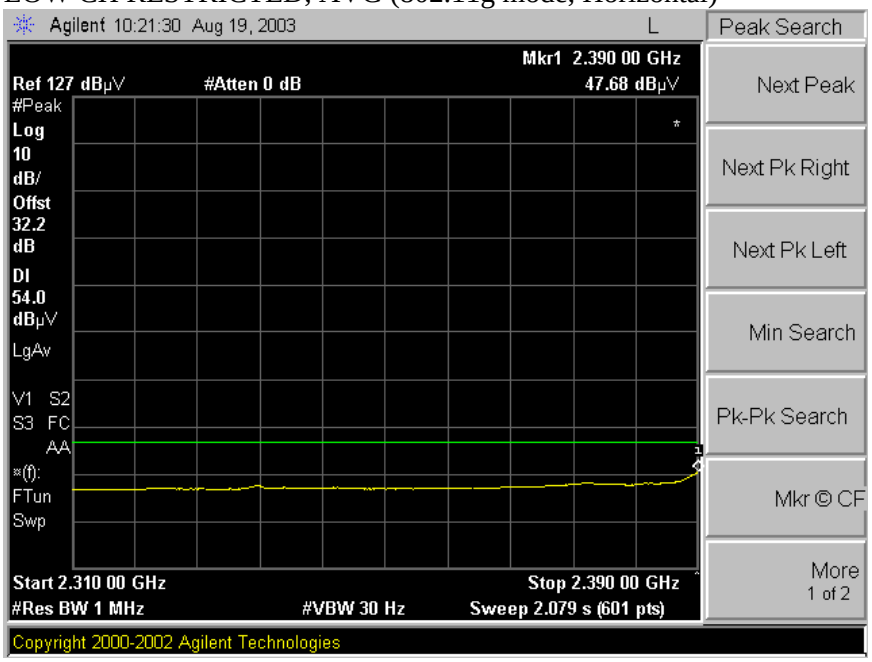

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)

LOW CH RESTRICTED, PEAK (802.11g mode, Vertical)

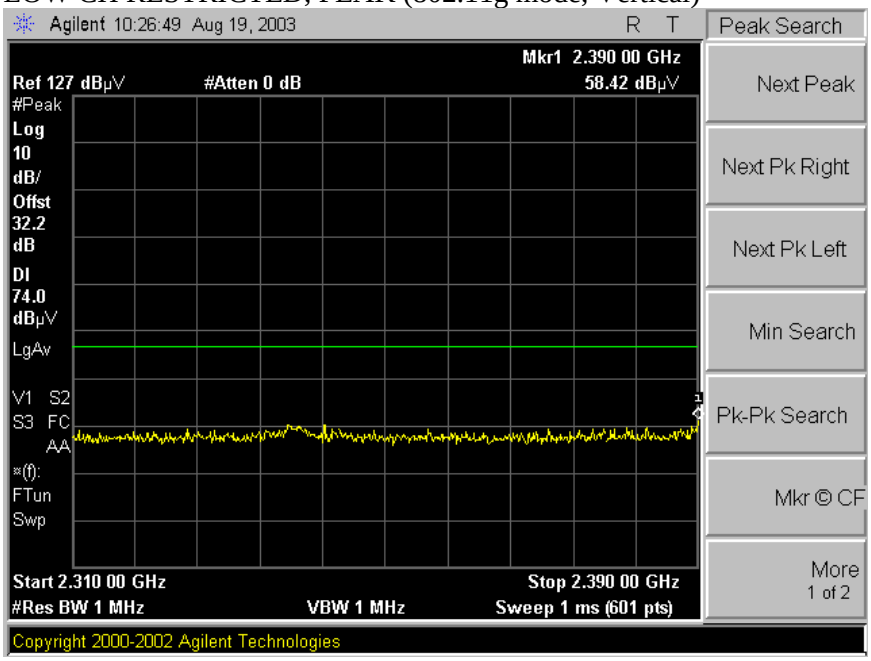

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

LOW CH RESTRICTED, AVG (802.11g mode, Vertical)

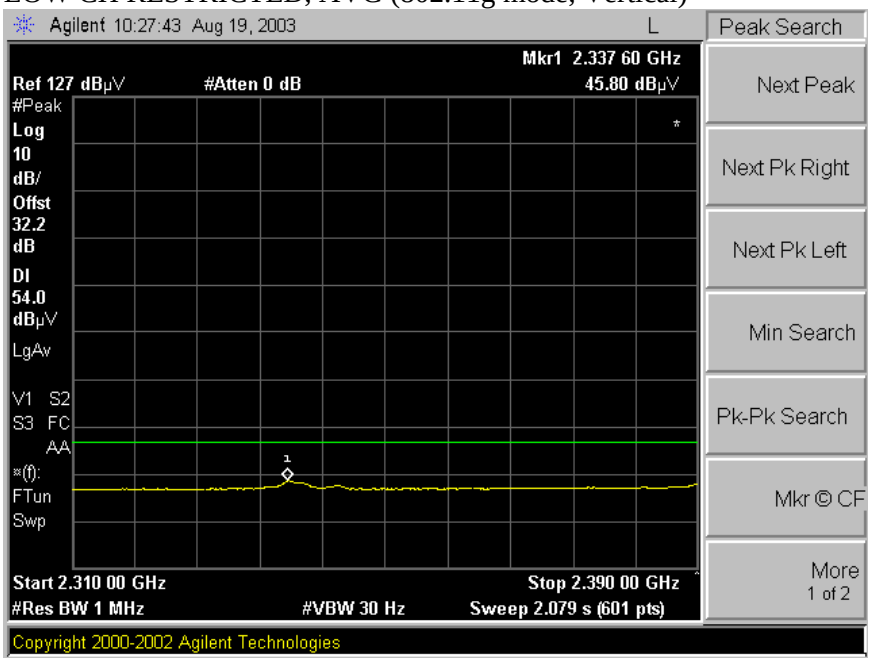

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)

HIGH CH RESTRICTED, PEAK (802.11g mode, Horizontal)

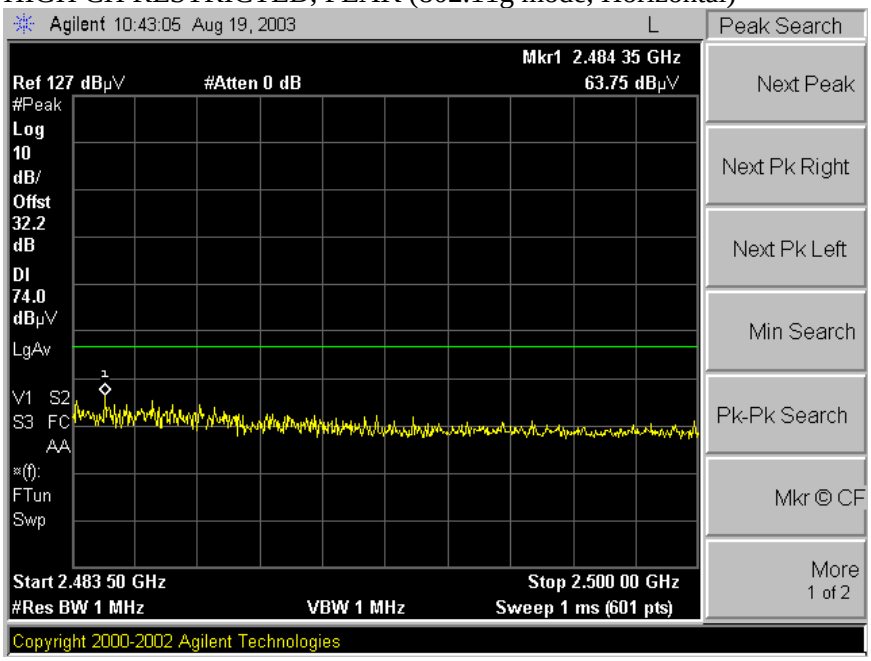

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HIGH CH RESTRICTED, AVG (802.11g mode, Horizontal)

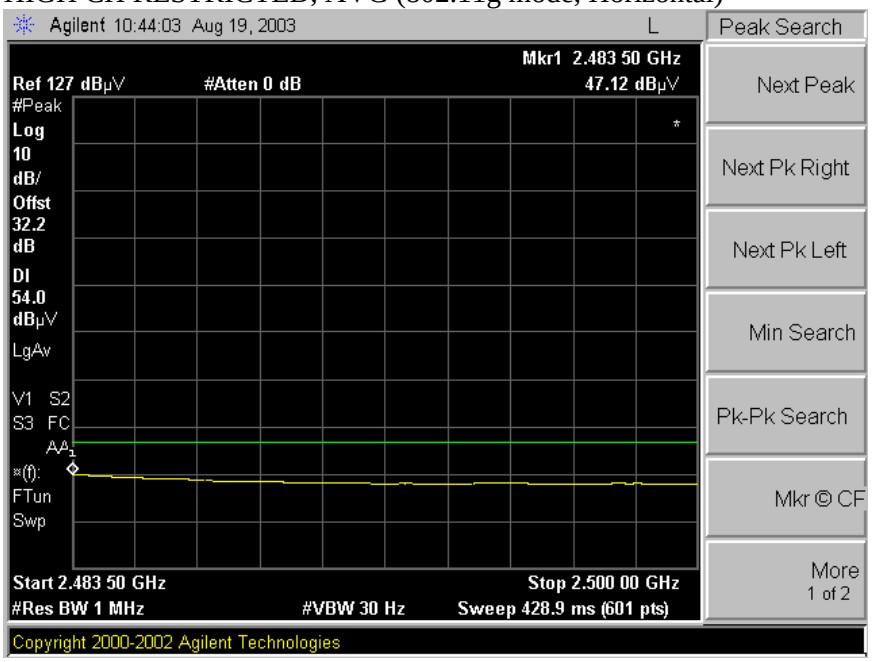

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)

HIGH CH RESTRICTED, PEAK (802.11g mode, Vertical)

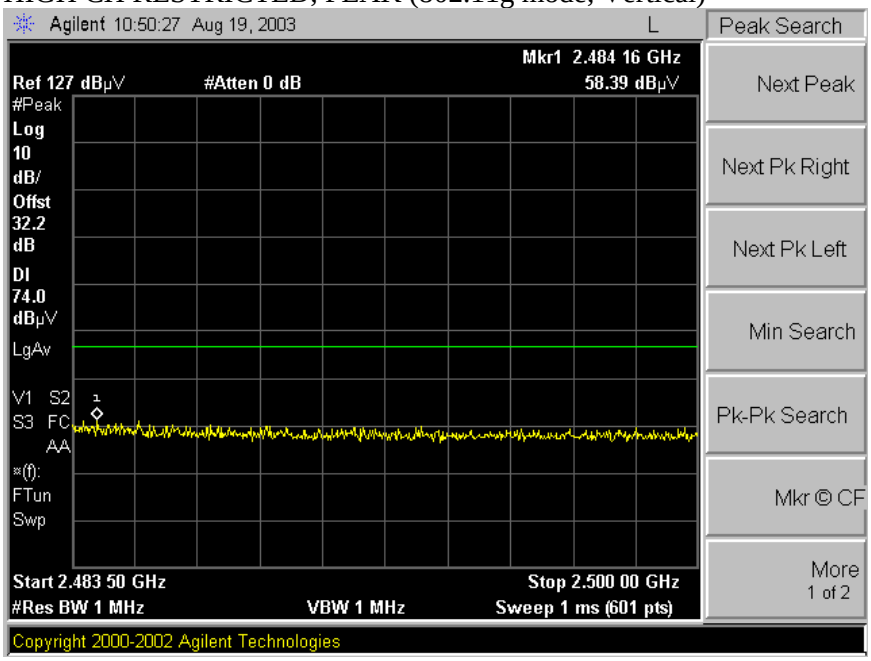

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HIGH CH RESTRICTED, AVG (802.11g mode, Vertical)

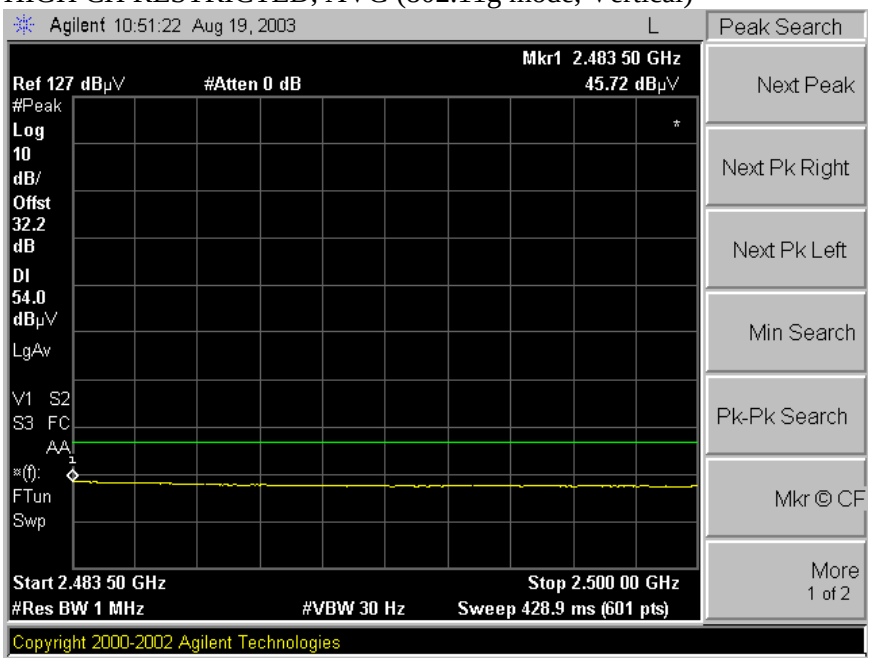

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HARMONICS AND SPURIOUS EMISSIONS (g NORMAL MODE)

08/19/03 **High Frequency Measurement**
Compliance Certification Services, Morgan Hill Open Field Site

Test Engr:William Zhuang
Project #:03U2181-1
Company Name:Cisco Systems, Akron
EUT Descrip.:802.11b/g mini-PCI Card
EUT M/N:Orion 1200 D
Test Target:FCC 15.247
Mode Oper:Transmit with Dipole Antenna

Test Equipment:

EMCO Horn 1-18GHz	Pre-amplifer 1-26GHz	Spectrum Analyzer	Horn > 18GHz
T59; S/N: 3245 @1m	T86 Miteq 924341	Agilent E4446A Analyzer	

Hi Frequency Cables: ☑ (2 ft) ☐ (2 ~ 3 ft) ☐ (4 ~ 6 ft) ☑ (12 ft)

Peak Measurements:
1 MHz Resolution Bandwidth
1MHz Video Bandwidth

Average Measurements:
1 MHz Resolution Bandwidth
10Hz Video Bandwidth

f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
4.824	9.8	51.3	43.0	33.8	3.9	-45.6	0.0	1.0	44.3	36.0	74.0	54.0	-29.7	-18.0	g mode, Low ch, V
4.824	9.8	49.4	39.8	33.8	3.9	-45.6	0.0	1.0	42.4	32.9	74.0	54.0	-31.6	-21.1	g mode, Low ch, H
7.236	9.8	52.9	40.5	36.9	4.9	-46.6	0.0	1.0	49.0	36.6	74.0	54.0	-25.0	-17.4	g mode, Low ch, V
7.236	9.8	51.7	39.3	36.9	4.9	-46.6	0.0	1.0	47.8	35.4	74.0	54.0	-26.2	-18.6	g mode, Low ch, H
9.648	9.8	50.2	38.4	38.6	5.8	-45.2	0.0	1.0	50.3	38.5	74.0	54.0	-23.7	-15.5	g mode, Low ch, V
9.648	9.8	49.3	37.1	38.6	5.8	-45.2	0.0	1.0	49.4	37.2	74.0	54.0	-24.6	-16.8	g mode, Low ch, H
4.874	9.8	55.6	46.1	33.8	3.9	-45.6	0.0	1.0	48.6	39.1	74.0	54.0	-25.4	-14.9	g mode, Mid ch, V
4.874	9.8	50.6	41.8	33.8	3.9	-45.6	0.0	1.0	43.6	34.8	74.0	54.0	-30.4	-19.2	g mode, Mid ch, H
7.311	9.8	53.3	40.5	37.0	4.9	-46.6	0.0	1.0	49.6	36.8	74.0	54.0	-24.4	-17.2	g mode, Mid ch, V
7.311	9.8	50.1	39.1	37.0	4.9	-46.6	0.0	1.0	46.3	35.4	74.0	54.0	-27.7	-18.6	g mode, Mid ch, H
9.748	9.8	50.5	39.2	38.5	5.8	-45.1	0.0	1.0	50.7	39.4	74.0	54.0	-23.3	-14.6	g mode, Mid ch, V
9.748	9.8	49.5	37.7	38.5	5.8	-45.1	0.0	1.0	49.7	37.9	74.0	54.0	-24.3	-16.1	g mode, Mid ch, H
4.924	9.8	55.8	46.3	33.8	3.9	-45.7	0.0	1.0	48.8	39.3	74.0	54.0	-25.2	-14.7	g mode, High ch, V
4.924	9.8	50.8	41.5	33.8	3.9	-45.7	0.0	1.0	43.8	34.5	74.0	54.0	-30.2	-19.5	g mode, High ch, H
7.386	9.8	53.5	40.5	37.1	5.0	-46.5	0.0	1.0	49.9	36.9	74.0	54.0	-24.1	-17.1	g mode, High ch, V
7.386	9.8	52.4	39.4	37.1	5.0	-46.5	0.0	1.0	48.8	35.9	74.0	54.0	-25.2	-18.1	g mode, High ch, H
9.848	9.8	49.9	40.9	38.5	5.8	-45.0	0.0	1.0	50.1	41.2	74.0	54.0	-23.9	-12.8	g mode, High ch, V
9.848	9.8	49.5	41.3	38.5	5.8	-45.0	0.0	1.0	49.8	41.6	74.0	54.0	-24.2	-12.4	g mode, High ch, H
								1.0							

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

7.8.5. RADIATED EMISSIONS WITH TWO 2.2 dBi DIPOLES (DIVERSITY OPERATION) AND CO-LOCATED RADIATED EMISSIONS

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The dominant transmitter is set to the worst case channel. The spurious emissions performance of the dominant transmitter is investigated as the settings of the non-dominant transmitter are varied. Worst case results are reported.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

RESULTS

No non-compliance noted:

The dominant transmitter is the 2.4 GHz radio. The non-dominant transmitter is the 5 GHz radio. The measurement results below are the worst case of stand-alone operation of the 2.4 GHz radio and collocated operation of the 2.4 GHz radio with the 5 GHz radio.

COMPLIANCE CERTIFICATION SERVICES DOCUMENT NO: CCSUP4031A
561F MONTEREY ROAD, MORGAN HILL, CA 95037 USA TEL: (408) 463-0885 FAX: (408) 463-0888
This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RADIATED RF MEASUREMENT SETUP

RADIATED FRONT PHOTO

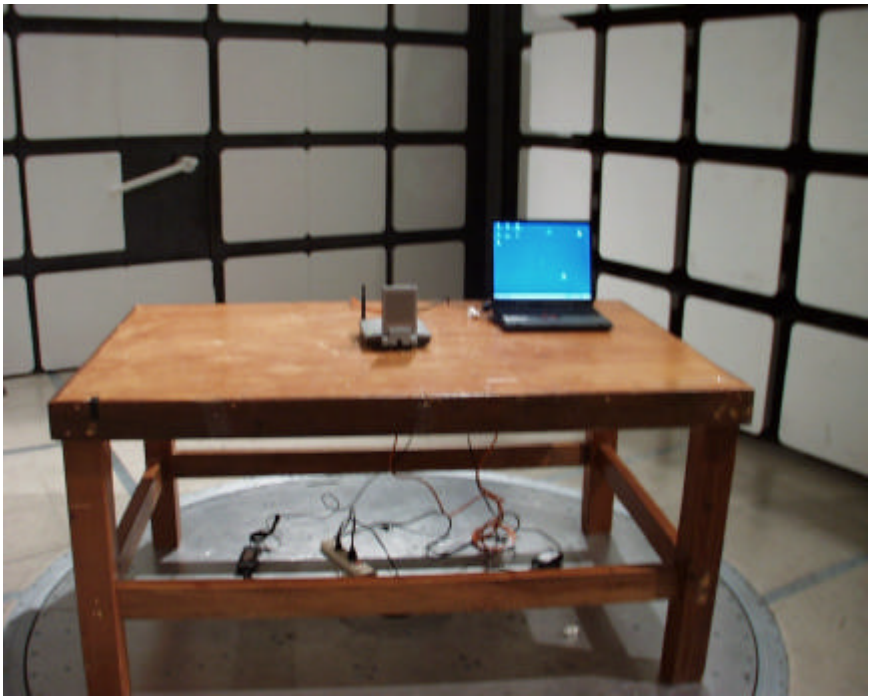

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

RADIATED BACK PHOTO

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

WORST-CASE RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL), b MODE

LOW CH RESTRICTED, PEAK (Horizontal)

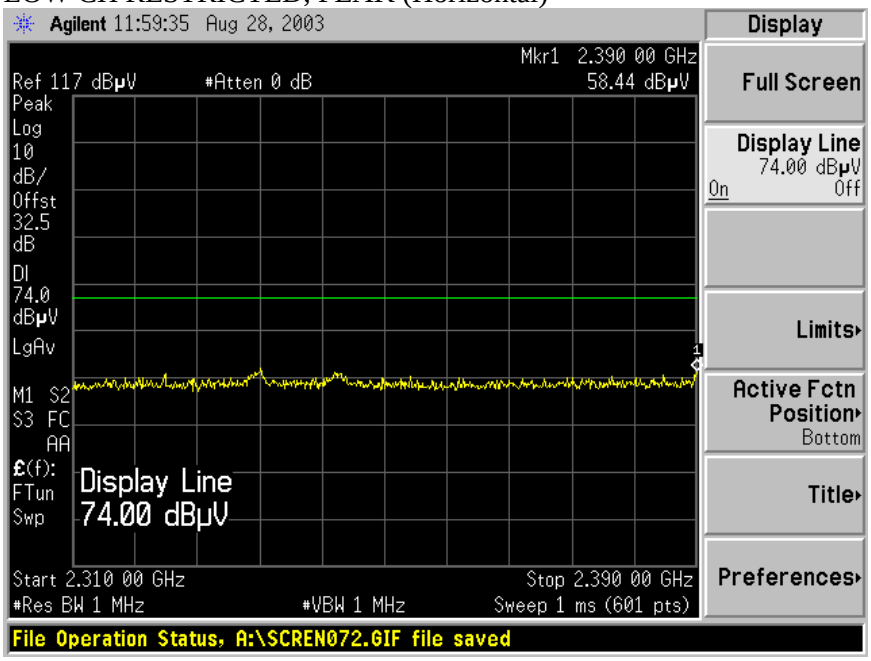

COMPLIANCE CERTIFICATION SERVICES DOCUMENT NO: CCSUP4031A
561F MONTEREY ROAD, MORGAN HILL, CA 95037 USA TEL: (408) 463-0885 FAX: (408) 463-0888
This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

LOW CH RESTRICTED, AVG (Horizontal)

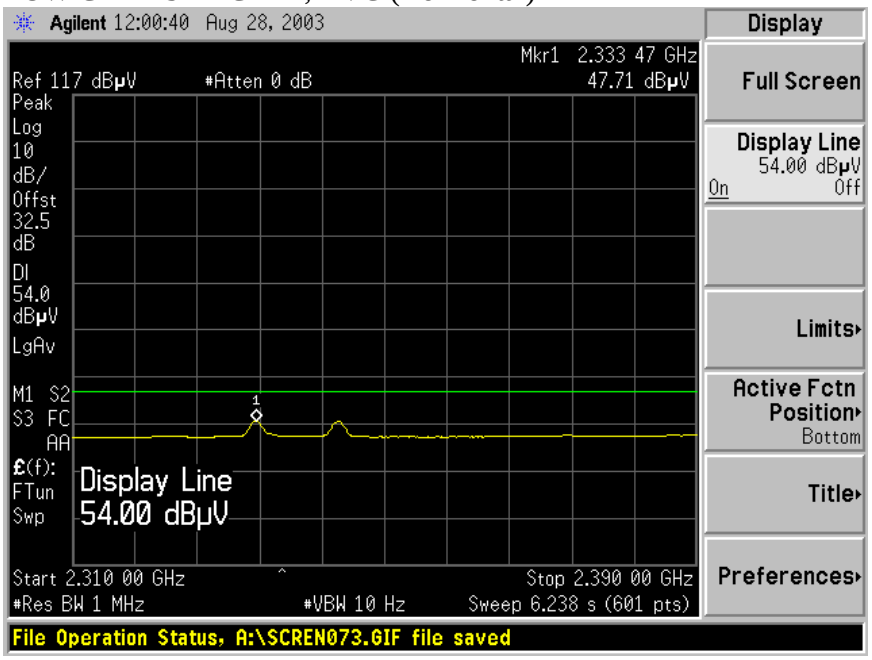

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

WORST-CASE RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL), b MODE

LOW CH RESTRICTED, PEAK (Vertical)

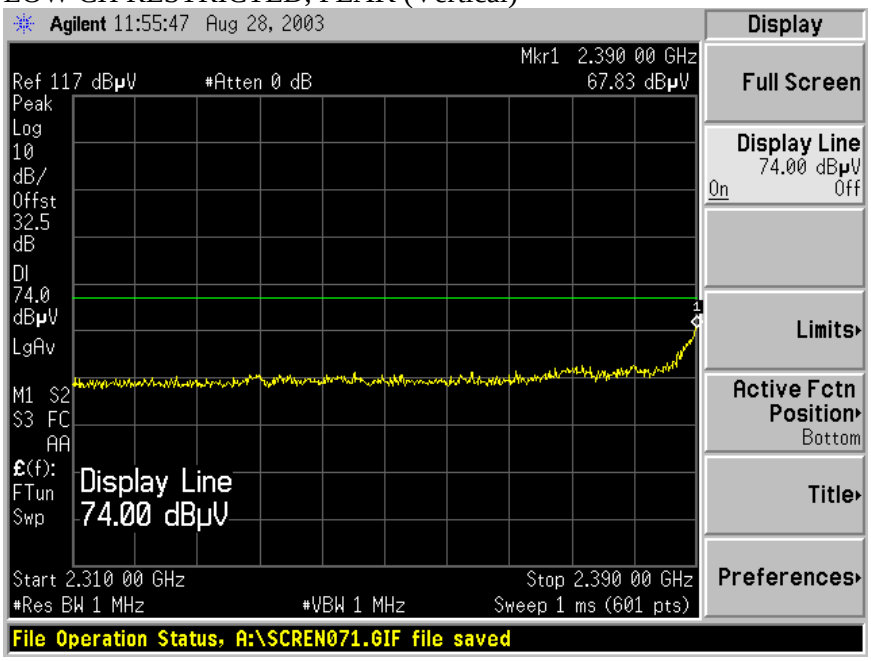

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

LOW CH RESTRICTED, AVG (Vertical)

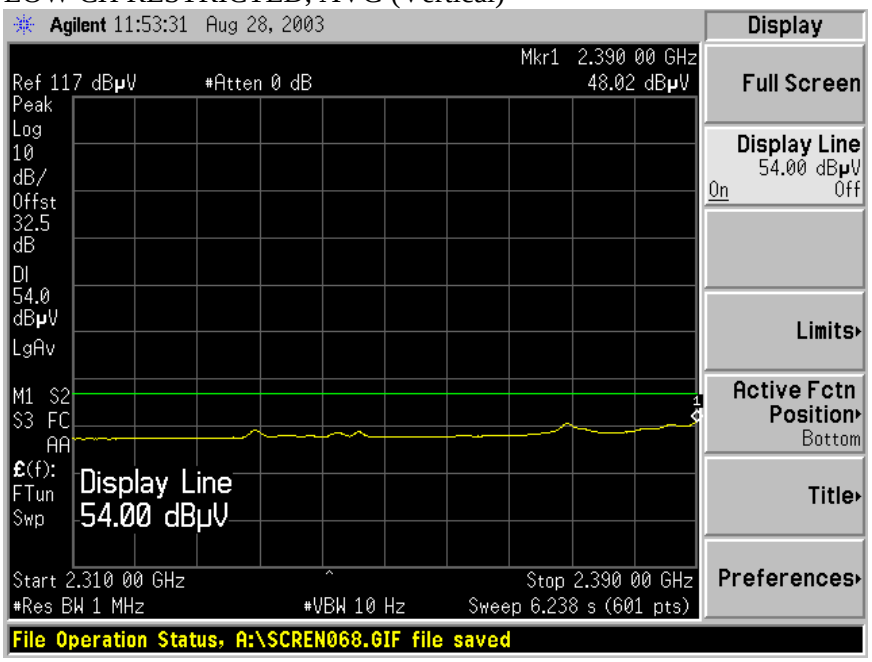

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

WORST-CASE RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL), b MODE

HIGH CH RESTRICTED, PEAK (Horizontal)

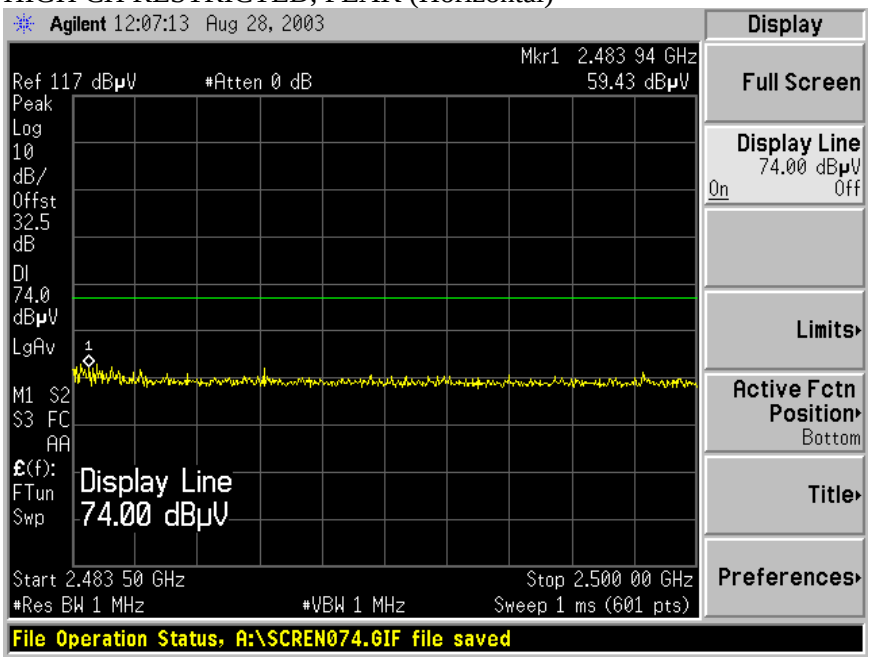

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HIGH CH RESTRICTED, AVG (Horizontal)

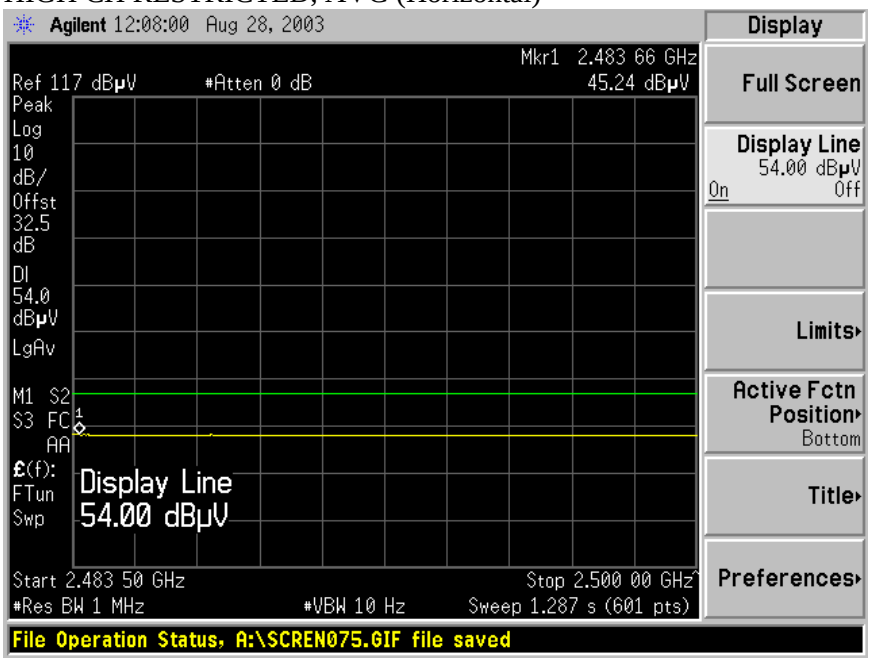

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

WORST-CASE RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL), b MODE

HIGH CH RESTRICTED, PEAK (Vertical)

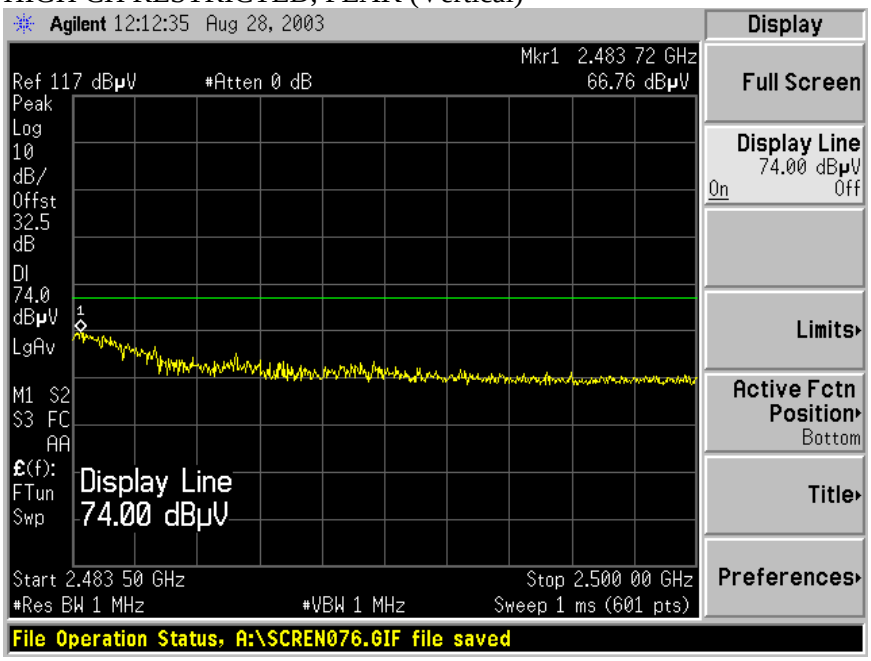

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HIGH CH RESTRICTED, AVG (Vertical)

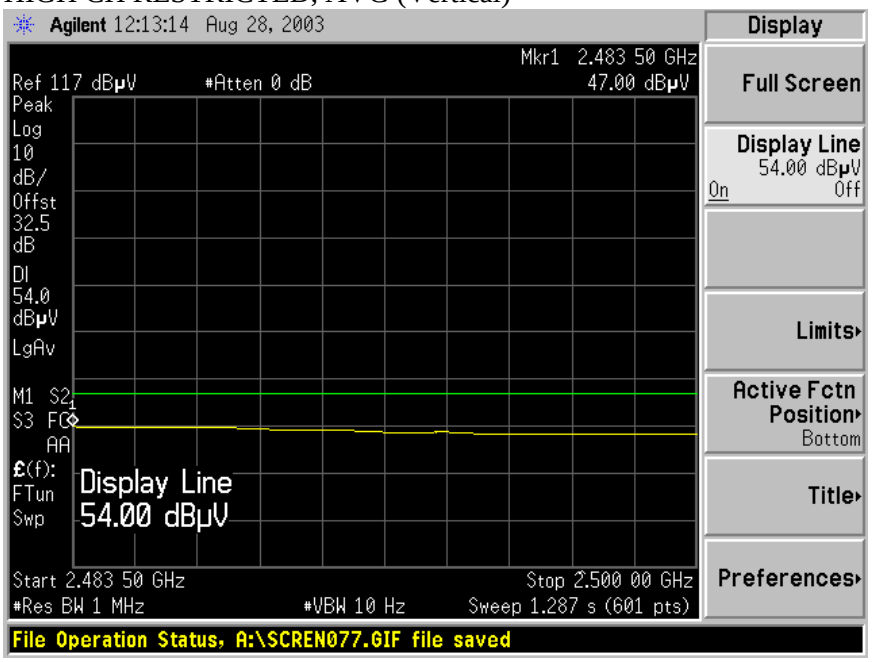

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

WORST-CASE RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL), g MODE

LOW CH RESTRICTED, PEAK (Horizontal)

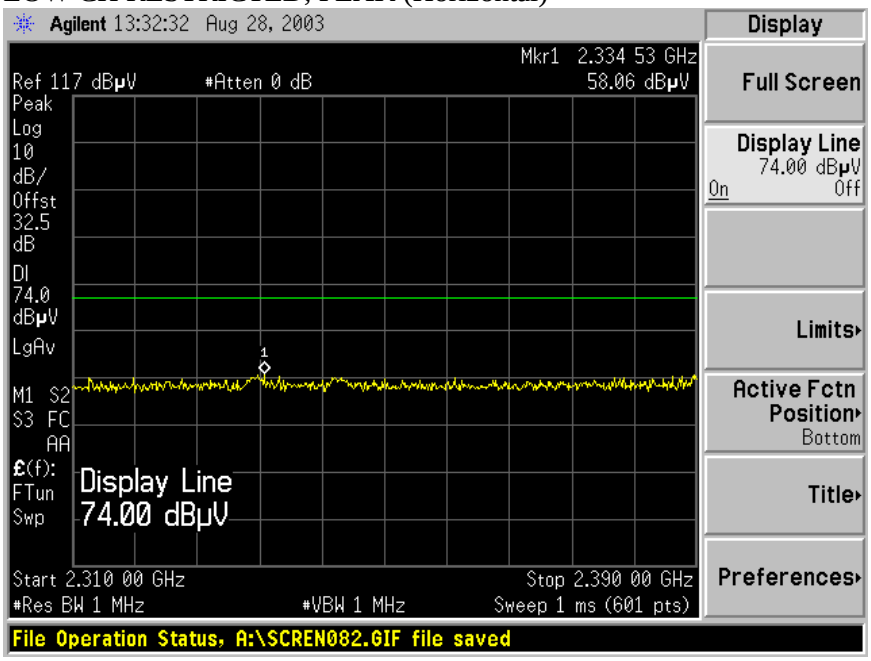

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

LOW CH RESTRICTED, AVG (Horizontal)

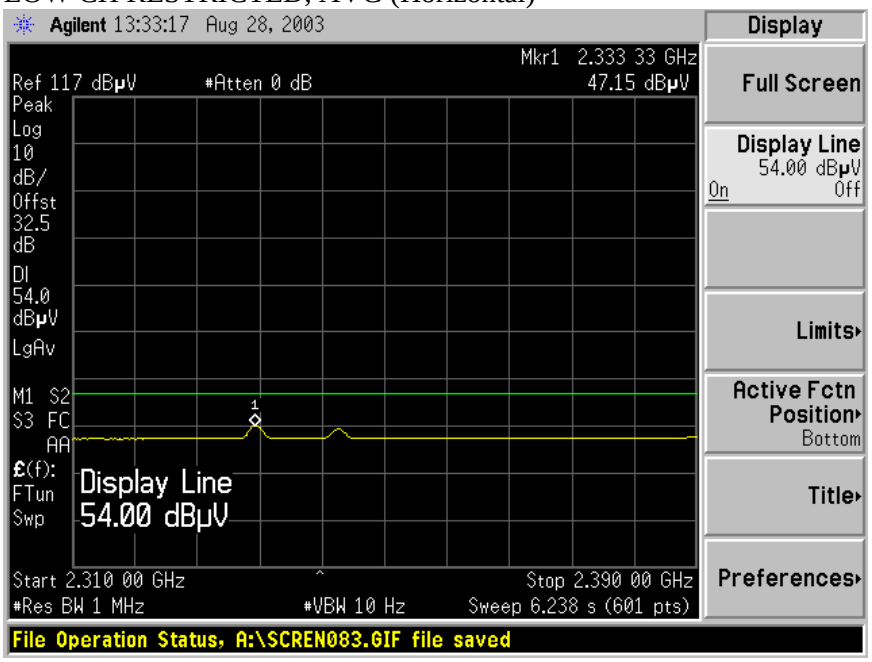

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

WORST-CASE RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL), g MODE

LOW CH RESTRICTED, PEAK (Vertical)

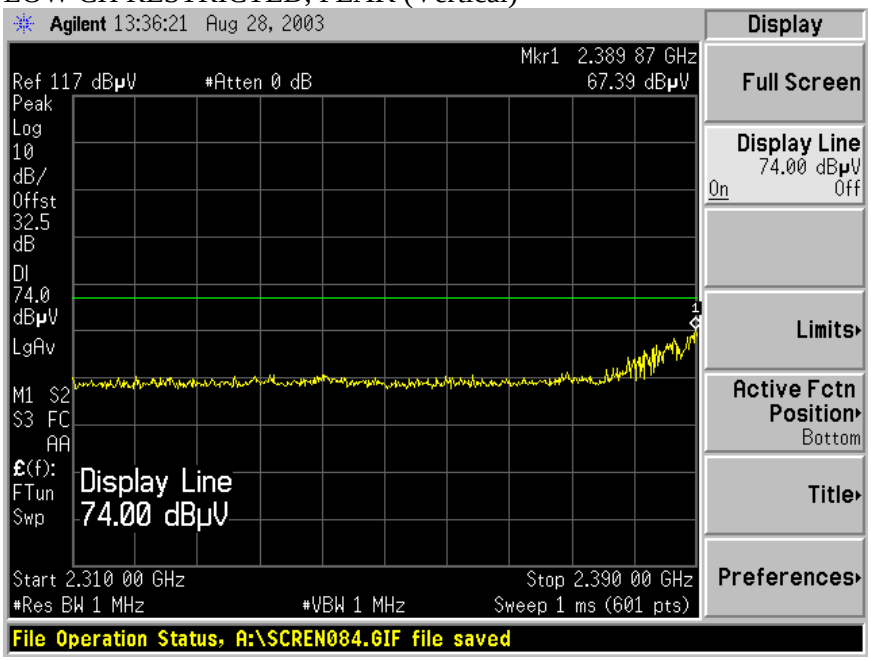

COMPLIANCE CERTIFICATION SERVICES DOCUMENT NO: CCSUP4031A
561F MONTEREY ROAD, MORGAN HILL, CA 95037 USA TEL: (408) 463-0885 FAX: (408) 463-0888
This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

LOW CH RESTRICTED, AVG (Vertical)

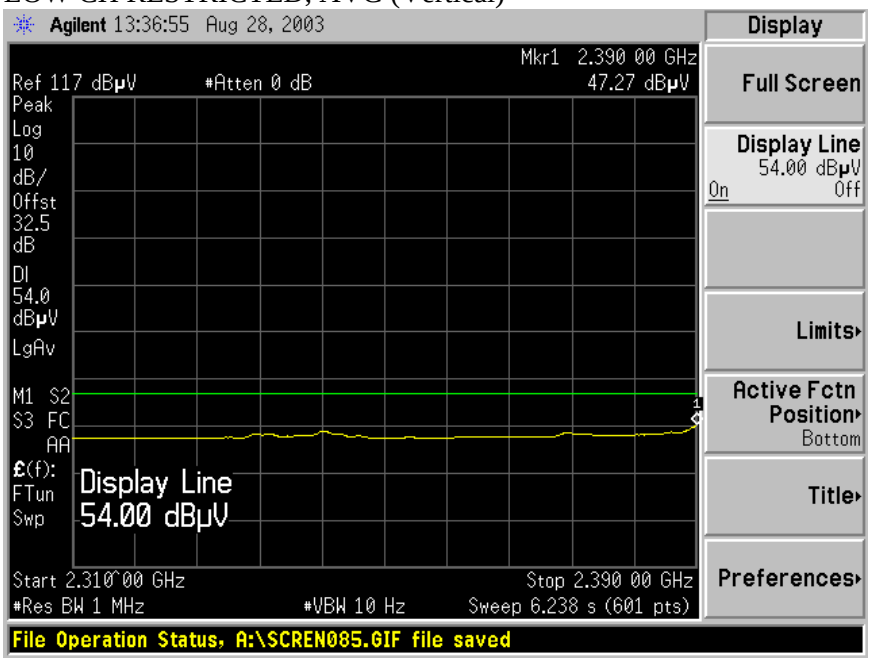

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

WORST-CASE RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL), g MODE

HIGH CH RESTRICTED, PEAK (Horizontal)

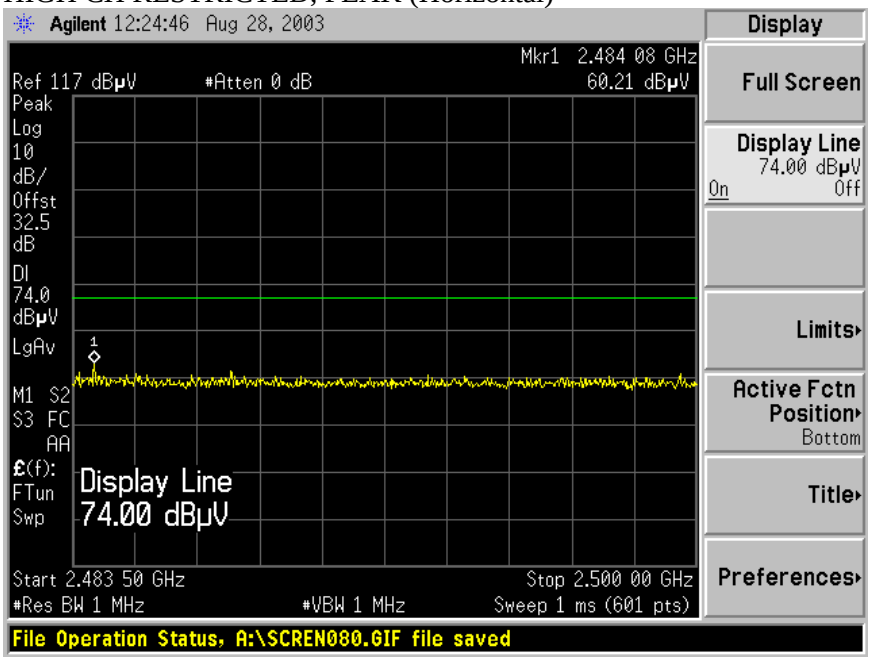

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HIGH CH RESTRICTED, AVG (Horizontal)

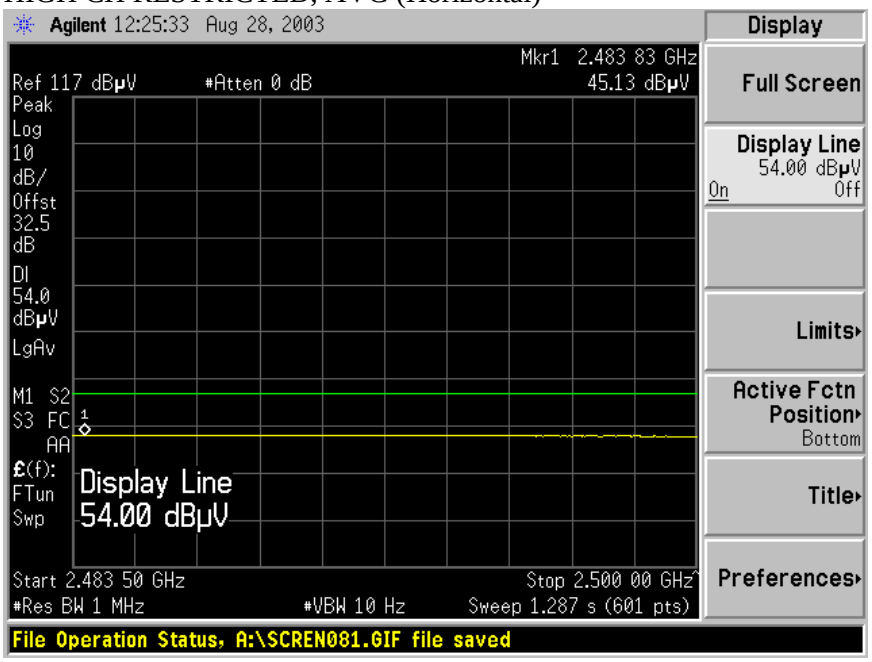

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

WORST-CASE RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL), g MODE

HIGH CH RESTRICTED, PEAK (Vertical)

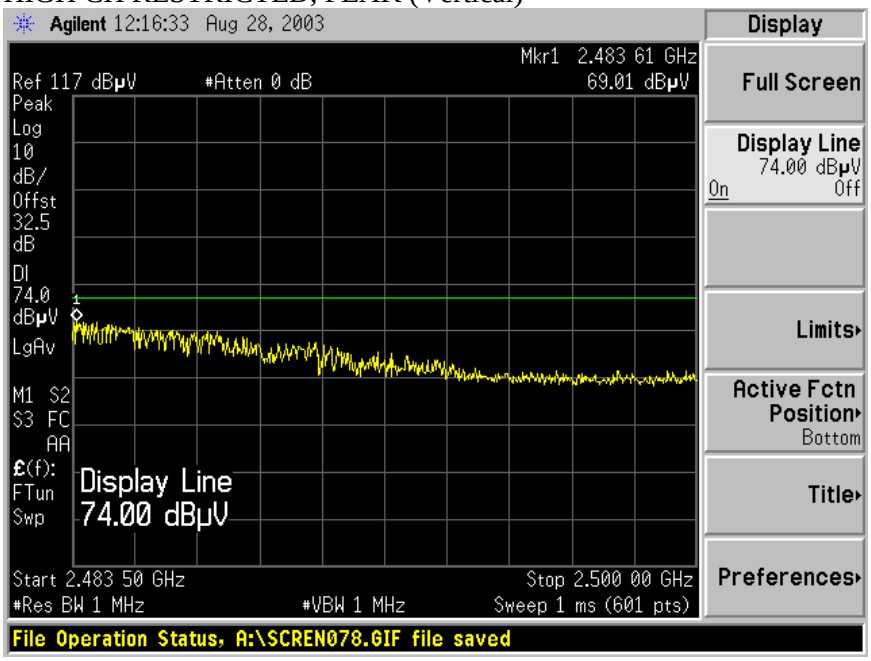

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

HIGH CH RESTRICTED, AVG (Vertical)

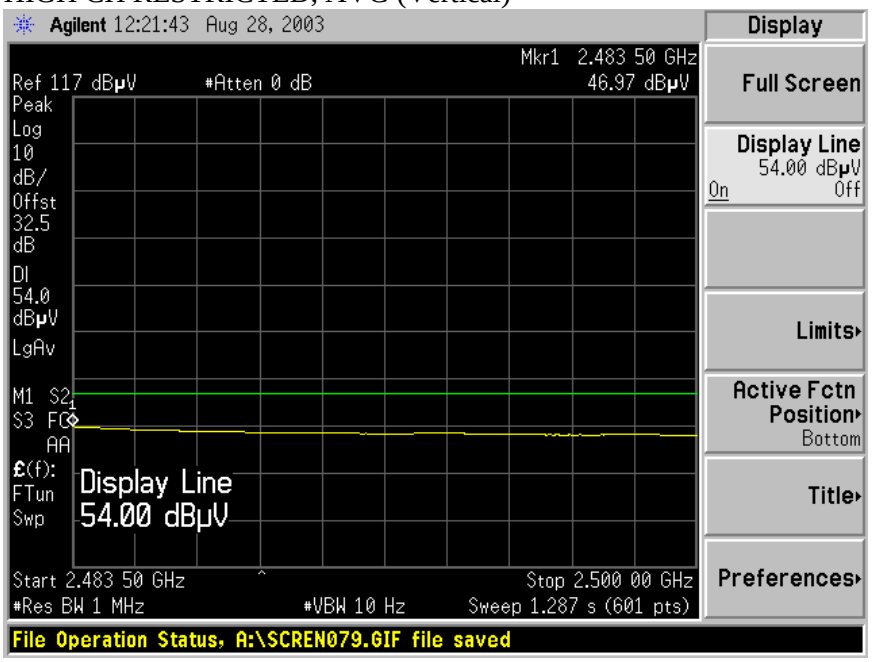

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

WORST-CASE HARMONICS AND SPURIOUS EMISSIONS, b MODE

Note: The 802.11b mode is worst-case compared to the 802.11g mode. Only worst-case results are reported below.

08/28/03 **High Frequency Measurement**
Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: Yan Zheng
Project #: 03U2181
Company: Cisco Systems
EUT Descrip.: 802.11b /g Radio Module
EUT M/N: AIR-MP21G-A-K9 / AP1100
Test Target: FCC Class B
Mode Oper: Transmit, Worst-case configuration of two Co-Located radios

Test Equipment:

EMCO Horn 1-18GHz	Pre-amplifer 1-26GHz	Spectrum Analyzer	Horn > 18GHz
T73; S/N: 6717 @3m	T86 Miteq 924341	Agilent E4446A Analyzer	T117; ARA 18-26GHz; S/N:1013

Hi Frequency Cables
☐ (2 ft) ☑ (2 ~ 3 ft) ☐ (4 ~ 6 ft) ☑ (12 ft)

Peak Measurements:
1 MHz Resolution Bandwidth
1MHz Video Bandwidth

Average Measurements:
1 MHz Resolution Bandwidth
10Hz Video Bandwidth

f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
Channel 1 (2412MHz)															
4.824	9.8	55.6	43.6	33.4	4.4	-45.6	0.0	1.0	48.8	36.8	74.0	54.0	-25.2	-17.2	V
4.824	9.8	53.3	40.7	33.4	4.4	-45.6	0.0	1.0	46.5	33.9	74.0	54.0	-27.5	-20.1	H
Channe 6 (2437MHz)															
4.874	9.8	58.2	46.2	33.4	4.4	-45.6	0.0	1.0	51.4	39.4	74.0	54.0	-22.6	-14.6	V
7.311	9.8	61.0	40.9	35.8	5.7	-46.6	0.0	1.0	56.9	36.8	74.0	54.0	-17.1	-17.2	V
7.311	9.8	51.8	39.3	35.8	5.7	-46.6	0.0	1.0	47.7	35.2	74.0	54.0	-26.3	-18.8	H
4.874	9.8	54.5	41.5	33.4	4.4	-45.6	0.0	1.0	47.7	34.7	74.0	54.0	-26.3	-19.3	H
Channe 11 (2462MHz)															
4.924	9.8	54.8	42.7	33.5	4.5	-45.7	0.0	1.0	48.1	35.9	74.0	54.0	-25.9	-18.1	V
7.386	9.8	55.4	39.3	36.0	5.7	-46.5	0.0	1.0	51.5	35.4	74.0	54.0	-22.5	-18.6	V
7.386	9.8	51.5	38.9	36.0	5.7	-46.5	0.0	1.0	47.6	35.0	74.0	54.0	-26.4	-19.0	H
4.924	9.8	53.3	41.8	33.5	4.5	-45.7	0.0	1.0	46.5	35.0	74.0	54.0	-27.5	-19.0	H

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

COMPLIANCE CERTIFICATION SERVICES DOCUMENT NO: CCSUP4031A
561F MONTEREY ROAD, MORGAN HILL, CA 95037 USA TEL: (408) 463-0885 FAX: (408) 463-0888
This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

7.9. RADIATED EMISSIONS BELOW 1 GHZ

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

COMPLIANCE Engineering Services, Inc.
561F Monterey Road
Morgan Hill, CA 95037, U.S.A.
Tel: (408) 463-0885
Fax: (408) 463-0888

Data#: 16 File#: EMI03U2181.EMI Date: 08-27-2003 Time: 17:44:12

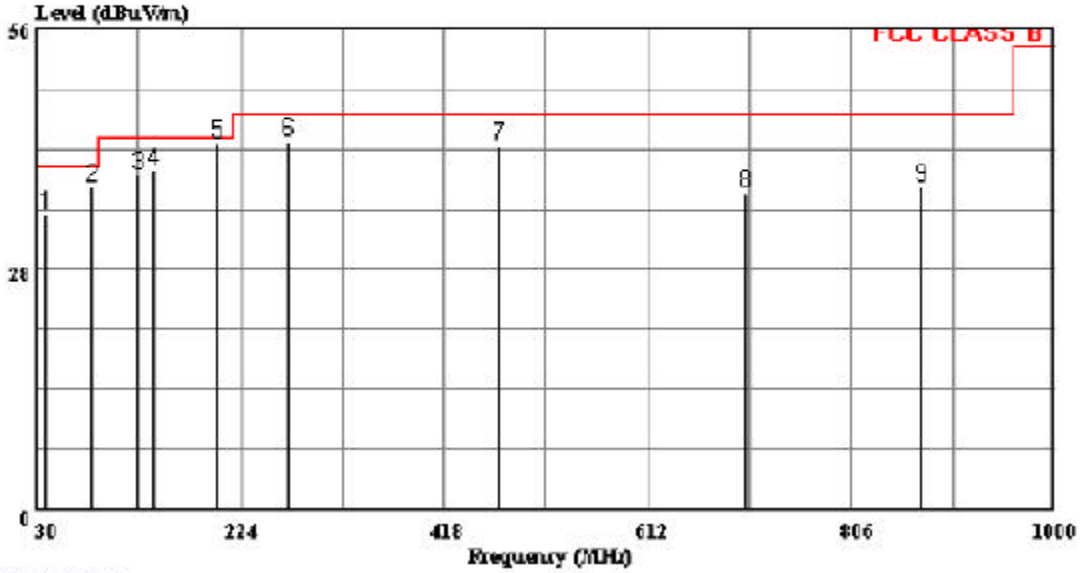

(Audix ATC)

Trace: Ref Trace:

Condition: FCC CLASS B 3m CHAMBER 030306 1185 HORIZONTAL
Company : CISCO SYSTEMS, AKRON
EUT Description : 802.11b/g mini-PCI Card
Model Number : AIR-MP21G-A-K9
Test Configurtion: EUT, IBM ThinkPad Laptop,
Tester : Thanh Nguyen
Test Target : FCC 15, Class B
Mode of Operation: Tx Worst Case.
Project No : 03U2181

Page: 1

	Freq	Read Level	Probe Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	38.730	17.25	16.64	0.59	0.00	34.48	40.00	-5.52	Peak
2	83.350	29.72	6.98	0.85	0.00	37.55	40.00	-2.45	Peak
3	126.030	27.98	10.05	1.06	0.00	39.09	43.50	-4.41	Peak
4	140.580	29.66	8.83	1.13	0.00	39.62	43.50	-3.88	Peak
5	202.660	32.15	9.16	1.38	0.00	42.69	43.50	-0.81	Peak
6	268.620	29.37	11.87	1.62	0.00	42.85	46.00	-3.15	Peak
7	470.380	24.19	15.97	2.22	0.00	42.38	46.00	-3.62	Peak
8	705.120	15.43	18.63	2.76	0.00	36.82	46.00	-9.18	Peak
9	872.930	14.05	20.38	3.15	0.00	37.58	46.00	-8.42	Peak

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

COMPLIANCE Engineering Services, Inc.
561F Monterey Road
Morgan Hill, CA 95037, U.S.A.
Tel: (408) 463-0885
Fax: (408) 463-0888

Data#: 9 File#: EMI03U2181.EMI Date: 08-27-2003 Time: 16:14:01

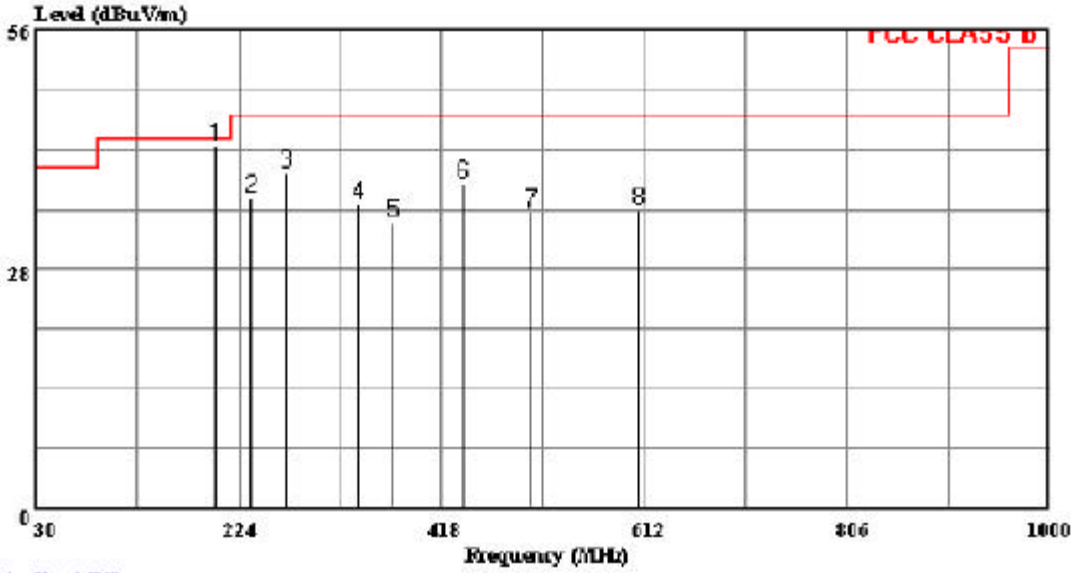

(Audix ATC)

Trace: Ref Trace:

Condition: FCC CLASS B 3m CHAMBER 030306 1185 VERTICAL
Company : CISCO SYSTEMS, AKRON
EUT Description : 802.11b/g mini-PCI Card
Model Number : AIR-MP21G-A-K9
Test Configurtion: EUT, IBM ThinkPad Laptop,
Tester : Thanh Nguyen
Test Target : FCC 15, Class B
Mode of Operation: Tx worst case
Project No : 03U2181

Page: 1

	Freq	Read Level	Probe Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	201.690	31.93	9.08	1.38	0.00	42.39	43.50	-1.11	Peak
2	235.640	23.77	11.02	1.47	0.00	36.26	46.00	-9.74	Peak
3	269.620	25.84	11.87	1.62	0.00	39.32	46.00	-6.68	Peak
4	337.490	20.71	13.02	1.85	0.00	35.58	46.00	-10.42	Peak
5	371.440	17.69	13.84	1.96	0.00	33.49	46.00	-12.51	Peak
6	439.340	20.69	15.32	2.15	0.00	38.16	46.00	-7.84	Peak
7	504.330	15.66	16.60	2.31	0.00	34.57	46.00	-11.43	Peak
8	606.180	14.69	17.75	2.53	0.00	34.97	46.00	-11.03	Peak

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

7.10. POWERLINE CONDUCTED EMISSIONS

LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 µH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

No non-compliance noted:

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

6 WORST EMISSIONS

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Closs	Limit	EN_B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.15	51.06	--	--	0.00	65.94	55.94	-14.88	-4.88	L1
8.46	44.26	--	--	0.00	60.00	50.00	-15.74	-5.74	L1
0.51	42.80	--	--	0.00	56.00	46.00	-13.20	-3.20	L1
0.15	58.03	--	21.64	0.00	65.94	55.94	-7.91	-34.30	L2
0.25	51.92	--	33.50	0.00	63.11	53.11	-11.19	-19.61	L2
7.98	43.00	--	29.95	0.00	60.00	50.00	-17.00	-20.05	L2
6 Worst Data									

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

LINE 1 RESULTS

COMPLIANCE Engineering Services, Inc.
561F Monterey Road,
San Jose, CA 95037 USA
Tel: (408) 463-0885
Fax: (408) 463-0888

Data#: 7 File#: 03U2181.EMI Date: 08-27-2003 Time: 18:52:47

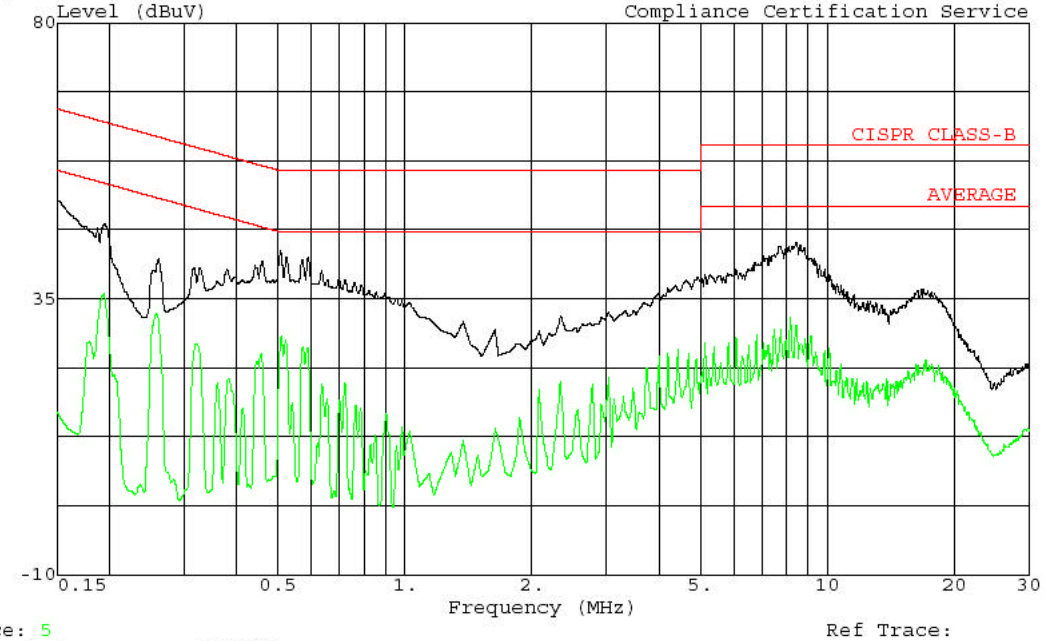

Trace: 5 Ref Trace:

Project #	: 03U2181
Test Engineer	: Thanh Nguyen
Company	: CISCO SYSTEMS
EUT	: 802.11b/g Mini-PCI card
Model	: AIR-MP
Configuration	: EUT/Laptop /AC Adapter/DC Power Supply
Mode of Operation	: Tx, worst case
Target of Test	: FCC Class B
Voltage	: 115Vac, 60Hz
	: Line 1; PEAK (Black), AVG (Green)

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

LINE 2 RESULTS

561F Monterey Road,
San Jose, CA 95037 USA
Tel: (408) 463-0885
Fax: (408) 463-0888

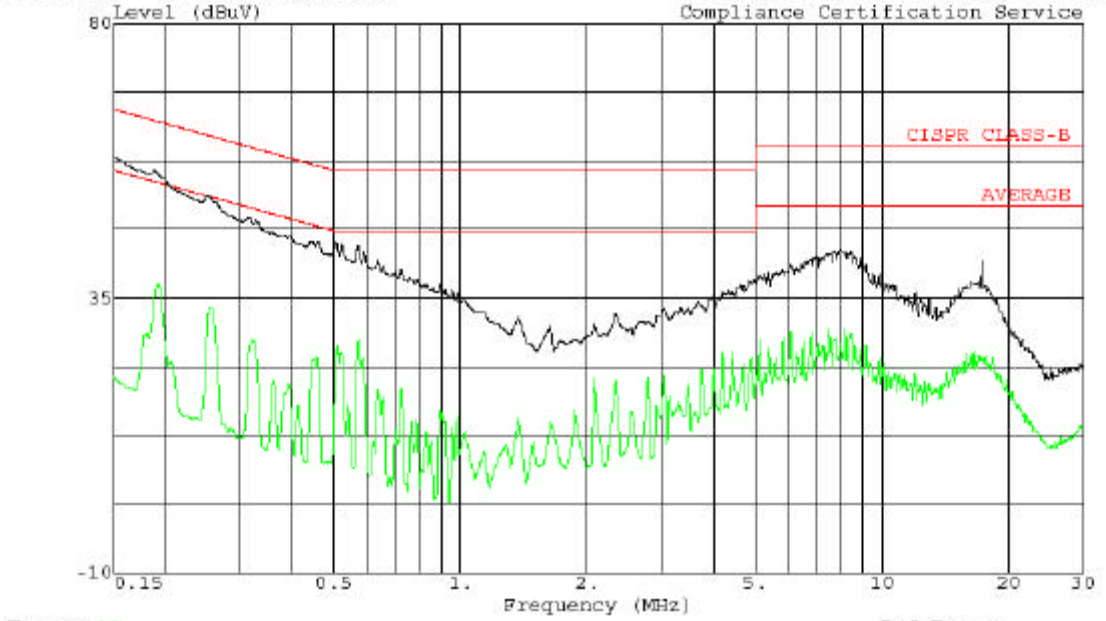

Trace: 12 Ref Trace:
Project # : 03U2181
Test Engineer : Thanh Nguyen
Company : CISCO SYSTEMS
EUT : 802.11b/g Mini-PCI card
Model : AIR-MP
Configuration : EUT/Laptop /AC Adapter/DC Power Supply
Mode of Operation: Tx, worst case
Target of Test : FCC Class B
Voltage : 115Vac, 60Hz
: Line 2 ; PEAK (Black), AVG (Green)

This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

8. SETUP PHOTOS

ANTENNA PORT CONDUCTED RF MEASUREMENT SETUP

ANTENNA PORT CONDUCTED PHOTO

RADIATED RF MEASUREMENT SETUP

See separate photographs for each antenna type.

COMPLIANCE CERTIFICATION SERVICES DOCUMENT NO: CCSUP4031A
561F MONTEREY ROAD, MORGAN HILL, CA 95037 USA TEL: (408) 463-0885 FAX: (408) 463-0888
This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP

LINE CONDUCTED FRONT PHOTO

COMPLIANCE CERTIFICATION SERVICES DOCUMENT NO: CCSUP4031A
561F MONTEREY ROAD, MORGAN HILL, CA 95037 USA TEL: (408) 463-0885 FAX: (408) 463-0888
This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.

LINE CONDUCTED BACK PHOTO

END OF REPORT

COMPLIANCE CERTIFICATION SERVICES DOCUMENT NO: CCSUP4031A
561F MONTEREY ROAD, MORGAN HILL, CA 95037 USA TEL: (408) 463-0885 FAX: (408) 463-0888
This report shall not be reproduced except in full, without the written approval of CCS. This document may be altered or revised by Compliance Certification Services personnel only, and shall be noted in the revision section of the document.