



FCC PART 90
ISED RSS-111, ISSUE 5, SEPTEMBER 2014
TEST REPORT

For

Cisco Systems, Inc.

125 West Tasman Drive,
San Jose, CA 95134, USA

FCC ID: LDKIW9165E
IC: 2461A-IW9165E

Report Type: Original Report	Product Type: Wi-Fi 6E Outdoor Access Point
Prepared By: Deepak Mishra Test Engineer	
Report Number: R2303171-90	
Report Date: 2023-10-04	
Reviewed By: Christian McCaig RF Lead Engineer	
Bay Area Compliance Laboratories Corp. 1274 Anvilwood Avenue, Sunnyvale, CA 94089, USA Tel: +1 (408) 732-9162, Fax: +1 (408) 732-9164	



Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government.

* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "*" (Rev.3)

TABLE OF CONTENTS

1	GENERAL INFORMATION	5
1.1	PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	5
1.2	MECHANICAL DESCRIPTION	5
1.3	OBJECTIVE.....	5
1.4	RELATED SUBMITTAL(S)/GRANT(S).....	5
1.5	TEST METHODOLOGY	5
1.6	MEASUREMENT UNCERTAINTY.....	6
1.7	TEST FACILITY REGISTRATIONS	6
1.8	TEST FACILITY ACCREDITATIONS.....	7
2	SYSTEM TEST CONFIGURATION	9
2.1	JUSTIFICATION.....	9
2.2	EUT EXERCISE SOFTWARE.....	9
2.3	EQUIPMENT MODIFICATIONS	10
2.4	LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	10
2.5	REMOTE SUPPORT EQUIPMENT LIST AND DETAILS.....	10
2.6	INTERFACE PORTS AND CABLING	10
3	SUMMARY OF TEST RESULTS.....	11
4	FCC §1.1307(B) (1), §2.1091 & §90.223 & ISED RSS-102 - RF EXPOSURE	12
4.1	APPLICABLE STANDARDS	12
4.2	MPE PREDICTION	13
4.3	RF EXPOSURE EVALUATION EXEMPTION FOR FCC AND IC	14
4.4	RF EXPOSURE SIMULTANEOUS TRANSMISSION EVALUATION FOR FCC	17
5	FCC §2.1046, §90.205(P) & RSS-111 § 5.3 - RF OUTPUT POWER.....	18
5.1	APPLICABLE STANDARDS	18
5.2	TEST PROCEDURE	19
5.3	TEST SETUP BLOCK DIAGRAM.....	19
5.4	TEST EQUIPMENT LIST AND DETAILS	19
5.5	TEST ENVIRONMENTAL CONDITIONS.....	19
5.6	TEST RESULTS	20
6	FCC §2.1046, §90.205(P), §90.1215, RSS-111 § 5.3 - POWER SPECTRAL DENSITY	21
6.1	APPLICABLE STANDARDS	21
6.2	TEST PROCEDURE	21
6.3	TEST SETUP BLOCK DIAGRAM.....	21
6.4	TEST EQUIPMENT LIST AND DETAILS	22
6.5	TEST ENVIRONMENTAL CONDITIONS.....	22
6.6	TEST RESULTS	23
7	FCC §90.1215 & RSS-111 § 5.4 – TRANSMITTER PEAK TO AVERAGE RATIO.....	24
7.1	APPLICABLE STANDARDS	24
7.2	TEST PROCEDURE	24
7.3	TEST SETUP BLOCK DIAGRAM.....	24
7.4	TEST EQUIPMENT LIST AND DETAILS	24
7.5	TEST ENVIRONMENTAL CONDITIONS.....	25
7.6	TEST RESULTS	26
8	FCC §2.1049, §90.209, RSS-111 § 5.3 - OCCUPIED BANDWIDTH	34
8.1	APPLICABLE STANDARDS	34
8.2	TEST PROCEDURE	34
8.3	TEST SETUP BLOCK DIAGRAM.....	34
8.4	TEST EQUIPMENT LIST AND DETAILS	34
8.5	TEST ENVIRONMENTAL CONDITIONS.....	35
8.6	TEST RESULTS	35
9	FCC §2.1053 & §90.210, ISED RSS-111 §5.5 - SPURIOUS RADIATED EMISSIONS	36

9.1	APPLICABLE STANDARDS	36
9.2	TEST PROCEDURE	37
9.3	TEST SETUP BLOCK DIAGRAM.....	38
9.4	TEST EQUIPMENT LIST AND DETAILS	39
9.5	TEST ENVIRONMENTAL CONDITIONS.....	40
9.6	TEST RESULTS	41
10	FCC §2.1051, §90.210 & ISEDC RSS-111 §5.5 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS	42
10.1	APPLICABLE STANDARDS	42
10.2	TEST PROCEDURE	43
10.3	TEST SETUP BLOCK DIAGRAM.....	44
10.4	TEST EQUIPMENT LIST AND DETAILS	44
10.5	TEST ENVIRONMENTAL CONDITIONS.....	44
10.6	TEST RESULTS	44
11	FCC §2.1055, §90.213, RSS-111 § 5.2 - FREQUENCY TOLERANCE.....	45
11.1	APPLICABLE STANDARD	45
11.2	TEST PROCEDURE	45
11.3	TEST SETUP BLOCK DIAGRAM.....	47
11.4	TEST EQUIPMENT LIST AND DETAILS	47
11.5	TEST ENVIRONMENTAL CONDITIONS.....	47
11.6	TEST RESULTS	48
12	ANNEX D (NORMATIVE) – A2LA ELECTRICAL TESTING CERTIFICATE.....	51

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	R2303171-90	Original	2023-10-04

1 General Information

1.1 Product Description for Equipment under Test (EUT)

This test report was prepared on behalf of *Cisco Systems, Inc.*, and their product model: *IW9165E-B (USA)*, *IW9165E-A (Canada)*, FCC ID: LDKIW9165E, IC: 2461A-IW9165E, or the “EUT” as referred to in this report. It is a Wi-Fi 6E Outdoor Access Point.

Note: 5600-5650 MHz range shall not be applicable to ISSED.

1.2 Mechanical Description

Dimensions (mm): 121 mm (L) x 151 mm (W) x 45 mm (H)

Serial Number: FOC2638BL35 assigned by manufacturer.

EUT Photos: See Attachments Annex B.

1.3 Objective

This report was prepared on behalf *Cisco Systems, Inc.* in accordance with Part 90 Subparts I and Y and Part 2 Subpart J of the Federal Communication Commission’s rules and with ISSED RSS-111 Issue 5, September 2014.

1.4 Related Submittal(s)/Grant(s)

FCC Part 15, Subpart E, Equipment NII with FCC ID: LDKIW9165E, IC: 2461A-IW9165E

FCC Part 15, Subpart E, Equipment DTS with FCC ID: LDKIW9165E, IC: 2461A-IW9165E

1.5 Test Methodology

All tests and measurements indicated in this document were performed in accordance with ANSI C63.26-2015 American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services.

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 90 Subparts I and Y and Part 2 Subpart J and with ISSED RSS-111 Issue 5, September 2014.

1.6 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Parameter	Measurement uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.57 dB
Unwanted Emissions, conducted	±1.57dB
All emissions, radiated	±4.0 dB
Temperature	±2 ° C
Humidity	±5 %
DC and low frequency voltages	±1.0 %
Time	±2 %
Duty Cycle	±3 %

1.7 Test Facility Registrations

BACLs test facilities that are used to perform Radiated and Conducted Emissions tests are currently recognized by the Federal Communications Commission as Accredited with NIST Designation Number US1129.

BACL's test facilities that are used to perform Radiated and Conducted Emissions tests are currently registered with Industry Canada under Registration Numbers: 3062A-1, 3062A-2, and 3062A-3.

BACL is a Chinese Taipei Bureau of Standards Metrology and Inspection (BSMI) validated Conformity Assessment Body (CAB), under Appendix B, Phase I Procedures of the APEC Mutual Recognition Arrangement (MRA). BACL's BSMI Lab Code Number is: SL2-IN-E-1002R

BACL's test facilities that are used to perform AC Line Conducted Emissions, Telecommunications Line Conducted Emissions, Radiated Emissions from 30 MHz to 1 GHz, and Radiated Emissions from 1 GHz to 6 GHz are currently recognized as Accredited in accordance with the Voluntary Control Council for Interference [VCCI] Article 15 procedures under Registration Number A-0027.

1.8 Test Facility Accreditations

Bay Area Compliance Laboratories Corp. (BACL) is:

A- An independent, 3rd-Party, Commercial Test Laboratory accredited to ISO/IEC 17025:2017 by A2LA (Test Laboratory Accreditation Certificate Number 3297.02), in the fields of: Electromagnetic Compatibility and Telecommunications. Unless noted by an Asterisk (*) in the Compliance Matrix (See Section 3 of this Test Report), BACL's ISO/IEC 17025:2017 Scope of Accreditation includes all of the Test Method Standards and/or the Product Family Standards detailed in this Test Report..

BACL's ISO/IEC 17025:2017 Scope of Accreditation includes a comprehensive suite of EMC Emissions, EMC Immunity, Radio, RF Exposure, Safety and wireline Telecommunications test methods applicable to a wide range of product categories. These product categories include Central Office Telecommunications Equipment [including NEBS - Network Equipment Building Systems], Unlicensed and Licensed Wireless and RF devices, Information Technology Equipment (ITE); Telecommunications Terminal Equipment (TTE); Medical Electrical Equipment; Industrial, Scientific and Medical Test Equipment; Professional Audio and Video Equipment; Industrial and Scientific Instruments and Laboratory Apparatus; Cable Distribution Systems, and Energy Efficient Lighting.

B- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3297.03) to certify

- For the USA (Federal Communications Commission):

- 1- All Unlicensed radio frequency devices within FCC Scopes A1, A2, A3, and A4;
- 2- All Licensed radio frequency devices within FCC Scopes B1, B2, B3, and B4;
- 3- All Telephone Terminal Equipment within FCC Scope C.

- For the Canada (Industry Canada):

- 1- All Scope 1-Licence-Exempt Radio Frequency Devices;
- 2- All Scope 2-Licensed Personal Mobile Radio Services;
- 3- All Scope 3-Licensed General Mobile & Fixed Radio Services;
- 4- All Scope 4-Licensed Maritime & Aviation Radio Services;
- 5- All Scope 5-Licensed Fixed Microwave Radio Services
- 6- All Broadcasting Technical Standards (BETS) in the Category I Equipment Standards List.

- For Singapore (Info-Communications Development Authority (IDA)):

- 1- All Line Terminal Equipment: All Technical Specifications for Line Terminal Equipment – Table 1 of IDA MRA Recognition Scheme: 2011, Annex 2
- 2- All Radio-Communication Equipment: All Technical Specifications for Radio-Communication Equipment – Table 2 of IDA MRA Recognition Scheme: 2011, Annex 2

- For the Hong Kong Special Administrative Region:

- 1- All Radio Equipment, per KHCA 10XX-series Specifications;
- 2- All GMDSS Marine Radio Equipment, per HKCA 12XX-series Specifications;
- 3- All Fixed Network Equipment, per HKCA 20XX-series Specifications.

- For Japan:

- 1- MIC Telecommunication Business Law (Terminal Equipment):
 - All Scope A1 - Terminal Equipment for the Purpose of Calls;
 - All Scope A2 - Other Terminal Equipment
- 2- Radio Law (Radio Equipment):
 - All Scope B1 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 1 of the Radio Law
 - All Scope B2 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 2 of the Radio Law
 - All Scope B3 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 3 of the Radio Law

C- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3297.01) to certify Products to USA's Environmental Protection Agency (EPA) ENERGY STAR Product Specifications for:

- 1 Electronics and Office Equipment:
 - for Telephony (ver. 3.0)
 - for Audio/Video (ver. 3.0)
 - for Battery Charging Systems (ver. 1.1)
 - for Set-top Boxes & Cable Boxes (ver. 4.1)
 - for Televisions (ver. 6.1)
 - for Computers (ver. 6.0)
 - for Displays (ver. 6.0)
 - for Imaging Equipment (ver. 2.0)
 - for Computer Servers (ver. 2.0)
- 2 Commercial Food Service Equipment
 - for Commercial Dishwashers (ver. 2.0)
 - for Commercial Ice Machines (ver. 2.0)
 - for Commercial Ovens (ver. 2.1)
 - for Commercial Refrigerators and Freezers
- 3 Lighting Products
 - For Decorative Light Strings (ver. 1.5)
 - For Luminaires (including sub-components) and Lamps (ver. 1.2)
 - For Compact Fluorescent Lamps (CFLs) (ver. 4.3)
 - For Integral LED Lamps (ver. 1.4)
- 4 Heating, Ventilation, and AC Products
 - for Residential Ceiling Fans (ver. 3.0)
 - for Residential Ventilating Fans (ver. 3.2)
- 5 Other
 - For Water Coolers (ver. 3.0)

D- A NIST Designated Phase-I and Phase-II Conformity Assessment Body (CAB) for the following economies and regulatory authorities under the terms of the stated MRAs/Treaties:

- Australia: ACMA (Australian Communication and Media Authority) – APEC Tel MRA -Phase I;
- Canada: (Innovation, Science and Economic development Canada - ISED) Foreign Certification Body – FCB – APEC Tel MRA -Phase I & Phase II;
- Chinese Taipei (Republic of China – Taiwan):
 - o BSMI (Bureau of Standards, Metrology and Inspection) APEC Tel MRA -Phase I;
 - o NCC (National Communications Commission) APEC Tel MRA -Phase I;
- European Union:
 - o EMC Directive 2014/30/EU US-EU EMC & Telecom MRA CAB (NB)
 - o Radio Equipment (RE) Directive 2014/53/EU US-EU EMC & Telecom MRA CAB (NB)
 - o Low Voltage Directive (LVD) 2014/35/EU
- Hong Kong Special Administrative Region: (Office of the Telecommunications Authority – OFTA) APEC Tel MRA -Phase I & Phase II
- Israel – US-Israel MRA Phase I
- Republic of Korea (Ministry of Communications - Radio Research Laboratory) APEC Tel MRA -Phase I
- Singapore: (Infocomm Media Development Authority - IMDA) APEC Tel MRA -Phase I & Phase II;
- Japan: VCCI - Voluntary Control Council for Interference US-Japan Telecom Treaty VCCI Side Letter-
- USA:
 - o ENERGY STAR Recognized Test Laboratory – US EPA
 - o Telecommunications Certification Body (TCB) – US FCC;
 - o Nationally Recognized Test Laboratory (NRTL) – US OSHA
- Vietnam: APEC Tel MRA -Phase I;

2 System Test Configuration

2.1 Justification

The EUT was configured for testing according to ANSI C63.26-2015.

2.2 EUT Exercise Software

The test software used was Tera Term. The software is compliant with the standard requirements being tested against.

Please refer to the following power setting table.

Antenna Gain (dBi)	Radio	Frequency (MHz)	MIMO Power Setting Antenna A & B	SISO Power Setting Antenna A & B
15	1	4950	9	13
		4965	10	13
		4980	10	15
	2	4950	10	15
		4965	11	13
		4980	11	13
13	1	4950	11	13
		4965	11	13
		4980	12	15
	2	4950	12	15
		4965	13	17
		4980	13	16
≤ 8	1	4950	13	13
		4965	13	13
		4980	15	15
	2	4950	16	15
		4965	16	17
		4980	17	16

*Data rates tested:
802.11a: 6Mbps

2.3 Equipment Modifications

No modifications were made to the EUT.

2.4 Local Support Equipment List and Details

Manufacturer	Descriptions	Models
Dell	Laptop	Latitude E6410

2.5 Remote Support Equipment List and Details

Manufacturer	Descriptions	Models
LiteON	Power Supply	PA-1600-1C

2.6 Interface Ports and Cabling

Cable Description	Length (m)	From	To
Network Cable	< 1	EUT	Ethernet Switch
Power Cable	1	EUT	DC Power Supply
Ethernet Cable	1	Ethernet Switch	Laptop

3 Summary of Test Results

FCC Rules	Description of Tests	Results
FCC §1.1307(b)(1), §2.1091, §90.223	RF Exposure	Compliant
FCC §2.1046, §90.205(p), §90.1215, RSS-111 § 5.3	RF Output Power	Compliant
FCC §90.1215, RSS-111 § 5.4	Transmitter Peak to Average Ratio	Compliant
FCC §2.1046, §90.205(p), §90.1215, RSS-111 § 5.3	Power Spectral Density	Compliant
FCC §2.1049, §90.209, RSS-111 § 5.3	Occupied Bandwidth	Compliant
FCC §2.1053, §90.210, RSS-111 § 5.3	Spurious Radiated Emissions	Compliant
FCC §2.1051, §90.210, RSS-111 § 5.5	Spurious Emissions at Antenna Terminals	Compliant
FCC §2.1051, §90.210, RSS-111 § 5.5	Emission Mask	Compliant
FCC §2.1055, §90.213 RSS-111 § 5.2	Frequency Tolerance	Compliant

BACL is responsible for all the information provided in this report, except when information is provided by the customer as identified in this report. Information provided by the customer, e.g., antenna gain, can affect the validity of results.

4 FCC §1.1307(b) (1), §2.1091 & §90.223 & ISEDC RSS-102 - RF Exposure

4.1 Applicable Standards

FCC §2.1091, (a) Requirements of this section are a consequence of Commission responsibilities under the National Environmental Policy Act to evaluate the environmental significance of its actions. See subpart I of part 1 of this chapter, in particular §1.1307(b).

According to §1.1310 and §2.1091 RF exposure is calculated.

Limits for Occupational/Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minute)
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*(100)	≤6
3.0-30	1842/f	4.89/f	*(900/f ²)	<6
30-300	61.4	0.163	1.0	<6
300-1,500			f/300	<6
1,500-100,000			5	<6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-3.0	614	1.63	*(100)	<30
3.0-30	824/f	2.19/f	*(900/f ²)	<30
30-300	27.5	0.073	1.0	<30
300-1,500			f/1500	<30
1,500-100,000			1.0	<30

Note: f = frequency in MHz

* = Plane-wave equivalent power density

According to ISSED RSS-102:

Table 4: RF Field Strength Limits for Devices Used by the General Public (Uncontrolled Environment)				
Frequency Range (MHz)	Electric Field (V/m rms)	Magnetic Field (A/m rms)	Power Density (W/m ²)	Reference Period (minutes)
0.003-10 ²¹	83	90	-	Instantaneous*
0.1-10	-	0.73/ f	-	6**
1.1-10	87/ f ^{0.5}	-	-	6**
10-20	27.46	0.0728	2	6
20-48	58.07/ f ^{0.25}	0.1540/ f ^{0.25}	8.944/ f ^{0.5}	6
48-300	22.06	0.05852	1.291	6
300-6000	3.142 f ^{0.3417}	0.008335 f ^{0.3417}	0.02619 f ^{0.6834}	6
6000-15000	61.4	0.163	10	6
15000-150000	61.4	0.163	10	616000/ f ^{1.2}
150000-300000	0.158 f ^{0.5}	4.21 x 10 ⁻⁴ f ^{0.5}	6.67 x 10 ⁻⁵ f	616000/f ^{1.2}

Note: f is frequency in MHz.
 * Based on nerve stimulation (NS).
 ** Based on specific absorption rate (SAR).

4.2 MPE Prediction

Predication of MPE limit at a given distance, Equation from OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

4.3 RF exposure evaluation exemption for FCC and IC

Radio 1: 15dBi antenna gain

<u>Maximum tune up power at antenna input terminal (dBm):</u>	<u>15.5</u>
<u>Maximum tune up power at antenna input terminal (mW):</u>	<u>35.48</u>
<u>Prediction frequency (MHz):</u>	<u>4950</u>
<u>Antenna Gain, maximum (dBi):</u>	<u>15</u>
<u>Maximum Antenna Gain (numeric):</u>	<u>31.6</u>
<u>Prediction distance (cm):</u>	<u>40</u>
<u>Power density of prediction frequency at 40 cm (mW/cm²):</u>	<u>0.056</u>
<u>FCC MPE limit for uncontrolled exposure at prediction frequency (mW/cm²):</u>	<u>1.0</u>

Radio 2: 15dBi antenna gain

<u>Maximum tune up power at antenna input terminal (dBm):</u>	<u>15.5</u>
<u>Maximum tune up power at antenna input terminal (mW):</u>	<u>35.48</u>
<u>Prediction frequency (MHz):</u>	<u>4950</u>
<u>Antenna Gain, maximum (dBi):</u>	<u>15</u>
<u>Maximum Antenna Gain (numeric):</u>	<u>31.6</u>
<u>Prediction distance (cm):</u>	<u>40</u>
<u>Power density of prediction frequency at 40 cm (mW/cm²):</u>	<u>0.056</u>
<u>FCC MPE limit for uncontrolled exposure at prediction frequency (mW/cm²):</u>	<u>1.0</u>

Radio 1: 15dBi antenna gain

Maximum tune up power at antenna input terminal (dBm): 15.5
Maximum tune up power at antenna input terminal (W): 0.03548
Prediction (minimum separation) distance (m): 0.4
Prediction frequency (MHz): 4950
Maximum Antenna Gain, typical (dBi): 15
Maximum Antenna Gain (numeric): 31.6
Power density of prediction frequency at 0.4m (W/m²): 0.558
Limit for uncontrolled exposure at prediction frequency (W/m²): 8.77

Radio 2: 15dBi antenna gain

Maximum tune up power at antenna input terminal (dBm): 15.5
Maximum tune up power at antenna input terminal (W): 0.03548
Prediction (minimum separation) distance (m): 0.4
Prediction frequency (MHz): 4950
Maximum Antenna Gain, typical (dBi): 15
Maximum Antenna Gain (numeric): 31.6
Power density of prediction frequency at 0.4m (W/m²): 0.558
Limit for uncontrolled exposure at prediction frequency (W/m²): 8.77

Radio 1: 3dBi antenna gain

Maximum tune up power at antenna input terminal (dBm): 15.5
Maximum tune up power at antenna input terminal (mW): 35.48
Prediction frequency (MHz): 4950
Antenna Gain, maximum (dBi): 3
Maximum Antenna Gain (numeric): 2
Prediction distance (cm): 40
Power density of prediction frequency at 40 cm (mW/cm²): 0.04
FCC MPE limit for uncontrolled exposure at prediction frequency (mW/cm²): 1.0

Radio 2: 3dBi antenna gain

Maximum tune up power at antenna input terminal (dBm): 20.5
Maximum tune up power at antenna input terminal (mW): 112.2
Prediction frequency (MHz): 4950
Antenna Gain, maximum (dBi): 3
Maximum Antenna Gain (numeric): 2
Prediction distance (cm): 40
Power density of prediction frequency at 40 cm (mW/cm²): 0.011
FCC MPE limit for uncontrolled exposure at prediction frequency (mW/cm²): 1.0

Radio 1: 3dBi antenna gain

<u>Maximum tune up power at antenna input terminal (dBm):</u>	<u>15.5</u>
<u>Maximum tune up power at antenna input terminal (W):</u>	<u>0.03548</u>
<u>Prediction (minimum separation) distance (m):</u>	<u>0.4</u>
<u>Prediction frequency (MHz):</u>	<u>4950</u>
<u>Maximum Antenna Gain, typical (dBi):</u>	<u>3</u>
<u>Maximum Antenna Gain (numeric):</u>	<u>2</u>
<u>Power density of prediction frequency at 0.4m (W/m²):</u>	<u>0.035</u>
<u>Limit for uncontrolled exposure at prediction frequency (W/m²):</u>	<u>8.77</u>

Radio 2: 3dBi antenna gain

<u>Maximum tune up power at antenna input terminal (dBm):</u>	<u>20.5</u>
<u>Maximum tune up power at antenna input terminal (W):</u>	<u>0.1122</u>
<u>Prediction (minimum separation) distance (m):</u>	<u>0.4</u>
<u>Prediction frequency (MHz):</u>	<u>4950</u>
<u>Maximum Antenna Gain, typical (dBi):</u>	<u>3</u>
<u>Maximum Antenna Gain (numeric):</u>	<u>2</u>
<u>Power density of prediction frequency at 0.4m (W/m²):</u>	<u>0.1116</u>
<u>Limit for uncontrolled exposure at prediction frequency (W/m²):</u>	<u>8.77</u>

4.4 RF exposure Simultaneous Transmission evaluation for FCC

Total Power Densities (Percentages) = 5GHz Radio 1 Power Density % + 5GHz Radio 2 Power Density % + BLE Power Density % + 4.9GHz Radio 1

Total Relative Power Densities (Percentages) = $(0.140/1.0) * 100 + (0.176/1.0) * 100 + (0.001/1) * 100 + (0.056/1.0) * 100 = 14 \% + 17.6 \% + 1\% + 5.6 \% = 38.2\%$

5 FCC §2.1046, §90.205(p) & RSS-111 § 5.3 - RF Output Power

5.1 Applicable Standards

FCC §2.1046

FCC §90.205 (p) Limitations on power are specified in § 90.1215.

Channel bandwidth (MHz)	Low power maximum conducted output power (dBm)	High power maximum conducted output power (dBm)
1	7	20
5	14	27
10	17	30
15	18.8	31.8
20	20	33


RSS-111 §5.3

Table 1 — Channel Bandwidth and Power Limits		
Channel Bandwidth (MHz)	Transmitter Power, P (dBm)	
	Low-power Device	High-power Device
1	$P \leq 7$	$7 < P \leq 20$
5	$P \leq 14$	$14 < P \leq 27$
10	$P \leq 17$	$17 < P \leq 30$
15	$P \leq 18.8$	$18.8 < P \leq 31.8$
20	$P \leq 20$	$20 < P \leq 33$

5.2 Test Procedure

ANSI C63.26-2015 section 5.2.4.

5.3 Test Setup Block Diagram

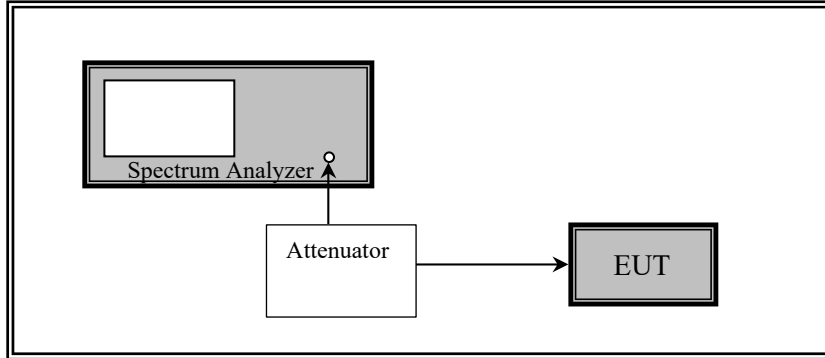

5.4 Test Equipment List and Details

BACL No.	Manufacturers	Descriptions	Models	Serial Numbers	Calibration Dates	Calibration Interval
655	Rhode & Schwarz	Signal Analyzer	FSQ26	200749	2022-02-07	2 years
1224	Radiall	USB COAXIAL SWITCHES	SPNT R574X11X0 1 USB	-	Each time ¹	N/A
-	-	RF Cable	-	-	Each time ¹	N/A
-	-	10dB Attenuator	-	-	Each time ¹	N/A

Note¹: Equipment was calibrated for each test.

Statement of Traceability: **BACL Corp.** attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 “A2LA Policy on Metrological Traceability”.

5.5 Test Environmental Conditions

Temperature:	18.8° C
Relative Humidity:	34 %
ATM Pressure:	101.8 kPa

The testing was performed by Deepak Mishra on 2022-12-13 in the RF Site.

5.6 Test Results

Radio	Freq. (MHz)	Ant a (dBm)	Ant b (dBm)	Conducted Output Power (dBm)	Limit (dBm)	Margin (dB)	Power Setting
15dBi Antenna							
1	4950	9.06	8.89	11.99	≤ 27	-15.01	9
1	4965	9.44	10.26	12.88	≤ 27	-14.12	10
1	4980	9.01	9.68	12.37	≤ 27	-14.63	10
2	4950	8.47	8.38	11.44	≤ 27	-15.56	10
2	4965	9.12	8.93	12.04	≤ 27	-14.96	11
2	4980	8.63	8.57	11.61	≤ 27	-15.39	11
13dBi Antenna							
1	4950	10.84	10.46	13.66	≤ 29	-15.34	11
1	4965	10.46	11.11	13.81	≤ 29	-15.19	11
1	4980	11.17	11.92	14.57	≤ 29	-14.43	12
2	4950	10.50	10.35	13.44	≤ 29	-15.56	12
2	4965	10.67	10.75	13.72	≤ 29	-15.28	13
2	4980	10.29	10.41	13.36	≤ 29	-15.64	13
≤8dBi Antenna							
1	4950	12.73	13.28	16.02	≤ 33	-16.98	13
1	4965	13.22	12.62	15.94	≤ 33	-17.06	13
1	4980	14.74	14.48	17.62	≤ 33	-15.38	15
2	4950	15.22	15.44	18.34	≤ 33	-14.66	16
2	4965	14.83	15.05	17.95	≤ 33	-15.05	16
2	4980	15.39	15.84	18.63	≤ 33	-14.37	17

Note: The total maximum conducted output power is calculated by converting antenna logarithmic values to linear values, summing them, then converting the sum into logarithmic value like so: $10 \cdot \text{LOG}(10^{(\text{ant a}/10)} + 10^{(\text{ant b}/10)})$.

Note: If transmitting antennas of directional gain greater than 9 dBi are used, both the maximum conducted output power and the peak power spectral density limits should be reduced by the amount in decibels that the directional gain of the antenna exceeds 9 dBi.

Note: Device is a high-power device

Please refer to Annex E for the plots.

6 FCC §2.1046, §90.205(p), §90.1215, RSS-111 § 5.3 - Power Spectral Density

6.1 Applicable Standards

FCC §90.1215

High power devices are also limited to a peak power spectral density of 21 dBm per one MHz. High power devices using channel bandwidths other than those listed above are permitted; however, they are limited to peak power spectral density of 21 dBm/MHz. If transmitting antennas of directional gain greater than 9 dBi are used, both the maximum conducted output power and the peak power spectral density should be reduced by the amount in decibels that the directional gain of the antenna exceeds 9 dBi. However, high power point-to-point and point-to-multipoint operations (both fixed and temporary-fixed rapid deployment) may employ transmitting antennas with directional gain up to 26 dBi without any corresponding reduction in the maximum conducted output power or spectral density. Corresponding reduction in the maximum conducted output power and peak power spectral density should be the amount in decibels that the directional gain of the antenna exceeds 26 dBi.

RSS-111 § 5.3

High- and low-power devices are also limited to a maximum power spectral density of 21 dBm/MHz and 8 dBm/MHz respectively. Devices using channel bandwidths other than those listed in Table 1 are permitted; however, the channel bandwidth shall not exceed 20 MHz and the devices shall comply with the maximum power spectral density limits of 21 dBm/MHz for high-power transmitters and 8 dBm/MHz for low-power transmitters. See SP 4940 MHz for antenna gain limits and operational restrictions for the device.


For low-power devices, if a directional antenna is used and its gain exceeds 9 dBi, the transmit power shall be reduced by the same amount that the antenna gain is exceeded.

For high-power fixed point-to-point and point-to-multipoint operations, if the directional antenna gain exceeds 26 dBi, the transmit power shall be reduced by same amount that the antenna gain is exceeded.

6.2 Test Procedure

ANSI C63.26-2015 section 5.2.3.5.

6.3 Test Setup Block Diagram

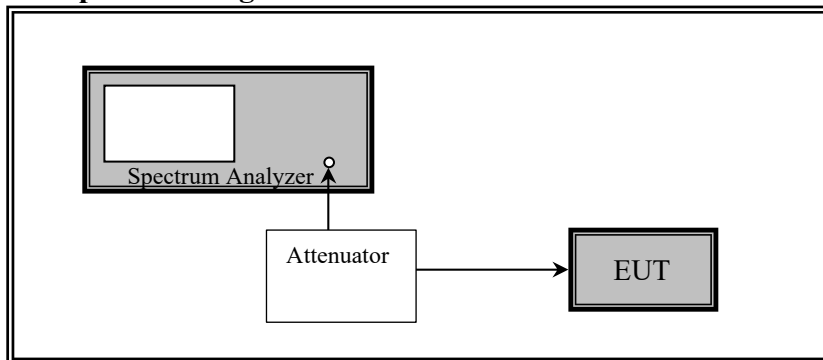

6.4 Test Equipment List and Details

BACL No.	Manufacturers	Descriptions	Models	Serial Numbers	Calibration Dates	Calibration Interval
912	Rhode & Schwarz	Signal Analyzer	FSV40	1321.3008k39-101203-UW	2022-05-05	1 year
1224	Radiall	USB COAXIAL SWITCHES	SPNT R574X11X0 1 USB	-	Each time ¹	N/A
-	-	RF Cable	-	-	Each time ¹	N/A
-	-	10dB Attenuator	-	-	Each time ¹	N/A

Note¹: Equipment was calibrated for each test.

Statement of Traceability: **BACL Corp.** attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 “A2LA Policy on Metrological Traceability”.

6.5 Test Environmental Conditions

Temperature:	18.8° C
Relative Humidity:	34 %
ATM Pressure:	101.8 kPa

The testing was performed by Deepak Mishra on 2022-12-21 in the RF Site.

6.6 Test Results

Radio	Freq. (MHz)	Ant A (dBm/MHz)	Ant B (dBm/MHz)	PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)	Power Setting
15dBi Antenna							
1	4950	6.78	8.68	10.84	≤ 12	-1.16	9
1	4965	8.29	9.16	11.76	≤ 12	-0.24	10
1	4980	8.07	9.08	11.61	≤ 12	-0.39	10
2	4950	6.25	7.76	10.08	≤ 12	-1.92	10
2	4965	6.97	8.4	10.75	≤ 12	-1.25	11
2	4980	6.45	8.13	10.38	≤ 12	-1.62	11
13dBi Antenna							
1	4950	8.77	10.69	12.85	≤ 14	-1.15	11
1	4965	9.3	9.66	12.49	≤ 14	-1.51	11
1	4980	10.42	11.44	13.97	≤ 14	-0.03	12
2	4950	8.54	9.55	12.08	≤ 14	-1.92	12
2	4965	8.88	9.87	12.41	≤ 14	-1.59	13
2	4980	8.27	9.79	12.11	≤ 14	-1.89	13
≤ 8 dBi Antenna							
1	4950	11.03	12.15	14.64	≤ 21	-6.36	13
1	4965	11.58	11.96	14.78	≤ 21	-6.22	13
1	4980	13.11	14.37	16.80	≤ 21	-4.2	15
2	4950	11.97	13.62	15.88	≤ 21	-5.12	16
2	4965	11.89	13.35	15.69	≤ 21	-5.31	16
2	4980	12.75	14.01	16.44	≤ 21	-4.56	17

Note: The total PSD is calculated by converting antenna logarithmic values to linear values, summing them, then converting the sum into logarithmic value like so: $10 \cdot \text{LOG}(10^{(\text{ant a}/10)} + 10^{(\text{ant b}/10)})$.

Note: If transmitting antennas of directional gain greater than 9 dBi are used, both the maximum conducted output power and the peak power spectral density limits should be reduced by the amount in decibels that the directional gain of the antenna exceeds 9 dBi.

Please refer to Annex F for the plots.

7 FCC §90.1215 & RSS-111 § 5.4 – Transmitter Peak to Average Ratio

7.1 Applicable Standards


FCC §90.1215: The transmitting power of stations operating in the 4940–4990 MHz band must not exceed the maximum limits in this section. (e) The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

RSS-111, Clause 5.4: The PAPR of the equipment shall not exceed 13 dB for more than 0.1% of the time, using a signal that corresponds to the highest PAPR during periods of continuous transmission.

7.2 Test Procedure

ANSI C63.26-2015 section 5.2.6.

7.3 Test Setup Block Diagram

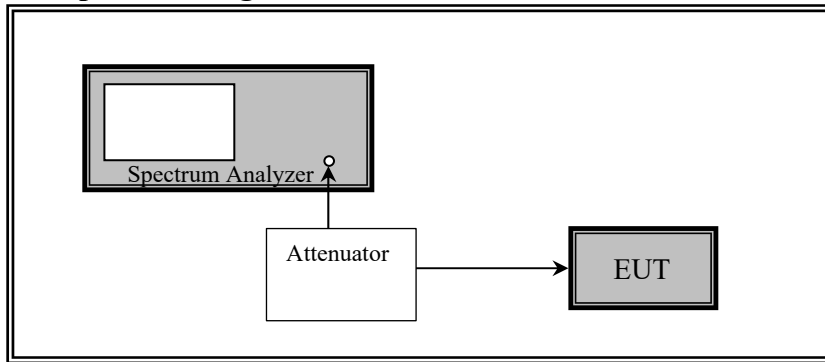

7.4 Test Equipment List and Details

BACL No.	Manufacturers	Descriptions	Models	Serial Numbers	Calibration Dates	Calibration Interval
912	Rhode & Schwarz	Signal Analyzer	FSV40	1321.3008k39-101203-UW	2023-06-02	1 year
1224	Radiall	USB COAXIAL SWITCHES	SPNT R574X11X0 1 USB	-	Each time ¹	N/A
-	-	RF Cable	-	-	Each time ¹	N/A
-	-	10dB Attenuator	-	-	Each time ¹	N/A

Note¹: Equipment was calibrated for each test.

Statement of Traceability: **BACL Corp.** attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 “A2LA Policy on Metrological Traceability”.

7.5 Test Environmental Conditions

Temperature:	18.8° C
Relative Humidity:	34 %
ATM Pressure:	101.8 kPa


The testing was performed by Deepak Mishra on 2023-10-03 in the RF Site.

7.6 Test Results


Radio	Frequency (MHz)	Peak PSD (dBm/MHz)	Average PSD (dBm/MHz)	Ratio (dB)	Limit (dB)	Power Setting
15dBi Antenna						
1	4950	10.84	0.18	10.66	≤ 13	9
1	4965	11.76	1.57	10.19	≤ 13	10
1	4980	11.61	1.47	10.14	≤ 13	10
2	4950	10.08	1.11	8.97	≤ 13	10
2	4965	10.75	1.75	9.00	≤ 13	11
2	4980	10.38	1.94	8.44	≤ 13	11
13dBi Antenna						
1	4950	12.85	3.19	9.66	≤ 13	11
1	4965	12.49	3.05	9.44	≤ 13	11
1	4980	13.97	4.17	9.80	≤ 13	12
2	4950	12.08	3.21	8.87	≤ 13	12
2	4965	12.41	2.36	10.05	≤ 13	13
2	4980	12.11	3.96	8.15	≤ 13	13
≤ 8 dBi Antenna						
1	4950	14.64	4.92	9.72	≤ 13	13
1	4965	14.78	4.96	9.82	≤ 13	13
1	4980	16.8	6.84	9.96	≤ 13	15
2	4950	15.88	7.71	8.17	≤ 13	16
2	4965	15.69	7.72	7.97	≤ 13	16
2	4980	16.44	7.96	8.48	≤ 13	17

See below for average PSD data/screenshots for reference in calculating the PAPR above.


Radio	Freq. (MHz)	Ant A (dBm/MHz)	Ant B (dBm/MHz)	Average PSD (dBm/MHz)	Power Setting
15dBi Antenna					
1	4950	-4.24	-1.76	0.18	9
1	4965	-2.1	-0.86	1.57	10
1	4980	-1.96	-1.16	1.47	10
2	4950	-1.58	-2.25	1.11	10
2	4965	-0.65	-1.97	1.75	11
2	4980	-0.46	-1.77	1.94	11
13dBi Antenna					
1	4950	-0.58	0.83	3.19	11
1	4965	-1.3	1.06	3.05	11
1	4980	0.39	1.81	4.17	12
2	4950	0.75	-0.42	3.21	12
2	4965	-2.5	0.64	2.36	13
2	4980	1.65	0.12	3.96	13
≤8dBi Antenna					
1	4950	1.3	2.45	4.92	13
1	4965	1.39	2.44	4.96	13
1	4980	3.02	4.52	6.84	15
2	4950	4.99	4.39	7.71	16
2	4965	4.99	4.41	7.72	16
2	4980	5.3	4.56	7.96	17

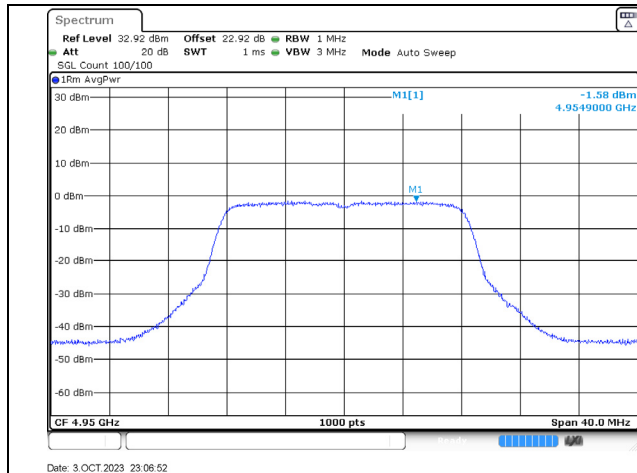


4950MHz-tx1-cobalt_10

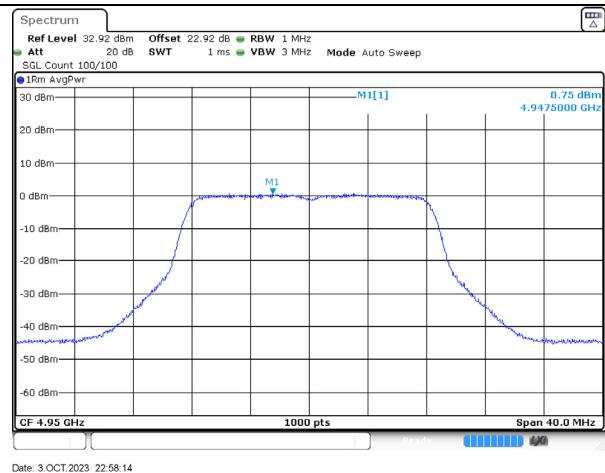


4950MHz-tx1-cobalt_12

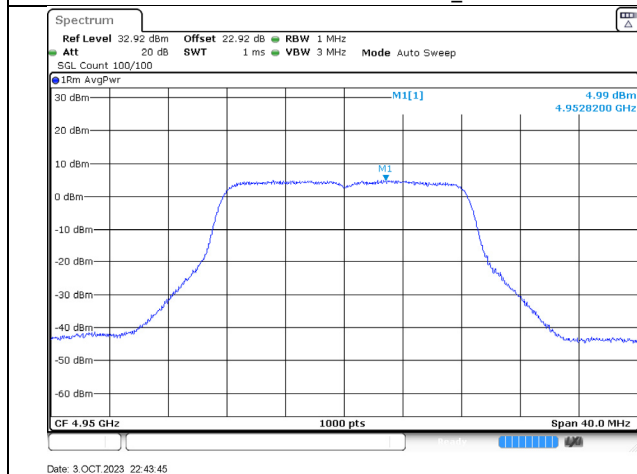


4950MHz-tx1-cobalt_16

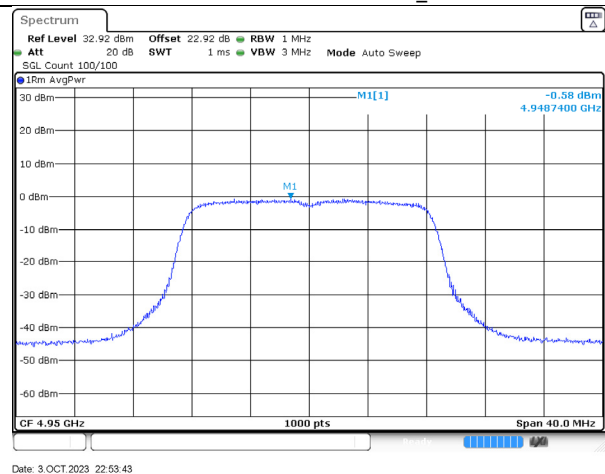


4950MHz-tx1-pine_11

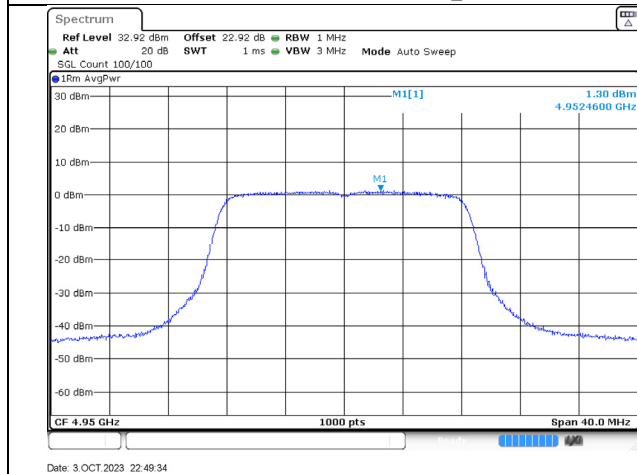


4950MHz-tx1-pine_13

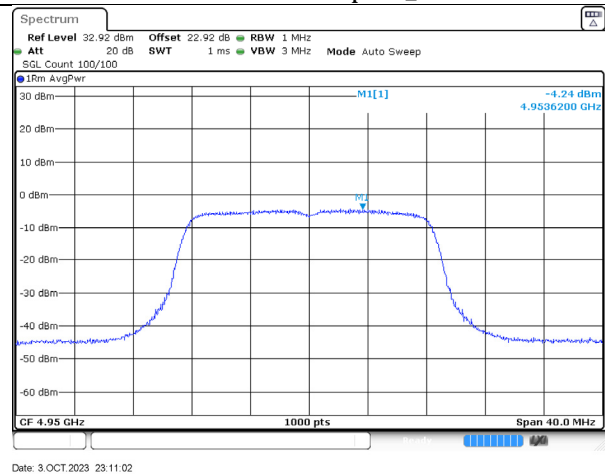


4950MHz-tx1-pine_9

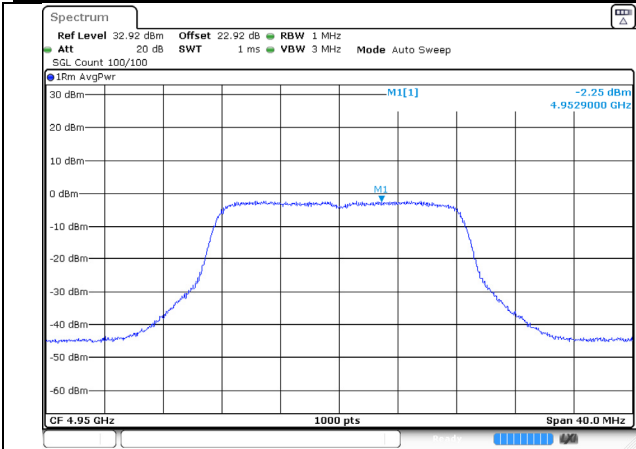


4950MHz-tx2-cobalt_10

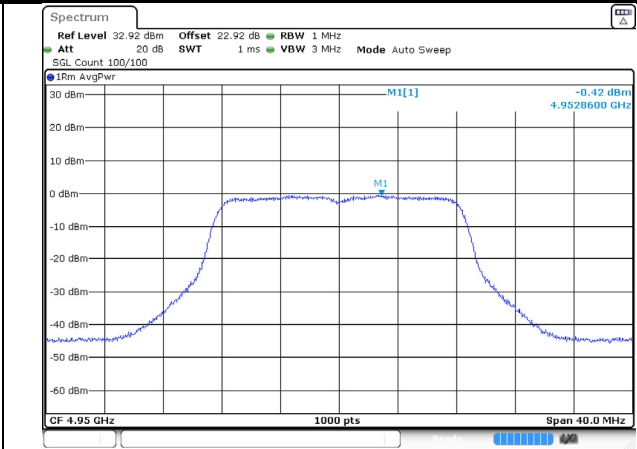


4950MHz-tx2-cobalt_12

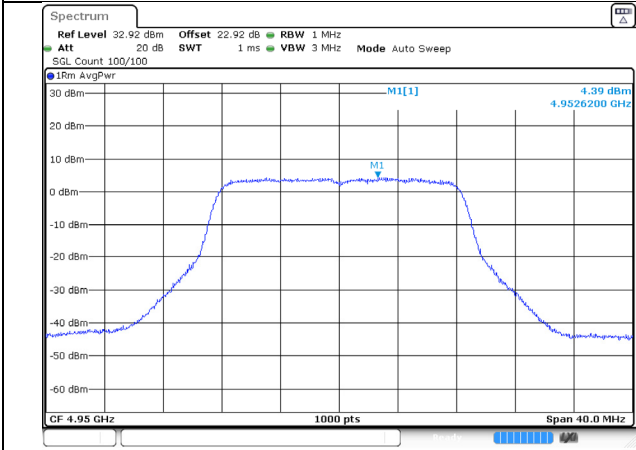


4950MHz-tx2-cobalt_16

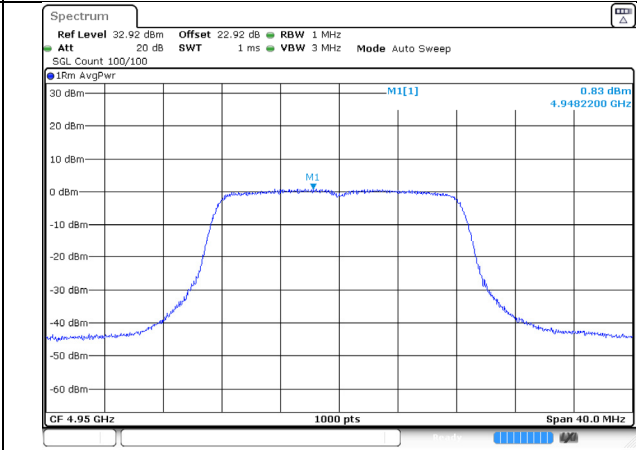


4950MHz-tx2-pine_11

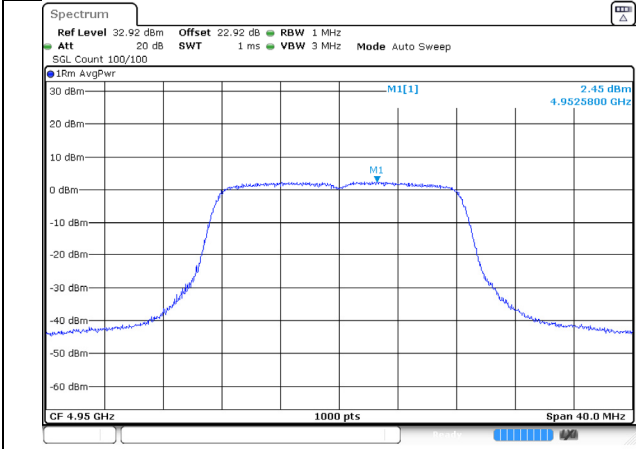

4950MHz-tx2-pine_13

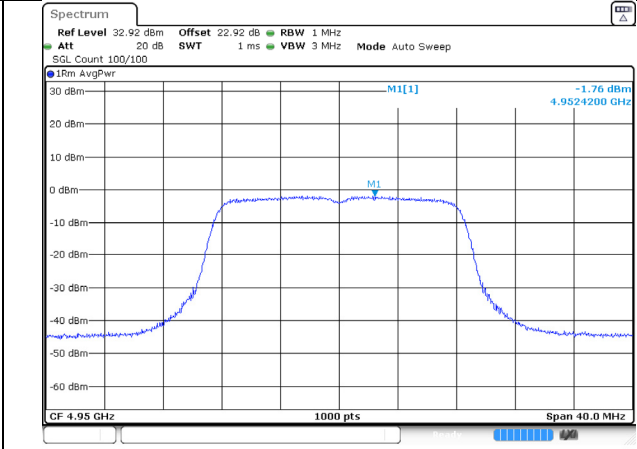


4950MHz-tx2-pine_9

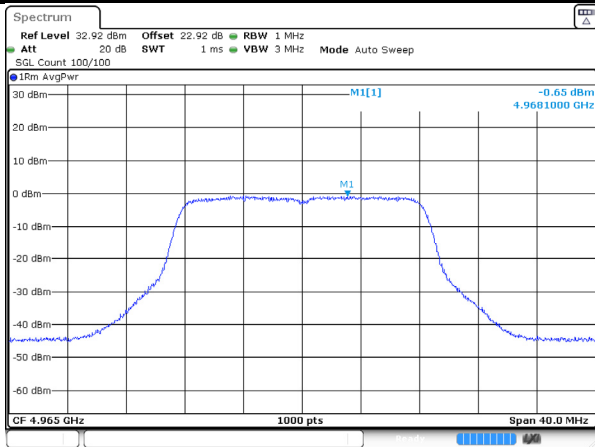


Date: 3 OCT 2023 23:07:17

4965MHz-tx1-cobalt_11

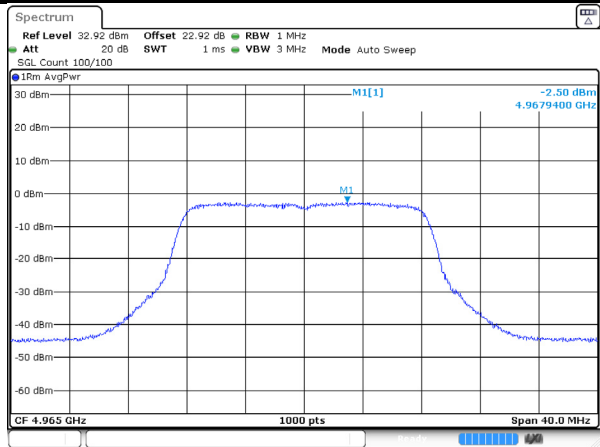


Date: 3 OCT 2023 23:04:19

4965MHz-tx1-cobalt_13

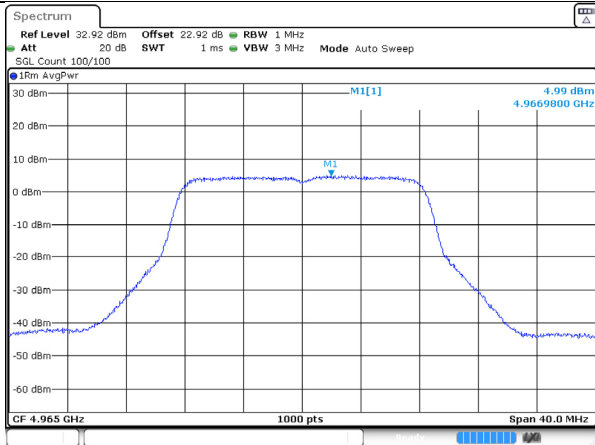


Date: 3 OCT 2023 22:43:00

4965MHz-tx1-cobalt_16

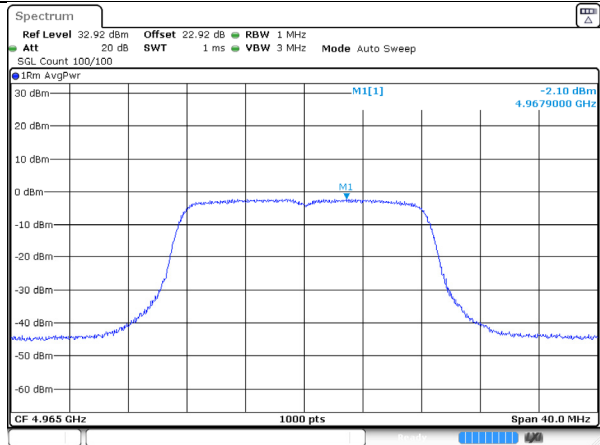


Date: 3 OCT 2023 23:11:43

4965MHz-tx1-pine_10

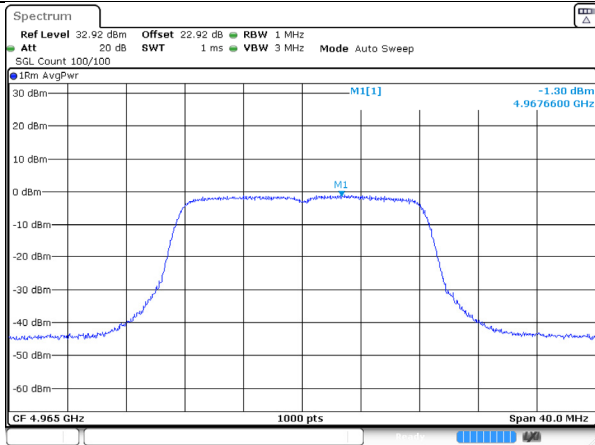


Date: 3 OCT 2023 22:54:13

4965MHz-tx1-pine_11

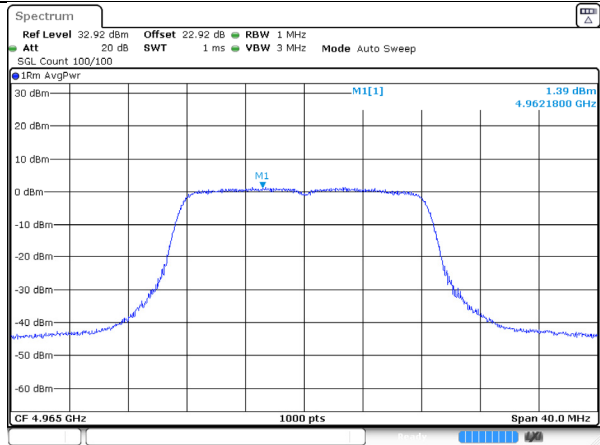


Date: 3 OCT 2023 22:50:01


4965MHz-tx1-pine_13

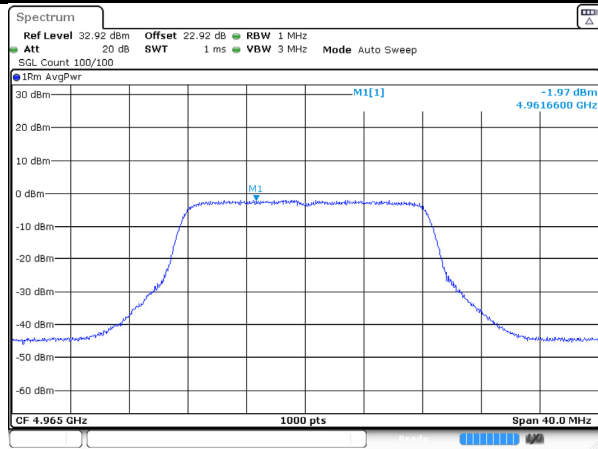


4965MHz-tx2-cobalt_11

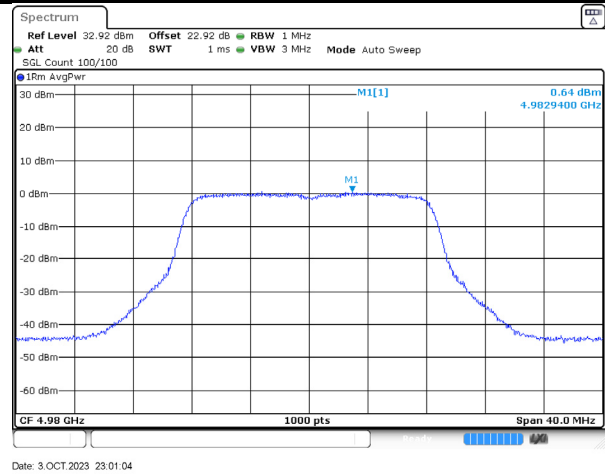


4965MHz-tx2-cobalt_13

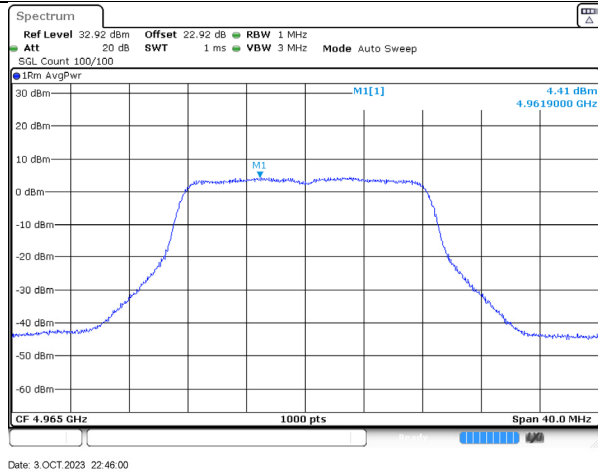


4965MHz-tx2-cobalt_16

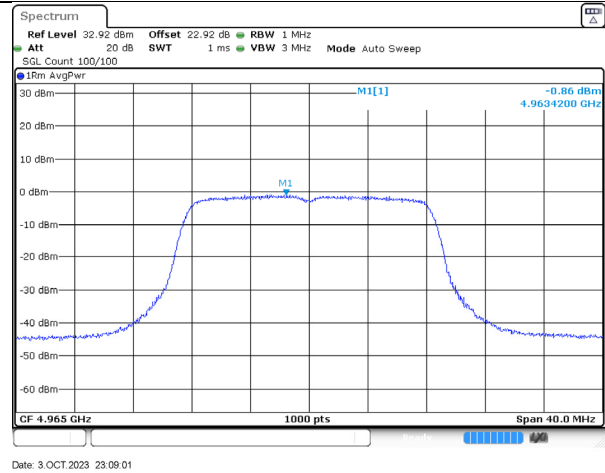


4965MHz-tx2-pine_10

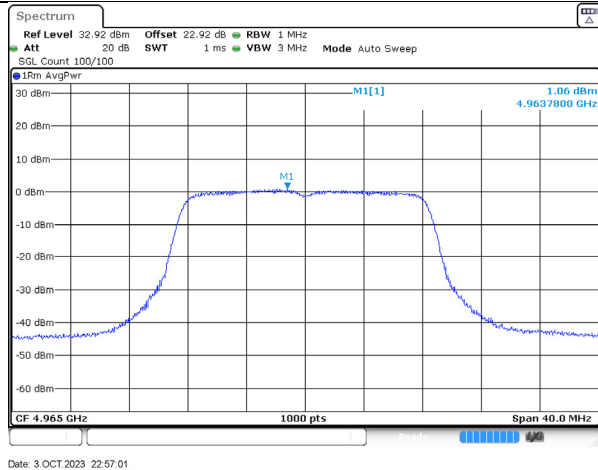


4965MHz-tx2-pine_11

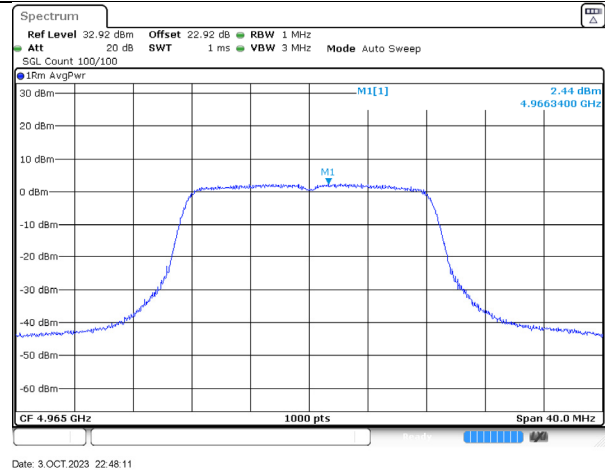


4965MHz-tx2-pine_13

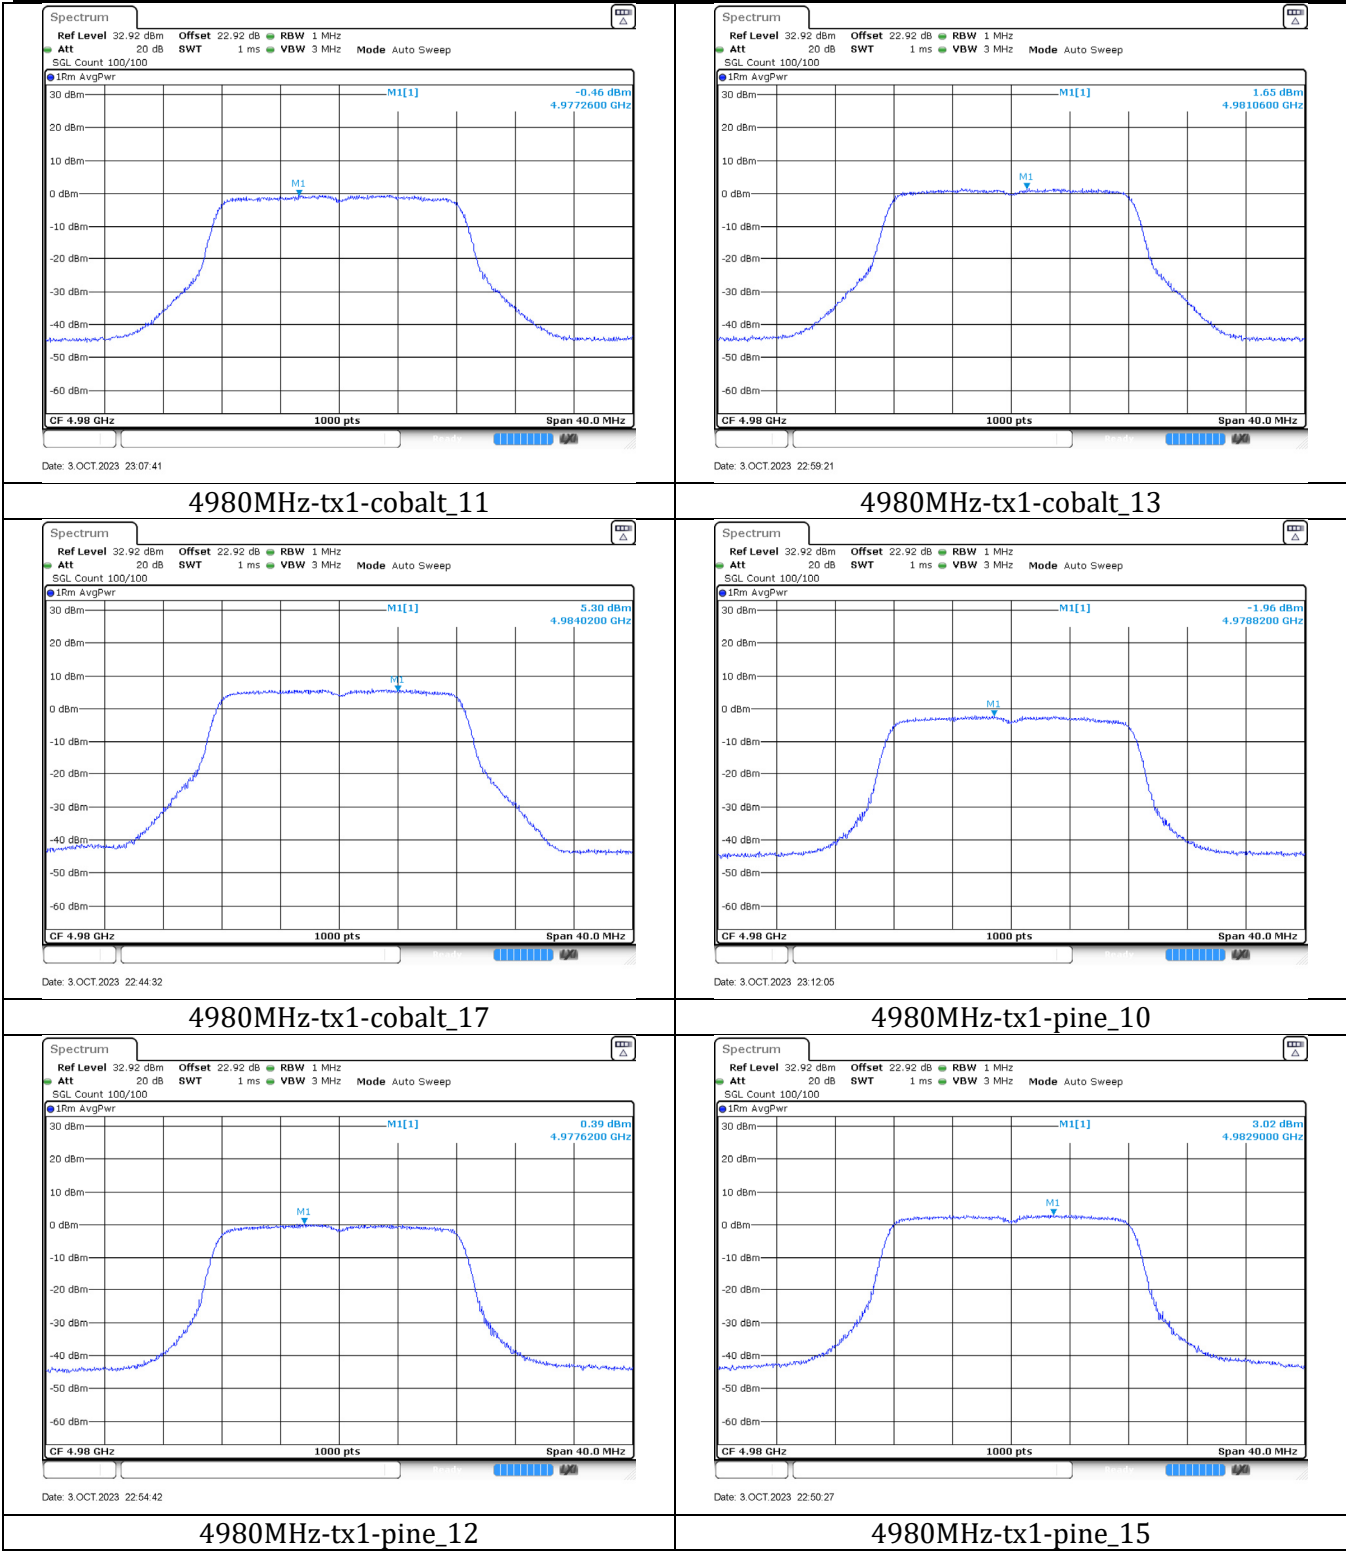

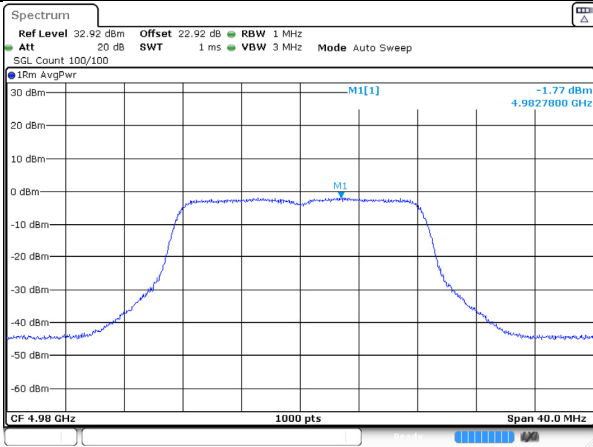


Date: 3 OCT 2023 23:06:00

4980MHz-tx2-cobalt_11

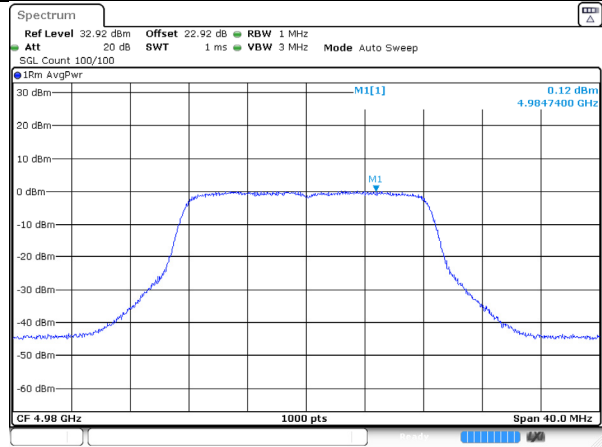


Date: 3 OCT 2023 23:01:38

4980MHz-tx2-cobalt_13

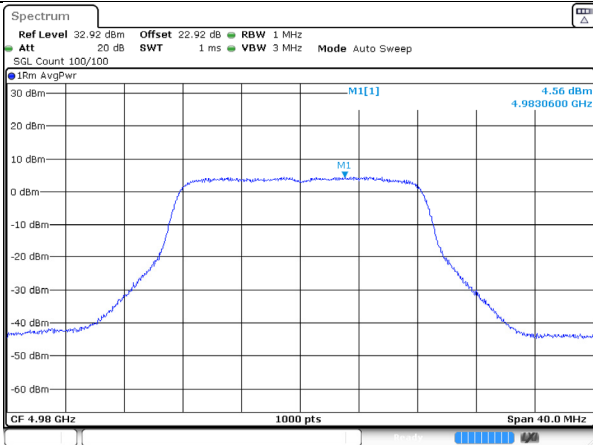


Date: 3 OCT 2023 22:46:26

4980MHz-tx2-cobalt_17

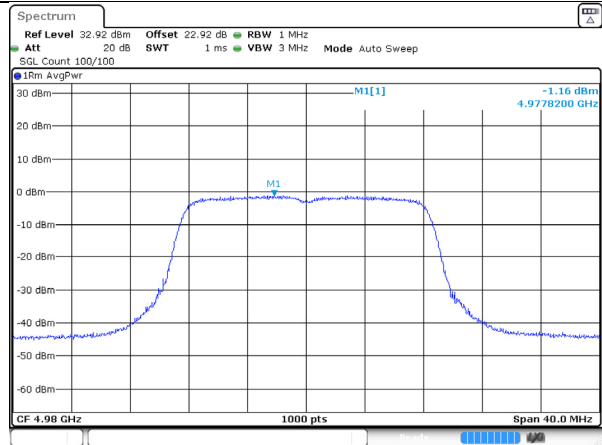


Date: 3 OCT 2023 23:09:45

4980MHz-tx2-pine_10

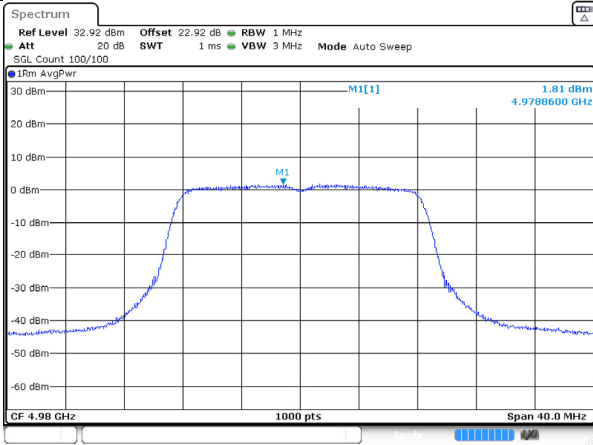

Date: 3 OCT 2023 22:57:27

4980MHz-tx2-pine_12

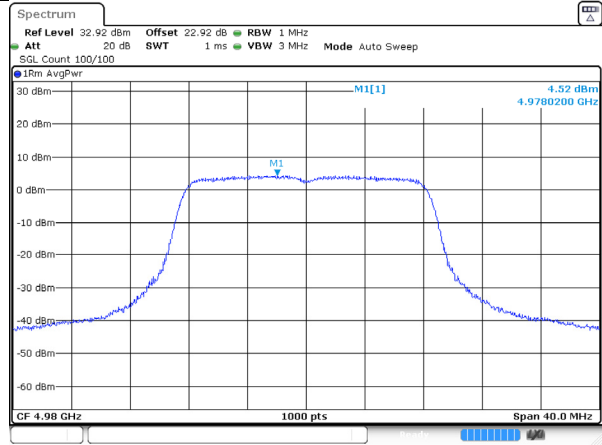

Date: 3 OCT 2023 22:48:43

4980MHz-tx2-pine_15

8 FCC §2.1049, §90.209, RSS-111 § 5.3 - Occupied Bandwidth

8.1 Applicable Standards

FCC §90.209, RSS-111 § 5.3

The equipment's occupied bandwidth shall not exceed its channel bandwidth.

8.2 Test Procedure

Span = approximately 2 to 5 times the occupied bandwidth, centered on the transmitting channel

RBW = 1% to 5 % of the occupied bandwidth


VBW = 3 * RBW

Sweep = auto

Detector function = peak

Trace = max hold

8.3 Test Setup Block Diagram

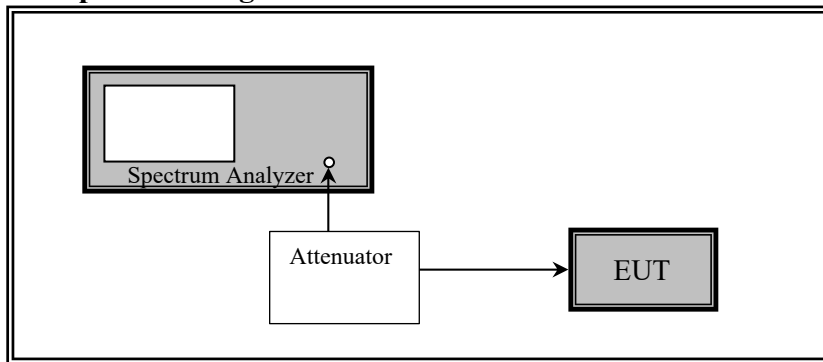

8.4 Test Equipment List and Details

BACL No.	Manufacturers	Descriptions	Models	Serial Numbers	Calibration Dates	Calibration Interval
655	Rhode & Schwarz	Signal Analyzer	FSQ26	200749	2022-02-07	2 years
1224	Radiall	USB COAXIAL SWITCHES	SPNT R574X11X0 1 USB	-	Each time ¹	N/A
-	-	RF Cable	-	-	Each time ¹	N/A
-	-	10dB Attenuator	-	-	Each time ¹	N/A

Note¹: Equipment was calibrated for each test.

Statement of Traceability: **BACL Corp.** attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 "A2LA Policy on Metrological Traceability".

8.5 Test Environmental Conditions

Temperature:	18.8° C
Relative Humidity:	34 %
ATM Pressure:	101.8 kPa

The testing was performed by Deepak Mishra on 2022-13-12 in the RF Site.

8.6 Test Results

Radio	Frequency (GHz)	99% OBW (MHz) Antenna A	99% OBW (MHz) Antenna B	Limit (MHz)
1	4950	16.41	16.41	≤ 20
1	4965	16.41	16.41	≤ 20
1	4980	16.41	16.41	≤ 20
2	4950	16.60	16.53	≤ 20
2	4965	16.54	16.60	≤ 20
2	4980	16.53	16.60	≤ 20

Please refer to Annex G for the plots.

9 FCC §2.1053 & §90.210, ISEDC RSS-111 §5.5 - Spurious Radiated Emissions

9.1 Applicable Standards

According to FCC §90.210

TABLE 1 TO §90.210—APPLICABLE EMISSION MASKS

Frequency band (MHz)	Mask for equipment with audio low pass filter	Mask for equipment without audio low pass filter
Below 25 ¹	A or B	A or C
25-50	B	C
72-76	B	C
150-174 ²	B, D, or E	C, D or E
150 paging only	B	C
220-222	F	F
421-512 ^{2 5}	B, D, or E	C, D, or E
450 paging only	B	G
806-809/851-854 ⁶	B	H
809-824/854-869 ³⁵	B, D	D, G.
896-901/935-940	I	J
902-928	K	K
929-930	B	G
4940-4990 MHz	L or M	L or M
5850-5925 ⁴		
All other bands	B	C

According to ISEDC RSS-111 §5.5

5.5 Transmitter Unwanted Emissions

Transmitter unwanted emissions shall be measured according to the method described in [Section 4.3](#).

On any frequency f , offset from the channel centre frequency f_c by a separation f_d (expressed as a percentage of the channel bandwidth), the power spectral density of the unwanted emissions for low- and high-power transmitters shall comply with the limits specified below in [Table 2](#). [Figure 1](#) shows the emission mask for low- and high-power transmitters. For equipment with multiple transmitters, the unwanted emissions of each transmitter shall comply with the emission limits based on the output power of the transmitter regardless of the total output power of the equipment (i.e. total output power from all the transmitters).

Table 2 — Emission Mask for Low- and High-power Transmitters

Offset Frequency f_d (% of the Equipment's Channel Bandwidth)	Minimum Attenuation (dB)	
	Low-power Transmitter	High-power Transmitter
$0 < f_d \leq 45$	0	0
$45 < f_d \leq 50$	$219 \log(f_d/45)$	$568 \log(f_d/45)$
$50 < f_d \leq 55$	$10 + 242 \log(f_d/50)$	$26 + 145 \log(f_d/50)$
$55 < f_d \leq 100$	$20 + 31 \log(f_d/55)$	$32 + 31 \log(f_d/55)$
$100 < f_d \leq 150$	$28 + 68 \log(f_d/100)$	$40 + 57 \log(f_d/100)$
$f_d > 150$	40	whichever is less stringent 50 or $55 + 10 \log p$

Where: f_d (%) = $((f - f_c)/\text{channel bandwidth}) \times 100$
 p : transmitter's output power (in watts), measured as per [Section 4.1](#)

9.2 Test Procedure

ANSI C63.26-2015 Section 5.5.3 and 5.5.4

The transmitter was placed onto a Styrofoam block. The unit was normally transmitting with a 50 ohm terminator connected to the antenna terminal.


The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT.

Emissions were investigated up to 40GHz.


After the emissions were found, the EUT was removed and replaced by a substituting antenna. A signal generator was connected to the substituting antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

9.3 Test Setup Block Diagram

Below 1GHz:

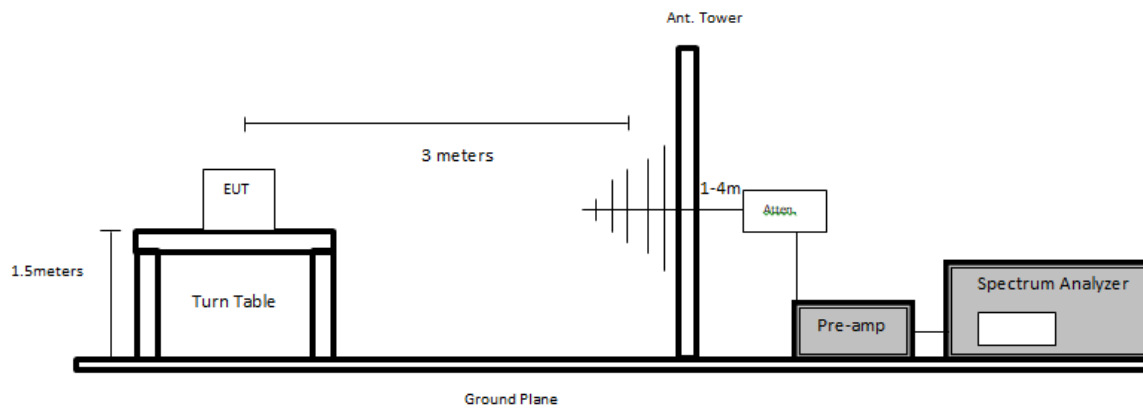

Above 1GHz:

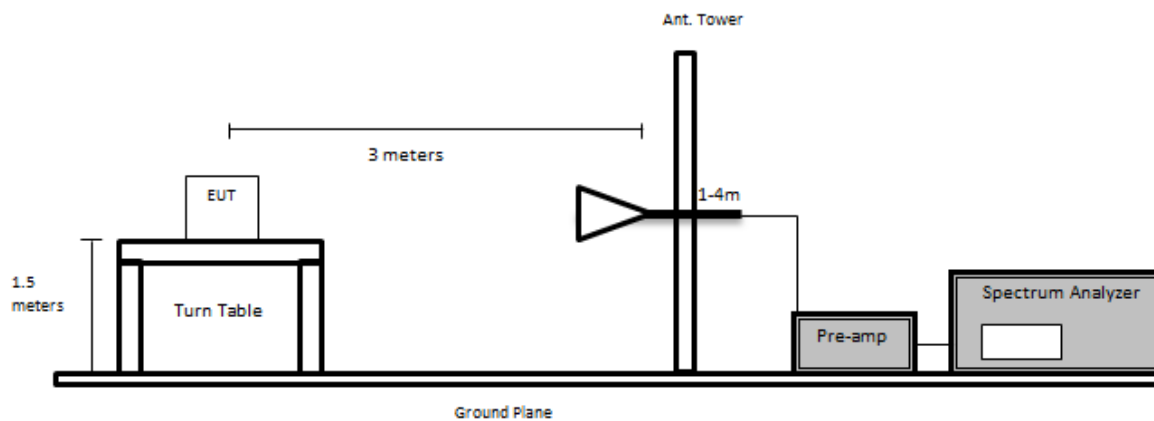

9.4 Test Equipment List and Details

BACL No.	Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Interval
424	Agilent	Spectrum Analyzer	E4440A	US45303156	2022-01-11	1 year
327	Sunol Science Corp	System Controller	SC99V	011003-1	N/R	N/A
316	Sonoma Instruments	Preamplifier 10 kHz - 2.5 GHz	317	260406	2022-06-20	6 months
658	Agilent	Pre-Amplifier	8449B OPT HO2	3008A01103	2022-07-22	1 year
321	Sunol Sciences	Biconilog Antenna	JB3	A020106-2; 1504	2021-11-22	2 years
473	EMCO	Horn Antenna	3115	9511-4627	2022-11-22	2 years
568	COM-POWER	Antenna, Dipole	AD-100 DB-4	721033DB1,721033DB2,721033DB3,521921	2021-05-10	2 years
1192	ETS Lindgren	Horn Antenna	3117	00218973	2022-09-29	2 years
1129	Aglient	MXG Signal Generator	N5182A	MY501403905	2022-09-19	1 year
1186	Pasternack	Coaxial Cable, RG214	PE3062-1050CM	-	2022-10-10	6 months
1248	Pasternack	Coaxial Cable, RG214	PE3062	-	2022-10-10	6 months
1249	Time Microwave	LMR-400 Cable	AE13684	2k80612-5 6fts	2022-10-10	6 months-
1295	Carlisle	10m Ultra Low Loss Coaxial Cable	UFB142A-1-3937-200200	64639890912-001	2022-10-10	6 months
-	-	RF Cable	-	-	Each Time ¹	-
1246	HP	RF Limiter	11867A	01734	2023-04-13	1 year

Note¹: This equipment was calibrated for each test.

Statement of Traceability: *BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 “A2LA Policy on Metrological Traceability”.*

9.5 Test Environmental Conditions

Temperature:	20-21°C
Relative Humidity:	47-49 %
ATM Pressure:	101.4-101.6 kPa

The testing was performed by Deepak Mishra from 2022-11-17 to 2022-11-22 in 5m chamber 3.

9.6 Test Results

Radio 1: CW, Middle channel tested MIMO(4965 MHz), PS: 20

Indicated		Azimuth (degree)	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Amp. (dBuV)		Height (cm)	Polarity (H/V)	Frequency (MHz)	Level (dBm)	Ant. Gain Correction (dBd/dBi)	Cable Loss (dB)	Absolute Level (dBm)		
138.64	51.21	276	189	H	138.64	-67.19	1.4	0.58	-66.37	-25	-41.37
138.64	56.21	170	101	V	138.64	-58.5	1.4	0.58	-57.68	-25	-32.68
1007	52.14	125	124	H	1007	-61.41	6.114	0.93	-56.226	-25	-31.226
1058	51.36	331	108	V	1058	-61.92	6.623	1.04	-56.337	-25	-31.337
15738	35.06	24	114	H	15738	-48.97	15.263	7.74	-41.447	-25	-16.447
16570	35.53	158	118	V	16570	-46.7	16.121	7.91	-38.489	-25	-13.489
9880	47.87	288	127	H	9880	-43.65	11.121	4.68	-37.209	-25	-12.209
9880	47.71	346	142	V	9880	-43.76	11.121	4.68	-37.319	-25	-12.319

Radio 2: CW, Middle channel tested MIMO(4965 MHz), PS: 17

Indicated		Azimuth (degree)	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Amp. (dBuV)		Height (cm)	Polarity (H/V)	Frequency (MHz)	Level (dBm)	Ant. Gain Correction (dBd/dBi)	Cable Loss (dB)	Absolute Level (dBm)		
138.64	49.61	285	195	H	138.64	-68.79	1.4	0.58	-67.97	-25	-42.97
138.64	55.79	186	111	V	138.64	-58.92	1.4	0.58	-58.1	-25	-33.1
1007	52.14	125	124	H	1007	-61.41	6.114	0.93	-56.226	-25	-31.226
1058	51.36	331	108	V	1058	-61.92	6.623	1.04	-56.337	-25	-31.337
15738	35.06	24	114	H	15738	-48.97	15.263	7.74	-41.447	-25	-16.447
16570	35.53	158	118	V	16570	-46.7	16.121	7.91	-38.489	-25	-13.489
9880	48.07	314	171	H	9880	-43.45	11.121	4.68	-37.009	-25	-12.009
9880	48.24	217	156	V	9880	-43.23	11.121	4.68	-36.789	-25	-11.789

Note: Pre-scan was performed in order to determine worst-case orientation of device (shown in Test Setup Photos) with respect to measurement antenna. Plots/data shown represent measurements made in worst-case orientation.

Note: Results are representative of worst-case cabinet emissions. For full evaluations of various configurations' spurious emissions results, refer to section 10.

10 FCC §2.1051, §90.210 & ISEDC RSS-111 §5.5 - Spurious Emissions at Antenna Terminals

10.1 Applicable Standards

According to FCC §90.210

TABLE 1 TO §90.210—APPLICABLE EMISSION MASKS

Frequency band (MHz)	Mask for equipment with audio low pass filter	Mask for equipment without audio low pass filter
Below 25 ¹	A or B	A or C
25-50	B	C
72-76	B	C
150-174 ²	B, D, or E	C, D or E
150 paging only	B	C
220-222	F	F
421-512 ^{2 5}	B, D, or E	C, D, or E
450 paging only	B	G
806-809/851-854 ⁶	B	H
809-824/854-869 ³⁵	B, D	D, G.
896-901/935-940	I	J
902-928	K	K
929-930	B	G
4940-4990 MHz	L or M	L or M
5850-5925 ⁴		
All other bands	B	C

(j) *Emission Mask J.* For transmitters that are not equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power of the transmitter (P) as follows:

(1) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 2.5 kHz, but no more than 6.25 kHz: At least $53 \log(f_d/2.5)$ dB;

(2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 6.25 kHz, but no more than 9.5 kHz: At least $103 \log(f_d/3.9)$ dB;

(3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 9.5 kHz: At least $157 \log(f_d/5.3)$ dB, or $50 + 10 \log(P)$ dB or 70 dB, whichever is the lesser attenuation.

According to ISEDC RSS-111 §5.5

5.5 Transmitter Unwanted Emissions

Transmitter unwanted emissions shall be measured according to the method described in [Section 4.3](#).

On any frequency f , offset from the channel centre frequency f_c by a separation f_d (expressed as a percentage of the channel bandwidth), the power spectral density of the unwanted emissions for low- and high-power transmitters shall comply with the limits specified below in [Table 2](#). [Figure 1](#) shows the emission mask for low- and high-power transmitters. For equipment with multiple transmitters, the unwanted emissions of each transmitter shall comply with the emission limits based on the output power of the transmitter regardless of the total output power of the equipment (i.e. total output power from all the transmitters).

Table 2 — Emission Mask for Low- and High-power Transmitters		
Offset Frequency f_d (% of the Equipment's Channel Bandwidth)	Minimum Attenuation (dB)	
	Low-power Transmitter	High-power Transmitter
$0 < f_d \leq 45$	0	0
$45 < f_d \leq 50$	$219 \log (f_d/45)$	$568 \log (f_d/45)$
$50 < f_d \leq 55$	$10 + 242 \log (f_d/50)$	$26 + 145 \log (f_d/50)$
$55 < f_d \leq 100$	$20 + 31 \log (f_d/55)$	$32 + 31 \log (f_d/55)$
$100 < f_d \leq 150$	$28 + 68 \log (f_d/100)$	$40 + 57 \log (f_d/100)$
$f_d > 150$	40	whichever is less stringent 50 or $55 + 10 \log p$

Where: f_d (%) = $((f - f_c)/\text{channel bandwidth}) \times 100$
 p : transmitter's output power (in watts), measured as per [Section 4.1](#)

10.2 Test Procedure

Conducted spurious emissions:


The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz for measurements up to 1GHz and set to 1 MHz for measurements up to the 10th harmonic.

Band-edge emissions:

According to ANSI C63.26-2015 section 5.7 Unwanted (out-of-band and spurious) conducted emissions measurement procedures (conducted test at antenna port):

A RBW narrower than the specified reference bandwidth can be used (generally limited to no less than 1% of the OBW).

10.3 Test Setup Block Diagram

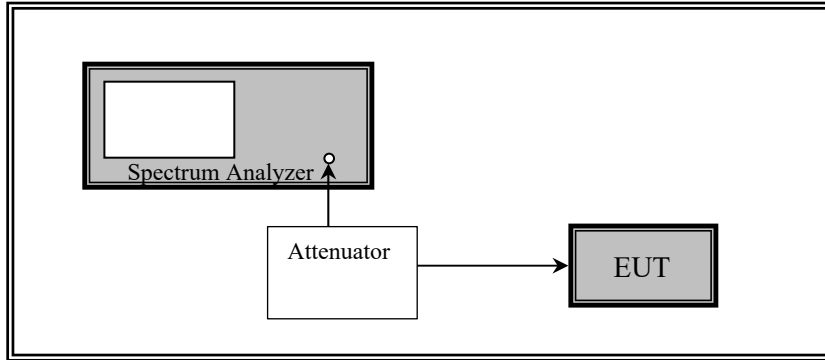

10.4 Test Equipment List and Details

BACL No.	Manufacturers	Descriptions	Models	Serial Numbers	Calibration Dates	Calibration Interval
912	Rhode & Schwarz	Signal Analyzer	FSV40	1321.3008k39-101203-UW	2022-05-05	1 year
1224	Radiall	USB COAXIAL SWITCHES	SPNT R574X11X0 1 USB	-	Each time ¹	N/A
-	-	RF Cable	-	-	Each time ¹	N/A
-	-	10dB Attenuator	-	-	Each time ¹	N/A

Note¹: Equipment was calibrated for each test.

Statement of Traceability: **BACL Corp.** attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 “A2LA Policy on Metrological Traceability”.

10.5 Test Environmental Conditions

Temperature:	18.8° C
Relative Humidity:	34 %
ATM Pressure:	101.8 kPa

The testing was performed by Deepak Mishra on 2022-12-14 in the RF Site.

10.6 Test Results

Please refer to Annex H for the plots.

Please refer to Annex I for the plots.

11 FCC §2.1055, §90.213, RSS-111 § 5.2 - Frequency Tolerance

11.1 Applicable Standard

According to FCC Part 90.213,

§90.213 Frequency stability.

(a) Unless noted elsewhere, transmitters used in the services governed by this part must have a minimum frequency stability as specified in the following table.

TABLE 1 TO §90.213(a)—MINIMUM FREQUENCY STABILITY

[Parts per million (ppm)]

Frequency range (MHz)	Fixed and base stations	Mobile stations	
		Over 2 watts output power	2 watts or less output power
Below 25	^{1 2 3} 100	100	200
25-50	20	20	50
72-76	5		50
150-174	^{5 11} 5	⁶ 5	^{4 6} 50
216-220	1.0		1.0
220-222 ¹²	0.1	1.5	1.5
421-512	^{7 11 14} 2.5	⁸ 5	⁸ 5
806-809	¹⁴ 1.0	1.5	1.5
809-824	¹⁴ 1.5	2.5	2.5
851-854	1.0	1.5	1.5
854-869	1.5	2.5	2.5
896-901	¹⁴ 0.1	1.5	1.5
902-928	2.5	2.5	2.5
902-928 ¹³	2.5	2.5	2.5
929-930	1.5		
935-940	0.1	1.5	1.5
1427-1435	⁹ 300	300	300
Above 2450 ¹⁰			

According to RSS-111 § 5.2,

The applicant shall ensure frequency stability by showing that the occupied bandwidth is maintained within the band of operation when tested at the temperature and supply voltage variations specified for the frequency stability measurement in RSS-Gen.

11.2 Test Procedure

(a) The frequency stability shall be measured with variation of ambient temperature as follows:

(1) From -30° to $+50^{\circ}$ centigrade for all equipment except that specified in paragraphs (a) (2) and (3) of this section.

(2) From -20° to $+50^{\circ}$ centigrade for equipment to be licensed for use in the Maritime Services under part 80 of this chapter, except for Class A, B, and S Emergency Position Indicating Radiobeacons (EPIRBS), and equipment to be licensed for use above 952 MHz at operational fixed stations in all services, stations in the Local Television Transmission Service and Point-to-Point Microwave Radio Service under part 21 of this chapter, equipment licensed for use aboard aircraft in the Aviation Services under part 87 of this chapter, and equipment authorized for use in the Family Radio Service under part 95 of this chapter.

(3) From 0° to + 50° centigrade for equipment to be licensed for use in the Radio Broadcast Services under part 73 of this chapter.

(b) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10° centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stabilizing circuitry need be subjected to the temperature variation test.

(c) In addition to all other requirements of this section, the following information is required for equipment incorporating heater type crystal oscillators to be used in mobile stations, for which type acceptance is first requested after March 25, 1974, except for battery powered, hand carried, portable equipment having less than 3 watts mean output power.

(1) Measurement data showing variation in transmitter output frequency from a cold start and the elapsed time necessary for the frequency to stabilize within the applicable tolerance. Tests shall be made after temperature stabilization at each of the ambient temperature levels; the lower temperature limit, 0° centigrade and + 30° centigrade with no primary power applied.

(2) Beginning at each temperature level specified in paragraph (c)(1) of this section, the frequency shall be measured within one minute after application of primary power to the transmitter and at intervals of no more than one minute thereafter until ten minutes have elapsed or until sufficient measurements are obtained to indicate clearly that the frequency has stabilized within the applicable tolerance, whichever time period is greater. During each test, the ambient temperature shall not be allowed to rise more than 10° centigrade above the respective beginning ambient temperature level.

(3) The elapsed time necessary for the frequency to stabilize within the applicable tolerance from each beginning ambient temperature level as determined from the tests specified in this paragraph shall be specified in the instruction book for the transmitter furnished to the user.

(4) When it is impracticable to subject the complete transmitter to this test because of its physical dimensions or power rating, only its frequency determining and stabilizing portions need be tested.

(d) The frequency stability shall be measured with variation of primary supply voltage as follows:


(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

(3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.

(e) When deemed necessary, the Commission may require tests of frequency stability under conditions in addition to those specifically set out in paragraphs (a), (b), (c), and (d) of this section. (For example measurements showing the effect of proximity to large metal objects, or of various types of antennas, may be required for portable equipment.)

11.3 Test Setup Block Diagram

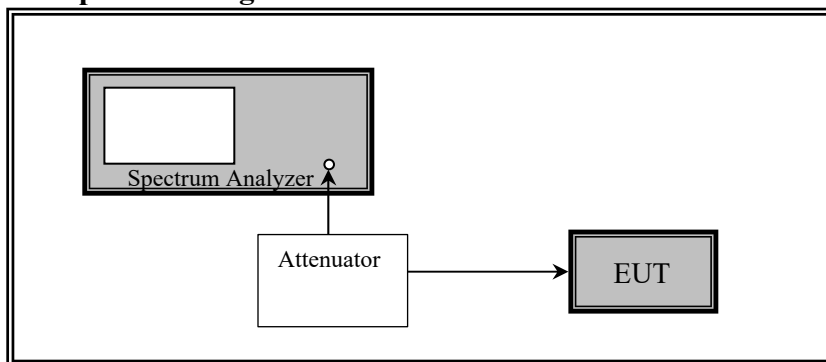

11.4 Test Equipment List and Details

BACL No.	Manufacturers	Descriptions	Models	Serial Numbers	Calibration Dates	Calibration Interval
912	Rhode & Schwarz	Signal Analyzer	FSV40	1321.3008k39-101203-UW	2022-05-05	1 year
1060	BACL	Temp and Humi Chamber	BTH-150-40	30078	2022-10-27	1 year
1224	Radiall	USB COAXIAL SWITCHES	SPNT R574X11X0 1 USB	-	Each time ¹	N/A
-	-	RF Cable	-	-	Each time ¹	N/A
-	-	10dB Attenuator	-	-	Each time ¹	N/A

Note¹: Equipment was calibrated for each test.

Statement of Traceability: BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 “A2LA Policy on Metrological Traceability”.

11.5 Test Environmental Conditions

Temperature:	18.8° C
Relative Humidity:	34 %
ATM Pressure:	101.8 kPa

The testing was performed by Deepak Mishra on 2022-12-16 in the RF Site.

11.6 Test Results

4.9GHz Radio1 and Radio 2 Antenna A:

Temperature (°C)/Voltage Conditions	Radio	Reference Frequency (GHz)	Tested Frequency (GHz)	Frequency Deviation (ppm)	Result
-30°C/normal voltage (120V)	Radio 1	4.965	4.9650403750	8.13	pass
-30°C /normal voltage (120V)	Radio 2	4.965	4.9650689750	13.89	pass
-20°C /normal voltage (120V)	Radio 1	4.965	4.9650437250	8.81	pass
-20°C /normal voltage (120V)	Radio 2	4.965	4.9650728750	14.68	pass
-10°C /normal voltage (120V)	Radio 1	4.965	4.9650427750	8.62	pass
-10°C /normal voltage (120V)	Radio 2	4.965	4.9650787250	15.86	pass
0°C /normal voltage (120V)	Radio 1	4.965	4.9650323250	6.51	pass
0°C /normal voltage (120V)	Radio 2	4.965	4.9650803250	16.18	pass
10°C /normal voltage (120V)	Radio 1	4.965	4.9650146750	2.96	pass
10°C /normal voltage (120V)	Radio 2	4.965	4.9650717750	14.46	pass
20°C /normal voltage (120V)	Radio 1	4.965	4.9649961250	-0.78	pass
20°C /normal voltage (120V)	Radio 2	4.965	4.9650533250	10.74	pass
30°C /normal voltage (120V)	Radio 1	4.965	4.9649812250	-3.78	pass
30°C /normal voltage (120V)	Radio 2	4.965	4.9650363750	7.33	pass
40°C /normal voltage (120V)	Radio 1	4.965	4.9649662750	-6.79	pass
40°C /normal voltage (120V)	Radio 2	4.965	4.9650156250	3.15	pass
50°C /normal voltage (120V)	Radio 1	4.965	4.9649572750	-8.61	pass
50°C /normal voltage (120V)	Radio 2	4.965	4.9650045250	0.91	pass
20°C /low voltage (102V)	Radio 1	4.965	4.9649931750	-1.37	pass
20°C /low voltage (102V)	Radio 2	4.965	4.9650520750	10.49	pass
20°C /high voltage (138V)	Radio 1	4.965	4.9649913750	-1.74	pass
20°C /high voltage (138V)	Radio 2	4.965	4.9650513250	10.34	pass

Note: Testing done using CW mode

Note: ppm calculated with $((\text{Tested Freq} - \text{Reference Freq}) / \text{Tested Freq}) * 1000000$

Please refer Annex J for the plots.

Temperature (°C)/Voltage Conditions	Radio	Antenna	Low Channel (MHz)	High Channel (MHz)	Limit (MHz)	Result
-30°C /normal voltage (120V)	Radio 1	A	4941.86	4988.22	4940 – 4990	pass
-30°C /normal voltage (120V)	Radio 1	B	4941.86	4988.26	4940 – 4990	pass
-30°C /normal voltage (120V)	Radio 2	A	4941.78	4988.30	4940 – 4990	pass
-30°C /normal voltage (120V)	Radio 2	B	4941.82	4988.34	4940 – 4990	pass
20°C /normal voltage (120V)	Radio 1	A	4941.84	4988.16	4940 – 4990	pass
20°C /normal voltage (120V)	Radio 1	B	4941.78	4988.22	4940 – 4990	pass
20°C /normal voltage (120V)	Radio 2	A	4941.78	4988.28	4940 – 4990	pass
20°C /normal voltage (120V)	Radio 2	B	4941.78	4988.39	4940 – 4990	pass
50°C /normal voltage (120V)	Radio 1	A	4941.82	4988.14	4940 – 4990	pass
50°C /normal voltage (120V)	Radio 1	B	4941.78	4988.14	4940 – 4990	pass
50°C /normal voltage (120V)	Radio 2	A	4941.78	4988.26	4940 – 4990	pass
50°C /normal voltage (120V)	Radio 2	B	4941.74	4988.26	4940 – 4990	pass
20°C /low voltage (102V)	Radio 1	A	4941.84	4988.16	4940 – 4990	pass
20°C /low voltage (102V)	Radio 1	B	4941.84	4988.22	4940 – 4990	pass
20°C /low voltage (102V)	Radio 2	A	4941.78	4988.28	4940 – 4990	pass
20°C /low voltage (102V)	Radio 2	B	4941.78	4988.34	4940 – 4990	pass
20°C /high voltage (138V)	Radio 1	A	4941.84	4988.16	4940 – 4990	pass
20°C /high voltage (138V)	Radio 1	B	4941.78	4988.16	4940 – 4990	pass
20°C /high voltage (138V)	Radio 2	A	4941.78	4988.28	4940 – 4990	pass
20°C /high voltage (138V)	Radio 2	B	4941.84	4988.39	4940 – 4990	pass

Note: Testing done using Modulated mode

Please refer Annex K for the plots.

12 Annex D (Normative) – A2LA Electrical Testing Certificate**Accredited Laboratory**

A2LA has accredited

BAY AREA COMPLIANCE LABORATORIES CORP.

Sunnyvale, CA

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This laboratory also meets A2LA R222 - Specific Requirements EPA ENERGY STAR Accreditation Program. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).

Presented this 21st day of December 2022.

A handwritten signature in blue ink.

Mr. Trace McInturff, Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 3297.02
Valid to September 30, 2024

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

Please follow the web link below for a full ISO 17025 scope

<https://www.a2la.org/scopepdf/3297-02.pdf>

--- END OF REPORT ---