


Test Mode	UNII-2A_TX AX(HE20) Mode 5260 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

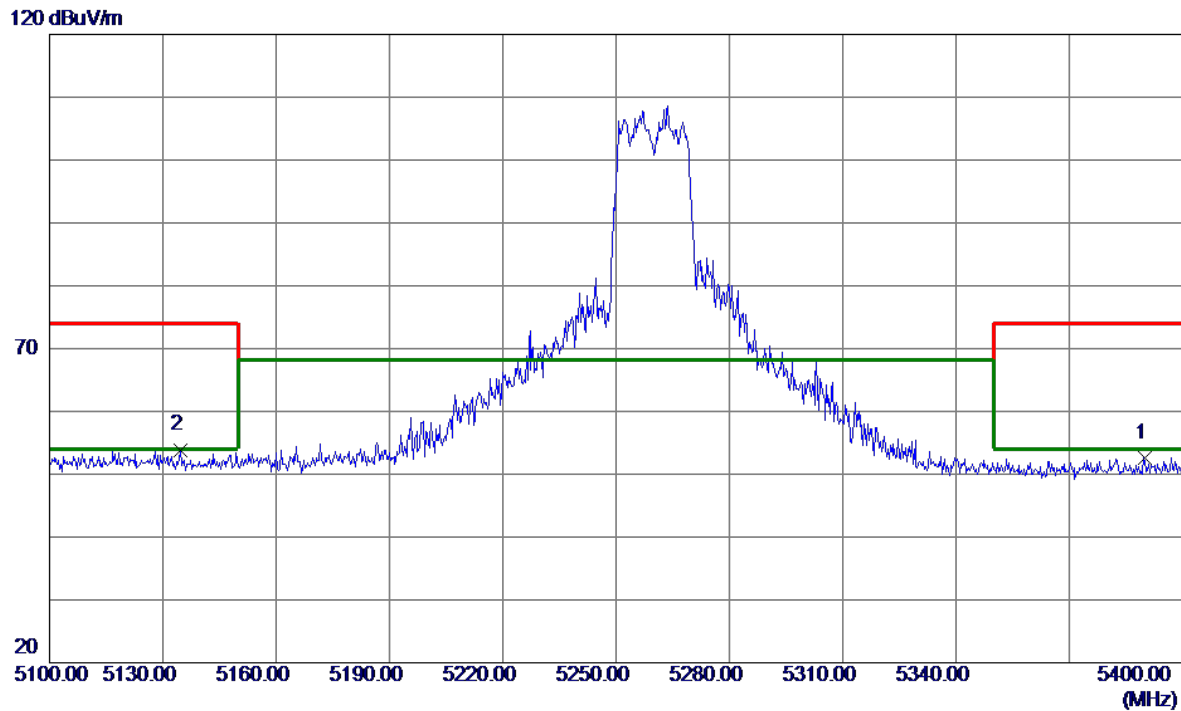

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5390.0700	40.92	11.71	52.63	74.00	-21.37	Peak	
2 *	5134.8300	42.35	11.55	53.90	74.00	-20.10	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5260 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

86.9 dBuV/m

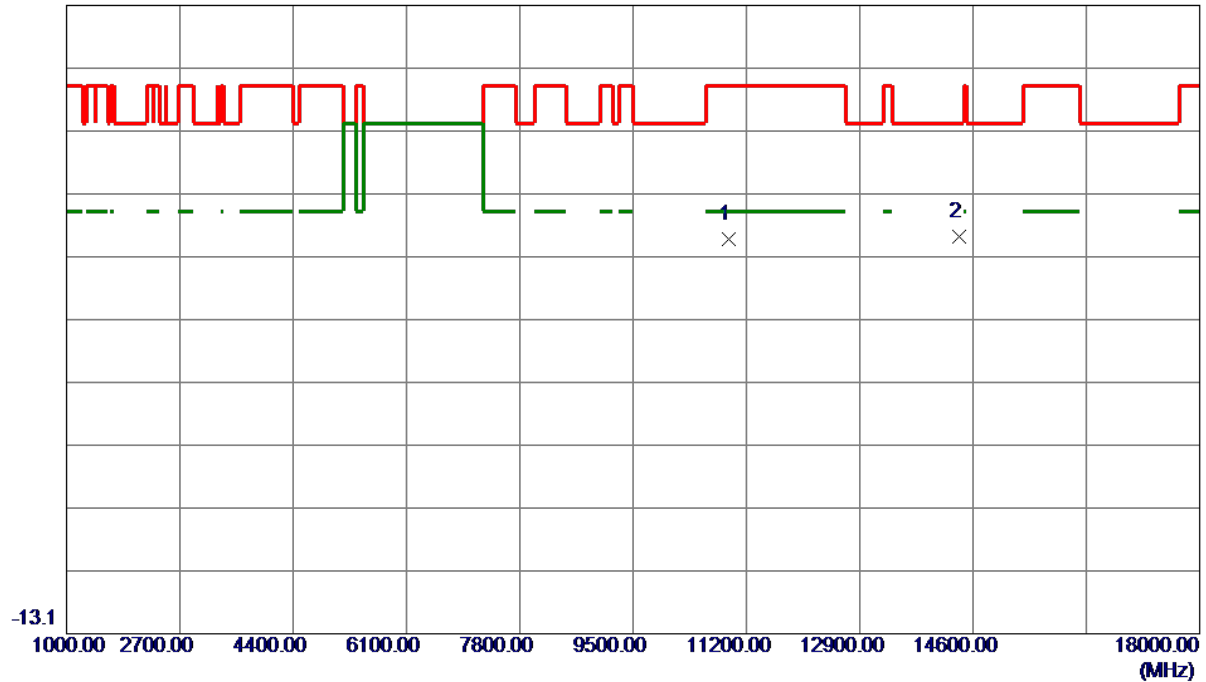


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10933.1000	40.20	9.54	49.74	74.00	-24.26	Peak	
2 *	14388.3500	39.92	10.18	50.10	68.20	-18.10	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5260 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

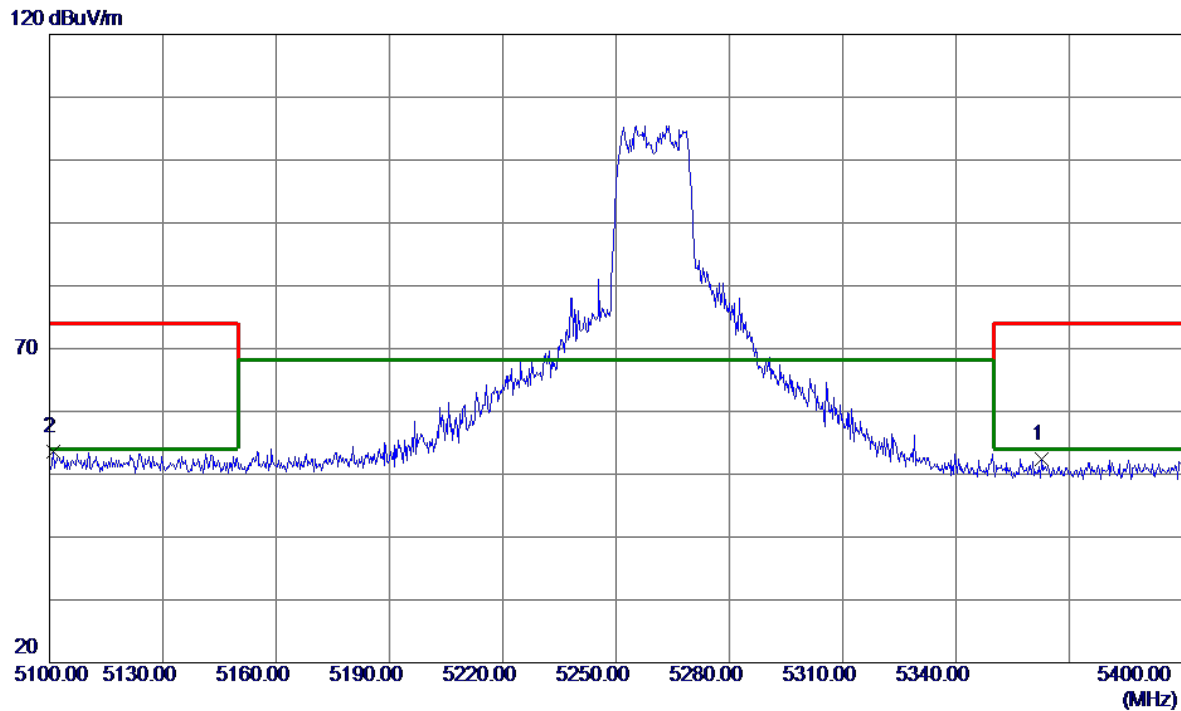

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5362.8000	40.74	11.69	52.43	74.00	-21.57	Peak	
2 *	5100.9300	42.00	11.52	53.52	74.00	-20.48	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5260 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

86.9 dBuV/m

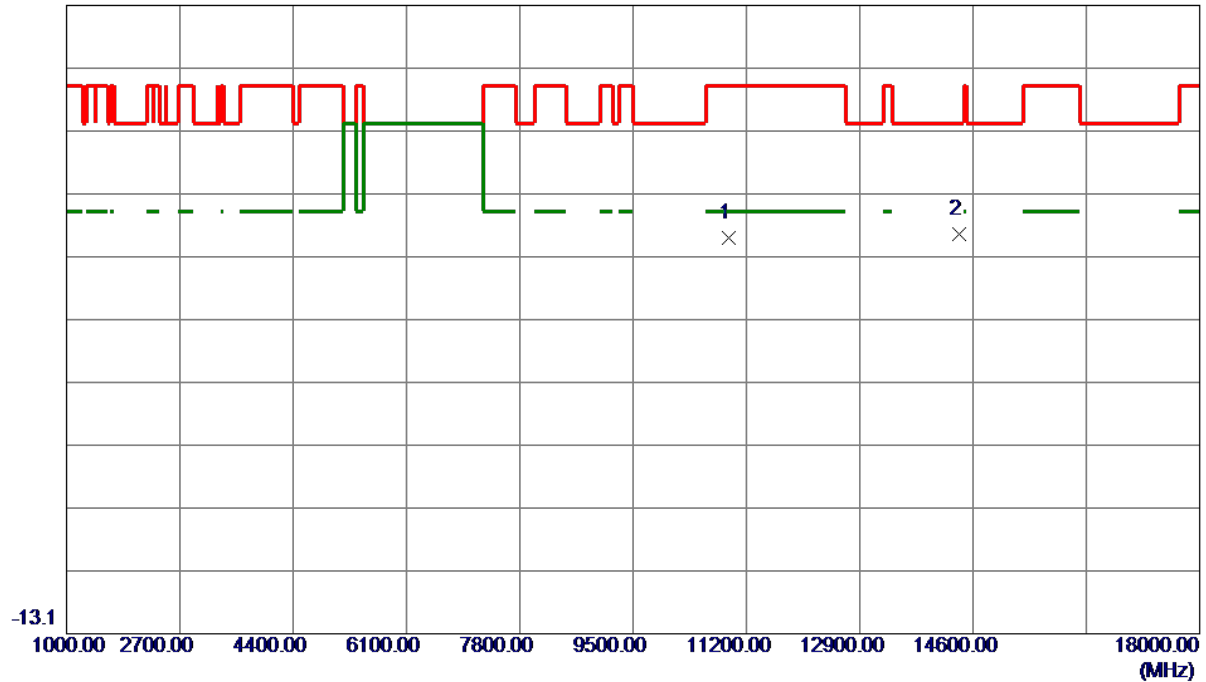

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10929.7000	40.35	9.54	49.89	74.00	-24.11	Peak	
2 *	14383.2500	40.39	10.17	50.56	68.20	-17.64	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5300 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

86.9 dBuV/m

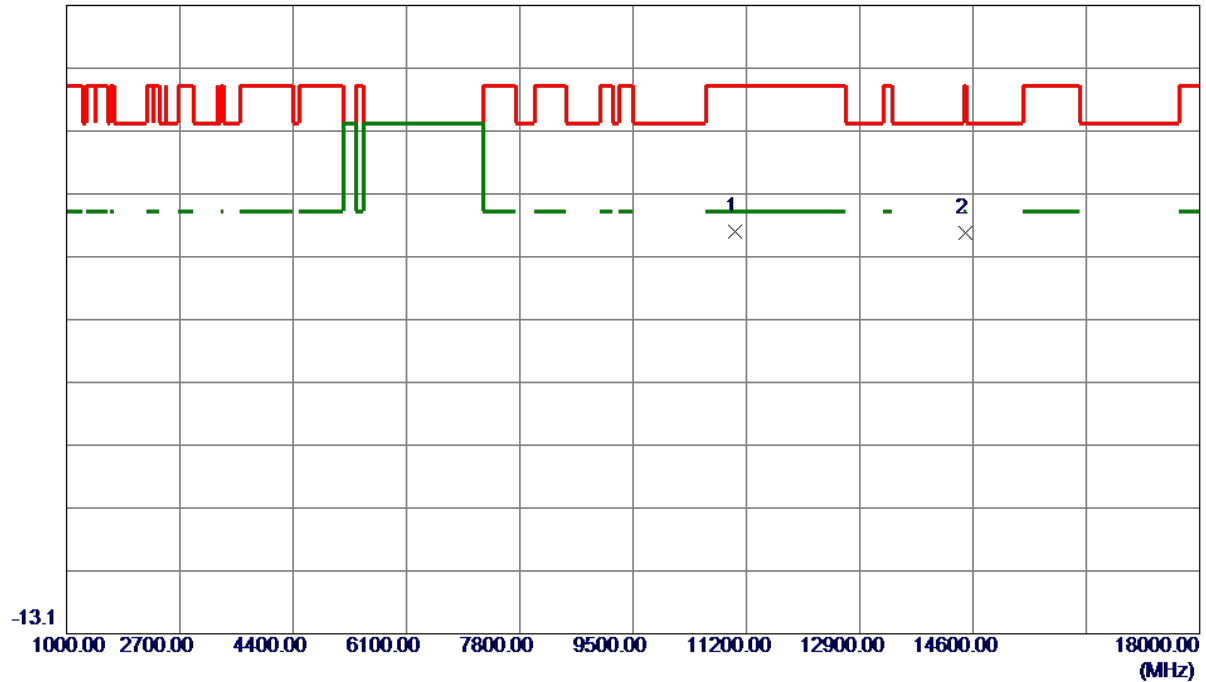

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11036.8000	41.40	9.58	50.98	74.00	-23.02	Peak	
2	14492.9000	40.45	10.29	50.74	74.00	-23.26	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5300 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

86.9 dBuV/m

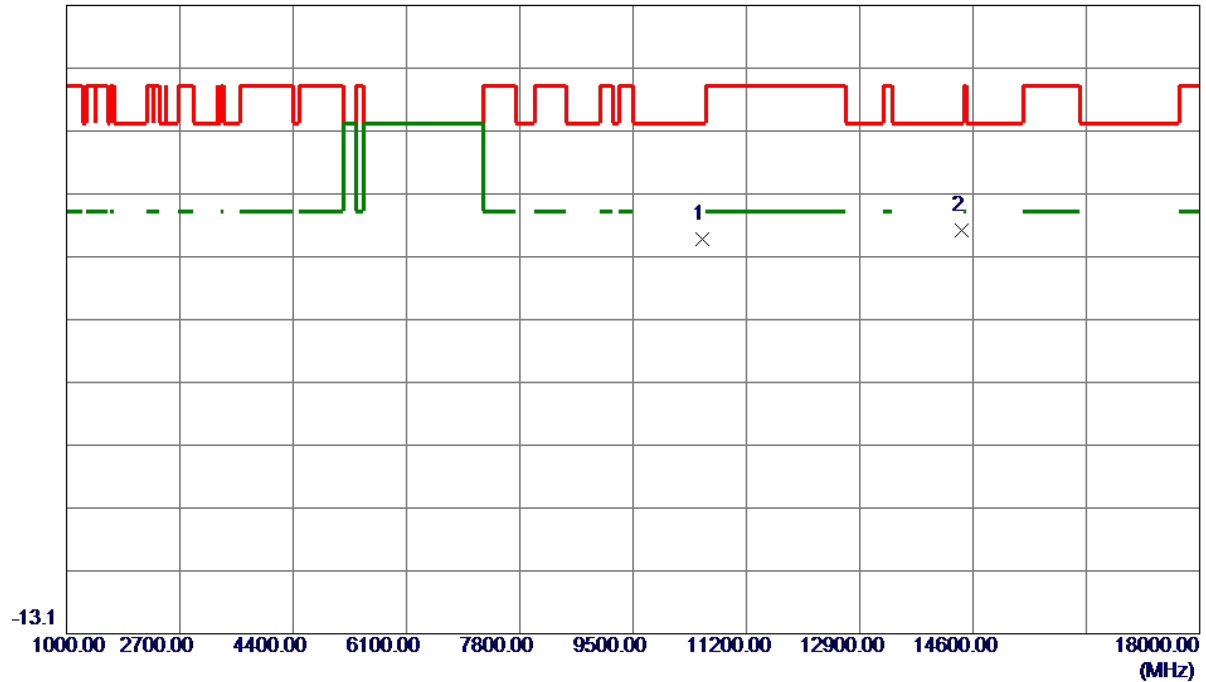

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10547.2000	40.28	9.42	49.70	68.20	-18.50	Peak	
2 *	14439.3500	40.93	10.23	51.16	68.20	-17.04	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5320 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

120 dBuV/m

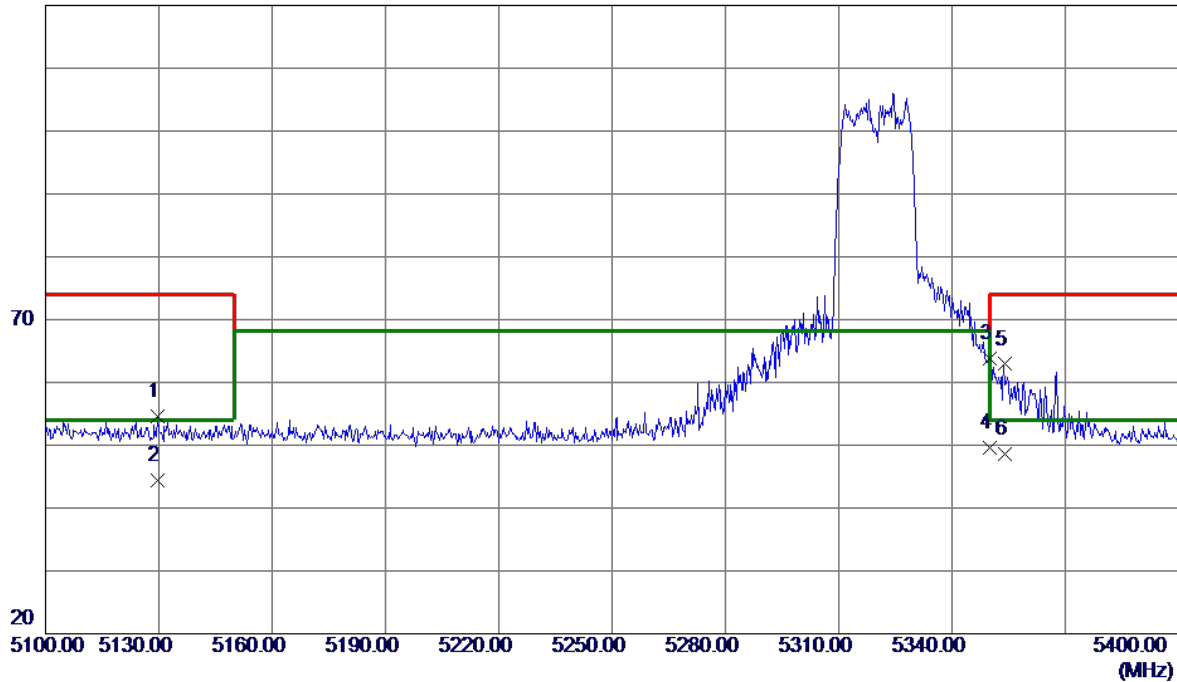

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5129.8050	42.98	11.54	54.52	74.00	-19.48	Peak	
2	5129.8050	32.84	11.54	44.38	54.00	-9.62	AVG	
3	5350.0000	52.19	11.68	63.87	74.00	-10.13	Peak	
4 *	5350.0000	37.97	11.68	49.65	54.00	-4.35	AVG	
5	5353.8900	51.21	11.69	62.90	74.00	-11.10	Peak	
6	5353.8900	36.93	11.69	48.62	54.00	-5.38	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5320 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

86.9 dBuV/m

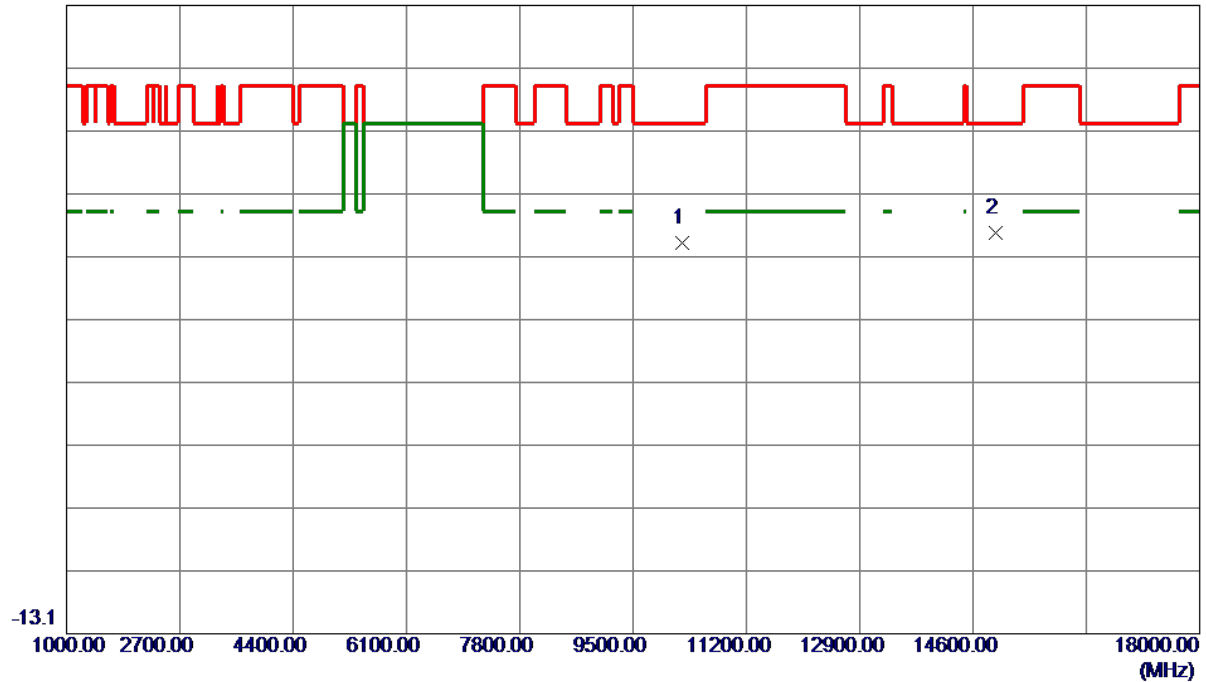


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10235.2500	40.19	8.98	49.17	68.20	-19.03	Peak	
2 *	14940.0000	41.35	9.41	50.76	68.20	-17.44	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5320 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

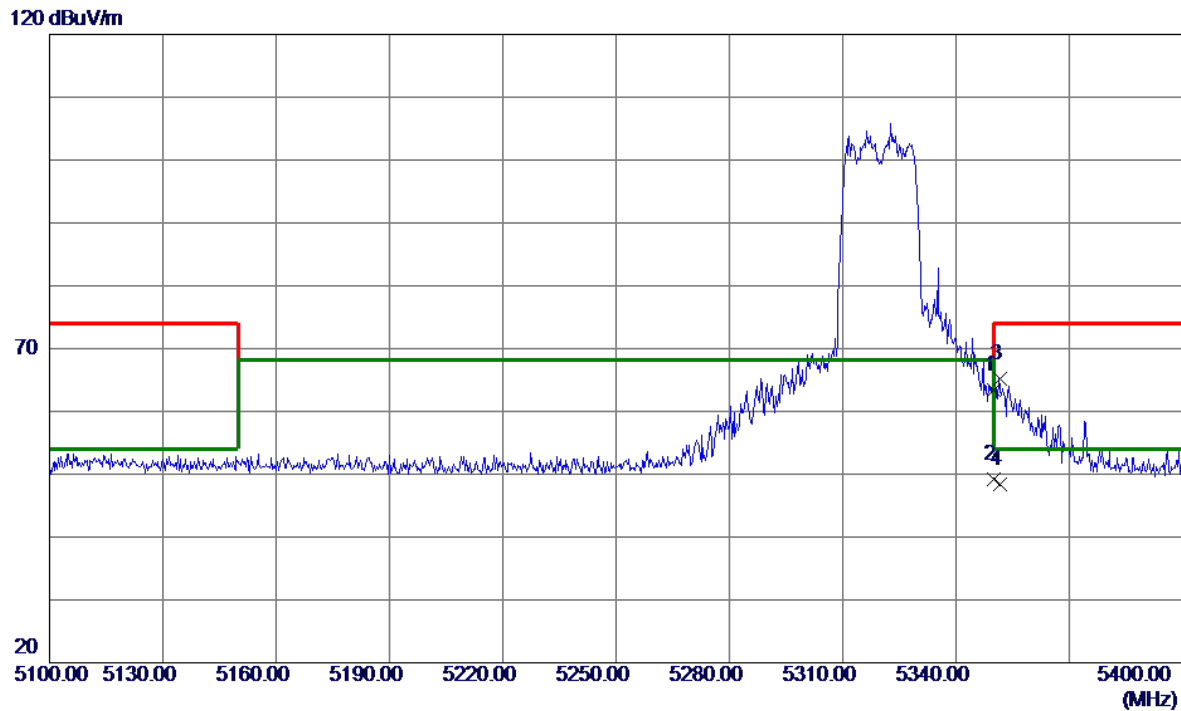

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5350.0000	51.73	11.68	63.41	74.00	-10.59	Peak	
2 *	5350.0000	37.52	11.68	49.20	54.00	-4.80	AVG	
3	5351.6549	53.48	11.69	65.17	74.00	-8.83	Peak	
4	5351.6549	36.69	11.69	48.38	54.00	-5.62	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5320 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

86.9 dBuV/m

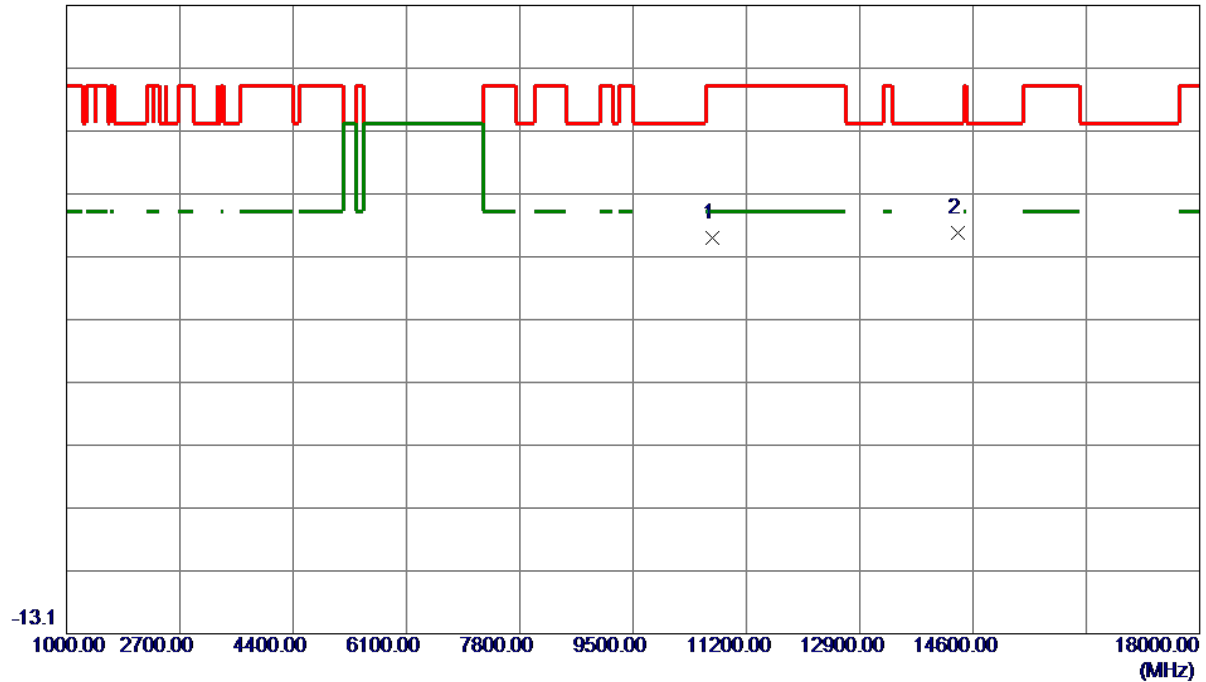

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10699.3500	40.39	9.47	49.86	74.00	-24.14	Peak	
2 *	14382.4000	40.53	10.17	50.70	68.20	-17.50	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE40) Mode 5270 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

120 dBuV/m



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5144.3849	44.18	11.55	55.73	74.00	-18.27	Peak	
2	5144.3849	32.59	11.55	44.14	54.00	-9.86	AVG	
3	5350.0000	46.03	11.68	57.71	74.00	-16.29	Peak	
4 *	5350.0000	36.34	11.68	48.02	54.00	-5.98	AVG	
5	5352.3750	49.02	11.69	60.71	74.00	-13.29	Peak	
6	5352.3750	32.57	11.69	44.26	54.00	-9.74	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE40) Mode 5270 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

86.9 dBuV/m

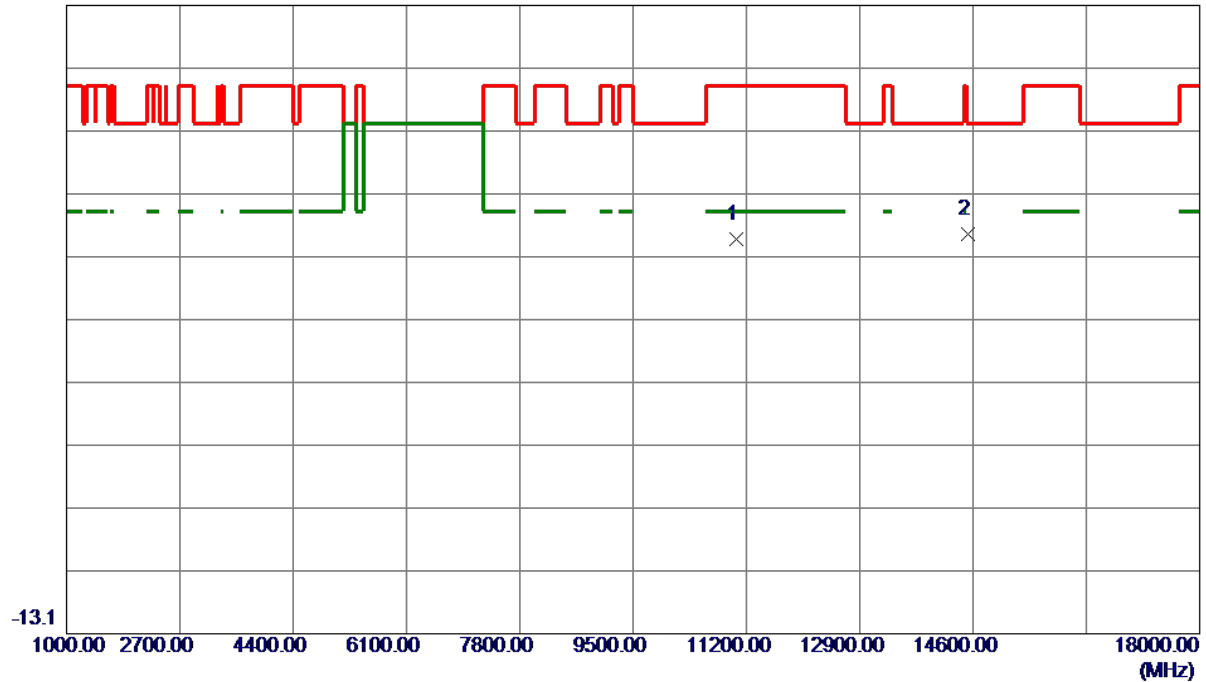


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11056.3500	40.21	9.59	49.80	74.00	-24.20	Peak	
2 *	14528.6000	40.27	10.24	50.51	68.20	-17.69	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE40) Mode 5270 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

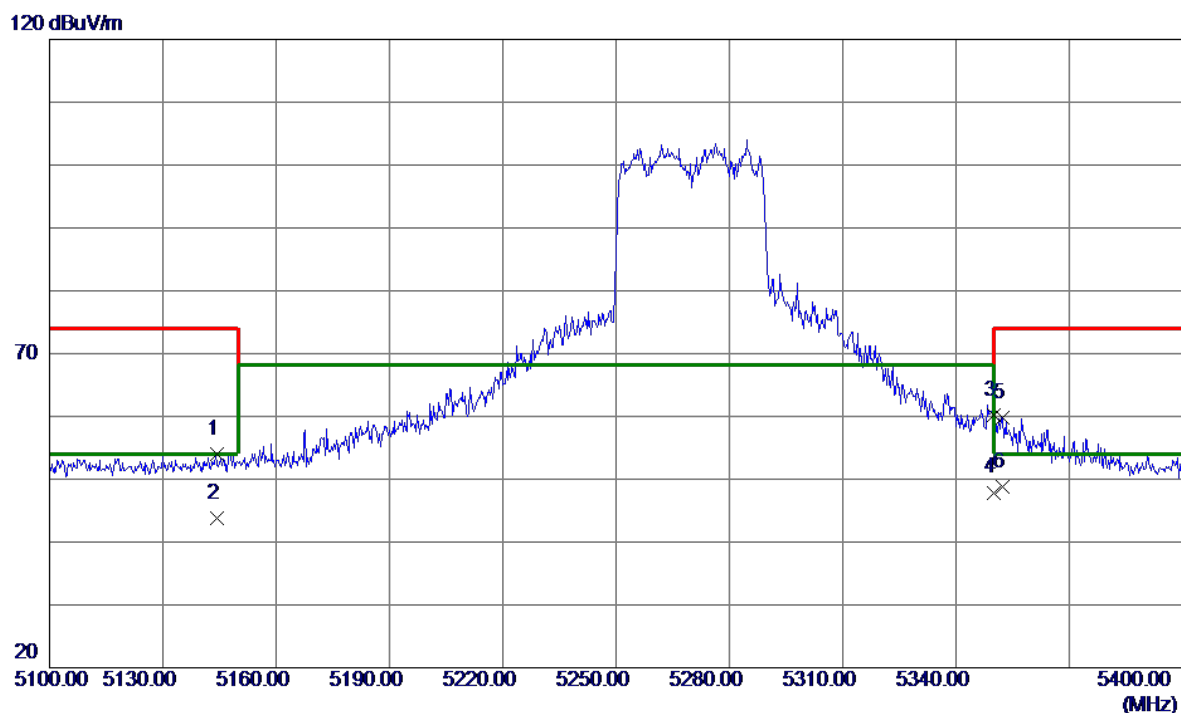


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5144.2650	42.46	11.55	54.01	74.00	-19.99	Peak	
2	5144.2650	32.30	11.55	43.85	54.00	-10.15	AVG	
3	5350.0000	48.50	11.68	60.18	74.00	-13.82	Peak	
4	5350.0000	36.22	11.68	47.90	54.00	-6.10	AVG	
5	5352.3000	48.19	11.69	59.88	74.00	-14.12	Peak	
6 *	5352.3000	37.19	11.69	48.88	54.00	-5.12	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE40) Mode 5270 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

86.9 dBuV/m

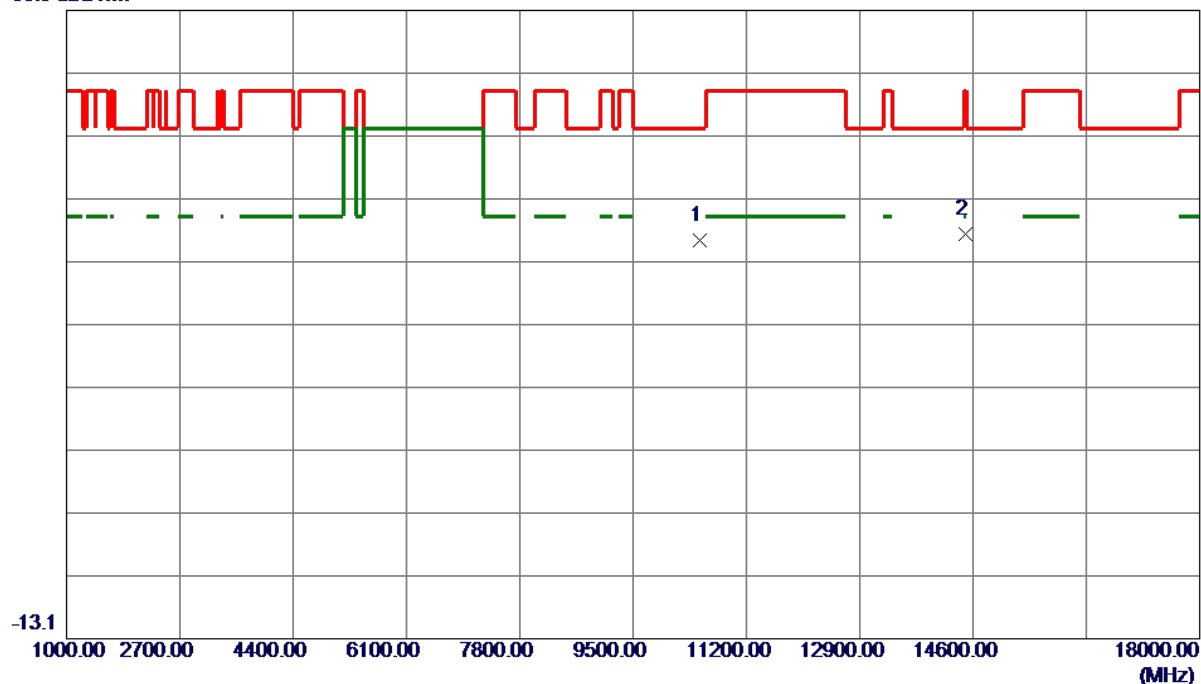


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10496.2000	40.96	9.40	50.36	68.20	-17.84	Peak	
2	14492.9000	41.09	10.29	51.38	74.00	-22.62	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE40) Mode 5310 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

120 dBuV/m

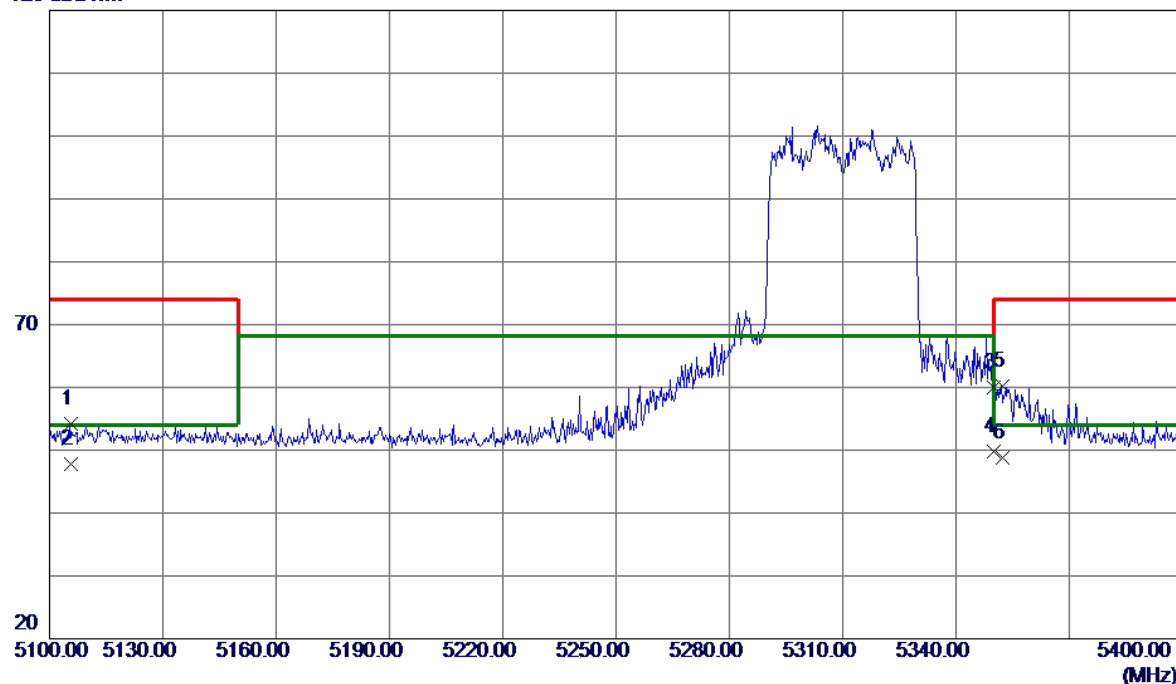


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5105.5950	42.66	11.53	54.19	74.00	-19.81	Peak	
2	5105.5950	36.28	11.53	47.81	54.00	-6.19	AVG	
3	5350.0000	48.37	11.68	60.05	74.00	-13.95	Peak	
4 *	5350.0000	38.21	11.68	49.89	54.00	-4.11	AVG	
5	5352.1800	48.50	11.69	60.19	74.00	-13.81	Peak	
6	5352.1800	37.13	11.69	48.82	54.00	-5.18	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE40) Mode 5310 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

86.9 dBuV/m

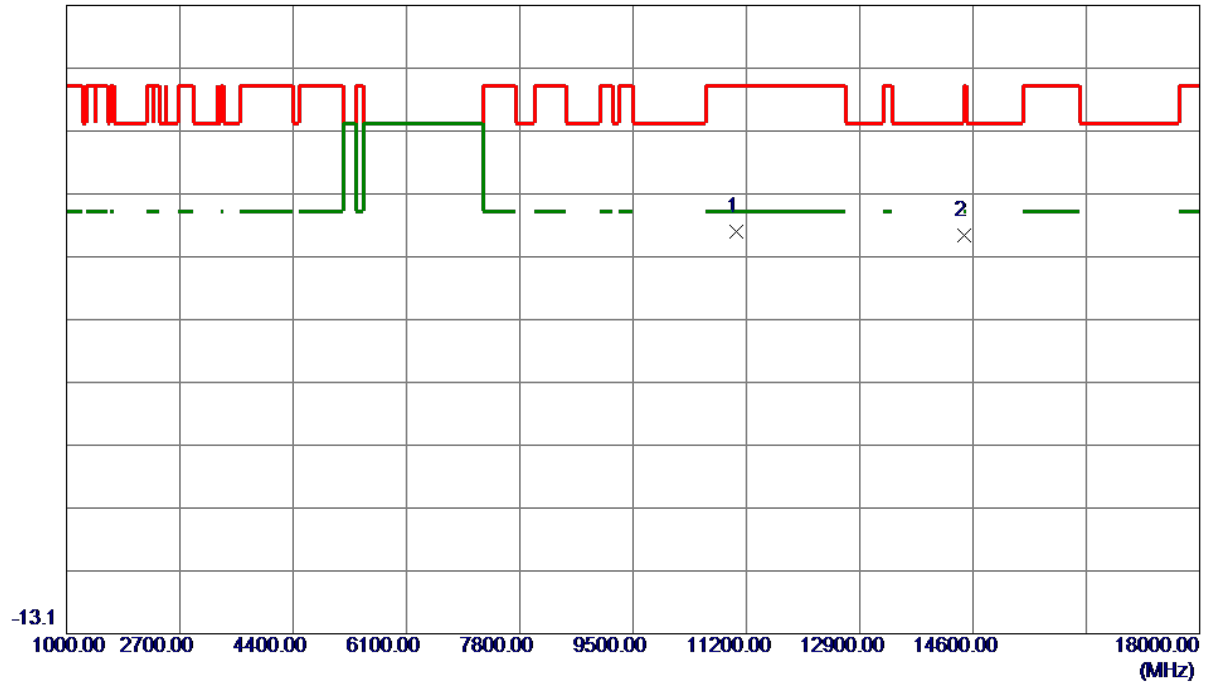

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11050.4000	41.35	9.58	50.93	74.00	-23.07	Peak	
2	14472.5000	39.99	10.27	50.26	74.00	-23.74	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE40) Mode 5310 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

120 dBuV/m

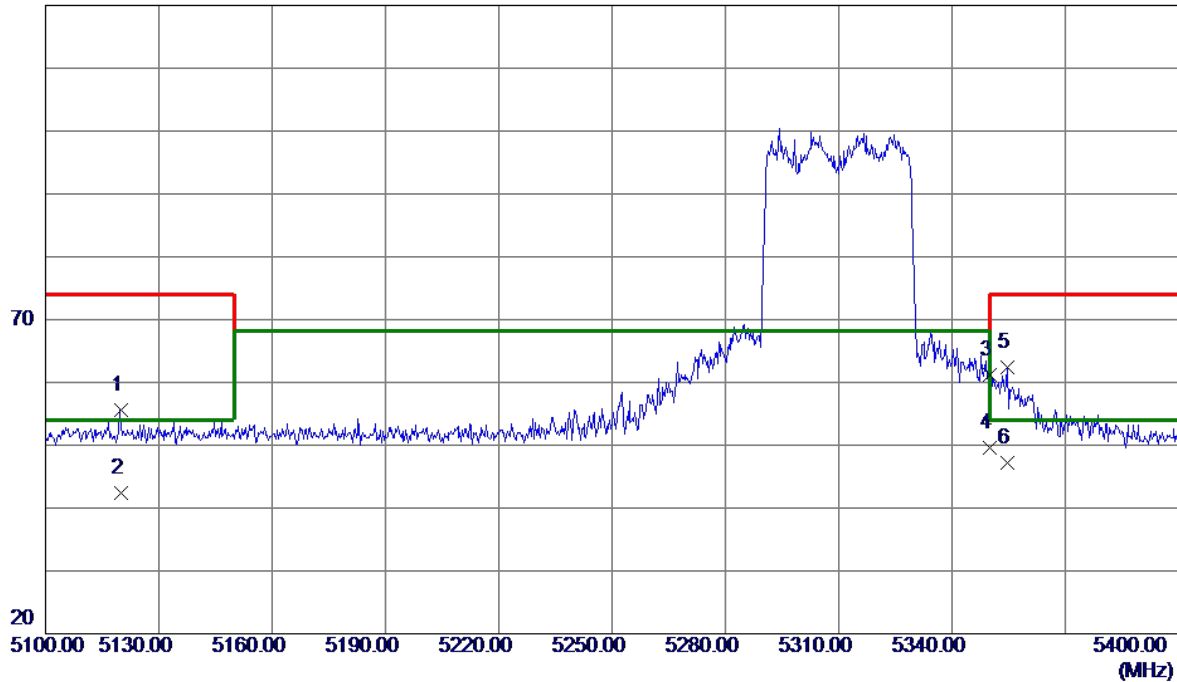

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5119.9500	44.10	11.54	55.64	74.00	-18.36	Peak	
2	5119.9500	30.78	11.54	42.32	54.00	-11.68	AVG	
3	5350.0000	49.51	11.68	61.19	74.00	-12.81	Peak	
4 *	5350.0000	37.89	11.68	49.57	54.00	-4.43	AVG	
5	5354.8050	50.78	11.69	62.47	74.00	-11.53	Peak	
6	5354.8050	35.54	11.69	47.23	54.00	-6.77	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE40) Mode 5310 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

86.9 dBuV/m

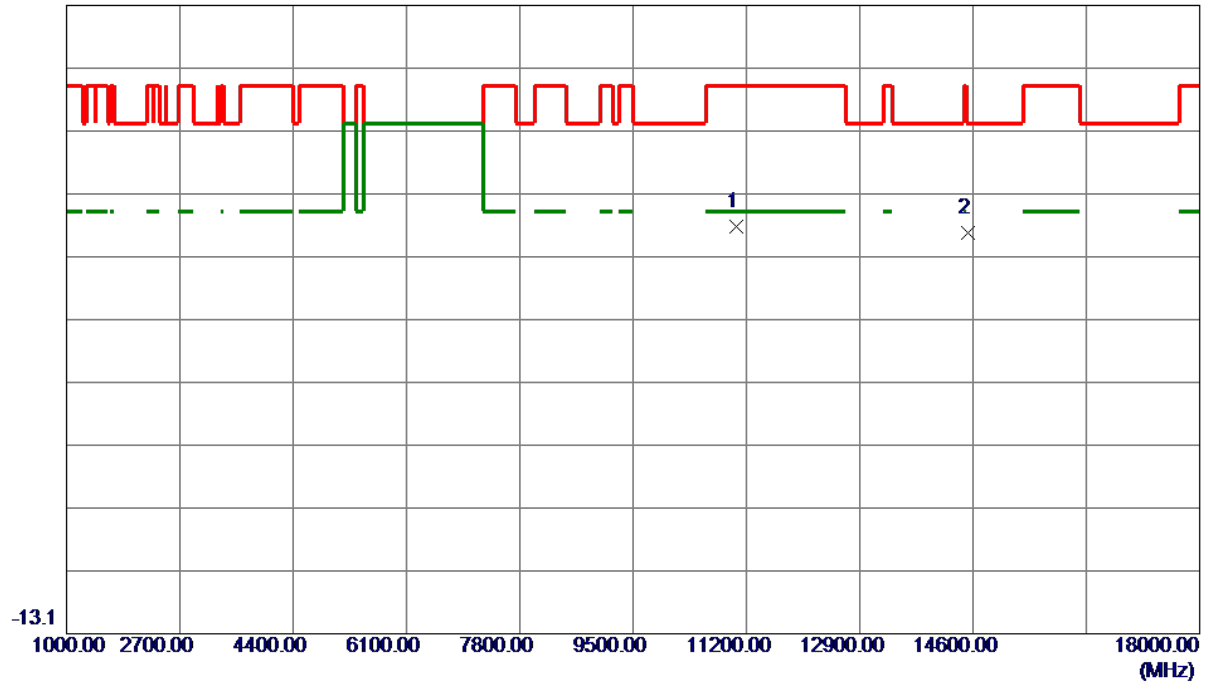

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11052.9500	42.15	9.58	51.73	74.00	-22.27	Peak	
2 *	14523.5000	40.38	10.25	50.63	68.20	-17.57	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE80) Mode 5290 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

120 dBuV/m

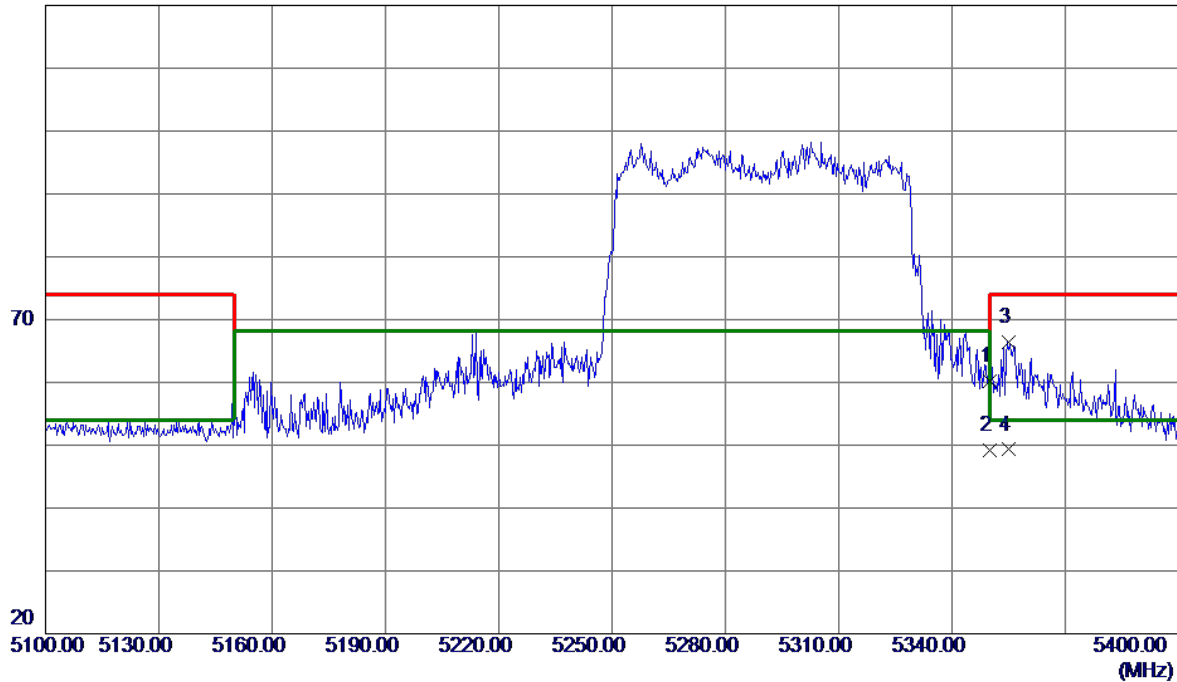

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5350.0000	48.48	11.68	60.16	74.00	-13.84	Peak	
2	5350.0000	37.51	11.68	49.19	54.00	-4.81	AVG	
3	5354.9100	54.70	11.69	66.39	74.00	-7.61	Peak	
4 *	5354.9100	37.61	11.69	49.30	54.00	-4.70	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE80) Mode 5290 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

86.9 dBuV/m

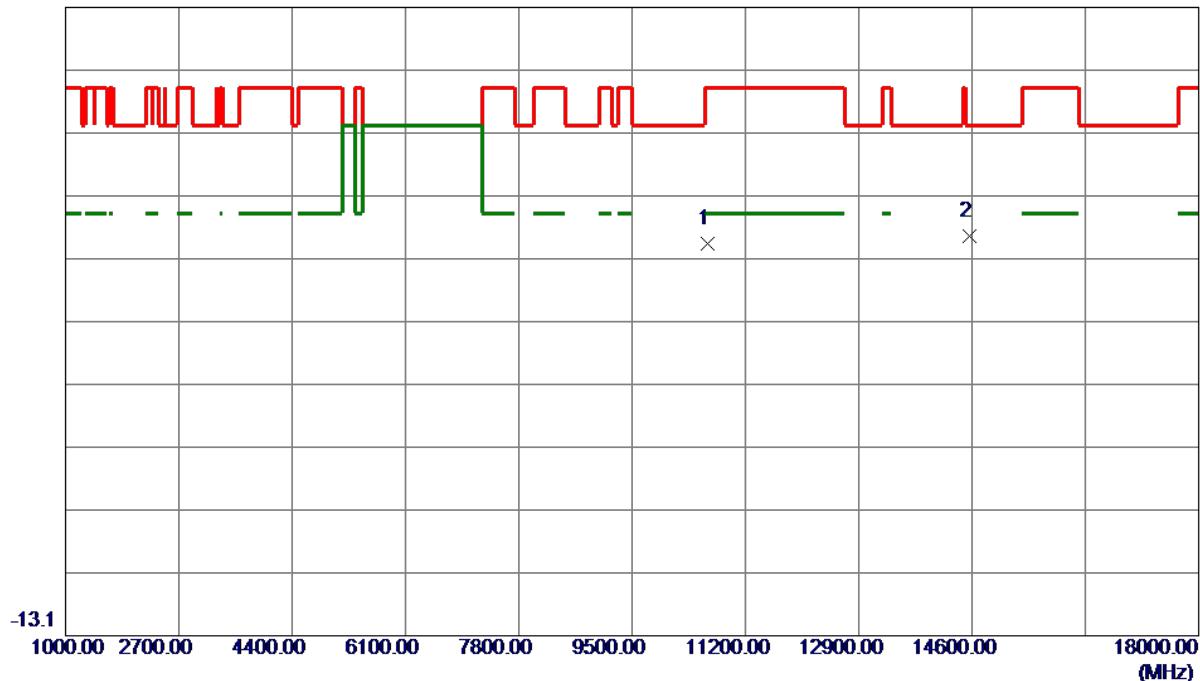


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10628.8000	39.94	9.45	49.39	74.00	-24.61	Peak	
2 *	14560.9000	40.37	10.18	50.55	68.20	-17.65	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE80) Mode 5290 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

120 dBuV/m

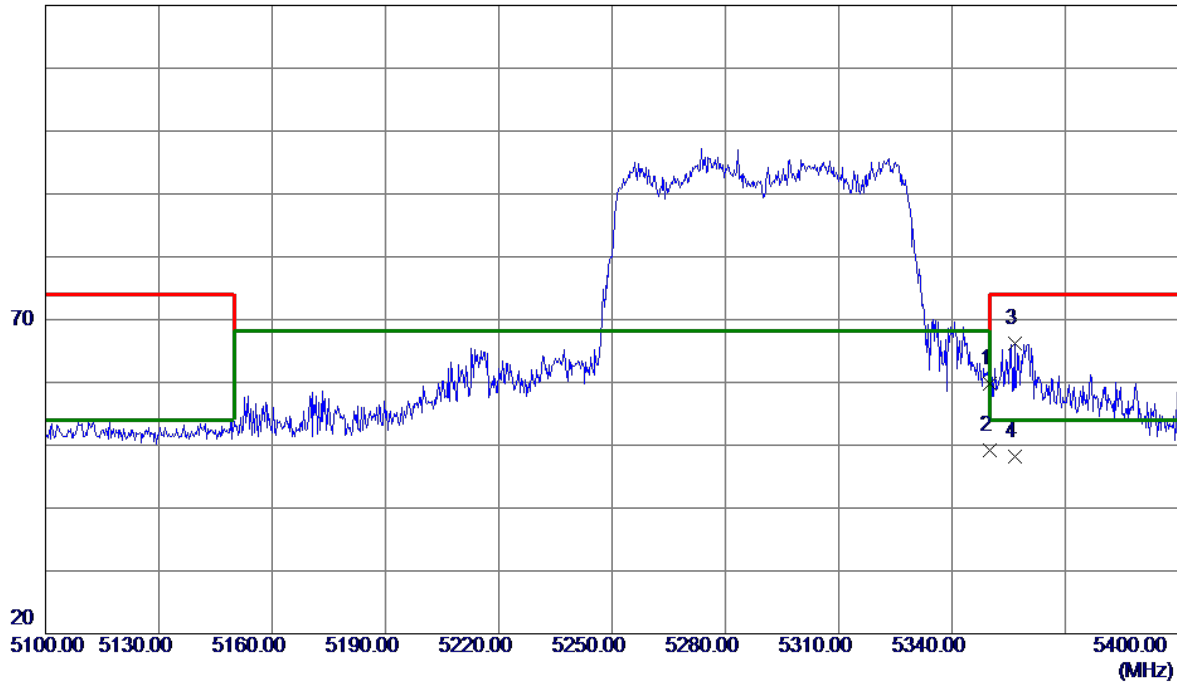

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5350.0000	48.15	11.68	59.83	74.00	-14.17	Peak	
2 *	5350.0000	37.50	11.68	49.18	54.00	-4.82	AVG	
3	5356.6950	54.55	11.69	66.24	74.00	-7.76	Peak	
4	5356.6950	36.47	11.69	48.16	54.00	-5.84	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE80) Mode 5290 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

86.9 dBuV/m

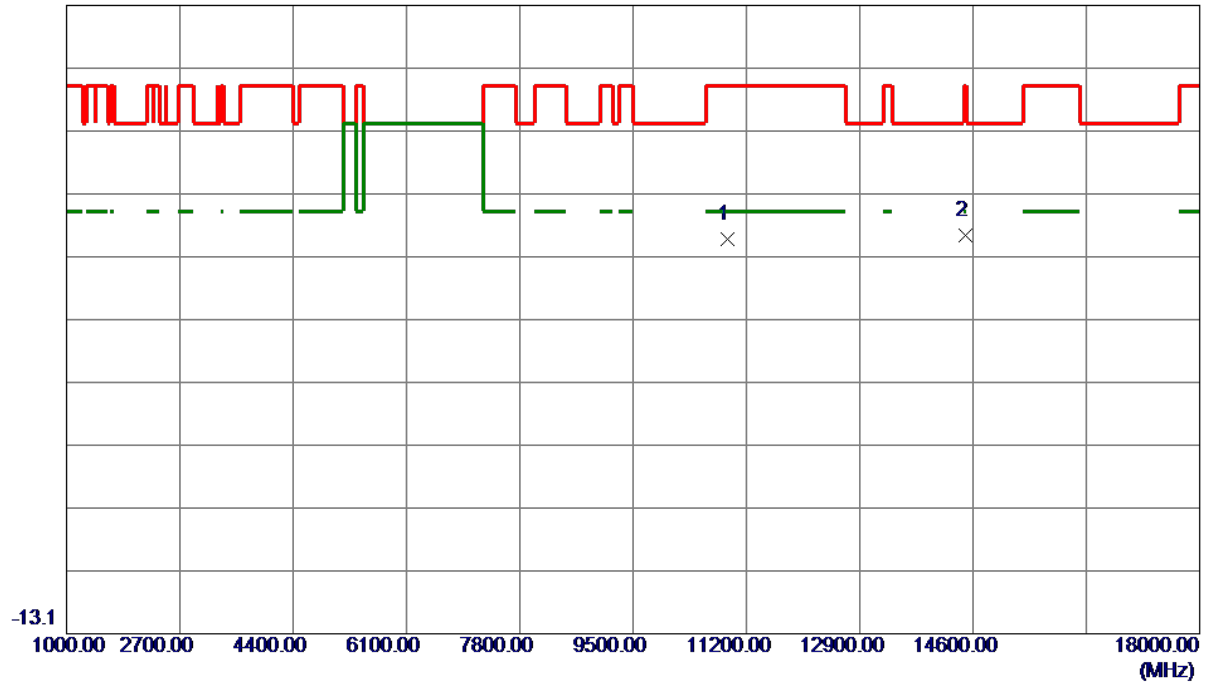

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10912.7000	40.17	9.53	49.70	74.00	-24.30	Peak	
2 *	14492.9000	40.09	10.29	50.38	74.00	-23.62	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

120 dBuV/m

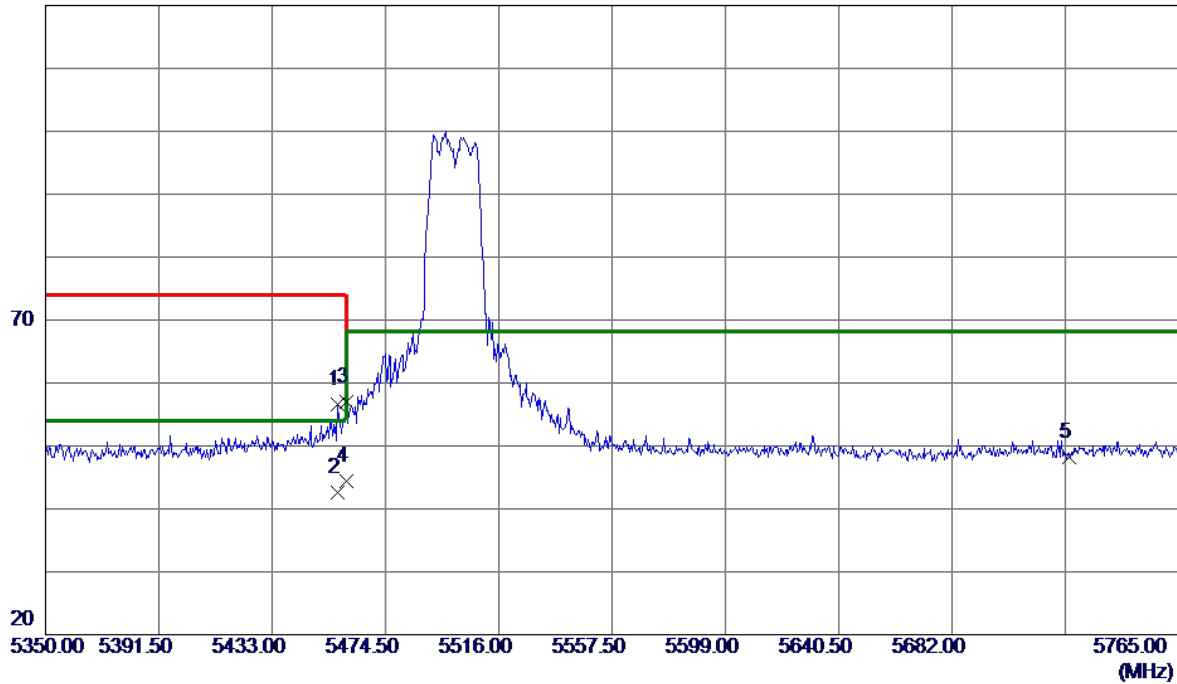

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5457.0700	44.90	11.75	56.65	74.00	-17.35	Peak	
2	5457.0700	30.78	11.75	42.53	54.00	-11.47	AVG	
3	5460.0000	45.27	11.75	57.02	74.00	-16.98	Peak	
4 *	5460.0000	32.66	11.75	44.41	54.00	-9.59	AVG	
5	5725.0000	36.06	12.18	48.24	68.20	-19.96	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

86.9 dBuV/m

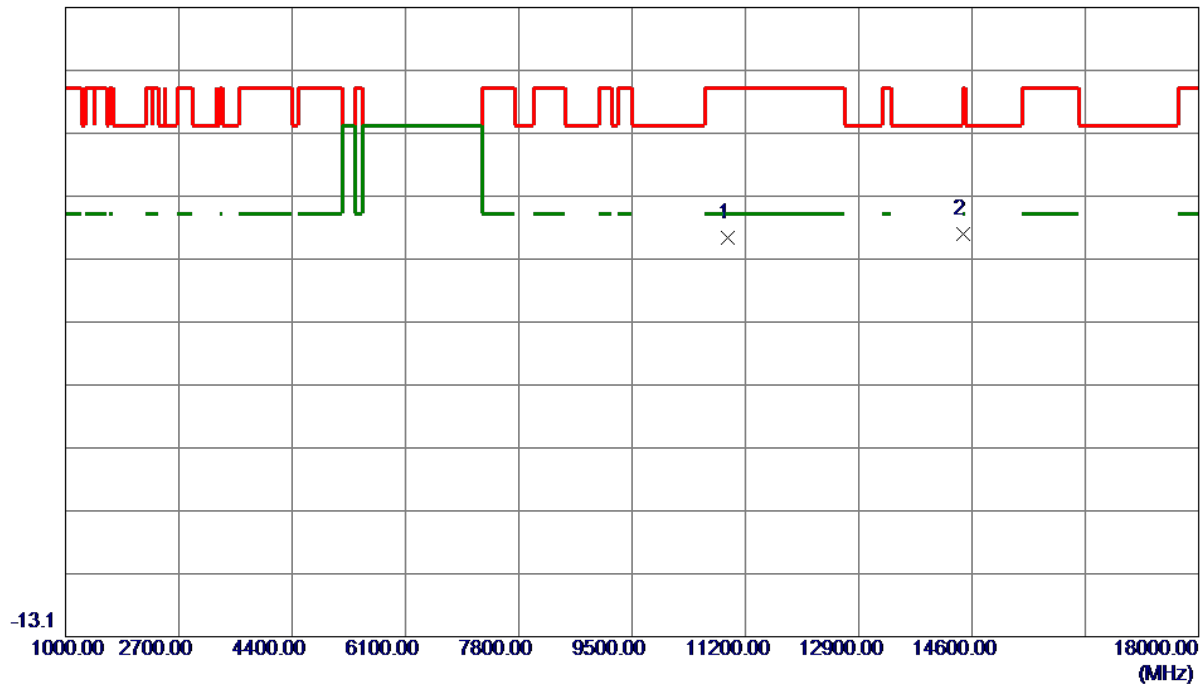


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10939.0500	40.74	9.54	50.28	74.00	-23.72	Peak	
2 *	14464.0000	40.66	10.26	50.92	68.20	-17.28	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

120 dBuV/m

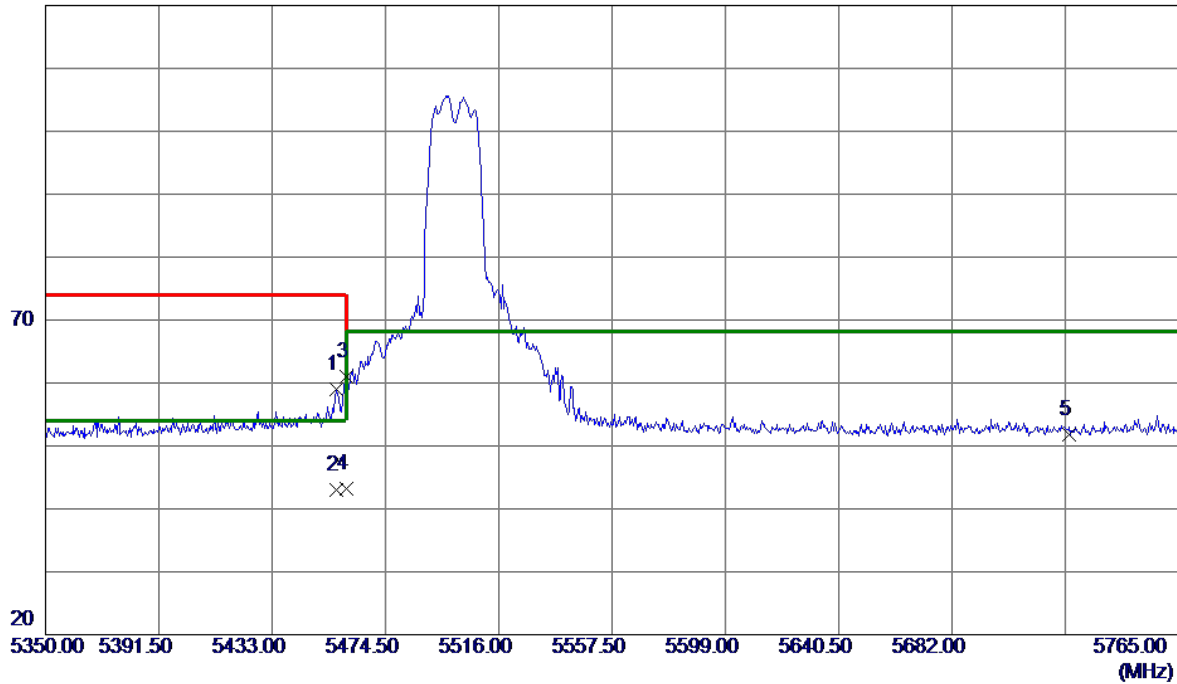

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5456.6549	47.34	11.75	59.09	74.00	-14.91	Peak	
2	5456.6549	31.29	11.75	43.04	54.00	-10.96	AVG	
3	5460.0000	49.22	11.75	60.97	74.00	-13.03	Peak	
4 *	5460.0000	31.44	11.75	43.19	54.00	-10.81	AVG	
5	5725.0000	39.64	12.18	51.82	68.20	-16.38	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

86.9 dBuV/m

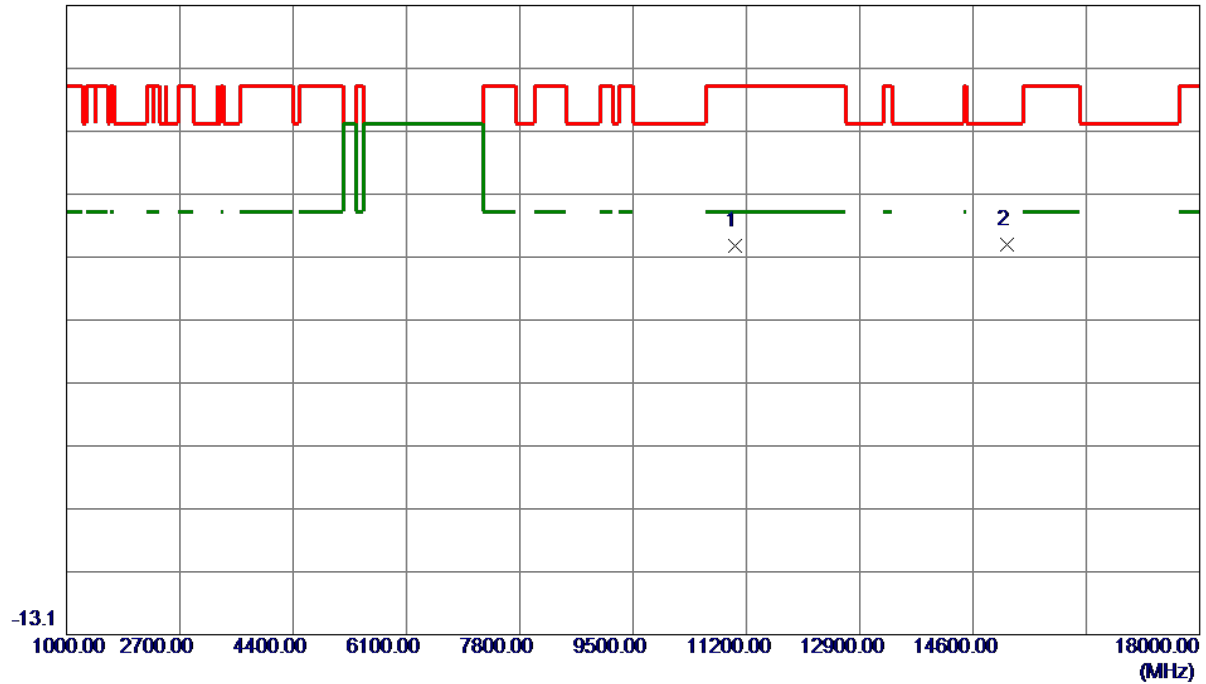

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11037.6500	39.08	9.58	48.66	74.00	-25.34	Peak	
2 *	15101.5000	39.83	9.00	48.83	68.20	-19.37	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5580 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

86.9 dBuV/m

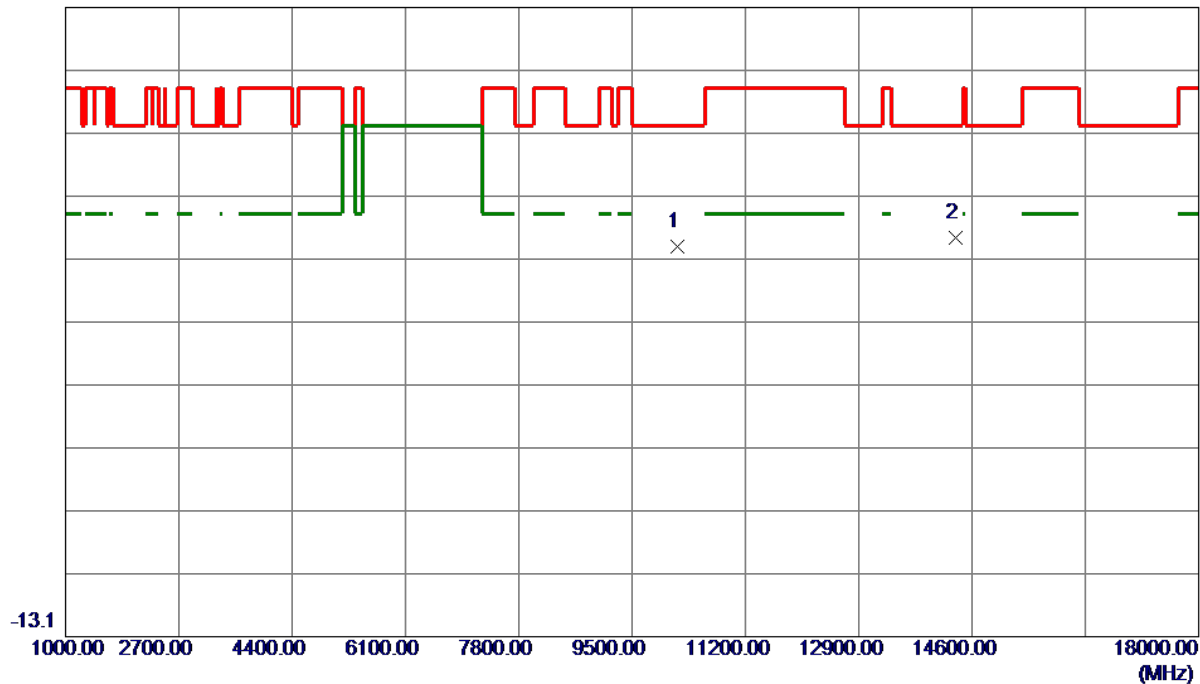


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10183.4000	39.91	8.90	48.81	68.20	-19.39	Peak	
2 *	14359.4500	40.15	10.15	50.30	68.20	-17.90	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5580 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

86.9 dBuV/m

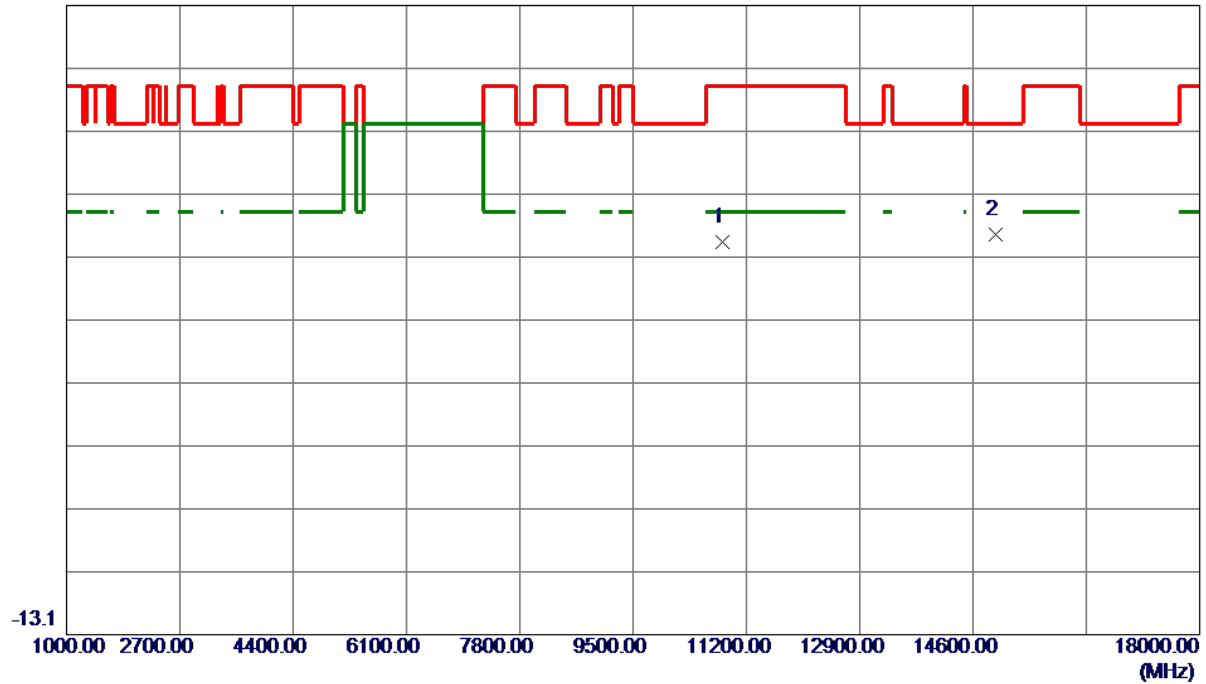


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10836.2000	39.80	9.51	49.31	74.00	-24.69	Peak	
2 *	14938.3000	41.07	9.41	50.48	68.20	-17.72	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

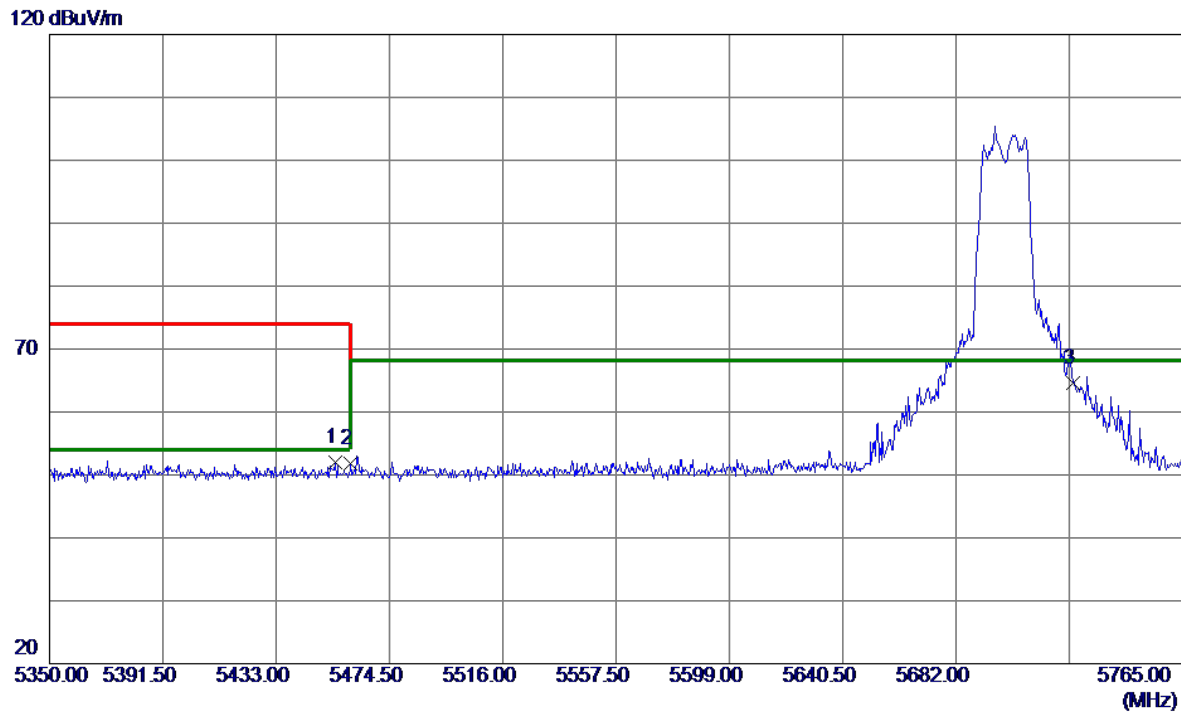


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5454.7879	40.18	11.75	51.93	74.00	-22.07	Peak	
2	5460.0000	39.98	11.75	51.73	74.00	-22.27	Peak	
3 *	5725.0000	52.38	12.18	64.56	68.20	-3.64	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

86.9 dBuV/m

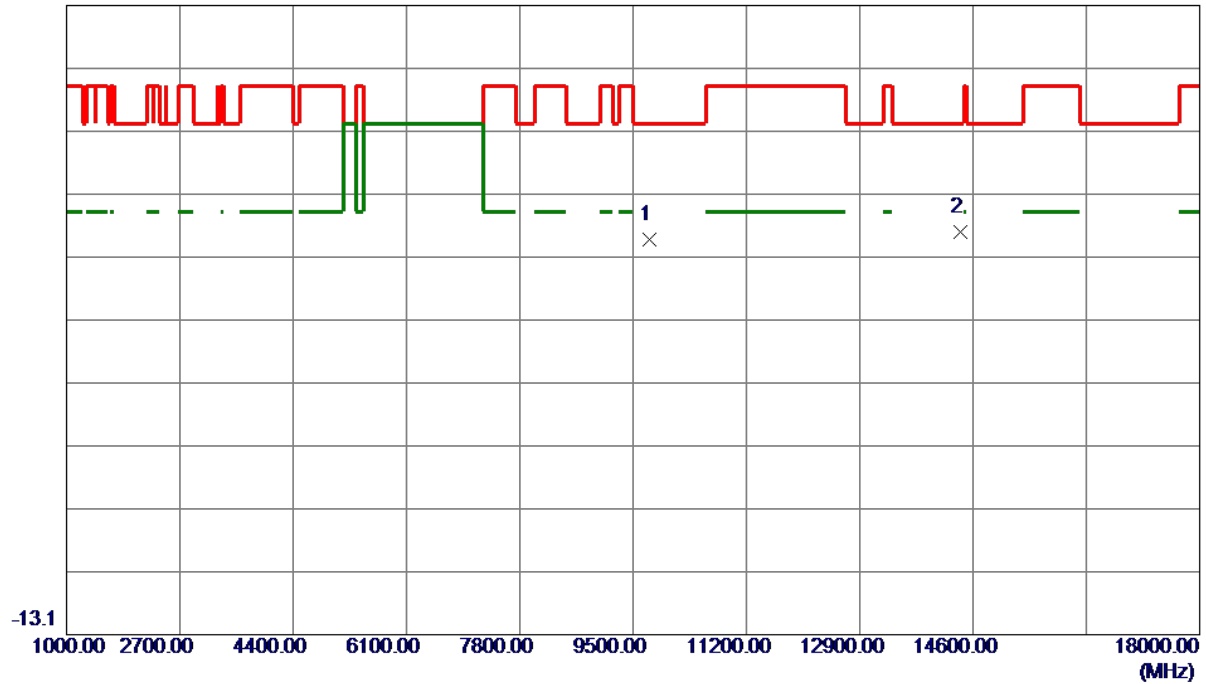


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	9749.0500	40.85	8.85	49.70	68.20	-18.50	Peak	
2 *	14403.6500	40.70	10.19	50.89	68.20	-17.31	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

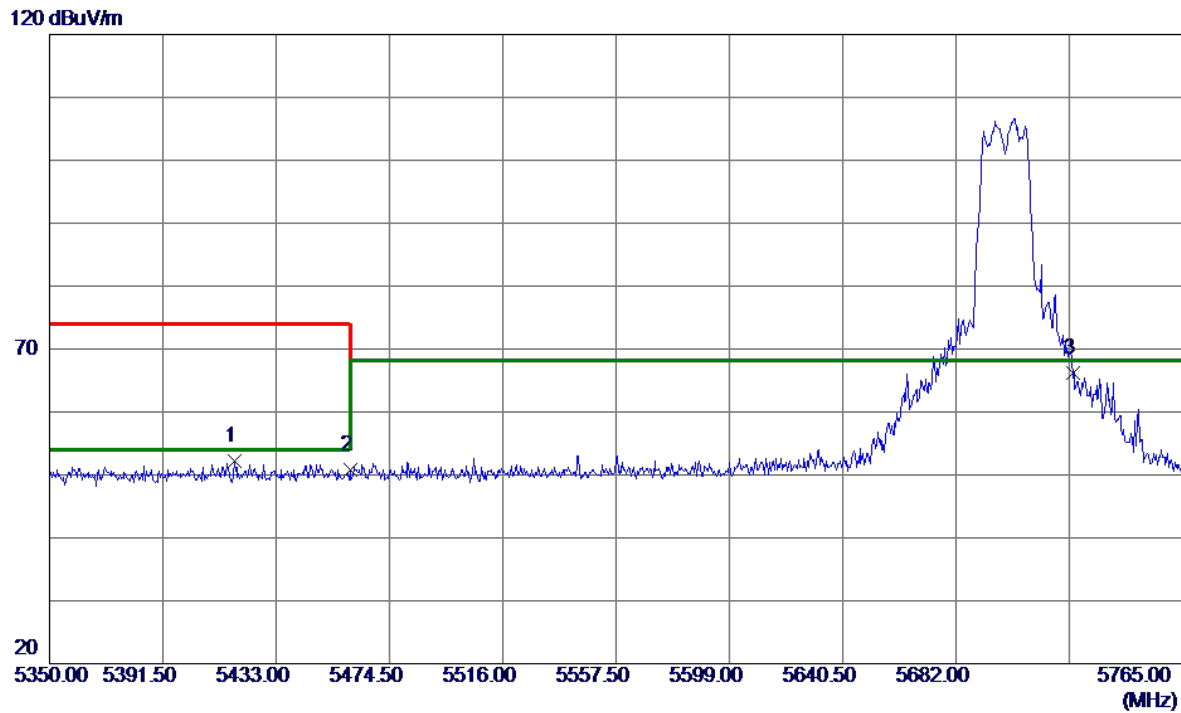

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5417.6450	40.40	11.73	52.13	74.00	-21.87	Peak	
2	5460.0000	38.96	11.75	50.71	74.00	-23.29	Peak	
3 *	5725.0000	53.99	12.18	66.17	68.20	-2.03	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

86.9 dBuV/m

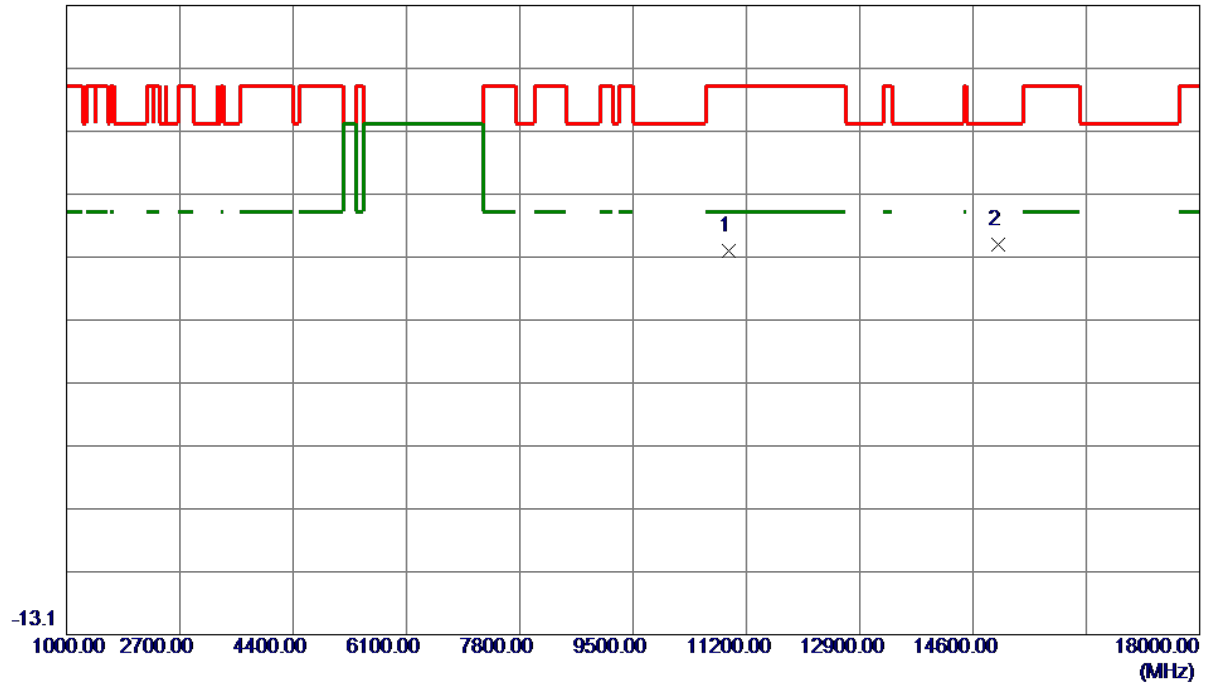

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10929.7000	38.43	9.54	47.97	74.00	-26.03	Peak	
2 *	14980.8000	39.63	9.33	48.96	68.20	-19.24	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5500 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

120 dBuV/m

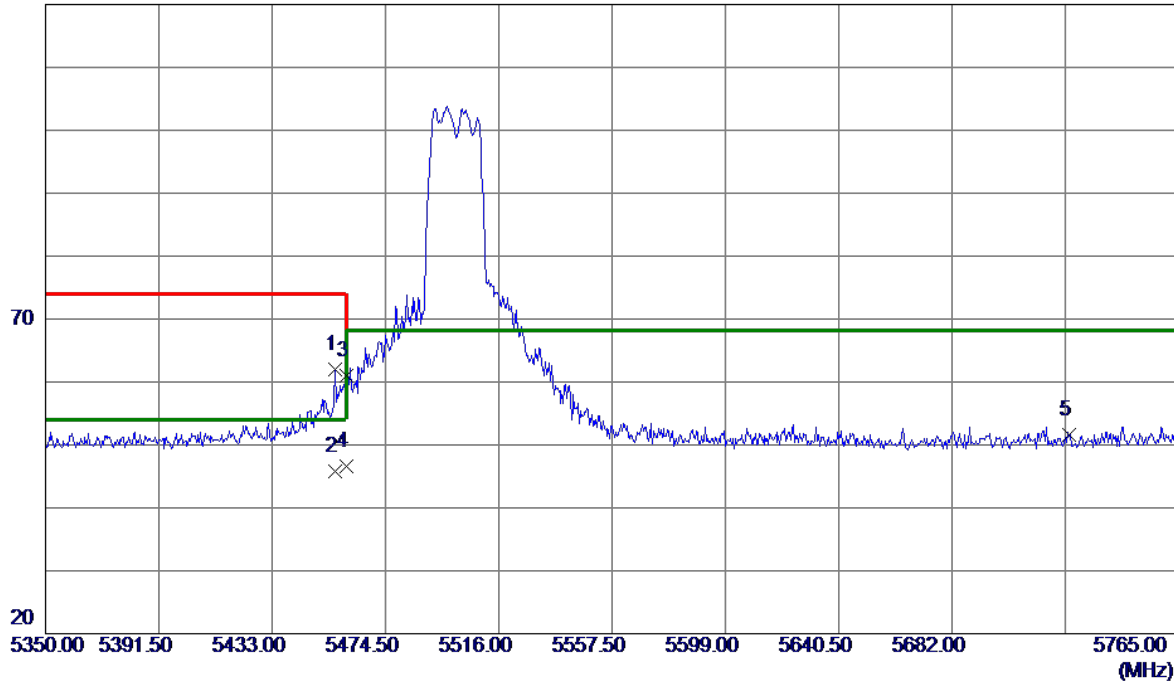

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5456.2400	50.16	11.75	61.91	74.00	-12.09	Peak	
2	5456.2400	34.03	11.75	45.78	54.00	-8.22	AVG	
3	5460.0000	49.31	11.75	61.06	74.00	-12.94	Peak	
4 *	5460.0000	34.80	11.75	46.55	54.00	-7.45	AVG	
5	5725.0000	39.36	12.18	51.54	68.20	-16.66	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5500 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

86.9 dBuV/m

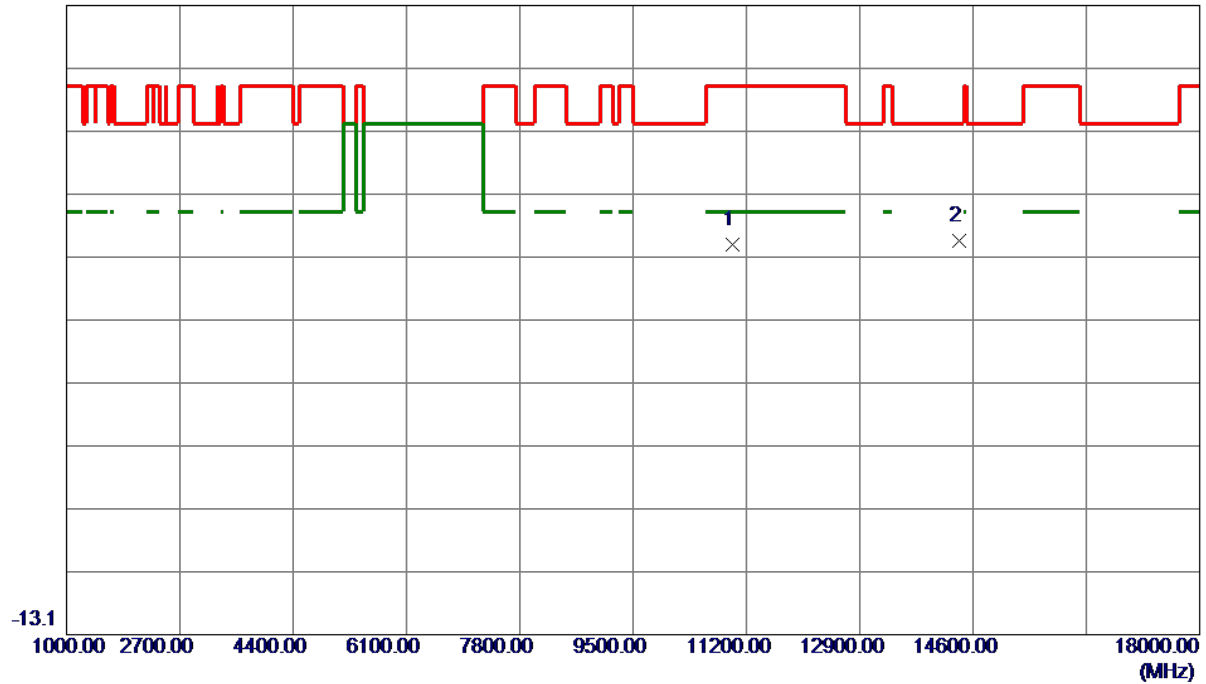

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11000.2500	39.34	9.56	48.90	74.00	-25.10	Peak	
2 *	14395.1500	39.41	10.18	49.59	68.20	-18.61	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5500 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

120 dBuV/m

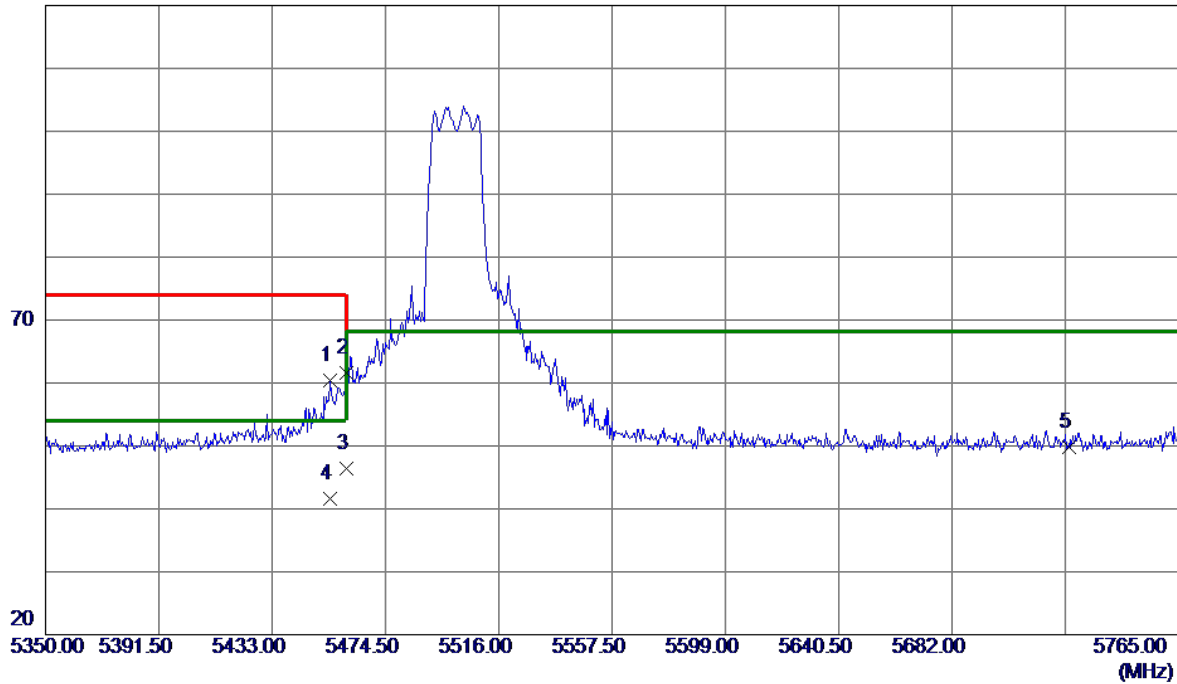


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5454.1650	48.62	11.75	60.37	74.00	-13.63	Peak	
2	5460.0000	49.84	11.75	61.59	74.00	-12.41	Peak	
3 *	5460.0000	34.58	11.75	46.33	54.00	-7.67	AVG	
4	5454.1650	29.76	11.75	41.51	54.00	-12.49	AVG	
5	5725.0000	37.60	12.18	49.78	68.20	-18.42	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5500 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

86.9 dBuV/m

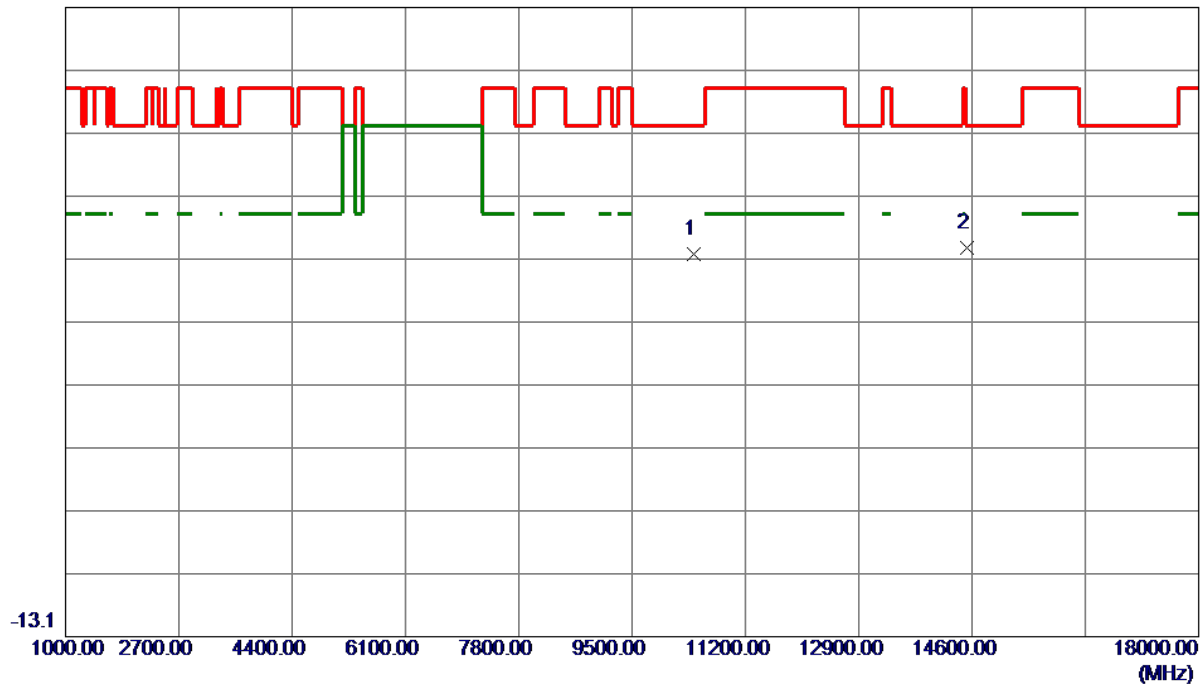


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10427.3500	38.49	9.29	47.78	68.20	-20.42	Peak	
2 *	14517.5500	38.49	10.26	48.75	68.20	-19.45	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5580 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

86.9 dBuV/m

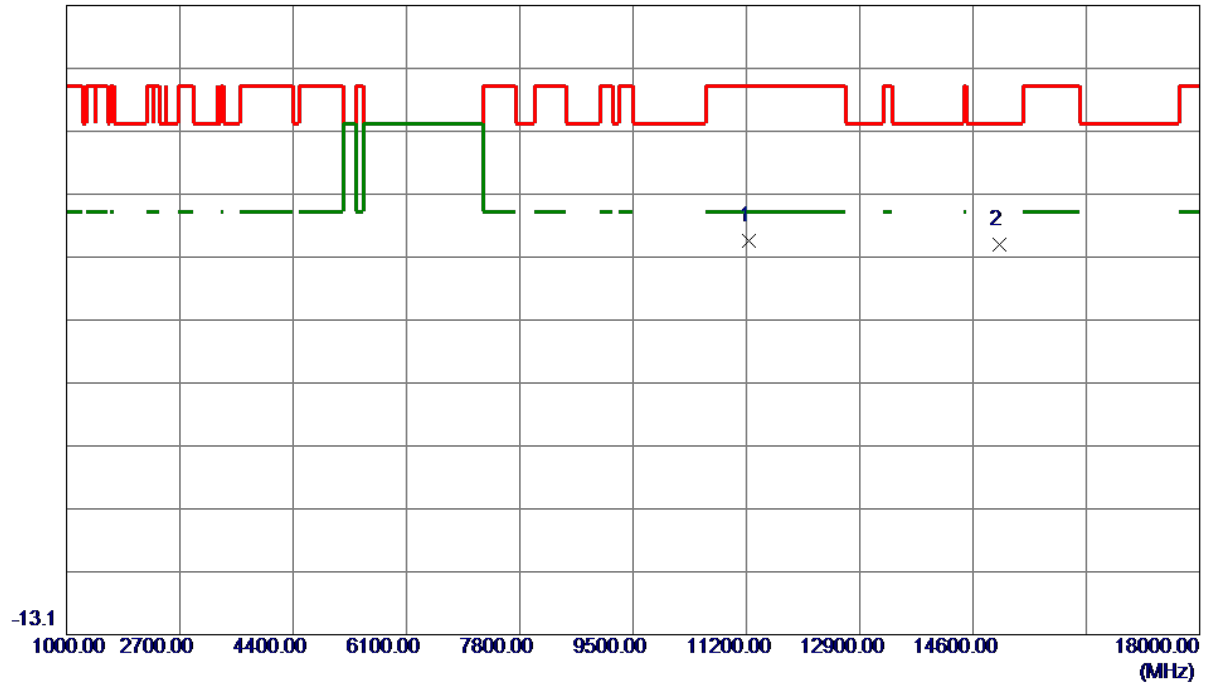


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11229.7500	39.90	9.66	49.56	74.00	-24.44	Peak	
2 *	15005.4500	39.66	9.27	48.93	68.20	-19.27	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5580 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

86.9 dBuV/m

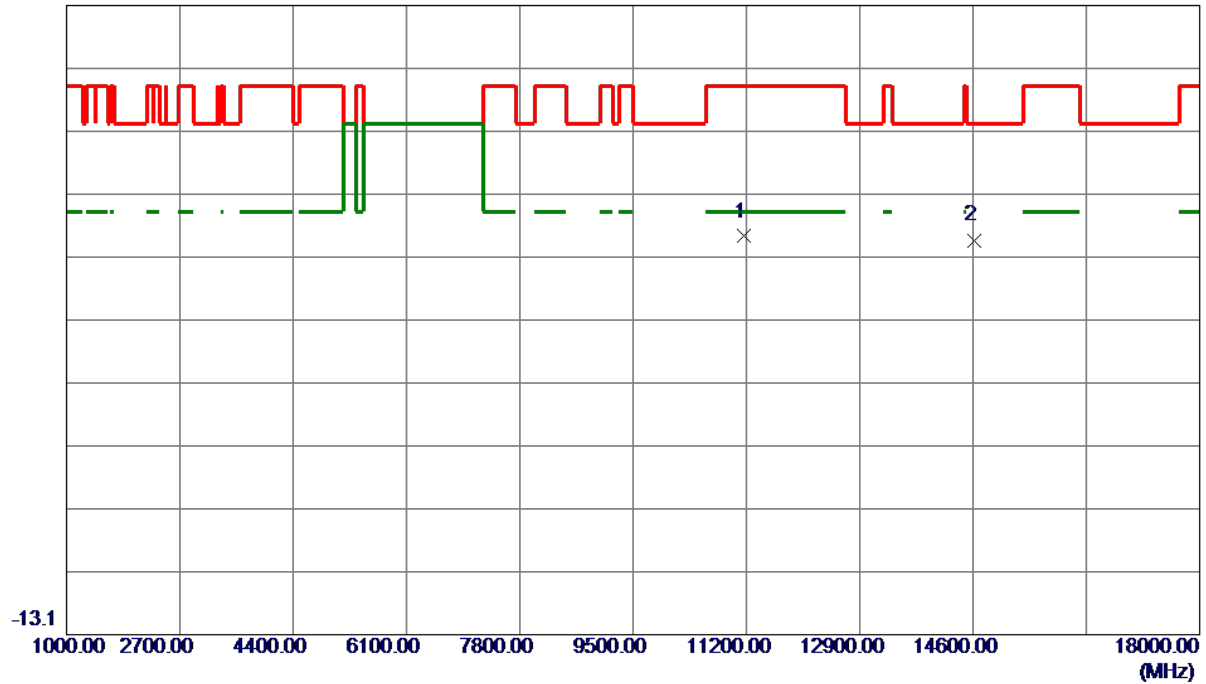

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11160.0500	40.57	9.63	50.20	74.00	-23.80	Peak	
2 *	14612.7500	39.53	10.07	49.60	68.20	-18.60	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

110 dBuV/m

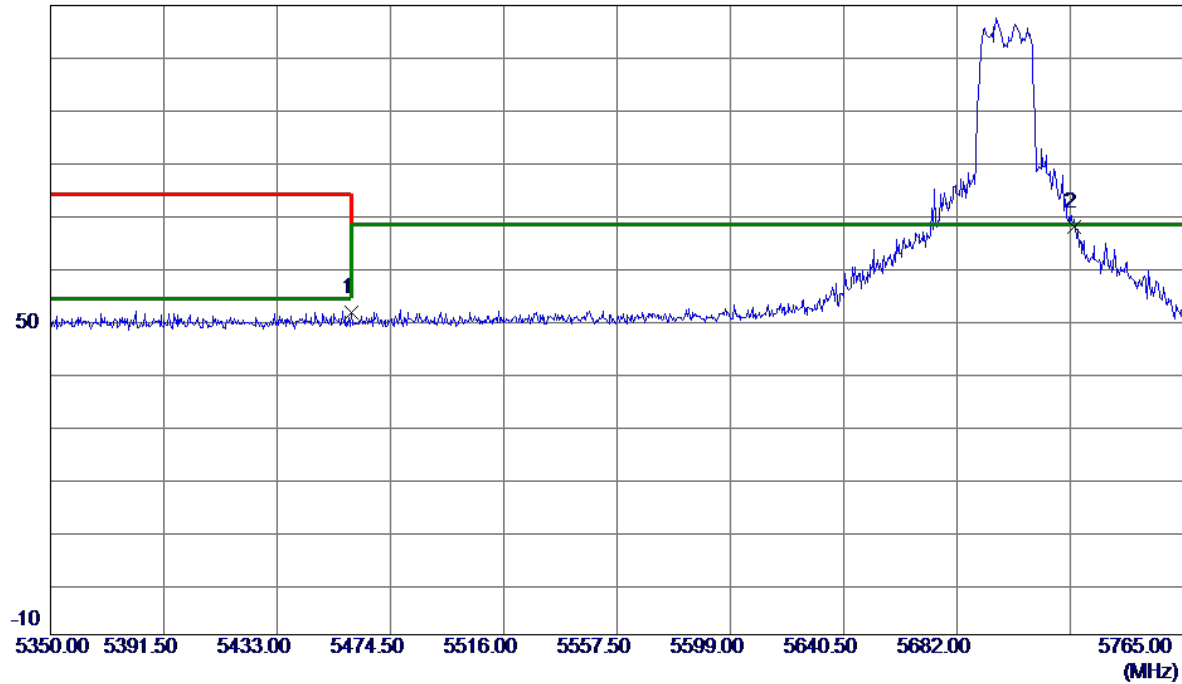


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	42.41	8.95	51.36	74.00	-22.64	Peak	
2 *	5725.0000	58.35	9.34	67.69	68.20	-0.51	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

86.9 dBuV/m

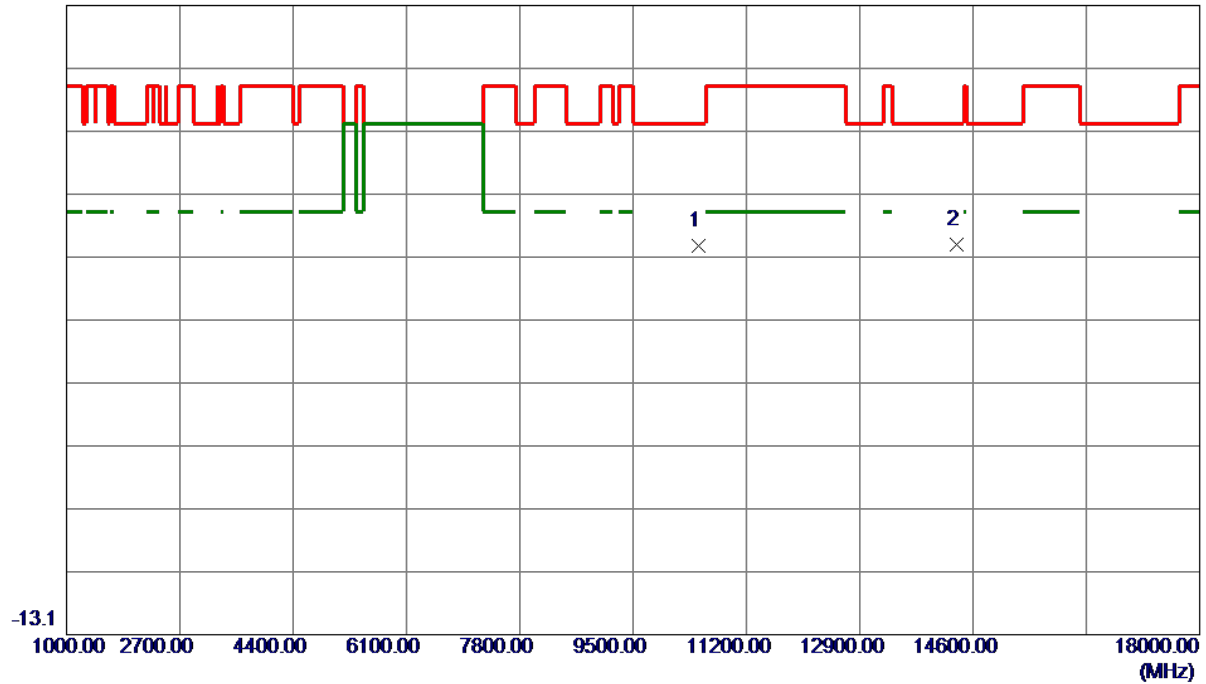


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10484.3000	39.25	9.38	48.63	68.20	-19.57	Peak	
2 *	14350.9500	38.83	10.14	48.97	68.20	-19.23	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

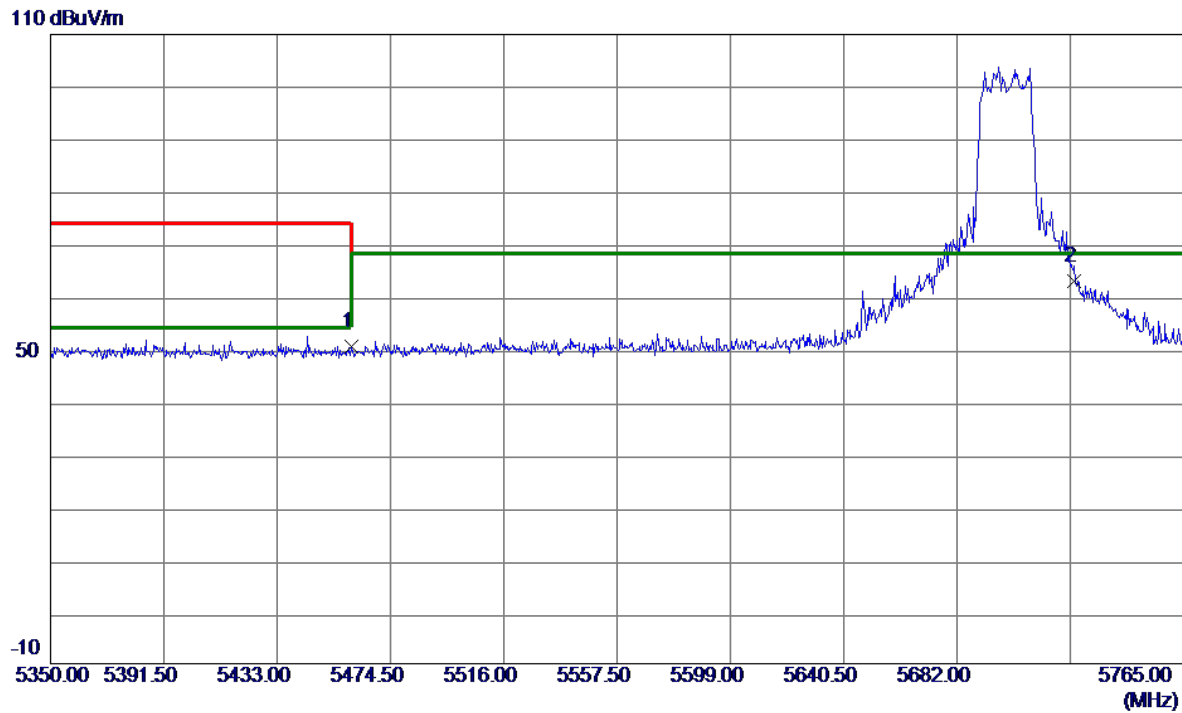


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	41.63	8.95	50.58	74.00	-23.42	Peak	
2 *	5725.0000	53.71	9.34	63.05	68.20	-5.15	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

86.9 dBuV/m

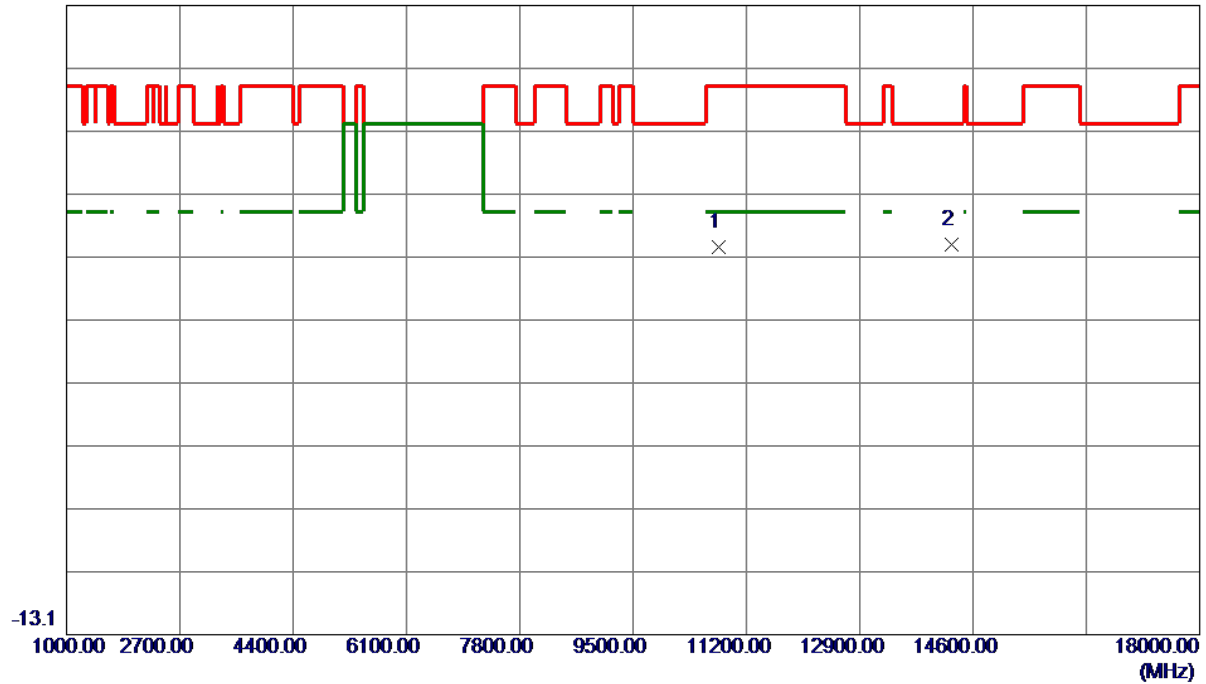

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10778.4000	38.98	9.49	48.47	74.00	-25.53	Peak	
2 *	14275.3000	38.83	10.05	48.88	68.20	-19.32	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

120 dBuV/m

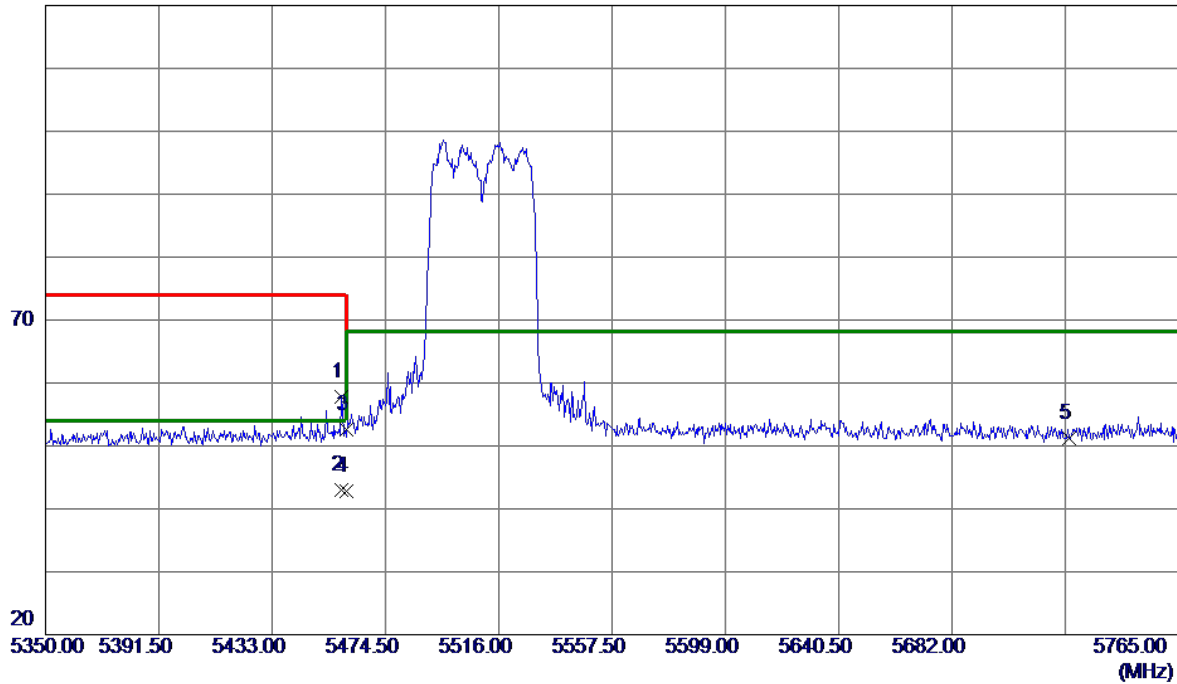

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5458.5230	46.02	11.75	57.77	74.00	-16.23	Peak	
2 *	5458.5230	31.19	11.75	42.94	54.00	-11.06	AVG	
3	5460.0000	40.76	11.75	52.51	74.00	-21.49	Peak	
4	5460.0000	31.09	11.75	42.84	54.00	-11.16	AVG	
5	5725.0000	38.98	12.18	51.16	68.20	-17.04	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

86.9 dBuV/m

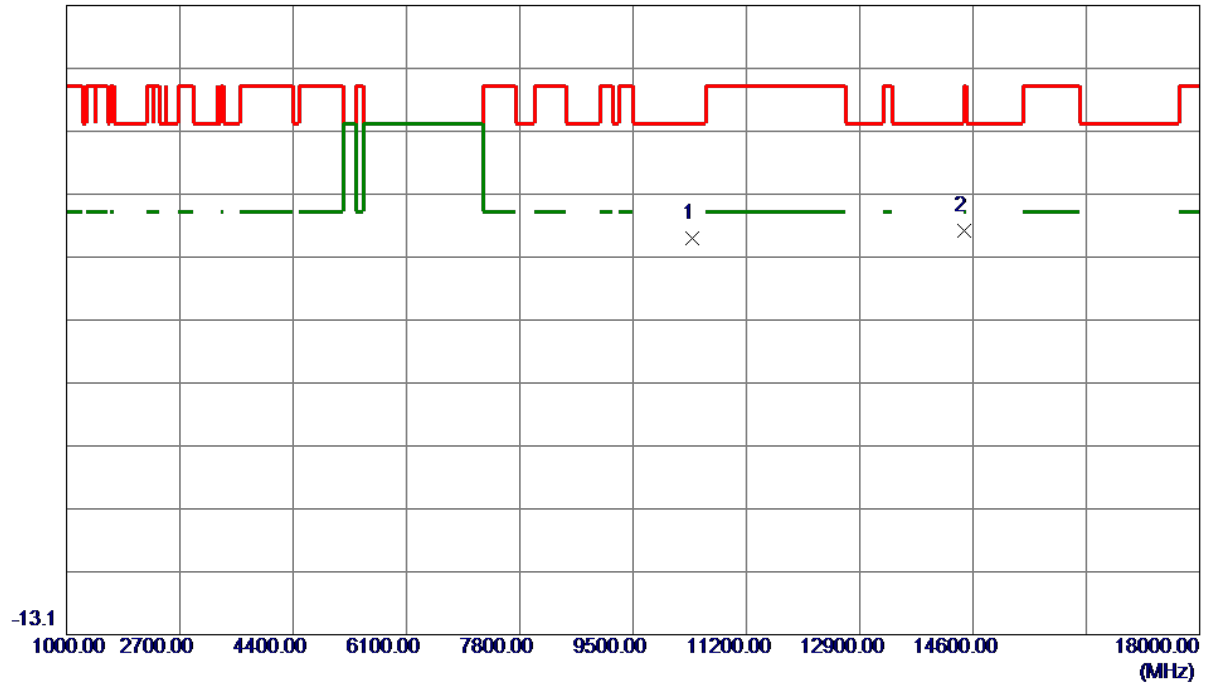


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10386.5500	40.76	9.23	49.99	68.20	-18.21	Peak	
2	14474.2000	40.84	10.27	51.11	74.00	-22.89	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

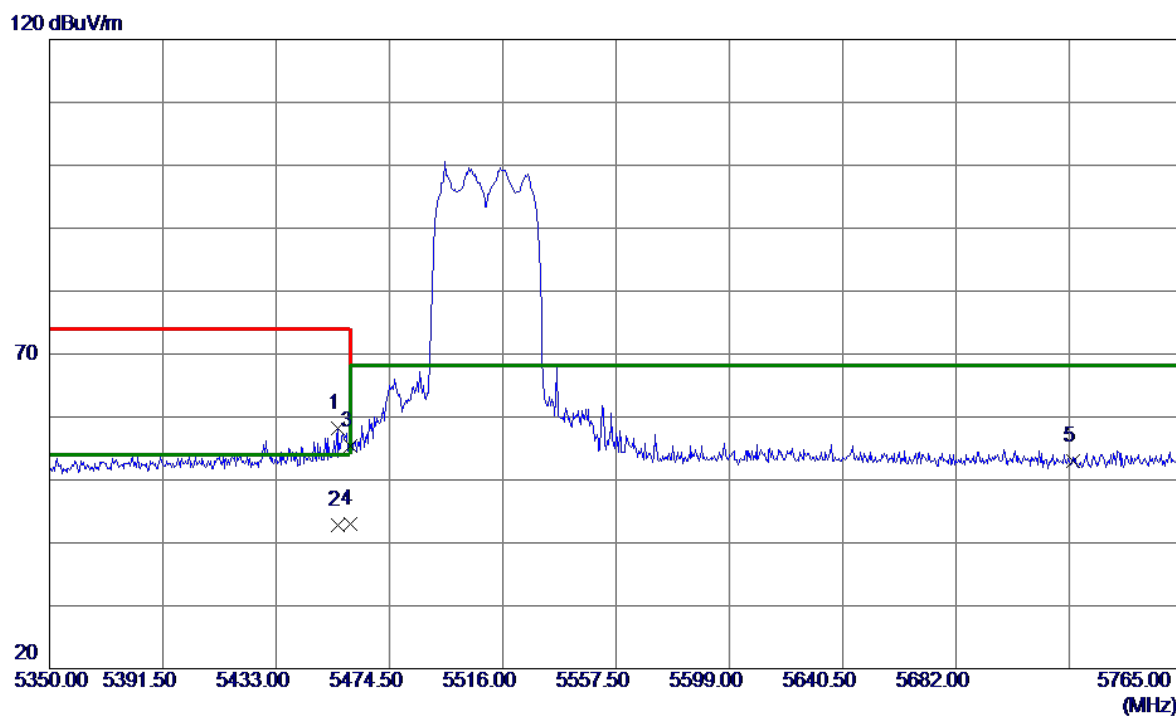


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	5455.6180	46.43	11.75	58.18	74.00	-15.82	Peak	
2	5455.6180	31.14	11.75	42.89	54.00	-11.11	AVG	
3	5460.0000	43.60	11.75	55.35	74.00	-18.65	Peak	
4 *	5460.0000	31.32	11.75	43.07	54.00	-10.93	AVG	
5	5725.0000	40.76	12.18	52.94	68.20	-15.26	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

86.9 dBuV/m

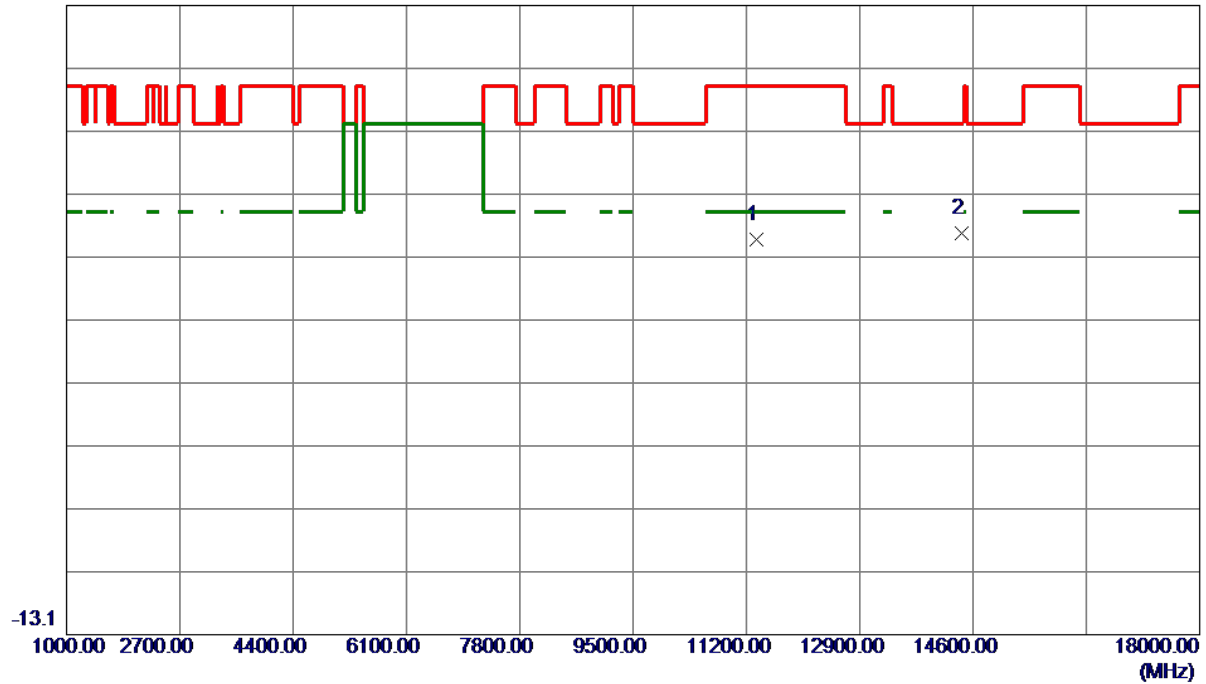


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11353.0000	39.97	9.72	49.69	74.00	-24.31	Peak	
2 *	14430.0000	40.44	10.22	50.66	68.20	-17.54	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5550 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

86.9 dBuV/m

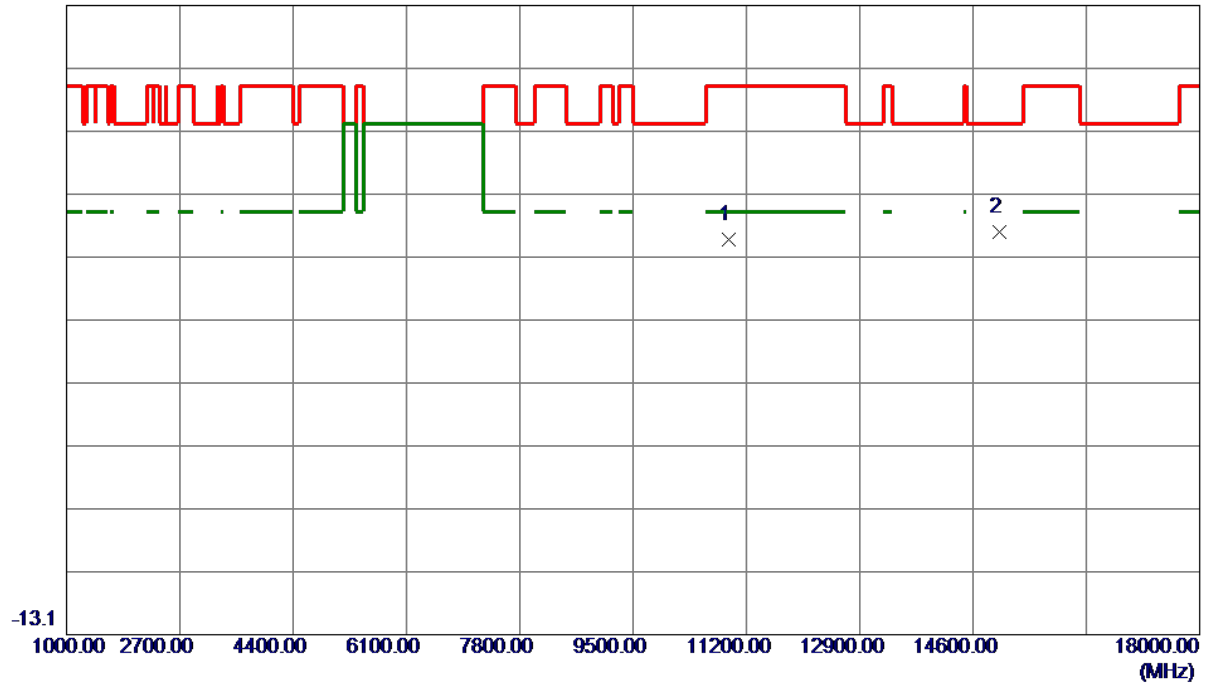

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10928.0000	40.10	9.54	49.64	74.00	-24.36	Peak	
2 *	14996.9500	41.62	9.30	50.92	68.20	-17.28	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5550 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

86.9 dBuV/m

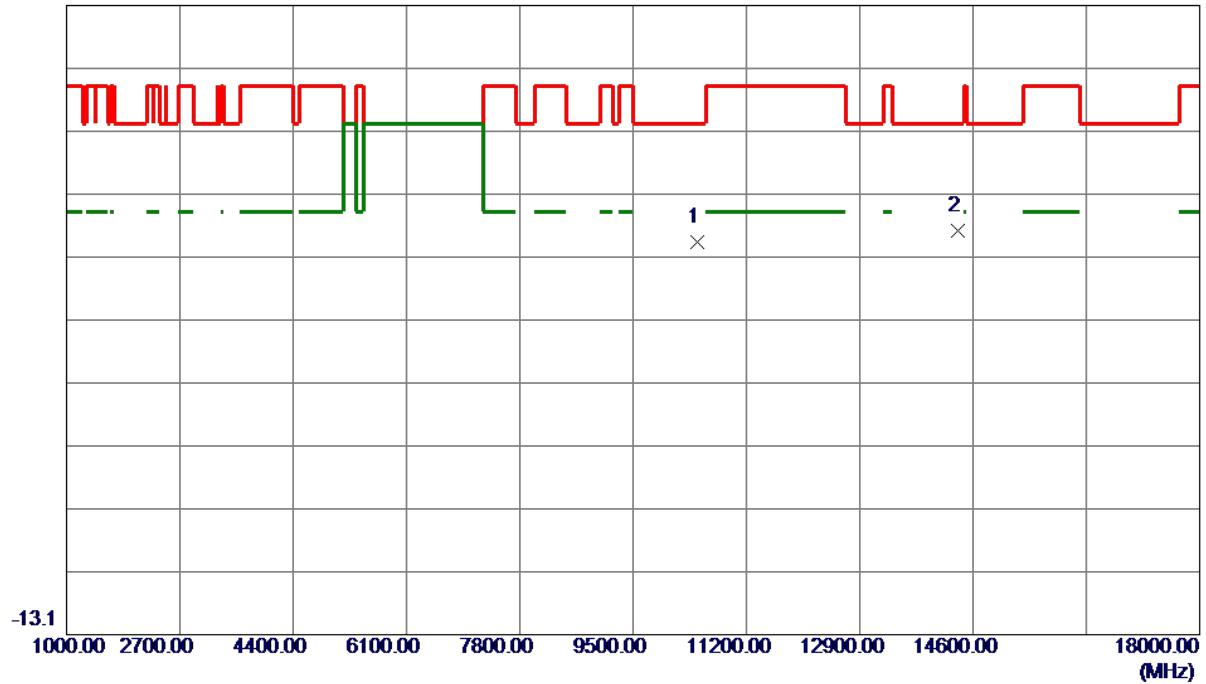

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10472.4000	39.93	9.37	49.30	68.20	-18.90	Peak	
2 *	14376.4500	40.92	10.16	51.08	68.20	-17.12	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

120 dBuV/m

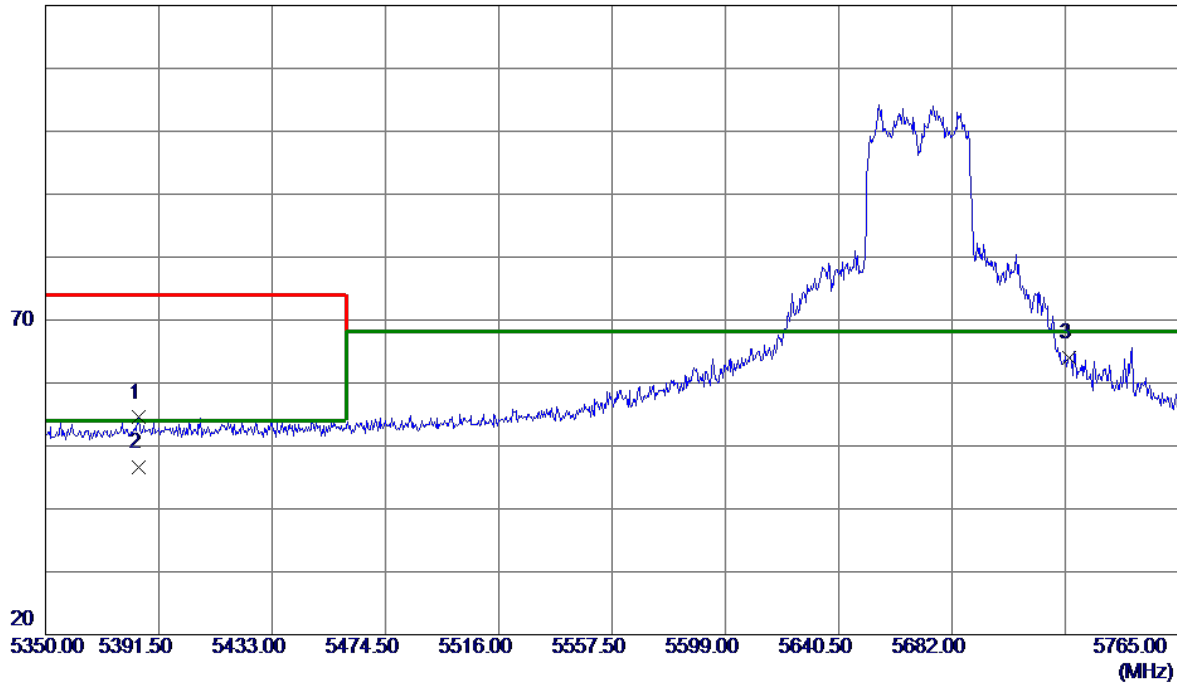

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5384.0299	42.79	11.71	54.50	74.00	-19.50	Peak	
2	5384.0299	34.96	11.71	46.67	54.00	-7.33	AVG	
3 *	5725.0000	51.80	12.18	63.98	68.20	-4.22	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

86.9 dBuV/m

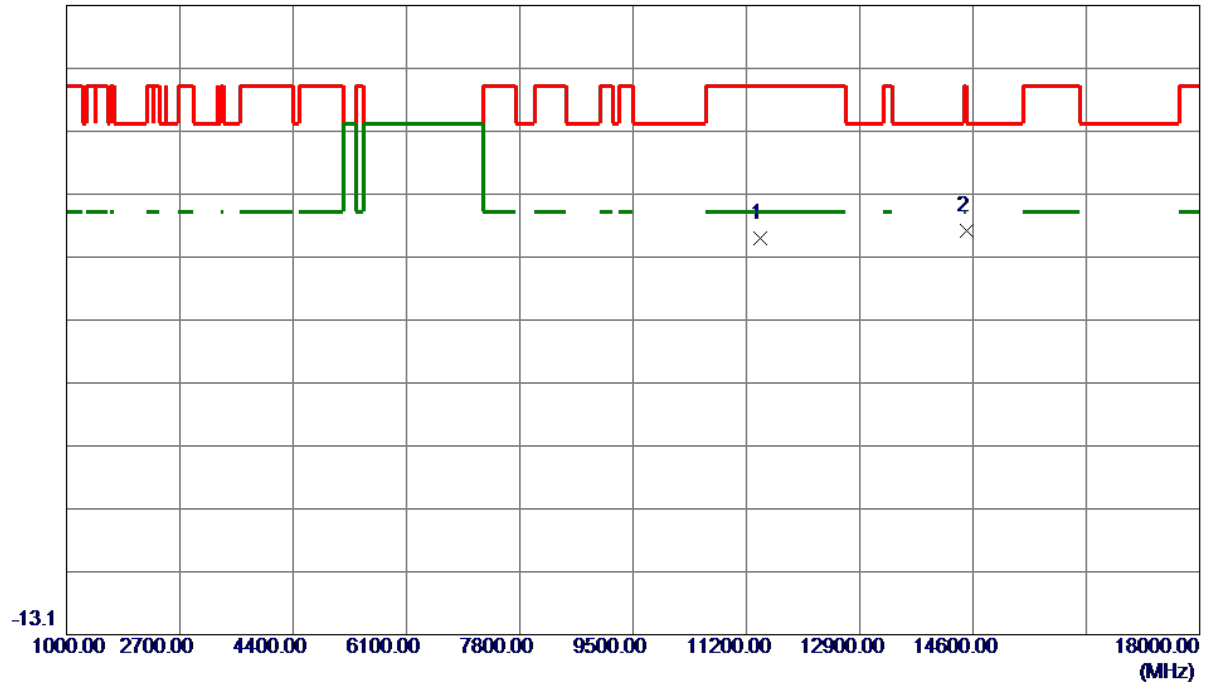

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11400.6000	40.11	9.74	49.85	74.00	-24.15	Peak	
2 *	14502.2500	40.83	10.30	51.13	68.20	-17.07	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

110 dBuV/m

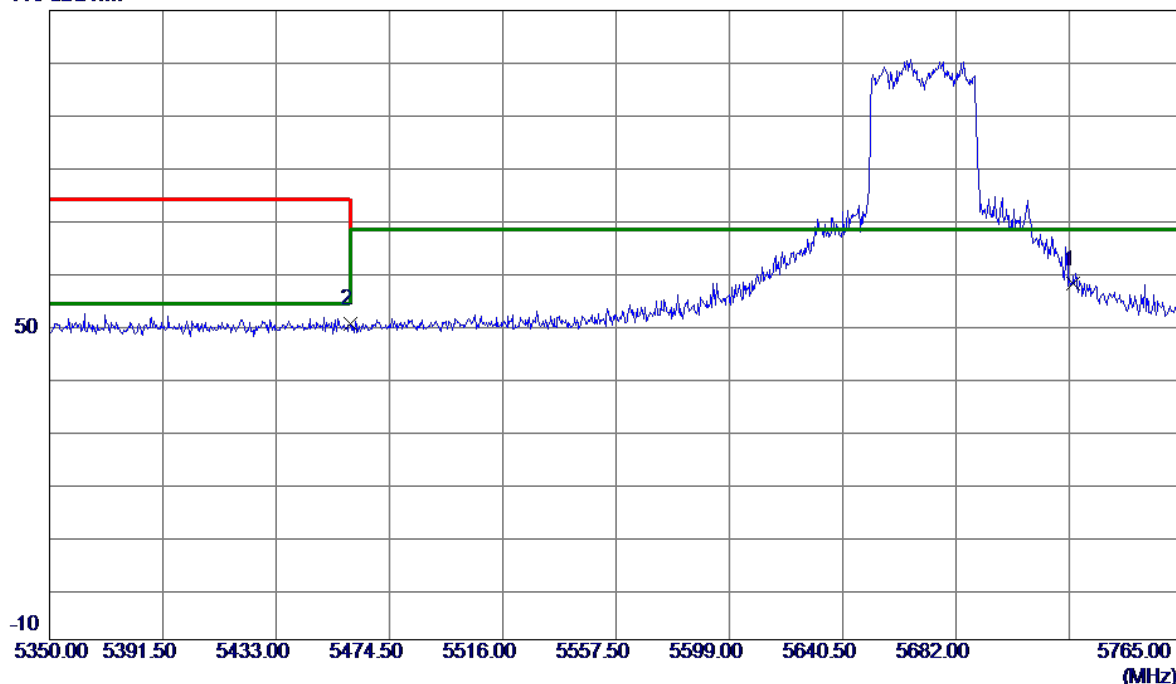


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5725.0000	48.46	9.34	57.80	68.20	-10.40	Peak	
2	5460.0000	41.20	8.95	50.15	74.00	-23.85	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

86.9 dBuV/m

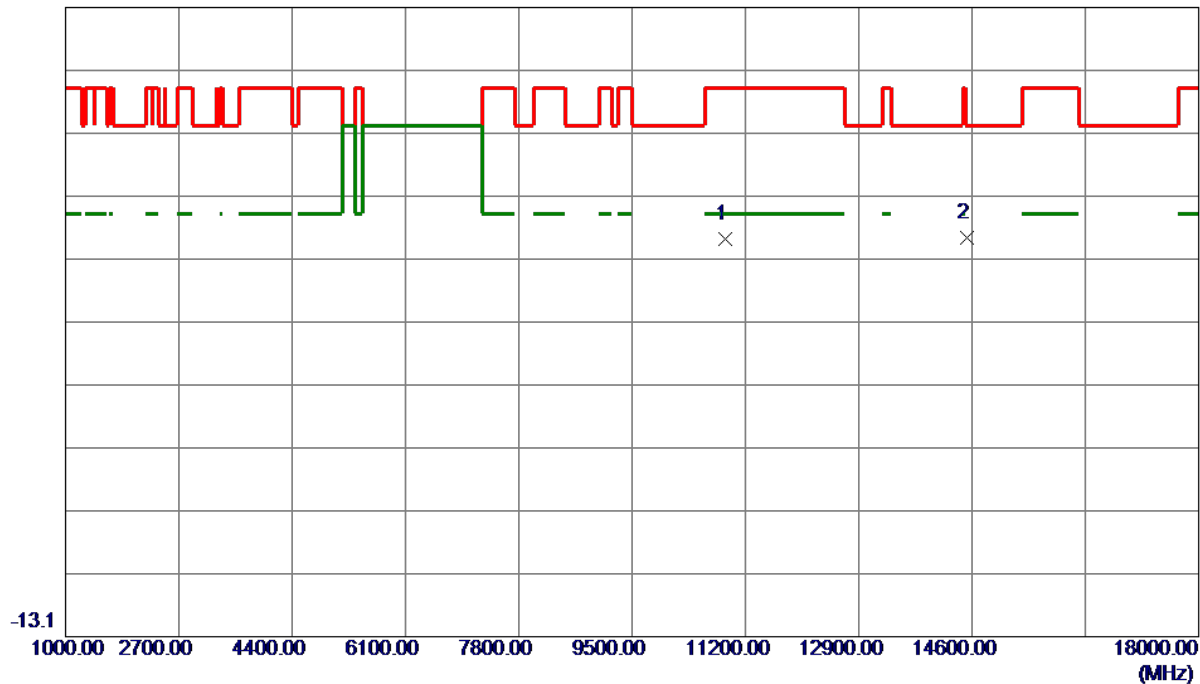


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10898.2500	40.53	9.53	50.06	74.00	-23.94	Peak	
2 *	14521.8000	39.96	10.26	50.22	68.20	-17.98	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

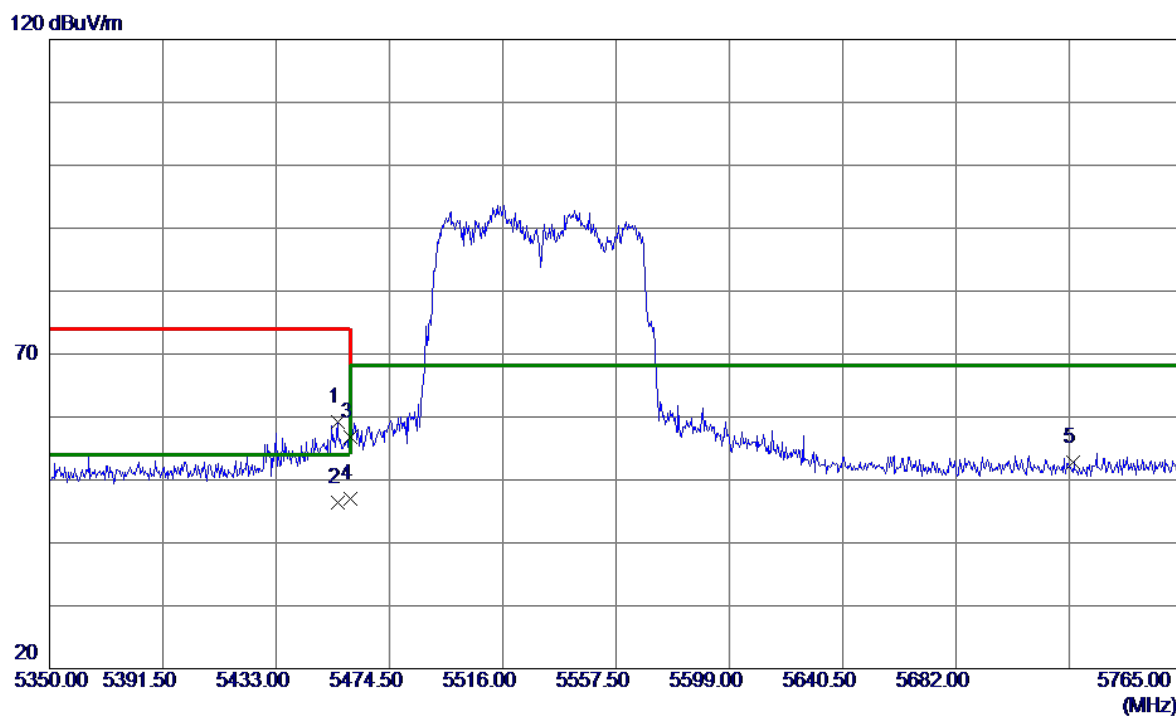


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	5455.6380	47.44	11.75	59.19	74.00	-14.81	Peak	
2	5455.6380	34.67	11.75	46.42	54.00	-7.58	AVG	
3	5460.0000	44.98	11.75	56.73	74.00	-17.27	Peak	
4 *	5460.0000	35.30	11.75	47.05	54.00	-6.95	AVG	
5	5725.0000	40.70	12.18	52.88	68.20	-15.32	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

86.9 dBuV/m

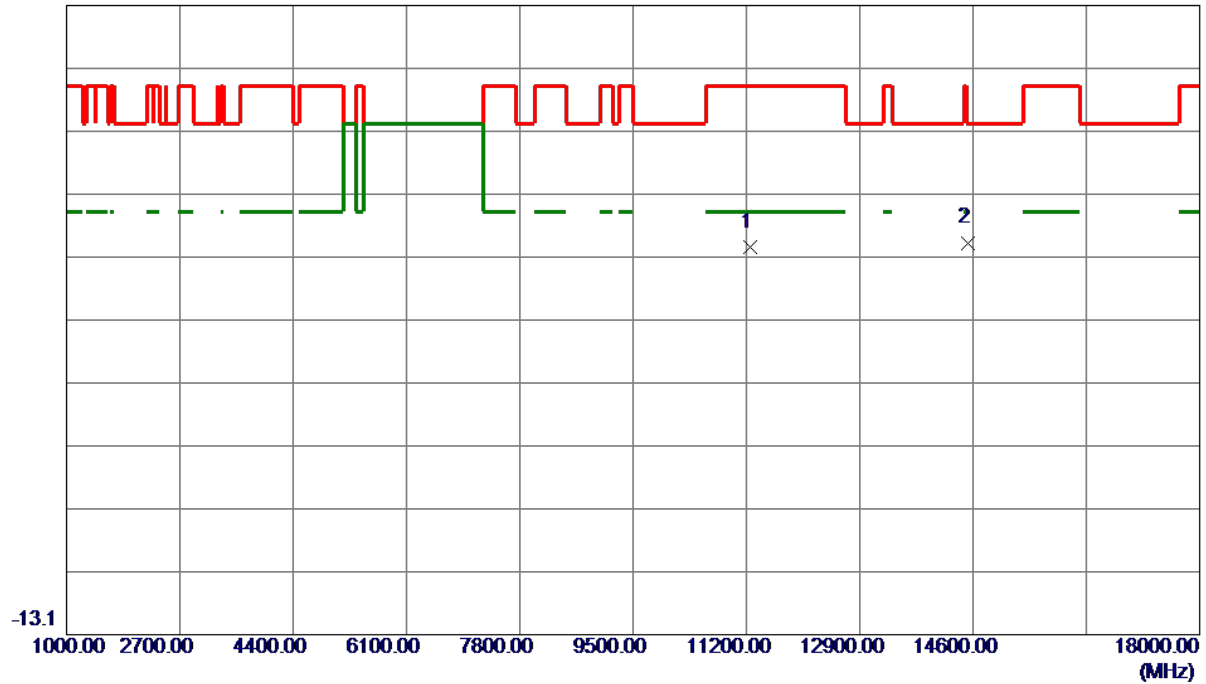

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11256.1000	38.89	9.68	48.57	74.00	-25.43	Peak	
2 *	14523.5000	38.95	10.25	49.20	68.20	-19.00	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

120 dBuV/m

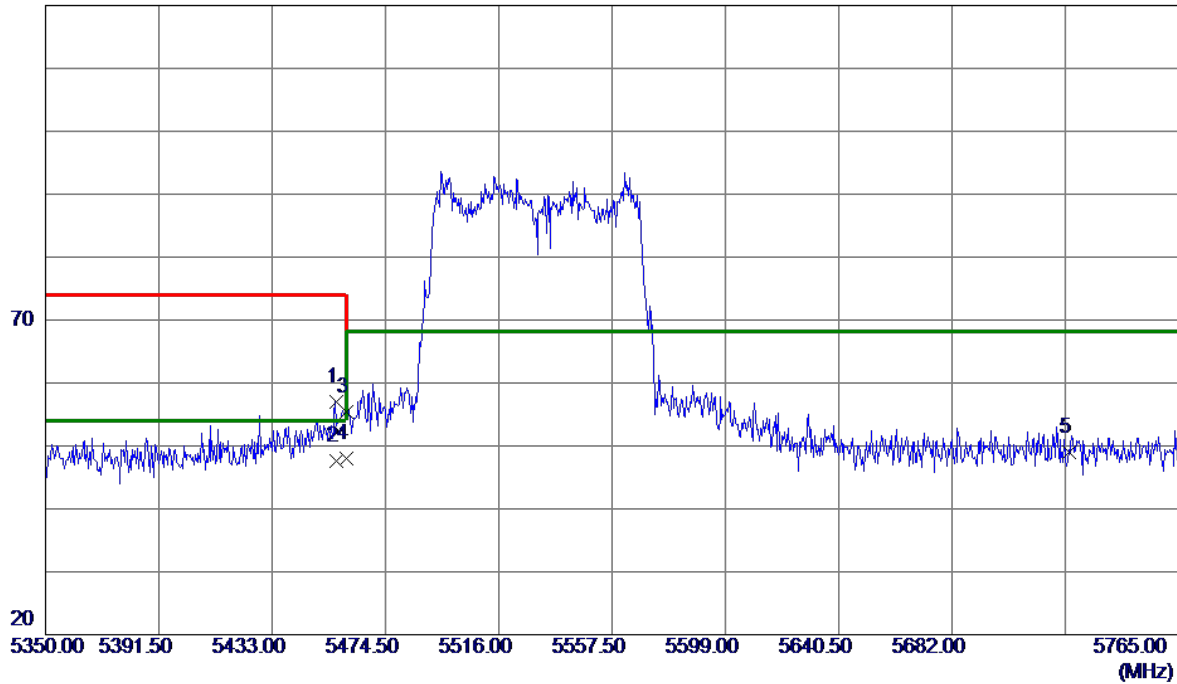

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5456.4890	45.29	11.75	57.04	74.00	-16.96	Peak	
2	5456.4890	35.92	11.75	47.67	54.00	-6.33	AVG	
3	5460.0000	43.70	11.75	55.45	74.00	-18.55	Peak	
4 *	5460.0000	36.21	11.75	47.96	54.00	-6.04	AVG	
5	5725.0000	36.88	12.18	49.06	68.20	-19.14	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

86.9 dBuV/m

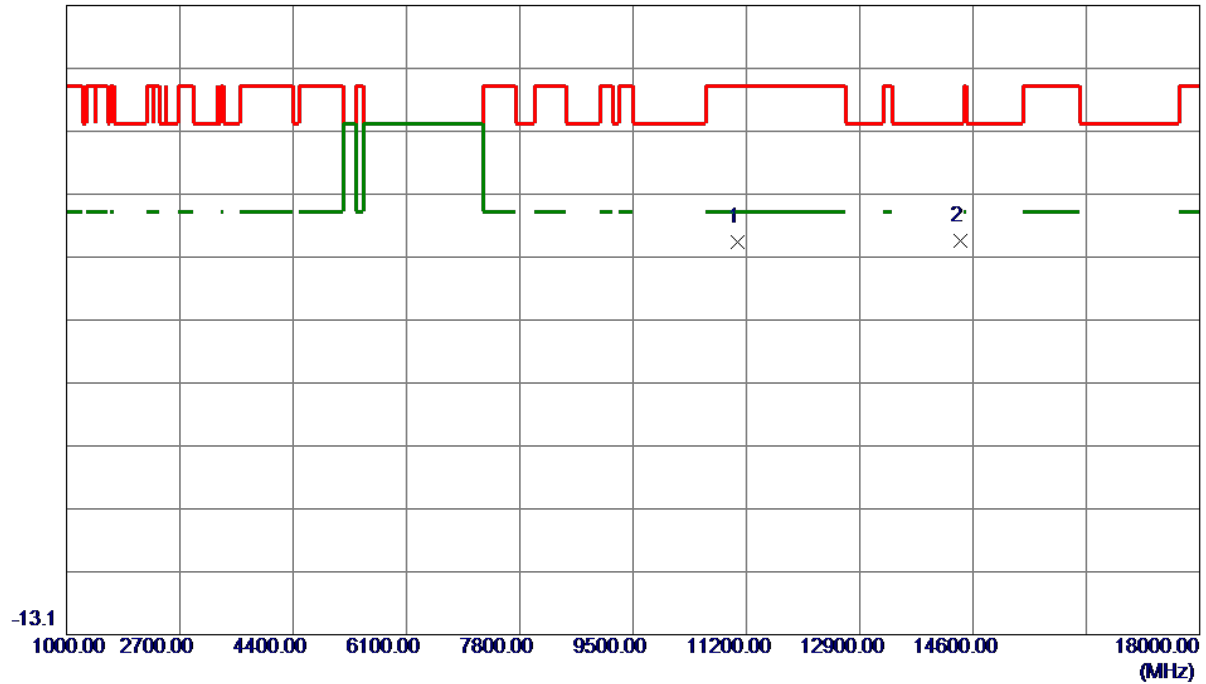


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11058.9000	39.67	9.59	49.26	74.00	-24.74	Peak	
2 *	14411.3000	39.22	10.20	49.42	68.20	-18.78	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

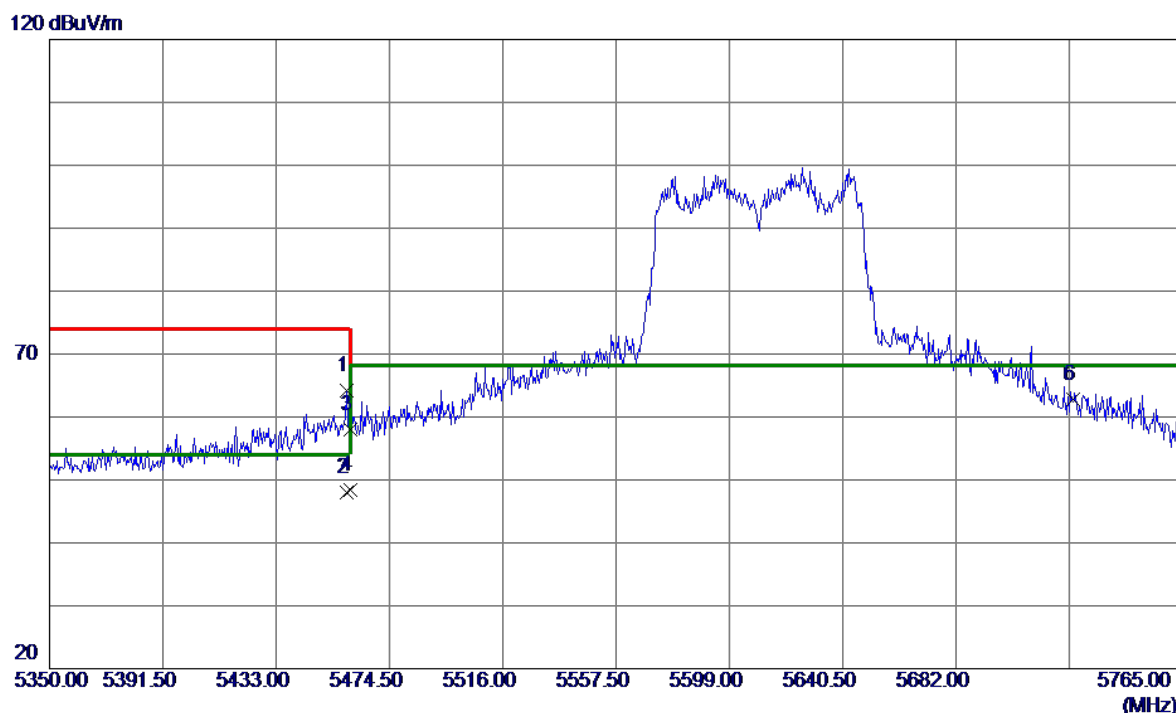


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	5458.9169	52.44	11.75	64.19	74.00	-9.81	Peak	
2	5458.9169	36.24	11.75	47.99	54.00	-6.01	AVG	
3	5460.0000	46.34	11.75	58.09	74.00	-15.91	Peak	
4	5460.0000	36.63	11.75	48.38	54.00	-5.62	AVG	
5 *	5725.0000	50.58	12.18	62.76	68.20	-5.44	Peak	
6	5725.0000	50.58	12.18	62.76	68.20	-5.44	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

86.9 dBuV/m

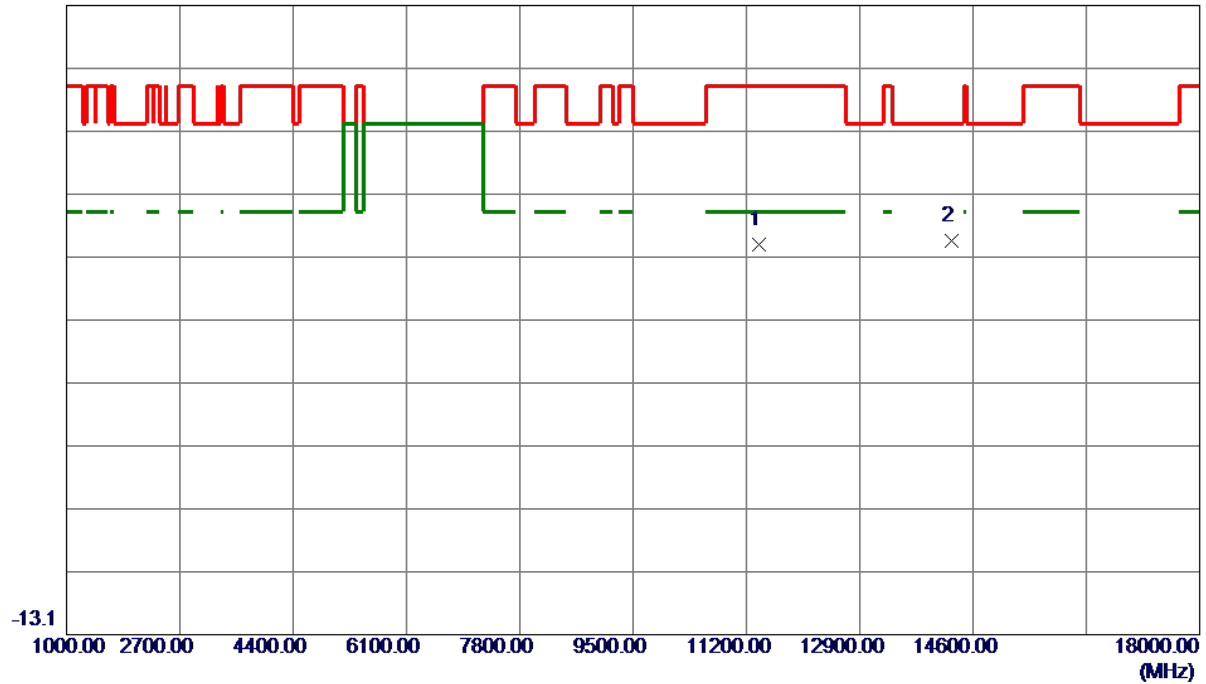

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11381.9000	39.20	9.73	48.93	74.00	-25.07	Peak	
2 *	14282.9500	39.43	10.06	49.49	68.20	-18.71	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

120 dBuV/m

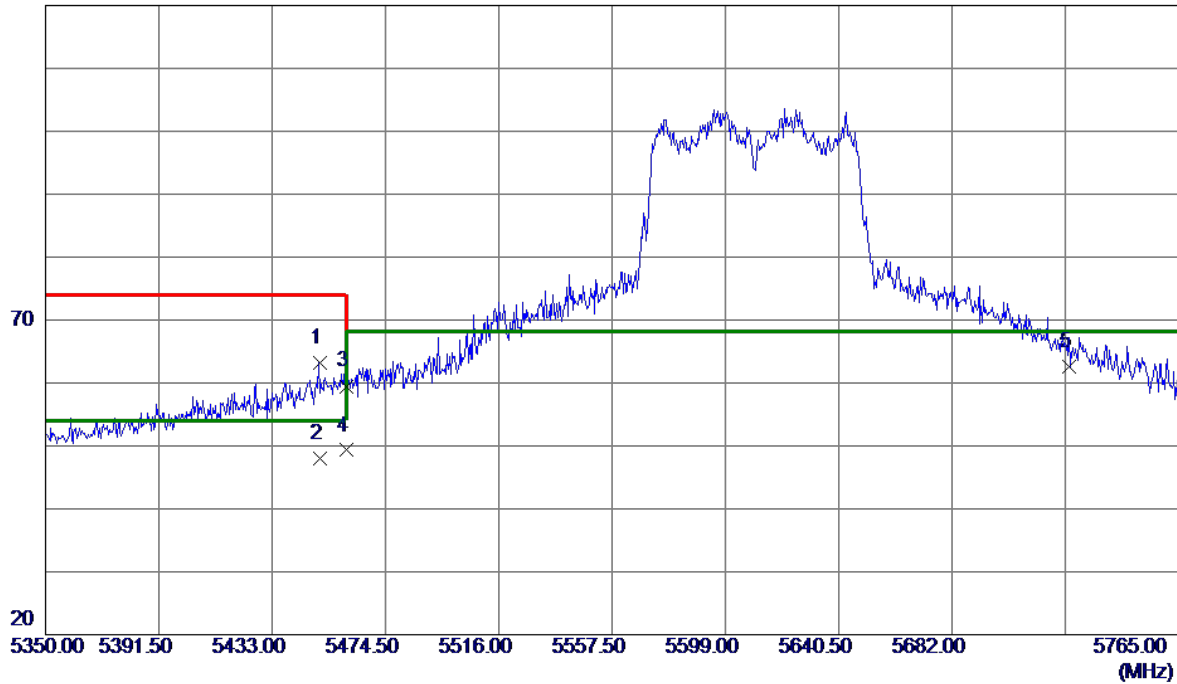

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5450.3260	51.47	11.75	63.22	74.00	-10.78	Peak	
2	5450.3260	36.19	11.75	47.94	54.00	-6.06	AVG	
3	5460.0000	47.75	11.75	59.50	74.00	-14.50	Peak	
4 *	5460.0000	37.55	11.75	49.30	54.00	-4.70	AVG	
5	5725.0000	50.37	12.18	62.55	68.20	-5.65	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

86.9 dBuV/m

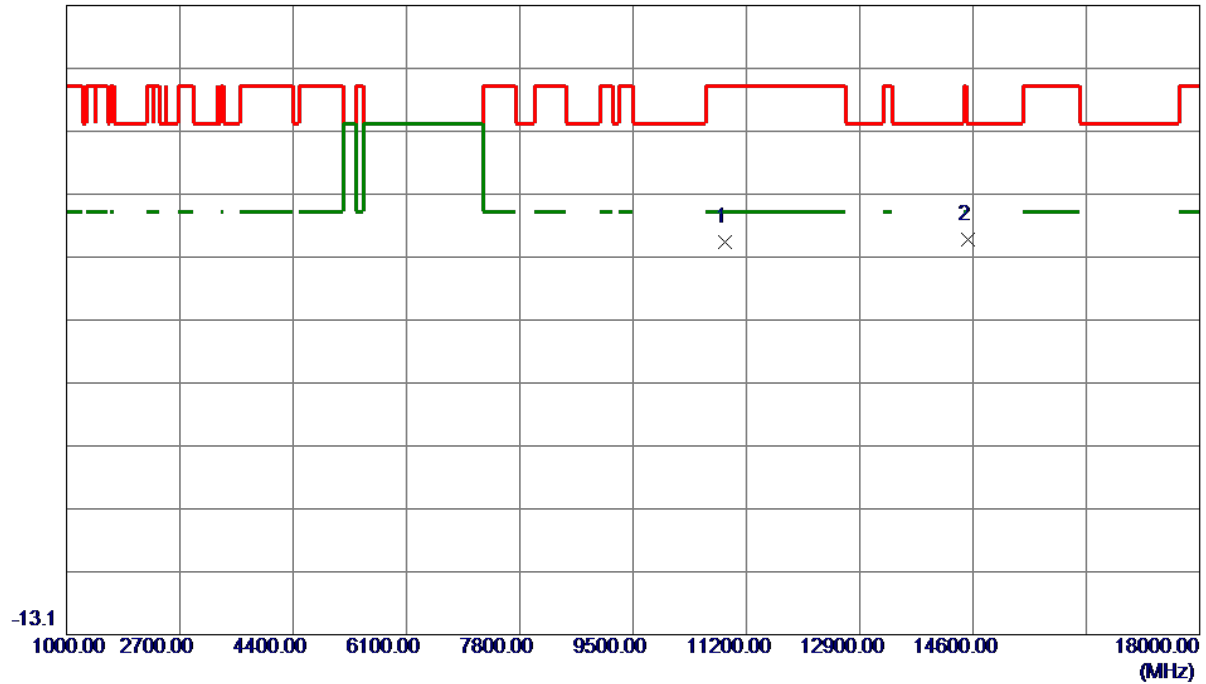


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10878.7000	39.80	9.52	49.32	74.00	-24.68	Peak	
2 *	14520.9500	39.47	10.26	49.73	68.20	-18.47	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5500 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

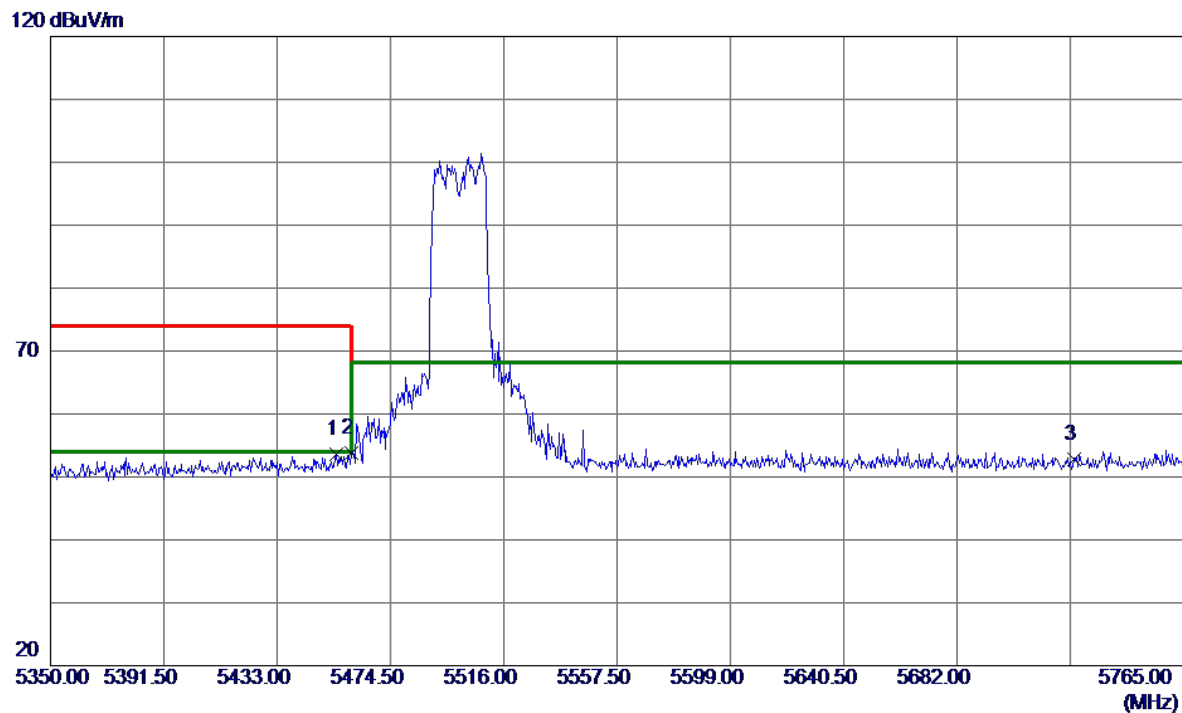

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5454.7670	41.80	11.75	53.55	74.00	-20.45	Peak	
2	5460.0000	42.06	11.75	53.81	74.00	-20.19	Peak	
3 *	5725.0000	40.70	12.18	52.88	68.20	-15.32	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5500 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

86.9 dBuV/m

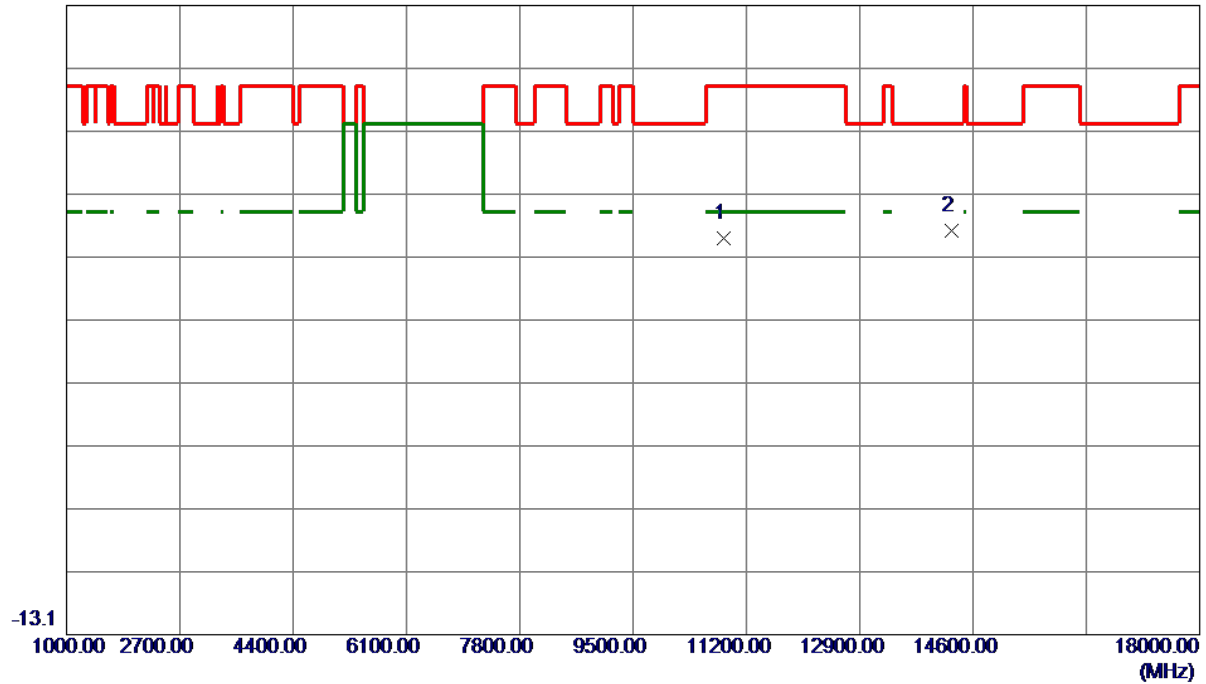

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10866.8000	40.42	9.52	49.94	74.00	-24.06	Peak	
2 *	14283.8000	41.06	10.06	51.12	68.20	-17.08	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5500 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

120 dBuV/m

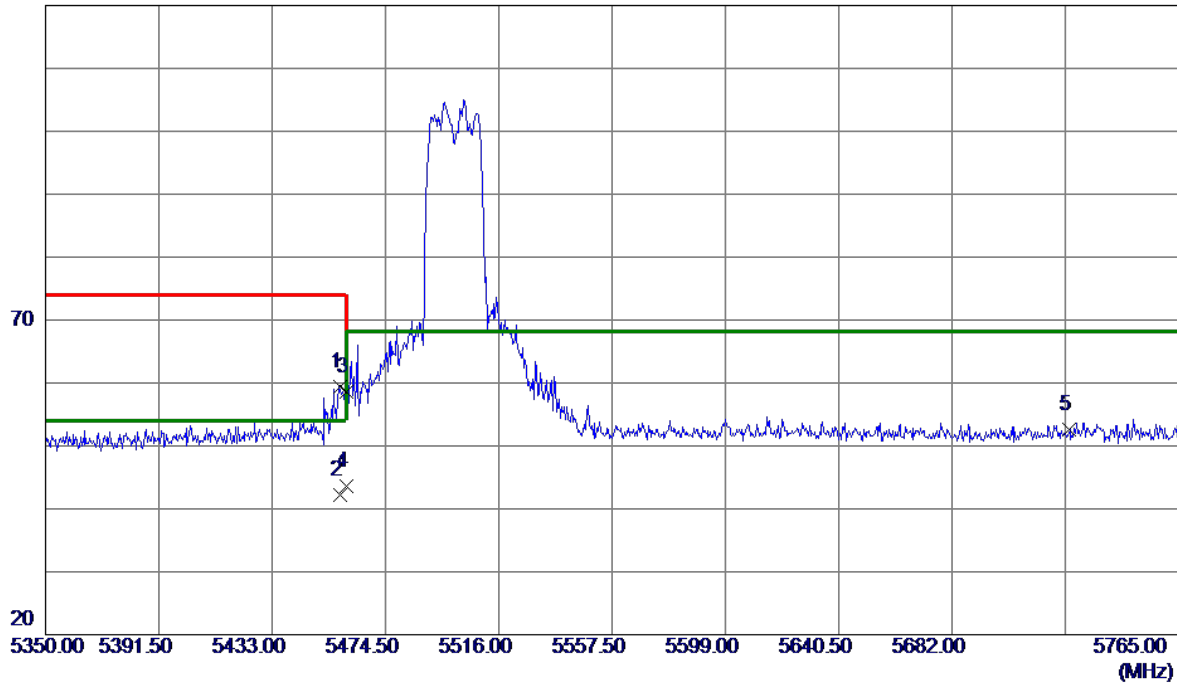

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5457.8790	47.56	11.75	59.31	74.00	-14.69	Peak	
2	5457.8790	30.40	11.75	42.15	54.00	-11.85	AVG	
3	5460.0000	46.83	11.75	58.58	74.00	-15.42	Peak	
4 *	5460.0000	31.78	11.75	43.53	54.00	-10.47	AVG	
5	5725.0000	40.46	12.18	52.64	68.20	-15.56	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5500 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

86.9 dBuV/m

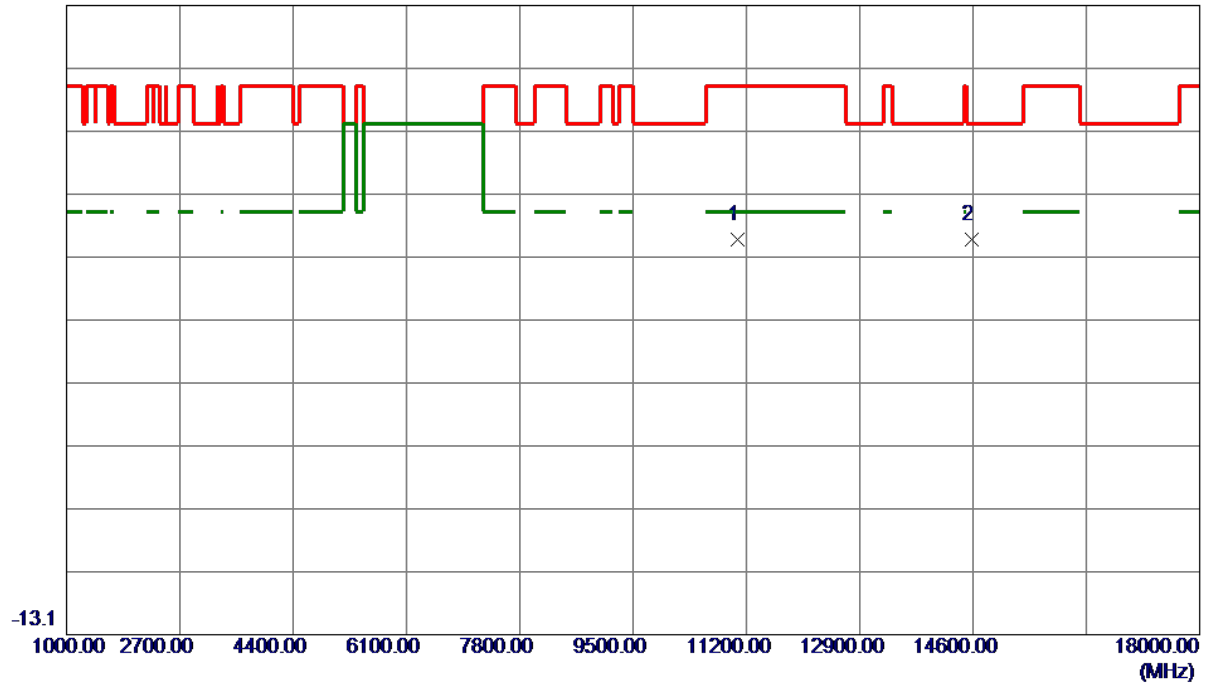

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11066.5500	40.19	9.59	49.78	74.00	-24.22	Peak	
2 *	14588.1000	39.56	10.12	49.68	68.20	-18.52	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5580 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

86.9 dBuV/m

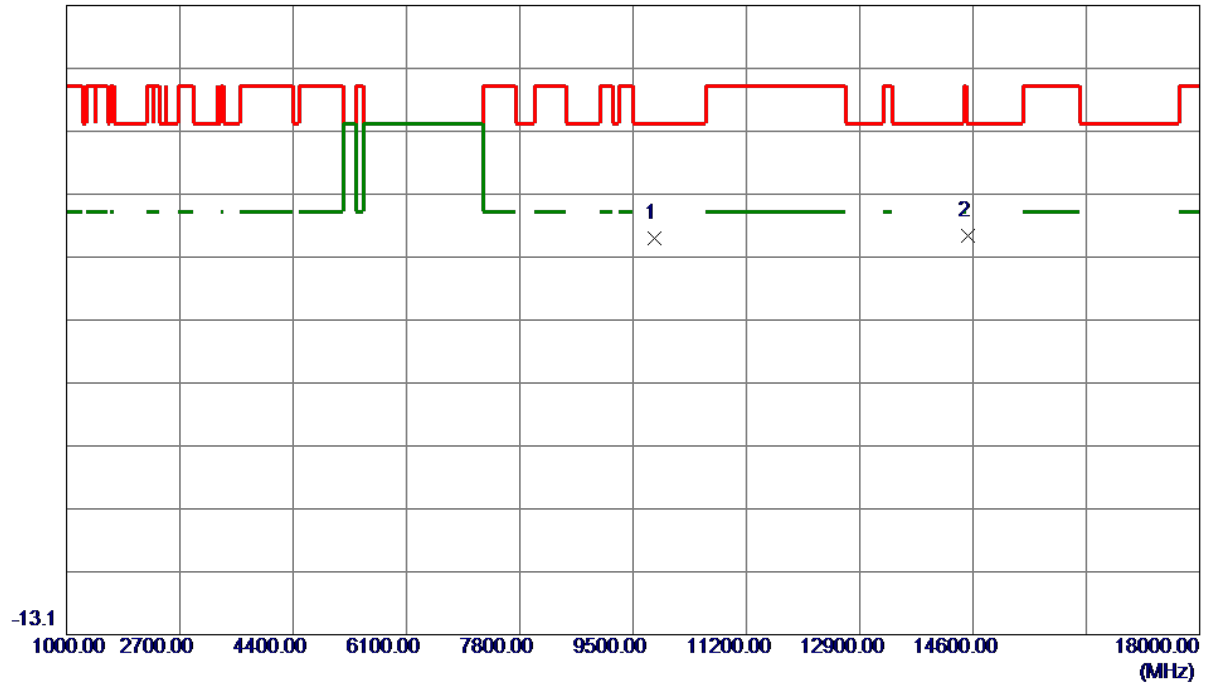

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	9811.9500	41.09	8.78	49.87	68.20	-18.33	Peak	
2 *	14518.4000	40.13	10.26	50.39	68.20	-17.81	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5580 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

86.9 dBuV/m

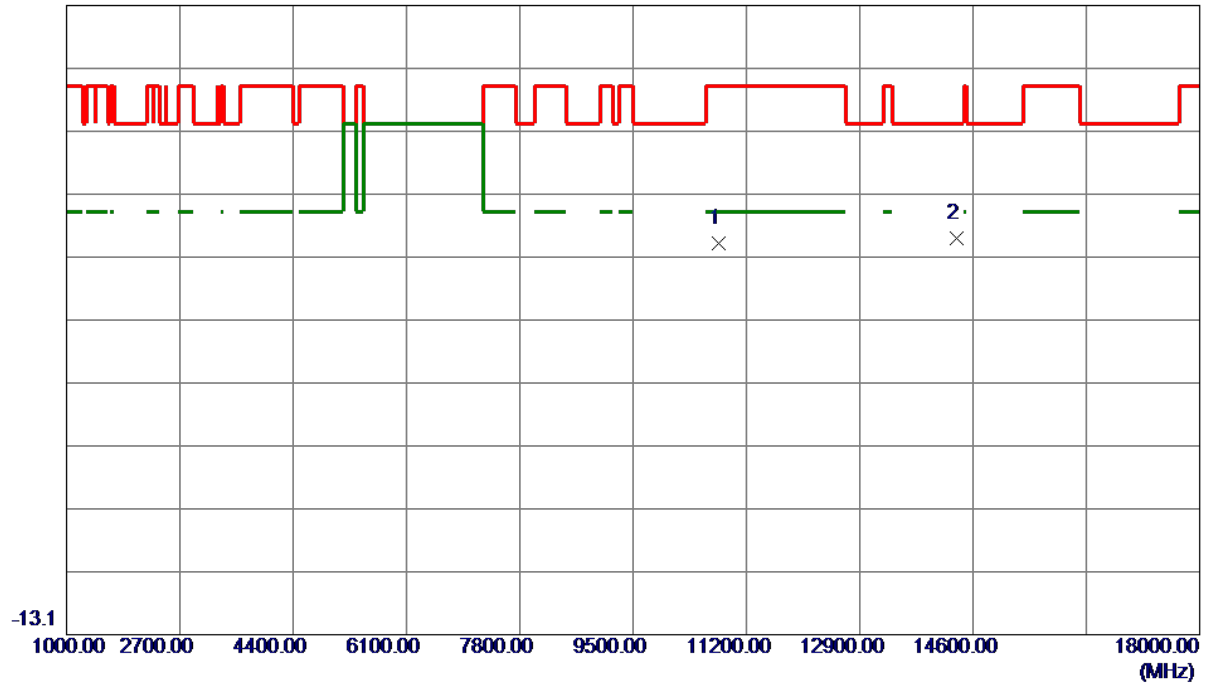


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10780.1000	39.62	9.49	49.11	74.00	-24.89	Peak	
2 *	14356.0500	39.69	10.14	49.83	68.20	-18.37	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5700 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

110 dBuV/m

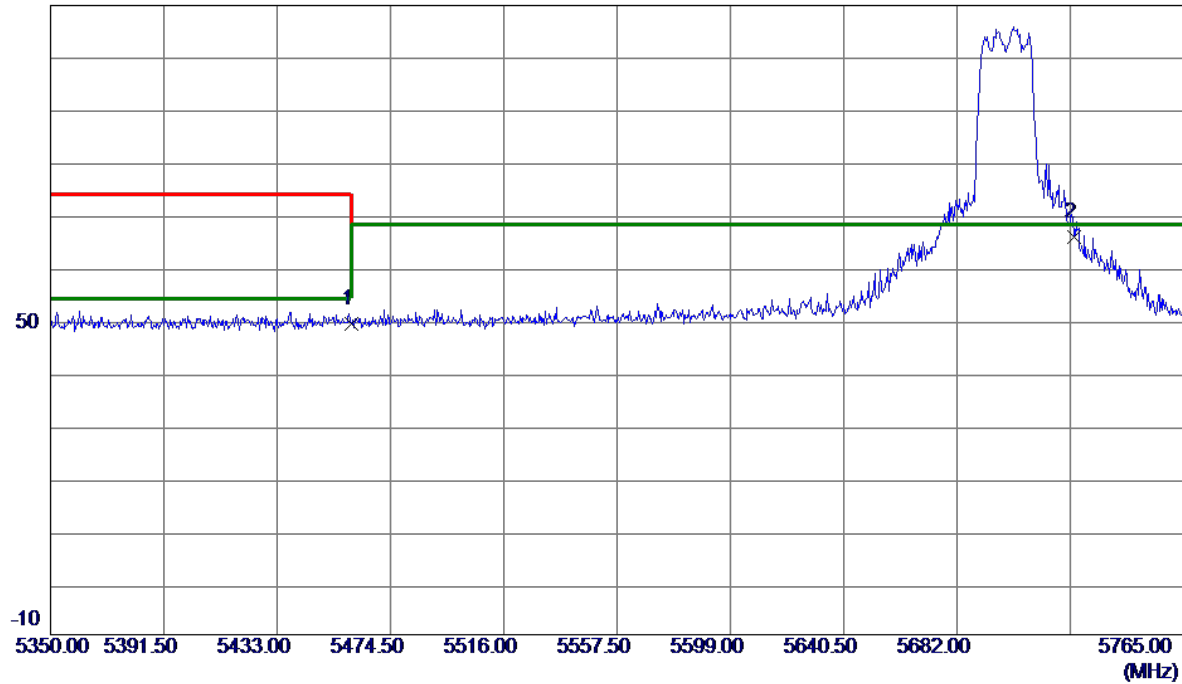


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	40.33	8.95	49.28	74.00	-24.72	Peak	
2 *	5725.0000	56.50	9.34	65.84	68.20	-2.36	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5700 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

86.9 dBuV/m

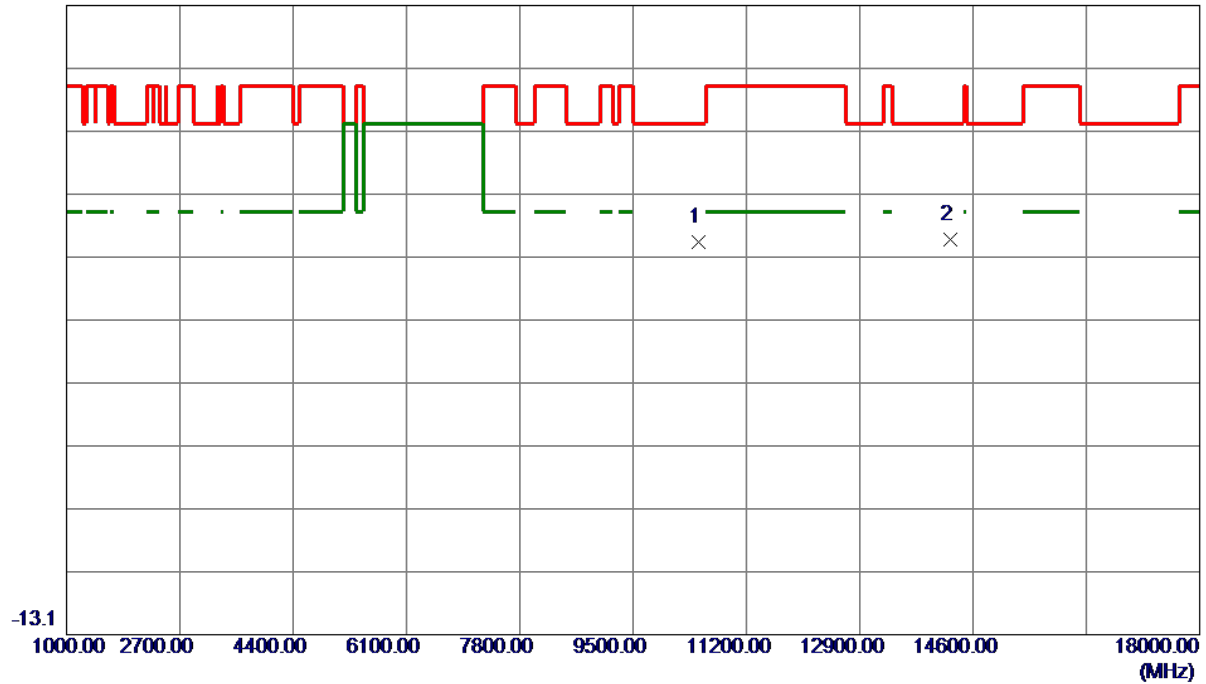

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10474.1000	39.90	9.37	49.27	68.20	-18.93	Peak	
2 *	14269.3500	39.67	10.05	49.72	68.20	-18.48	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5700 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

110 dBuV/m

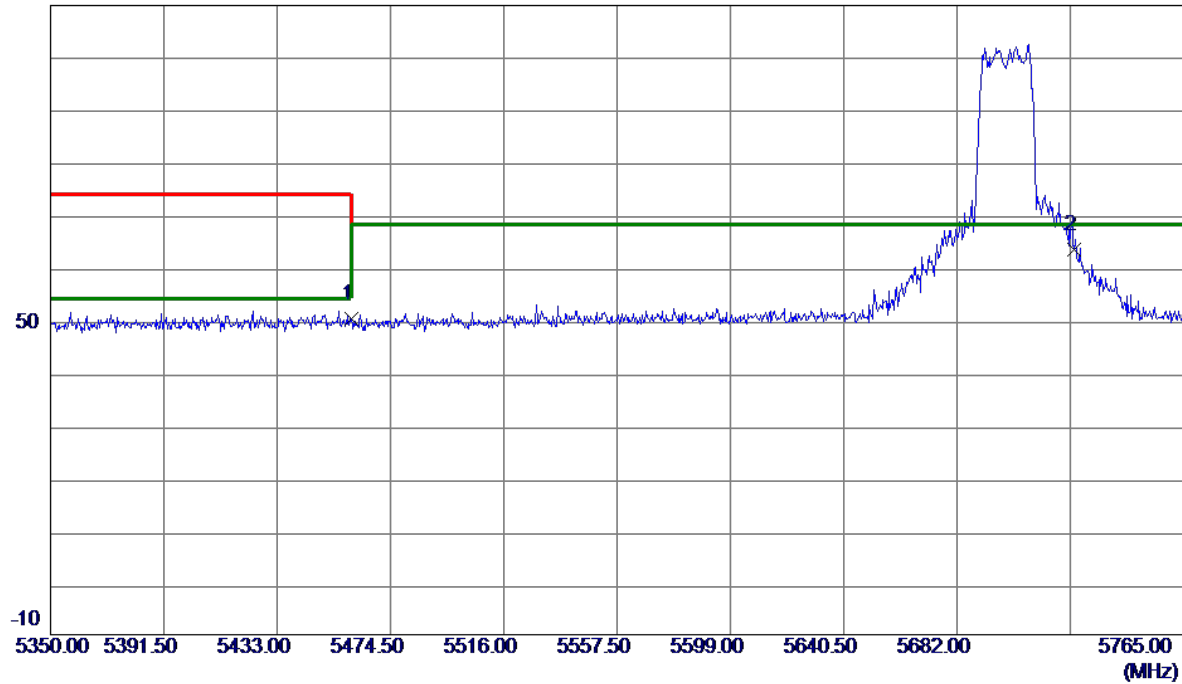


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	41.24	8.95	50.19	74.00	-23.81	Peak	
2 *	5725.0000	54.20	9.34	63.54	68.20	-4.66	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5700 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

86.9 dBuV/m

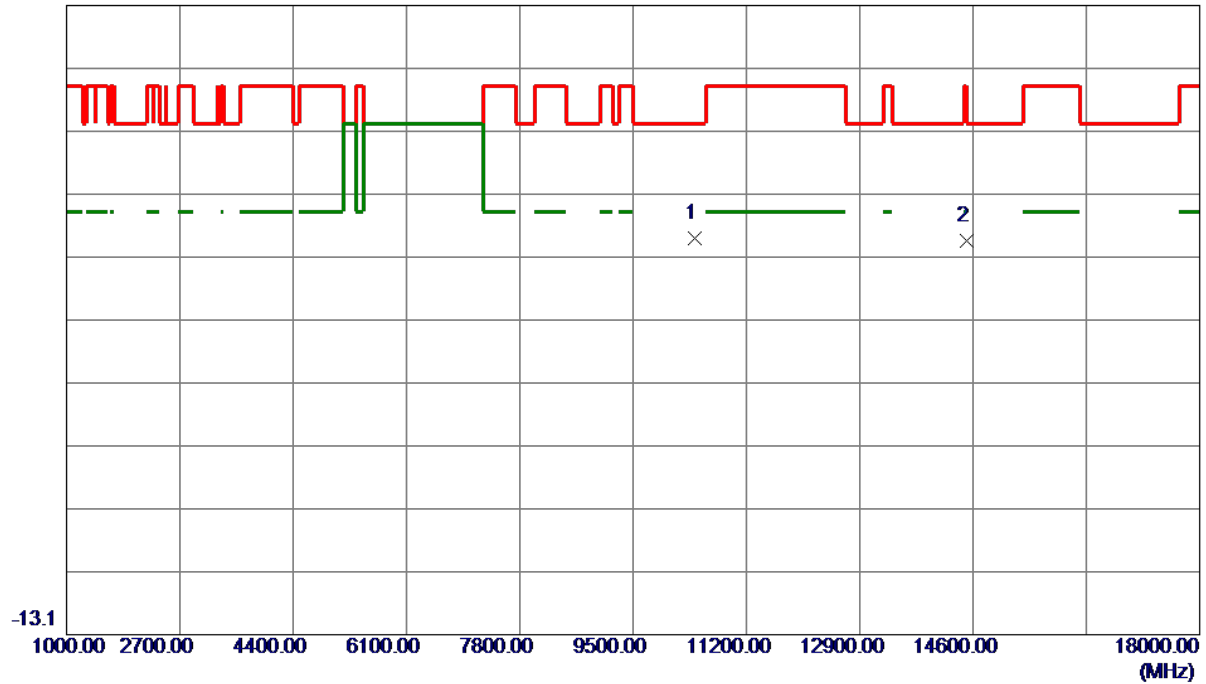

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10416.3000	40.66	9.27	49.93	68.20	-18.27	Peak	
2	14499.7000	39.19	10.30	49.49	74.00	-24.51	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5510 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

120 dBuV/m

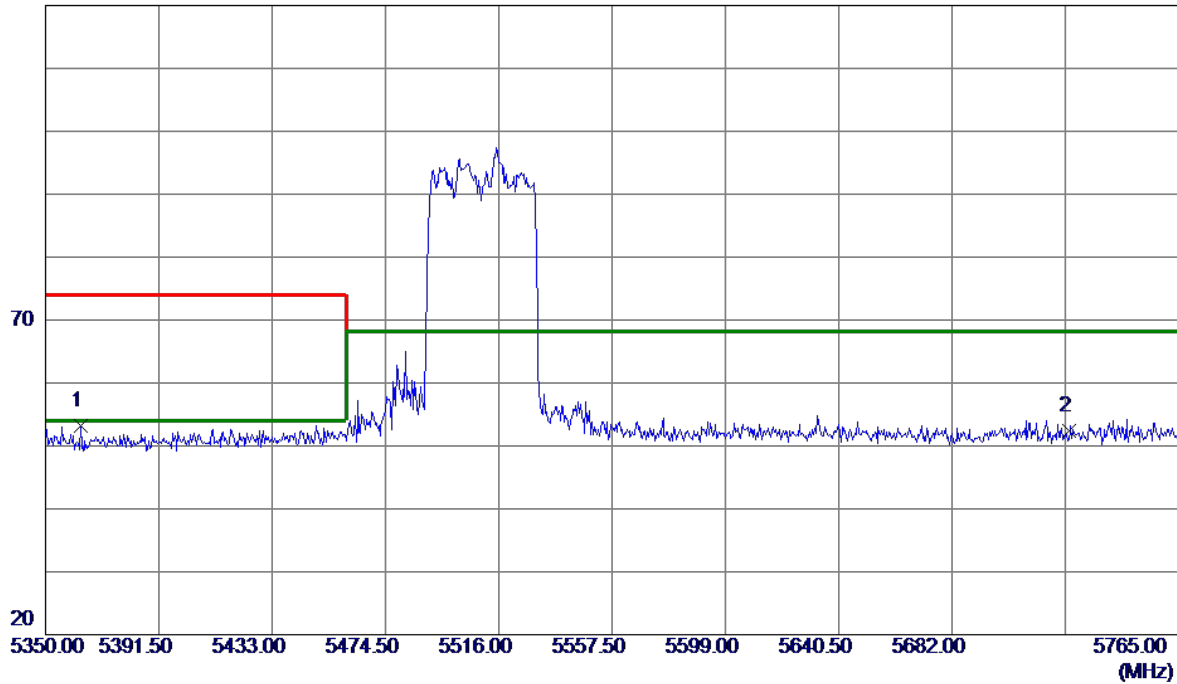


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5363.1349	41.58	11.69	53.27	74.00	-20.73	Peak	
2 *	5725.0000	40.24	12.18	52.42	68.20	-15.78	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5510 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

86.9 dBuV/m

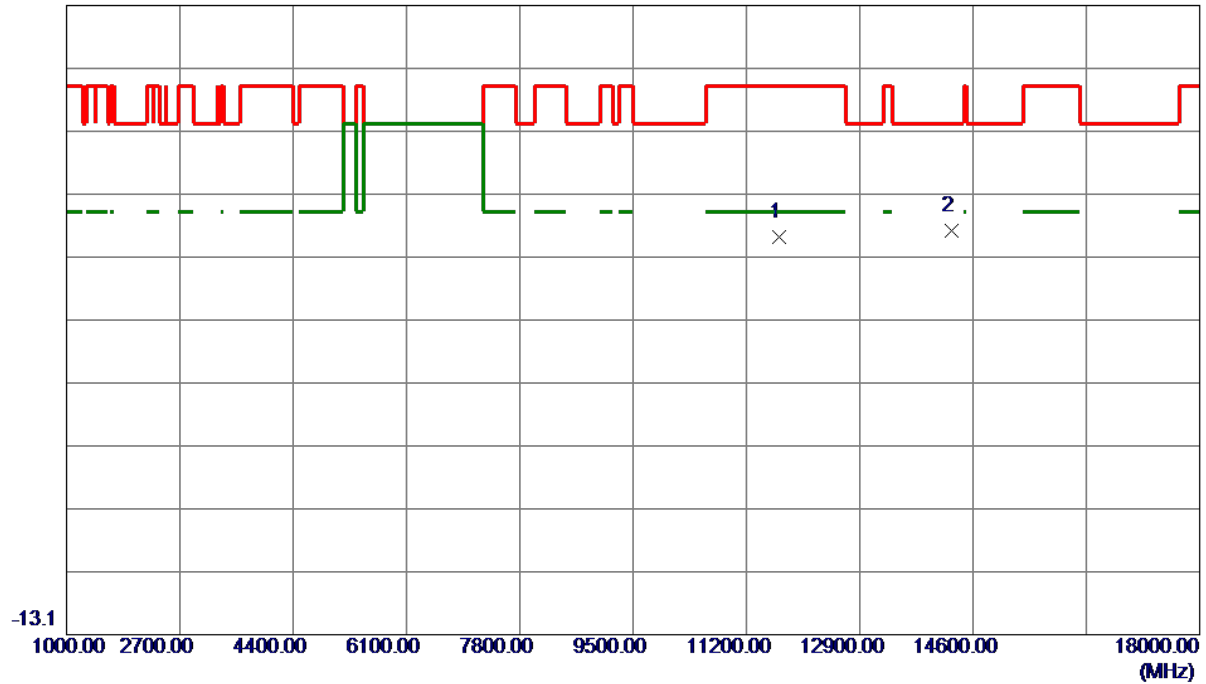

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11685.3500	40.57	9.61	50.18	74.00	-23.82	Peak	
2 *	14287.2000	40.99	10.07	51.06	68.20	-17.14	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5510 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

120 dBuV/m

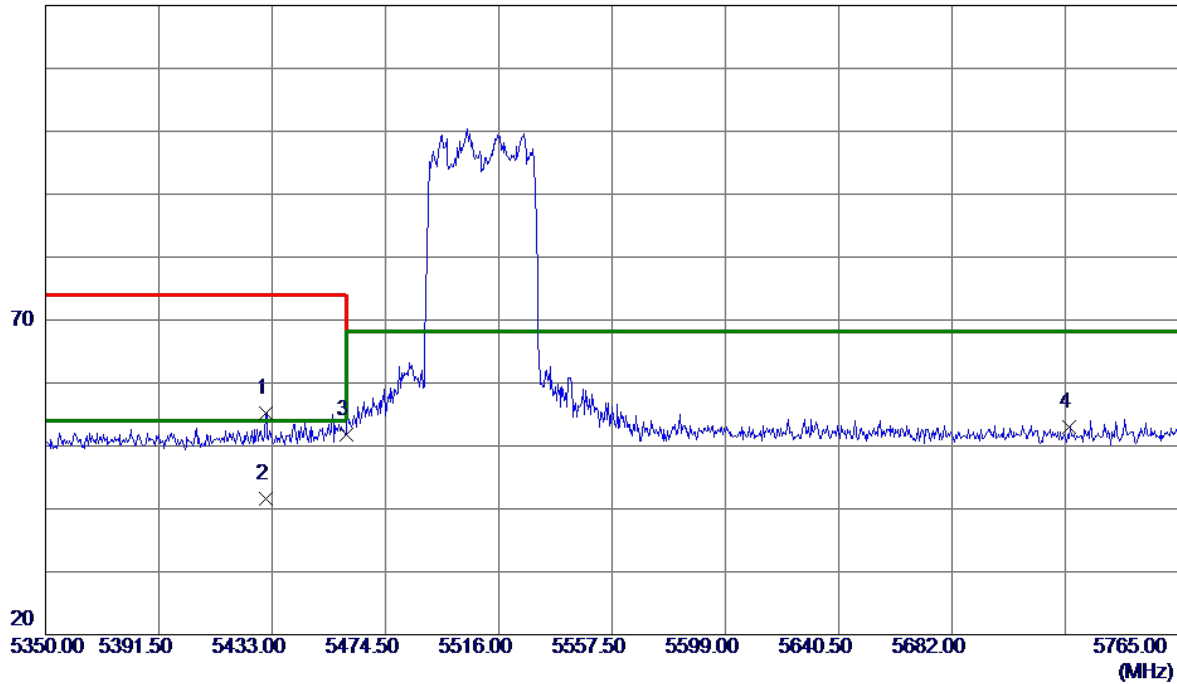


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5430.9040	43.52	11.74	55.26	74.00	-18.74	Peak	
2 *	5430.9040	29.79	11.74	41.53	54.00	-12.47	AVG	
3	5460.0000	40.03	11.75	51.78	74.00	-22.22	Peak	
4	5725.0000	40.81	12.18	52.99	68.20	-15.21	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5510 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

86.9 dBuV/m

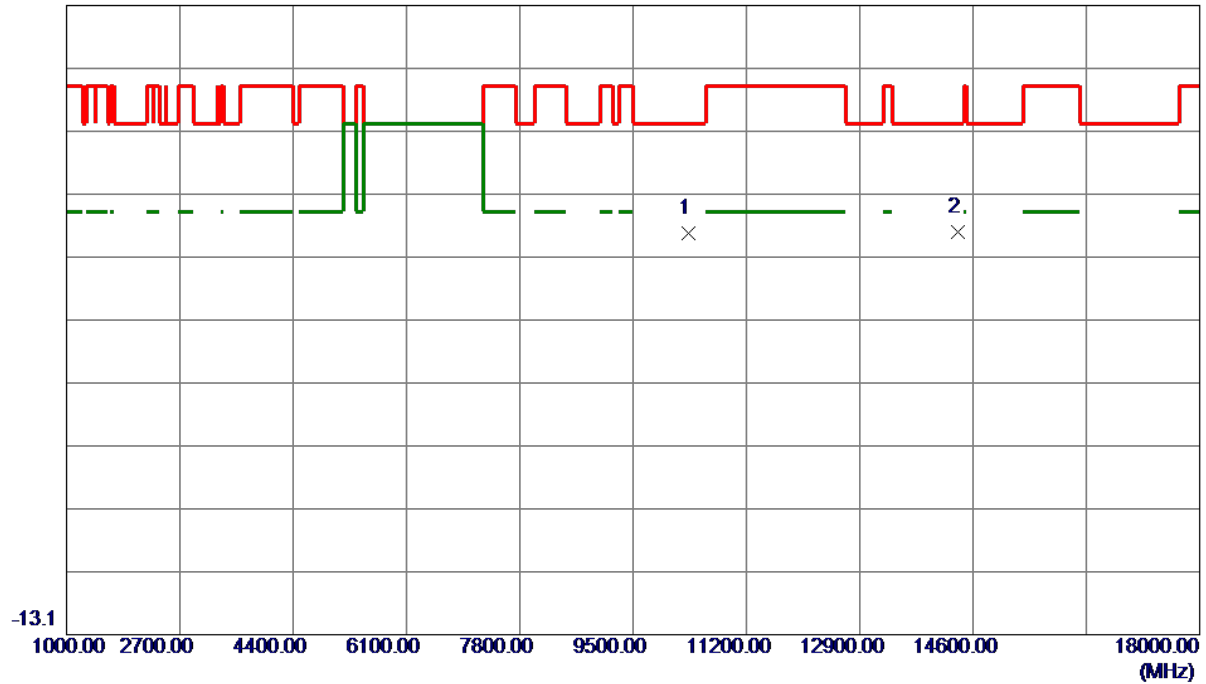

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10336.4000	41.48	9.14	50.62	68.20	-17.58	Peak	
2 *	14380.7000	40.69	10.17	50.86	68.20	-17.34	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5550 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

86.9 dBuV/m

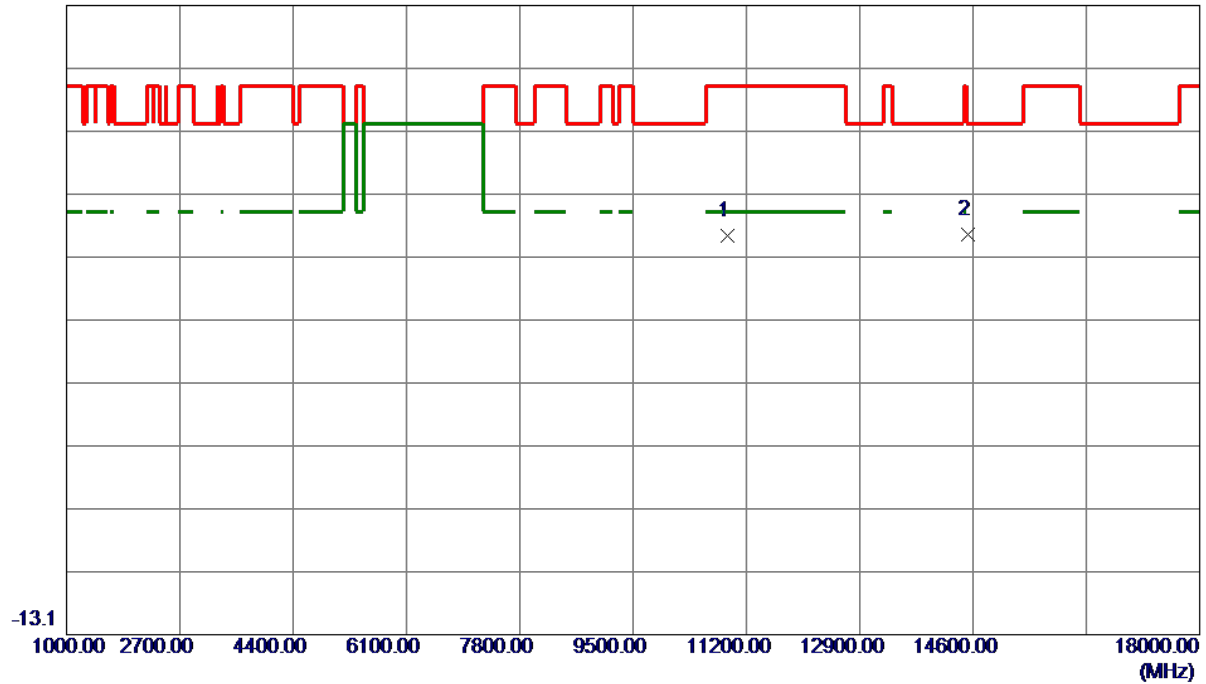

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10925.4500	40.77	9.54	50.31	74.00	-23.69	Peak	
2 *	14515.8500	40.14	10.27	50.41	68.20	-17.79	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5550 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

86.9 dBuV/m

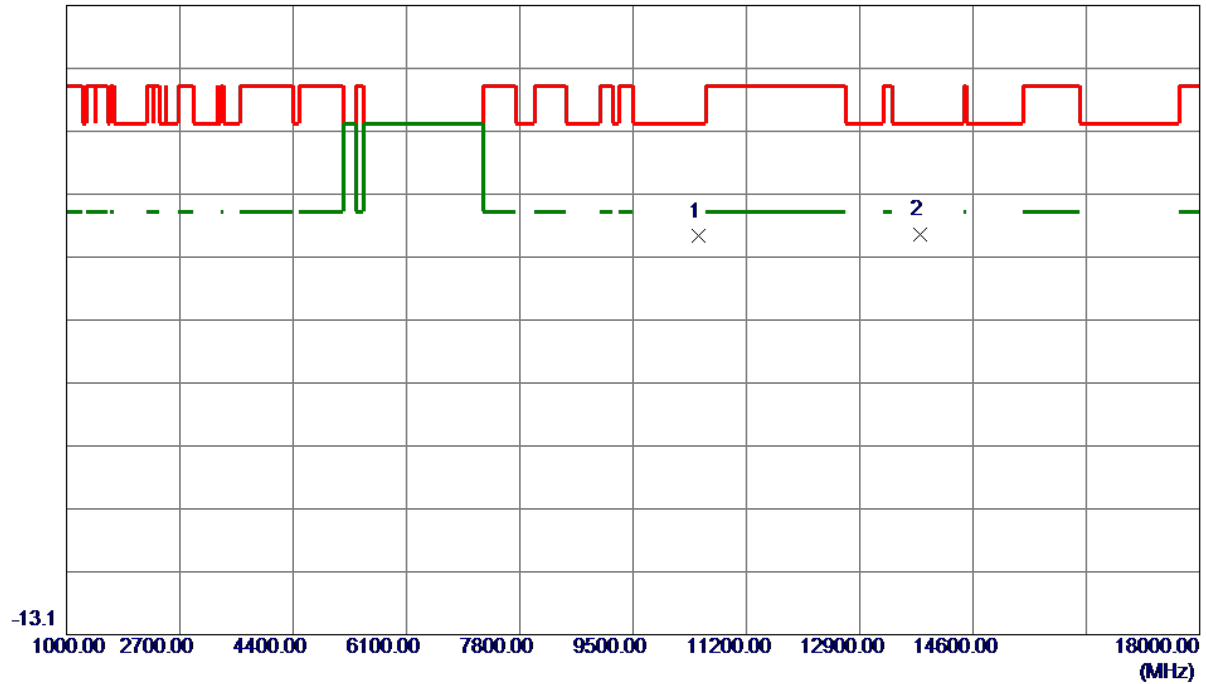


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10485.1500	40.81	9.39	50.20	68.20	-18.00	Peak	
2 *	13797.6000	40.74	9.74	50.48	68.20	-17.72	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5670 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

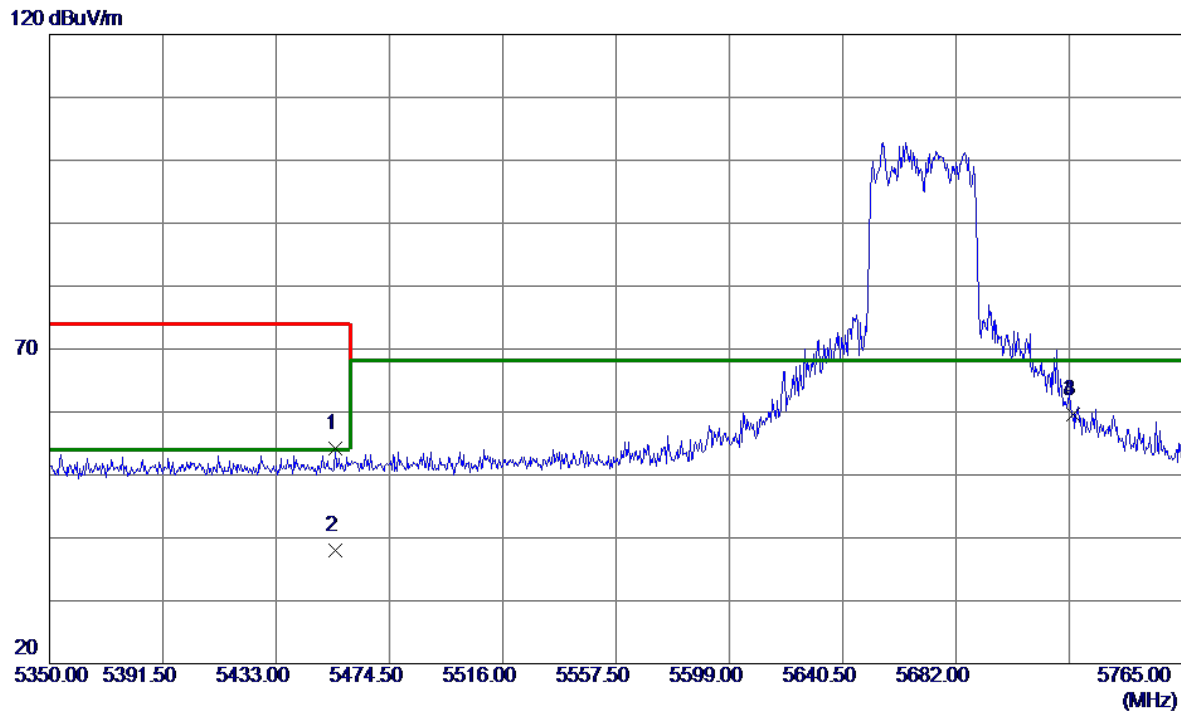

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5454.7879	42.42	11.75	54.17	74.00	-19.83	Peak	
2	5454.7879	26.28	11.75	38.03	54.00	-15.97	AVG	
3 *	5725.0000	47.50	12.18	59.68	68.20	-8.52	Peak	
4	5725.0000	47.50	12.18	59.68	68.20	-8.52	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5670 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

86.9 dBuV/m

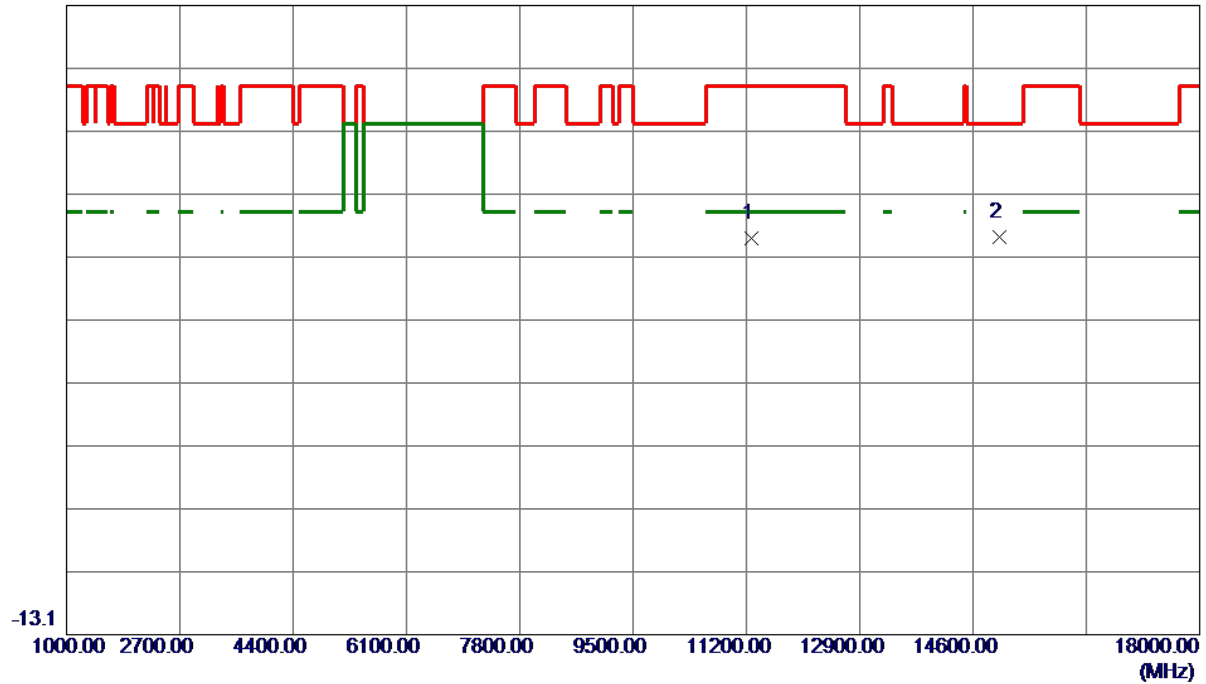


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11278.2000	40.20	9.69	49.89	74.00	-24.11	Peak	
2 *	14994.4000	40.83	9.30	50.13	68.20	-18.07	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5670 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

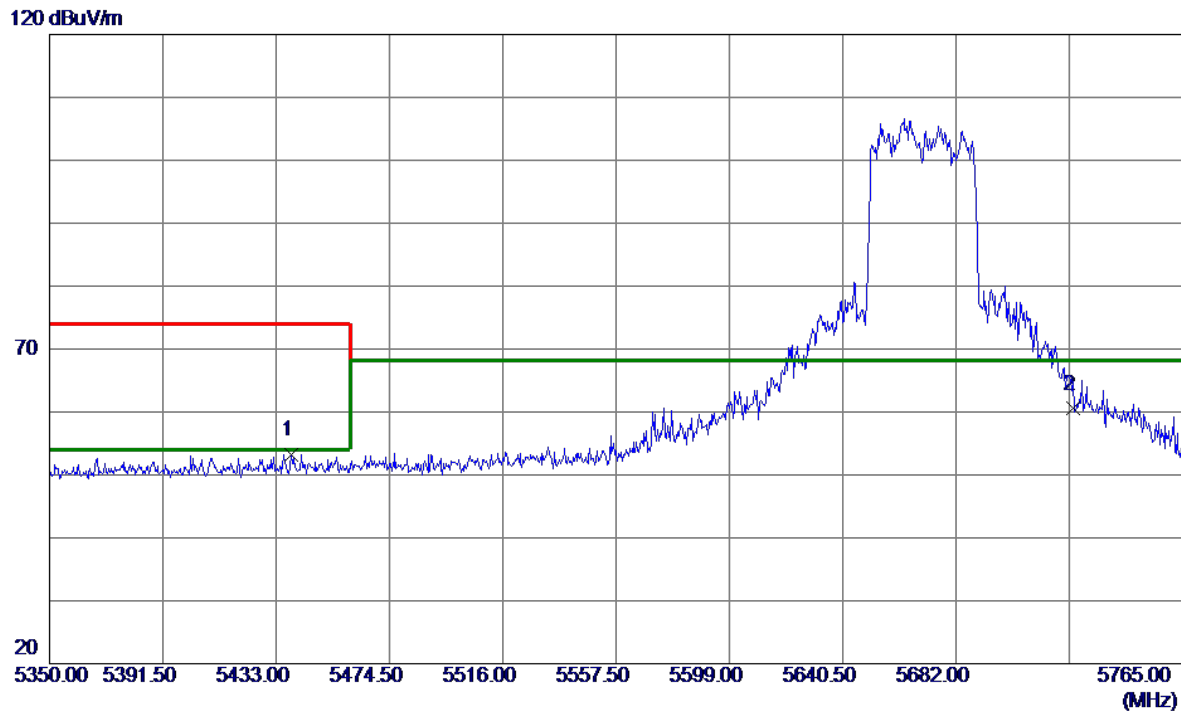


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5438.6850	41.47	11.74	53.21	74.00	-20.79	Peak	
2 *	5725.0000	48.32	12.18	60.50	68.20	-7.70	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5670 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

86.9 dBuV/m

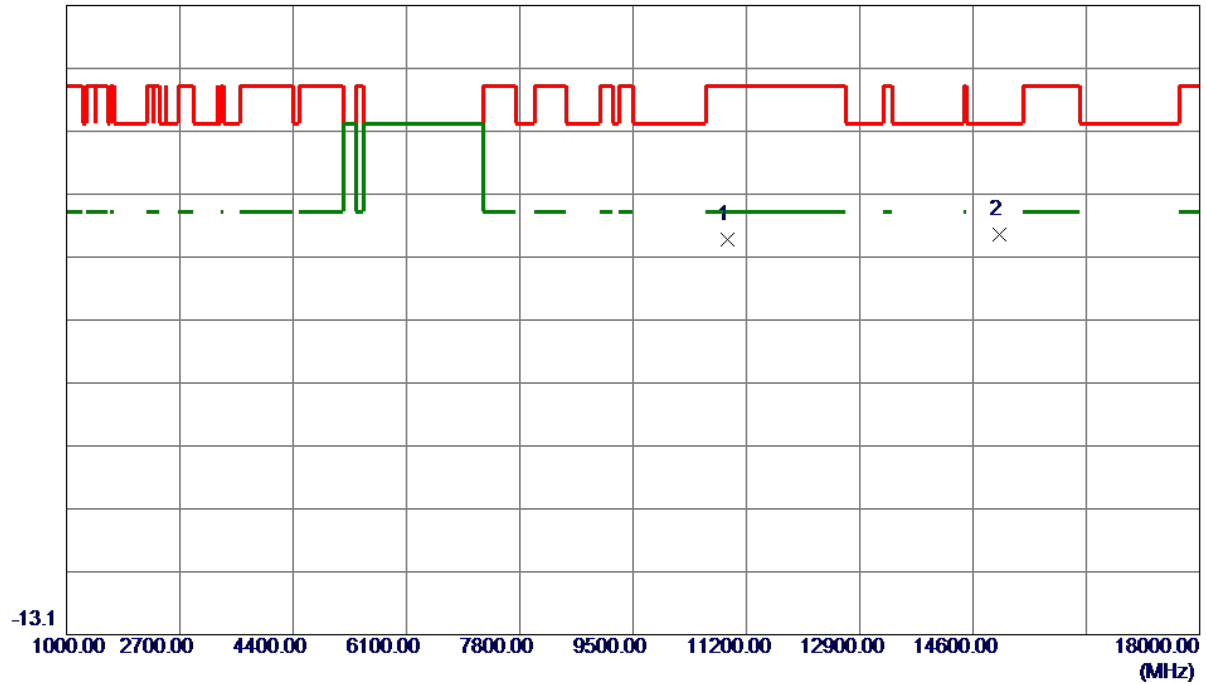

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10922.9000	40.22	9.54	49.76	74.00	-24.24	Peak	
2 *	15001.2000	41.25	9.29	50.54	68.20	-17.66	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5530 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

120 dBuV/m

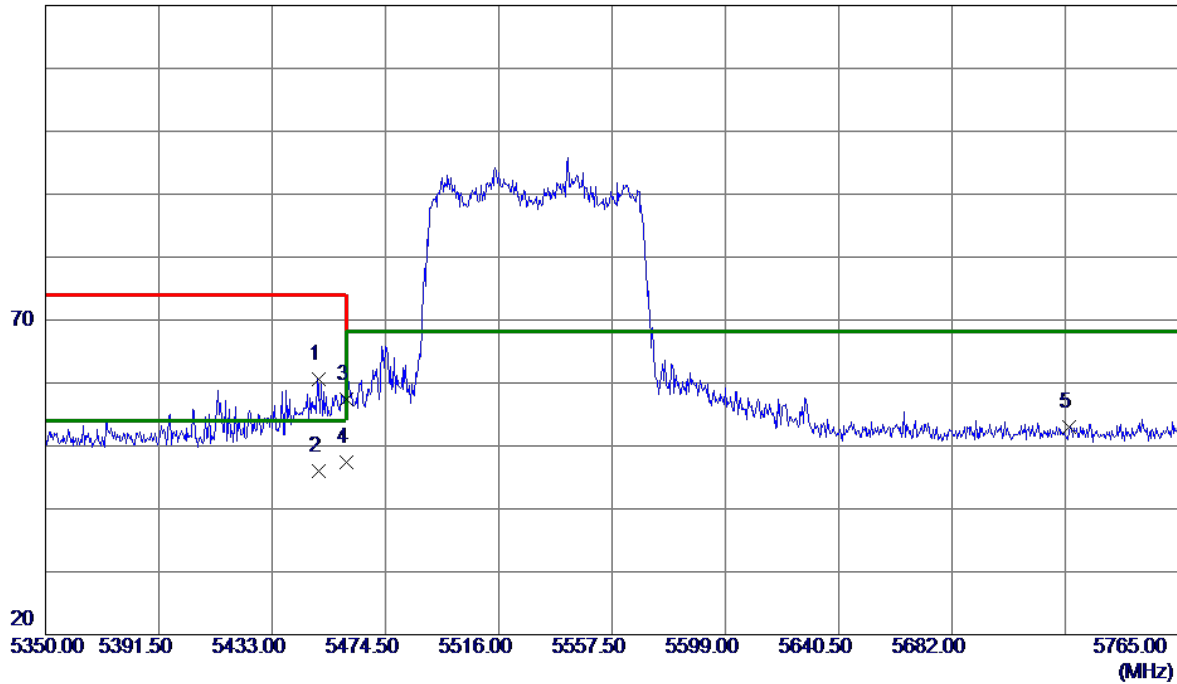

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5449.8490	48.90	11.75	60.65	74.00	-13.35	Peak	
2	5449.8490	34.20	11.75	45.95	54.00	-8.05	AVG	
3	5460.0000	45.58	11.75	57.33	74.00	-16.67	Peak	
4 *	5460.0000	35.74	11.75	47.49	54.00	-6.51	AVG	
5	5725.0000	40.90	12.18	53.08	68.20	-15.12	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5530 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

86.9 dBuV/m

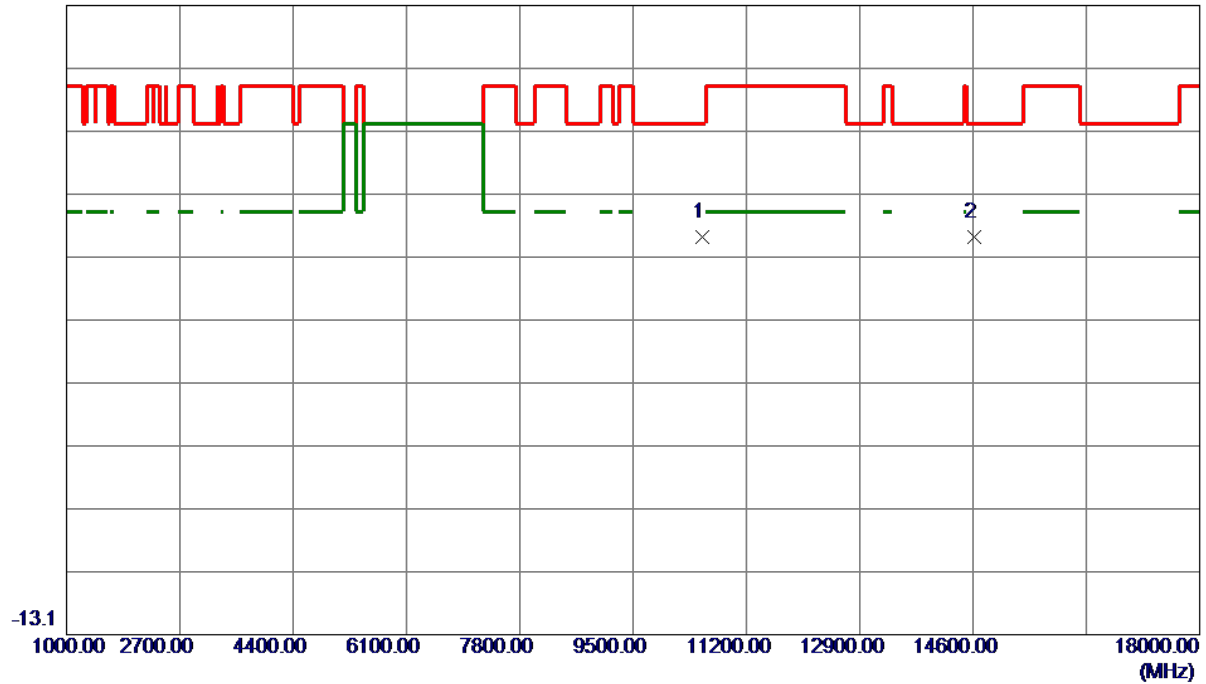

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10546.3500	40.64	9.42	50.06	68.20	-18.14	Peak	
2 *	14628.0500	40.10	10.04	50.14	68.20	-18.06	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5530 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

120 dBuV/m



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5410.6730	49.81	11.72	61.53	74.00	-12.47	Peak	
2	5410.6730	34.41	11.72	46.13	54.00	-7.87	AVG	
3	5451.1150	51.95	11.75	63.70	74.00	-10.30	Peak	
4	5451.1150	35.80	11.75	47.55	54.00	-6.45	AVG	
5	5460.0000	47.57	11.75	59.32	74.00	-14.68	Peak	
6 *	5460.0000	36.93	11.75	48.68	54.00	-5.32	AVG	
7	5725.0000	40.11	12.18	52.29	68.20	-15.91	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5530 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

86.9 dBuV/m

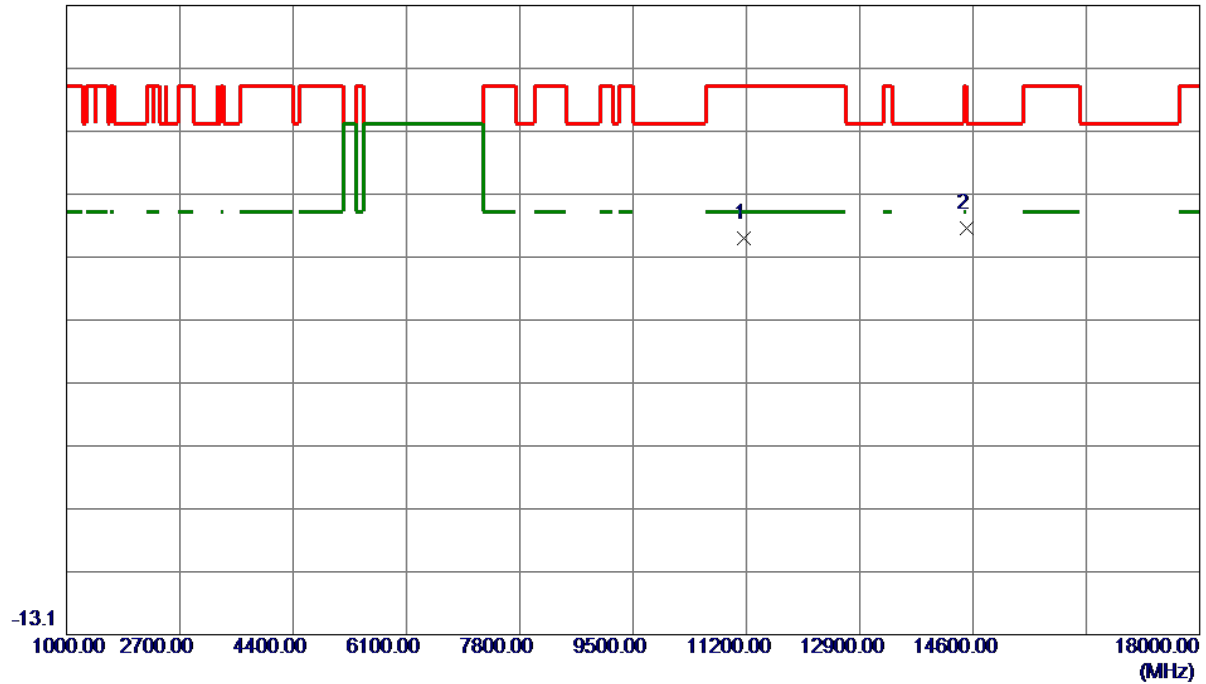

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11157.5000	40.33	9.63	49.96	74.00	-24.04	Peak	
2 *	14502.2500	41.17	10.30	51.47	68.20	-16.73	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5610 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

120 dBuV/m

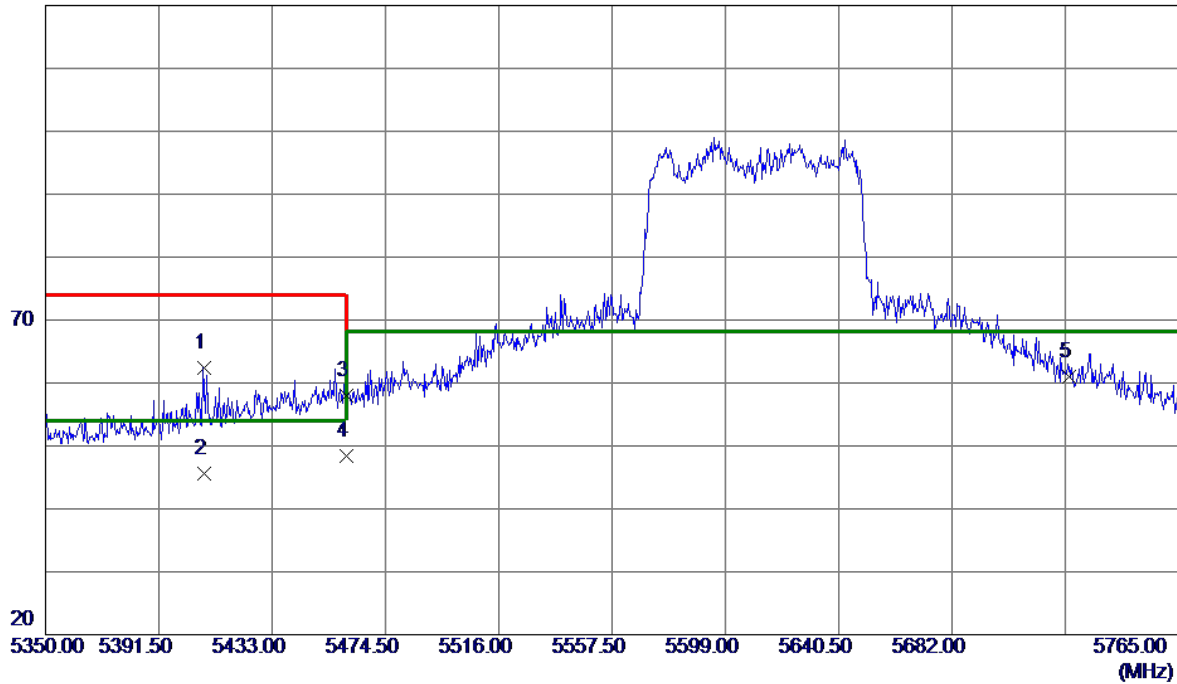

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5407.9340	50.69	11.72	62.41	74.00	-11.59	Peak	
2	5407.9340	33.86	11.72	45.58	54.00	-8.42	AVG	
3	5460.0000	46.17	11.75	57.92	74.00	-16.08	Peak	
4 *	5460.0000	36.57	11.75	48.32	54.00	-5.68	AVG	
5	5725.0000	48.81	12.18	60.99	68.20	-7.21	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5610 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

86.9 dBuV/m

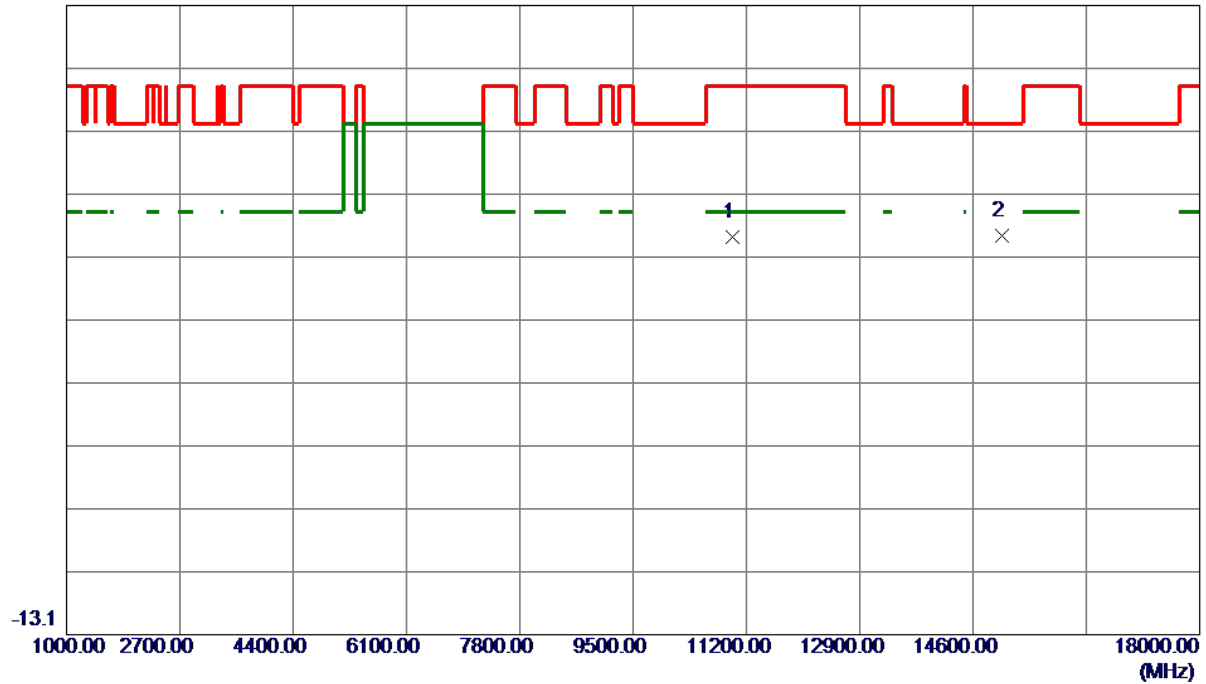

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10990.9000	40.52	9.56	50.08	74.00	-23.92	Peak	
2 *	15030.9500	41.16	9.20	50.36	68.20	-17.84	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5610 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

120 dBuV/m

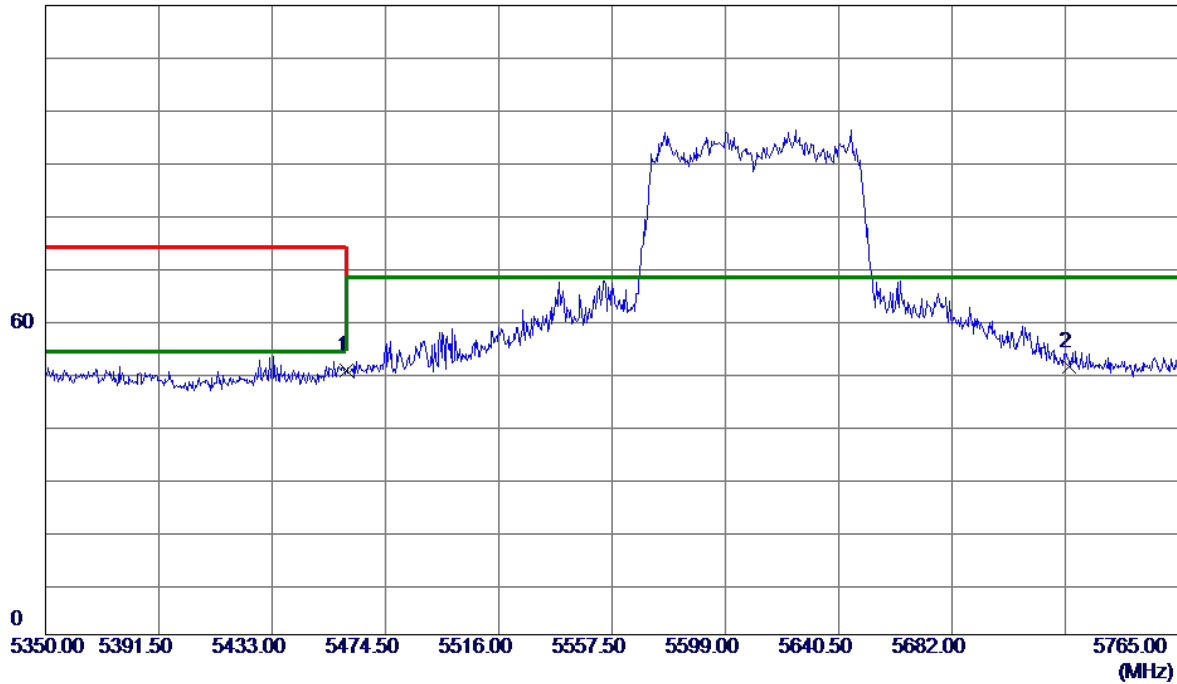

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	41.45	8.95	50.40	74.00	-23.60	Peak	
2 *	5725.0000	41.76	9.34	51.10	68.20	-17.10	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5610 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

86.9 dBuV/m

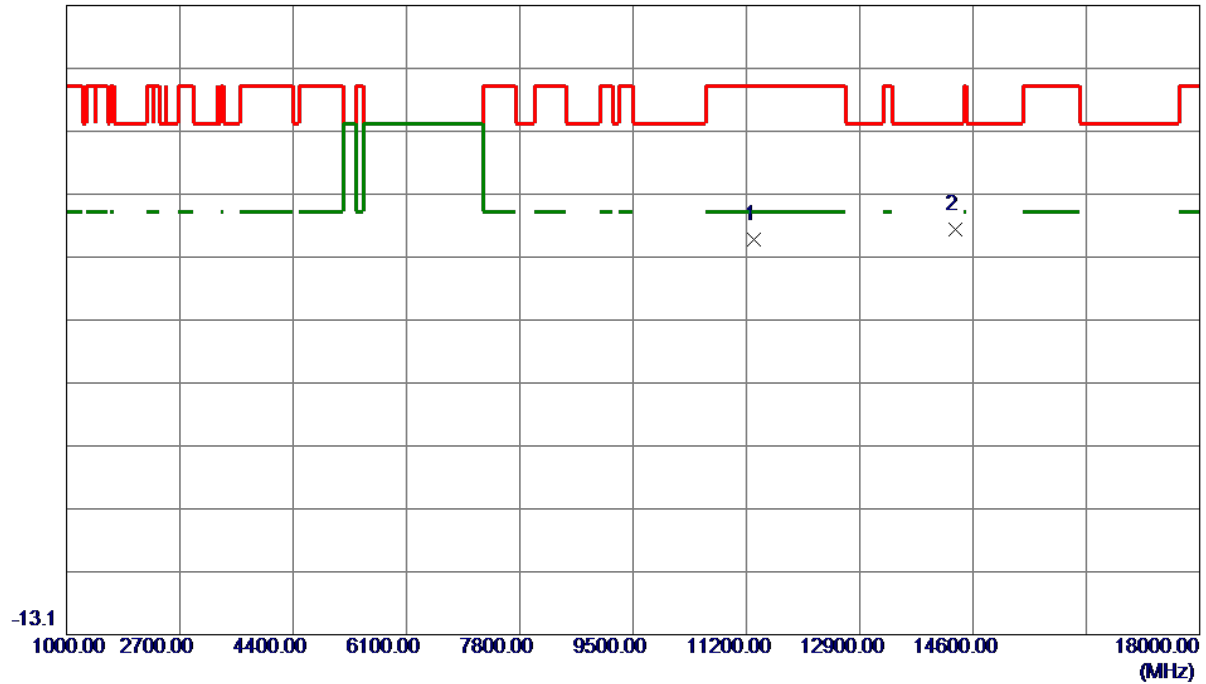


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11308.8000	40.05	9.70	49.75	74.00	-24.25	Peak	
2 *	14333.1000	41.15	10.12	51.27	68.20	-16.93	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

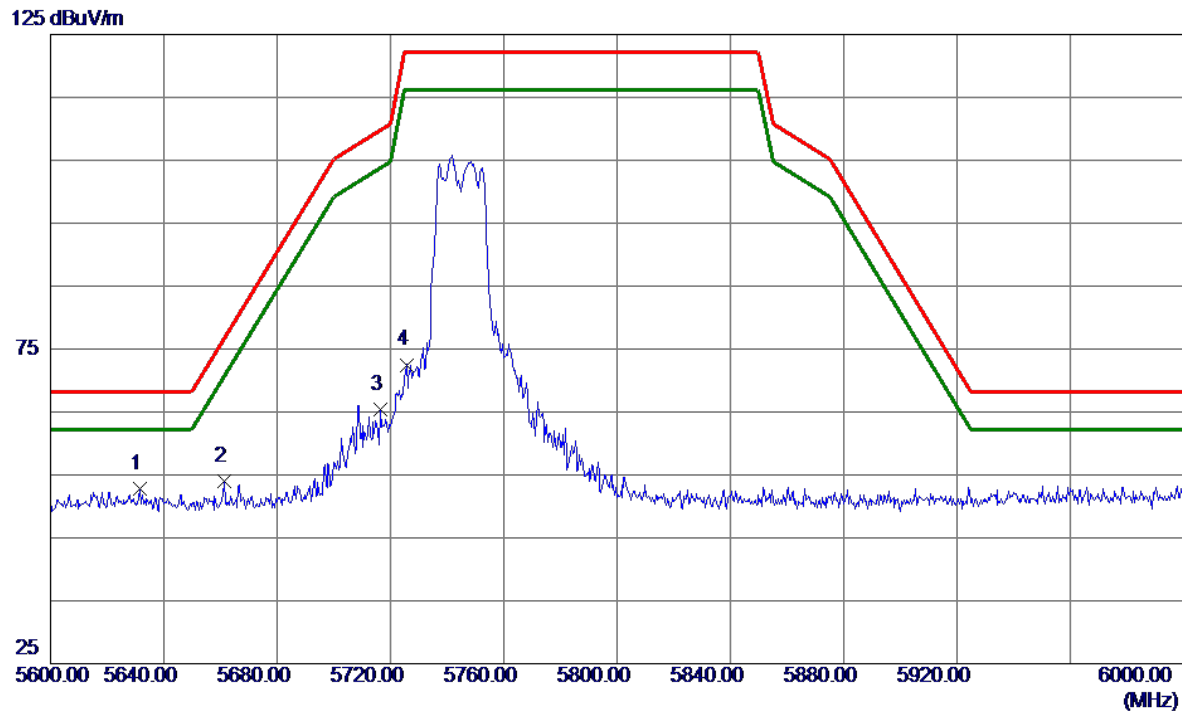

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5631.6000	40.81	12.01	52.82	68.20	-15.38	Peak	
2	5661.2000	41.97	12.06	54.03	76.49	-22.46	Peak	
3	5716.6000	53.33	12.16	65.49	109.85	-44.36	Peak	
4	5725.6000	60.32	12.18	72.50	122.20	-49.70	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

86.9 dBuV/m

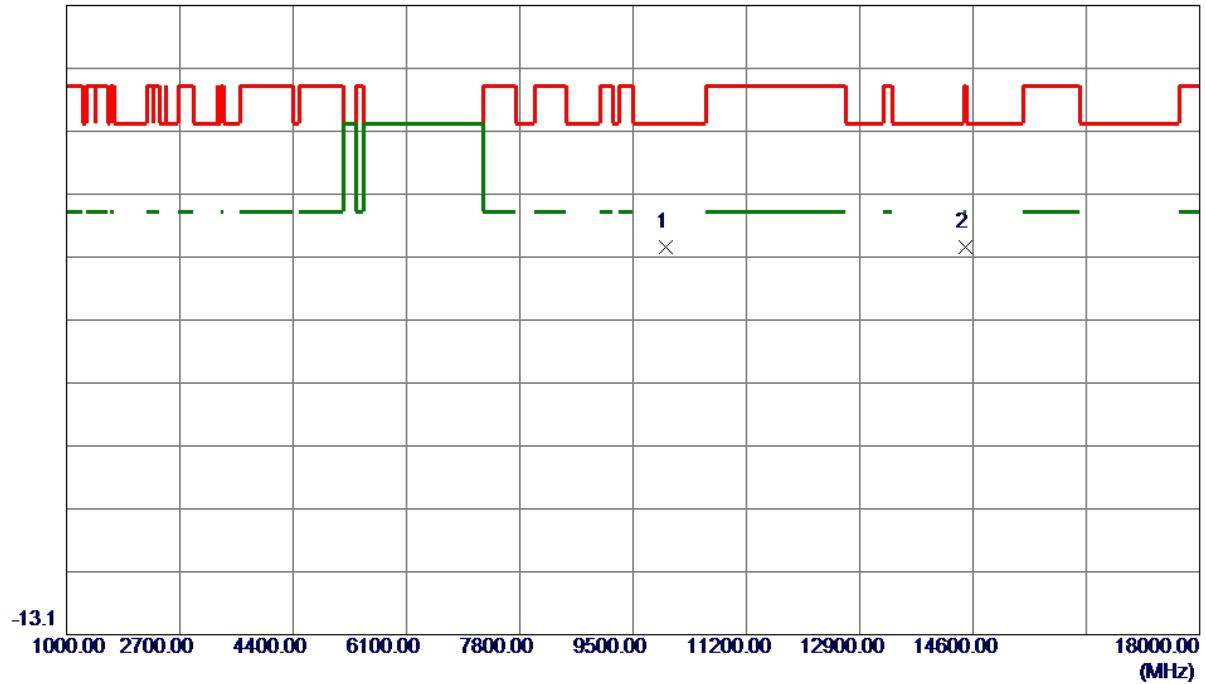


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	9995.5500	39.85	8.60	48.45	68.20	-19.75	Peak	
2	14486.1000	38.24	10.28	48.52	74.00	-25.48	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

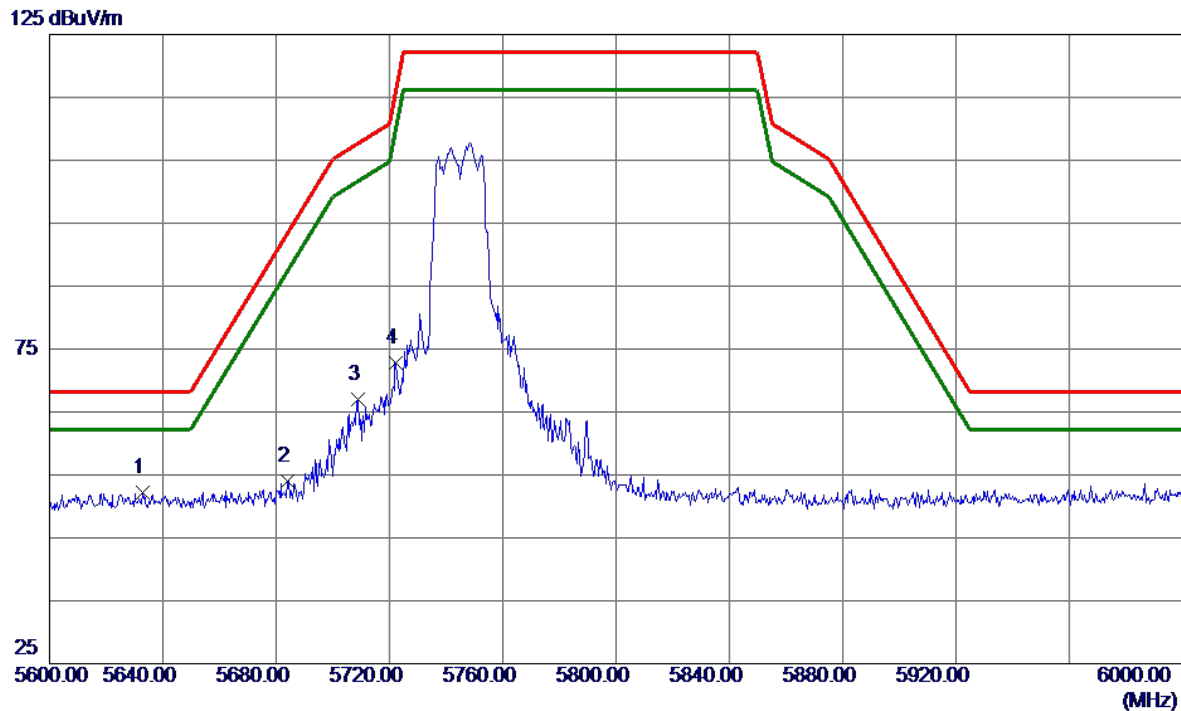

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5632.8000	40.16	12.01	52.17	68.20	-16.03	Peak	
2	5684.2000	41.95	12.10	54.05	93.51	-39.46	Peak	
3	5708.8000	54.83	12.15	66.98	107.66	-40.68	Peak	
4	5722.2000	60.61	12.17	72.78	115.82	-43.04	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

86.9 dBuV/m

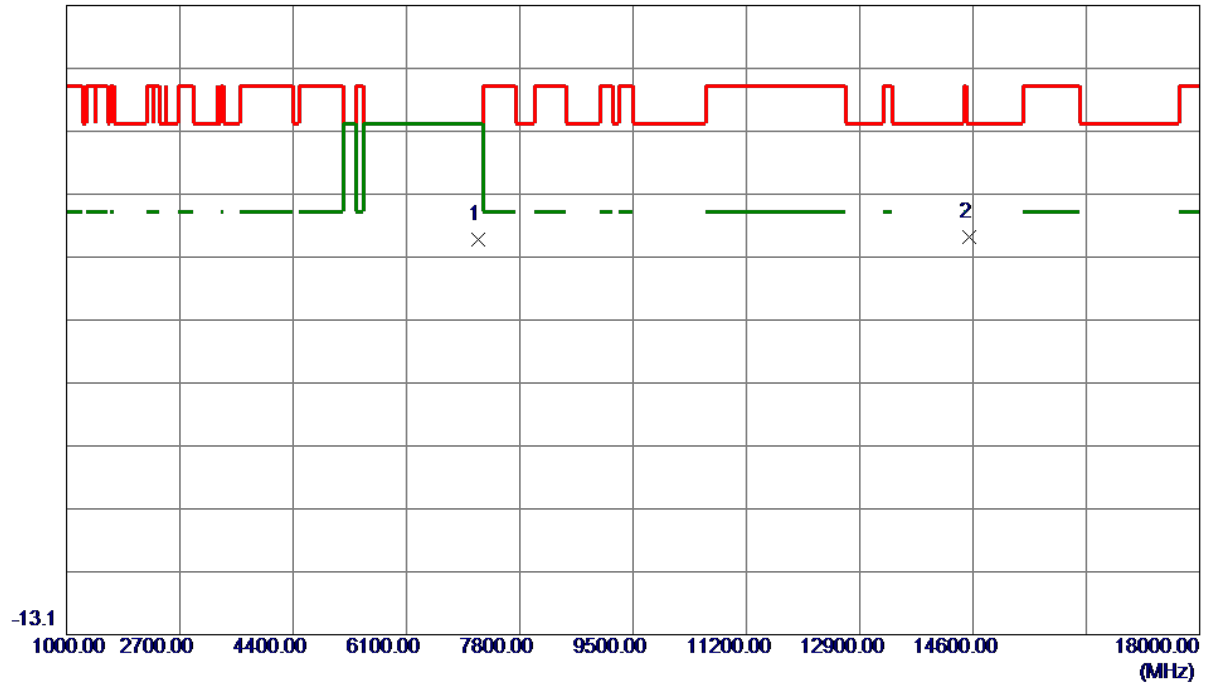

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7177.8000	43.57	6.12	49.69	68.20	-18.51	Peak	
2 *	14551.5500	39.99	10.20	50.19	68.20	-18.01	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

86.9 dBuV/m

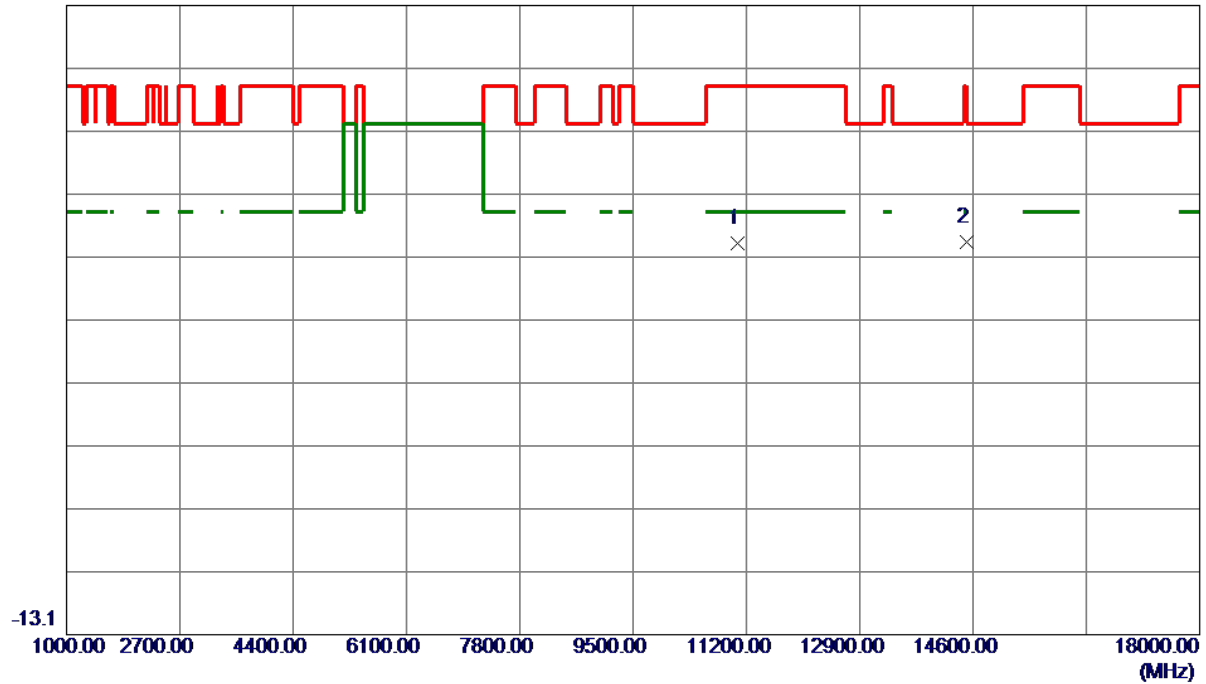


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11065.7000	39.51	9.59	49.10	74.00	-24.90	Peak	
2 *	14503.9500	38.99	10.29	49.28	68.20	-18.92	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

86.9 dBuV/m

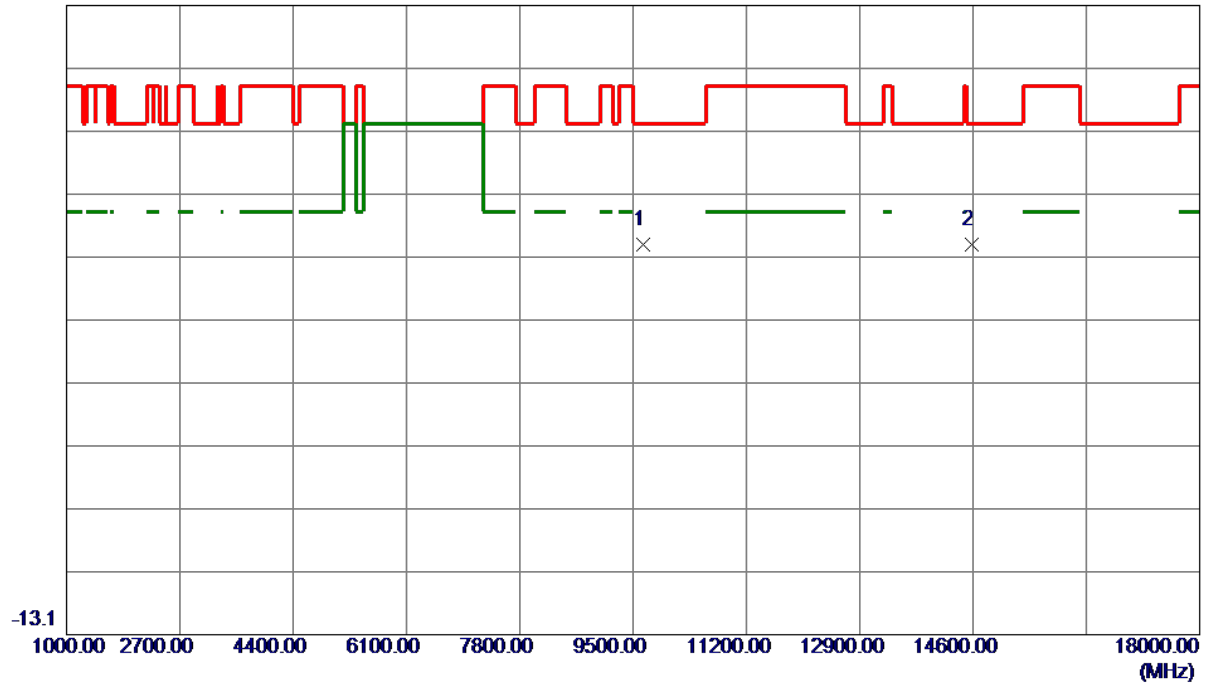


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	9653.8500	40.03	8.94	48.97	68.20	-19.23	Peak	
2	14588.9500	38.85	10.12	48.97	68.20	-19.23	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

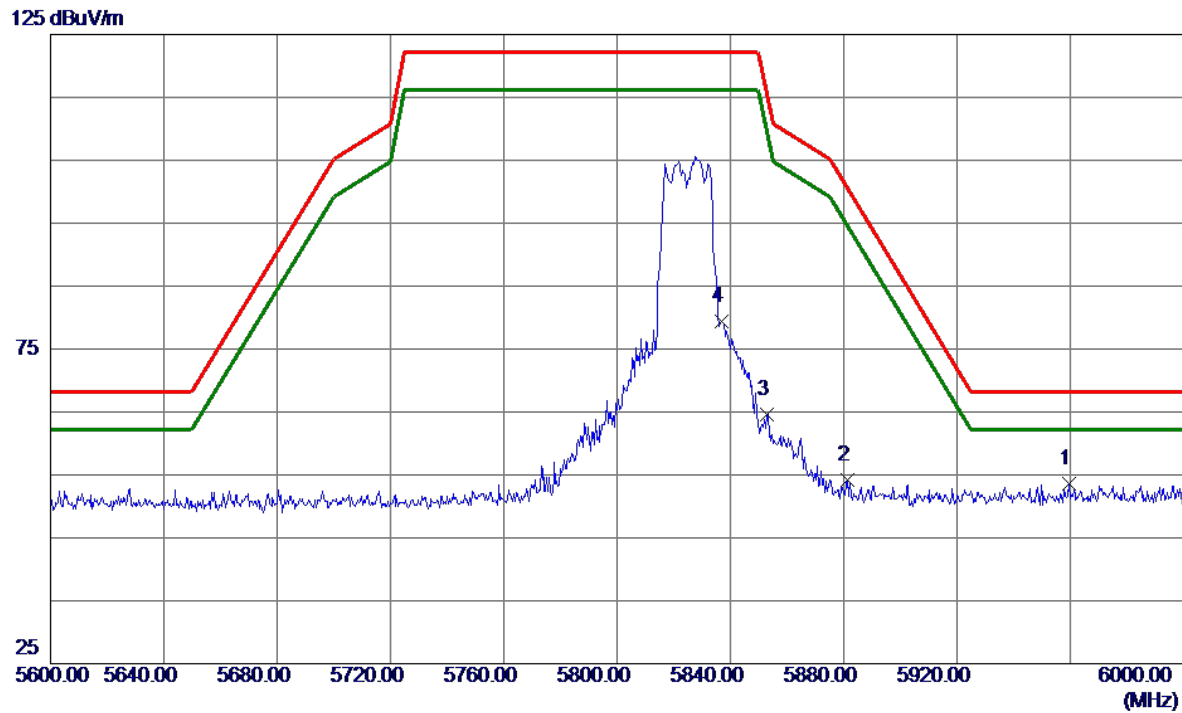

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5959.6000	40.99	12.59	53.58	68.20	-14.62	Peak	
2	5881.2000	41.75	12.45	54.20	100.61	-46.41	Peak	
3	5853.0000	52.26	12.40	64.66	115.36	-50.70	Peak	
4	5836.8000	67.09	12.37	79.46	122.20	-42.74	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

86.9 dBuV/m

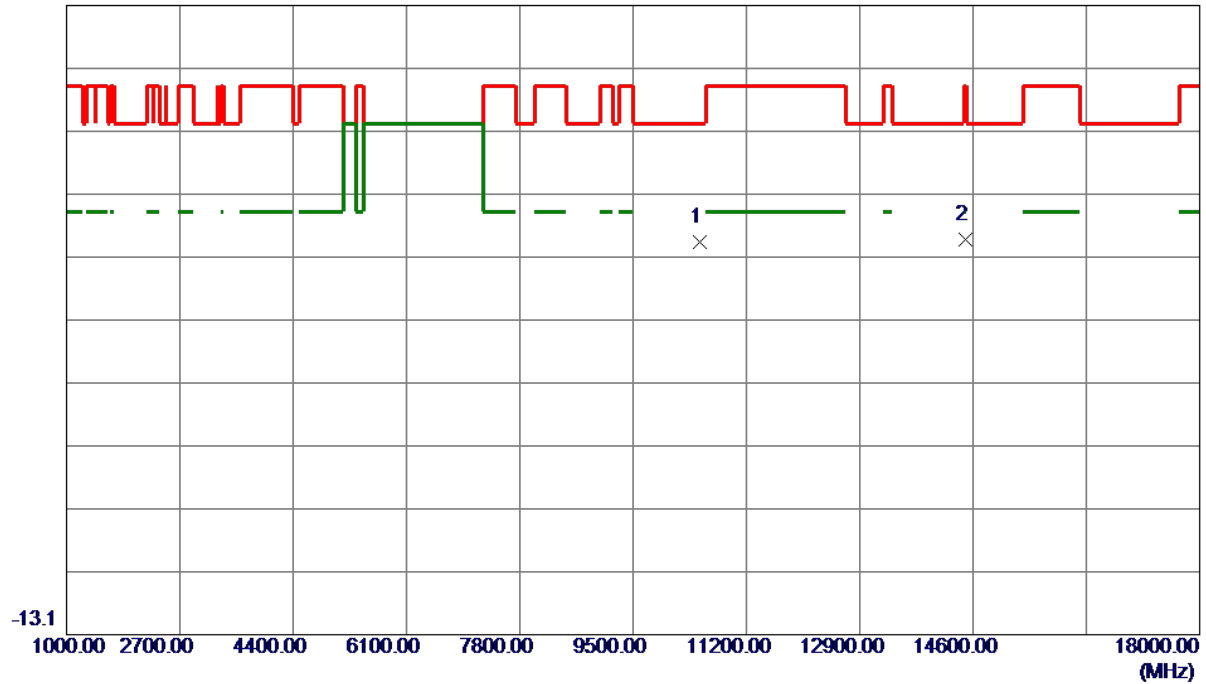


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10496.2000	39.90	9.40	49.30	68.20	-18.90	Peak	
2	14477.6000	39.35	10.28	49.63	74.00	-24.37	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

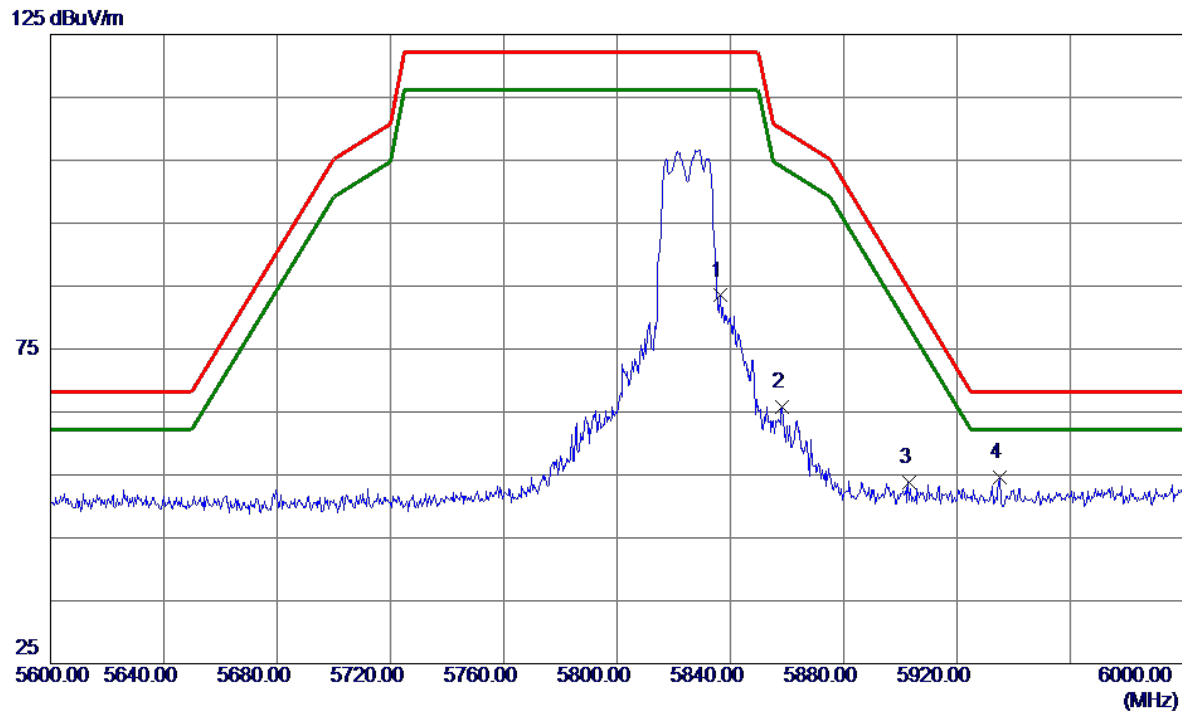

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5836.4000	71.13	12.37	83.50	122.20	-38.70	Peak	
2	5858.4000	53.34	12.41	65.75	109.85	-44.10	Peak	
3	5903.0000	41.36	12.49	53.85	84.48	-30.63	Peak	
4 *	5935.2000	41.97	12.55	54.52	68.20	-13.68	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

86.9 dBuV/m

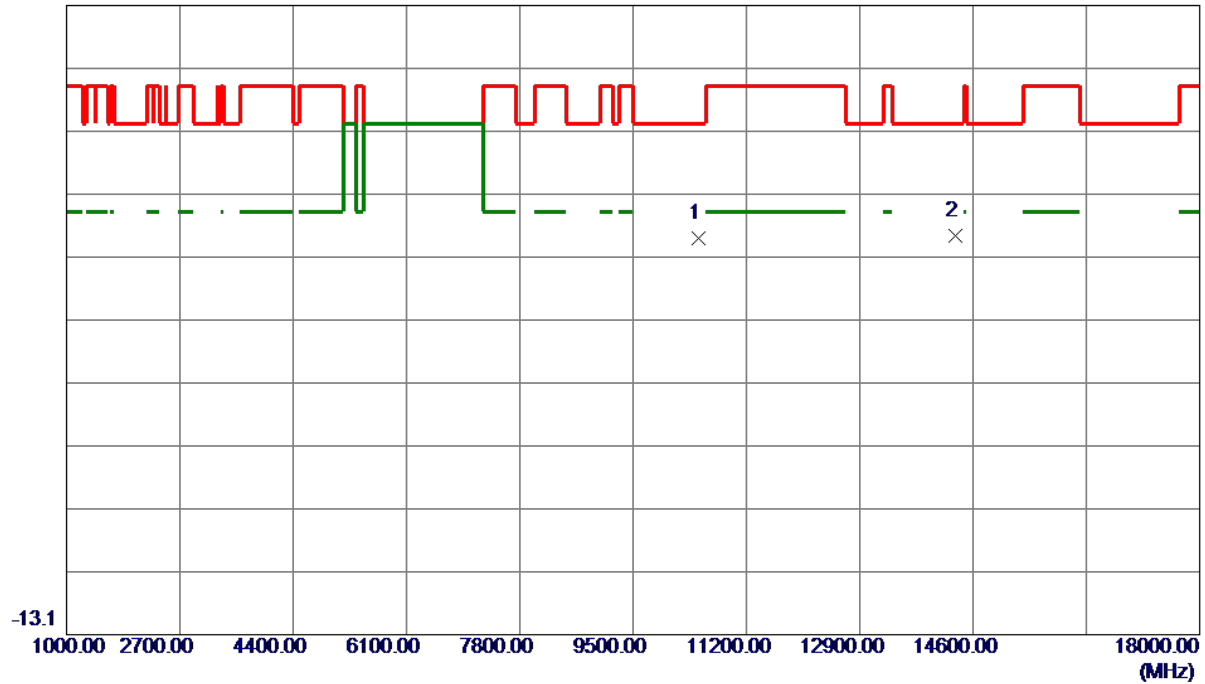


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10478.3500	40.61	9.37	49.98	68.20	-18.22	Peak	
2 *	14342.4500	40.12	10.13	50.25	68.20	-17.95	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

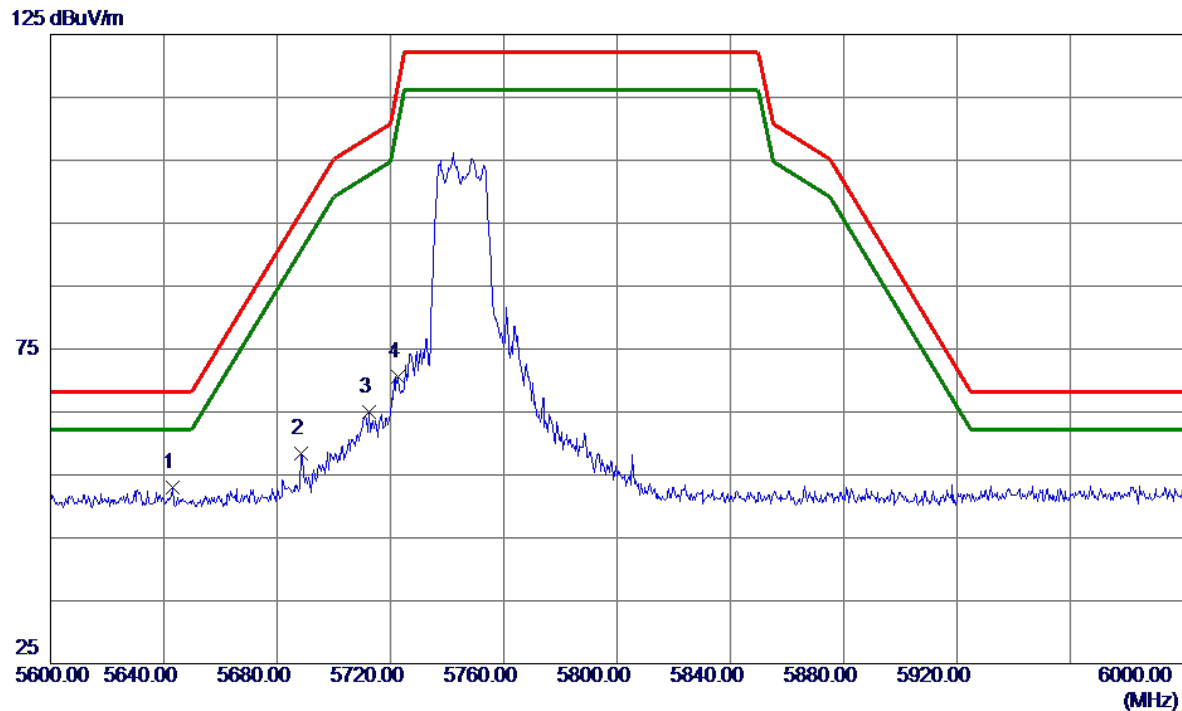

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5643.2000	40.95	12.03	52.98	68.20	-15.22	Peak	
2	5688.6000	46.31	12.11	58.42	96.76	-38.34	Peak	
3	5712.4000	52.83	12.15	64.98	108.67	-43.69	Peak	
4	5722.8000	58.36	12.17	70.53	117.18	-46.65	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

86.9 dBuV/m

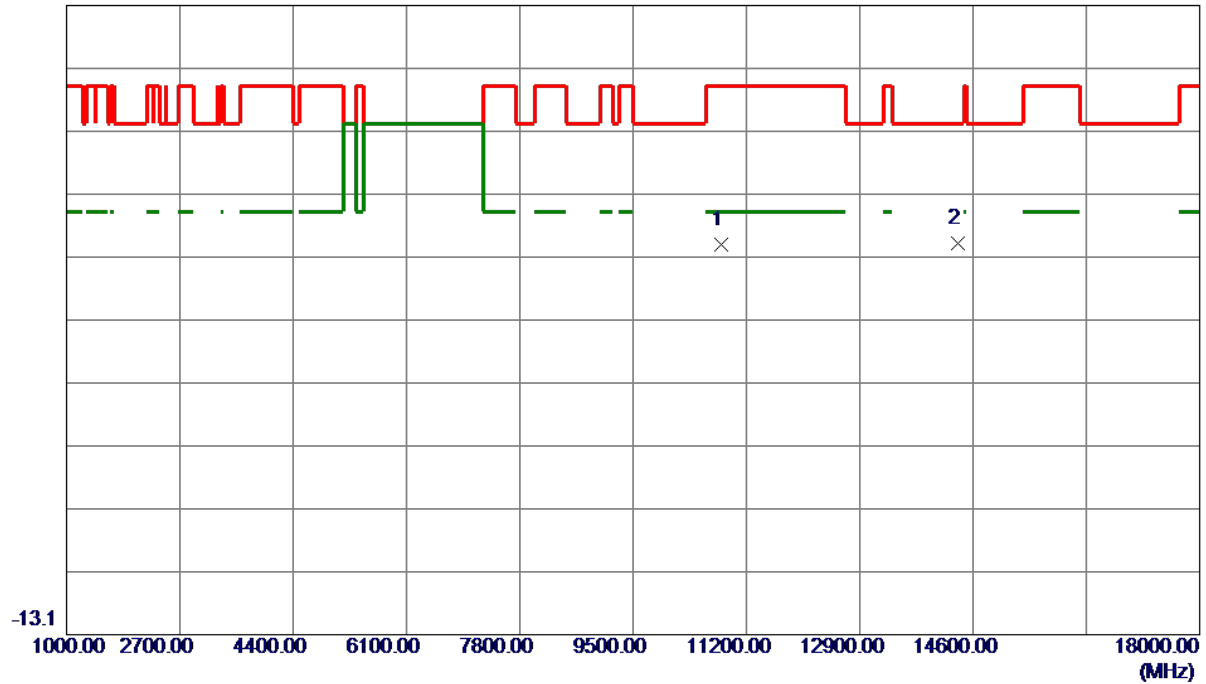


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10813.2500	39.49	9.50	48.99	74.00	-25.01	Peak	
2 *	14380.7000	38.92	10.17	49.09	68.20	-19.11	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

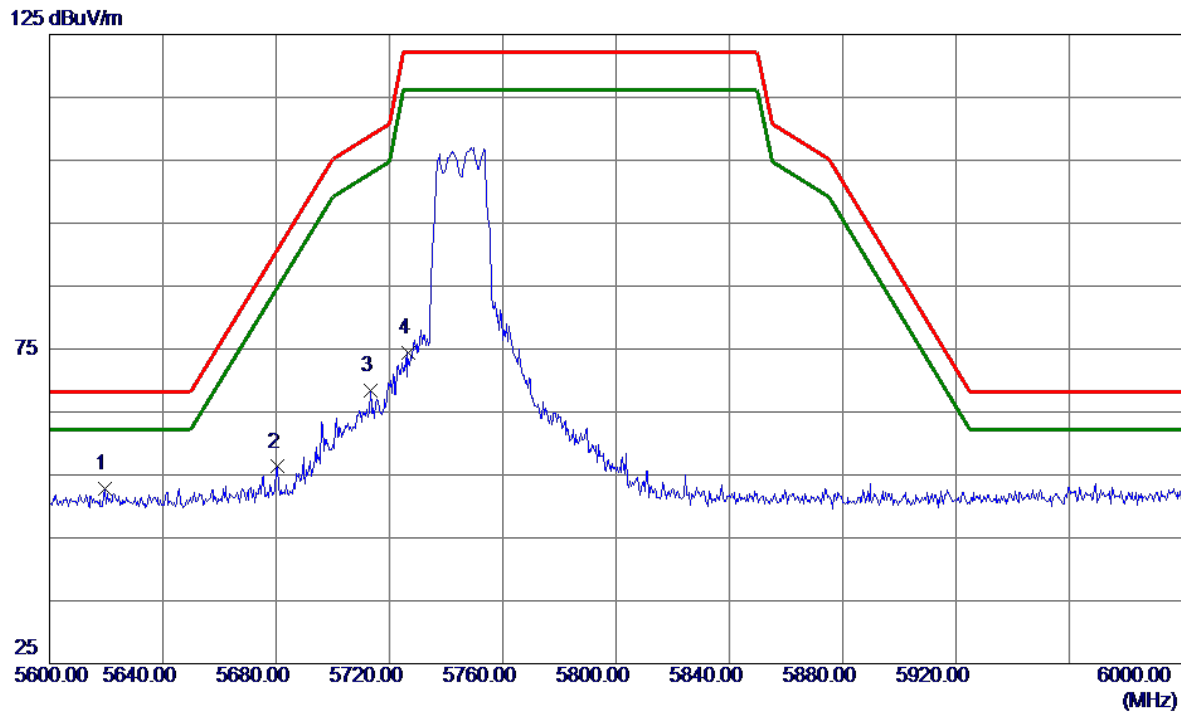

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5619.6000	40.86	11.99	52.85	68.20	-15.35	Peak	
2	5680.4000	44.20	12.10	56.30	90.70	-34.40	Peak	
3	5713.4000	56.15	12.16	68.31	108.95	-40.64	Peak	
4	5726.6000	62.13	12.18	74.31	122.20	-47.89	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

86.9 dBuV/m

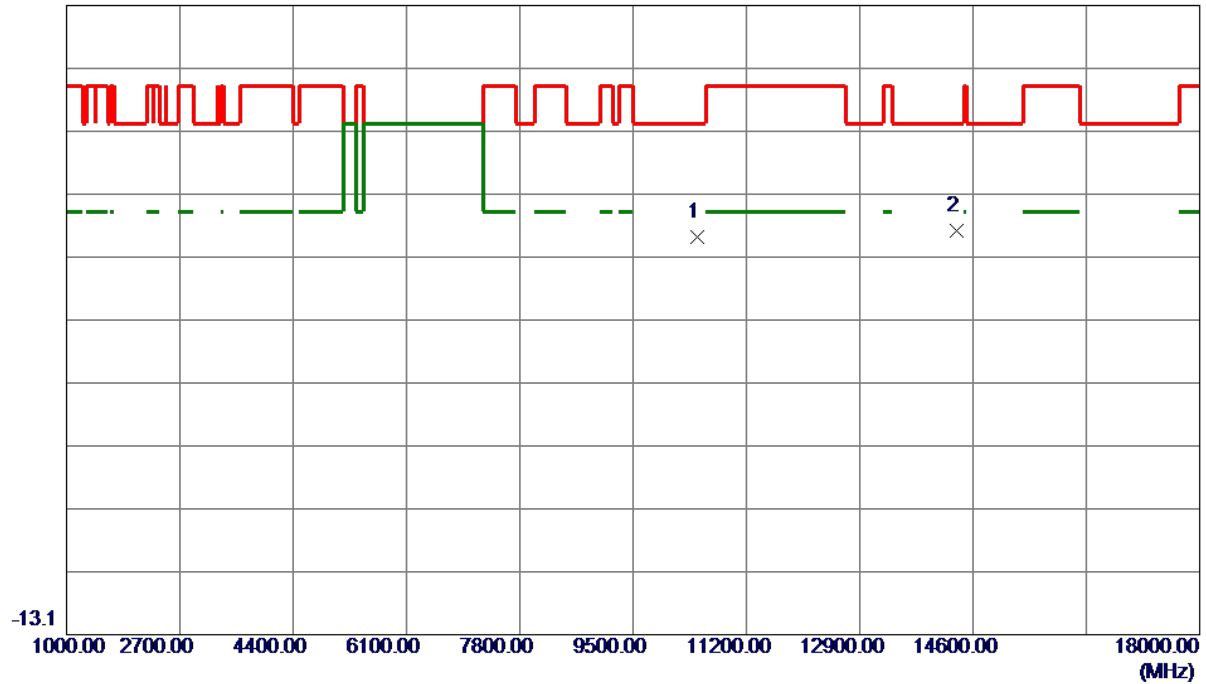

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10466.4500	40.70	9.36	50.06	68.20	-18.14	Peak	
2 *	14346.7000	40.95	10.13	51.08	68.20	-17.12	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

86.9 dBuV/m

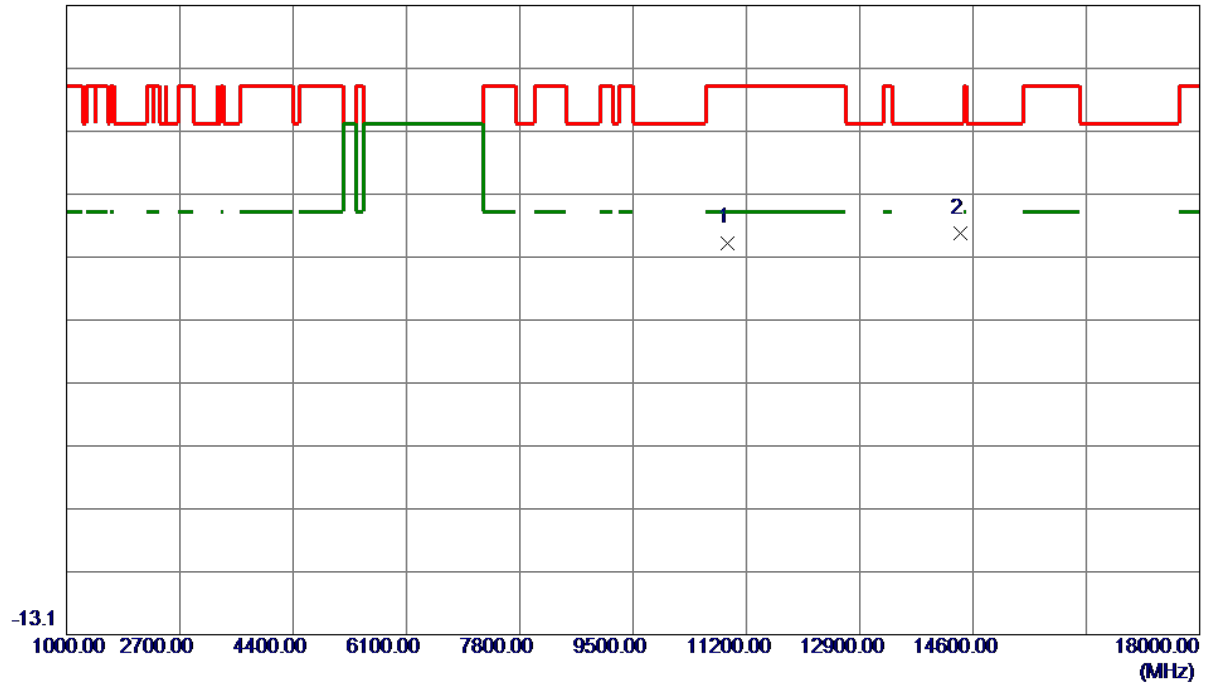

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10923.7500	39.66	9.54	49.20	74.00	-24.80	Peak	
2 *	14407.0500	40.57	10.20	50.77	68.20	-17.43	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

86.9 dBuV/m

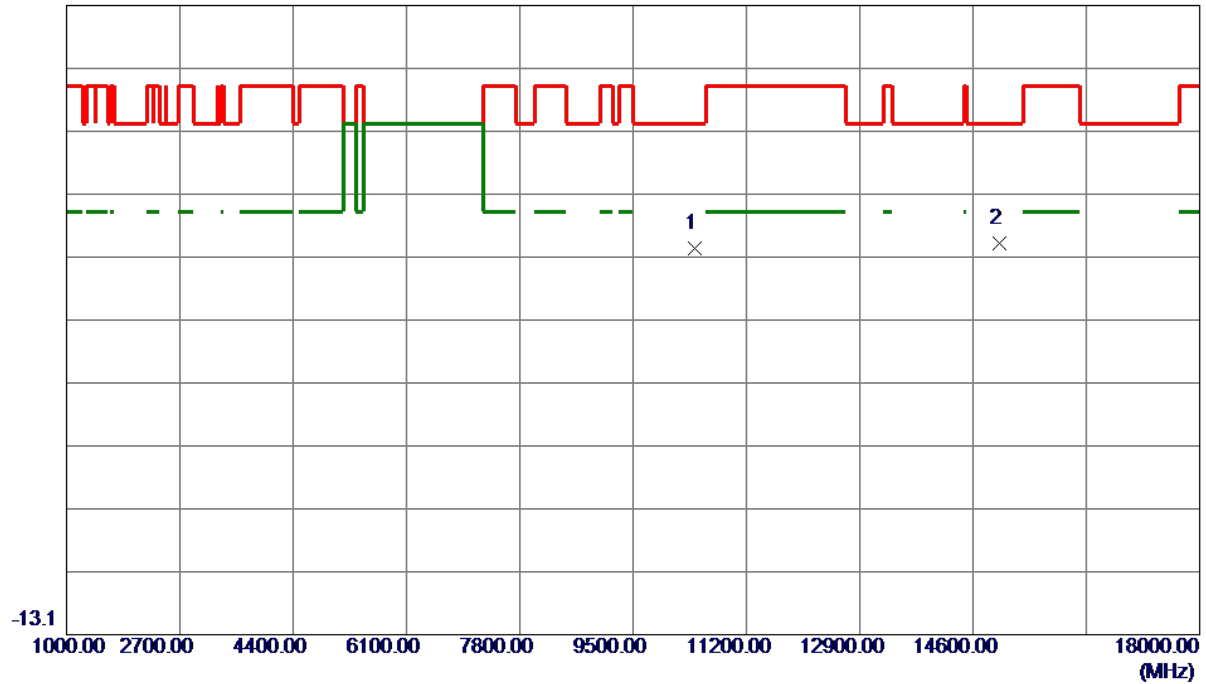


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10432.4500	38.99	9.30	48.29	68.20	-19.91	Peak	
2 *	14994.4000	39.76	9.30	49.06	68.20	-19.14	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

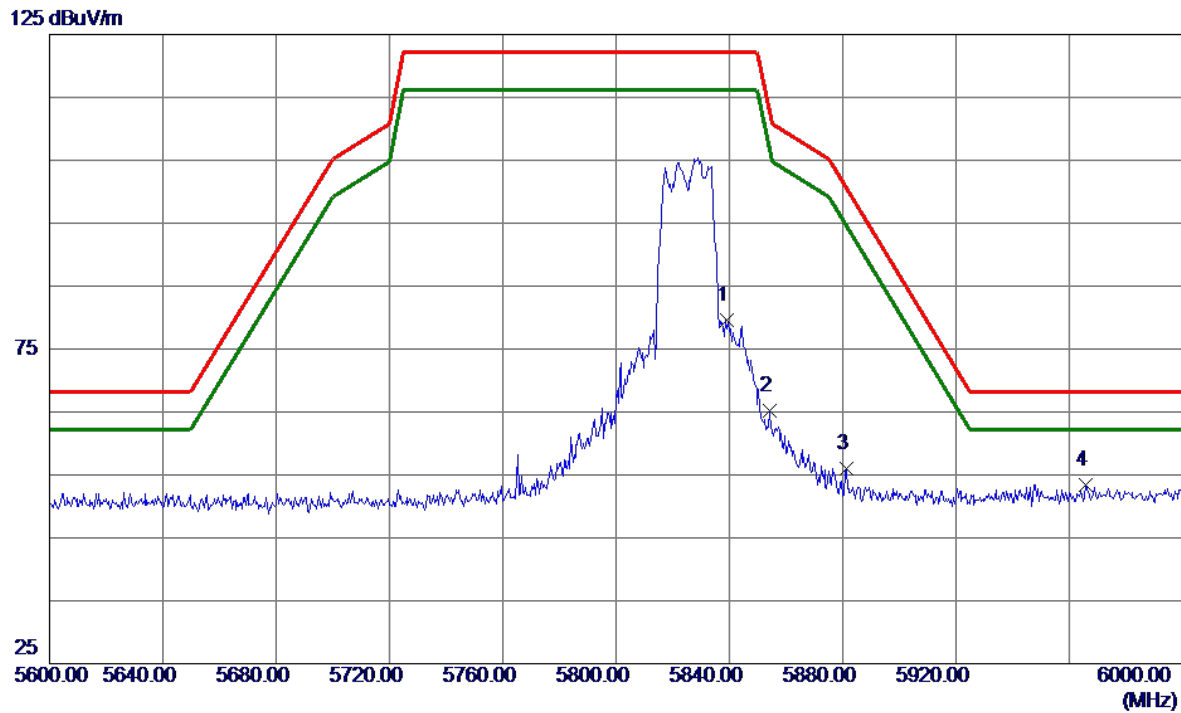

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5839.0000	67.25	12.38	79.63	122.20	-42.57	Peak	
2	5854.2000	52.74	12.40	65.14	112.62	-47.48	Peak	
3	5881.2000	43.61	12.45	56.06	100.61	-44.55	Peak	
4 *	5965.8000	40.89	12.60	53.49	68.20	-14.71	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

86.9 dBuV/m

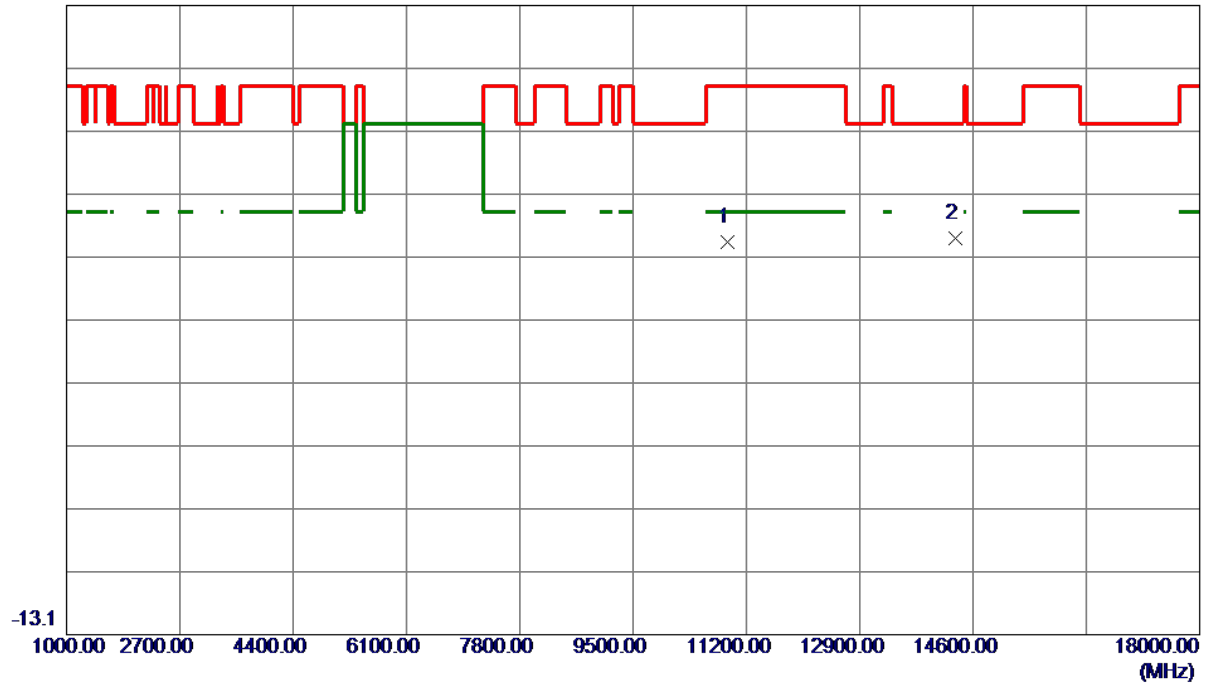


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10916.9500	39.73	9.54	49.27	74.00	-24.73	Peak	
2 *	14326.3000	39.88	10.11	49.99	68.20	-18.21	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

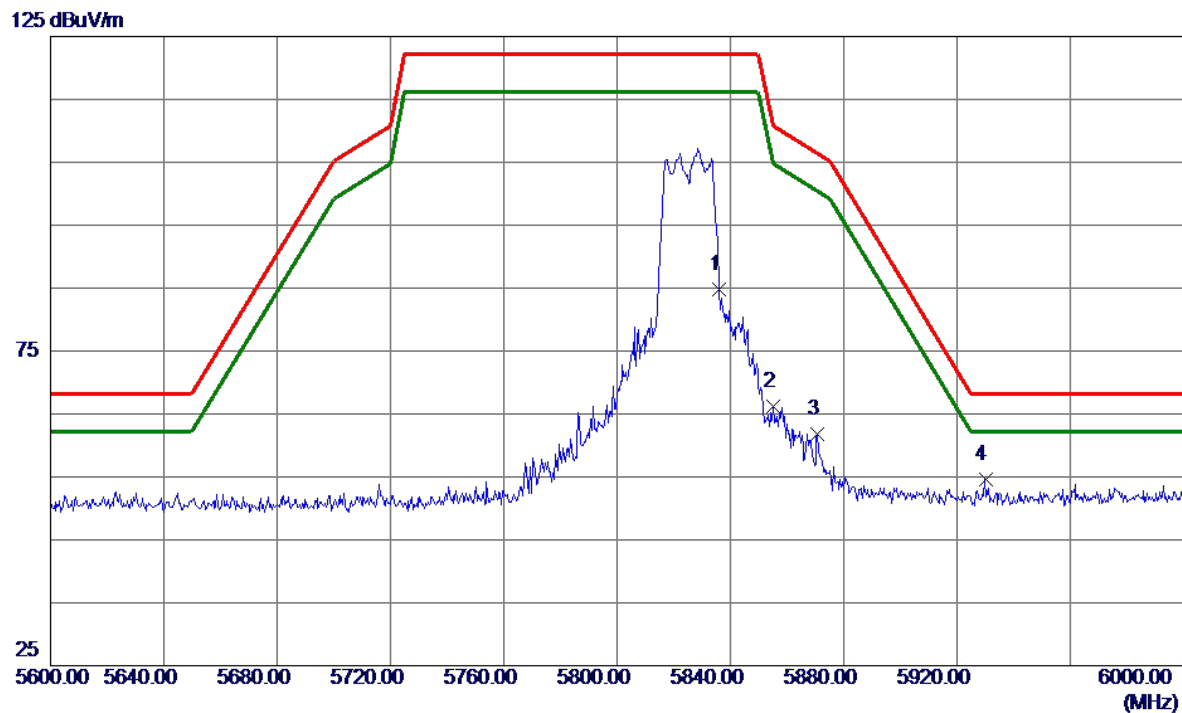

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5836.0000	72.35	12.37	84.72	122.20	-37.48	Peak	
2	5855.2000	53.81	12.41	66.22	110.74	-44.52	Peak	
3	5870.8000	49.28	12.43	61.71	106.38	-44.67	Peak	
4 *	5930.0000	42.07	12.54	54.61	68.20	-13.59	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

86.9 dBuV/m

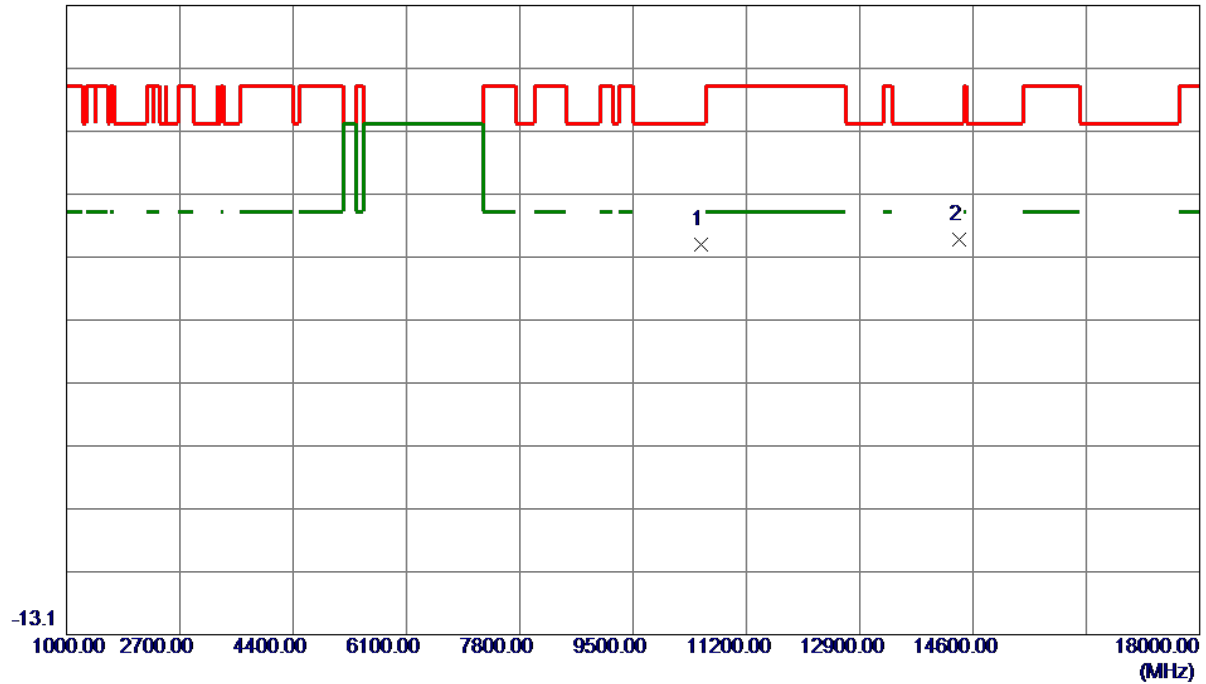


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10514.0500	39.51	9.41	48.92	68.20	-19.28	Peak	
2 *	14399.4000	39.56	10.19	49.75	68.20	-18.45	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

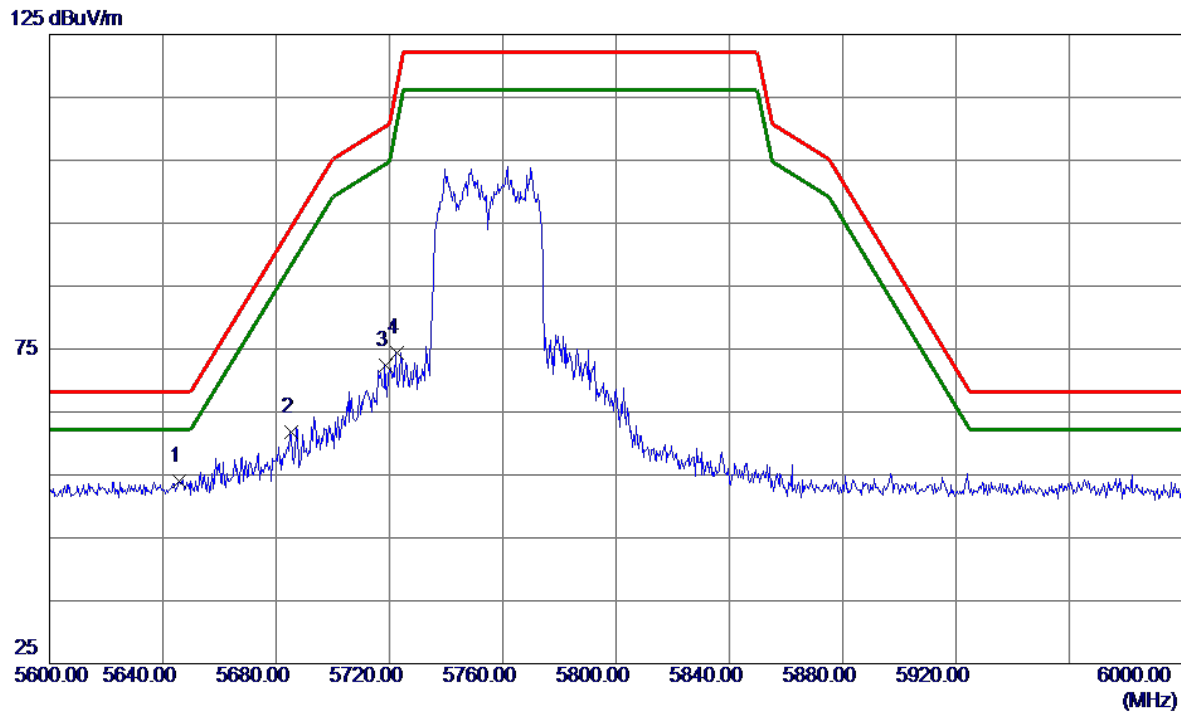

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5645.7599	41.88	12.04	53.92	68.20	-14.28	Peak	
2	5685.1800	49.63	12.11	61.74	94.23	-32.49	Peak	
3	5718.5200	60.18	12.16	72.34	110.39	-38.05	Peak	
4	5722.4600	62.16	12.17	74.33	116.41	-42.08	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

86.9 dBuV/m

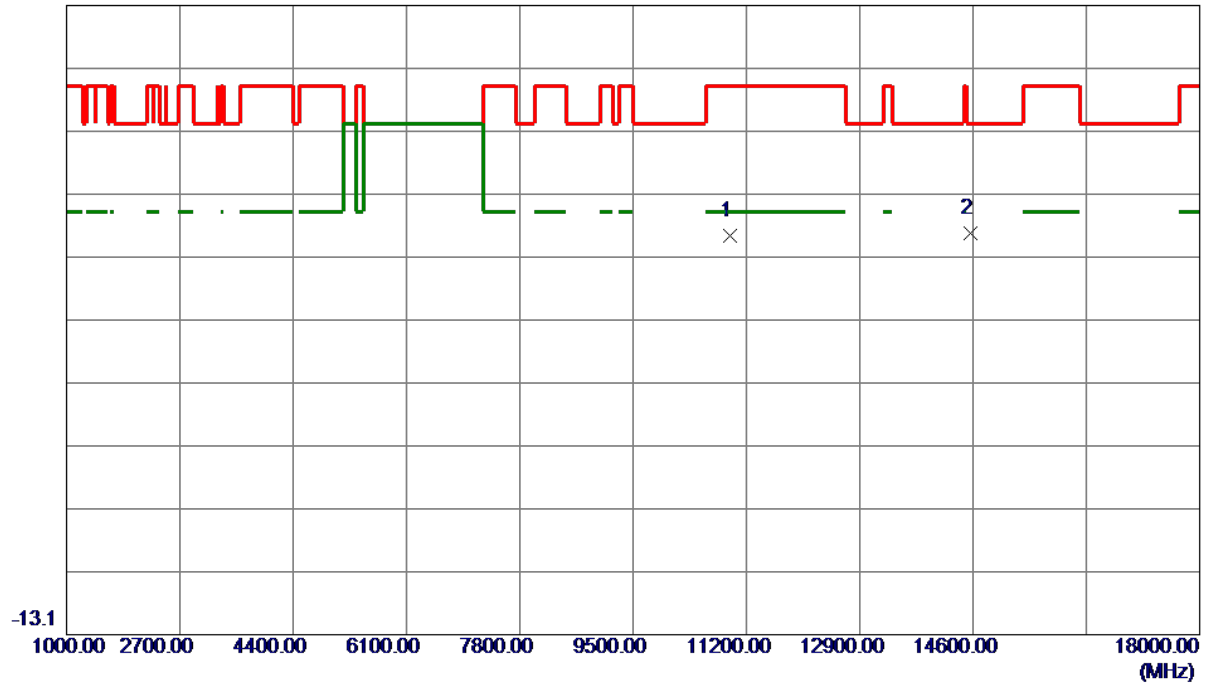


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10948.4000	40.83	9.54	50.37	74.00	-23.63	Peak	
2 *	14561.7500	40.46	10.18	50.64	68.20	-17.56	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

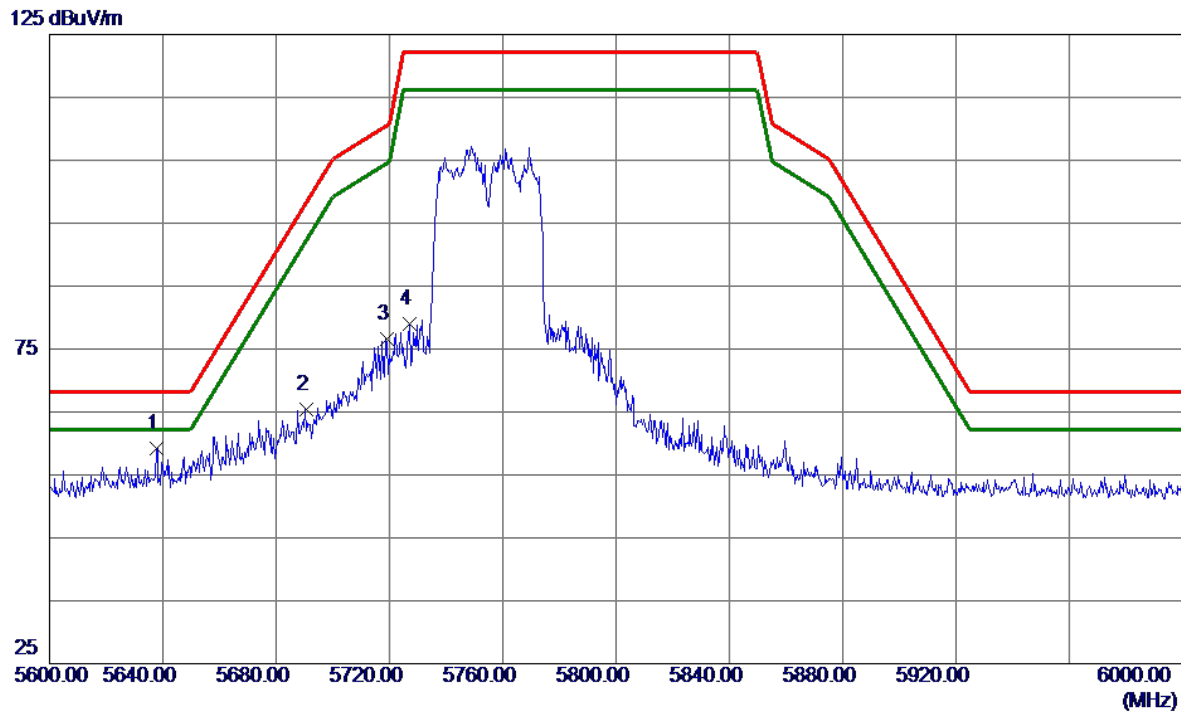

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5637.9800	47.21	12.02	59.23	68.20	-8.97	Peak	
2	5690.5200	53.21	12.12	65.33	98.18	-32.85	Peak	
3	5718.9600	64.40	12.17	76.57	110.51	-33.94	Peak	
4	5727.2400	66.79	12.18	78.97	122.20	-43.23	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

86.9 dBuV/m

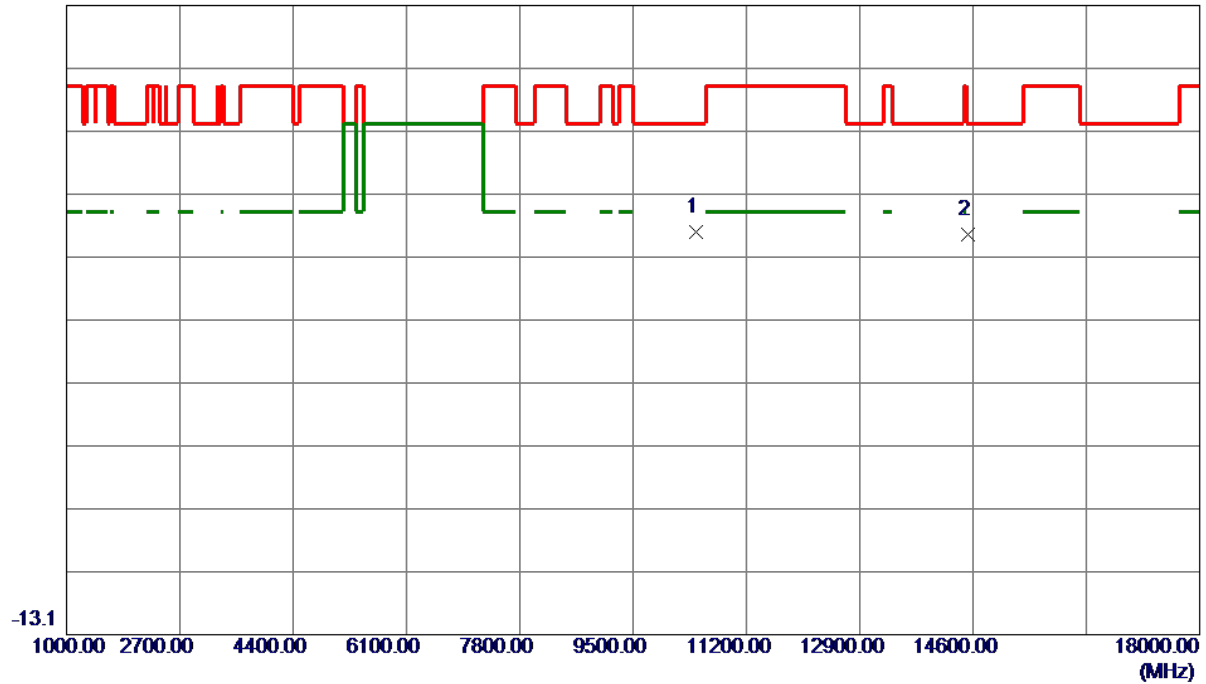


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10435.8500	41.54	9.31	50.85	68.20	-17.35	Peak	
2	14531.1500	40.30	10.24	50.54	68.20	-17.66	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

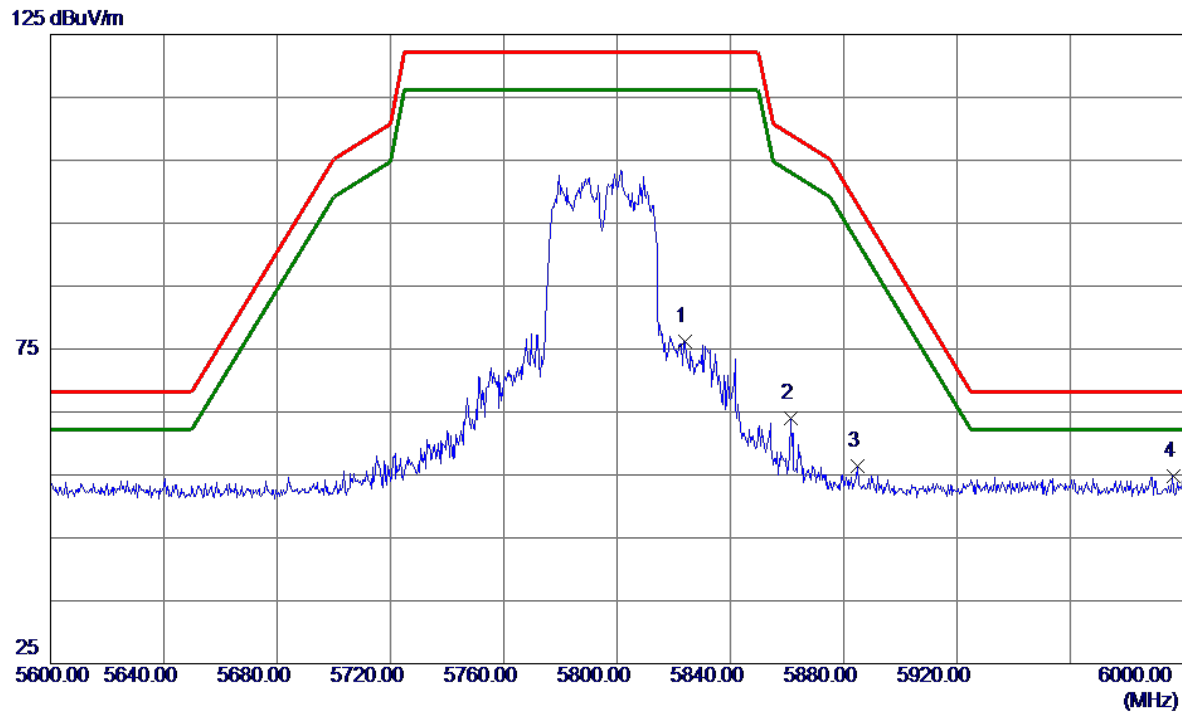

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5823.9800	63.76	12.35	76.11	122.20	-46.09	Peak	
2	5861.5200	51.55	12.42	63.97	108.97	-45.00	Peak	
3	5884.8600	43.89	12.46	56.35	97.90	-41.55	Peak	
4 *	5996.3000	42.12	12.65	54.77	68.20	-13.43	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

86.9 dBuV/m

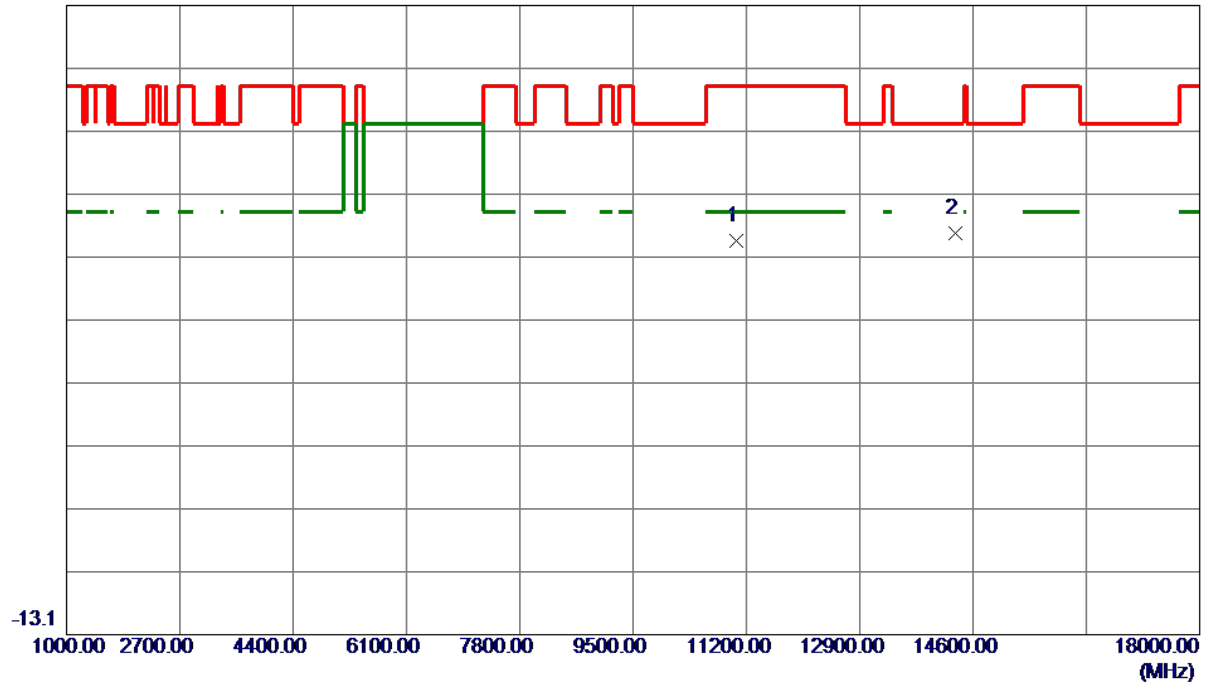


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11058.0500	39.96	9.59	49.55	74.00	-24.45	Peak	
2 *	14326.3000	40.63	10.11	50.74	68.20	-17.46	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

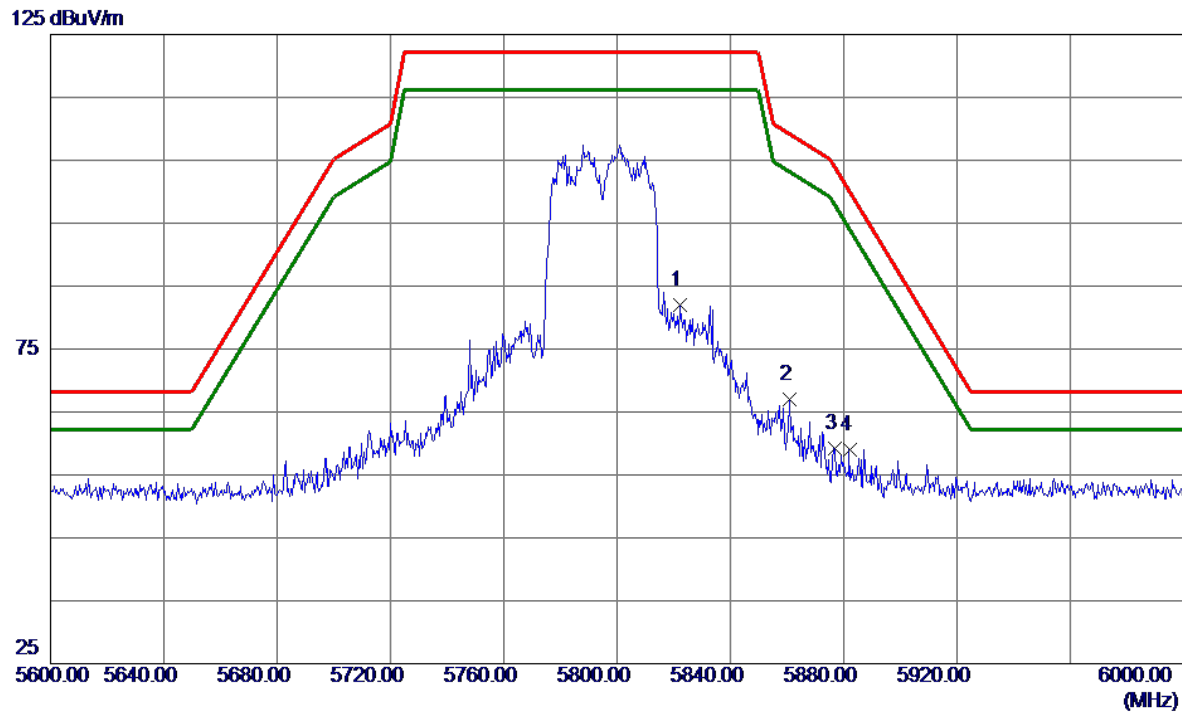

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5822.3600	69.70	12.35	82.05	122.20	-40.15	Peak	
2	5860.8800	54.58	12.42	67.00	109.15	-42.15	Peak	
3	5876.7799	46.70	12.44	59.14	103.88	-44.74	Peak	
4	5882.2400	46.56	12.45	59.01	99.84	-40.83	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

86.9 dBuV/m

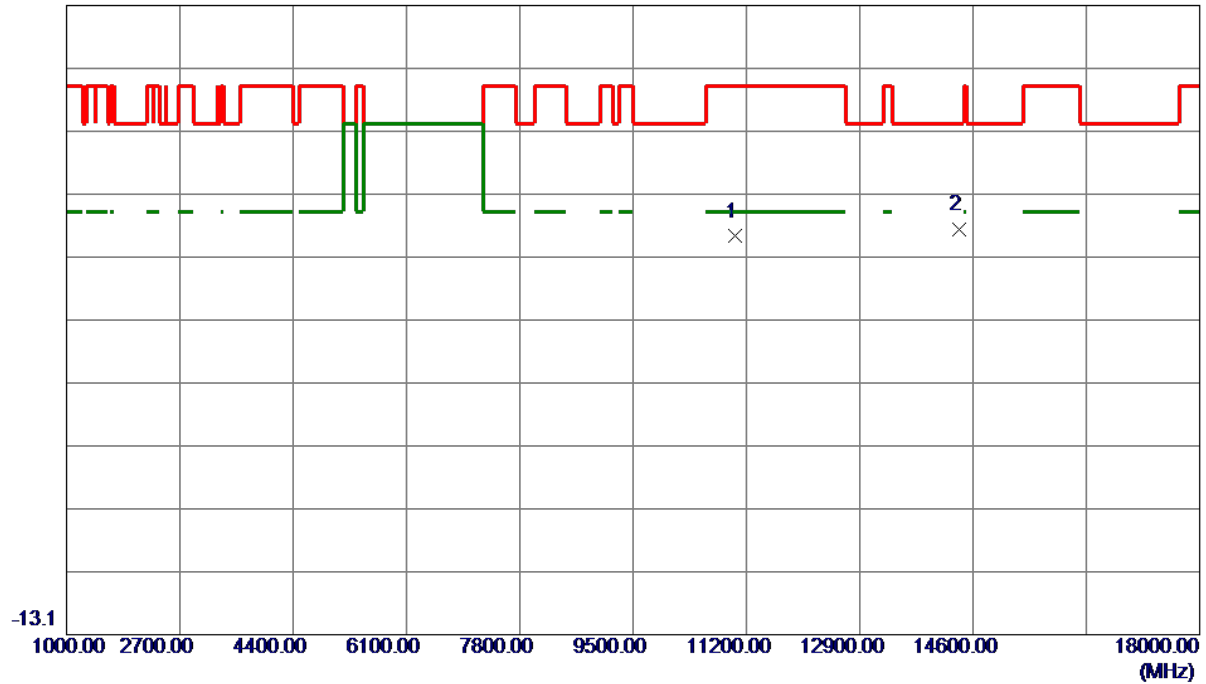


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11030.0000	40.63	9.57	50.20	74.00	-23.80	Peak	
2 *	14393.4500	41.08	10.18	51.26	68.20	-16.94	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

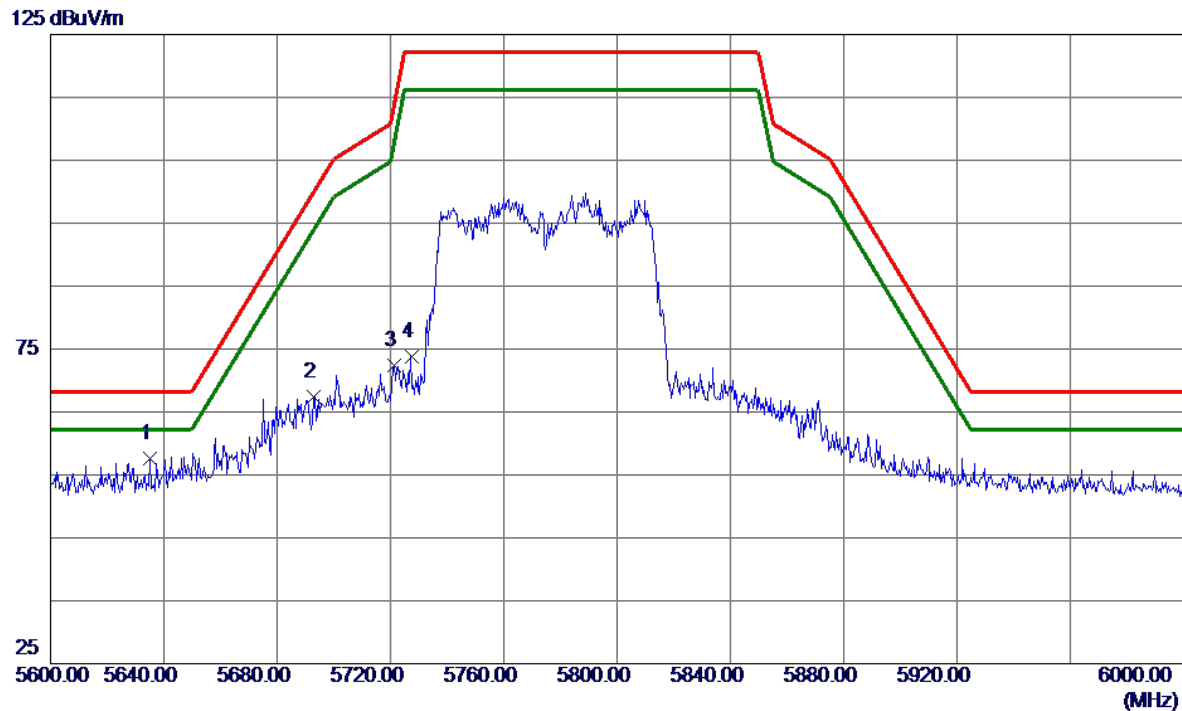

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5635.3000	45.63	12.02	57.65	68.20	-10.55	Peak	
2	5693.0800	55.31	12.12	67.43	100.08	-32.65	Peak	
3	5721.2000	60.17	12.17	72.34	113.54	-41.20	Peak	
4	5727.3600	61.57	12.18	73.75	122.20	-48.45	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

86.9 dBuV/m

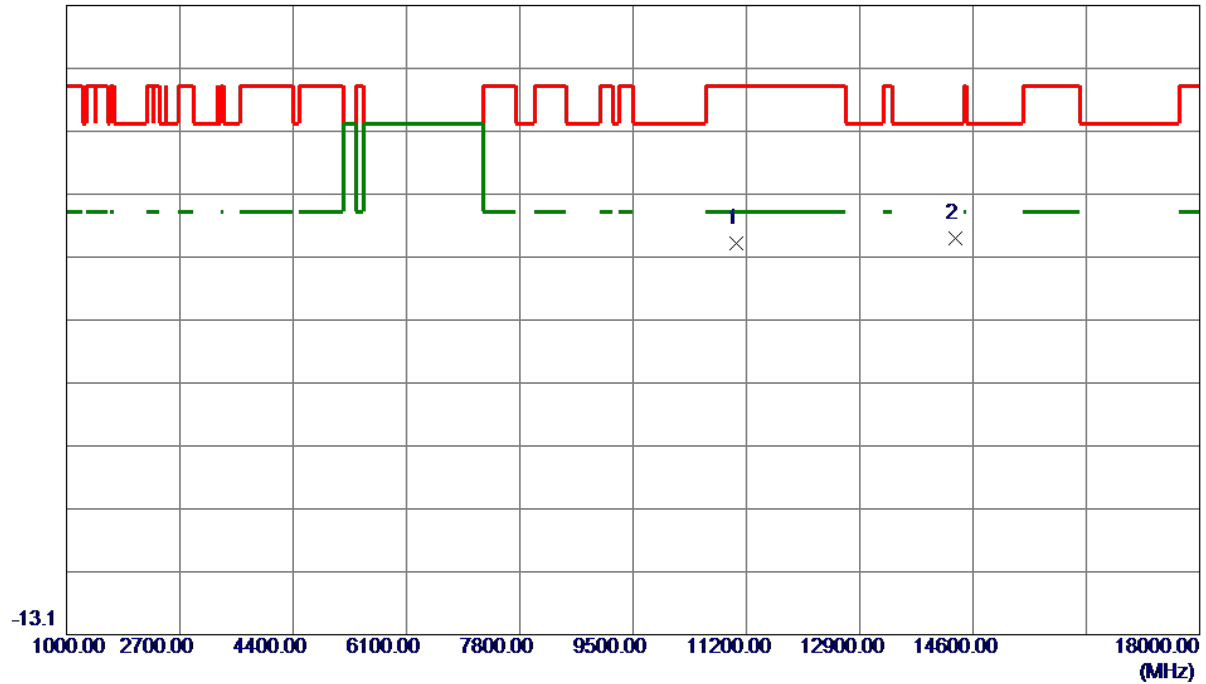


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11049.5500	39.54	9.58	49.12	74.00	-24.88	Peak	
2 *	14326.3000	39.77	10.11	49.88	68.20	-18.32	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

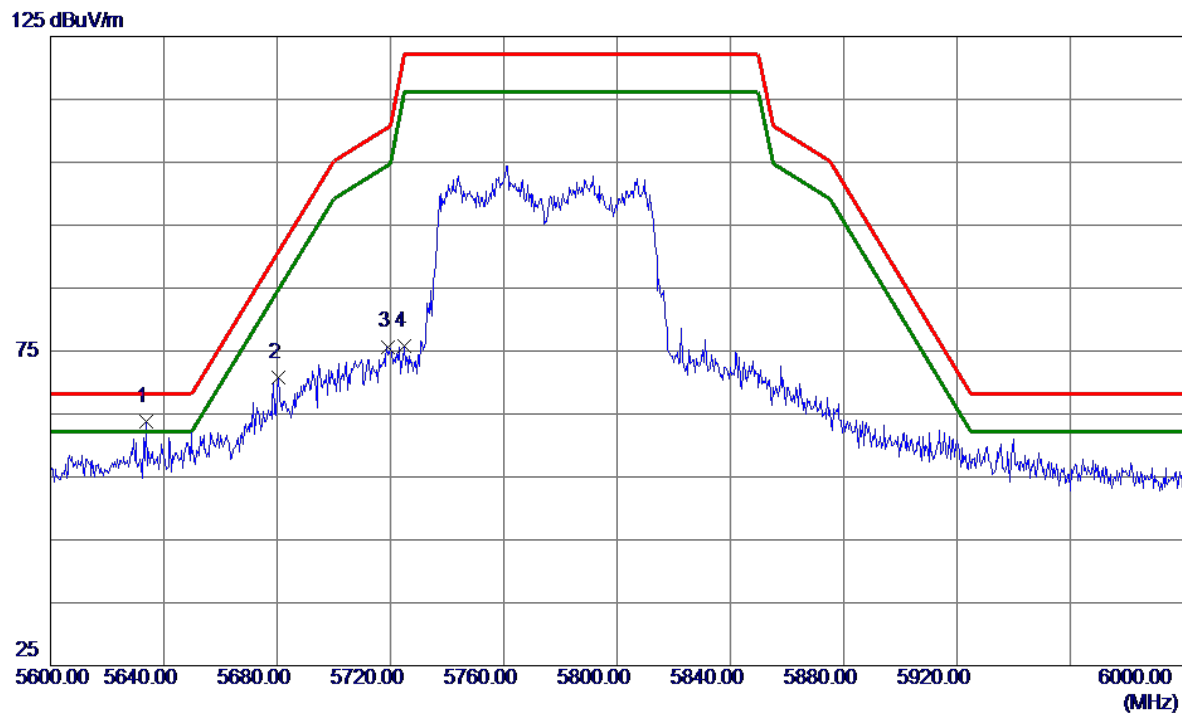

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5633.9400	51.74	12.02	63.76	68.20	-4.44	Peak	
2	5680.5200	58.71	12.10	70.81	90.78	-19.97	Peak	
3	5719.0400	63.53	12.17	75.70	110.53	-34.83	Peak	
4	5725.0000	63.60	12.18	75.78	122.20	-46.42	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

86.9 dBuV/m

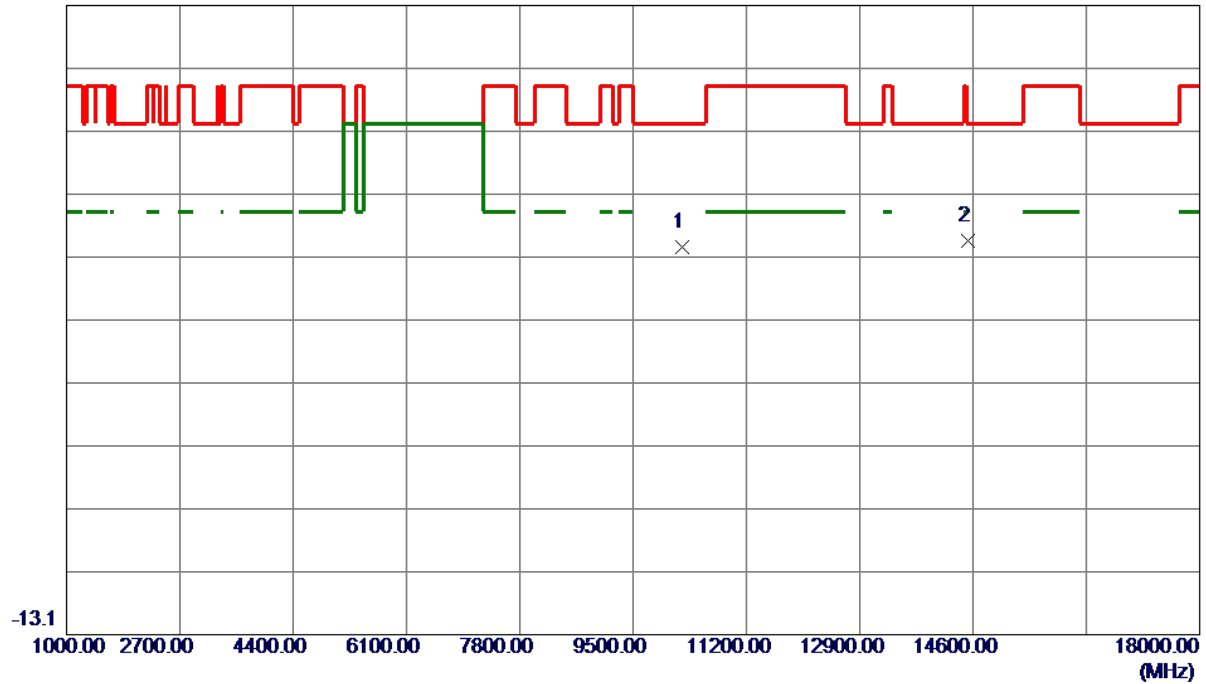


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10233.5500	39.60	8.98	48.58	68.20	-19.62	Peak	
2 *	14523.5000	39.20	10.25	49.45	68.20	-18.75	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5745 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

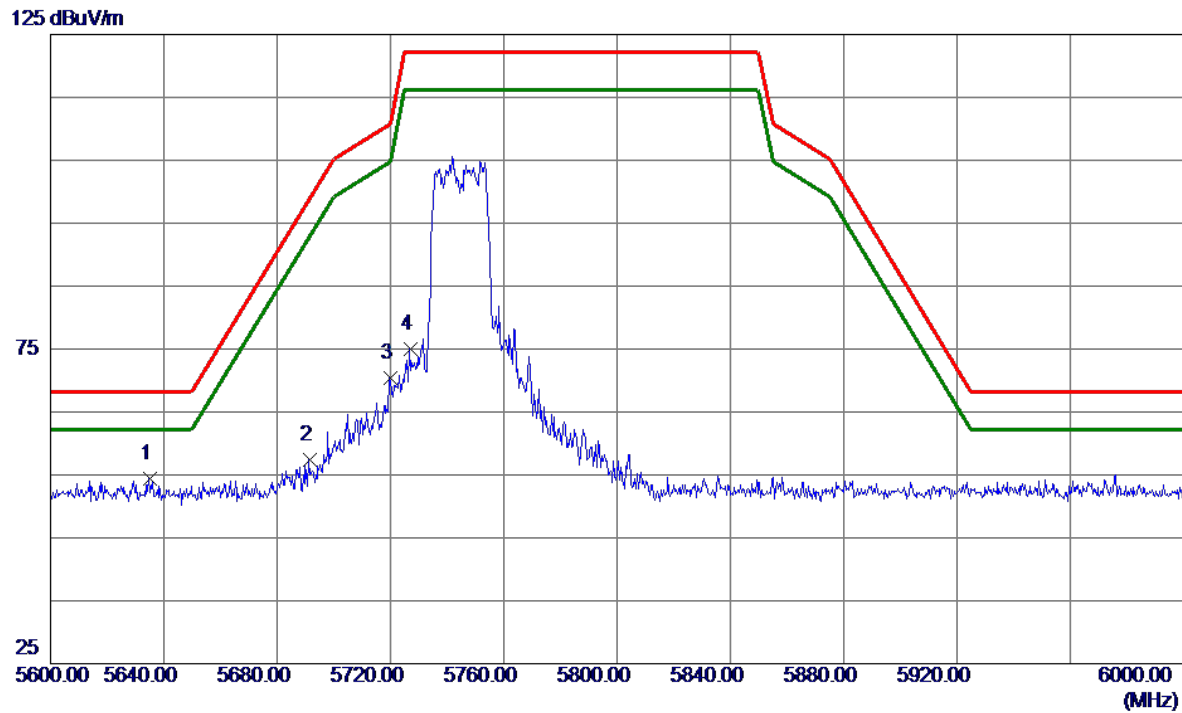

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5634.9200	42.36	12.02	54.38	68.20	-13.82	Peak	
2	5691.5000	45.22	12.12	57.34	98.91	-41.57	Peak	
3	5719.8000	58.15	12.17	70.32	110.74	-40.42	Peak	
4	5727.0600	62.77	12.18	74.95	122.20	-47.25	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5745 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

86.9 dBuV/m

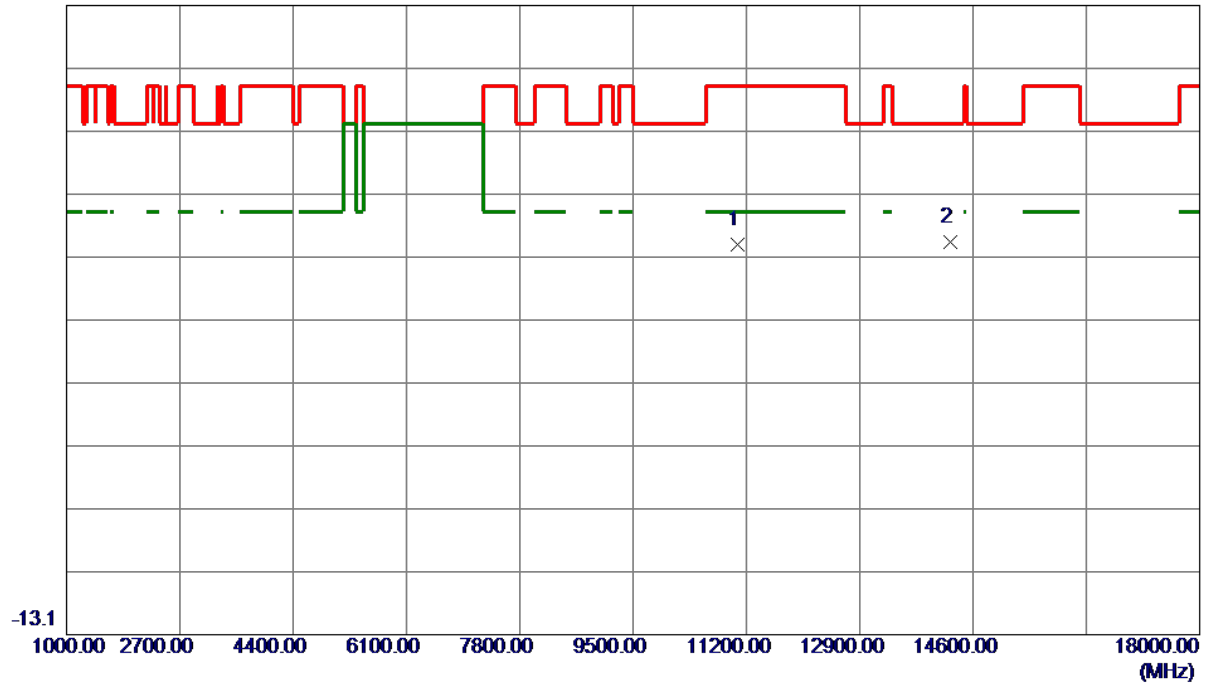


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11060.6000	39.29	9.59	48.88	74.00	-25.12	Peak	
2 *	14264.2500	39.26	10.04	49.30	68.20	-18.90	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5745 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

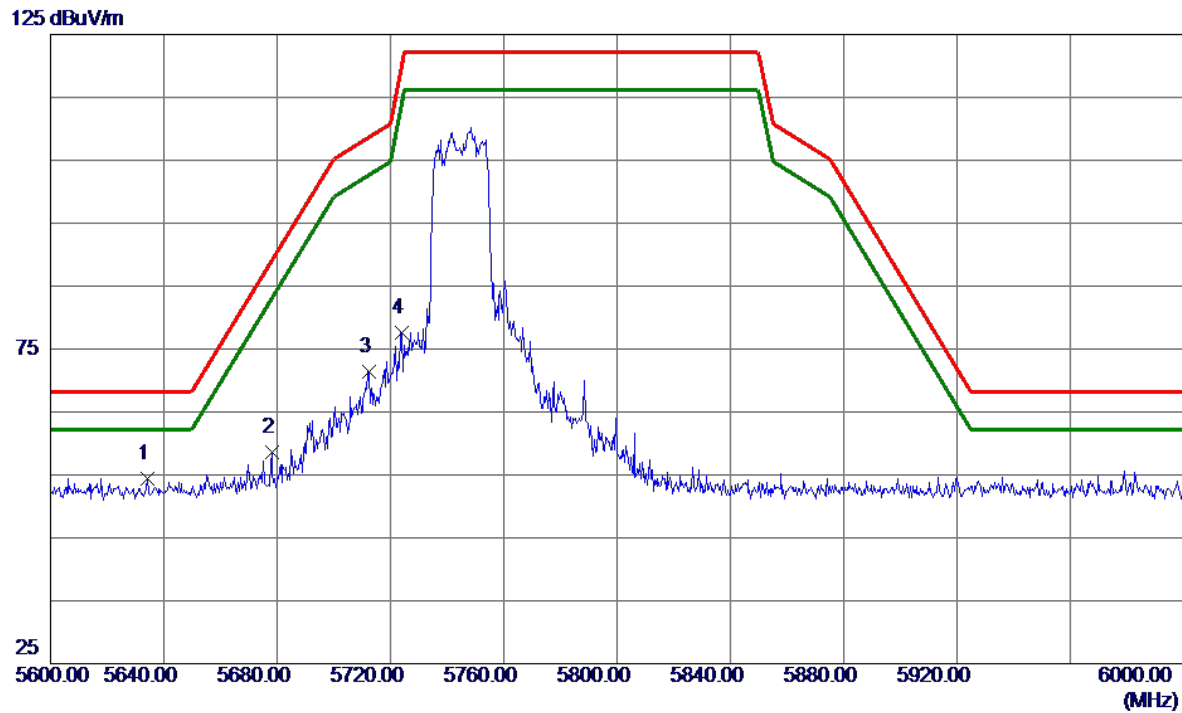

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5634.4400	42.41	12.02	54.43	68.20	-13.77	Peak	
2	5678.0400	46.59	12.09	58.68	88.95	-30.27	Peak	
3	5712.3800	59.23	12.15	71.38	108.67	-37.29	Peak	
4	5723.8200	65.34	12.17	77.51	119.51	-42.00	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5745 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

86.9 dBuV/m

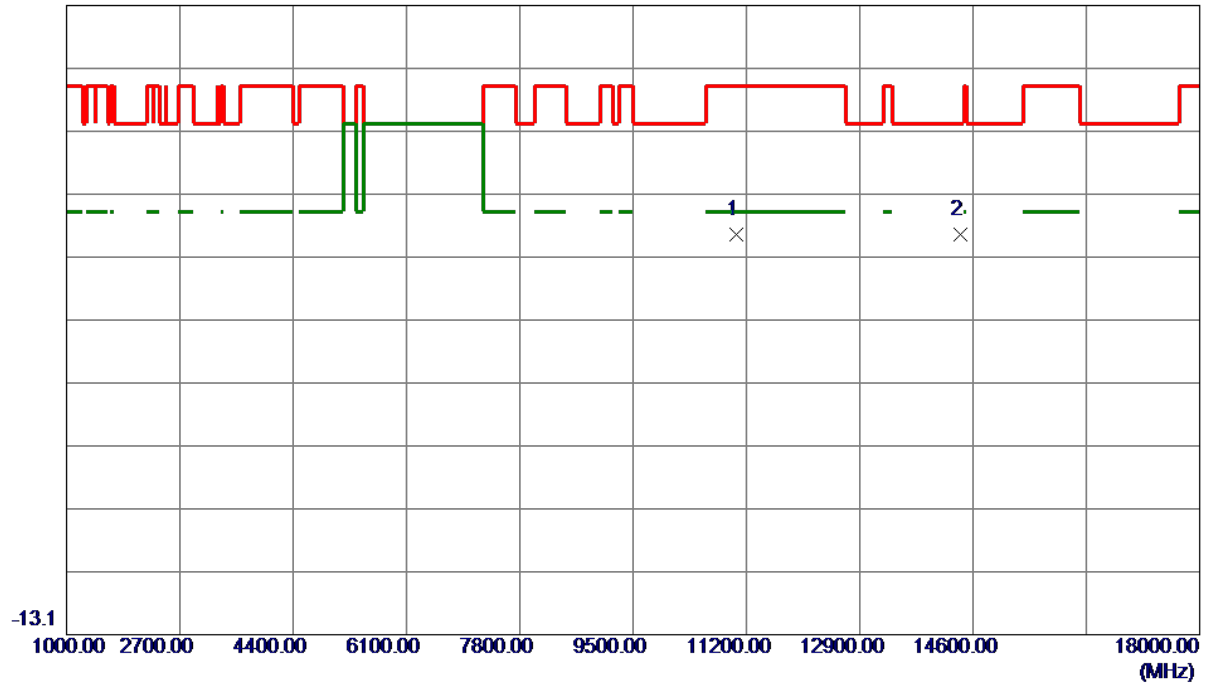

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11058.0500	40.82	9.59	50.41	74.00	-23.59	Peak	
2 *	14406.2000	40.32	10.20	50.52	68.20	-17.68	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5785 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

86.9 dBuV/m

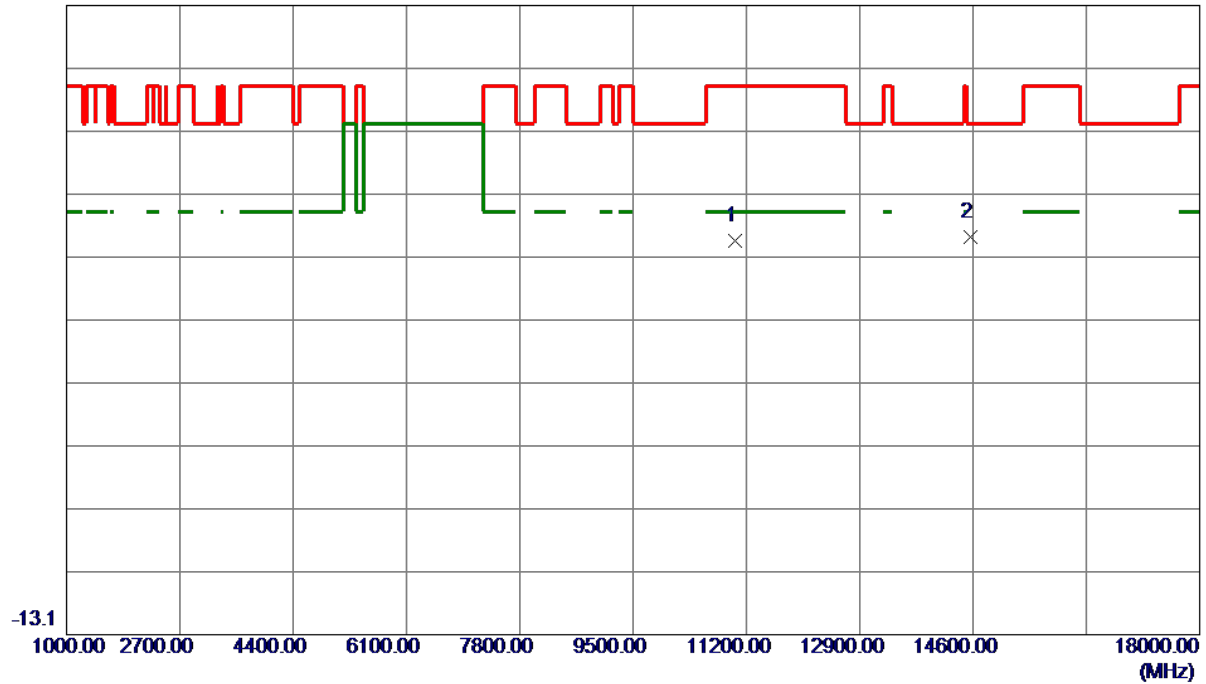

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11021.5000	39.92	9.57	49.49	74.00	-24.51	Peak	
2 *	14571.1000	39.89	10.16	50.05	68.20	-18.15	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5785 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

86.9 dBuV/m

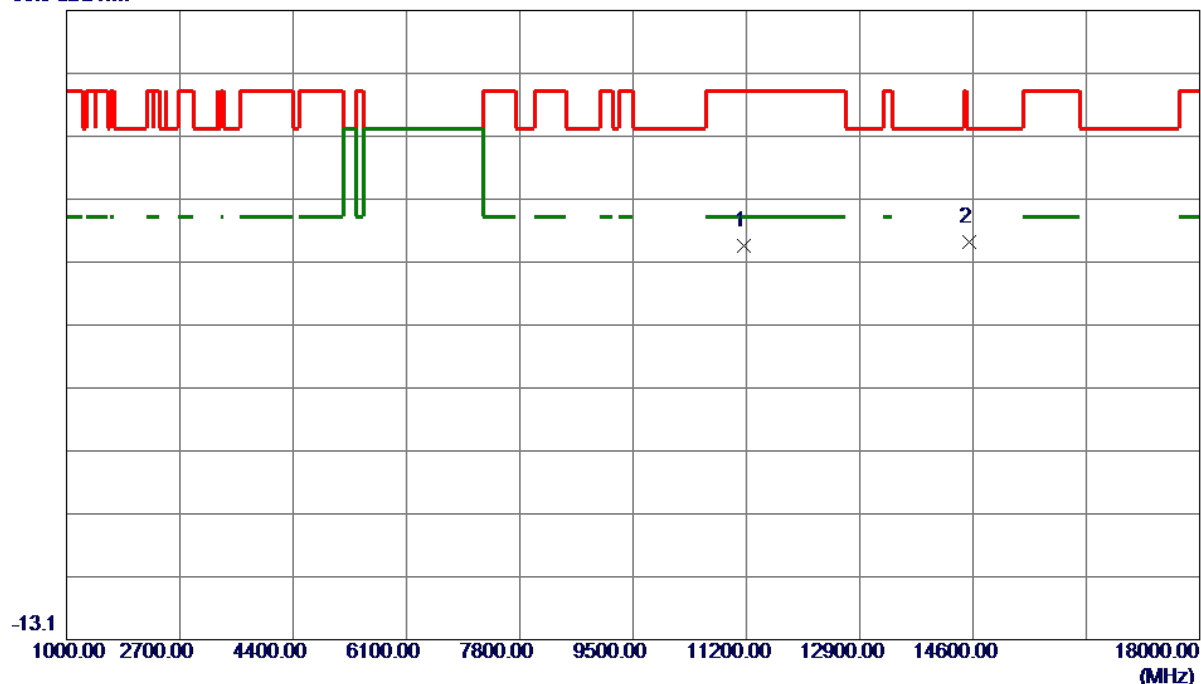


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11166.0000	39.89	9.63	49.52	74.00	-24.48	Peak	
2 *	14546.4500	39.93	10.21	50.14	68.20	-18.06	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5825 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

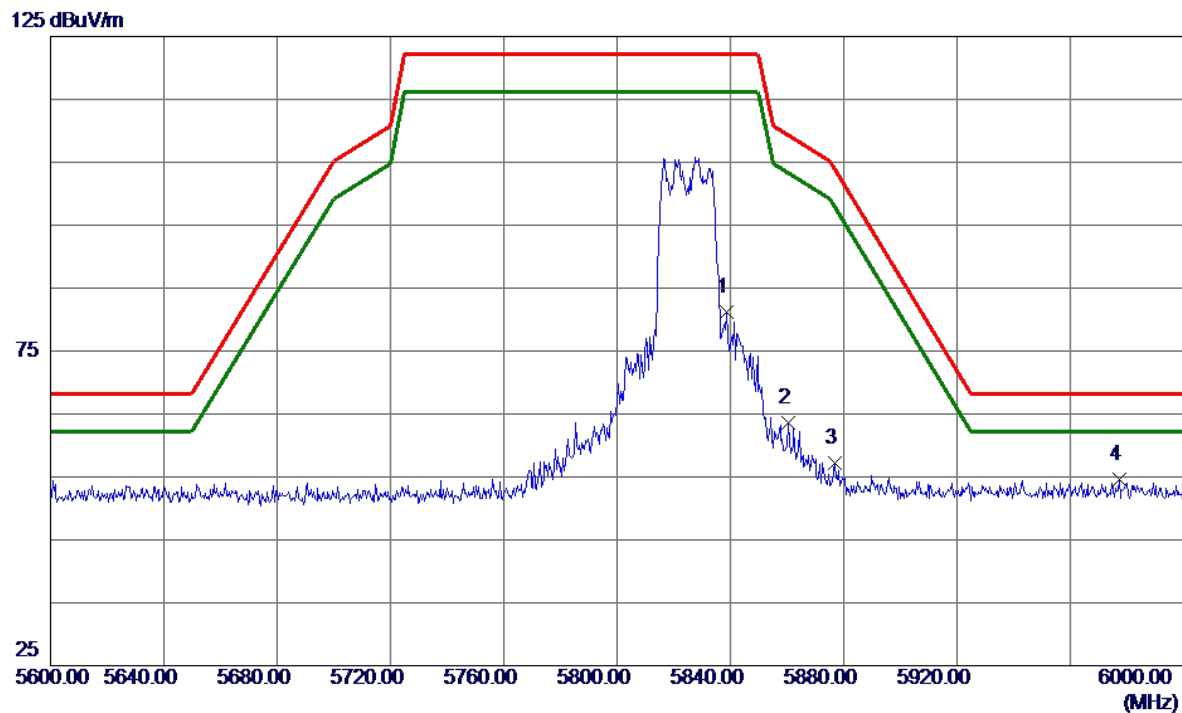

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5838.8600	68.80	12.38	81.18	122.20	-41.02	Peak	
2	5860.6000	51.19	12.41	63.60	109.23	-45.63	Peak	
3	5876.8200	44.83	12.44	57.27	103.85	-46.58	Peak	
4 *	5977.4600	41.90	12.62	54.52	68.20	-13.68	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5825 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

86.9 dBuV/m

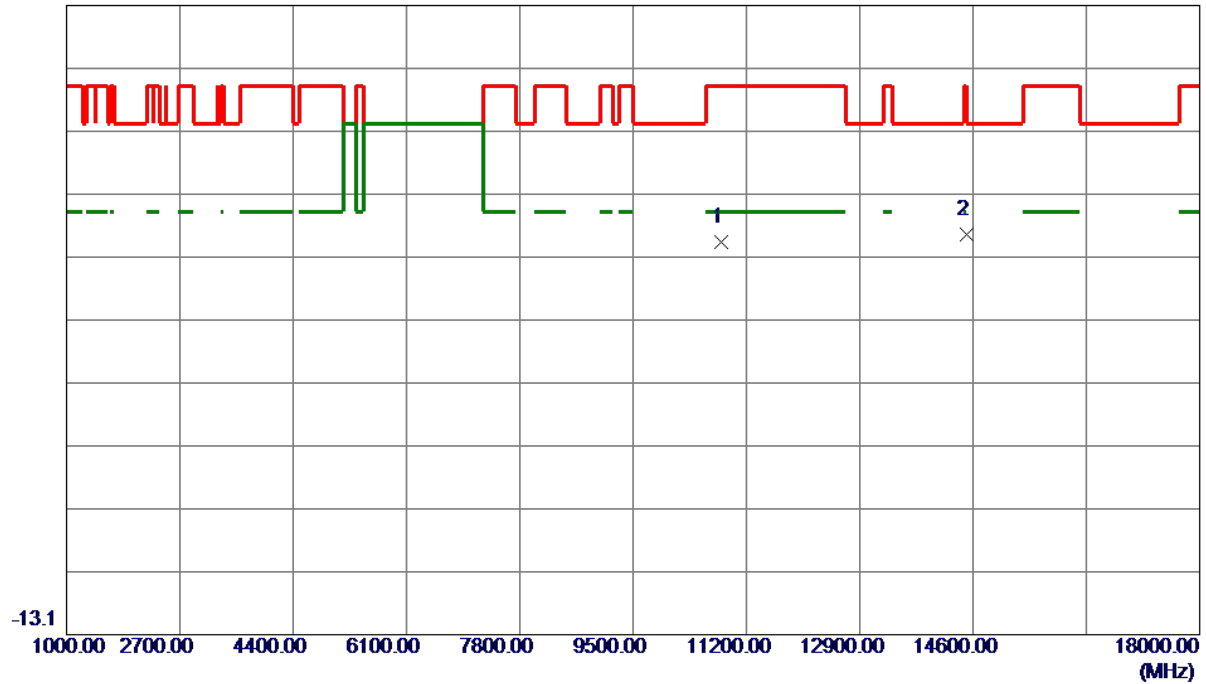


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10826.0000	39.80	9.51	49.31	74.00	-24.69	Peak	
2 *	14505.6500	40.28	10.29	50.57	68.20	-17.63	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5825 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

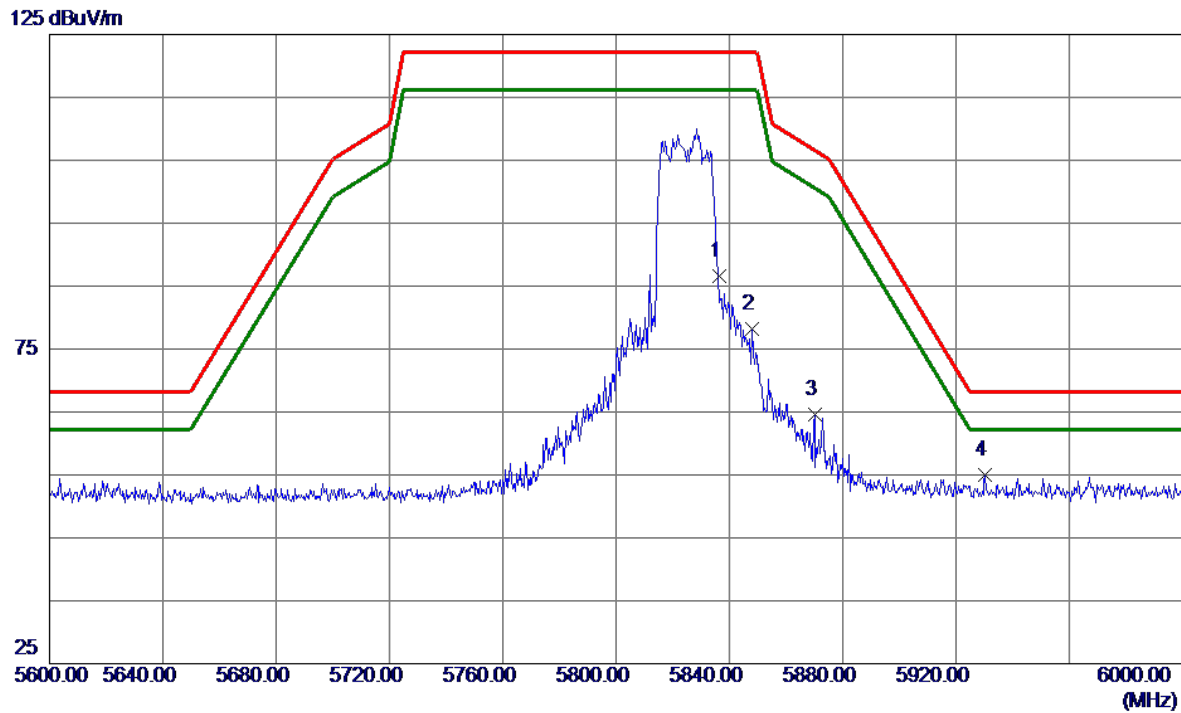

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5836.3200	74.17	12.37	86.54	122.20	-35.66	Peak	
2	5848.2000	65.75	12.39	78.14	122.20	-44.06	Peak	
3	5870.0800	52.15	12.43	64.58	106.58	-42.00	Peak	
4 *	5930.4200	42.42	12.54	54.96	68.20	-13.24	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5825 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

86.9 dBuV/m

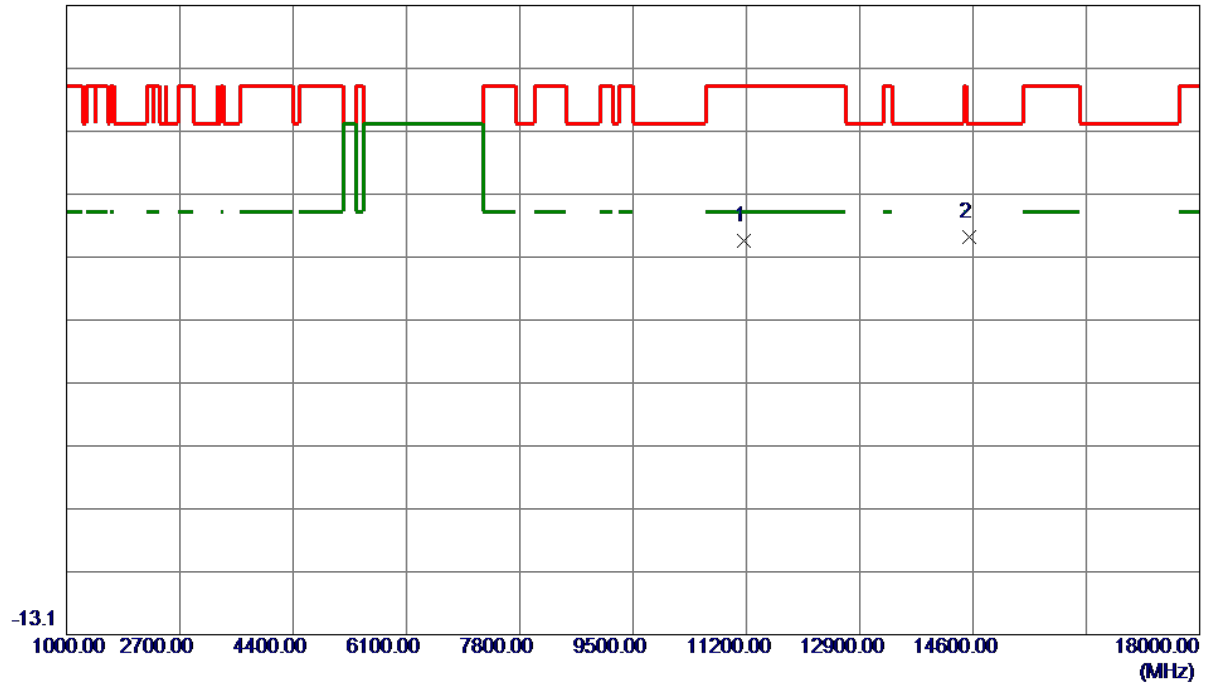


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11166.0000	39.89	9.63	49.52	74.00	-24.48	Peak	
2 *	14546.4500	39.93	10.21	50.14	68.20	-18.06	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5755 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

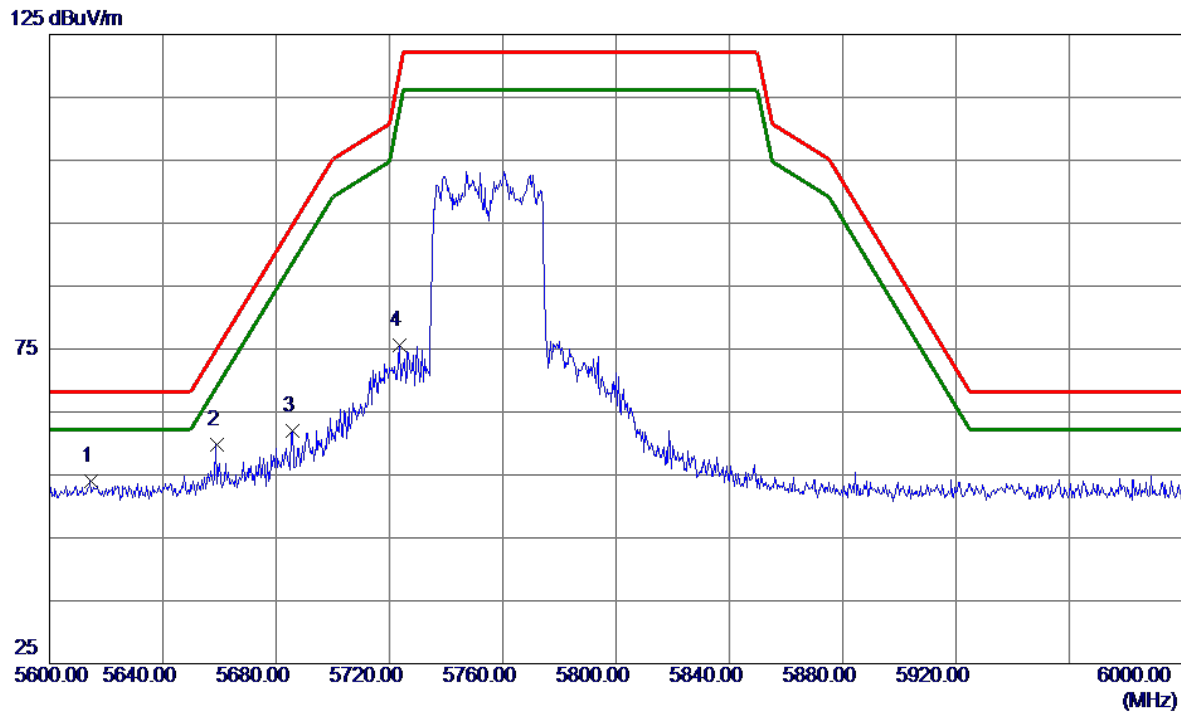

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5614.7200	42.05	11.98	54.03	68.20	-14.17	Peak	
2	5658.9800	47.78	12.06	59.84	74.85	-15.01	Peak	
3	5685.6000	49.82	12.11	61.93	94.54	-32.61	Peak	
4	5723.6600	63.37	12.17	75.54	119.14	-43.60	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5755 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

86.9 dBuV/m

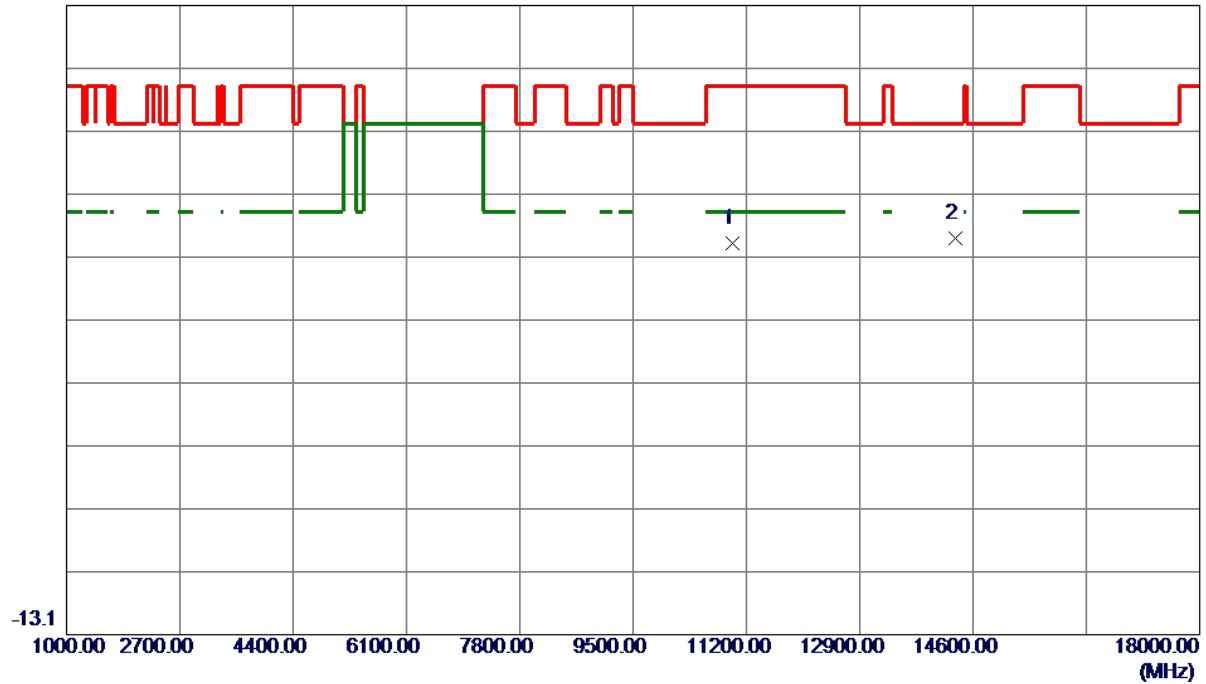


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10996.8500	39.61	9.56	49.17	74.00	-24.83	Peak	
2 *	14341.6000	39.85	10.13	49.98	68.20	-18.22	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5755 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

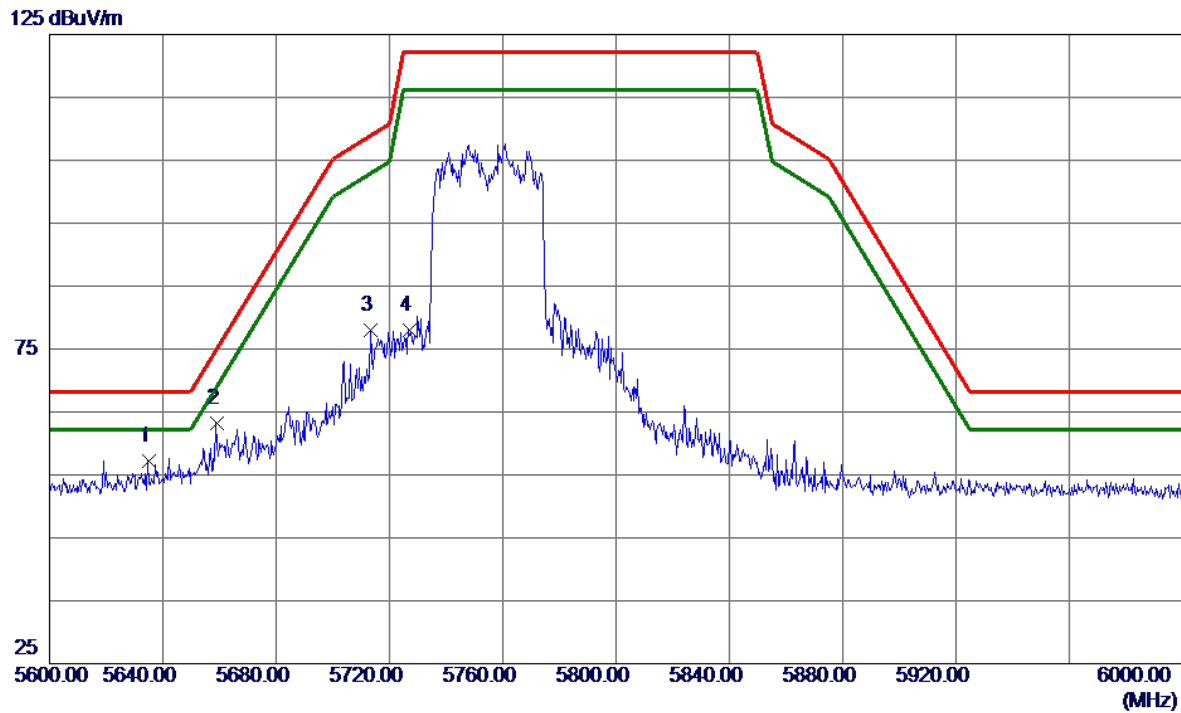


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5635.0400	45.26	12.02	57.28	68.20	-10.92	Peak	
2	5658.9200	51.11	12.06	63.17	74.80	-11.63	Peak	
3	5713.4200	65.93	12.16	78.09	108.96	-30.87	Peak	
4	5727.1600	65.84	12.18	78.02	122.20	-44.18	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5755 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

86.9 dBuV/m

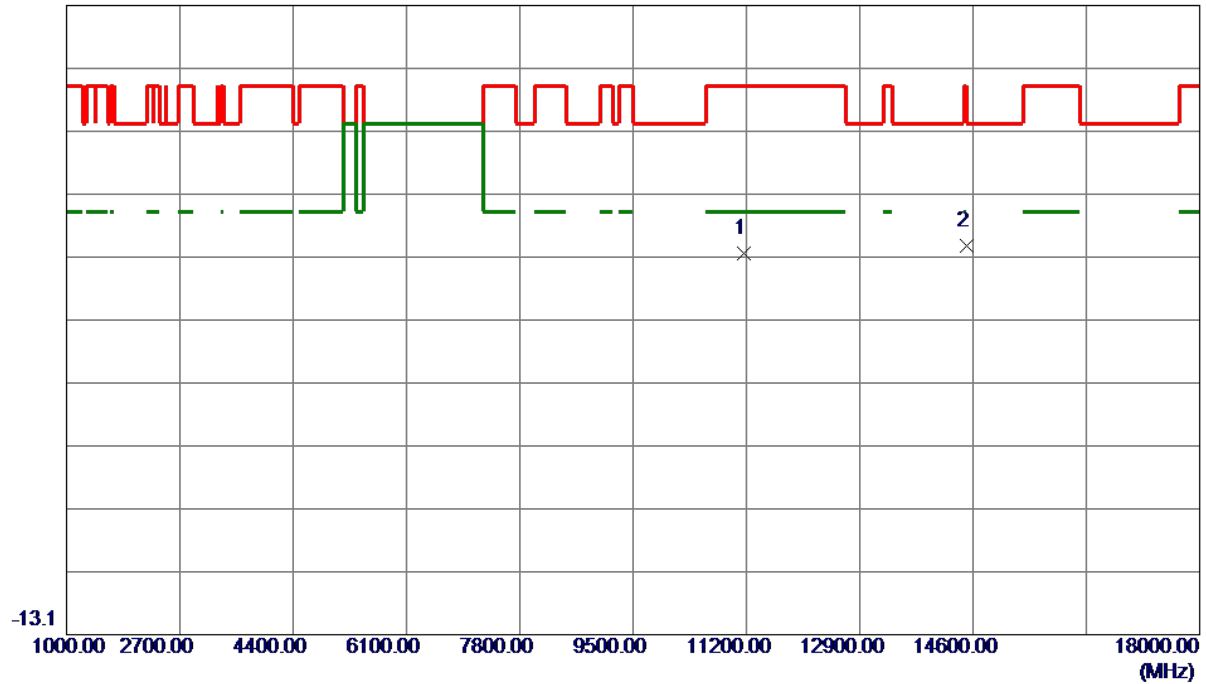


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11153.2500	37.96	9.63	47.59	74.00	-26.41	Peak	
2 *	14513.3000	38.34	10.27	48.61	68.20	-19.59	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5795 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

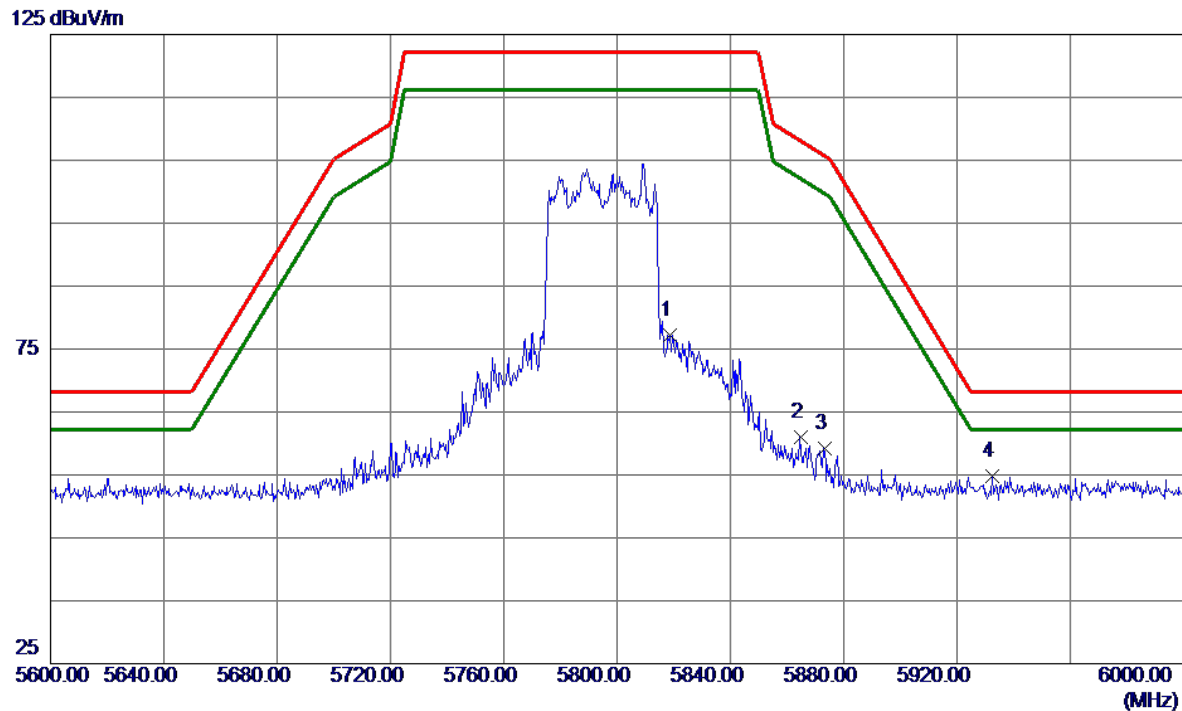


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5818.8400	64.95	12.34	77.29	122.20	-44.91	Peak	
2	5864.7400	48.54	12.42	60.96	108.07	-47.11	Peak	
3	5873.1600	46.71	12.44	59.15	105.72	-46.57	Peak	
4 *	5932.6600	42.34	12.54	54.88	68.20	-13.32	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5795 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

86.9 dBuV/m

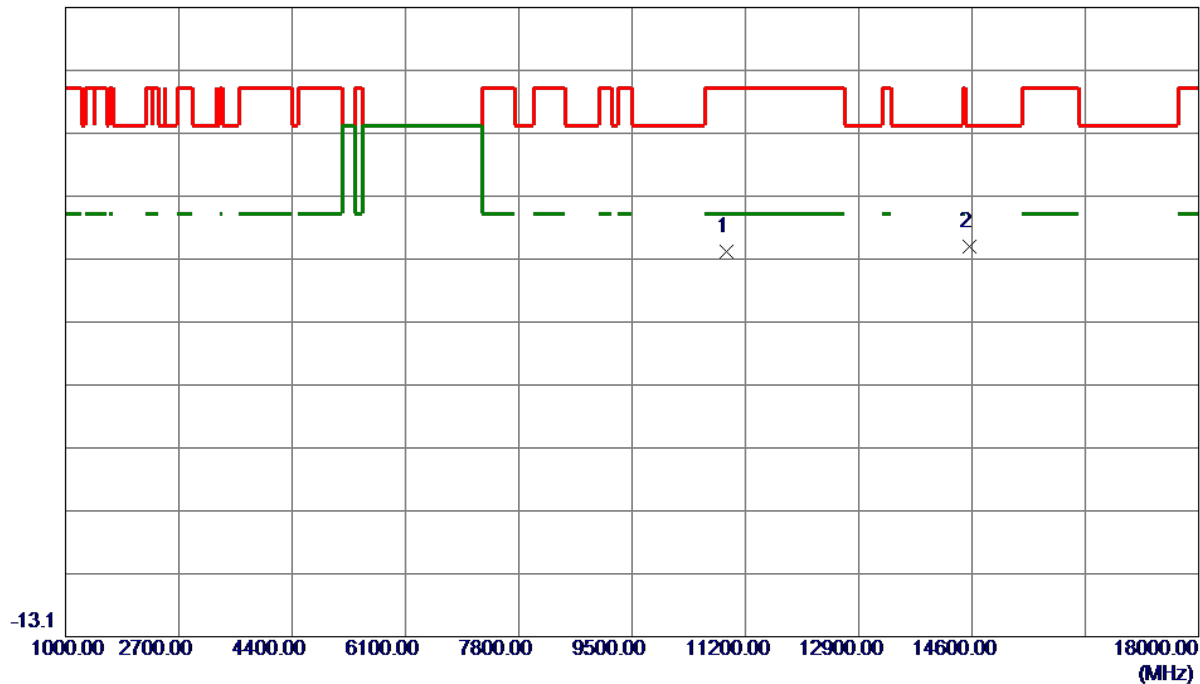


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10922.0500	38.47	9.54	48.01	74.00	-25.99	Peak	
2 *	14554.9500	38.67	10.19	48.86	68.20	-19.34	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5795 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

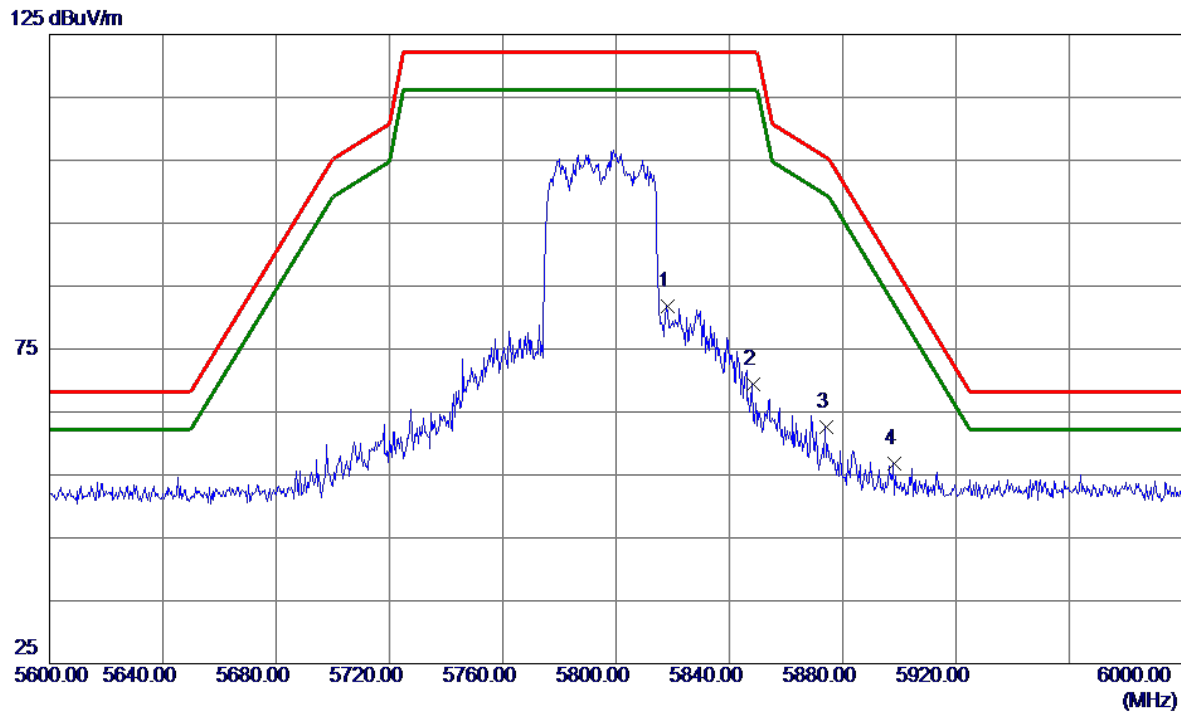

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5818.2400	69.40	12.34	81.74	122.20	-40.46	Peak	
2	5848.2799	57.04	12.39	69.43	122.20	-52.77	Peak	
3	5874.0800	50.14	12.44	62.58	105.46	-42.88	Peak	
4 *	5898.0200	44.37	12.48	56.85	88.17	-31.32	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5795 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

86.9 dBuV/m

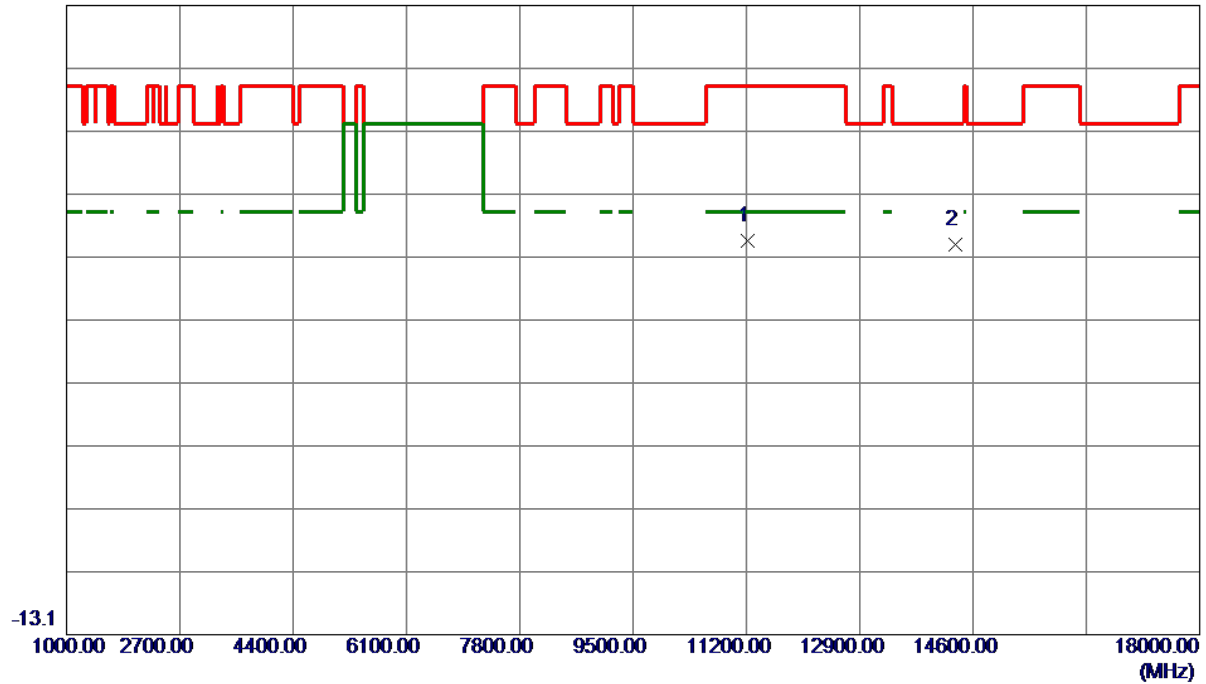


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11211.9000	39.78	9.66	49.44	74.00	-24.56	Peak	
2 *	14331.4000	38.81	10.11	48.92	68.20	-19.28	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE80) Mode 5775 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

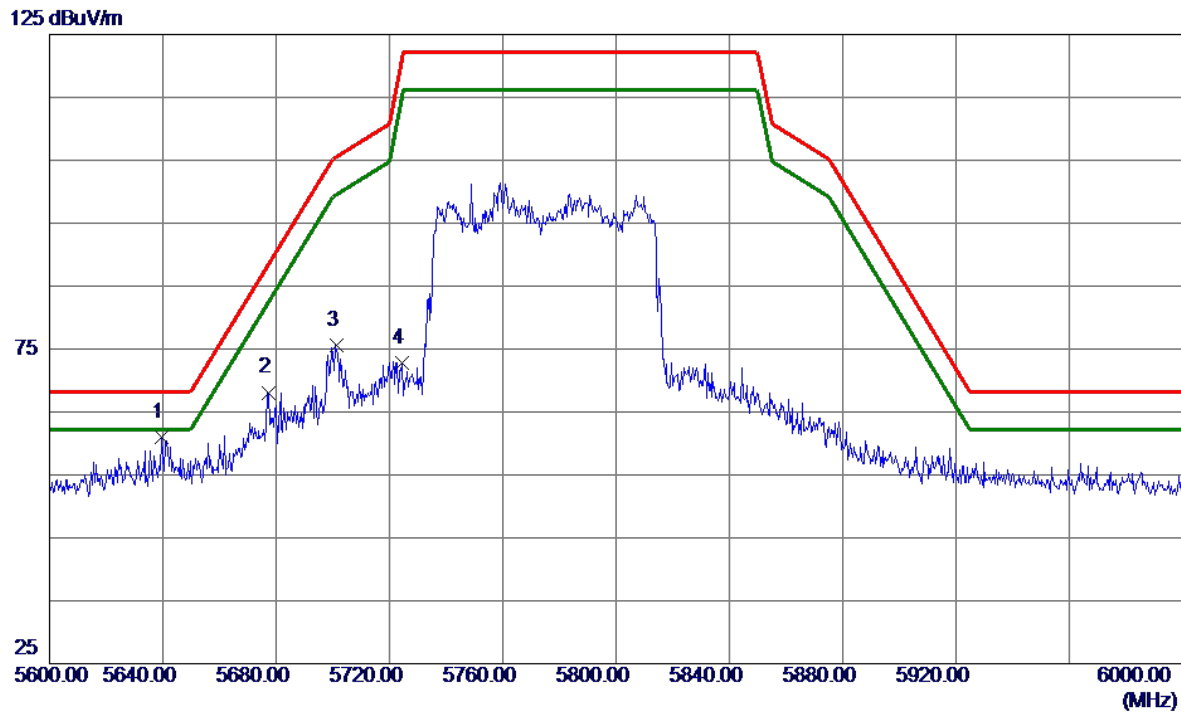

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5639.7599	48.89	12.03	60.92	68.20	-7.28	Peak	
2	5677.1800	56.01	12.09	68.10	88.31	-20.21	Peak	
3	5701.1600	63.56	12.13	75.69	105.52	-29.83	Peak	
4	5724.5000	60.60	12.18	72.78	121.06	-48.28	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE80) Mode 5775 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

86.9 dBuV/m

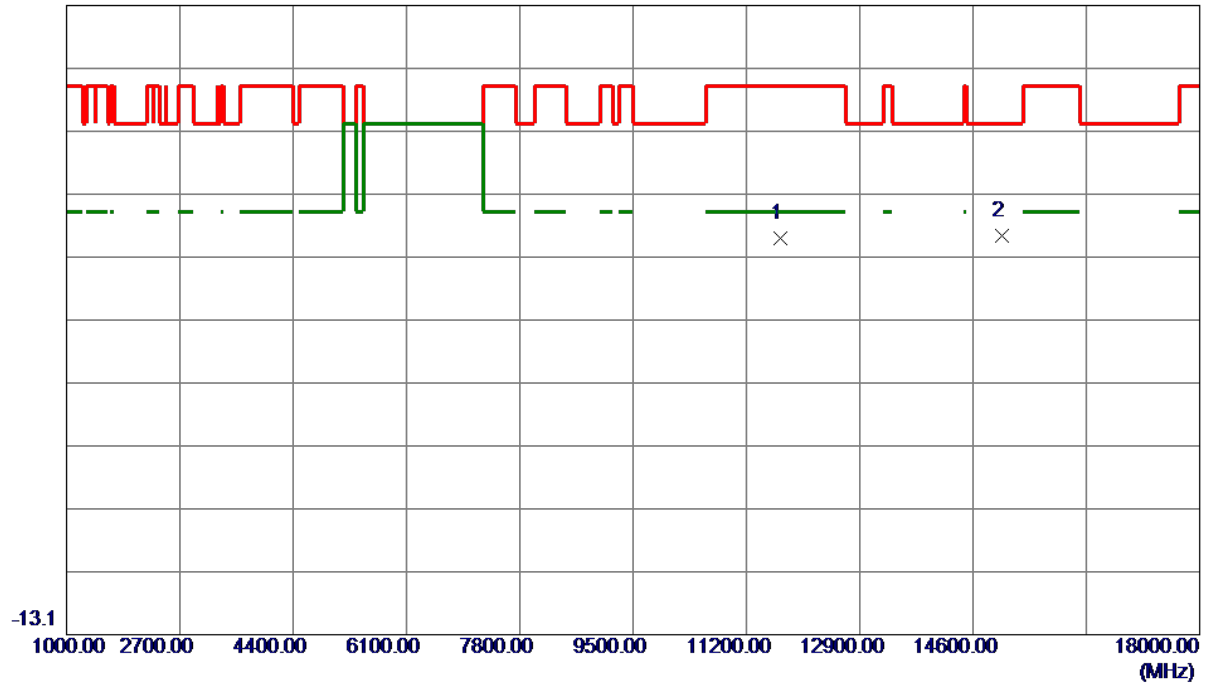


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11710.0000	40.29	9.59	49.88	74.00	-24.12	Peak	
2 *	15035.2000	41.17	9.19	50.36	68.20	-17.84	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE80) Mode 5775 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

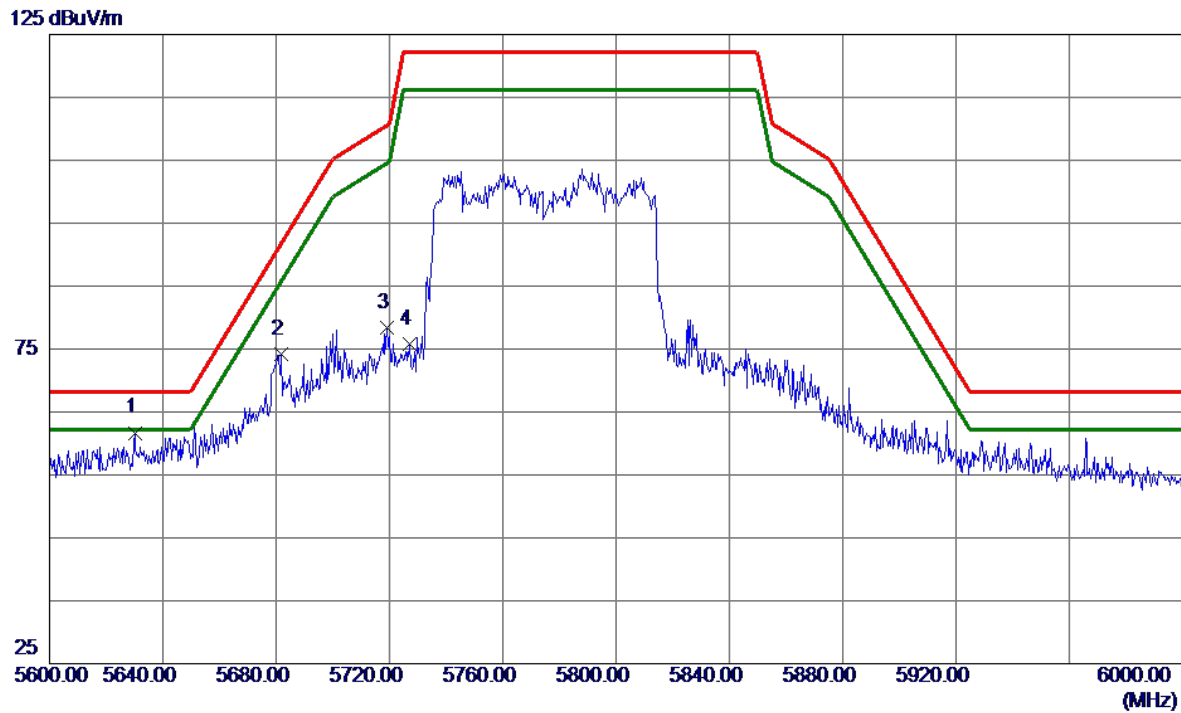

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5630.3200	49.69	12.01	61.70	68.20	-6.50	Peak	
2	5681.9800	62.15	12.10	74.25	91.87	-17.62	Peak	
3	5719.2400	66.31	12.17	78.48	110.59	-32.11	Peak	
4	5727.2799	63.62	12.18	75.80	122.20	-46.40	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE80) Mode 5775 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

86.9 dBuV/m

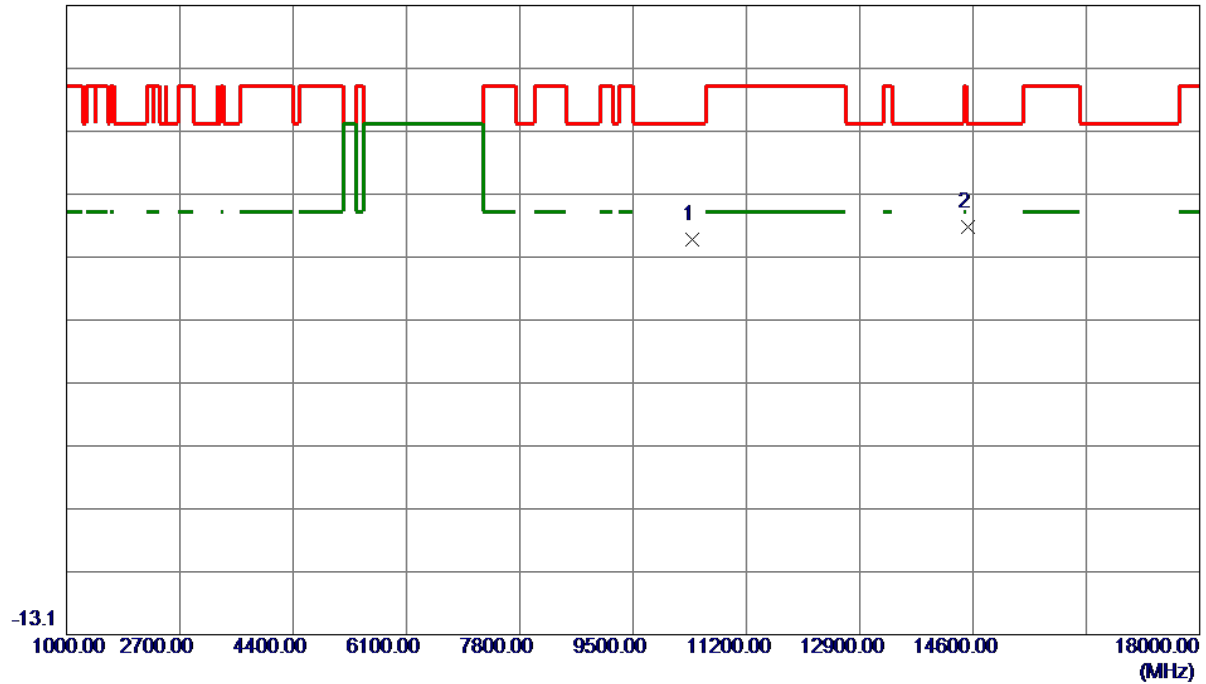


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10395.0500	40.49	9.24	49.73	68.20	-18.47	Peak	
2 *	14524.3500	41.40	10.25	51.65	68.20	-16.55	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX A Mode Channel 5200	Polarization	Vertical
-----------	------------------------	--------------	----------

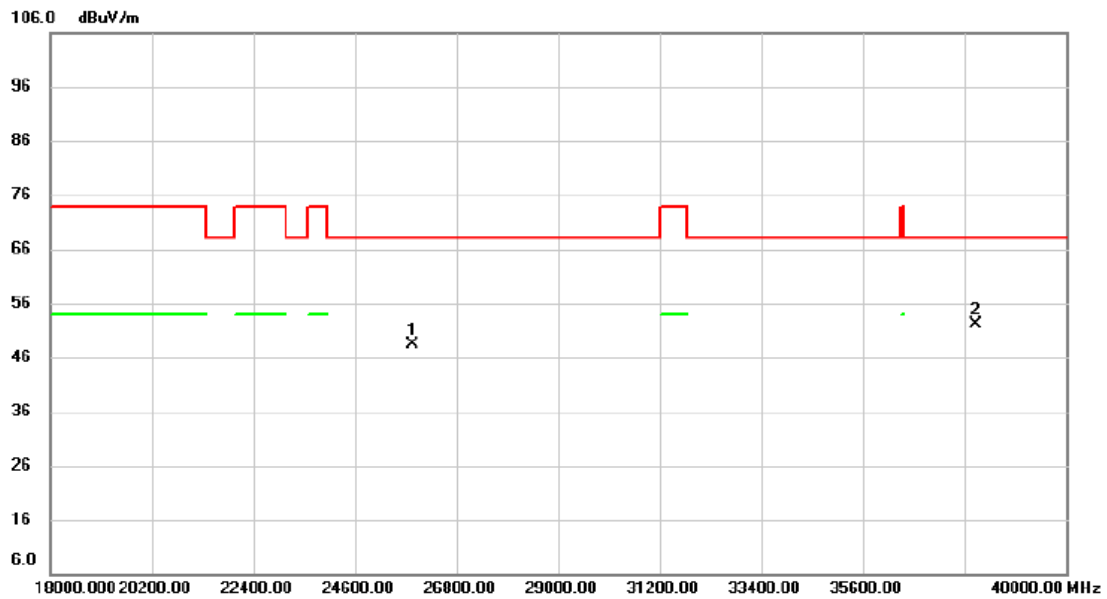


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV		dBuV/m	dBuV/m	dB		
1		25840.800	49.23	-0.90	48.33	68.20	-19.87	peak	
2	*	38035.400	46.33	5.92	52.25	68.20	-15.95	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX A Mode Channel 5200	Polarization	Horizontal
-----------	------------------------	--------------	------------

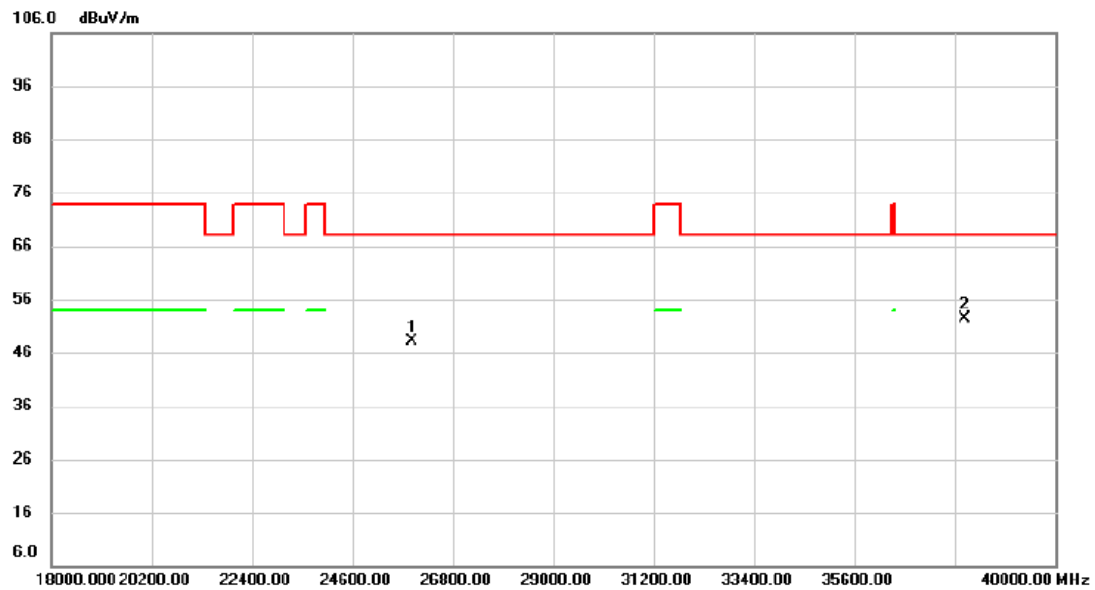

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	25898.000	49.01	-0.78	48.23	68.20	-19.97	peak	
2 *	38010.100	46.20	6.06	52.26	68.20	-15.94	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH

Test Mode	UNII-1_TX A Mode
-----------	------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	23.66	17.062
40	5200	24.53	17.262
48	5240	25.99	17.603


CH36



CH40
26 dB Bandwidth



CH48

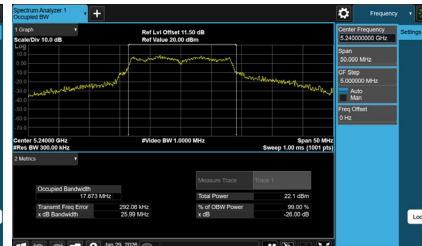

99 % Occupied Bandwidth



Test Mode	UNII-1_TX AC(VHT20) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	20.96	18.061
40	5200	26.81	18.271
48	5240	30.43	18.808

CH36




CH40




26 dB Bandwidth

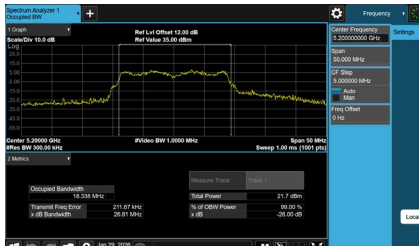

CH48

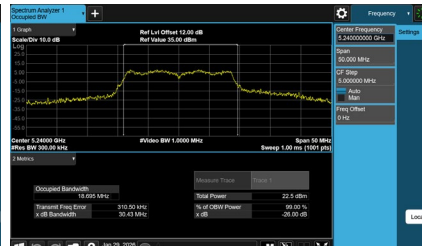


99 % Occupied Bandwidth

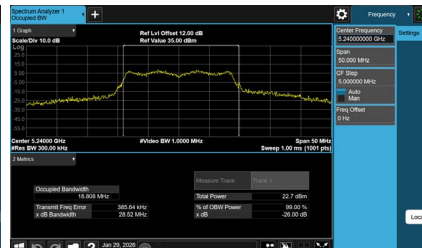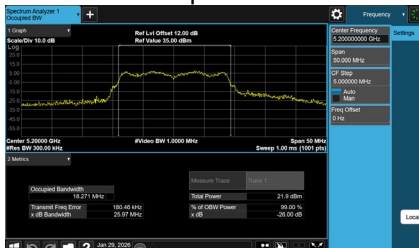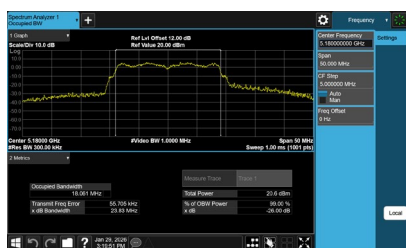

Test Mode	UNII-1_TX AC(VHT40) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	39.72	36.786
46	5230	46.41	37.173

CH38


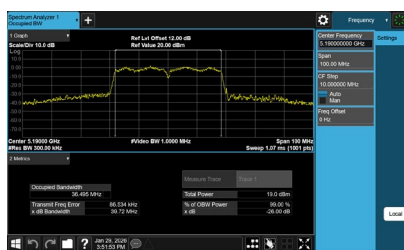


CH46

26 dB Bandwidth

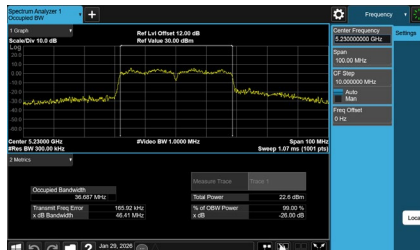


99 % Occupied Bandwidth

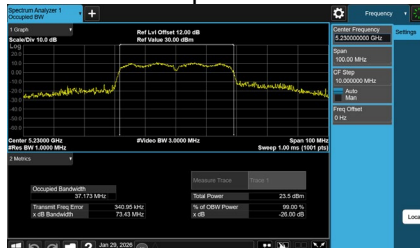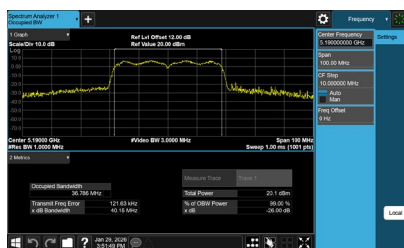

Test Mode	UNII-1_TX AC(VHT80) Mode
-----------	--------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
42	5210	95.79	75.869

CH42 26 dB Bandwidth

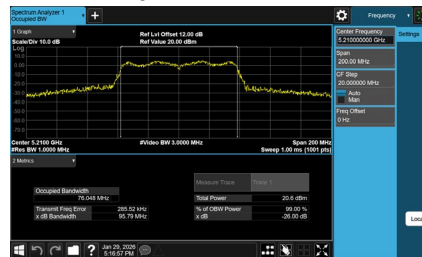

99 % Occupied Bandwidth

