

#01_WCDMA II_RMC 12.2Kbps_Front_25mm_Ch9262


Communication System: WCDMA; Frequency: 1852.400 MHz; Duty Cycle: 1:1
Medium: HSL_1900_230613 Medium parameters used: $f = 1852.400$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 40.0$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(8.6, 8.6, 8.6); Calibrated: 2023-04-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2022-07-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WCDMA, 10011-CAC

Area Scan (150.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.195 W/kg; SAR (10g) = 0.119 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.01 dB
SAR (1g) = 0.205 W/kg; SAR (8g) = 0.139 W/kg; SAR (10g) = 0.131 W/kg

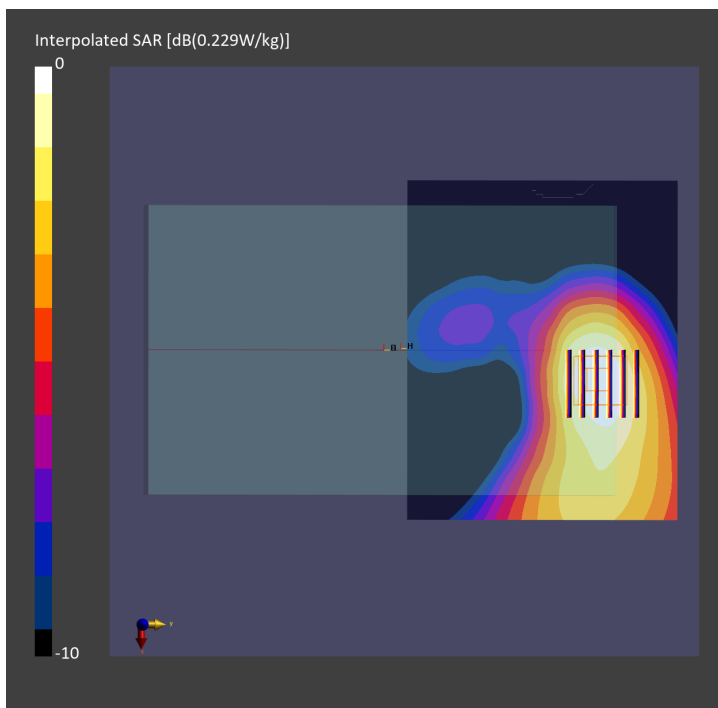

#02_WCDMA IV_RMC 12.2Kbps_Front_25mm_Ch1312


Communication System: WCDMA; Frequency: 1712.400 MHz; Duty Cycle: 1:1
Medium: HSL_1750_230613 Medium parameters used: $f = 1712.400$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 40.3$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(8.92, 8.92, 8.92); Calibrated: 2023-04-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2022-07-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WCDMA, 10011-CAC

Area Scan (150.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.478 W/kg; SAR (10g) = 0.294 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.01 dB
SAR (1g) = 0.499 W/kg; SAR (8g) = 0.341 W/kg; SAR (10g) = 0.322 W/kg

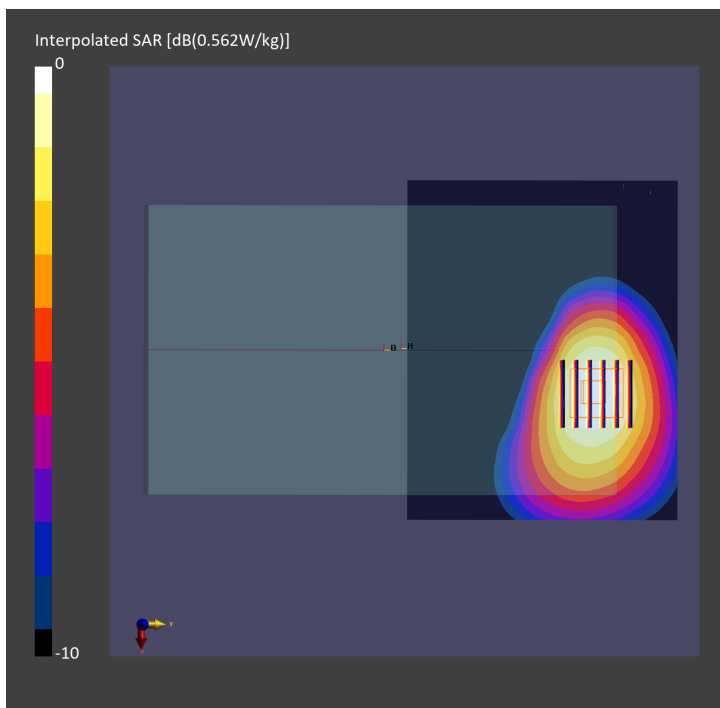

#03_WCDMA V_RMC 12.2Kbps_Front_25mm_Ch4182


Communication System: WCDMA; Frequency: 836.400 MHz; Duty Cycle: 1:1
Medium: HSL_835_230613 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.920$ S/m; $\epsilon_r = 42.8$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(10.29, 10.29, 10.29); Calibrated: 2023-04-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2022-07-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WCDMA, 10011-CAC

Area Scan (150.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.285 W/kg; SAR (10g) = 0.201 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.01 dB
SAR (1g) = 0.294 W/kg; SAR (8g) = 0.225 W/kg; SAR (10g) = 0.216 W/kg

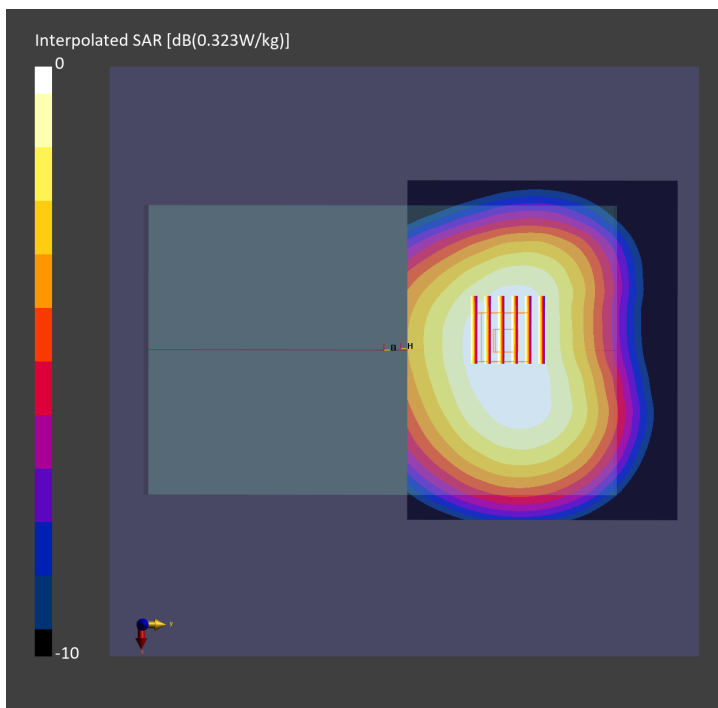

#04_LTE Band 2_20M_QPSK_1_0_Front_25mm_Ch18700


Communication System: LTE-FDD ; Frequency: 1860.000 MHz; Duty Cycle: 1:1
Medium: HSL_1900_230613 Medium parameters used: $f = 1860.000$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 39.9$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(8.6, 8.6, 8.6); Calibrated: 2023-04-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2022-07-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (150.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.207 W/kg; SAR (10g) = 0.126 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.01 dB
SAR (1g) = 0.218 W/kg; SAR (8g) = 0.147 W/kg; SAR (10g) = 0.139 W/kg

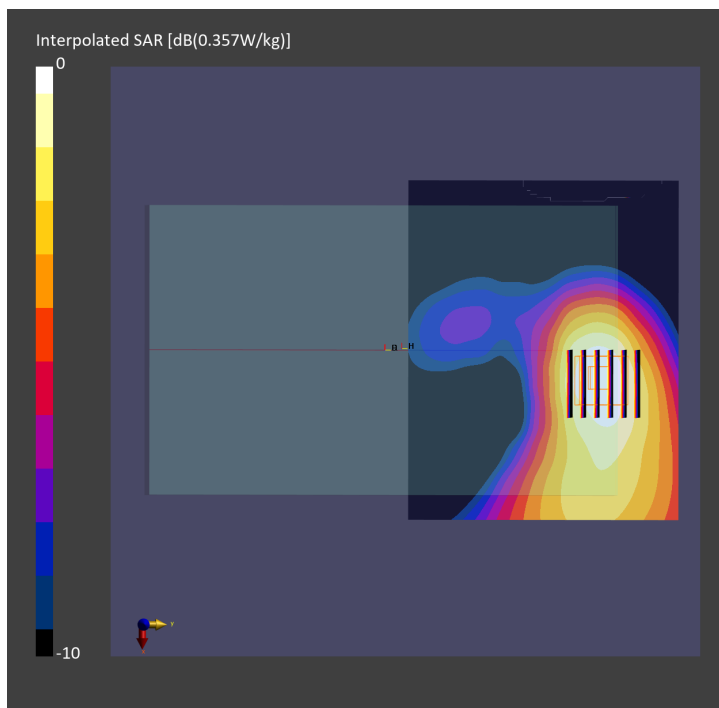

#05_LTE Band 5_10M_QPSK_1_0_Front_25mm_Ch20525


Communication System: LTE-FDD ; Frequency: 836.500 MHz; Duty Cycle: 1:1
Medium: HSL_835_230613 Medium parameters used: $f = 836.500$ MHz; $\sigma = 0.920$ S/m; $\epsilon_r = 42.8$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(10.29, 10.29, 10.29); Calibrated: 2023-04-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2022-07-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

Area Scan (150.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.230 W/kg; SAR (10g) = 0.162 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.02 dB
SAR (1g) = 0.237 W/kg; SAR (8g) = 0.181 W/kg; SAR (10g) = 0.174 W/kg

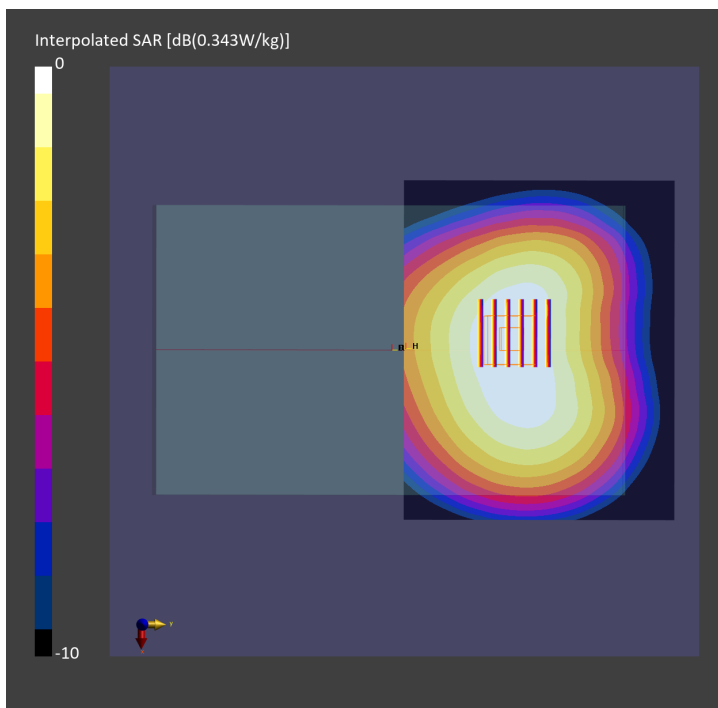

#06_LTE Band 12_10M_QPSK_1_0_Front_25mm_Ch23095


Communication System: LTE-FDD ; Frequency: 707.500 MHz; Duty Cycle: 1:1
Medium: HSL_750_230613 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.876$ S/m; $\epsilon_r = 43.4$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(10.36, 10.36, 10.36); Calibrated: 2023-04-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2022-07-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

Area Scan (150.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.144 W/kg; SAR (10g) = 0.102 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.00 dB
SAR (1g) = 0.149 W/kg; SAR (8g) = 0.119 W/kg; SAR (10g) = 0.114 W/kg

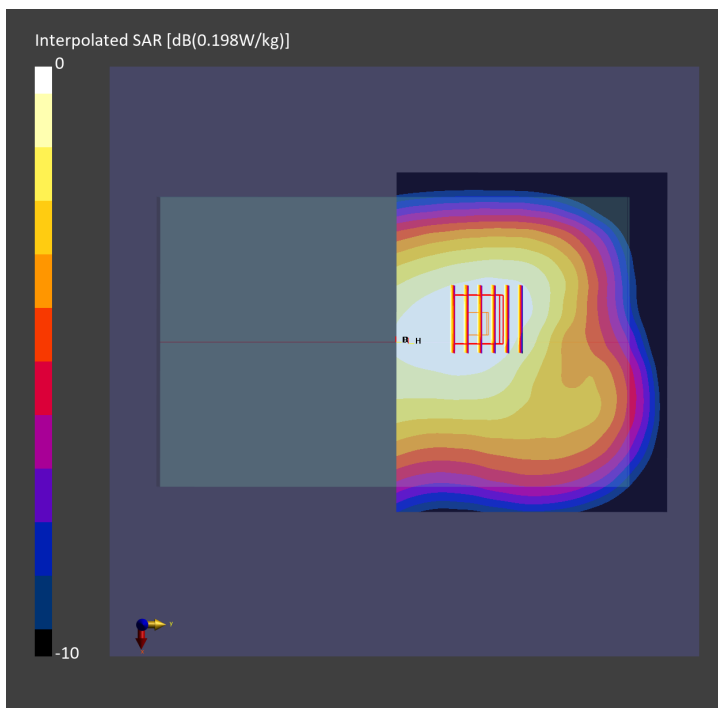

#07_LTE Band 13_10M_QPSK_1_0_Front_25mm_Ch23230


Communication System: LTE-FDD ; Frequency: 782.000 MHz; Duty Cycle: 1:1
Medium: HSL_750_230613 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.903$ S/m; $\epsilon_r = 42.9$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(10.36, 10.36, 10.36); Calibrated: 2023-04-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2022-07-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

Area Scan (150.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.170 W/kg; SAR (10g) = 0.119 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.00 dB
SAR (1g) = 0.176 W/kg; SAR (8g) = 0.135 W/kg; SAR (10g) = 0.130 W/kg

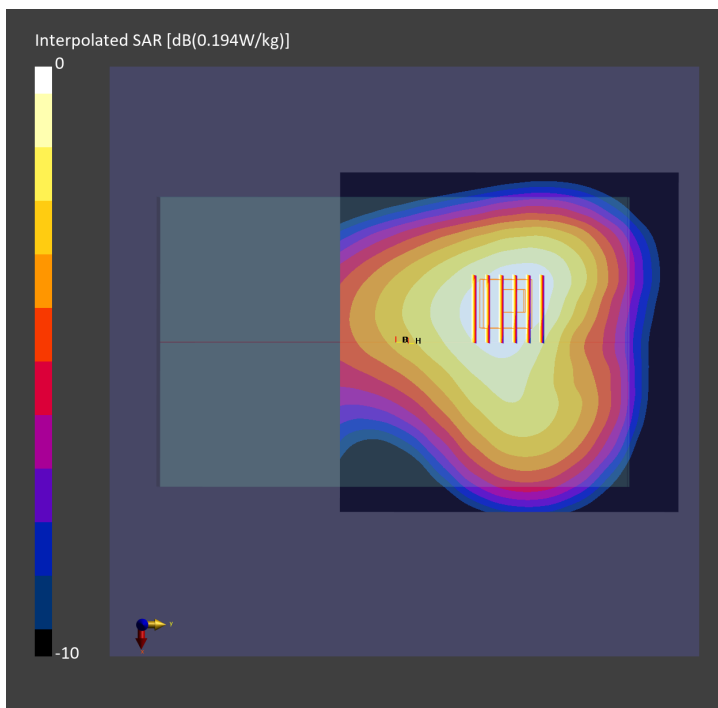

#08_LTE Band 14_10M_QPSK_1_0_Front_25mm_Ch23330


Communication System: LTE-FDD ; Frequency: 793.000 MHz; Duty Cycle: 1:1
Medium: HSL_750_230613 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 43.0$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(10.36, 10.36, 10.36); Calibrated: 2023-04-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2022-07-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

Area Scan (150.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.184 W/kg; SAR (10g) = 0.128 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.01 dB
SAR (1g) = 0.190 W/kg; SAR (8g) = 0.145 W/kg; SAR (10g) = 0.140 W/kg

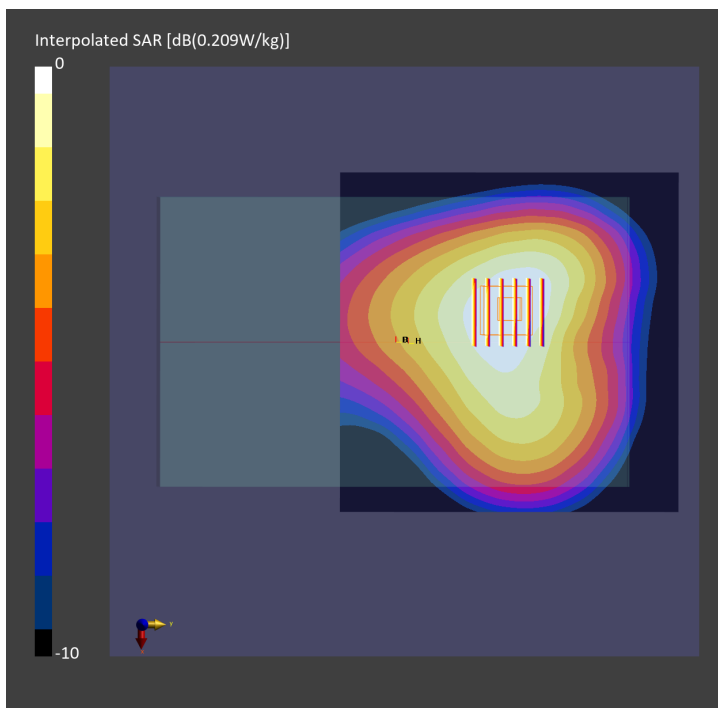

#09_LTE Band 66_20M_QPSK_1_0_Front_25mm_Ch132072

Communication System: LTE-FDD; Frequency: 1720.000 MHz; Duty Cycle: 1:1
Medium: HSL_1750_230613 Medium parameters used: $f = 1720.000$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 40.3$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(8.92, 8.92, 8.92); Calibrated: 2023-04-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn853; Calibrated: 2022-07-20
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1131; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (150.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.410 W/kg; SAR (10g) = 0.252 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.00 dB
SAR (1g) = 0.426 W/kg; SAR (8g) = 0.291 W/kg; SAR (10g) = 0.275 W/kg

