



FCC EMI TEST REPORT

FCC ID : LHJ-FE4RW0110
Equipment : FE4RW0110
Brand Name : Continental
Model Name : FE4RW0110
Applicant : Continental Automotive Systems, Inc.
21440 W Lake Cook Rd., Deer Park, IL 60010, USA
Manufacturer : Continental Automotive Systems, Inc.
21440 W Lake Cook Rd., Deer Park, IL 60010, USA
Standard : FCC 47 CFR FCC Part 15 Subpart B Class B

The product was received on Nov. 03, 2022 and testing was performed from May 09, 2023 to May 10, 2023. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1. General Description	5
1.1. Product Feature of Equipment Under Test	5
1.2. Product Specification of Equipment Under Test	5
1.3. Modification of EUT	6
1.4. Test Location	6
1.5. Applicable Standards	6
2. Test Configuration of Equipment Under Test	7
2.1. Test Mode	7
2.2. Connection Diagram of Test System	7
2.3. Support Unit used in test configuration and system	8
2.4. EUT Operation Test Setup	8
3. Test Result	9
3.1. Test of Radiated Emission Measurement	9
4. List of Measuring Equipment.....	11
5. Measurement Uncertainty	12
Appendix A. Radiated Emission Test Result	
Appendix B. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FC2N0304	01	Initial issue of report	Jun. 29, 2023

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
-	15.107	AC Conducted Emission	Not Required	-
3.1	15.109	Radiated Emission	Pass	6.75 dB under the limit at 38.100 MHz

Note:

1. Not required means after assessing, test items are not necessary to carry out.
2. This is a variant report by adding host information. All the test cases were performed on original report which can be referred to Sporton Report Number FC150634-01. Based on the original report, the test cases were verified.

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Yun Huang

Report Producer: Lucy Wu



1. General Description

1.1. Product Feature of Equipment Under Test

Product Feature	
Equipment	FE4RW0110
Brand Name	Continental
Model Name	FE4RW0110
FCC ID	LHJ-FE4RW0110
Installed into the Host	Equipment name: G12R400G1 Brand name: Continental Model name: G12R400G1
EUT supports Radios application	GPRS/EGPRS/WCDMA/HSPA/LTE/GNSS
HW Version	P4
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer.

1.2. Product Specification of Equipment Under Test

Product Specification is subject to this standard	
Tx Frequency	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band IV : 1712.4 MHz ~ 1752.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz LTE Band 2 : 1850.7 MHz ~ 1909.3 MHz LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 7 : 2502.5 MHz ~ 2567.5 MHz LTE Band 38 : 2572.5 MHz ~ 2617.5 MHz LTE Band 41 : 2498.5 MHz ~ 2687.5 MHz
Rx Frequency	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz WCDMA Band IV: 2112.4 MHz ~ 2152.6 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz LTE Band 2 : 1930.7 MHz ~ 1989.3 MHz LTE Band 4 : 2110.7 MHz ~ 2154.3 MHz LTE Band 5 : 869.7 MHz ~ 893.3 MHz LTE Band 7 : 2622.5 MHz ~ 2687.5 MHz LTE Band 38 : 2572.5 MHz ~ 2617.5 MHz LTE Band 41 : 2498.5 MHz ~ 2687.5 MHz GNSS : 1559 MHz ~ 1610 MHz (GPS / Glonass / Galileo / BDS / SBAS)

Product Specification is subject to this standard	
Antenna Type	<Internal Antenna> : Internal fix antenna <External Antenna> : external sharkfin antenna
Type of Modulation	GPRS: GMSK EDGE(MCS 0-4): GMSK/(MCS 5-9): 8PSK WCDMA: QPSK (Uplink) HSDPA: QPSK / 16QAM / 64QAM (Downlink) HSUPA : QPSK (Uplink) LTE: QPSK / 16QAM / 64QAM GNSS: BPSK

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.3. Modification of EUT

No modifications made to the EUT during the testing.

1.4. Test Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. 03CH06-HY

FCC designation No.: TW1093

1.5. Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC 47 CFR FCC Part 15 Subpart B Class B
- ♦ ANSI C63.4-2014

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.


2. Test Configuration of Equipment Under Test

2.1. Test Mode

The EUT is tested along with the peripherals, operating under possible configurations in compliant with normal operation. The maximum emissions can be identified by a pre-scan carried out in different orientations of placement pursuant to ANSI C63.4-2014. Frequency range covered: Radiation Emission (30 MHz to the 5th harmonics of the highest fundamental frequency or to 40 GHz, whichever is lower).

Test Items	Functions Enabled
Radiated Emissions	Mode 1: WCDMA Band V Link (with External Antenna) + GPS Rx + TC + DC 12V Mode 2: LTE Band 5 Link (with External Antenna) + GPS Rx + TC + DC 12V Mode 3: LTE Band 5 (with Internal Antenna) + TC
Remark: 1. The worst case of RE is mode 3; only the test data of this mode was reported. 2. For Radiation Emission after pre-scanned the cellular band between 30MHz ~ 960MHz (WCDMA Band V/LTE Band 5); only the worst case for cellular band test data of this mode was reported. 3. TC stands for test configuration, and consists of EUT: "Teddy Jr Load Box (X1 + X2), External Antenna with Metal Plate (X3), Ethernet Connector Cable (X7), Bias Tee*2, Battery, Microphone and Speaker"; Teddy Jr Load Box: "Notebook (USB Cable *2), Adapter and DC Cable".	

2.2. Connection Diagram of Test System

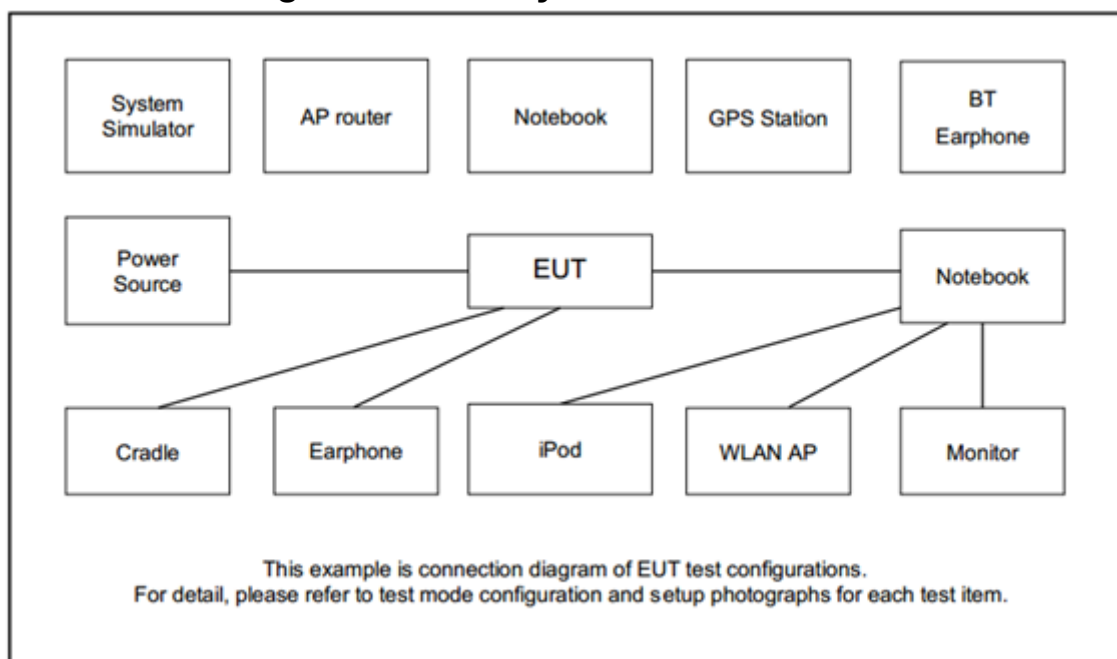

2.3. Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	GPS Station	Pendulum	GSG-54	N/A	N/A	Unshielded,1.8m
3.	External Antenna	Molex	85597238	N/A	N/A	N/A
4.	Teddy Jr Load Box	Continental	N/A	N/A	N/A	N/A
5.	Adapter	TePoo	PT-WC-03	N/A	N/A	N/A
6.	Metal Plate	N/A	N/A	N/A	N/A	N/A
7.	DC Power Supply	GW Instek	GEU810960	FCC DoC	N/A	N/A

2.4. EUT Operation Test Setup

The EUT is in WCDMA or LTE idle mode during the test. The EUT is synchronized with the BCCH, and has been continuous receiving mode by setting paging reorganization of the system simulator.

At the same time, the following programs installed in the EUT are programmed during the test:

1. Execute "lte_x24_hwtool_0.6.24" to make the EUT receive continuous signals from GPS station.

3. Test Result

3.1. Test of Radiated Emission Measurement

3.1.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.1.2. Measuring Instruments


Please refer to the measuring equipment list in this test report.

3.1.3. Test Procedures


1. The EUT is placed on a turntable with 0.8 meter above ground.
2. The EUT is set 3 meters from the interference receiving antenna, which is mounted on the top of a variable height antenna tower.
3. The table is rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120 kHz/VBW=300 kHz for frequency below 1 GHz; RBW=1 MHz VBW=3 MHz (Peak), RBW=1 MHz/VBW=10 Hz (Average) for frequency above 1 GHz).
7. If the emission level of the EUT in peak mode is 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.

3.1.4. Test Setup of Radiated Emission

For Radiated Emissions from 30 MHz to 1 GHz

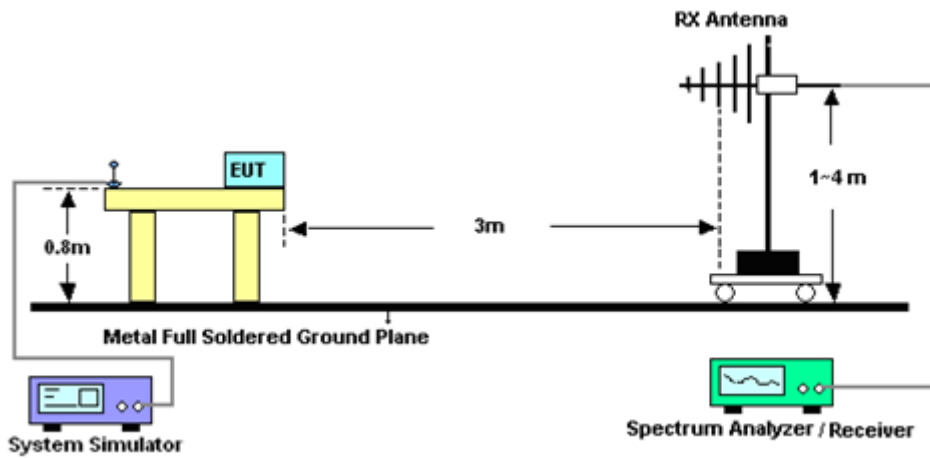

For Radiated Emissions above 1GHz

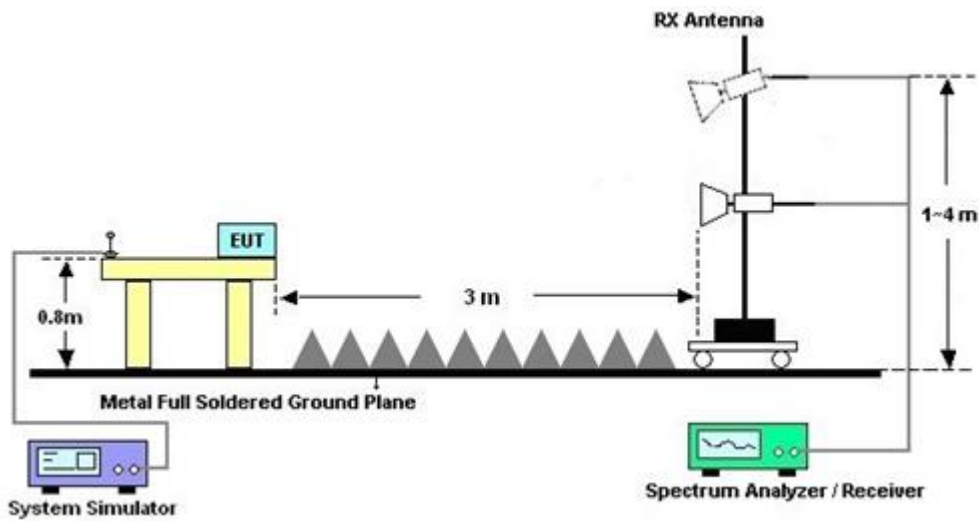

3.1.5. Test Result of Radiated Emission

Please refer to Appendix A.



4. List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Amplifier	SONOMA	310N	186713	9kHz~1GHz	Apr. 17, 2023	May 09, 2023~ May 10, 2023	Apr. 16, 2024	Radiation (03CH06-HY)
Bilog Antenna	Schaffner	CBL 6111C & N-6-06	2725 & AT-N0601	30MHz~1GHz	Nov. 06, 2022	May 09, 2023~ May 10, 2023	Nov. 05, 2023	Radiation (03CH06-HY)
EMI Test Receiver	Rohde & Schwarz	ESU26	100472	20Hz~26.5GHz	Feb. 13, 2023	May 09, 2023~ May 10, 2023	Feb. 12, 2024	Radiation (03CH06-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-02037	1GHz~18GHz	Dec. 30, 2022	May 09, 2023~ May 10, 2023	Dec. 29, 2023	Radiation (03CH06-HY)
Preamplifier	Jet-Power	JPA00101800- 30-10P	1601180001	1GHz~18GHz	Jul. 18, 2022	May 09, 2023~ May 10, 2023	Jul. 17, 2023	Radiation (03CH06-HY)
RF Cable	HUBER + SUHNER	SF102_7000m m	532299/2	30MHz to 40GHz	Jul. 04, 2022	May 09, 2023~ May 10, 2023	Jul. 03, 2023	Radiation (03CH06-HY)
RF Cable	HUBER + SUHNER	SF102_3000m m	532422/2	30MHz to 40GHz	Jul. 04, 2022	May 09, 2023~ May 10, 2023	Jul. 03, 2023	Radiation (03CH06-HY)
RF Cable	HUBER + SUHNER	SF102_2000m m	532421/2	30MHz to 40GHz	Jul. 04, 2022	May 09, 2023~ May 10, 2023	Jul. 03, 2023	Radiation (03CH06-HY)
RF Cable	HUBER + SUHNER	SF104	802433/4	30Mhz to 18Ghz	Aug. 18, 2022	May 09, 2023~ May 10, 2023	Aug. 17, 2023	Radiation (03CH06-HY)
Hygrometer	TECPEL	DTM-303B	TP210018	N/A	Oct. 27, 2022	May 09, 2023~ May 10, 2023	Oct. 26, 2023	Radiation (03CH06-HY)
Controller	INN-CO	EM1000	060782	Control Turn table & Ant Mast	N/A	May 09, 2023~ May 10, 2023	N/A	Radiation (03CH06-HY)
Antenna Mast	MF	MF-7802	MF780208212	1m~4m	N/A	May 09, 2023~ May 10, 2023	N/A	Radiation (03CH06-HY)
Turn Table	INN-CO	DS2000	420/650/00	0-360 degree	N/A	May 09, 2023~ May 10, 2023	N/A	Radiation (03CH06-HY)
Software	Audix	E3 6.2009-8-24(k 5)	N/A	N/A	N/A	May 09, 2023~ May 10, 2023	N/A	Radiation (03CH06-HY)

5. Measurement Uncertainty

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.3 dB
--	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)


Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.6 dB
--	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.5 dB
--	--------



Appendix A. Radiated Emission Test Result

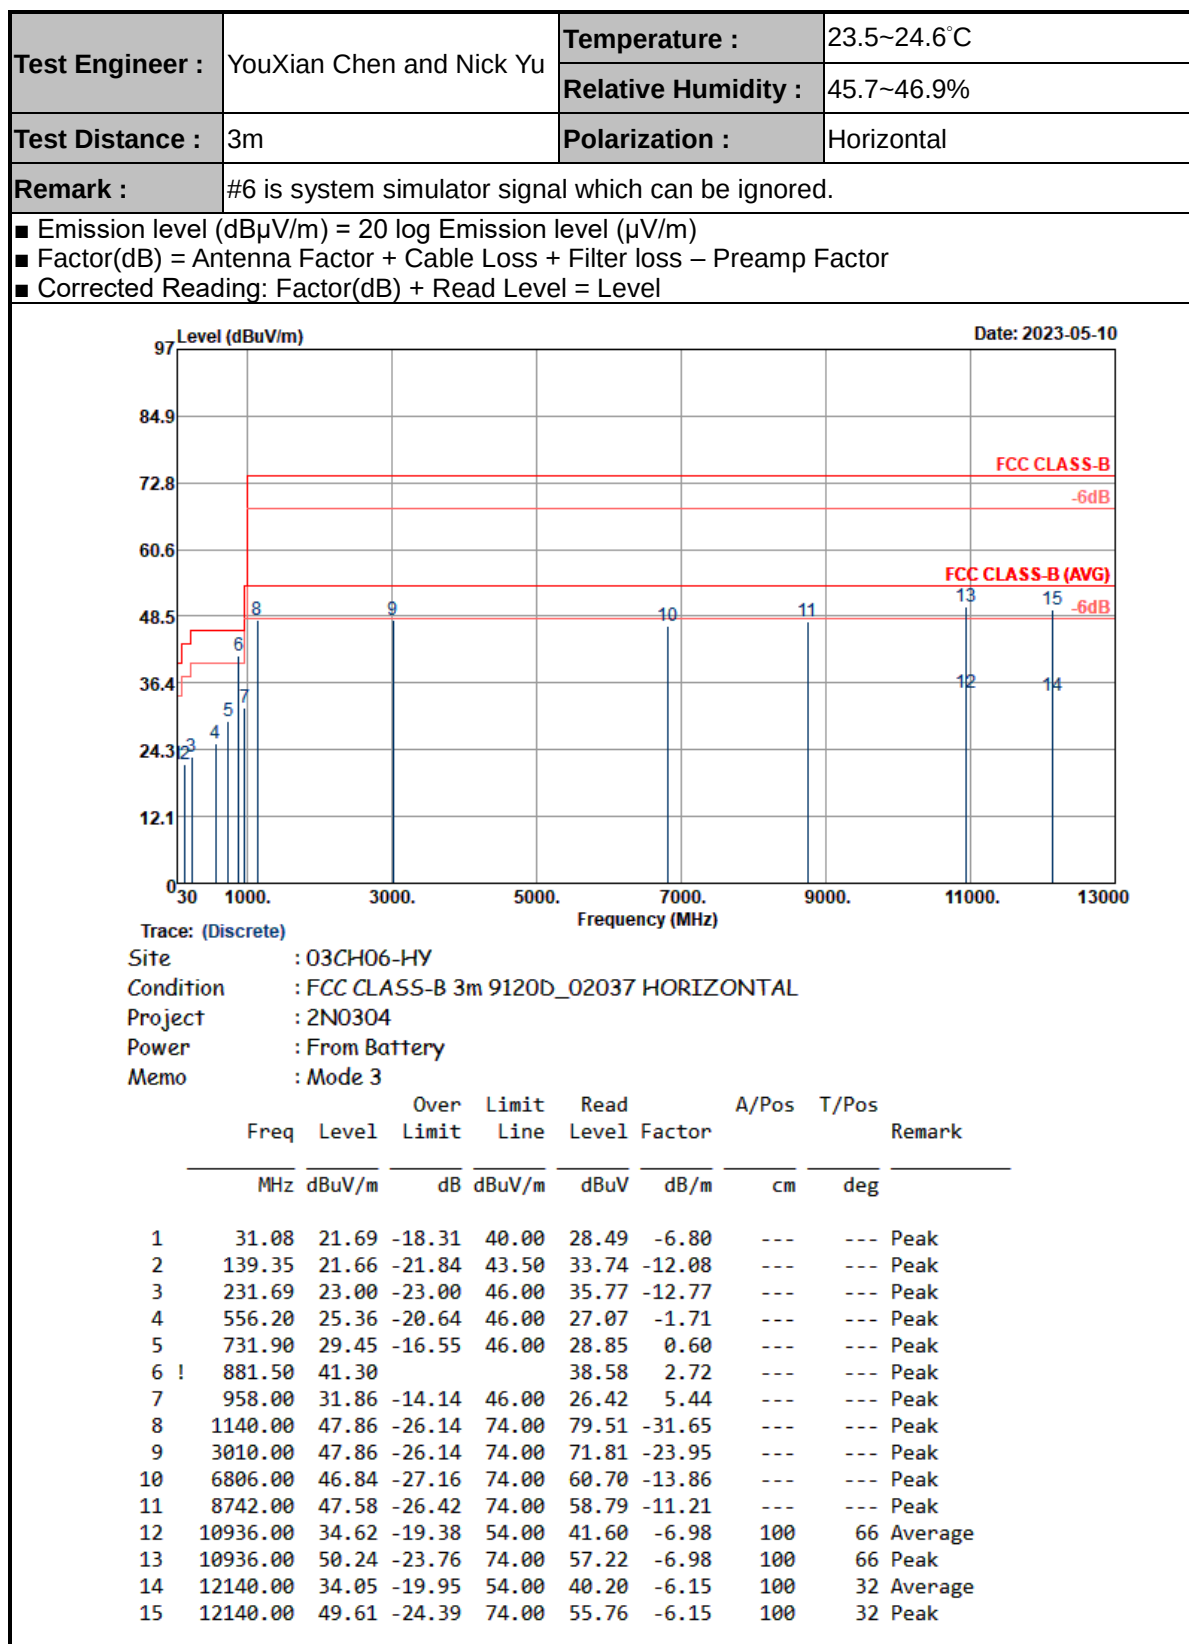

Test Engineer :	YouXian Chen and Nick Yu	Temperature :	23.5~24.6℃
		Relative Humidity :	45.7~46.9%
Test Distance :	3m	Polarization :	Vertical
Remark :	#6 is system simulator signal which can be ignored.		
■ Emission level (dBμV/m) = 20 log Emission level (μV/m)			
■ Factor(dB) = Antenna Factor + Cable Loss + Filter loss – Preamp Factor			
■ Corrected Reading: Factor(dB) + Read Level = Level			

Level (dBuV/m)

97

84.9

72.8

60.6

48.5

36.4

24.3

12.1

0

30

1000.

3000.

5000.

7000.

9000.

11000.

13000

Trace: (Discrete)

Site : 03CH06-HY

Condition : FCC CLASS-B 3m 9120D_02037 VERTICAL

Project : 2N0304

Power : From Battery

Memo : Mode 3

Date: 2023-05-10

FCC CLASS-B

-6dB

FCC CLASS-B (AVG)

-6dB

	Freq	Level	Over	Limit	Read	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	cm	deg
1	38.10	33.25	-6.75	40.00	43.70	-10.45	---	Peak
2	132.60	28.30	-15.20	43.50	40.19	-11.89	---	Peak
3	215.22	21.93	-21.57	43.50	35.97	-14.04	---	Peak
4	626.90	27.19	-18.81	46.00	28.49	-1.30	---	Peak
5	773.20	29.25	-16.75	46.00	28.39	0.86	---	Peak
6 !	881.50	45.86			43.14	2.72	---	Peak
7	953.80	33.03	-12.97	46.00	27.76	5.27	---	Peak
8	995.10	34.10	-19.90	54.00	27.85	6.25	---	Peak
9	1586.00	47.92	-26.08	74.00	78.98	-31.06	---	Peak
10	4666.00	43.51	-30.49	74.00	62.73	-19.22	---	Peak
11	6534.00	46.32	-27.68	74.00	60.80	-14.48	---	Peak
12	8628.00	32.35	-21.65	54.00	43.90	-11.55	100	56 Average
13	8628.00	49.62	-24.38	74.00	61.17	-11.55	100	56 Peak
14	10750.00	34.98	-19.02	54.00	42.20	-7.22	100	308 Average
15	10750.00	49.46	-24.54	74.00	56.68	-7.22	100	308 Peak
16	12226.00	34.08	-19.92	54.00	40.00	-5.92	100	341 Average
17	12226.00	49.16	-24.84	74.00	55.08	-5.92	100	341 Peak