
GSM1900 test report for RM-57

CONTENTS

1	LABORATORY INFORMATION	3
2	CUSTOMER INFORMATION	3
3	SUMMARY OF TEST RESULTS	4
4	EUT INFORMATION	5
4.1	EUT description	5
5	EUT TEST SETUPS	5
6	APPLICABLE STANDARDS	5
7	99% OCCUPIED BANDWIDTH	6
7.1	Test setup	6
7.2	EUT operation mode	6
7.3	Results	6
7.4	Screen shot	7
8	BANDEDGE COMPLIANCE	8
8.1	Test setup	8
8.2	EUT operation mode	8
8.3	Limit	8
8.4	Results	9
8.5	Screen shots	10
9	SPURIOUS RADIATED EMISSION	12
9.1	Test setup	12
9.2	Test method	12
9.3	EUT operation mode	13
9.4	Limit	13
9.5	Results	14
10	FREQUENCY STABILITY, TEMPERATURE VARIATION	15
10.1	Test setup	15
10.2	EUT operation mode	15
10.3	Limit	15
10.4	Test method	15
10.5	Results	16
11	FREQUENCY STABILITY, VOLTAGE VARIATION	17
11.1	Test setup	17
11.2	EUT operation mode	17
11.3	Limit	17
11.4	Test method	17
11.5	Results	17
12	TEST EQUIPMENT	18
12.1	Conducted measurements	18
12.2	Radiated measurements	18

1 LABORATORY INFORMATION

Test laboratory:	TCC Tampere Sinitaival 5 FIN-33720 TAMPERE Tel. +358 7180 46800 Fax. +358 7180 46880
FCC registration number:	94436 (June 14, 2002)
IC file number:	IC 3608 (March 5, 2003)

2 CUSTOMER INFORMATION

Client:	Nokia Corporation P.O. Box 300 Yrttipellontie 6 FIN-90230 OULU, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 58300
Contact person:	Jorma Hanni
Receipt of EUT:	30.12.2004
Date of testing:	30.12.2004 - 10.1.2005
Date of report:	11.1.2005

The tests listed in this report have been done to demonstrate compliance with the applicable requirements in FCC rules Part 24 and IC standard RSS-133.


Jan-Erik Lilja Senior Test Engineer

3 SUMMARY OF TEST RESULTS

Section in CFR 47	Section in RSS-133	Test	Result
§2.1046 (a)	6.2	Conducted RF output power	-
§24.232 (b)	6.2	Radiated RF output power	-
§2.1049 (h)	5.6	99% occupied bandwidth	PASS
§24.238 (a)	6.3	Bandedge compliance	PASS
§24.238 (a), §2.1051	6.3	Spurious emissions at antenna terminals	-
§24.238 (a), §2.1053	6.3	Radiated spurious emissions	PASS
§24.235, §2.1055 (a)(1)(b)	7	Frequency stability, temperature variation	PASS
§24.235, §2.1055 (d)(1)(2)	7	Frequency stability, voltage variation	PASS

4 EUT INFORMATION

The EUT and accessories used in the tests are listed below. Later in this report only EUT numbers are used as reference.

	Name	Type	S/N	HW	SW	EUT number
EUT	RM-57	Phone	004400521611481	0701	2.10	40147
	RM-57	Phone	004400521611499	0701	2.10	40148
Accessories	BL-5C	Battery	-	6.0	-	40123
	BL-5C	Battery	-	6.0	-	40124
	ACP-12	Charger	-	5.0	-	40121
	Nokia	Dummy battery	-	-	-	40152

Notes: -

4.1 EUT description

The EUT is a The EUT is a triple band (GSM 900/1800/1900 EGPRS) mobile phone.

The EUT was not modified during the tests.

5 EUT TEST SETUPS

For each test the EUT was exercised to find out the worst case of operation modes and device configuration

6 APPLICABLE STANDARDS


The tests were performed in guidance of CFR 47 part 24, part 2, ANSI/TIA/EIA-603-A and RSS-133. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method" for each test case.

7 99% OCCUPIED BANDWIDTH

EUT	40147		
Accessories	40123		
Temp, Humidity, Air Pressure	21 °C	47 RH%	999 mbar
Date of measurement	30.12.2004		
FCC rule part	§2.1049 (h)		
RSS-133 section	5.6		
Measured by	Jari Jantunen		

7.1 Test setup

The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns.

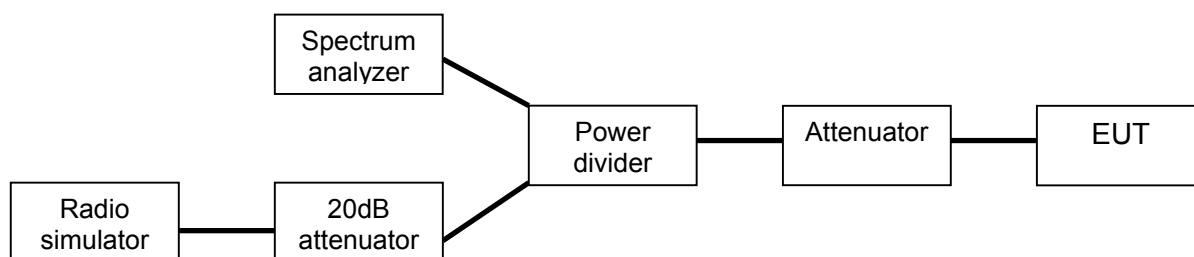

7.2 EUT operation mode


EUT operation mode	GSM, TX on, 1 time slot, PRBS 2E9-1 modulation data EGPRS, TX on, 1/2 time slot, PRBS 2E9-1 modulation data
EUT channel	661
EUT TX power level	Maximum

7.3 Results

The 99% occupied bandwidth was measured using the in-built function of the spectrum analyzer.


EUT Channel	EUT operation mode	99% occupied bandwidth [kHz]
661	GSM	248.397
661	EGPRS	238.782

7.4 Screen shot

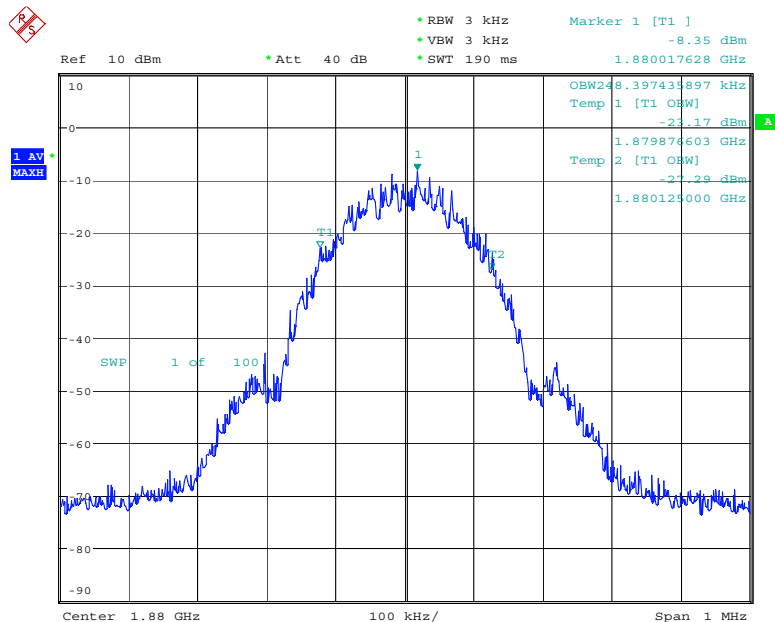

Date: 30.DEC.2004 12:32:21

Picture 1 99% occupied bandwidth, GSM 1900 channel 661

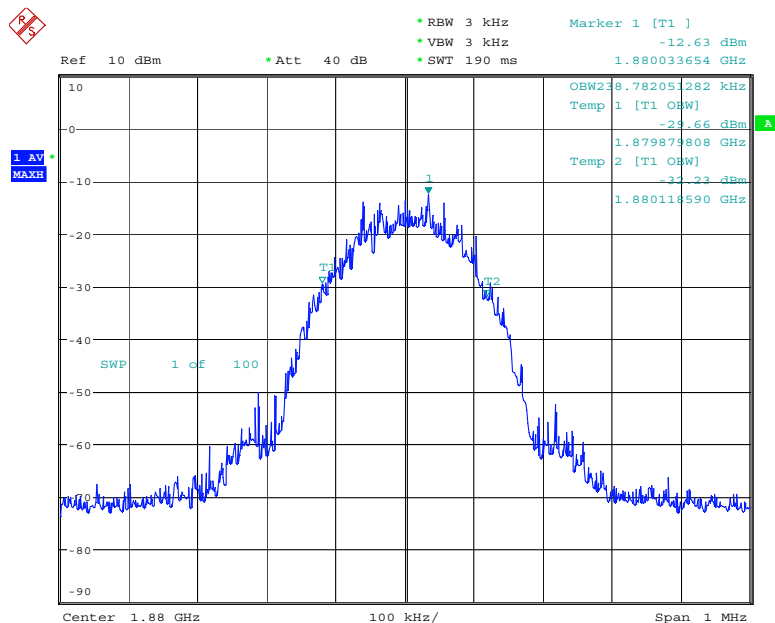

Date: 30.DEC.2004 12:37:10


Picture 2 99% occupied bandwidth, EGPRS 1900 channel 661

8 BANDEGE COMPLIANCE

EUT	40148		
Accessories	40121, 40123		
Temp, Humidity, Air Pressure	21°C	47 RH%	999 mbar
Date of measurement	30.12.2004		
FCC rule part	§24.238 (a)		
RSS-133 section	6.3		
Measured by	Jari Jantunen		
Result	PASS		

8.1 Test setup

The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns.

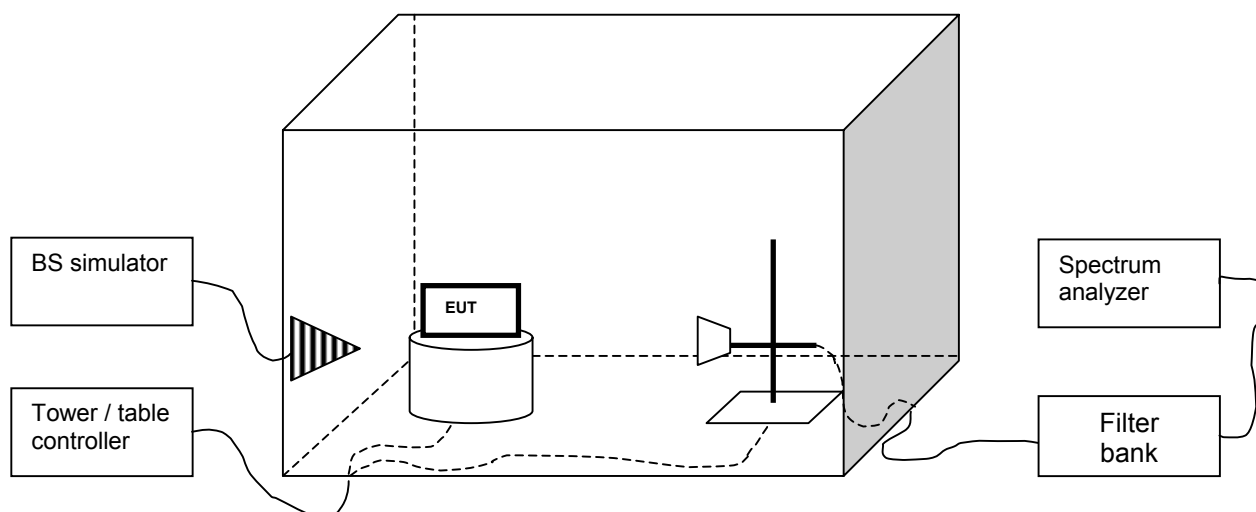

8.2 EUT operation mode

EUT operation mode	GSM, TX on, 1 time slot, PRBS 2E9-1 modulation data EGPRS, TX on, 1 time slot, PRBS 2E9-1 modulation data
EUT channel	See section 8.4
EUT TX power level	Maximum

8.3 Limit

Frequency [MHz]	Level [dBm]
<1850 or 1910<	-13


8.4 Results

The line in the screen shots is the -13dBm limit line. The results were corrected with measurement path loss set as "offset" in the spectrum analyzer. RBW/VBW was 3kHz.


Table 1 Bandedge compliance

EUT Channel	EUT operation mode	Level [dBm]
512	GSM	-16.26
810	GSM	-15.40
512	EGPRS	-21.48
810	EGPRS	-18.92



8.5 Screen shots

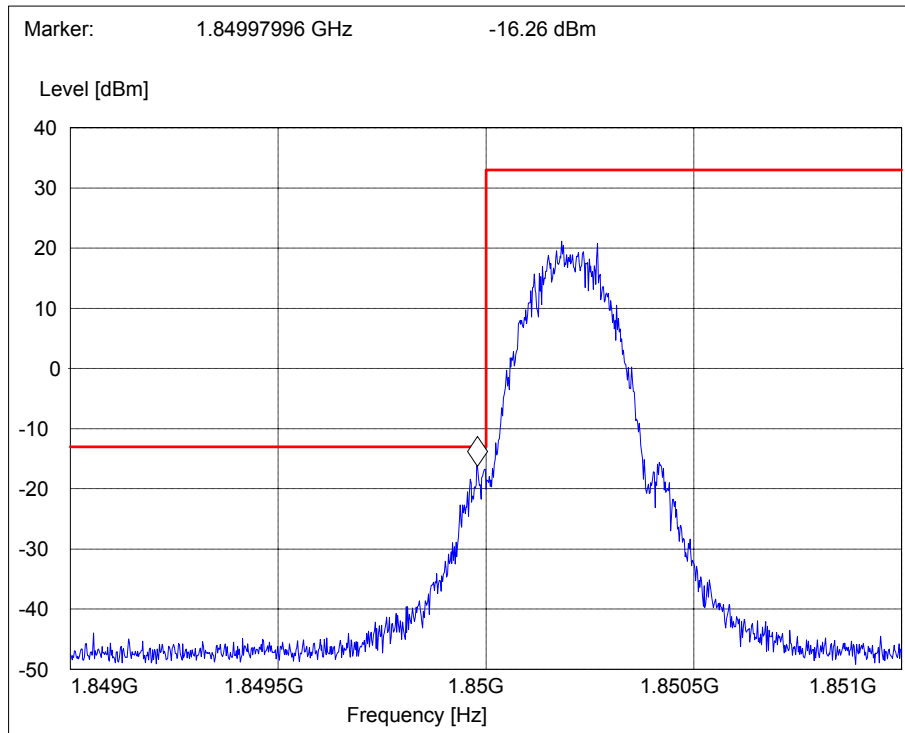

Picture 3 Lower bandedge, GSM 1900 channel 512

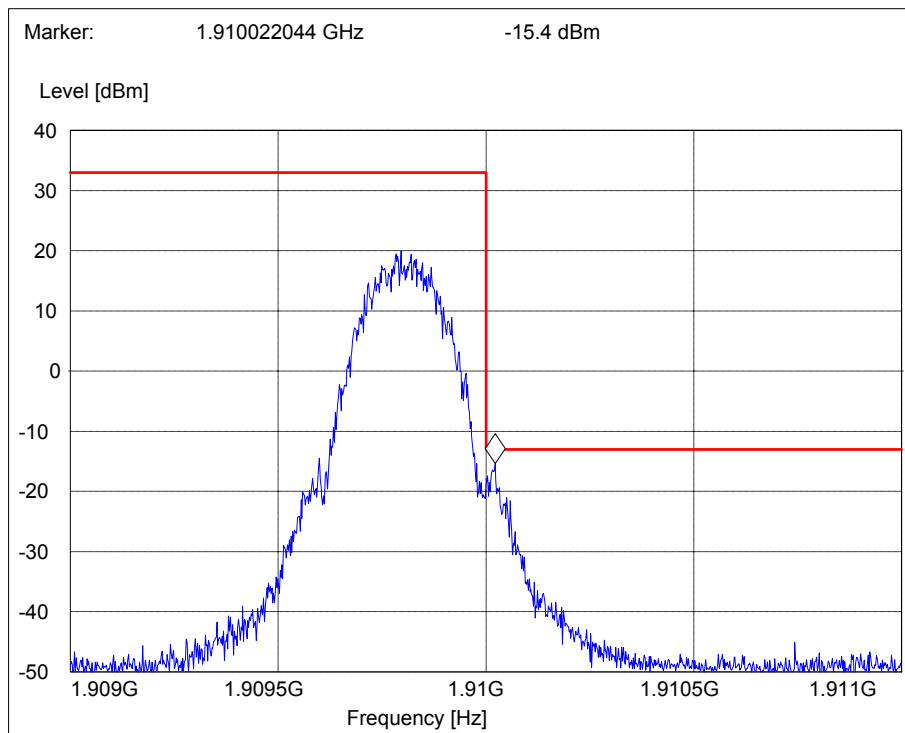

Picture 4 Upper bandedge, GSM 1900 channel 810

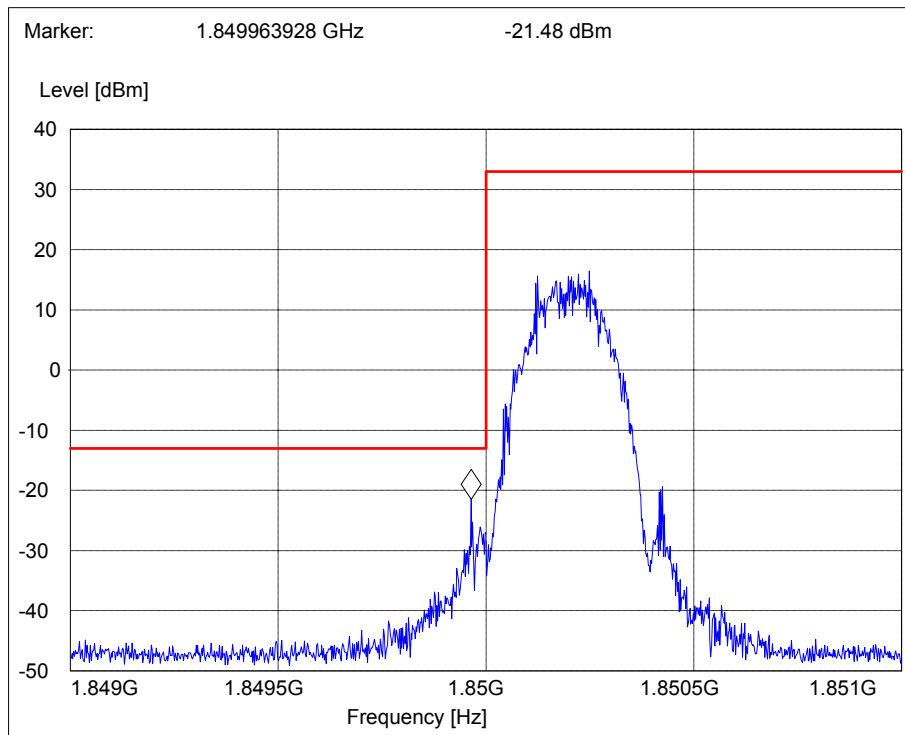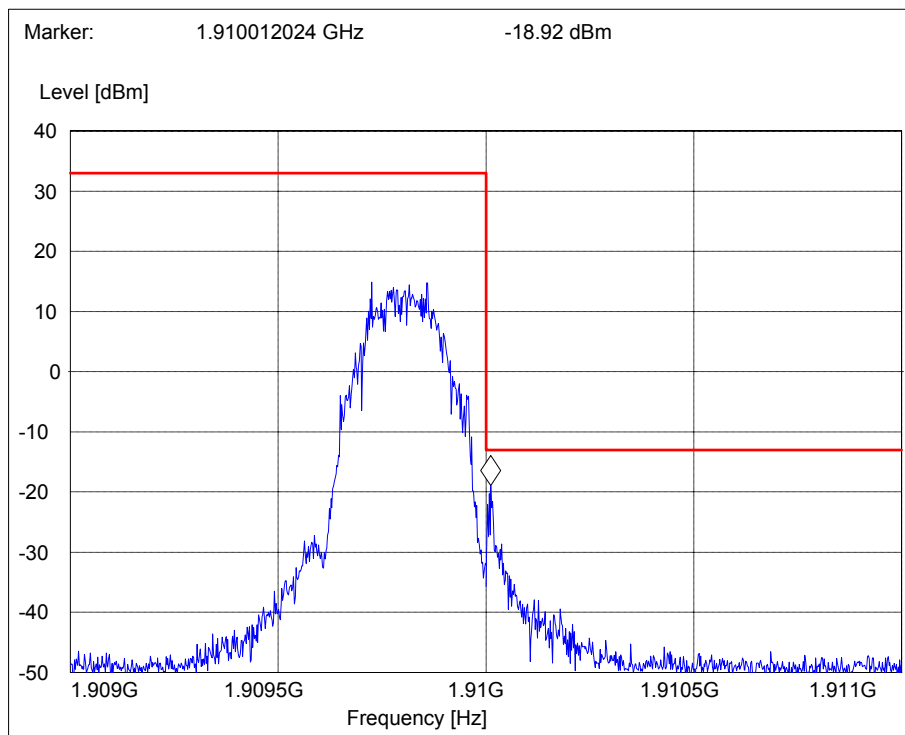
**Picture 5 Lower bandedge, EGPRS 1900 channel 512****Picture 6 Upper bandedge, EGPRS 1900 channel 810**

9 SPURIOUS RADIATED EMISSION

EUT	40148		
Accessories	40121, 40123		
Temp, Humidity, Air Pressure	21 °C	47 RH%	999 mbar
Date of measurement	30.12.2004		
FCC rule part	§24.238 (a), §2.1053		
RSS-133 section	6.3		
Measured by	Jari Jantunen		
Result	PASS		

9.1 Test setup

A set of LP/HP/BS filters was used to prevent overloading the spectrum analyzer. The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns. The test was done using an automated test system, where the measurement devices were controlled by a computer.

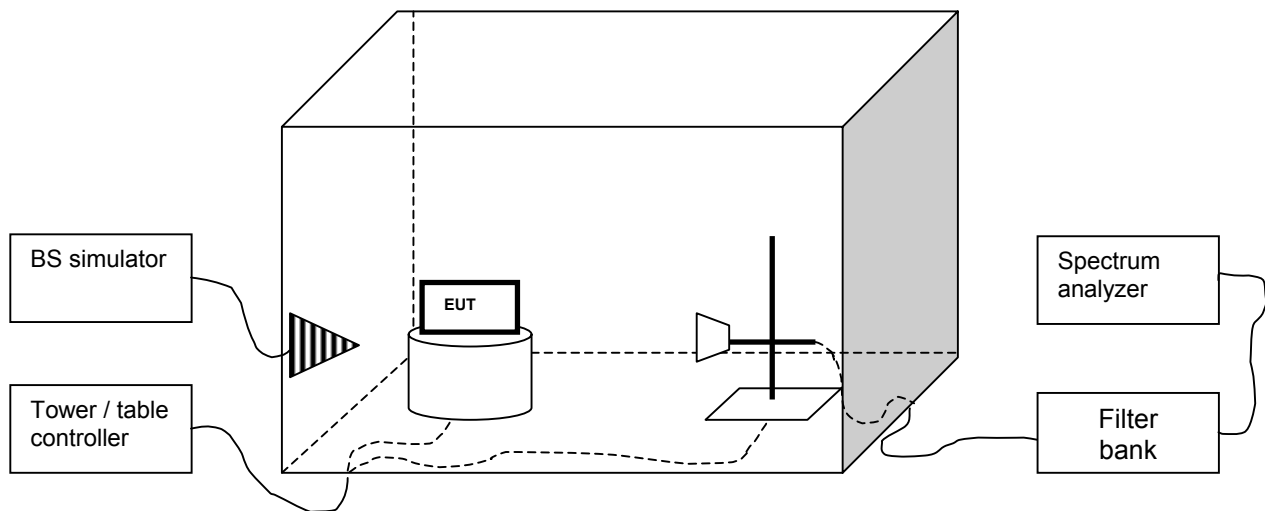

9.2 Test method

- The emissions were searched and maximized by moving the turn table and measuring antenna and manipulating the EUT.
- All suspicious frequencies with emission levels were recorded.
- The EUT was replaced with a substituting antenna.
- For each frequency recorded, the substituting antenna was fed with the power (from signal generator) giving the same reading as in (b). These power levels were reported.

9.3 EUT operation mode

EUT operation mode	GSM, TX on, 1 time slot, PRBS 2E9-1 modulation data EGPRS, TX on, 1 time slot, PRBS 2E9-1 modulation data
EUT channel	661
EUT TX power level	Maximum

9.4 Limit

Frequency [MHz]	Level [dBm]
30 – 19100	-13

9.5 Results

The formula below was used to calculate the EIRP of the spurious emissions. If there were no emissions closer than 20dB below the limit line, then the emission levels were measured at the transmitter's harmonics.

$$P_{Emission[dBm]} = P_{SubstTX[dBm]} - L_{Cable[dB]} + G_{Antenna[dBi]}$$

where the variables are as follows:

$P_{Measured}$ [dBm] Measured emission level (from step b in 9.2)

P_{Subst_TX} [dBm] Signal generator power (from step d in 9.2) fed to the substituting antenna

L_{Cable} [dB] Loss of the cable between antenna and signal generator (from step d in 9.2)

$G_{Antenna}$ [dBi] Gain of the substitutive antenna over isotropic radiator

Table 2 Emission levels, GSM1900,channel 661

Frequency [MHz]	$P_{Measured}$ [dBm]	P_{Subst_TX} [dBm]+ L_{Cable} [dB]+ $G_{Antenna}$ [dBi]	$P_{Emission}$ [dBm]
3760,00	-63.10	-9.30	-53.80
5640,00	-61.60	-11.80	-49.80
7520,00	-64.70	-14.90	-49.80
9400,00	-65.70	-18.60	-47.10
11280,00	-65.60	-19.60	-46.00
13160,00	-65.20	-21.50	-43.70
15040,00	-65.60	-22.80	-42.80
16920,00	-66.60	-25.90	-40.70

Table 3 Emission levels, EGPRS1900, channel 661


Frequency [MHz]	$P_{Measured}$ [dBm]	P_{Subst_TX} [dBm]+ L_{Cable} [dB]+ $G_{Antenna}$ [dBi]	$P_{Emission}$ [dBm]
3760,00	-63.30	-9.30	-54.00
5640,00	-58.60	-11.80	-46.80
7520,00	-64.70	-14.90	-49.80
9400,00	-65.60	-18.60	-47.00
11280,00	-66.60	-19.60	-47.00
13160,00	-64.90	-21.50	-43.40
15040,00	-66.20	-22.80	-43.40
16920,00	-67.70	-25.90	-41.80

10 FREQUENCY STABILITY, TEMPERATURE VARIATION

EUT	40147
Accessories	40124
Temp, Humidity, Air Pressure	20 °C 49 RH% 1002 mbar
Date of measurement	10.1.2005
FCC rule part	§24.235, §2.1055 (a)(1)(b)
RSS-133 section	7
Measured by	Jari Jantunen
Result	PASS

10.1 Test setup

The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns.

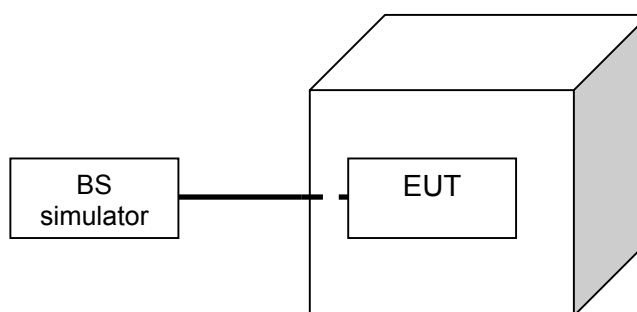

10.2 EUT operation mode

EUT operation mode	GSM, TX on, 1 time slot, PRBS 2E9-1 modulation data
EUT channel	661
EUT TX power level	Maximum

10.3 Limit

Frequency deviation [ppm]
± 2.5

10.4 Test method

- The climate chamber temperature was set to the minimum value and the temperature was allowed to stabilize.
- The EUT was placed in the chamber
- The EUT was set in idle mode for 45 minutes.
- The EUT was set to transmit.
- The transmit frequency error was measured immediately
- The steps c - e were repeated for each temperature

10.5 Results

Table 4 Frequency deviation, temperature variation

Temperature [°C]	Deviation [Hz]	Deviation [ppm]
-30	39	0.0207
-20	33	0.0176
-10	30	0.0156
0	27	0.0144
10	27	0.0144
20	29	0.0154
30	31	0.0165
40	29	0.0154
50	30	0.0160

11 FREQUENCY STABILITY, VOLTAGE VARIATION

EUT	40147
Accessories	40152
Temp, Humidity, Air Pressure	21 °C 45 RH% 998 mbar
Date of measurement	31.12.2004
FCC rule part	§24.235, §2.1055 (d)(1)(2)
RSS-133 section	7
Measured by	Jari Jantunen
Result	PASS

11.1 Test setup

The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns.



11.2 EUT operation mode

EUT operation mode	GSM, TX on, 1 time slot, PRBS 2E9-1 modulation data
EUT channel	661
EUT TX power level	Maximum

11.3 Limit

Frequency deviation [ppm]
± 2.5

11.4 Test method

The EUT battery was replaced with an adjustable power supply. The frequency stability was measured at nominal voltage and at the battery cut-off point.

11.5 Results

Table 5 Frequency deviation, voltage variation

Level	Voltage [V]	Deviation [Hz]	Deviation [ppm]
Nominal	3.70	33	0.0176
Battery cut-off point	3.25	29	0.0150

12 TEST EQUIPMENT

Each test equipment is calibrated once a year.

12.1 Conducted measurements

Equipment	Manufacturer	Model
Spectrum analyzer	Rohde & Schwarz	FSU
Radio communication tester	Rohde & Schwarz	CMU-200
Attenuator 10 dB	Huber+Suhner AG	6251.17.A
Step attenuator 110dB	Hewlett-Packard	8496A
Power splitter	Hewlett-Packard	11667A
High pass filter	Trilithic	WHK2010-10SS
Low pass filter	Trilithic	WLK1750-10SS
Tunable notch filter	Wainwright	WRCD1850/1910-0.2/40
Temperature chamber	Vötsch	VT4002
DC power supply	HP	6632A
Multimeter	Fluke	87

12.2 Radiated measurements

Equipment	Manufacturer	Model
3m semi-anechoic chamber	TDK	
EMI receiver	Rohde & Schwarz	ESI 40
Preamplifier	MITEQ	AMF-5D-020180-26-10P
Preamplifier	MITEQ	AMF-4D-10M-3G-25-20P
Dipole antenna	EMCO	3125-870
Dipole antenna	EMCO	3125-1880
Biconilog antenna	Rohde & Schwarz	HL562
Double ridged waveguide antenna	EMCO	3115
Horn antenna	EMCO	3116
Reference dipole set	Schwarzbeck	UHAP/VHAP
Communication antenna	EMC Automation	LPA-8020
Radio communication tester	Rohde & Schwarz	CMU-200
Signal generator	Hewlett-Packard	83640L
Step attenuator 110dB	Hewlett-Packard	8496A
Power splitter	Hewlett-Packard	11667A
High pass filter	Trilithic	WHK2010-10SS
Low pass filter	Trilithic	WLK1750-10SS
Tunable notch filter	Wainwright	WRCD1850/1910-0.2/40
Turntable controller	Deisel	HD-100
Turntable	Deisel	DS412
Antenna mast controller	EMCO	2090
Antenna mast	EMCO	2075
Temperature chamber	Vötsch	VT4002
DC power supply	Hewlett-Packard	6632A
Multimeter	Fluke	87