Electromagnetic Compatibility Test Report

Tests Performed on an Aclara Technologies, LLC

Water Meter Transmission Unit (MTU), Model: 2019-006

Radiometrics Document RP-9272A

ACCREDITED
TESTING CERT #1495.01

Product Detail:	
FCC ID: LLB2019006 IC: 4546A-2019006 Equipment type: 450-470 MHz Transceiver	
Test Standards:	
US CFR Title 47, Chapter I, FCC Part 2 and 90 FCC Parts 2, 15, and 90 CFR Title 47: 2019 IC RSS-119 Issue 12: 2015 IC RSS-GEN Issue 4: 2014	
Tests Performed For:	*Test Facility:*
Aclara Technologies, LLC 77 Westport Plaza Drive, Suite 500 Saint Louis, MO 63146	**Radiometrics Midwest Corporation** 12 Devonwood Av. Romeoville, IL 60446 Phone: (815) 293-0772
Test Dates:	
April 8 to 22 and August 13-14, 2020	

Document RP-9272A Revisions:

Rev.	Issue Date	Affected Sections	Revised By
0	July 16, 2020		
1	July 21, 2020	3.1, 4.2, 10.1	Joseph Strzelecki
2	August 17, 2020	10.4.2 & 10.7.2	Joseph Strzelecki

Table of Contents

1 ADMINISTRATIVE DATA 3
2 TEST SUMMARY AND RESULTS 3
3 EQUIPMENT UNDER TEST (EUT) DETAILS 4
3.1 EUT Description 4
4 TESTED SYSTEM DETAILS 4
4.1 Tested System Configuration 4
4.2 Special Accessories 5
4.3 Equipment Modifications 5
5 TEST SPECIFICATIONS AND RELATED DOCUMENTS 5
6 RADIOMETRICS' TEST FACILITIES 5
7 DEVIATIONS AND EXCLUSIONS FROM THE TEST SPECIFICATIONS 6
8 CERTIFICATION 6
9 TEST EQUIPMENT TABLE 6
10 TEST SECTIONS 7
10.1 Peak Output Power 7
10.2 Occupied Bandwidth; Emissions Masks 8
10.2.1 Conducted Spurious Emissions 27
10.3 Occupied Bandwidth 28
10.4 Field Strength of Unwanted Spurious Radiation 32
10.4.1 Test Procedures 32
Figure 1. Drawing of Radiated Emissions Setup 33
10.4.2 Spurious Radiated Emissions Test Results 34
10.5 Frequency Stability 36
10.5.1 Frequency Stability Vs Temperature 36
10.5.2 Frequency Stability Vs Supply Voltage 36
10.5.3 Test Results for Frequency Stability 36
10.6 Transient Frequency Behavior 37
10.6.1 Test method 37
10.6.2 Limits of transient frequency 37
10.6.3 Test Results 38
10.6.4 Results for Time Periods t1 and t2 38
10.6.5 Results for Time Period between t2 and t3 40
10.6.6 Results for Time Period t3 42
10.7 Radiated Emissions (Receive Mode) 44
10.7.1 Radiated Emissions Field Strength Sample Calculation 44
10.7.2 Spurious Radiated Emissions Test Results (Receive Mode) 44
11 MEASUREMENT INSTRUMENTATION UNCERTAINTY 46

Notice: This report must not be reproduced (except in full) without the written approval of Radiometrics Midwest Corporation.

1.0 ADMINISTRATIVE DATA

Equipment Under Test: An Aclara Technologies LLC., Water Meter Transmission Unit (MTU) Model: 2019-006; Serial Numbers: 2001990037, 2001990038, 2001990039 These will be referred to as the EUT in this Report	
Date EUT Received at Radiometrics: April 8, 2020	*Test Dates:* April 8 thru 22, 2020
Test Report Written and Authorized By: Joseph Strzelecki Senior EMC Engineer	*Test Witnessed By:* The tests were not witnessed by personnel from Aclara Technologies, LLC
Radiometrics' Personnel Responsible for Test:  07/17/2020 Date Joseph Strzelecki Senior EMC Engineer NARTE EMC-000877-NE Richard L. Tichgelaar EMC Technician Chris E. Dalessio EMC Technician	

2.0 TEST SUMMARY AND RESULTS

The EUT (Equipment Under Test) is a Water Meter Transmission Unit (MTU), Model 2019-006, manufactured by Aclara Technologies, LLC. The detailed test results are presented in a separate section. The following is a summary of the test results.

Transmitter Requirements

Environmental Phenomena	Frequency Range	FCC Sections	RSS 119 Section	Test Result
RF Power Output	450-470 MHz	2.1046 & 90.205	5.4	Pass
Occupied Bandwidth Test; Emissions Masks	450-470 MHz	2.1049 & 90.209	5.5	Pass
Spurious RF Conducted Emissions	1-4700 MHz	2.1051 & 90.210	5.8	Pass
Field Strength of Spurious Radiation	30-4700 MHz	2.1053	5.3	Pass
Frequency Vs. Temperature	450-470 MHz	2.1055 & 90.213	5.3	Pass
Frequency Vs. Voltage	450-470 MHz	2.1055 & 90.213	5.3	Pass
Transient Frequency Behavior	450-470 MHz	90.214	5.9	Pass

3.0 EQUIPMENT UNDER TEST (EUT) DETAILS

3.1 EUT Description

The EUT is a Water Meter Transmission Unit (MTU). The MTU is a battery powered device that is mounted directly on a gas meter and sends data over a narrow-band RF transmission link. The EUT is a 450-470 MHz transceiver, manufactured by Aclara Technologies, LLC. The RF communications link is encrypted in both directions. The EUT was in good working condition during the tests, with no known defects.

Modulated Signal Parameters:

Data Rate	7232 Baud
Encoding	NRZ, Non-return-to-zero
Number of Data Bits	488 bits max
Modulation	2GFSK with +/-2.0KHz Dev Typ.

Antenna Options There are currently two authorized antenna options:

1. The internal antenna etched into the PCB. (Gain = 2 dBi)
2. The external antenna: MicroAnt – Alcara P/N 073-3002 (Gain = 3 dBi)

The firmware of the EUT during the tests is “FCC_TEST_CODE”. That code is identical to what would be released, except it allows for transmissions to continue for long periods of time, as required for the Regulatory tests.

4.0 TESTED SYSTEM DETAILS

4.1 Tested System Configuration

The system was configured for testing in a typical fashion. The testing was performed in conditions as close as possible to installed conditions. Wiring was consistent with manufacturer's recommendations. The identification for all equipment, used in the tested system, is:

Tested System Configuration List

Item	Description	Type*	Manufacturer	Model Number	Serial Number
1	Water Meter Transmission Unit	E	Aclara Technologies, LLC	2019-006	2001990037
2	Water Meter Transmission Unit	E	Aclara Technologies, LLC	2019-006	2001990038
3	Water Meter Transmission Unit	E	Aclara Technologies, LLC	2019-006	2001990039

* Type: E = EUT

4.2 Operating Conditions of EUT

The EUT was in a normal operating mode during the tests. All circuits were activated during the tests. Power was supplied with a new battery.

The EUT was operated using Aclara’s “RF Test Mode App Version 0.4.6”. The settings used are as follows:

Description	Extended	Standard
XCVR Parameters	1	0
XCVR Power Level	10	10

Description	Extended	Standard
Nominal Standard Range PA PWM (on counts out of 1000)	108	108
Nominal Extended Range PA PWM (on counts out of 1000)	225	267
PA PWM Frequency Compensation Factor	68	120
PA PWM Temperature Compensation Factor	34	31

The EUT was set to 2GFSK modulation.

4.3 Special Accessories

No special accessories were used during the tests in order to achieve compliance.

4.4 Equipment Modifications

No modifications were made to the EUT at Radiometrics' test facility in order to comply with the standards listed in this report.

5.0 TEST SPECIFICATIONS AND RELATED DOCUMENTS

Document	Date	Title
FCC CFR Title 47	2019	Code of Federal Regulations Title 47, Chapter 1, Federal Communications Commission, Part 15 & 90 - Radio Frequency Devices
ANSI C63.4-2014	2014	Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
TIA-603-D	2010	Land Mobile FM or PM Communications Equipment – Measurement and Performance Standards
IC RSS-Gen Issue 4	2014	General Requirements and Information for the Certification of Radiocommunication Equipment (RSS-Gen)
IC RSS-119 Issue 12	2015	Radio Transmitters and Receivers Operating in the Land Mobile and Fixed Services in the Frequency Range 27.41-960 MHz

RSS-Gen & RSS-119 are not currently in Radiometrics' Scope of Accreditation, however it uses the procedures from TIA-603-D and ANSI C63.4 that are in Radiometrics Scope of Accreditation

6.0 RADIOMETRICS' TEST FACILITIES

The results of these tests were obtained at Radiometrics Midwest Corp. in Romeoville, Illinois, USA. Radiometrics is accredited by A2LA (American Association for Laboratory Accreditation) to conform to ISO/IEC 17025: 2017 "General Requirements for the Competence of Calibration and Testing Laboratories". Radiometrics' Lab Code is 121191 and Certification Number is 1495.01. A copy of the accreditation can be accessed on our web site (www.radiomet.com). Radiometrics accreditation status can be verified at A2LA's web site (www.a2la2.org).

The following is a list of shielded enclosures located in Romeoville, Illinois used during the tests:

Chamber A: Is an anechoic chamber that measures 24' L X 12' W X 12' H. The walls and ceiling are fully lined with ferrite absorber tiles. The floor has a 10' x 10' section of ferrite absorber tiles located in the center. Panashield of Rowayton, Connecticut manufactured the chamber. The enclosure is NAMAS certified.

Chamber B: Is a shielded enclosure that measures 20' L X 12' W X 8' H. Erik A. Lindgren & Associates of Chicago, Illinois manufactured the enclosure.

Chamber C: Is a shielded enclosure that measures 17' L X 10' W X 8' H. Lindgren RF Enclosures Inc. of Addison, Illinois manufactured the enclosure.

Chamber E: Is a custom-made anechoic chamber that measures 52' L X 30' W X 18' H. The walls and ceiling are fully lined with RF absorber. Pro-shield of Collinsville, Oklahoma manufactured the chamber.

A separate ten-foot long, brass plated, steel ground rod attached via a 6-inch copper braid grounds each of the above chambers. Each enclosure is also equipped with low-pass power line filters.

The FCC has accepted these sites as test site number US1065. The FCC test site Registration Number is 732175. Details of the site characteristics are on file with the Industry Canada as site number IC3124A.

7.0 DEVIATIONS AND EXCLUSIONS FROM THE TEST SPECIFICATIONS

There were no deviations or exclusions from the test specifications.

8.0 CERTIFICATION

Radiometrics Midwest Corporation certifies that the data contained herein was taken under conditions that meet or exceed the requirements of the test specification. The results relate only to the EUT listed herein. Any modifications made to the EUT subsequent to the indicated test date will invalidate the data and void this certification.

9.0 TEST EQUIPMENT TABLE

RMC ID	Manufacturer	Description	Model No.	Serial No.	Frequency Range	Cal Period	Cal Date
AMP-05	RMC/Celeritek	Pre-amplifier	MW110G	1001	1.0-12GHz	12 Mo.	01/14/20
ANT-06	EMCO	Log-Periodic Ant.	3146	1248	200-1000MHz	24 Mo.	12/13/19
ANT-13	EMCO	Horn Antenna	3115	2502	1.0-18GHz	24 Mo.	01/16/19
ANT-36	Ailtech-Eaton	Horn Antenna	96001	2013	1.0-18GHz	24 Mo.	11/19/18
ANT-68	EMCO	Log Periodic Antenna	93146	9604-4456	200-1000MHz	24 Mo.	01/02/20
ANT-79	AH Systems	Bicon Antenna	SAS-540	293	20-330MHz	24 Mo.	12/19/18
ANT-80	AH Systems	Bicon Antenna	SAS-540	294	20-330MHz	24 Mo.	12/19/18
ATT-28	Narda	Attenuator(20dB)	757B-20	3131	DC - 6 GHz	24 Mo.	11/06/19
ATT-53	Weinschel	Attenuator (20 dB)	23-20-34	CG7857	DC-18 GHz	12 Mo	11/06/19
CAB-044A	Teledyne	Coaxial Cable	N/A	044A	DC-18 GHz	24 Mo.	02/07/20
CAB-114G	Teledyne	Coaxial Cable	N/A	114G	DC-18 GHz	24 Mo.	02/05/20
CAB-142G	Teledyne	Coaxial Cable	N/A	142G	DC-18 GHz	24 Mo.	02/04/20
CAB-788A	Teledyne	Coaxial Cable	N/A	788A	DC-18 GHz	24 Mo.	02/07/20
CAB-106A	Teledyne	Coaxial Cable	N/A	106A	DC-2 GHz	24 Mo.	01/29/20
CAB-1090	Teledyne	Coaxial Cable	N/A	1090	DC-18 GHz	24 Mo.	02/06/20
CAB-160B	Teledyne	Coaxial Cable	N/A	160B	DC-18 GHz	24 Mo.	02/05/20
CDT-01	Wiltron	Crystal RF Detector	75N50	CDT-01	DC-18GHz	N/A	NCR
COM-01	Anaren	Coupler	10023-3	COM-01	250-1000MHz	N/A	NCR
DIR-19	Narda	Directional Coupler	3000-10	01174	200-500MHz	N/A	NCR
DMM-11	Fluke	DMM	17B	23490125	DC-100kHz	24 Mo.	06/17/20
PWM-01	Boonton	Power Meter	4230	22503	50kHz-18GHz	24 Mo.	01/15/20
REC-11	HP / Agilent	Spectrum Analyzer	E7405A	US39110103	9Hz-26.5GHz	24 Mo.	04/16/20

RMC ID	Manufacturer	Description	Model No.	Serial No.	Frequency Range	Cal Period	Cal Date
REC-20	HP / Agilent	Spectrum Analyzer	85460A/84562A	33330A00135 3410A00178	30Hz-6GHz	24 Mo.	08/14/19
REC-21	Agilent	Spectrum Analyzer	E7405A	MY45118341	9kHz-26.5 GHz	24 Mo.	01/14/20
REC-43	Adventest	Spectrum Analyzer	U3772	150800305	9kHz-43GHz	24 Mo.	06/24/19
SIG-31	Rohde & Schwarz	Vector Signal Generator	SMJ 100A	101395	100kHz-6GHz	36 Mo.	08/25/17
SCP-02	Tektronix	Oscilloscope	TDS784A	B040258	DC-1GHz	24 Mo.	01/15/19
SIG-31	Rohde & Schwarz	Vector Signal Generator	SMJ 100A	101395	100kHz-6GHz	36 Mo.	08/25/17
TC-01	GS Blue M Electric	Temperature Chamber	ETC-04S-E	0003-ETC-201	-40 to 100 Deg C	N/A	NCR
THM-02	Fluke	Temp/Humid Meter	971	93490471	N/A	24 Mo.	11/08/19

Note: All calibrated equipment is subject to periodic checks.
NCR – No Calibration Required. Device monitored by calibrated equipment. N/A: Not Applicable.

10.0 TEST SECTIONS

10.1 Peak Output Power

The peak power was measured by connecting the EUT antenna port to the spectrum analyzer via a low loss coaxial cable and an appropiate power attenuator.

Model	2019-006	Specification	FCC part 90.205 RSS-119 Section 5.4
Serial Number	2001990039	Test Date	April 09, 2020
Test Personnel	Richard Tichgelaar	Test Location	Chamber B
Test Equipment	Power meter (PWM-01)		

Standard Power

TX Freq MHz	Reading dBm	Atten & Cable	Total dBm	Peak Power Watts	Antenna Gain dBi	ERP Watts
450.0250	3.15	20.3	23.45	0.221	3.0	0.269
460.0000	3.17	20.3	23.47	0.222	3.0	0.270
469.9750	3.27	20.3	23.57	0.228	3.0	0.277

Extended Power

TX Freq MHz	Reading dBm	Atten & Cable	Total dBm	Peak Power Watts	Antenna Gain dBi	ERP Watts
450.0250	8.70	20.3	29.0	0.794	3.0	0.966
460.0000	8.55	20.3	28.85	0.767	3.0	0.933
469.9750	8.60	20.3	28.9	0.776	3.0	0.944

Judgement: Pass
The fundamental emission ERP limit is 100 watts (50 dBm) for an 8 km service area radius.

Note that in decibel units:
ERP = EIRP - 2.15 = P+G-2.15
where:

P = transmitter output power in dB(W)
G = Gain of the transmitting antenna in dBi
3 dBi is the maximum gain allowed by the product specification.

10.2 Occupied Bandwidth; Emissions Masks

Model	2019-006	Specification	FCC Part 90.209 & 90.210 RSS-119 Section 5.5
Serial Number	2001990039	Test Date	04-09-2020; 04-14-2020
Test Personnel	Richard Tichgelaar	Test Location	Chamber B
Test Equipment	Spectrum Analyzer (REC-21), (REC-43)		

The spectrum analyzer was set to the MAX HOLD mode to record the worst case of the modulation. The EUT was transmitting at its maximum data rate. The trace was allowed to stabilize. All Channels are 12.5 kHz. The emissions Mask D is from FCC part 90.210.

(1) On any frequency from the center of the authorized bandwidth f0 to 5.625 kHz removed from f0: Zero dB.

(2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least 7.27(fd −2.88 kHz) dB.

(3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 12.5 kHz: At least 50 + 10 log (P) dB.

For all Frequencies beyond 25 kHz from the center of the transmit frequency, the worst-case limit was used. The red line is a 50-dB reduction from carrier based on 1 watt.

EXTENDED POWER

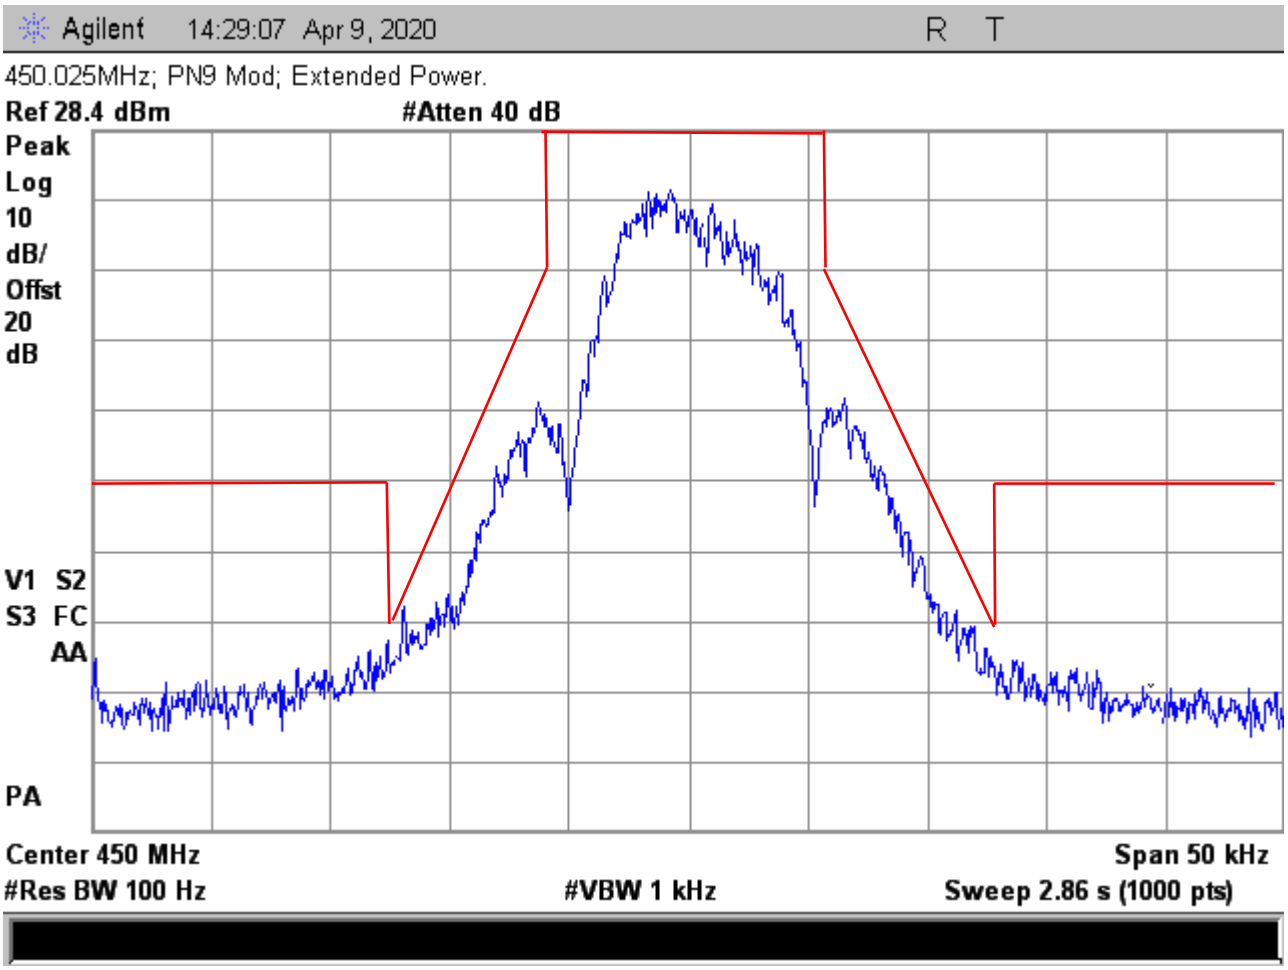

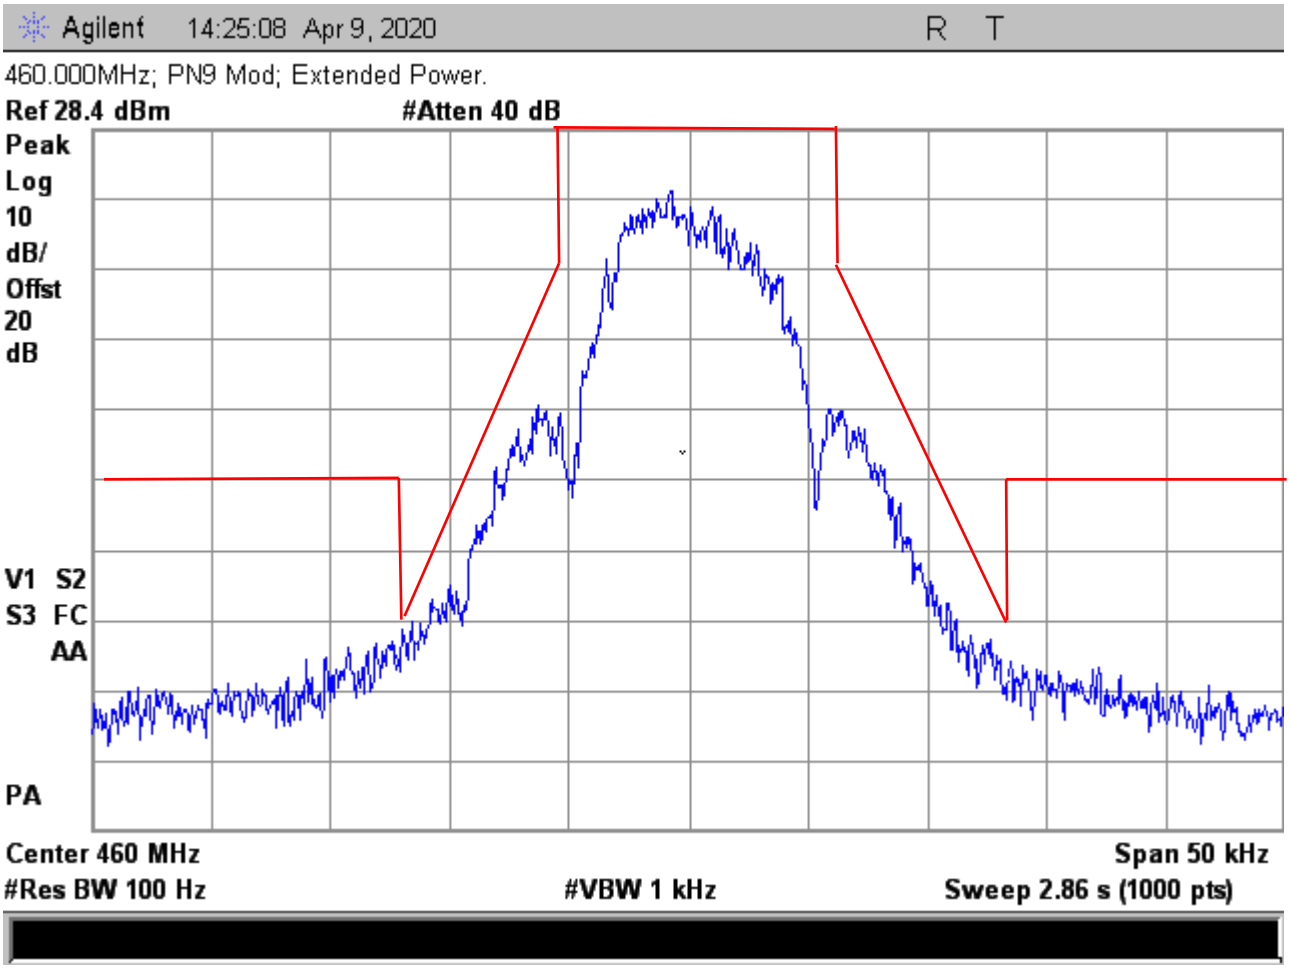
Agilent 14:25:08 Apr 9, 2020
R T
460.000MHz; PN9 Mod; Extended Power.
Ref 28.4 dBm
#Atten 40 dB
Peak
Log
10
dB/
Offst
20
dB
V1 S2
S3 FC
AA
PA
Center 460 MHz
Span 50 kHz
#Res BW 100 Hz
#VBW 1 kHz
Sweep 2.86 s (1000 pts)

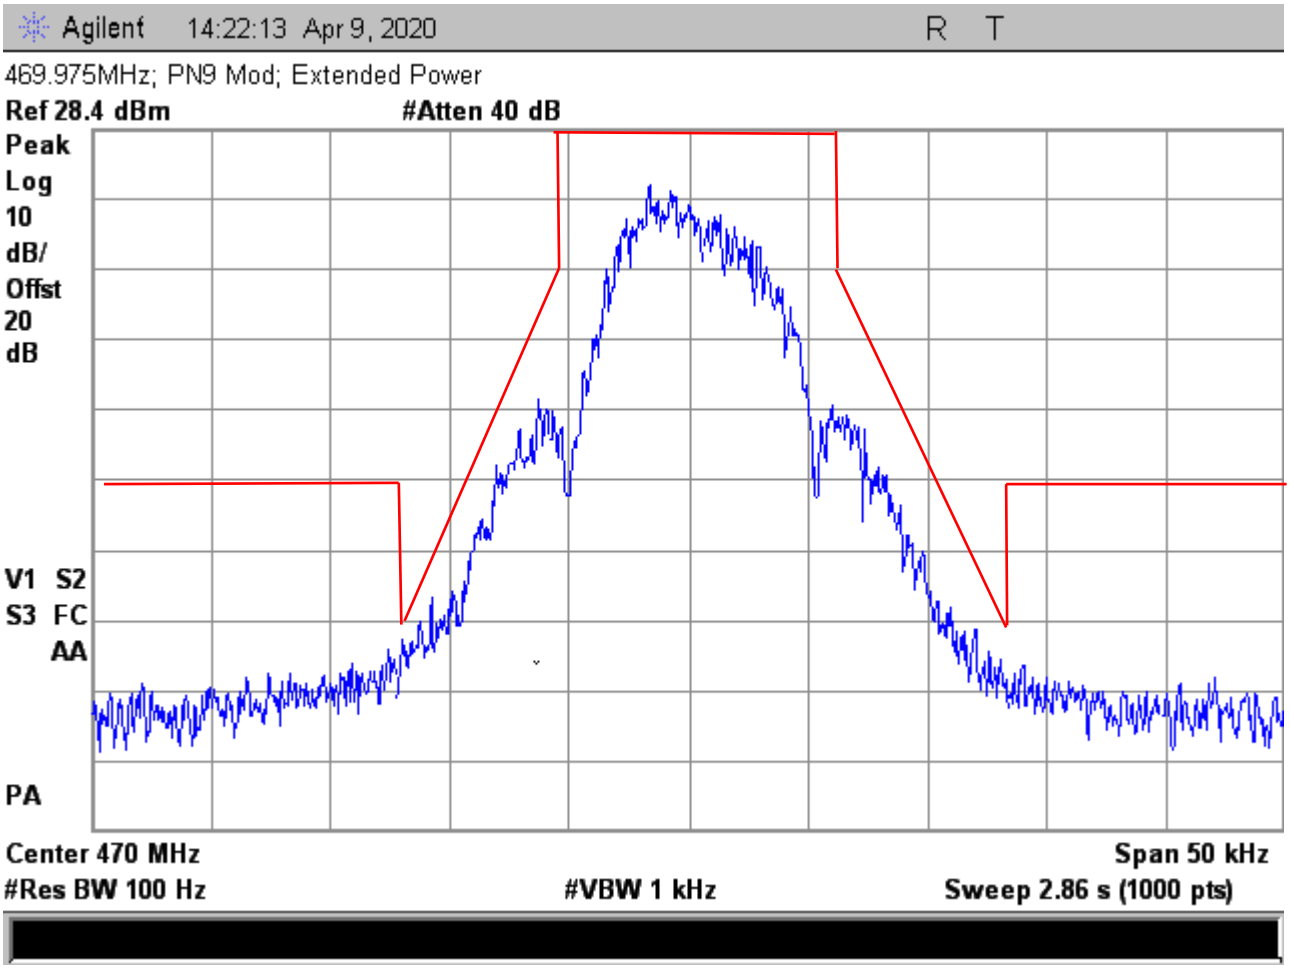

The red line is a 50-dB reduction from carrier based on 1 watt.

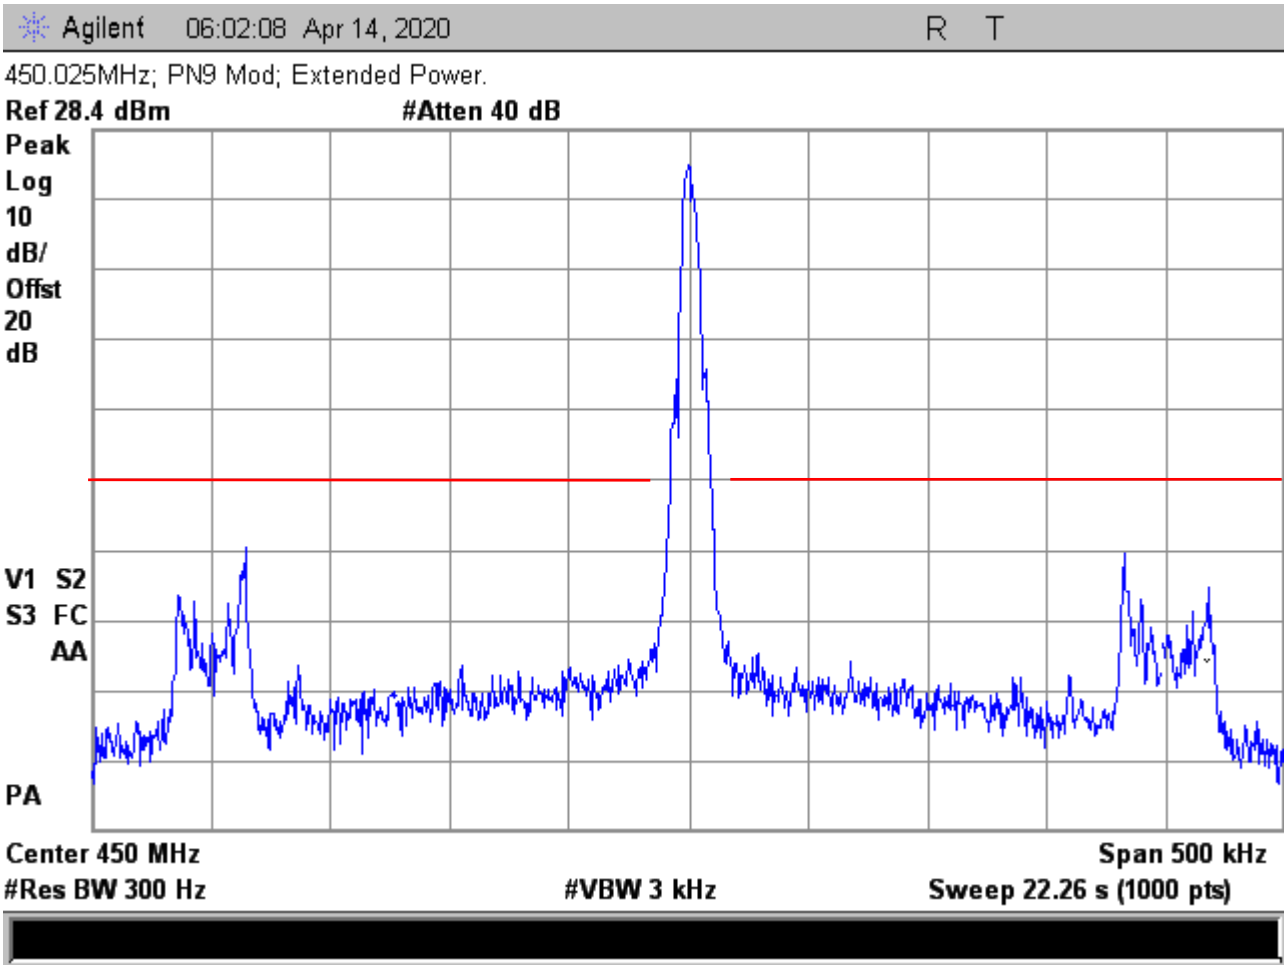
Agilent 06:02:08 Apr 14, 2020
R T
450.025MHz; PN9 Mod; Extended Power.
Ref 28.4 dBm
#Atten 40 dB
Peak
Log
10
dB/
Offst
20
dB
V1 S2
S3 FC
AA
PA
Center 450 MHz
Span 500 kHz
#Res BW 300 Hz
#VBW 3 kHz
Sweep 22.26 s (1000 pts)

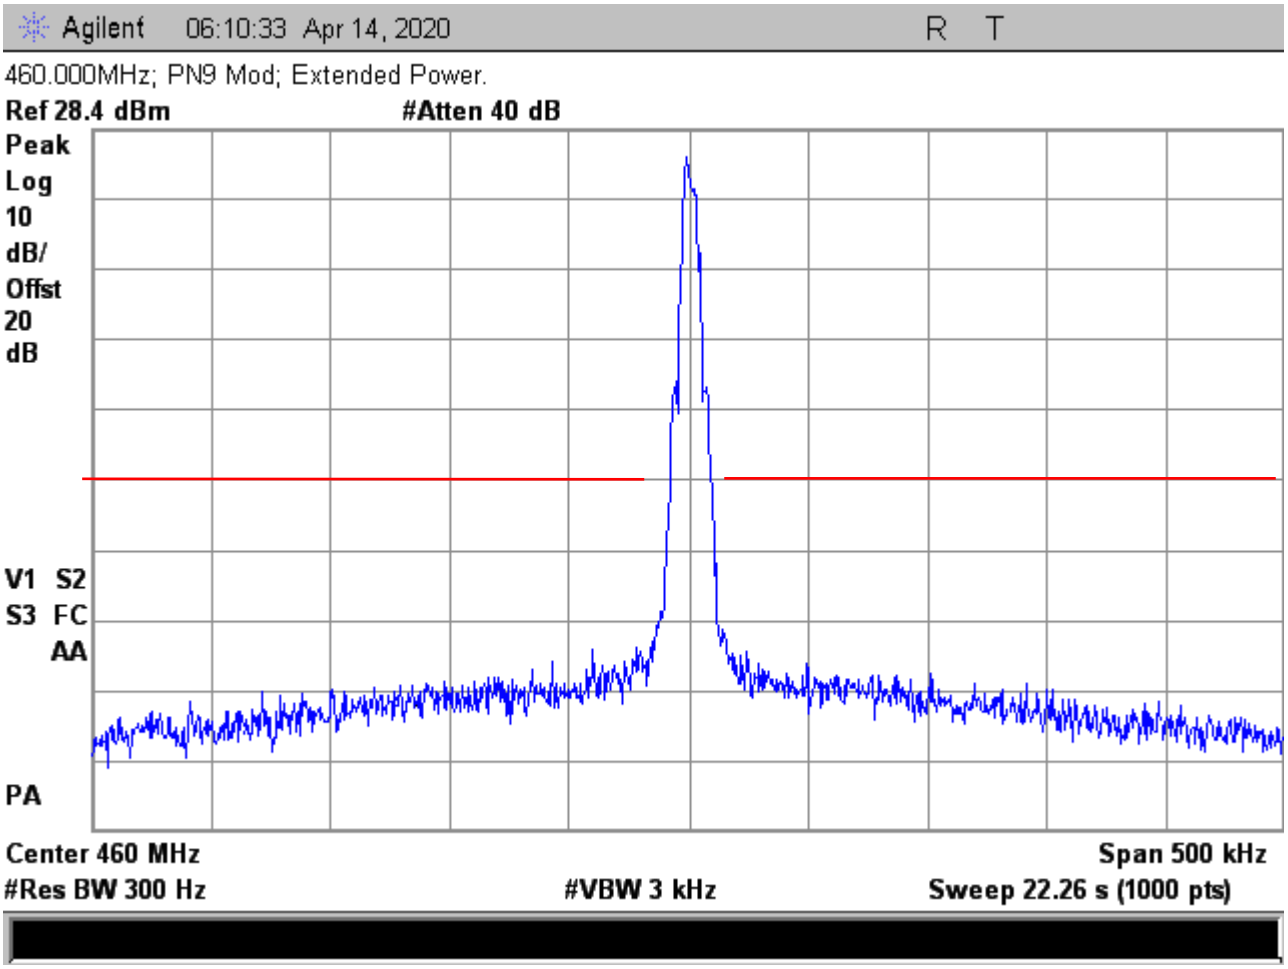
Agilent 06:10:33 Apr 14, 2020
R T
460.000MHz; PN9 Mod; Extended Power.
Ref 28.4 dBm
#Atten 40 dB
Peak
Log
10
dB/
Offst
20
dB
V1 S2
S3 FC
AA
PA
Center 460 MHz
Span 500 kHz
#Res BW 300 Hz
#VBW 3 kHz
Sweep 22.26 s (1000 pts)

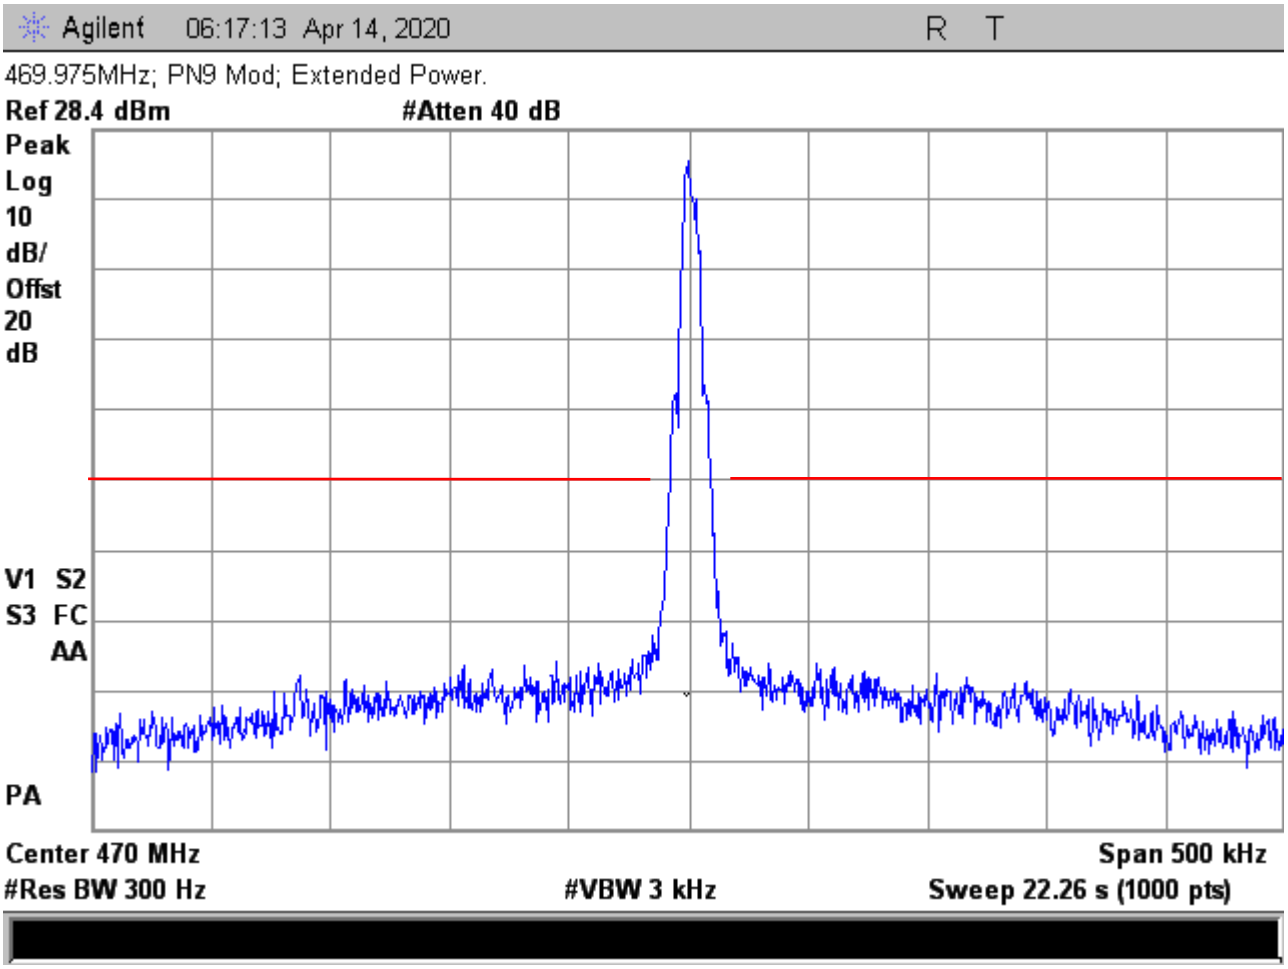

The red line is a 50-dB reduction from carrier based on 1 watt.

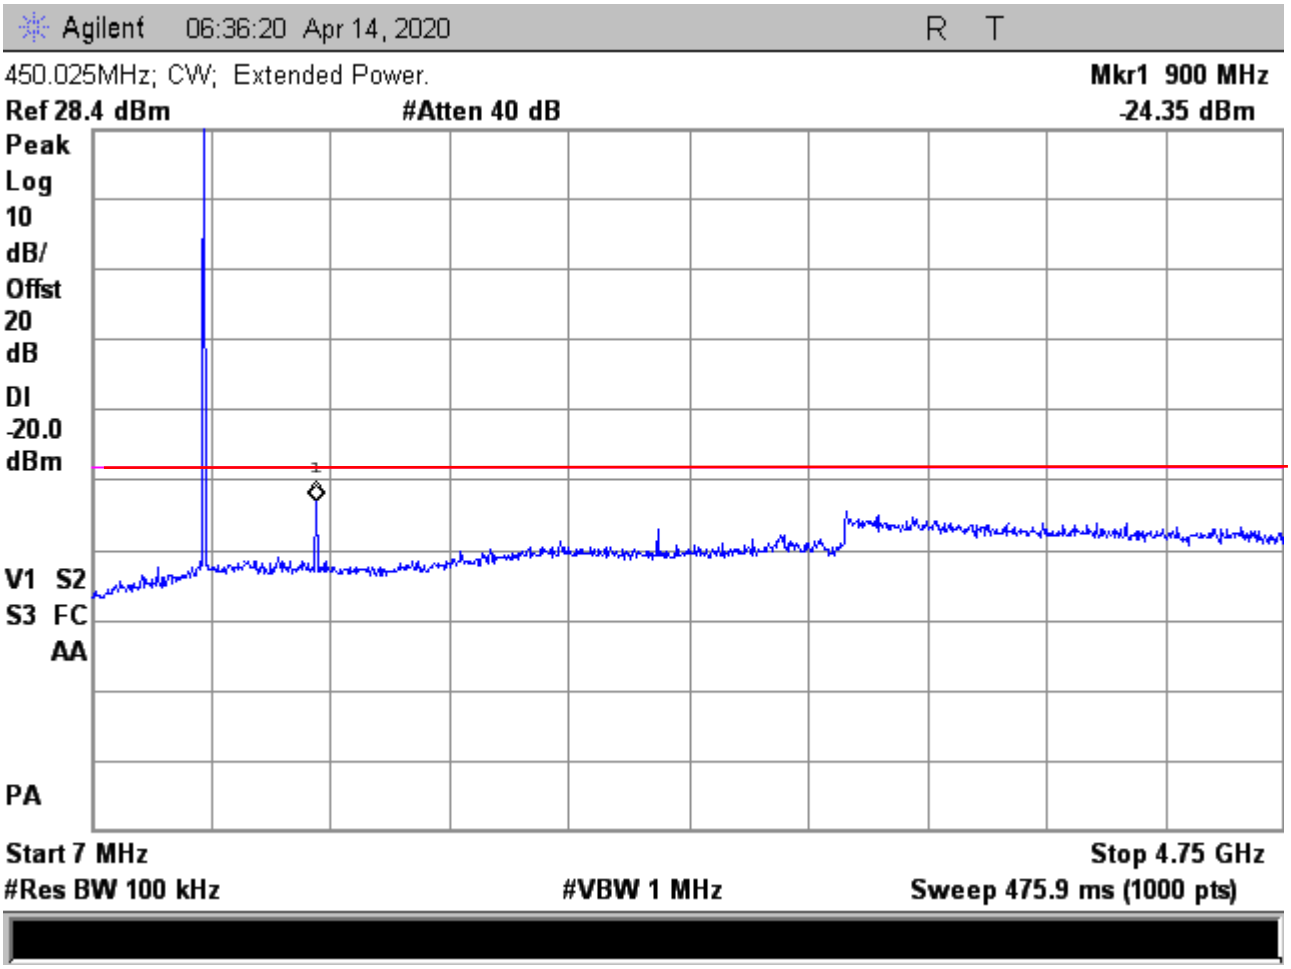
Agilent 06:36:20 Apr 14, 2020
R T
450.025MHz; CW; Extended Power.
Mkr1 900 MHz
Ref 28.4 dBm
#Atten 40 dB
-24.35 dBm
Peak
Log
10
dB/
Offst
20
dB
Dl
-20.0
dBm
V1 S2
S3 FC
AA
PA
Start 7 MHz
Stop 4.75 GHz
#Res BW 100 kHz
#VBW 1 MHz
Sweep 475.9 ms (1000 pts)

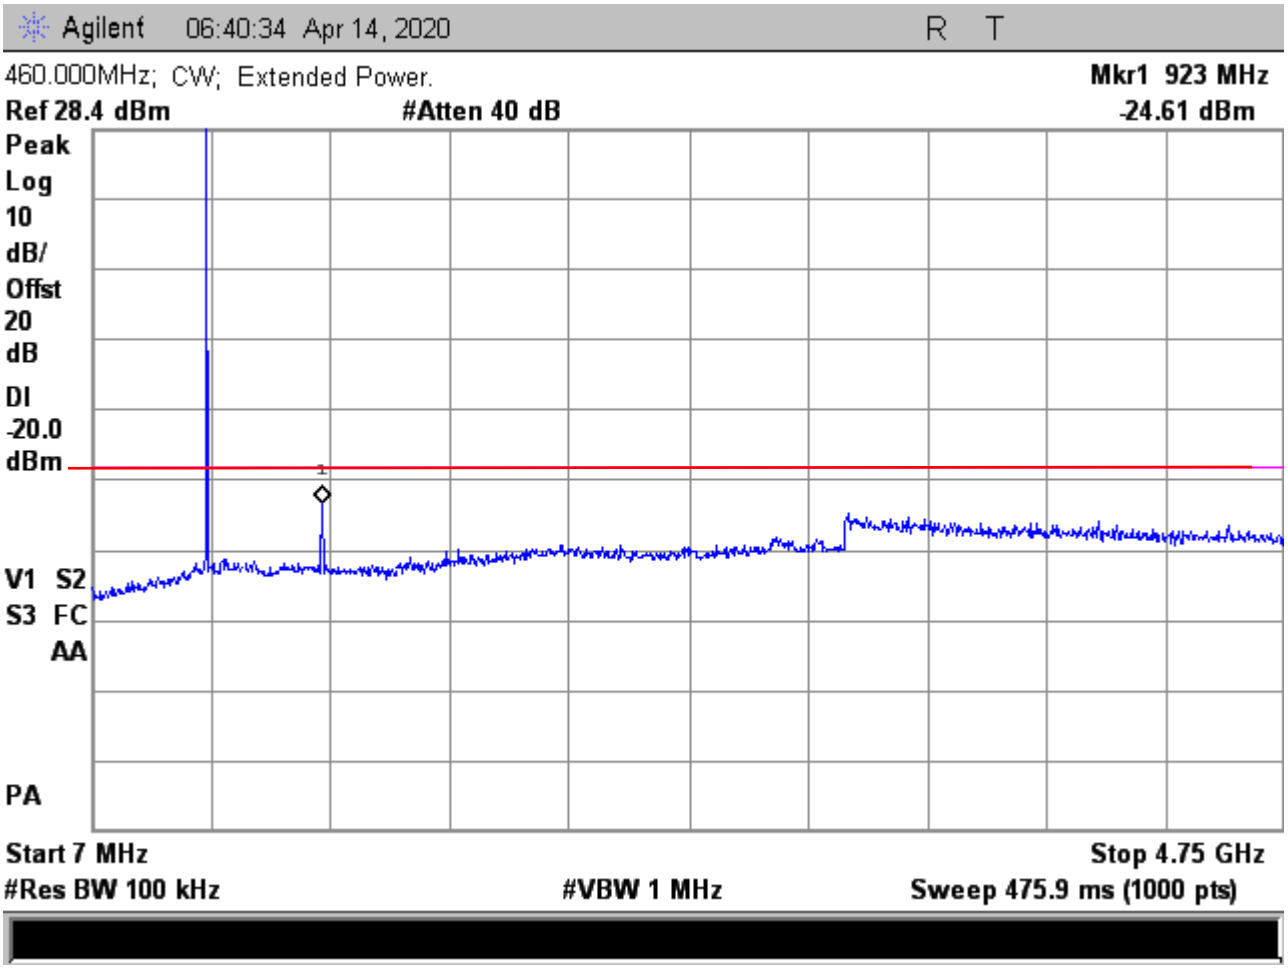
Agilent 06:40:34 Apr 14, 2020
R T
460.000MHz; CW; Extended Power.
Mkr1 923 MHz
Ref 28.4 dBm
#Atten 40 dB
-24.61 dBm
Peak
Log
10
dB/
Offst
20
dB
Dl
-20.0
dBm
V1 S2
S3 FC
AA
PA
Start 7 MHz
Stop 4.75 GHz
#Res BW 100 kHz
#VBW 1 MHz
Sweep 475.9 ms (1000 pts)

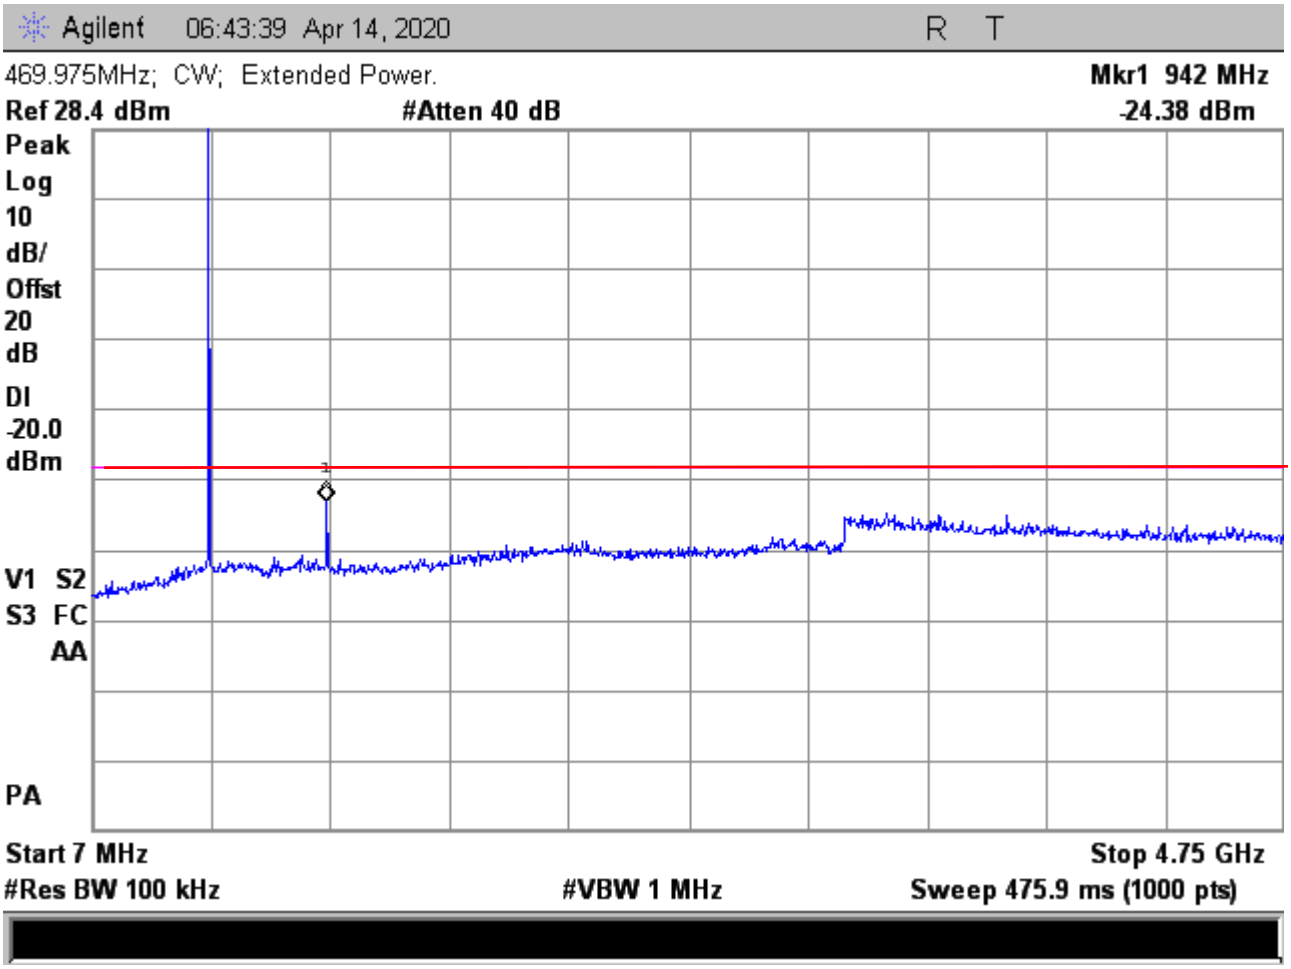
Agilent 06:43:39 Apr 14, 2020
R T
469.975MHz; CW; Extended Power.
Mkr1 942 MHz
Ref 28.4 dBm
#Atten 40 dB
-24.38 dBm
Peak
Log
10
dB/
Offst
20
dB
Dl
-20.0
dBm
V1 S2
S3 FC
AA
PA
Start 7 MHz
Stop 4.75 GHz
#Res BW 100 kHz
#VBW 1 MHz
Sweep 475.9 ms (1000 pts)

STANDARD POWER

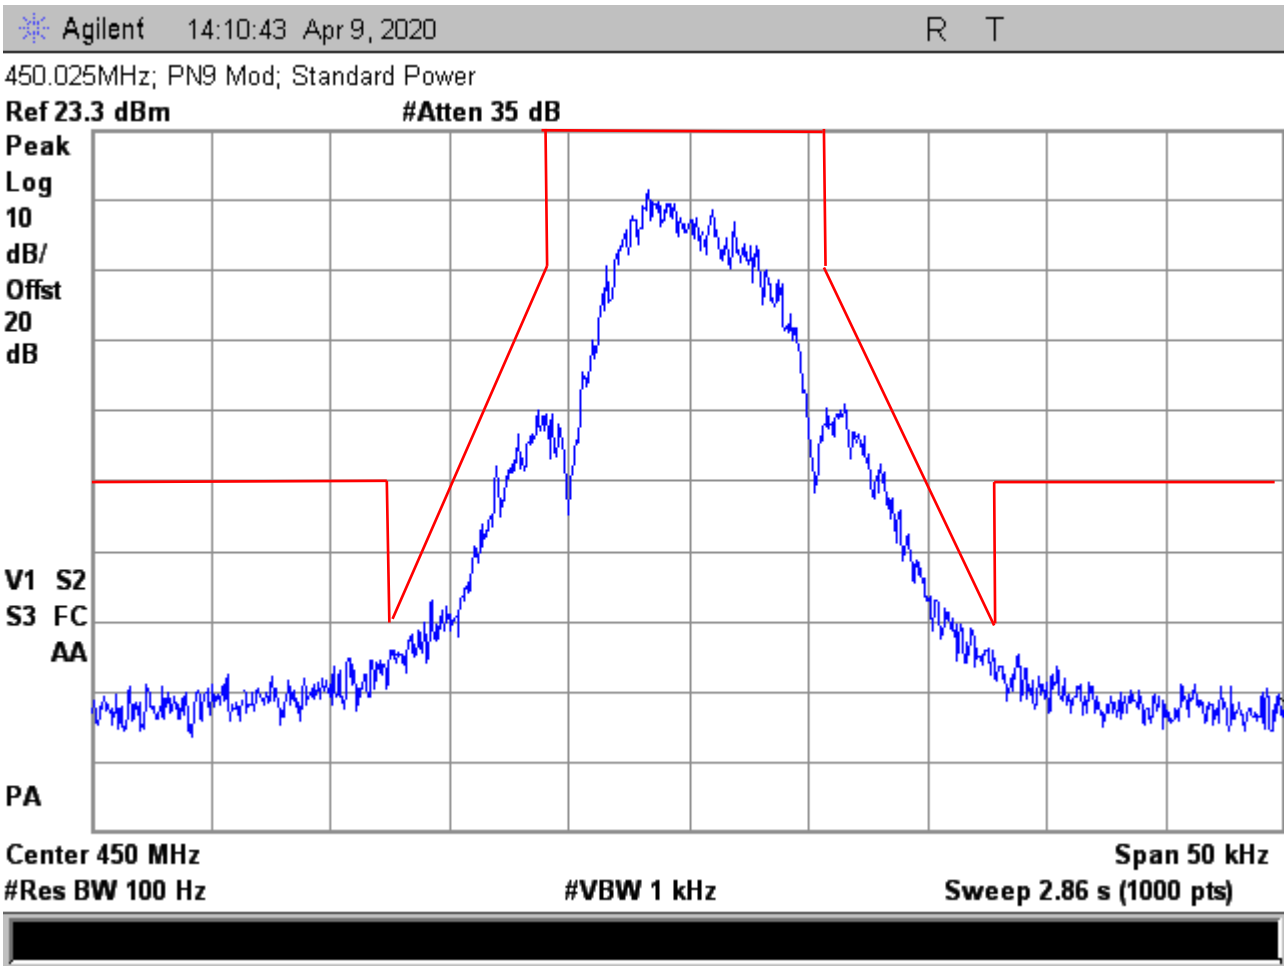

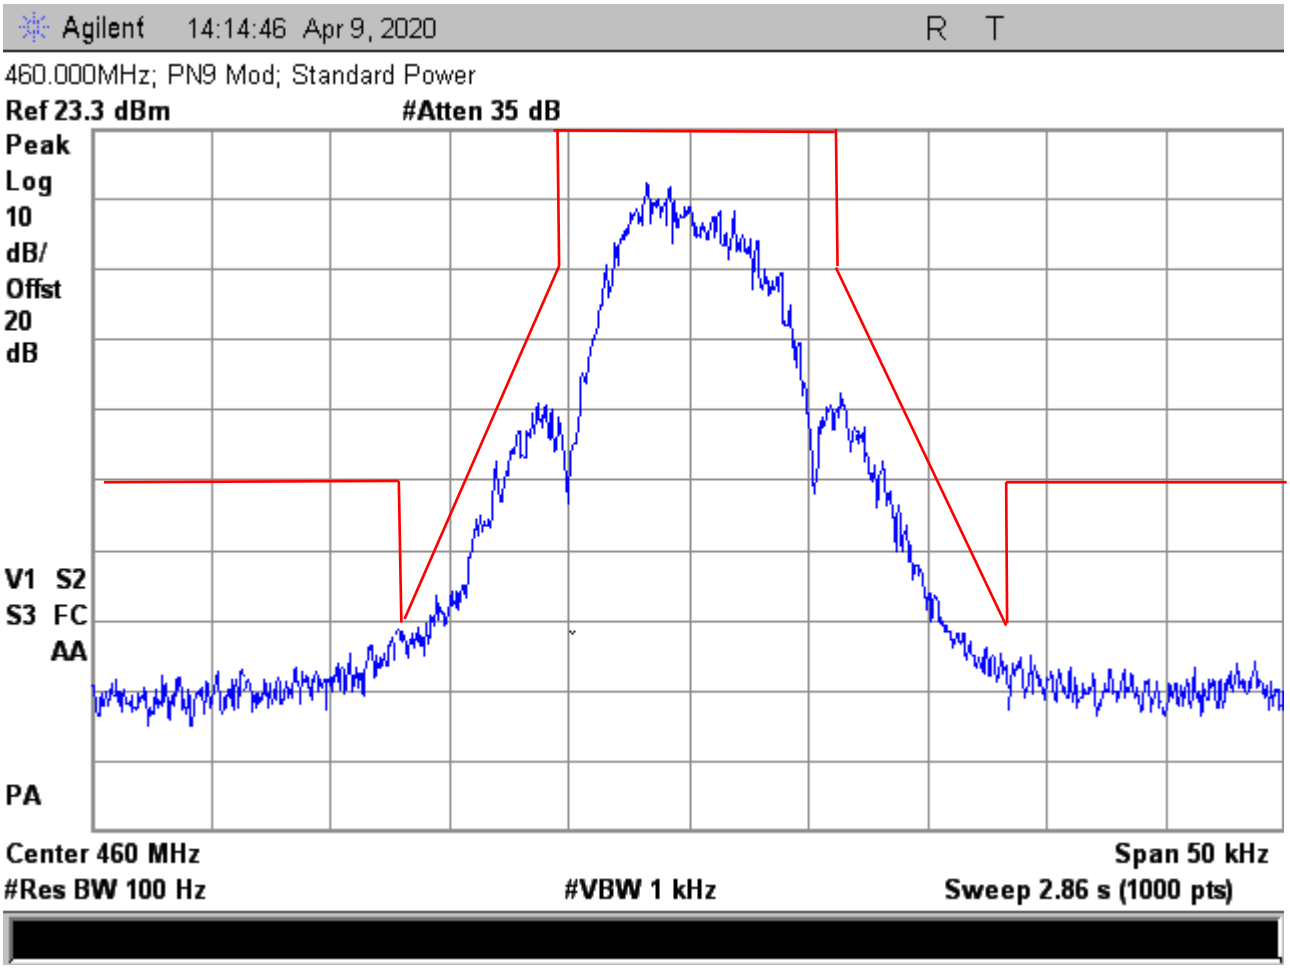
Agilent 14:14:46 Apr 9, 2020
R T
460.000MHz; PN9 Mod; Standard Power
Ref 23.3 dBm
#Atten 35 dB
Peak
Log
10
dB/
Offst
20
dB
V1 S2
S3 FC
AA
PA
Center 460 MHz
Span 50 kHz
#Res BW 100 Hz
#VBW 1 kHz
Sweep 2.86 s (1000 pts)

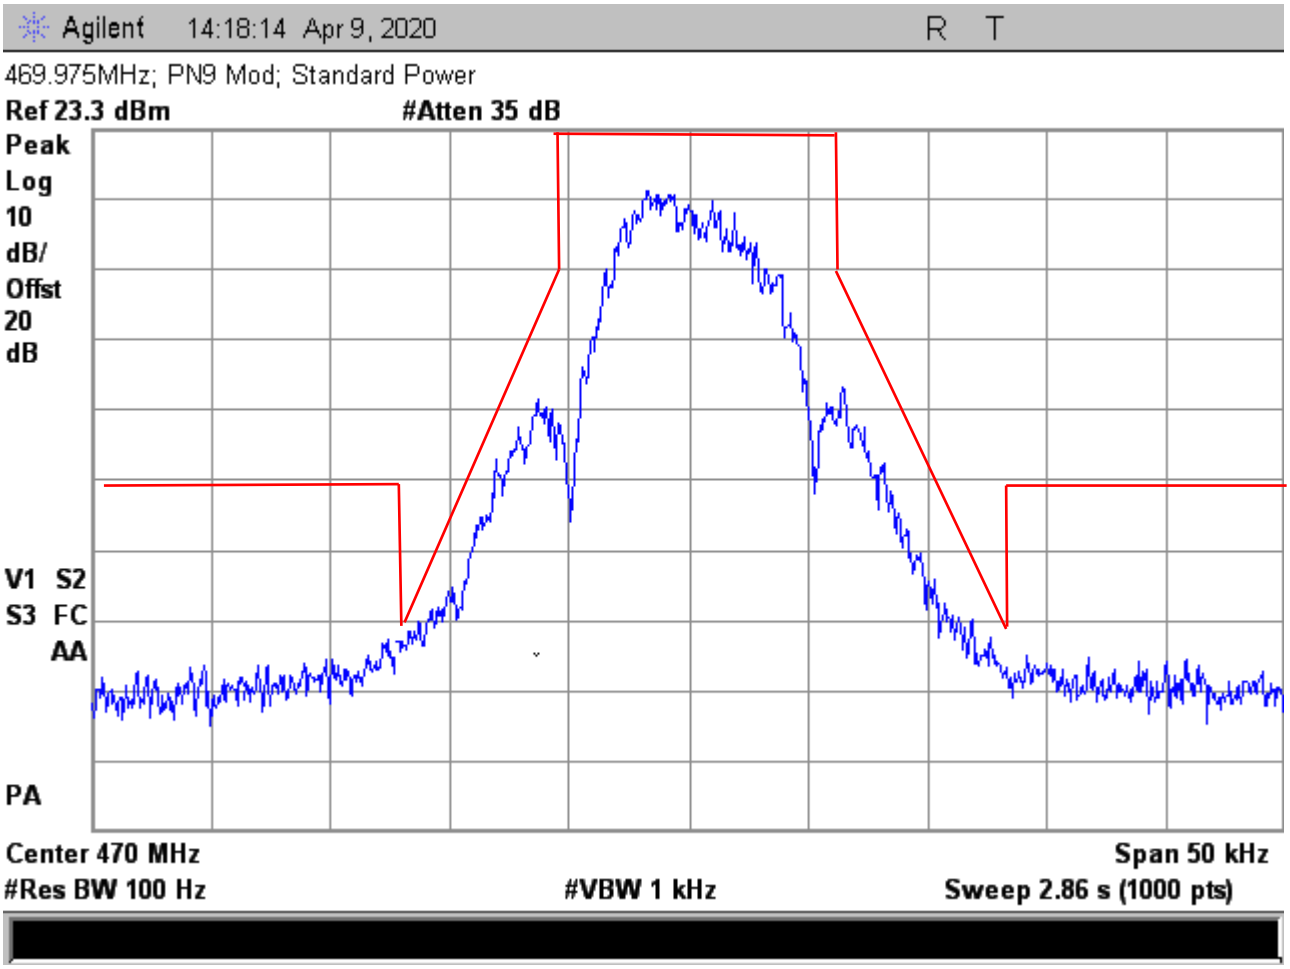
Agilent 14:18:14 Apr 9, 2020
R T
469.975MHz; PN9 Mod; Standard Power
Ref 23.3 dBm
#Atten 35 dB
Peak
Log
10
dB/
Offst
20
dB
V1 S2
S3 FC
AA
PA
Center 470 MHz
Span 50 kHz
#Res BW 100 Hz
#VBW 1 kHz
Sweep 2.86 s (1000 pts)

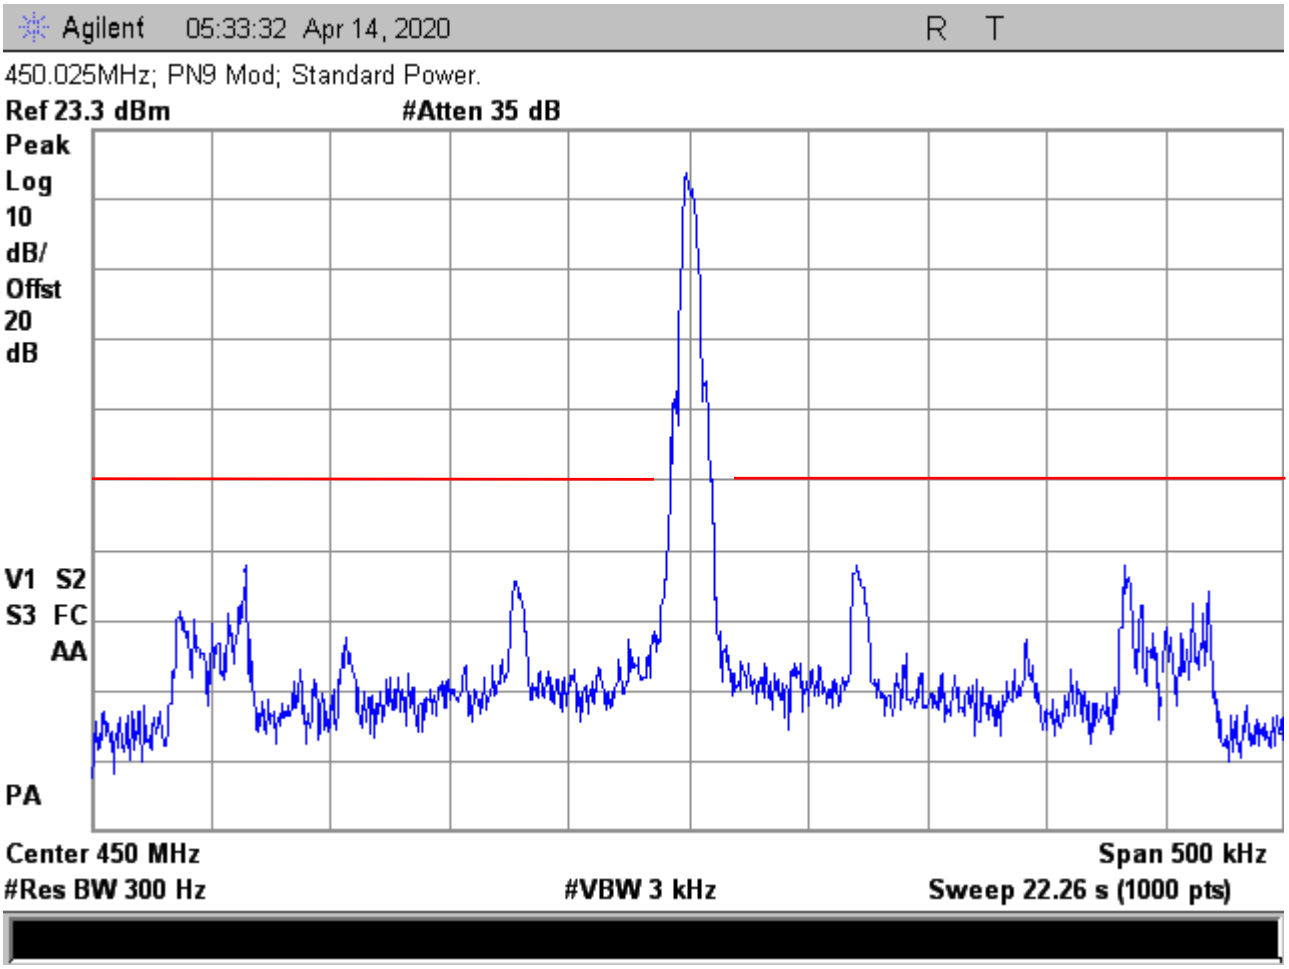
Agilent 05:33:32 Apr 14, 2020
R T
450.025MHz; PN9 Mod; Standard Power.
Ref 23.3 dBm
#Atten 35 dB
Peak
Log
10
dB/
Offst
20
dB
V1 S2
S3 FC
AA
PA
Center 450 MHz
Span 500 kHz
#Res BW 300 Hz
#VBW 3 kHz
Sweep 22.26 s (1000 pts)

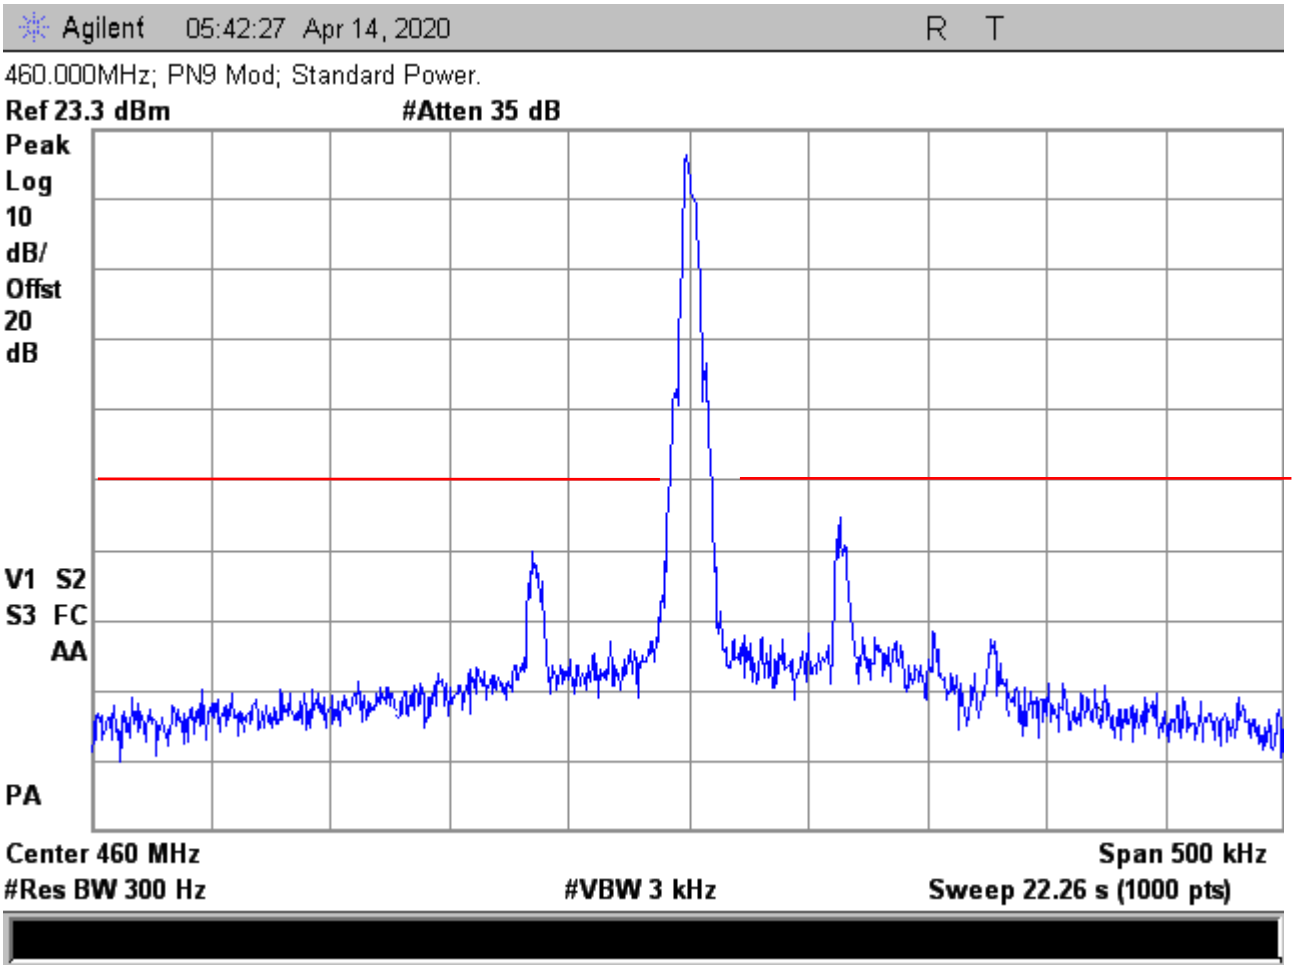
Agilent 05:42:27 Apr 14, 2020
R T
460.000MHz; PN9 Mod; Standard Power.
Ref 23.3 dBm
#Atten 35 dB
Peak
Log
10
dB/
Offst
20
dB
V1 S2
S3 FC
AA
PA
Center 460 MHz
Span 500 kHz
#Res BW 300 Hz
#VBW 3 kHz
Sweep 22.26 s (1000 pts)

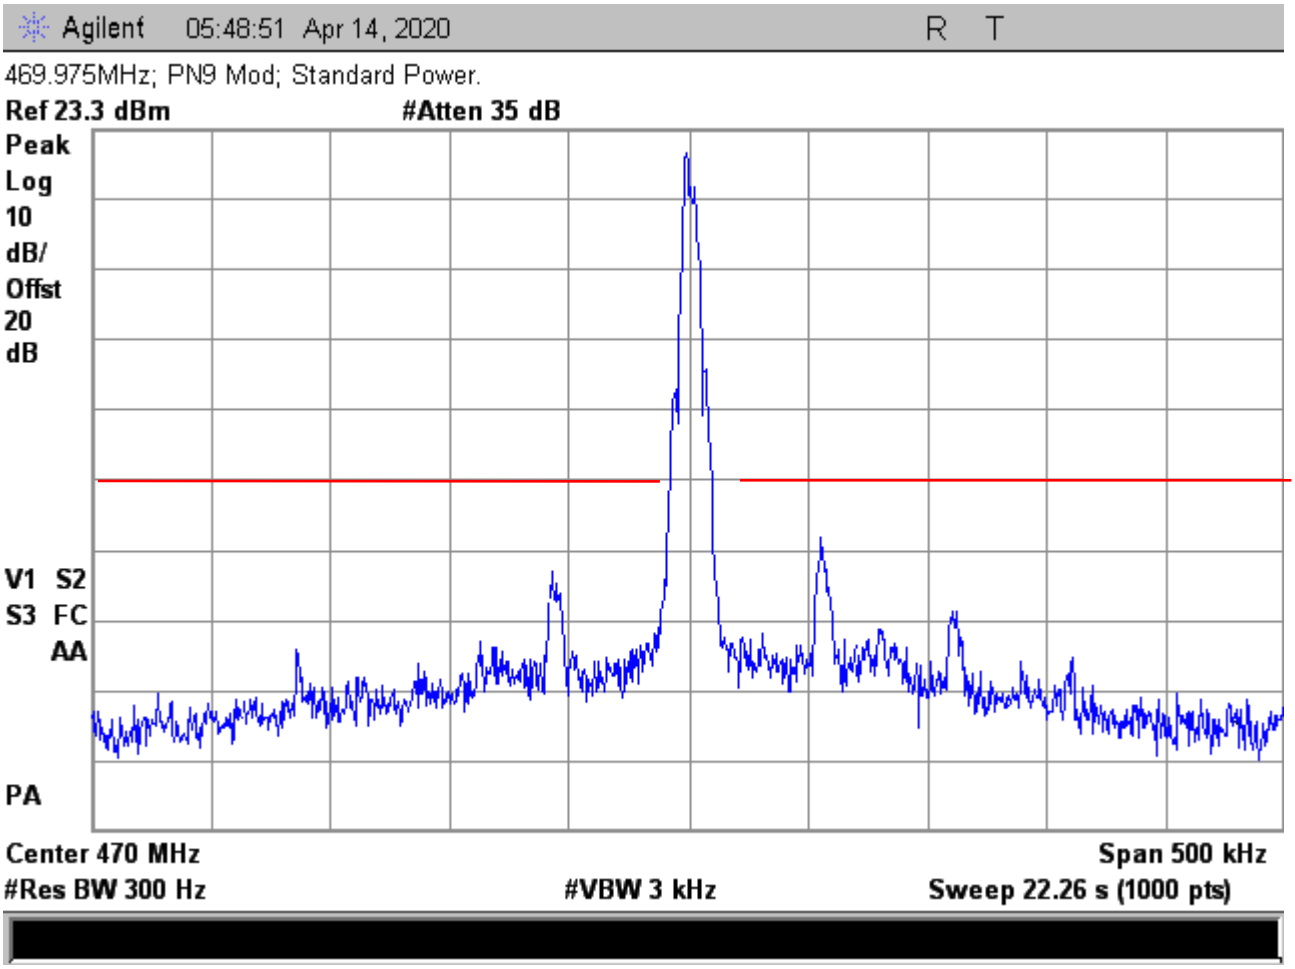
Agilent 05:48:51 Apr 14, 2020
R T
469.975MHz; PN9 Mod; Standard Power.
Ref 23.3 dBm
#Atten 35 dB
Peak
Log
10
dB/
Offst
20
dB
V1 S2
S3 FC
AA
PA
Center 470 MHz
Span 500 kHz
#Res BW 300 Hz
#VBW 3 kHz
Sweep 22.26 s (1000 pts)

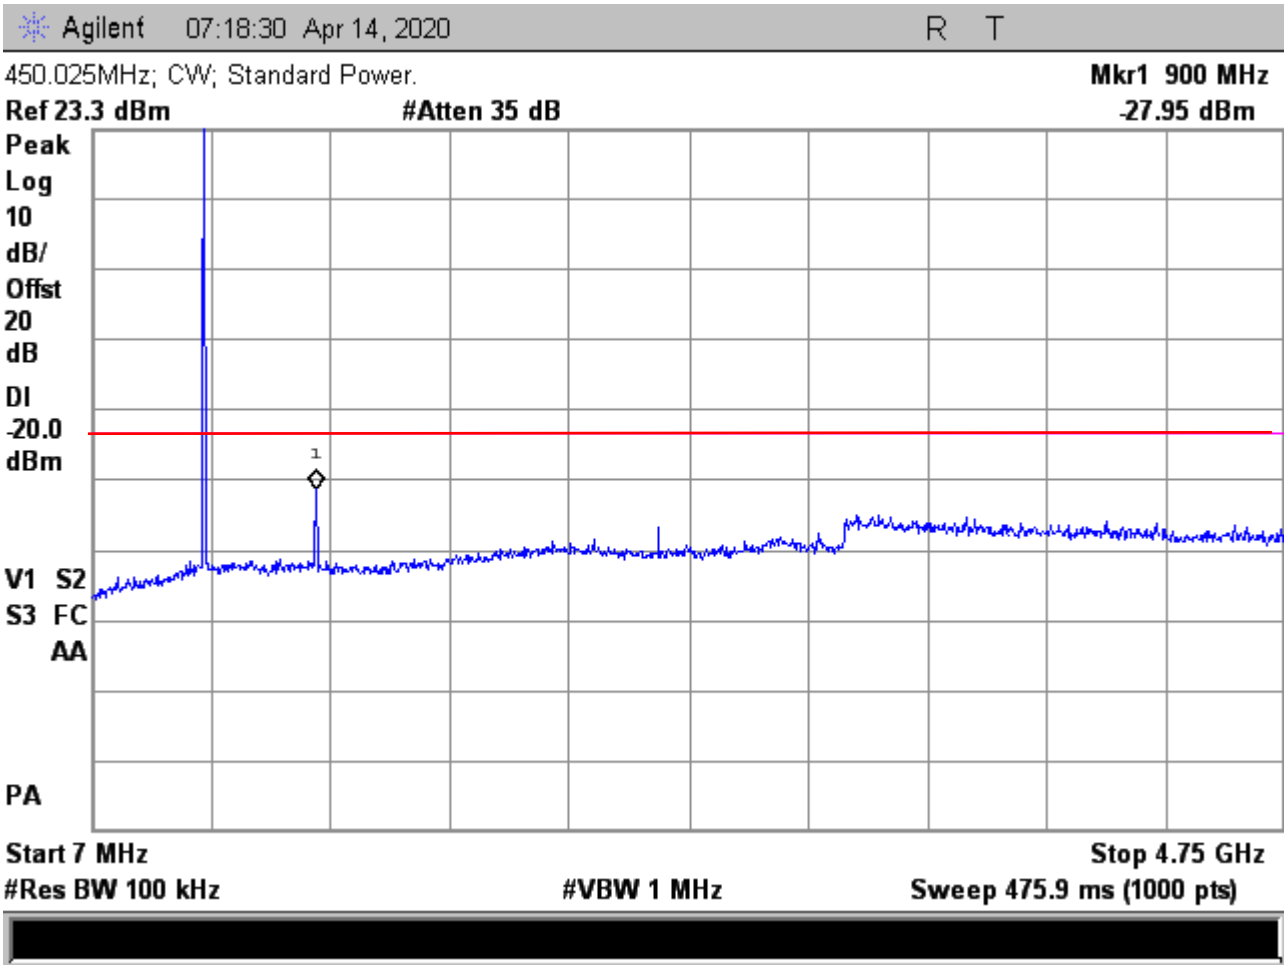
Agilent 07:18:30 Apr 14, 2020
R T
450.025MHz; CW; Standard Power.
Mkr1 900 MHz
Ref 23.3 dBm
#Atten 35 dB
-27.95 dBm
Peak
Log
10
dB/
Offst
20
dB
Dl
-20.0
dBm
1
V1 S2
S3 FC
AA
PA
Start 7 MHz
Stop 4.75 GHz
#Res BW 100 kHz
#VBW 1 MHz
Sweep 475.9 ms (1000 pts)

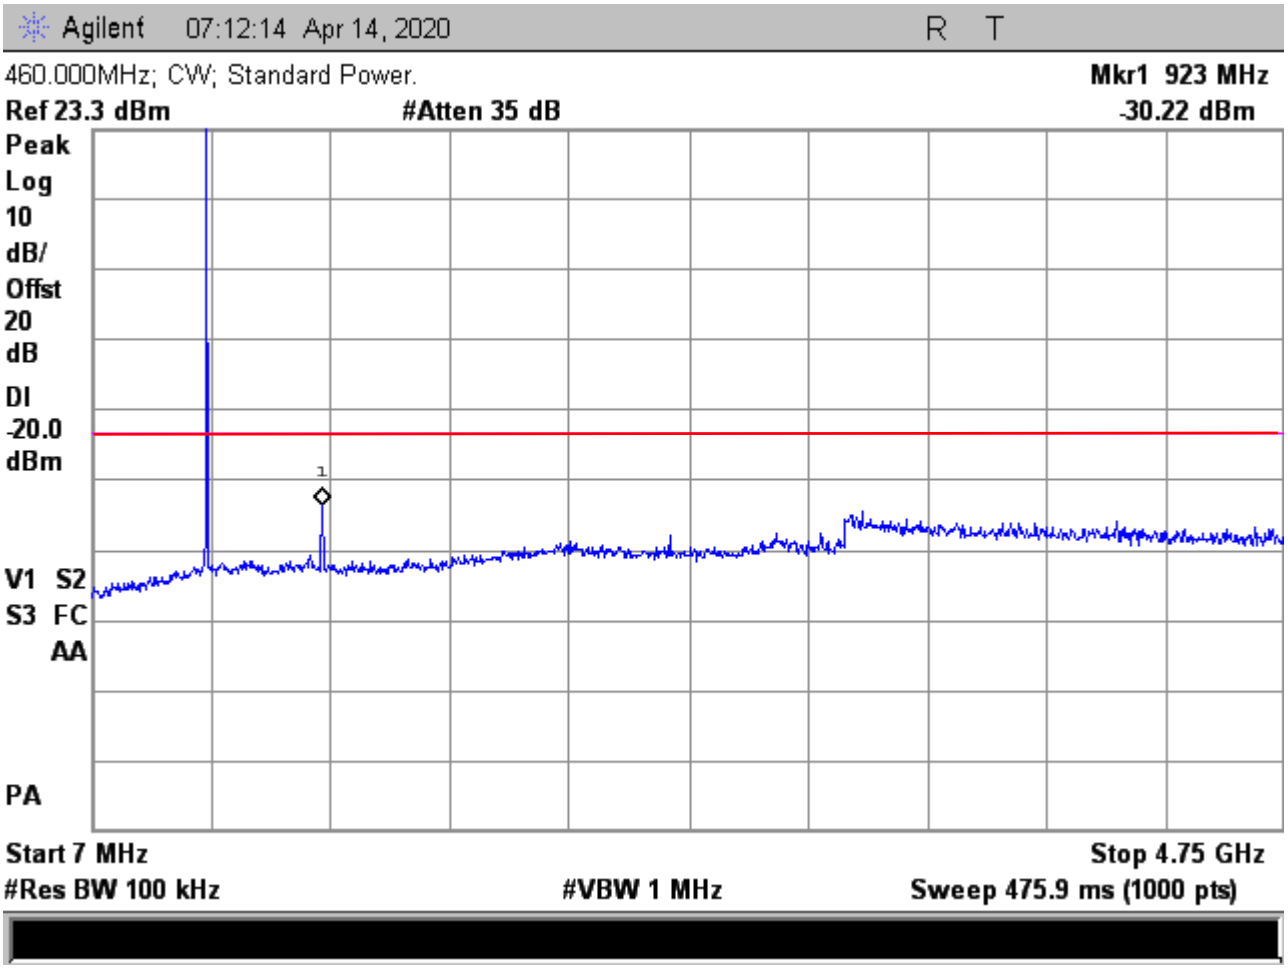
Agilent 07:12:14 Apr 14, 2020
R T
460.000MHz; CW; Standard Power.
Mkr1 923 MHz
Ref 23.3 dBm
#Atten 35 dB
-30.22 dBm
Peak
Log
10
dB/
Offst
20
dB
Dl
-20.0
dBm
V1 S2
S3 FC
AA
PA
Start 7 MHz
Stop 4.75 GHz
#Res BW 100 kHz
#VBW 1 MHz
Sweep 475.9 ms (1000 pts)

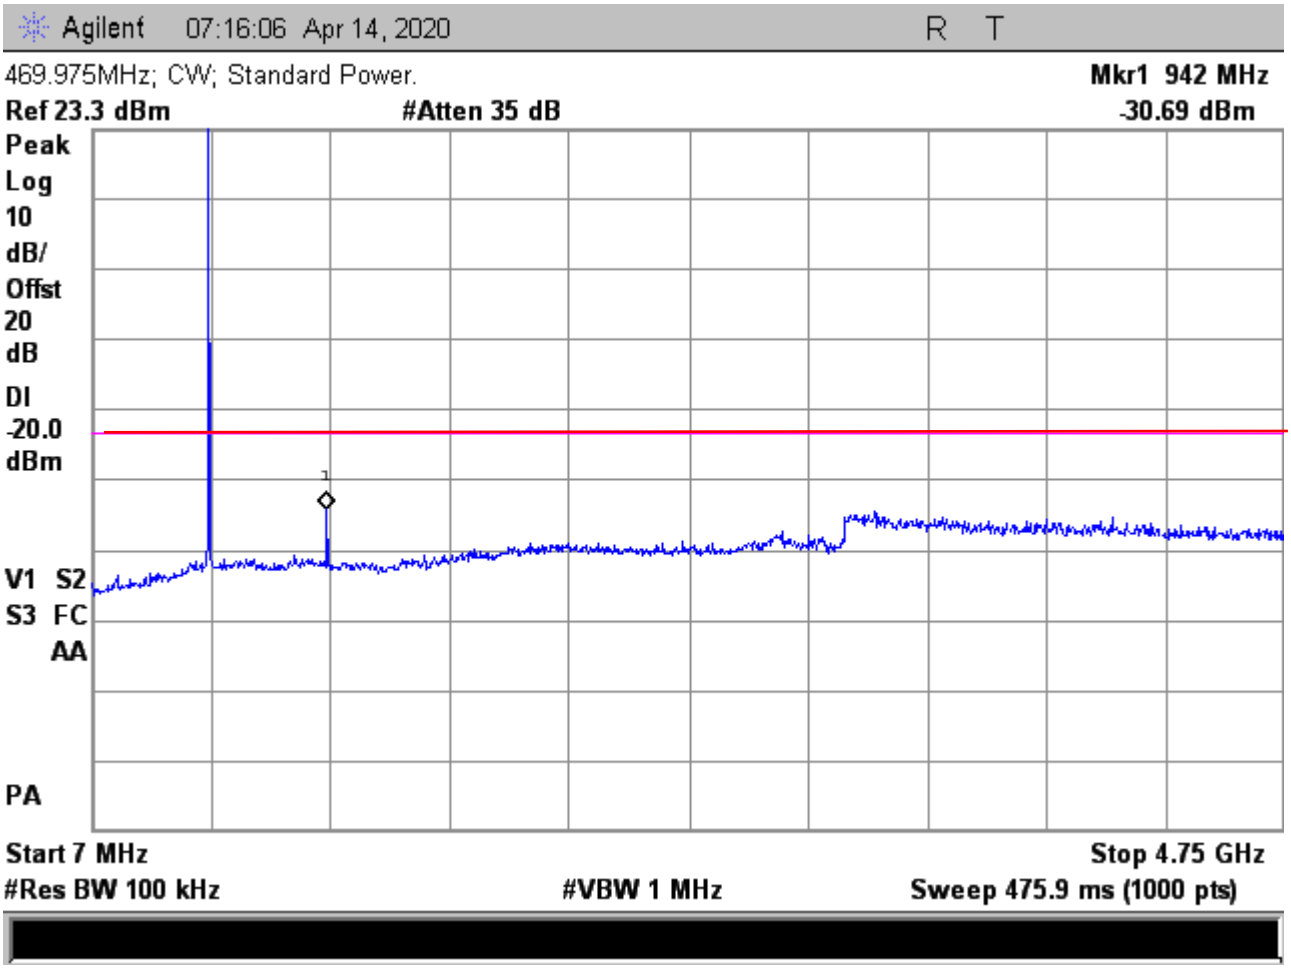

The red line is a 50-dB reduction from carrier based on 1 watt.

Judgement: Pass

10.2.1 Conducted Spurious Emissions

Model	2019-006	Specification	FCC Part 90.210 RSS-119 Section 5.5
Serial Number	2001990039	Test Date	04/09/2020
Test Personnel	Richard Tichgelaar	Test Location	Chamber B
Test Equipment	EMI Receiver (REC-21)		

This is a direct measurement from the Antenna port to the EMI Receiver

Standard Power

Freq. Tx	Harm	Tested Freq.	Rec Reading	HPF-09 Attn. Factor	Ext. Atten. Factor	Cable Loss	Total Power	Power Limit	Margin Under Limit
MHz	#	MHz	dBm	dB	dB	dB	dBm	dBm	dB
450.0250	1	450.0250	3.12	0.0	20.0	0.3	23.4	50.0	26.6
450.0250	2	900.0500	-56.60	0.4	19.9	0.4	-35.9	-20.0	15.9
450.0250	3	1350.0750	-70.30	0.4	19.9	0.4	-49.6	-20.0	29.6
450.0250	4	1800.1000	-72.75	0.4	19.9	0.5	-52.0	-20.0	32.0
450.0250	5	2250.1250	-55.60	0.5	19.9	0.6	-34.6	-20.0	14.6
450.0250	6	2700.1500	-71.72	0.6	19.9	0.6	-50.6	-20.0	30.6
450.0250	7	3150.1750	-73.02	0.5	19.9	0.7	-51.9	-20.0	31.9
450.0250	8	3600.2000	-73.30	0.8	19.9	0.8	-51.8	-20.0	31.8
450.0250	9	4050.2250	-74.01	1.0	19.9	0.8	-52.3	-20.0	32.3
450.0250	10	4500.2500	-73.00	1.0	19.9	0.8	-51.3	-20.0	31.3
460.0000	1	460.0000	3.24	0.0	20.0	0.3	23.5	50.0	26.5
460.0000	2	920.0000	-63.00	0.4	19.9	0.4	-42.3	-20.0	22.3
460.0000	3	1380.0000	-71.20	0.4	19.9	0.4	-50.5	-20.0	30.5
460.0000	4	1840.0000	-66.20	0.4	19.9	0.5	-45.4	-20.0	25.4
460.0000	5	2300.0000	-57.90	0.5	19.9	0.6	-36.9	-20.0	16.9
460.0000	6	2760.0000	-69.90	0.6	19.9	0.6	-48.8	-20.0	28.8
460.0000	7	3220.0000	-73.90	0.5	19.9	0.7	-52.8	-20.0	32.8
460.0000	8	3680.0000	-70.00	0.8	19.9	0.8	-48.5	-20.0	28.5
460.0000	9	4140.0000	-69.80	1.0	19.9	0.8	-48.1	-20.0	28.1
460.0000	10	4600.0000	-72.00	1.0	19.9	0.8	-50.3	-20.0	30.3
469.9750	1	469.9750	3.40	0.0	20.0	0.3	23.7	50.0	26.3
469.9750	2	939.9500	-60.00	0.4	19.9	0.4	-39.3	-20.0	19.3
469.9750	3	1409.9250	-70.00	0.4	19.9	0.4	-49.3	-20.0	29.3
469.9750	4	1879.9000	-63.70	0.4	19.9	0.5	-42.9	-20.0	22.9
469.9750	5	2349.8750	-61.50	0.5	19.9	0.6	-40.5	-20.0	20.5
469.9750	6	2819.8500	-70.00	0.6	19.9	0.6	-48.9	-20.0	28.9
469.9750	7	3289.8250	-72.50	0.5	19.9	0.7	-51.4	-20.0	31.4
469.9750	8	3759.8000	-66.30	0.8	19.9	0.8	-44.8	-20.0	24.8
469.9750	9	4229.7750	-70.50	1.0	19.9	0.8	-48.8	-20.0	28.8
469.9750	10	4699.7500	-70.60	1.0	19.9	0.8	-48.9	-20.0	28.9

Extended Power

Freq. Tx	Harm	Tested Freq.	Rec Reading	HPF-09 Attn. Factor	Ext. Atten. Factor	Cable Loss	Total Power	Power Limit	Margin Under Limit
MHz	#	MHz	dBm	dB	dB	dB	dBm	dBm	dB
450.0250	1	450.0250	8.7	0.0	20.0	0.3	29.0	50.0	21.1
450.0250	2	900.0500	-57.2	0.4	19.9	0.4	-36.5	-20.0	16.5
450.0250	3	1350.0750	-67.1	0.4	19.9	0.4	-46.4	-20.0	26.4
450.0250	4	1800.1000	-65.2	0.4	19.9	0.5	-44.4	-20.0	24.4
450.0250	5	2250.1250	-53.8	0.5	19.9	0.6	-32.8	-20.0	12.8
450.0250	6	2700.1500	-69.6	0.6	19.9	0.6	-48.5	-20.0	28.5
450.0250	7	3150.1750	-70.8	0.5	19.9	0.7	-49.7	-20.0	29.7
450.0250	8	3600.2000	-67.6	0.8	19.9	0.8	-46.1	-20.0	26.1
450.0250	9	4050.2250	-67.0	1.0	19.9	0.8	-45.3	-20.0	25.3
450.0250	10	4500.2500	-71.2	1.0	19.9	0.8	-49.5	-20.0	29.5
460.0000	1	460.0000	8.6	0.0	20.0	0.3	28.9	50.0	21.1
460.0000	2	920.0000	-60.7	0.4	19.9	0.4	-40.0	-20.0	20.0
460.0000	3	1380.0000	-67.6	0.4	19.9	0.4	-46.9	-20.0	26.9
460.0000	4	1840.0000	-63.8	0.4	19.9	0.5	-43.0	-20.0	23.0
460.0000	5	2300.0000	-56.7	0.5	19.9	0.6	-35.7	-20.0	15.7
460.0000	6	2760.0000	-69.2	0.6	19.9	0.6	-48.1	-20.0	28.1
460.0000	7	3220.0000	-72.8	0.5	19.9	0.7	-51.7	-20.0	31.7
460.0000	8	3680.0000	-68.0	0.8	19.9	0.8	-46.5	-20.0	26.5
460.0000	9	4140.0000	-66.2	1.0	19.9	0.8	-44.5	-20.0	24.5
460.0000	10	4600.0000	-72.0	1.0	19.9	0.8	-50.3	-20.0	30.3
469.9750	1	469.9750	8.6	0.0	20.0	0.3	28.9	50.0	21.1
469.9750	2	939.9500	-57.9	0.4	19.9	0.4	-37.2	-20.0	17.2
469.9750	3	1409.9250	-65.6	0.4	19.9	0.4	-44.9	-20.0	24.9
469.9750	4	1879.9000	-61.3	0.4	19.9	0.5	-40.5	-20.0	20.5
469.9750	5	2349.8750	-61.2	0.5	19.9	0.6	-40.2	-20.0	20.2
469.9750	6	2819.8500	-70.1	0.6	19.9	0.6	-49.0	-20.0	29.0
469.9750	7	3289.8250	-70.3	0.5	19.9	0.7	-49.2	-20.0	29.2
469.9750	8	3759.8000	-71.0	0.8	19.9	0.8	-49.5	-20.0	29.5
469.9750	9	4229.7750	-68.0	1.0	19.9	0.8	-46.3	-20.0	26.3
469.9750	10	4699.7500	-74.2	1.0	19.9	0.8	-52.5	-20.0	32.5

The fundamental emission ERP limit is 100 watts (50 dBm) for an 8 km service area radius.

Judgment: Passed by at least 10 dB.

10.3 Occupied Bandwidth

	99% OBW (kHz)	
Channel	Standard Power	Extended Power
450.0250	7.38	7.40
460.0000	7.42	7.36
469.9875	7.40	7.40

99% OBW: 450.025 MHz Extended Power

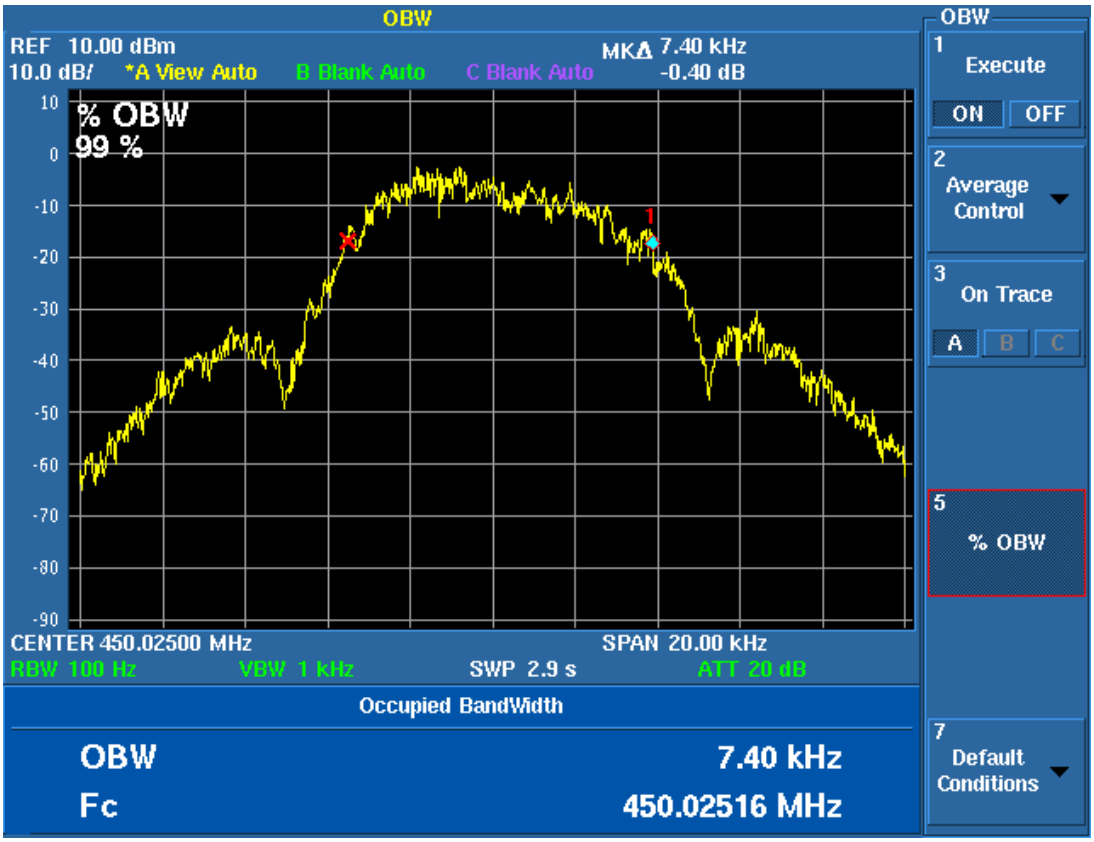

99% OBW: 450.025 MHz Standard Power

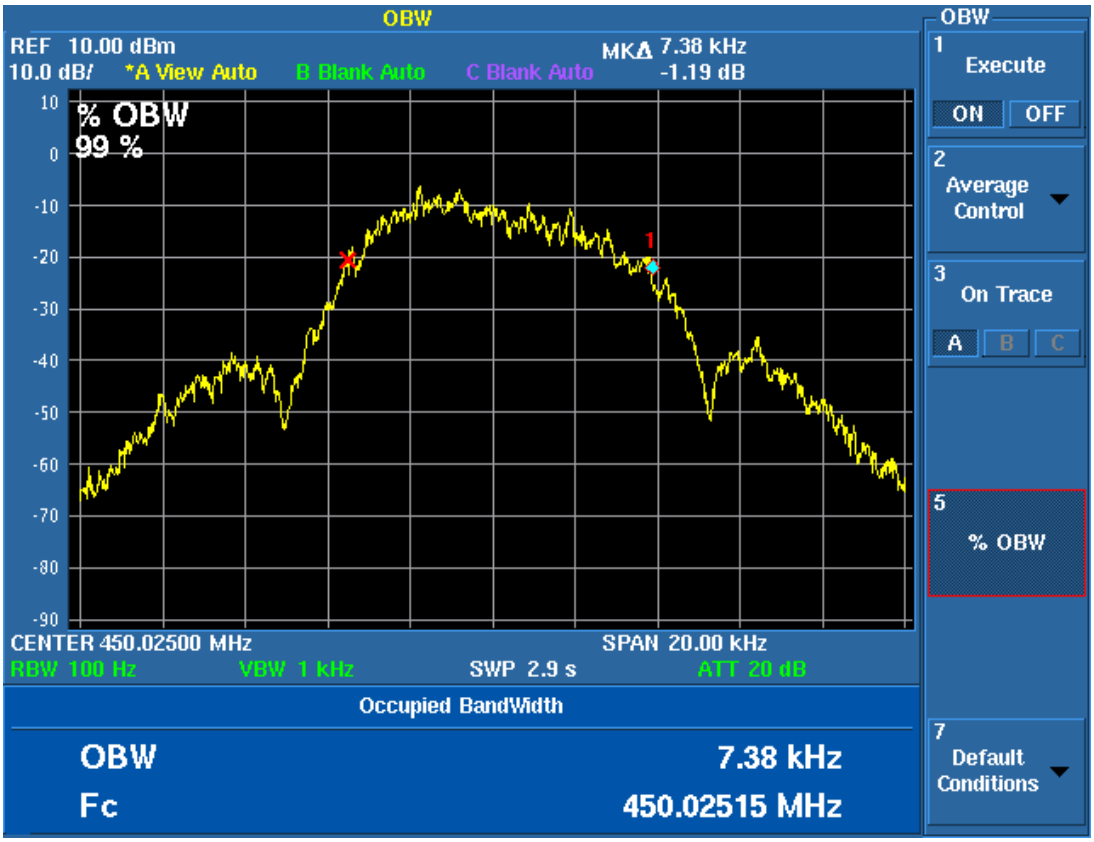

99% OBW 460 MHz; Extended Power

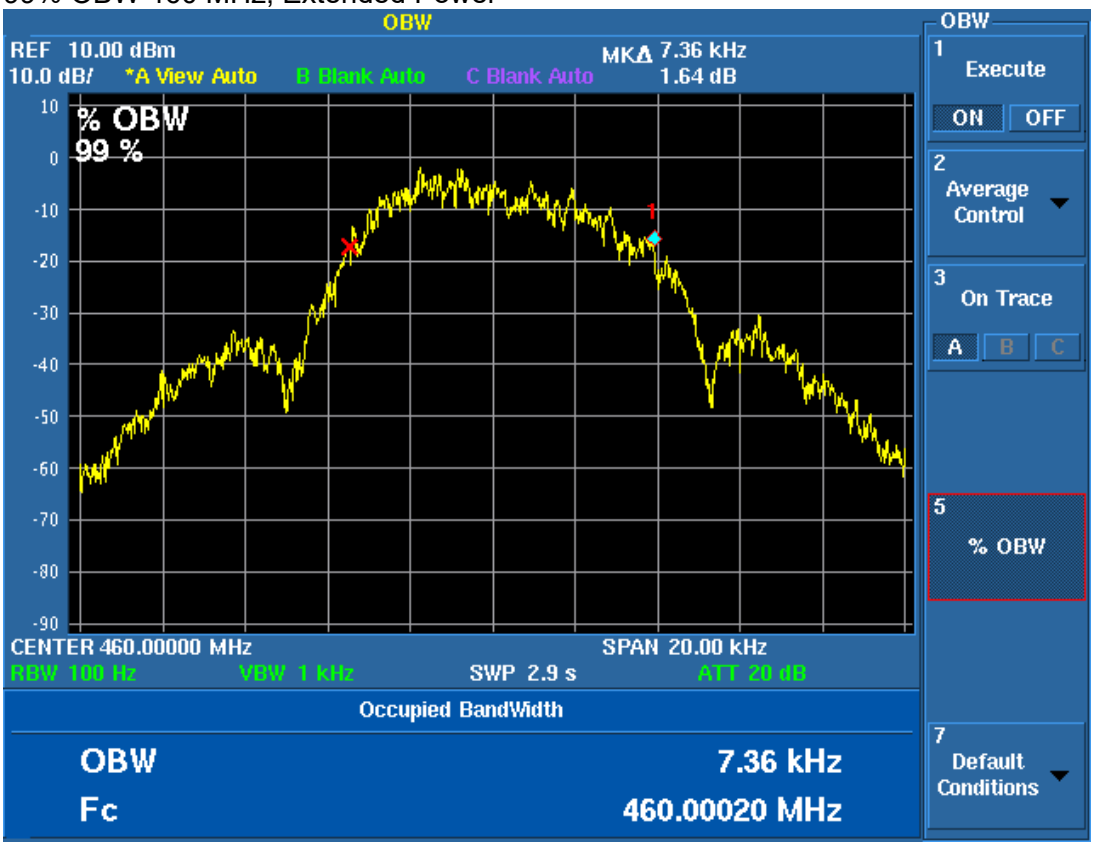

99% OBW 460 MHz; Standard Power

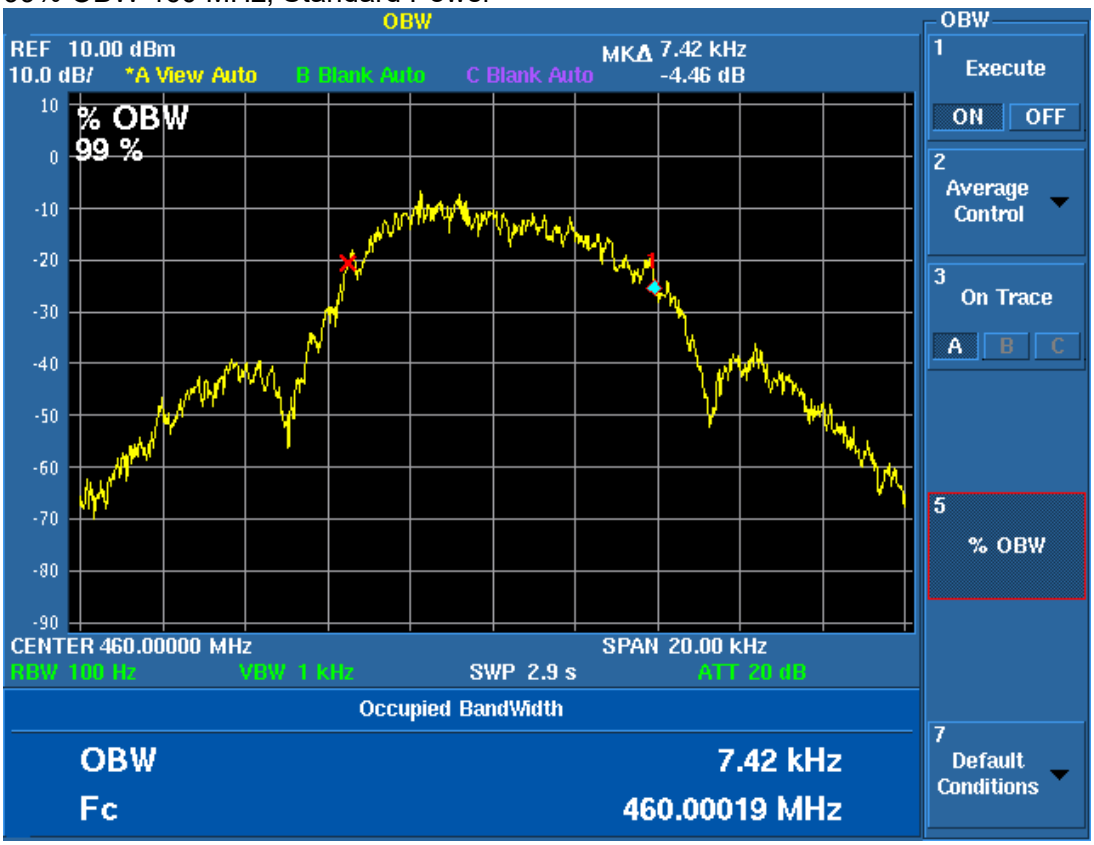

99% OBW 470 MHz; Extended Power

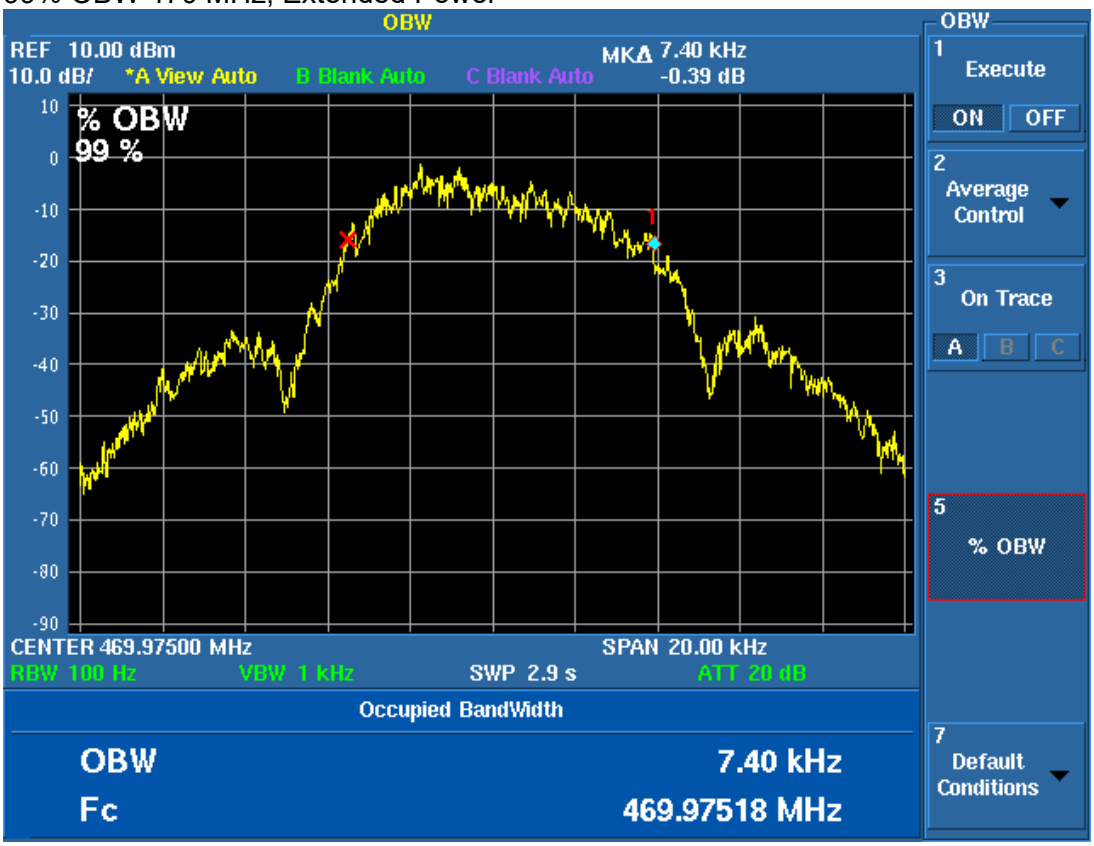

99% OBW 470 MHz; Standard Power

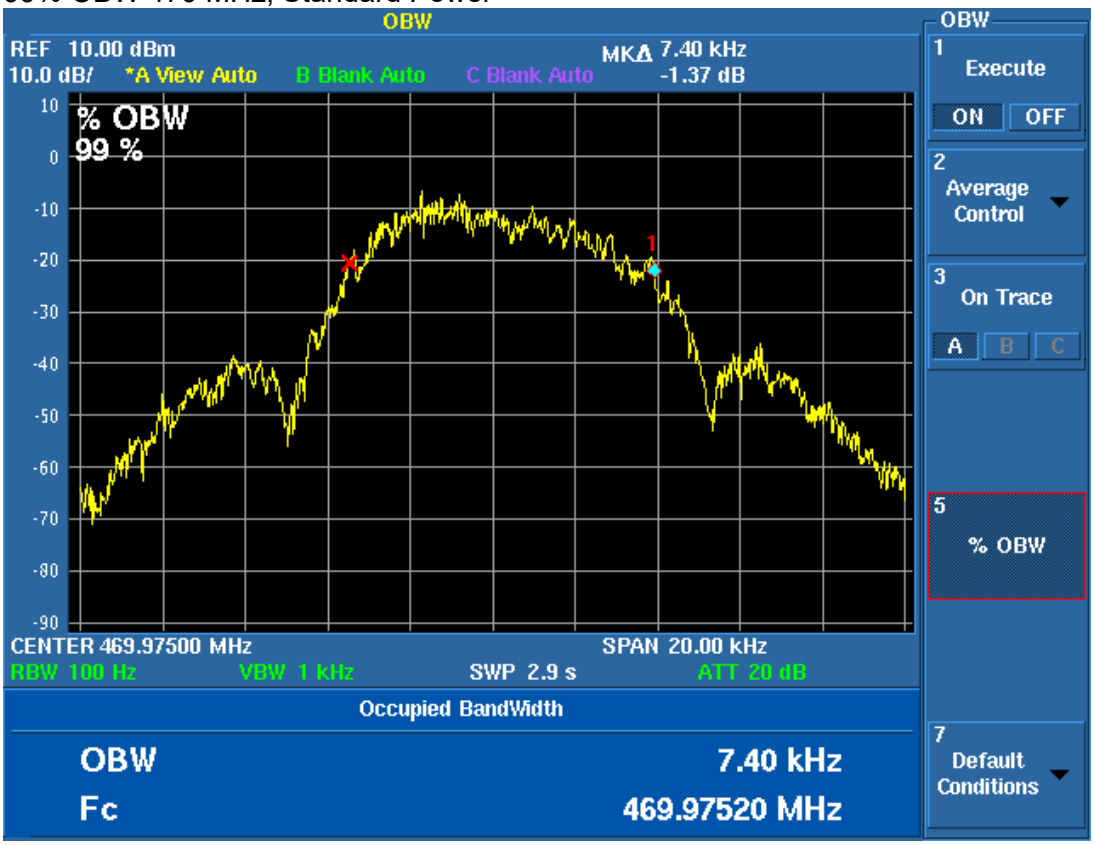

10.4 Field Strength of Unwanted Spurious Radiation

10.4.1 Test Procedures

Radiated emission measurements in the Restricted bands were performed with linearly polarized broadband antennas. The results obtained with these antennas can be correlated with results obtained with a tuned dipole antenna. A 10 dB linearity check is performed prior to start of testing in order to determine if an overload condition exists. From 30 to 4700 MHz, a spectrum analyzer with a preselector was used for measurement. Radiated emissions measurements were performed at the anechoic chamber at a test distance of 3 meters. The entire frequency range from 30 to 4700 MHz was slowly scanned and the emissions in the restricted frequency bands were recorded. Measurements were performed using the peak detector function.

The spectrum analyzer was adjusted for the following settings:

1) Resolution Bandwidth = 100 kHz for spurious emissions below 1 GHz, and 1 MHz for spurious emissions above 1GHz.
2) Video Bandwidth = 300 kHz for spurious emissions below 1 GHz, and 3 MHz for spurious emissions above 1 GHz.
3) Sweep Speed slow enough to maintain measurement calibration.
4) Detector Mode = Positive Peak.

The transmitter to be tested was placed on the turntable in the standard test site, or an FCC listed site compliant with ANSI C63.4. The transmitter is transmitting into a non-radiating load that is placed on the turntable. Measurements were made from the lowest radio frequency generated in the equipment to the tenth harmonic of the carrier. The transmitter was keyed during the tests.

For each spurious frequency, the test antenna was raised and lowered from 1 m to 4m to obtain a maximum reading on the spectrum analyzer with the test antenna at horizontal polarity. Then the turntable was rotated 360°to determine the maximum reading. This procedure was repeated to obtain the highest possible reading. This maximum reading was recorded.

Each measurement was repeated for each spurious frequency with the test antenna polarized vertically.

Figure 1. Drawing of Radiated Emissions Setup

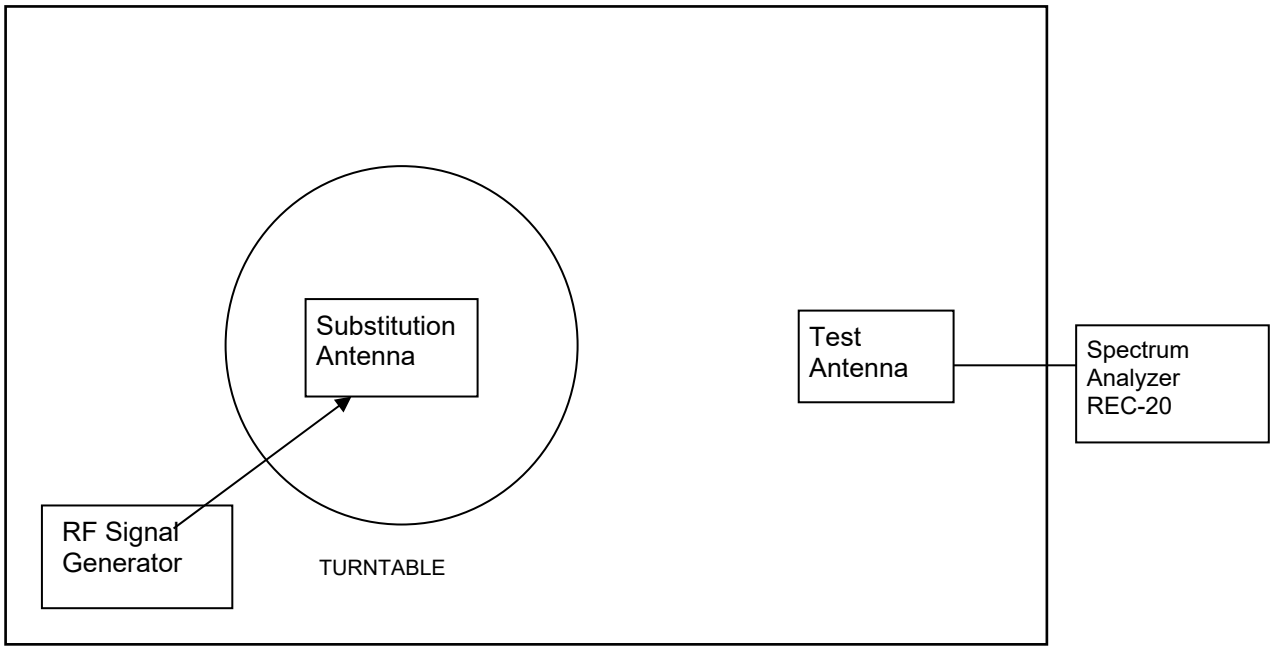

ANSI C63.4 Listed Test Site

Notes:
- Test Antenna height varied from 1 to 4 meters
- Distance from antenna to tested system is 3 meters
- Not to Scale

Frequency MHz	Test Antenna	Substitution Antenna	Receiver to Coupler	Signal Generator
30 - 200	ANT-80	ANT-79	REC-20	SIG-31
200 - 1000	ANT-68	ANT-06	REC-20	SIG-31
1000-5000	ANT-36	ANT-13	REC-20	SIG-31

The transmitter was removed and replaced with a broadband substitution antenna. The substitution antenna is calibrated so that the gain relative to a dipole is known. The center of the substitution antenna was approximately at the same location as the center of the transmitter.

The substitution antenna was fed at the transmitter end with a signal generator connected to the antenna by means of a non-radiating cable. With the antennas at both ends horizontally polarized, and with the signal generator tuned to a particular spurious frequency, the test antenna was raised and lowered to obtain a maximum reading at the spectrum analyzer. The level of the signal generator output was adjusted until the previously recorded maximum reading for this set of conditions was obtained.

The measurements were repeated with both antennas horizontally and vertically polarized for each spurious frequency.

The power in dBm into a reference ideal half-wave dipole antenna was calculated by reducing the readings obtained in steps k) and l) by the power loss in the cable between the generator and the antenna, and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna by the following formula:
Pd(dBm) = *Pg*(dBm) – *cable loss* (dB) + *antenna gain* (dB)
where:
Pd is the dipole equivalent power and
Pg is the generator output power into the substitution antenna.
The *Pd* levels record in step m) are the absolute levels of radiated spurious emissions in dBm.

Any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 12.5 kHz: At least 50 + 10 log (P) dB.

Since by mathematical definition, P(dBm) – (50+10xLOG P(W)) = -20 dBm, the limit for spurious emissions was set to -20 dBm equivalent radiated power.

10.4.2 Spurious Radiated Emissions Test Results

Model	2019-006	Specification	FCC Part 90.210 RSS-119 Section 5.8
Serial Number	2001990037	Test Date	08/14/2020
Test Distance	3 Meters	Notes	Transmit Mode; Extended Range
Test Personnel	Richard Tichgelaar		

	Tx	Measured	Equivalent Radiated power into Dipole			Margin Under Limit	
Harmonic	Freq	Freq	Vertical	Horizontal	Limit	Vertical	Horizontal
#	MHz	MHz	dBm	dBm	dBm	dB	dB
2	450.0250	900.05	-38.4	-47.2	-20.0	18.4	27.2
3	450.0250	1350.08	-61.5	-68.5	-20.0	41.5	48.5
4	450.0250	1800.10	-67.7	-70.0	-20.0	47.7	50.0
5	450.0250	2250.13	-65.7	-64.6	-20.0	45.7	44.6
6	450.0250	2700.15	-71.6	-70.2	-20.0	51.6	50.2
7	450.0250	3150.18	-67.8	-66.6	-20.0	47.8	46.6
8	450.0250	3600.20	-66.8	-61.7	-20.0	46.8	41.7
9	450.0250	4050.23	-66.3	-66.3	-20.0	46.3	46.3
10	450.0250	4500.25	-65.2	-64.7	-20.0	45.2	44.7
2	460.0000	920.00	-42.2	-48.4	-20.0	22.2	28.4
3	460.0000	1380.00	-64.5	-68.7	-20.0	44.5	48.7
4	460.0000	1840.00	-66.7	-70.3	-20.0	46.7	50.3
5	460.0000	2300.00	-66.3	-70.1	-20.0	46.3	50.1
6	460.0000	2760.00	-71.1	-71.8	-20.0	51.1	51.8

Harmonic #	Tx Freq MHz	Measured Freq MHz	Equivalent Radiated power into Dipole Vertical dBm	Horizontal dBm	Limit dBm	Margin Under Limit Vertical dB	Horizontal dB
7	460.0000	3220.00	-68.3	-68.3	-20.0	48.3	48.3
8	460.0000	3680.00	-65.8	-68.8	-20.0	45.8	48.8
9	460.0000	4140.00	-67.4	-67.9	-20.0	47.4	47.9
10	460.0000	4600.00	-66.2	-65.6	-20.0	46.2	45.6
2	469.9750	939.95	-39.6	-47.6	-20.0	19.6	27.6
3	469.9750	1409.93	-61.2	-60.9	-20.0	41.2	40.9
4	469.9750	1879.90	-57.8	-63.7	-20.0	37.8	43.7
5	469.9750	2349.88	-63.0	-68.9	-20.0	43.0	48.9
6	469.9750	2819.85	-70.7	-69.7	-20.0	50.7	49.7
7	469.9750	3289.83	-68.3	-68.0	-20.0	48.3	48.0
8	469.9750	3759.80	-66.7	-62.2	-20.0	46.7	42.2
9	469.9750	4229.78	-65.5	-65.1	-20.0	45.5	45.1
10	469.9750	4699.75	-64.0	-60.7	-20.0	44.0	40.7

Note: Tx Extended mode
Non-Harmonic frequencies

Freq MHz	Detector	Ant Pol	EUT dBm	Limit dBm	Margin dB
249.5	P	H	-60.2	-20	40.2
449.2	P	H	-58.1	-20	38.1
501.5	P	H	-54	-20	34
800	P	H	-58.5	-20	38.5
1255	P	H	-57.9	-20	37.9
1522.5	P	H	-56.9	-20	36.9
2000	P	H	-54.9	-20	34.9
2411	P	H	-54.8	-20	34.8
2982.5	P	H	-50.7	-20	30.7
3210	P	H	-51.3	-20	31.3
3712.5	P	H	-48.8	-20	28.8
3890	P	H	-46.9	-20	26.9
4500	P	H	-48.7	-20	28.7
224	P	V	-60.3	-20	40.3
299.3	P	V	-50.1	-20	30.1
339.6	P	V	-51.9	-20	31.9
408.3	P	V	-59.8	-20	39.8
430.3	P	V	-54.3	-20	34.3
512.5	P	V	-55.1	-20	35.1
570	P	V	-53.1	-20	33.1
897.5	P	V	-50.3	-20	30.3
1000	P	V	-54	-20	34
1950	P	V	-55.5	-20	35.5
2442.5	P	V	-54.4	-20	34.4
2528.1	P	V	-52.3	-20	32.3
2880	P	V	-52.8	-20	32.8
2992.5	P	V	-51.3	-20	31.3
3650	P	V	-49	-20	29

No other radiated emissions were detected within 15 dB of the limits from 30 MHz to 4.7 GHz.
Judgment: Passed by at least 15 dB.

10.5 Frequency Stability

10.5.1 Frequency Stability Vs Temperature

The chamber was then set to the lowest temperature. The transmitter was in the chamber and allowed to stabilize for 15 minutes. The transmitter was then keyed, and the frequency was recorded. The chamber was then incremented in 10°C steps with a minimum of 15-minute stabilization period for each temperature measurement. The transmitter was off during the temperature transitions.

10.5.2 Frequency Stability Vs Supply Voltage

The EUT was allowed to stabilize with the nominal primary power supply voltage applied. The primary input voltage was varied from the lowest to the highest rated levels specified by the manufacturer. Frequency readings were taken at increments of 0.2 VDC, tested to Battery End point.

10.5.3 Test Results for Frequency Stability

Model	2019-006	Specification	FCC Part 90.213 RSS-119 Section 5.3
Serial Number	2001990039	Test Date	04/14/2020
Test Personnel	Richard Tichgelaar	Test Location	Station F
Test Equipment	Spectrum Analyzer (REC-20); Freq. Counter(CNT-01); Temperature Chamber TC-01; Digital Multimeter (DMM-11)		
Notes	15 minutes at each Temperature; 1 min at each voltage		
Nominal Frequency	460.000 MHz		

Volts	Freq.	Nominal Freq:	Deviation	
VDC	(MHz)	at 3.2 VDC	Hz	PPM
2.8	460.000018	460.000000	18	0.04
3.0	460.000015	460.000000	15	0.03
3.2	460.000013	460.000000	13	0.03
3.4	460.000018	460.000000	18	0.04
3.6	460.000005	460.000000	5	0.01
3.8	460.000015	460.000000	15	0.03
4.0	460.000025	460.000000	25	0.05
4.2	460.000008	460.000000	8	0.02

Temp	Measured Freq	Nominal Freq:	Deviation	
Deg C	(MHz)	at 20 Deg C	Hz	PPM
50	460.000238	460.000000	238	0.52
40	460.000185	460.000000	185	0.40
30	460.000135	460.000000	135	0.29
20	460.000055	460.000000	55	0.12
10	459.999963	460.000000	-37	-0.08
0	459.999885	460.000000	-115	-0.25
-10	459.999940	460.000000	-60	-0.13
-20	460.000018	460.000000	18	0.04
-30	460.000023	460.000000	23	0.05

Test Requirements: Limit is 2.5 ppm
Judgement: Pass

10.6 Transient Frequency Behavior

10.6.1 Test method

The test was performed in accordance to TIA-603-D Section 2.2.19.3 Alternate Method of Measurement (Using a Test Receiver). The equipment was connected as shown below.

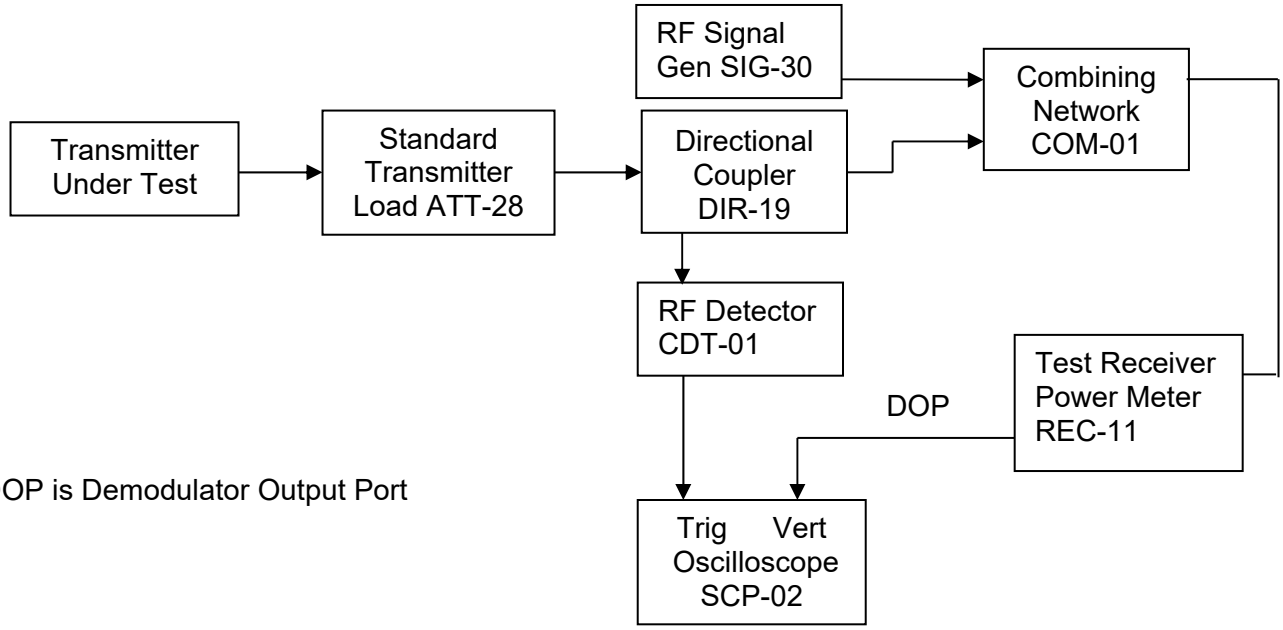

DOP is Demodulator Output Port

10.6.2 Limits of transient frequency

Time intervals [1,2]	Maximum Frequency Difference [3]	421 to 512 MHz Equipment Operating on 12.5 kHz Channels
t_1 [4]	±12.5 kHz	10.0 mSec
t_2	±6.25 kHz	25.0 mSec
t_3 [4]	±12.5 kHz	10.0 mSec

[1] t_{on} is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

t_1 is the time period immediately following t_{on}.

t_2 is the time period immediately following t_1.

t_3 is the time period from the instant when the transmitter is turned off until t_{off}.

t_{off} is the instant when the 1 kHz test signal starts to rise.

[2] During the time from the end of t_2 to the beginning of t_3, the frequency difference must not exceed the limits specified in § 90.213.

[3] Difference between the actual transmitter frequency and the assigned transmitter frequency.

[4] If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

10.6.3 Test Results

Model	2019-006	Specification	FCC part 90.214 RSS-119 Section 5.9
Serial Number	2001990039	Test Date	04-22-2020
Test Personnel	Joseph Strzelecki; Rich Tichgelaar	Test Location	Chamber C

Freq MHz	Channel BW	Limits for Time interval/Freq difference						Test Result
		t_1		t_2		t_3		
		mSec	kHz	mSec	kHz	mSec	kHz	
450.025	12.5	10	12.5	25	6.25	10	12.5*	Pass
460.000	12.5	10	12.5	25	6.25	10	12.5*	Pass
469.975	12.5	10	12.5	25	6.25	10	12.5*	Pass

Judgement: Pass

*Since the transmitter carrier output power is less than 6 watts, the frequency difference during the t3 time period may exceed the maximum frequency difference for this time period.

10.6.4 Results for Time Periods t1, t2, and t3

The EUT passed the 6.25 kHz limit so the 12.5 limit is not shown.

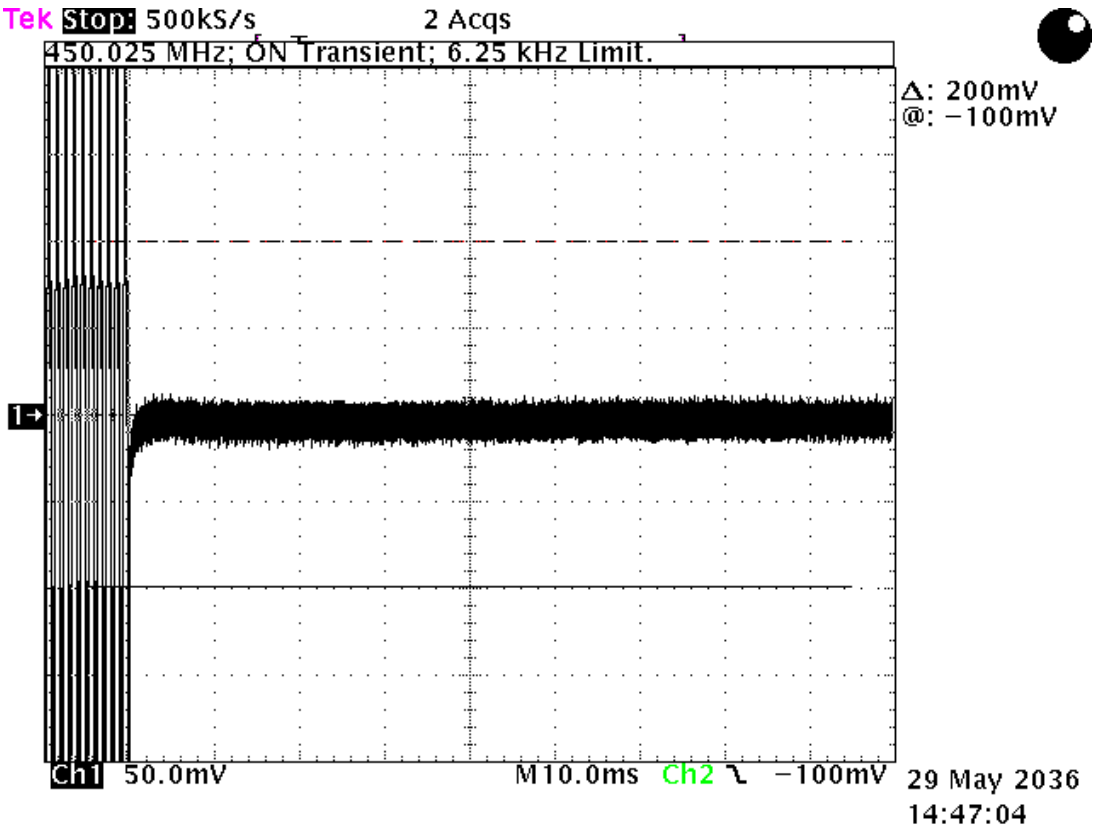

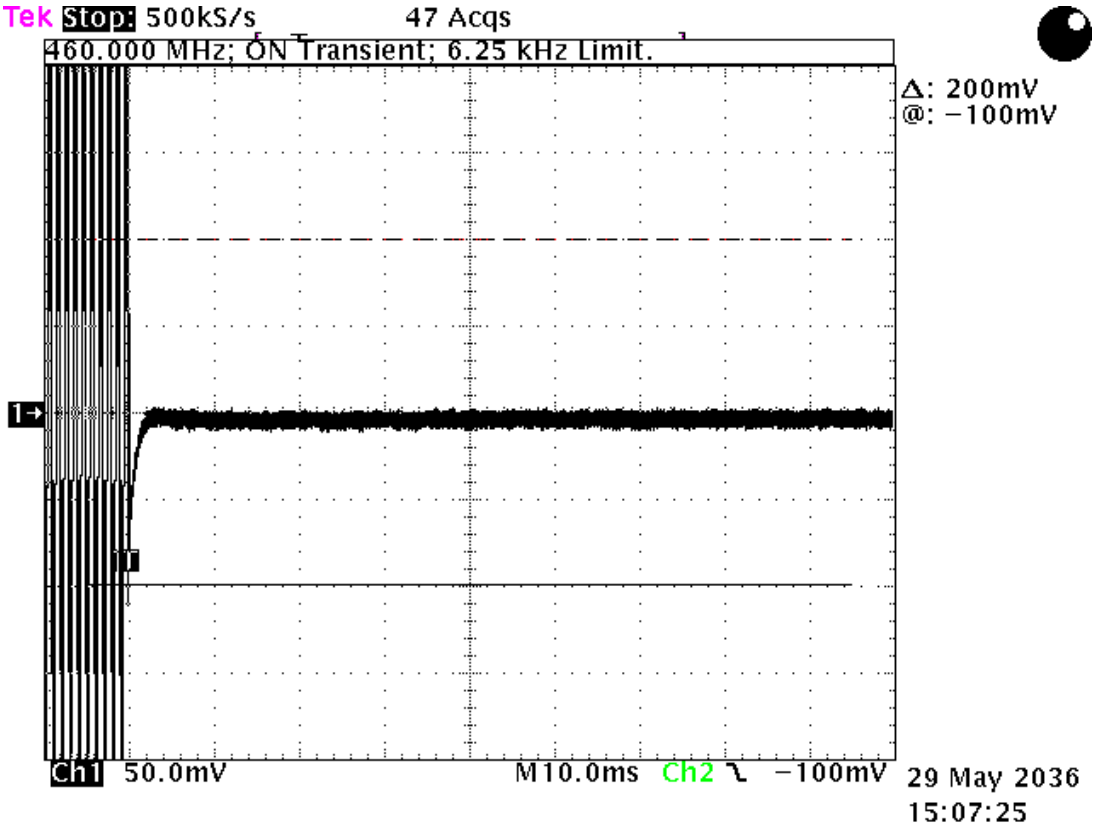

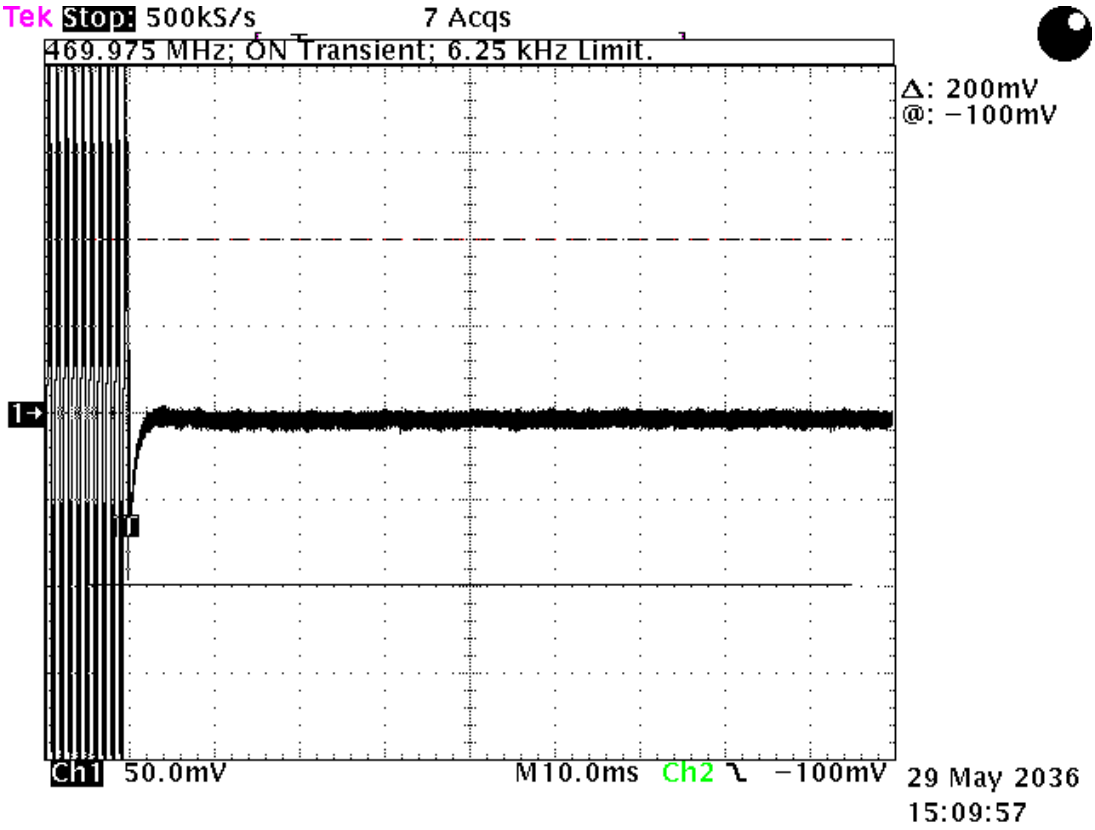

Note: The date stamp on the plots should read “22 April 2020.”

10.6.5 Results for Time Period between t2 and t3

The limit between t2 and t3 on all the scope traces are calculated for the 450 MHz Channel since this is the lowest limit. This limit is 450 MHz * 2.5 ppm or 1125 Hz.

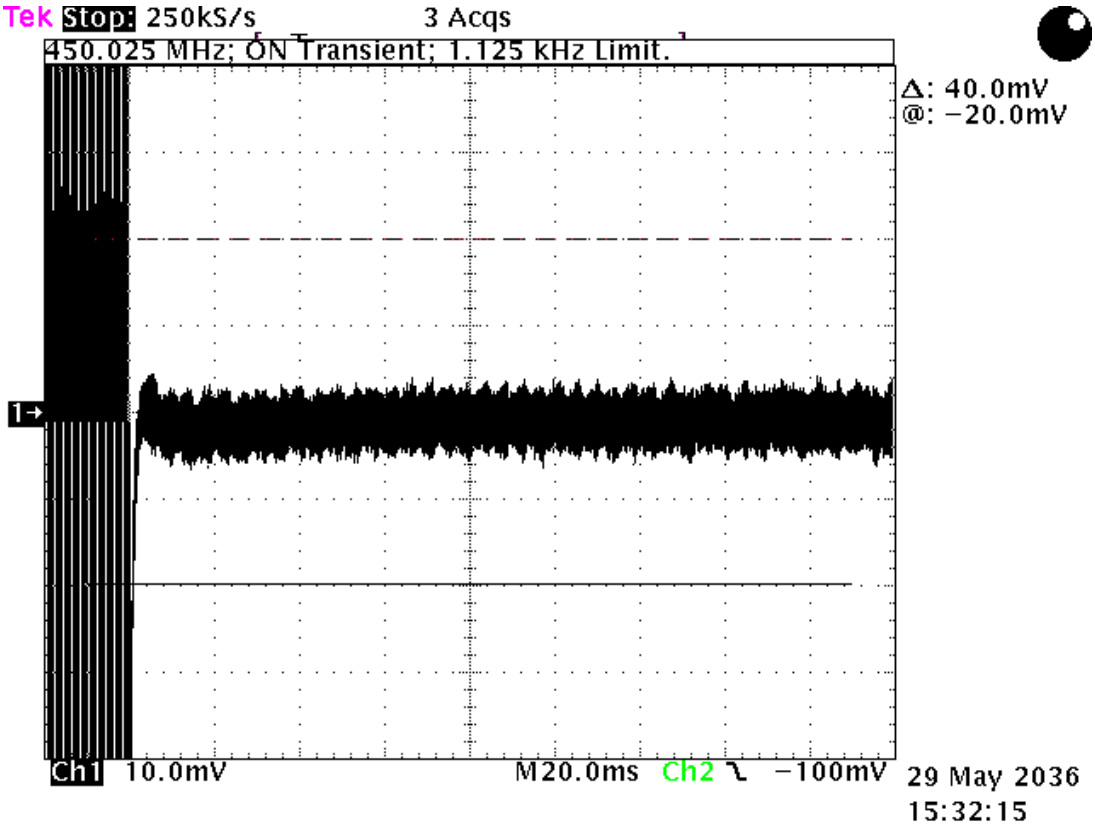

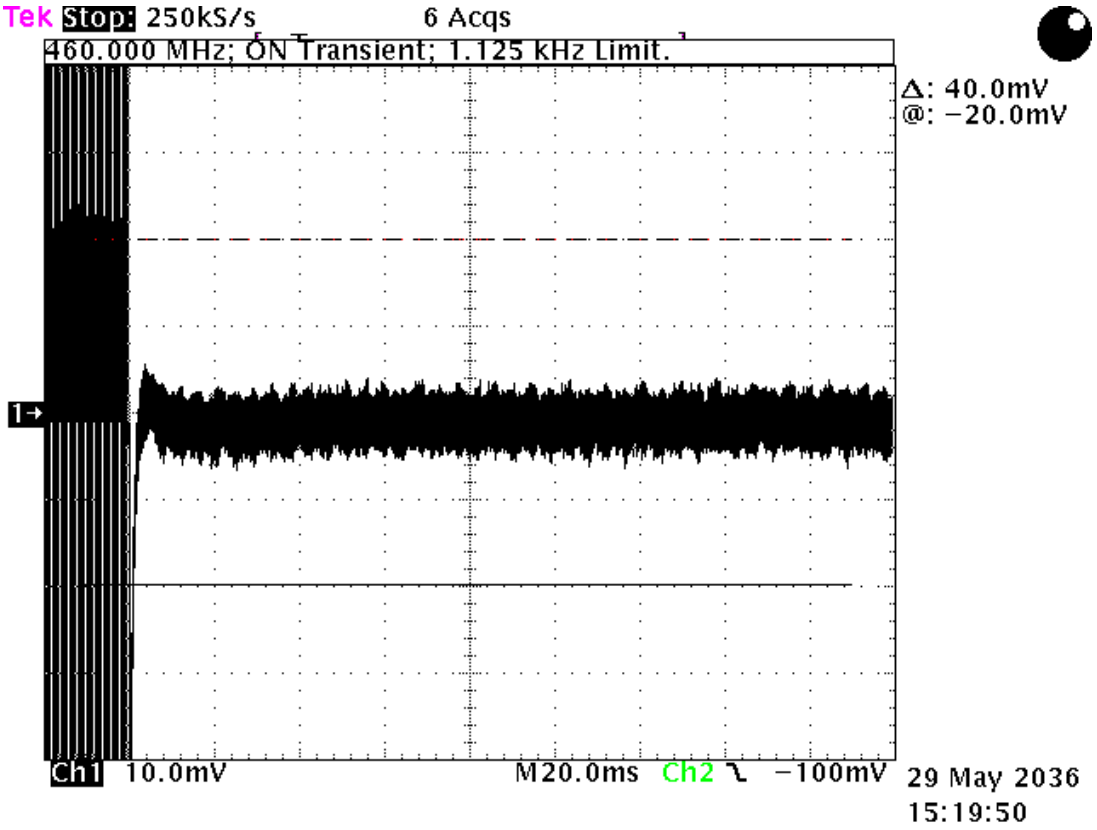

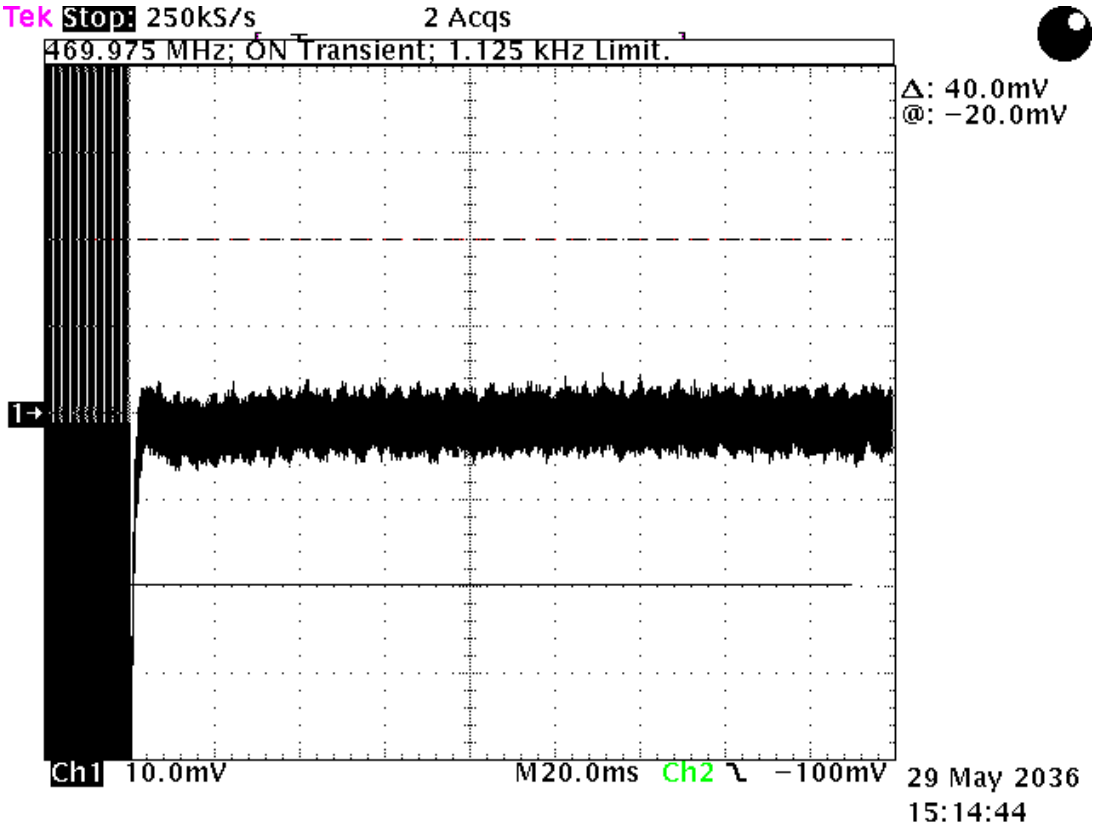

Note: The date stamp on the plots should read “22 April 2020.”

10.6.6 Results for Time Period t3

Since the transmitter carrier output power is less than 6 watts, the frequency difference during the t3 time period may exceed the maximum frequency difference for this time period.

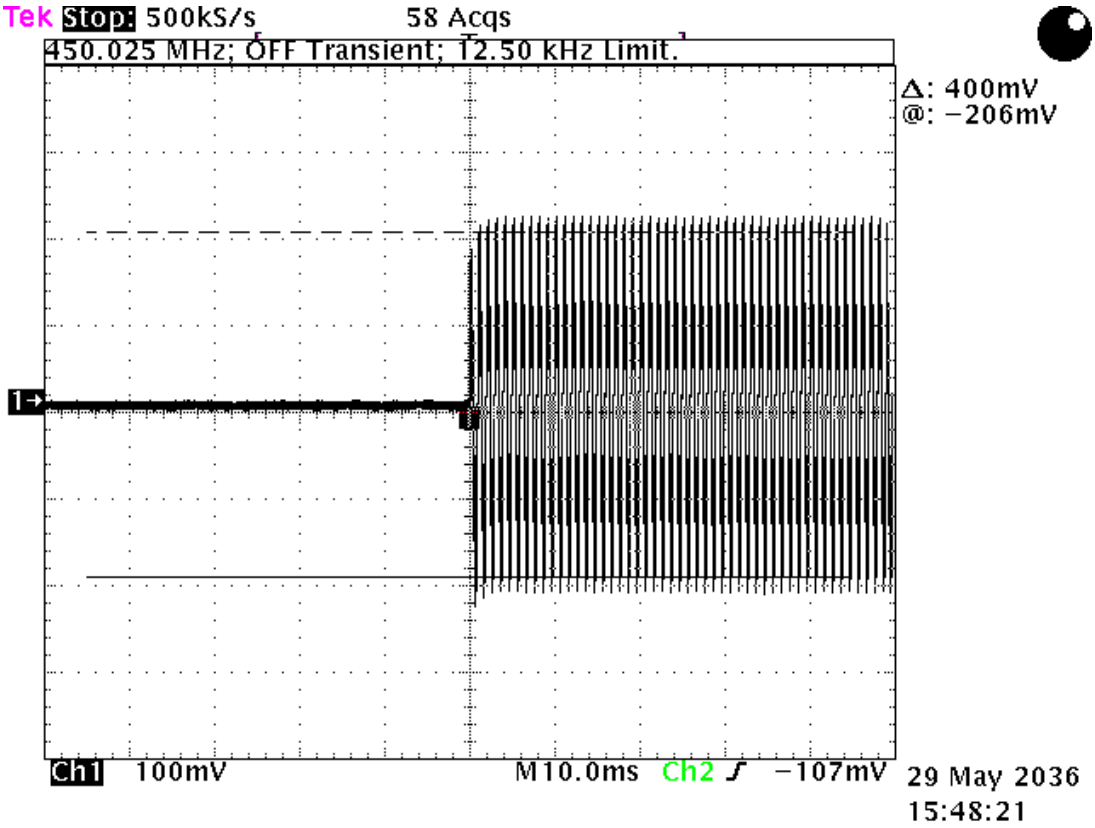

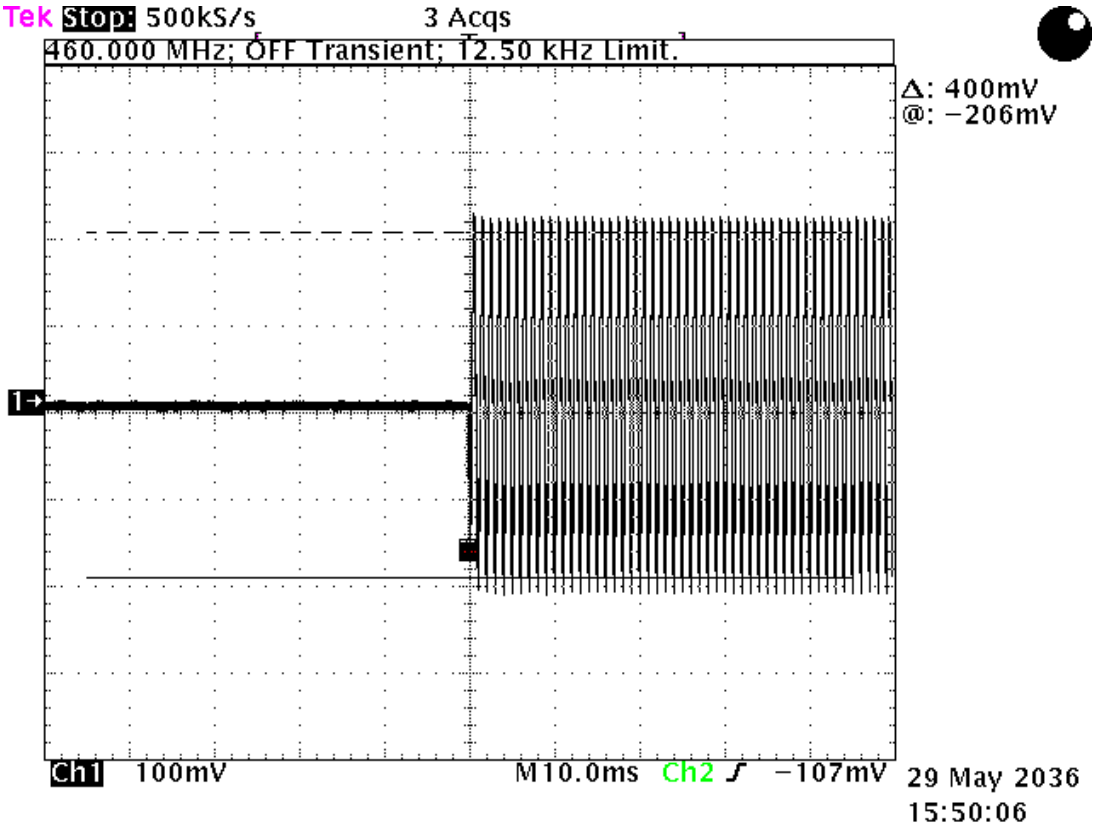

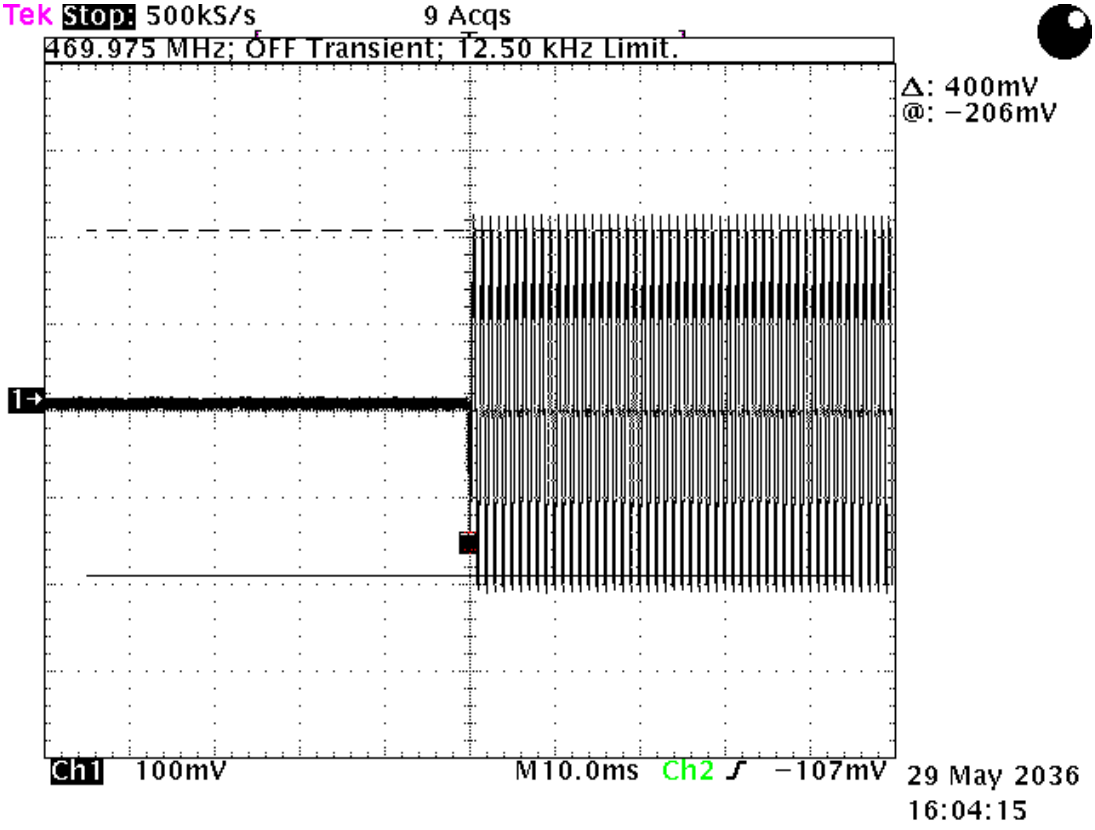

Note: The date stamp on the plots should read “22 April 2020.”

10.7 Radiated Emissions (Receive Mode)

Radiated emission measurements were performed with linearly polarized broadband antennas. The results obtained with these antennas can be correlated with results obtained with a tuned dipole antenna. The radiated emission measurements were performed with a spectrum analyzer. The bandwidth used from 150 kHz to 30 MHz is 9 or 10 kHz and the bandwidth from 30 MHz to 1000 MHz is 100 or 120 kHz. Above 1 GHz, a 1 MHz bandwidth is used. A 10-dB linearity check is performed prior to start of testing in order to determine if an overload condition exists.

From 30 to 2000 MHz, an Anritsu spectrum analyzer was used. Final radiated emissions measurements were performed inside of an anechoic chamber at a test distance of 3 meters. The anechoic chamber is designated as Chamber E. This Chamber meets the Site Attenuation requirements of ANSI C63.4 and CISPR 16-1. Chamber E is located at 12 East Devonwood Ave. Romeoville, Illinois EMI test lab.

The entire frequency range from 30 to 2000 MHz was slowly scanned with attention paid to those frequency ranges which appeared high. Measurements were performed using two antenna polarizations, (vertical and horizontal). The worst-case emissions were recorded. All measurements may be performed using either the peak, average or quasi-peak detector functions. If the peak detector data exceeds or is marginally close to the limits, the measurements are repeated using a quasi-peak detector or average function as required by the specification for final determination of compliance.

The detected emission levels were maximized by rotating the EUT, adjusting the positions of all cables, and by scanning the measurement antenna from 1 to 4 meters above the ground.

10.7.1 Radiated Emissions Field Strength Sample Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and by subtracting the Amplifier Gain from the measured reading. The basic equation is as follows:

FS = RA + AF + CF - AG

Where: FS = Field Strength
RA = Receiver Amplitude
AF = Antenna Factor
CF = Cable Attenuation Factor
AG = Amplifier Gain

10.7.2 Spurious Radiated Emissions Test Results (Receive Mode)

Model	2019-006	Specification	FCC Part 15 Subpart B & RSS-Gen
Serial Number	2001990037	Test Date	August 13, 2020
Tested by	Chris E. Dalessio, Richard Tichgelaar	Test Distance	3 Meters
Abbreviations	Pol = Antenna Polarization; V = Vertical; H = Horizontal; P = peak; Q = QP		
Notes	Corr. Factors = Cable Loss – Preamp Gain		
Configuration	Receive Mode		

Freq. MHz	Meter Reading dBuV	Dect.	Ant. Pol.	Ant Factor	Cable & Amp Factors	Dist. Fact dB	EUT dBuV/m	Limit dBuV/m	Margin Under Limit dB	Note
30.0	6.9	P	H	13.8	0.6	0.0	21.3	40.0	18.7	
33.9	14.0	P	H	12.6	0.6	0.0	27.2	40.0	12.8	
80.8	10.1	P	H	9.3	1.0	0.0	20.4	40.0	19.6	
94.6	15.9	P	H	10.0	1.0	0.0	26.9	43.5	16.6	
150.4	10.2	P	H	12.8	1.3	0.0	24.3	43.5	19.2	

Freq. MHz	Meter Reading dBuV	Dect.	Ant. Pol.	Ant Factor	Cable & Amp Factors	Dist. Fact dB	EUT dBuV/m	Limit dBuV/m	Margin Under Limit dB	Note
212.3	10.4	P	H	14.7	1.6	0.0	26.7	43.5	16.8	
251.0	9.3	P	H	15.5	1.7	0.0	26.5	46.0	19.5	
262.1	8.3	P	H	12.1	1.7	0.0	22.1	46.0	23.9	
337.1	9.7	P	H	14.2	2.0	0.0	25.9	46.0	20.1	
409.5	10.6	P	H	15.5	2.2	0.0	28.3	46.0	17.7	
498.4	10.2	P	H	17.8	2.4	0.0	30.4	46.0	15.6	
598.8	9.6	P	H	18.7	2.7	0.0	31.0	46.0	15.0	
813.8	10.1	P	H	21.5	3.2	0.0	34.8	46.0	11.2	
946.3	8.3	P	H	23.2	3.4	0.0	34.9	46.0	11.1	
1000.0	8.7	P	H	24.0	3.5	0.0	36.2	54.0	17.8	
1100.0	39.6	P	H	24.5	-32.1	0.0	32.0	74.0	42.0	1
1247.5	41.0	P	H	25.2	-31.9	0.0	34.3	74.0	39.7	1
1470.0	40.7	P	H	25.1	-31.7	0.0	34.1	74.0	39.9	1
1747.5	39.9	P	H	26.8	-31.4	0.0	35.3	74.0	38.7	1
1925.0	40.3	P	H	27.3	-31.2	0.0	36.4	74.0	37.6	1
2000.0	39.5	P	H	27.4	-31.0	0.0	35.9	74.0	38.1	1
30.0	7.4	P	V	13.8	0.6	0.0	21.8	40.0	18.2	
33.9	13.5	P	V	12.6	0.6	0.0	26.7	40.0	13.3	
48.2	13.6	P	V	9.8	0.8	0.0	24.2	40.0	15.8	
81.4	14.7	P	V	9.3	1.0	0.0	25.0	40.0	15.0	
91.9	14.4	P	V	9.8	1.0	0.0	25.2	43.5	18.3	
102.9	15.2	P	V	10.4	1.1	0.0	26.7	43.5	16.8	
121.7	10.8	P	V	11.8	1.2	0.0	23.8	43.5	19.7	
148.8	8.9	P	V	12.7	1.3	0.0	22.9	43.5	20.6	
188.6	8.6	P	V	13.8	1.5	0.0	23.9	43.5	19.6	
219.5	8.6	P	V	14.9	1.6	0.0	25.1	46.0	20.9	
251.0	9.5	P	V	15.5	1.7	0.0	26.7	46.0	19.3	
256.4	7.3	P	V	12.0	1.7	0.0	21.0	46.0	25.0	
377.4	9.3	P	V	14.6	2.1	0.0	26.0	46.0	20.0	
488.3	11.1	P	V	17.3	2.4	0.0	30.8	46.0	15.2	
515.0	8.1	P	V	19.0	2.5	0.0	29.6	46.0	16.4	
558.8	9.9	P	V	18.2	2.6	0.0	30.7	46.0	15.3	
652.5	9.7	P	V	19.9	2.8	0.0	32.4	46.0	13.6	
916.3	7.9	P	V	22.9	3.3	0.0	34.1	46.0	11.9	
1000.0	8.8	P	V	24.0	3.5	0.0	36.3	54.0	17.7	
1220.0	39.8	P	V	25.0	-32.0	0.0	32.8	74.0	41.2	1
1582.5	40.2	P	V	25.2	-31.6	0.0	33.8	74.0	40.2	1
1850.0	40.3	P	V	27.0	-31.2	0.0	36.1	74.0	37.9	1
2000.0	39.6	P	V	27.4	-31.0	0.0	36.0	74.0	38.0	1

Note 1; Peak reading meeting the average limit, so the average reading is not required.
Judgment: Pass by at least 9.9 dB

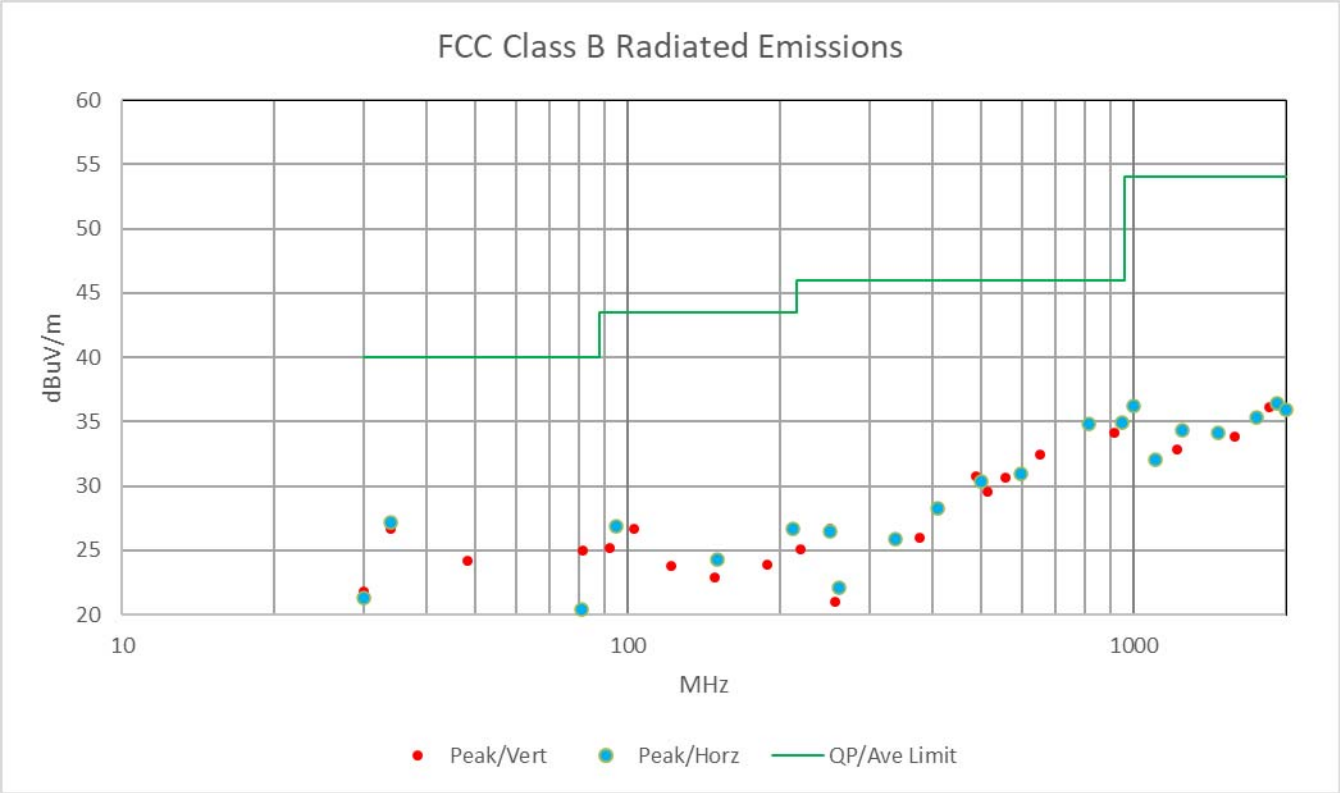

Radiated emissions in a graphical format. The above chart is the same data as the previous table. The peak limit is not shown, since the peak readings meet the lower average limit.

11.0 MEASUREMENT INSTRUMENTATION UNCERTAINTY

Measurement	Uncertainty
Radiated Emissions, E-field, 3 meters, 30 to 200 MHz	3.3 dB
Radiated Emissions, E-field, 3 meters, 200 to 1000 MHz	4.9 dB
Radiated Emissions, E-field, 3 meters, 1 to 18 GHz	4.8 dB
99% Occupied Bandwidth using REC-43	1% of frequency span
Conducted power PWM-01 at 460 MHz	0.14 dB
Amplitude measurement 1-5000 MHz	1.5 dB
Temperature THM-02	0.6 Deg. C

The uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k=2 in accordance with CISPR 16-4-2.